

FCC TEST REPORT

FCC ID:2A22E-WWYLT26

Report Number..... : ZKT-211029L5839-01

Date of Test..... Sep. 22, 2021 – Nov. 10, 2021

Date of issue : Nov. 10, 2021

Total number of pages 88

Test Result : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Micronet Union Technology(Chengdu) Co., Ltd

Address : Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China

Manufacturer's name : Micronet Union Technology(Chengdu) Co., Ltd

Address : Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

KDB558074 D0115.247 Meas Guidance v 05r02

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : AX1500 Wi-Fi 6 Router

Trademark : /

Model/Type reference : T26-BXX, T26-PQX, T26-GDX, T26-21X (the last X=A-Z or a-z, which indicates for different appearance, dimension and color.)

Ratings..... : DC12V 1A from adapter


Testing procedure and testing location:**Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.****Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China****Tested by (name + signature).....: Alen He****Reviewer (name + signature).....: Joe Liu****Approved (name + signature).....: Lake Xie**

Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. EMC EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.1.6 TEST RESULT	13
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS	18
5.RADIATED BAND EMISSIONMEASUREMENT	32
5.1 TEST REQUIREMENT:	32
5.2 TEST PROCEDURE	32
5.3 DEVIATION FROM TEST STANDARD	32
5.4 TEST SETUP	33
5.5 EUT OPERATING CONDITIONS	33
5.6 TEST RESULT	34
6.POWER SPECTRAL DENSITY TEST	38
6.1 APPLIED PROCEDURES / LIMIT	38
6.2 TEST PROCEDURE	38
6.3 DEVIATION FROM STANDARD	38
6.4 TEST SETUP	38
6.5 EUT OPERATION CONDITIONS	38

6.6 TEST RESULT	39
7. CHANNEL BANDWIDTH	44
7.1 APPLIED PROCEDURES / LIMIT	44
7.2 TEST PROCEDURE	44
7.3 DEVIATION FROM STANDARD	44
7.4 TEST SETUP	44
7.5 EUT OPERATION CONDITIONS	44
7.6 TEST RESULT	45
8. OUTPUT POWER TEST	50
8.1 APPLIED PROCEDURES/LIMIT	50
8.2 TEST PROCEDURE	50
8.3 DEVIATION FROM STANDARD	50
8.4 TEST SETUP	50
8.5 EUT OPERATION CONDITIONS	50
8.6 TEST RESULT	51
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	52
9.1 APPLICABLE STANDARD	52
9.2 TEST PROCEDURE	52
9.3 DEVIATION FROM STANDARD	52
9.4 TEST SETUP	52
9.5 EUT OPERATION CONDITIONS	52
9.6 TEST RESULTS	52
10. ANTENNA REQUIREMENT	85
11. TEST SETUP PHOTO	86
12. EUT CONSTRUCTIONAL DETAILS	88

1. VERSION

Report No.	Version	Description	Approved
ZKT-211029L5839-01	Rev.01	Initial issue of report	Nov. 10, 2021

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	AX1500 Wi-Fi 6 Router	
Model No.:	T26-BXX (the last X=A-Z or a-z, which indicates for different appearance, dimension and color.)	
Model Different.:	The antenna of each series model is different,the antenna structure is different, and the color, shape, size of each series model are different	
Serial No.:	T26-PQX, T26-GDX, T26-21X (the last X=A-Z or a-z, which indicates for different appearance, dimension and color.)	
Sample(s) Status:	Engineer sample	
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7	
Channel separation:	5MHz	
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11 n(HT40): Orthogonal Frequency Division Multiplexing(OFDM)	
Antenna Type:	FPC antenna	
Antenna gain:	WIFI ANT1: 5dBi; WIFI ANT2:: 5dBi ;	MIMO: 8.01dBi

Power supply:	DC12V 1A from adapter
POWER ADAPTER:	MODEL NO.:MAUS-1201001202 INPUT:100-240V 50/60Hz 0.35A OUTPUT: 12V 1A

NOTE: The product has two wifi modules that support 2.4GWIFI. In order to distinguish the test data and results, they will be divided into module A and module B

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

Test channel	Frequency (MHz)
	802.11n(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

Worst Case Configuration

Description	MIMO (802.11N-HT20 low channel)
Antenna	MIMO
Channel	1
Operating Frequency (MHz)	2412
Data Rate (Mbps)	6.5Mbps

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply	

condition. So the report just shows that condition's data.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	MCS0

Test Software	Realtek Test Tool
Power level setup	<20dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	adapter	/	INPUT:100-240V 50/60Hz 0.35A OUTPUT: 12V 1A	MODEL NO.: MAUS-1201001202	Provide by client

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 21, 2021	Sep. 22, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 21, 2021	Sep. 22, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Sep. 21, 2021	Sep. 22, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 21, 2021	Sep. 22, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Sep. 21, 2021	Sep. 22, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 21, 2021	Sep. 22, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 21, 2021	Sep. 22, 2022
8	Amplifier (1GHz-40GHz)	QUANJUDA	DLE-161	097	Sep. 21, 2021	Sep. 22, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Sep. 21, 2021	Sep. 22, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 21, 2021	Sep. 22, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 21, 2021	Sep. 22, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 21, 2021	Sep. 22, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 21, 2021	Sep. 22, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 21, 2021	Sep. 22, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 21, 2021	Sep. 22, 2022
3	Test Cable	N/A	C01	N/A	Sep. 21, 2021	Sep. 22, 2022
4	Test Cable	N/A	C02	N/A	Sep. 21, 2021	Sep. 22, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 21, 2021	Sep. 22, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 21, 2021	Sep. 22, 2022

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.e.
8. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

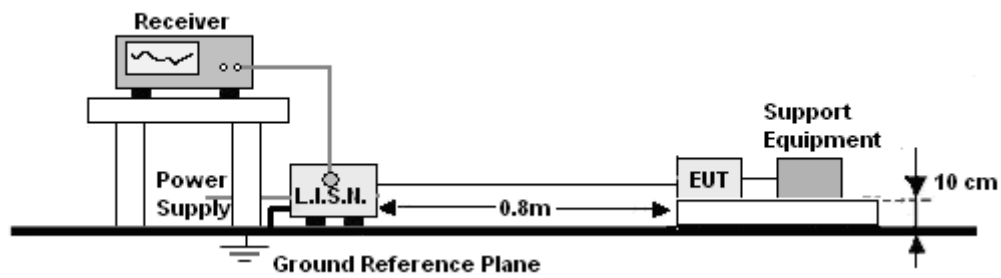


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT


Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase	L
Test Voltage :	AC 120V/60Hz		

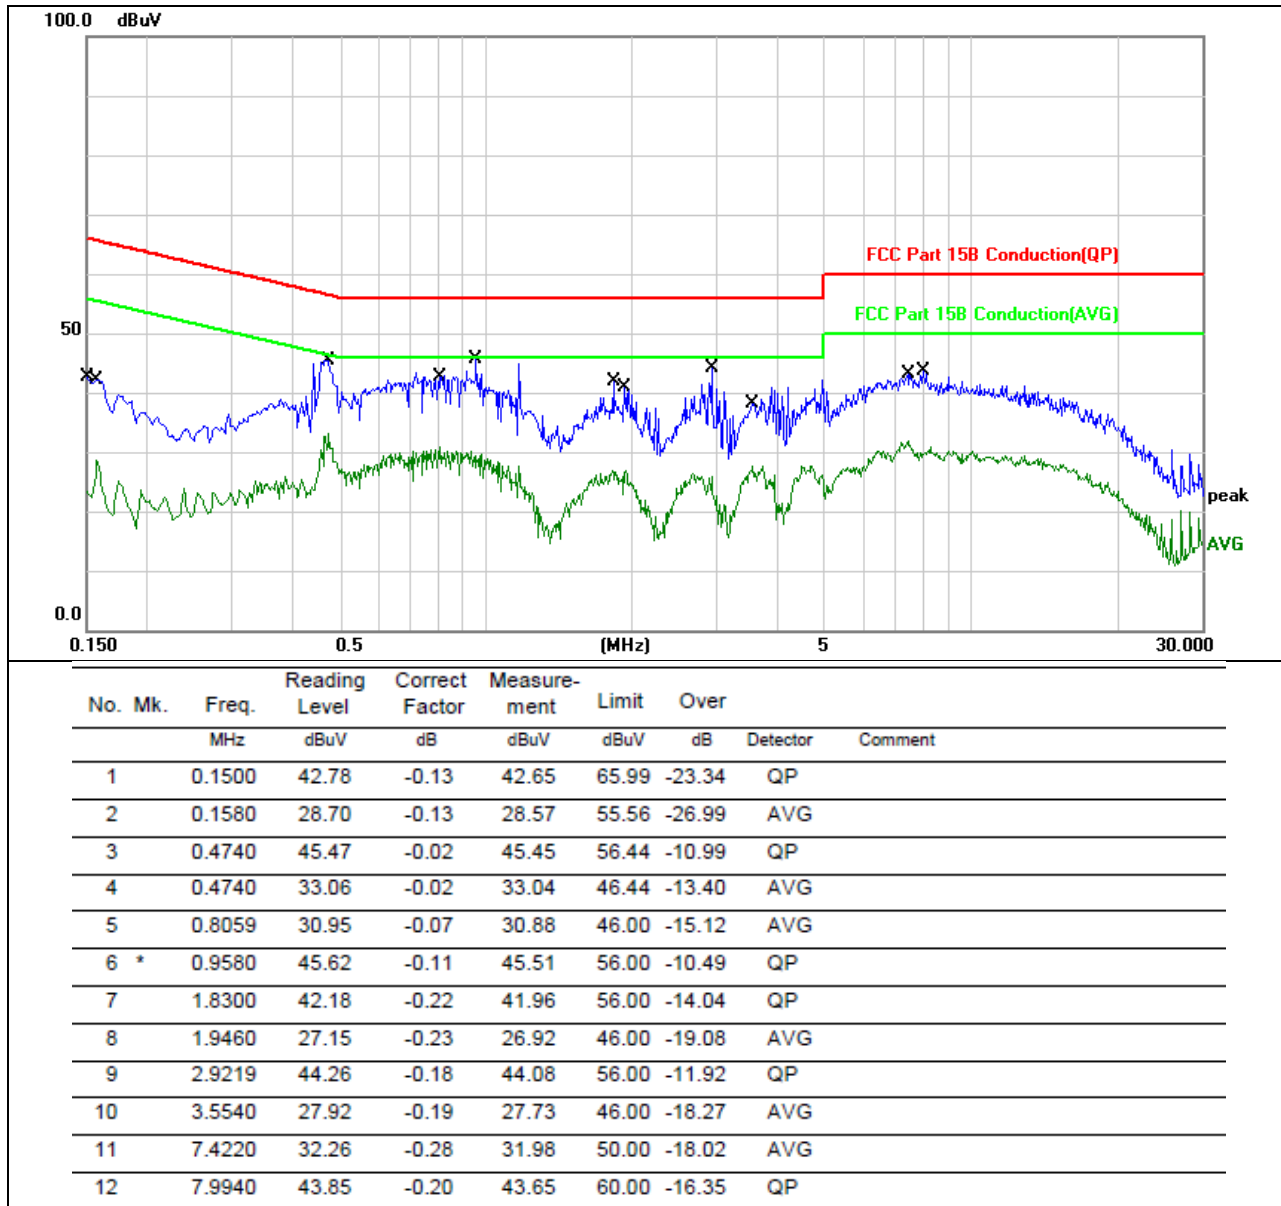

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

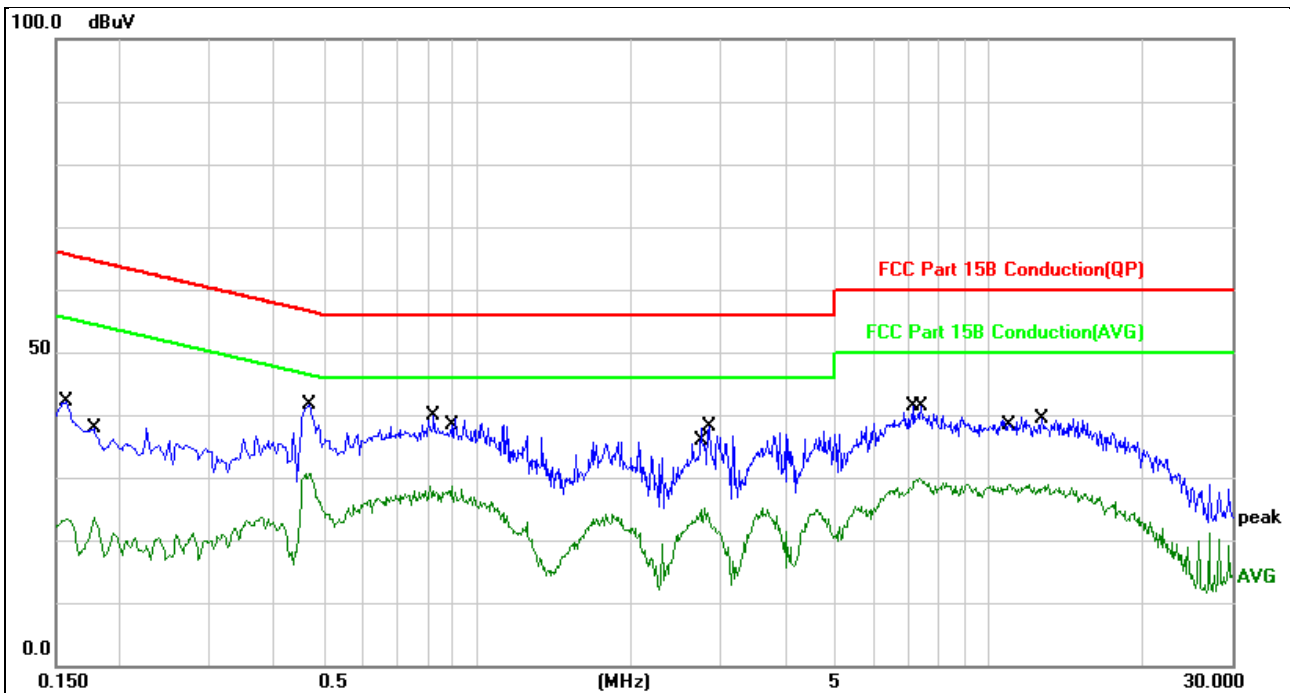

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	42.20	-0.13	42.07	65.56	-23.49	QP	
2		0.1780	23.65	-0.13	23.52	54.57	-31.05	AVG	
3	*	0.4700	41.58	-0.02	41.56	56.51	-14.95	QP	
4		0.4700	30.70	-0.02	30.68	46.51	-15.83	AVG	
5		0.8260	40.07	-0.08	39.99	56.00	-16.01	QP	
6		0.8900	28.78	-0.10	28.68	46.00	-17.32	AVG	
7		2.7940	25.17	-0.17	25.00	46.00	-21.00	AVG	
8		2.8460	38.31	-0.17	38.14	56.00	-17.86	QP	
9		7.1700	41.59	-0.28	41.31	60.00	-18.69	QP	
10		7.3500	30.23	-0.28	29.95	50.00	-20.05	AVG	
11		10.9900	28.93	-0.12	28.81	50.00	-21.19	AVG	
12		12.7460	39.56	-0.14	39.42	60.00	-20.58	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

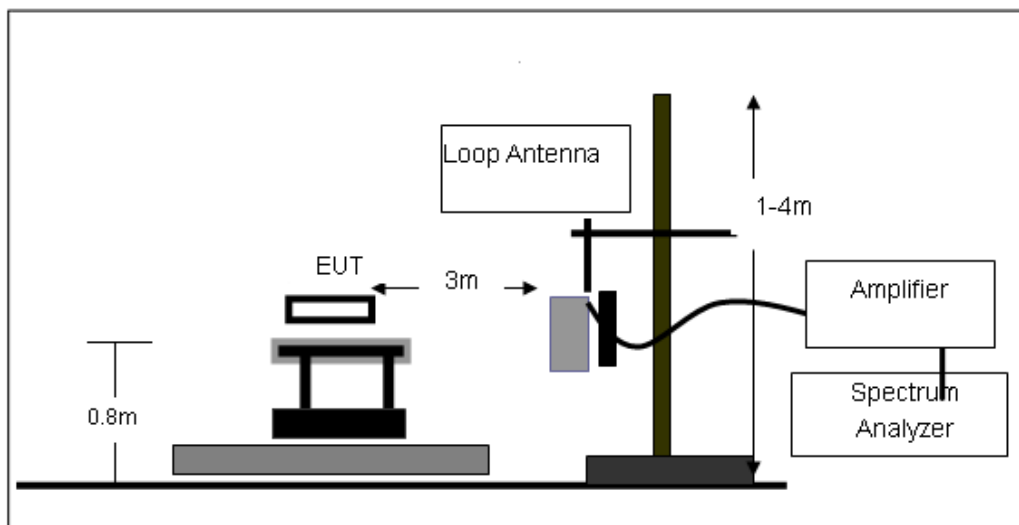

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

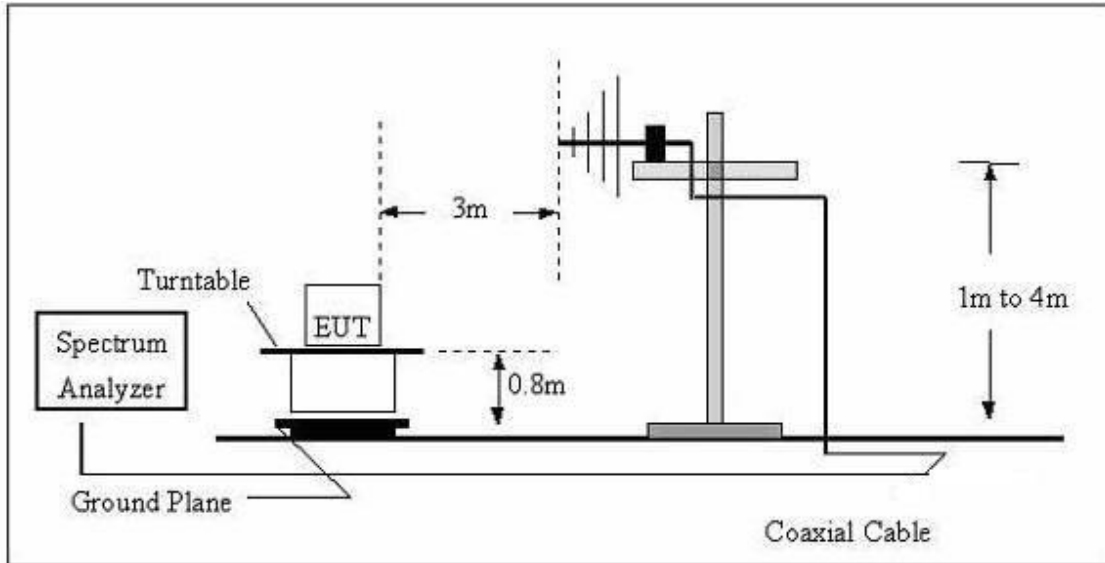

(C) Radiated Emission Test-Up Frequency Above 1GHz

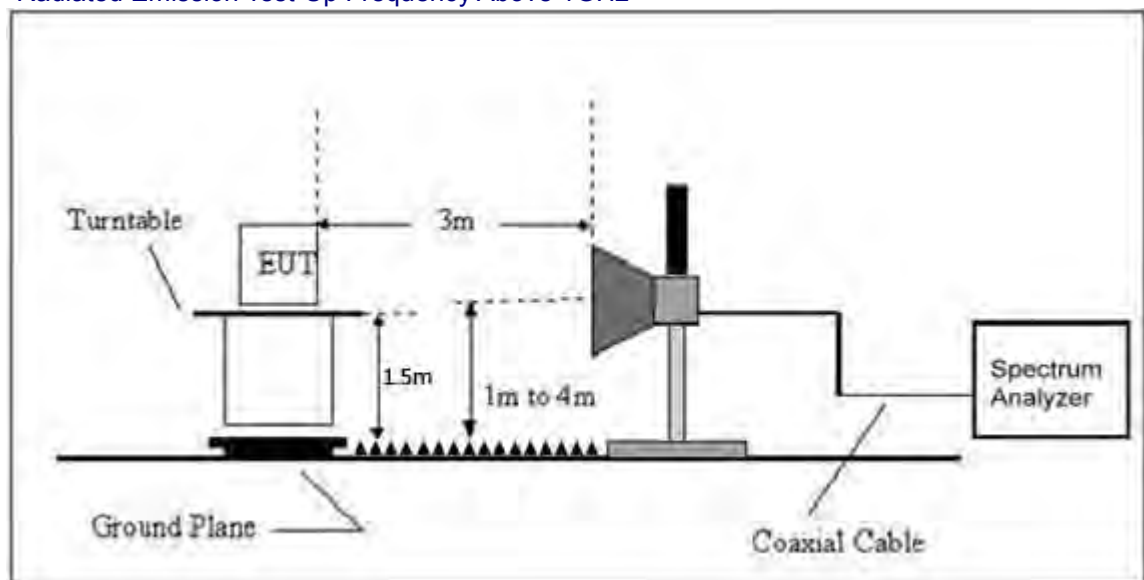

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

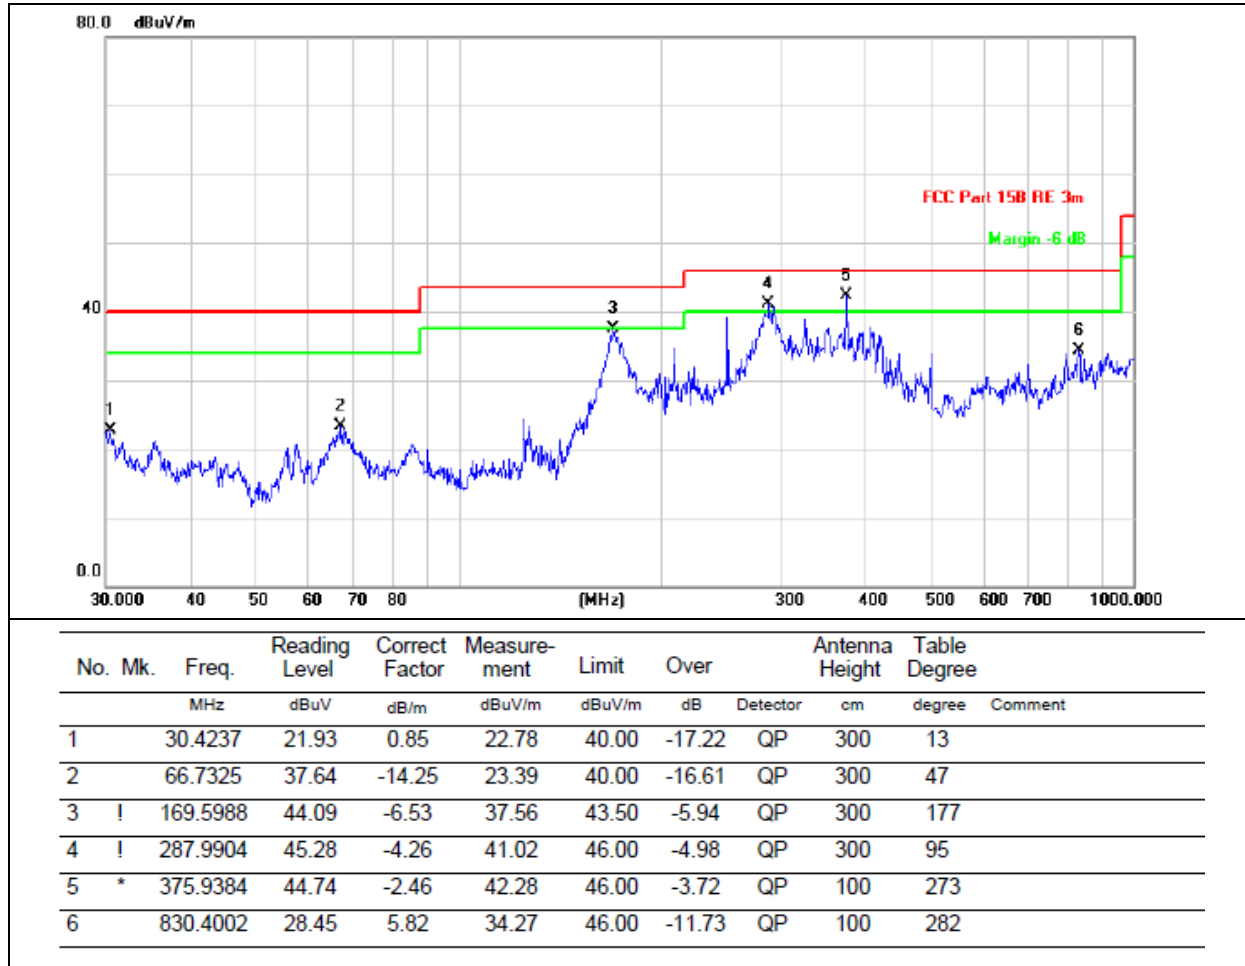

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

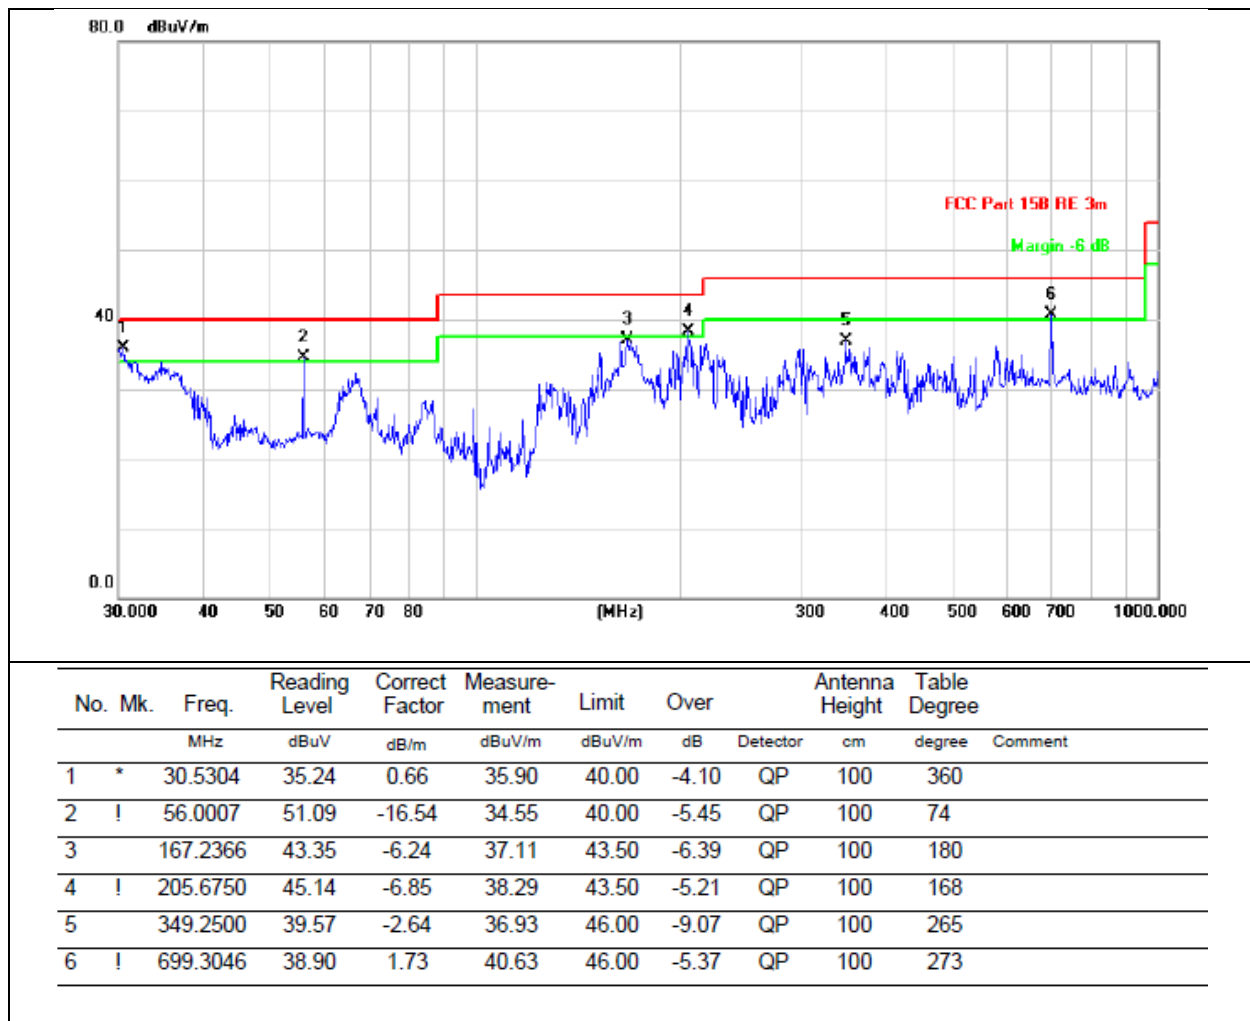

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case- MIMO -802.11N-HT20 highest channel

1GHz~25GHz

802.11b-ANT1

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	52.72	30.55	5.77	24.66	52.60	74	-21.40	PK
V	4824	40.26	30.55	5.77	24.66	40.14	54	-13.86	AV
V	7236	53.05	30.33	6.32	24.55	53.59	74	-20.41	PK
V	7236	39.58	30.33	6.32	24.55	40.12	54	-13.88	AV
V	9648	51.58	30.85	7.45	24.69	52.87	74	-21.13	PK
V	9648	38.26	30.85	7.45	24.69	39.55	54	-14.45	AV
H	4824	55.52	30.55	5.77	24.66	55.40	74	-18.60	PK
H	4824	41.65	30.55	5.77	24.66	41.53	54	-12.47	AV
H	7236	53.48	30.33	6.32	24.55	54.02	74	-19.98	PK
H	7236	41.52	30.33	6.32	24.55	42.06	54	-11.94	AV
H	9648	52.99	30.85	7.45	24.69	54.28	74	-19.72	PK
H	9648	36.85	30.85	7.45	24.69	38.14	54	-15.86	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	53.92	30.55	5.77	24.66	53.80	74	-20.20	PK
V	4874	40.13	30.55	5.77	24.66	40.01	54	-13.99	AV
V	7311	52.56	30.33	6.32	24.55	53.10	74	-20.90	PK
V	7311	40.86	30.33	6.32	24.55	41.40	54	-12.60	AV
V	9748	50.93	30.85	7.45	24.69	52.22	74	-21.78	PK
V	9748	37.57	30.85	7.45	24.69	38.86	54	-15.14	AV
H	4874	52.22	30.55	5.77	24.66	52.10	74	-21.90	PK
H	4874	40.84	30.55	5.77	24.66	40.72	54	-13.28	AV
H	7311	52.22	30.33	6.32	24.55	52.76	74	-21.24	PK
H	7311	41.36	30.33	6.32	24.55	41.90	54	-12.10	AV
H	9748	52.79	30.85	7.45	24.69	54.08	74	-19.92	PK
H	9748	36.10	30.85	7.45	24.69	37.39	54	-16.61	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	54.49	30.55	5.77	24.66	54.37	74	-19.63	PK
V	4924	40.53	30.55	5.77	24.66	40.41	54	-13.59	AV
V	7386	51.84	30.33	6.32	24.55	52.38	74	-21.62	PK
V	7386	41.66	30.33	6.32	24.55	42.20	54	-11.80	AV
V	9848	51.01	30.85	7.45	24.69	52.30	74	-21.70	PK
V	9848	40.73	30.85	7.45	24.69	42.02	54	-11.98	AV
H	4924	53.45	30.55	5.77	24.66	53.33	74	-20.67	PK
H	4924	41.43	30.55	5.77	24.66	41.31	54	-12.69	AV
H	7386	53.52	30.33	6.32	24.55	54.06	74	-19.94	PK
H	7386	41.61	30.33	6.32	24.55	42.15	54	-11.85	AV
H	9848	53.57	30.85	7.45	24.69	54.86	74	-19.14	PK
H	9848	37.66	30.85	7.45	24.69	38.95	54	-15.05	AV

802.11g-ANT1

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	52.09	30.55	5.77	24.66	51.97	74	-22.03	PK
V	4824	41.10	30.55	5.77	24.66	40.98	54	-13.02	AV
V	7236	53.23	30.33	6.32	24.55	53.77	74	-20.23	PK
V	7236	39.15	30.33	6.32	24.55	39.69	54	-14.31	AV
V	9648	51.30	30.85	7.45	24.69	52.59	74	-21.41	PK
V	9648	37.27	30.85	7.45	24.69	38.56	54	-15.44	AV
H	4824	55.24	30.55	5.77	24.66	55.12	74	-18.88	PK
H	4824	40.16	30.55	5.77	24.66	40.04	54	-13.96	AV
H	7236	53.19	30.33	6.32	24.55	53.73	74	-20.27	PK
H	7236	39.17	30.33	6.32	24.55	39.71	54	-14.29	AV
H	9648	52.77	30.85	7.45	24.69	54.06	74	-19.94	PK
H	9648	37.43	30.85	7.45	24.69	38.72	54	-15.28	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	55.36	30.55	5.77	24.66	55.24	74	-18.76	PK
V	4874	41.11	30.55	5.77	24.66	40.99	54	-13.01	AV
V	7311	53.54	30.33	6.32	24.55	54.08	74	-19.92	PK
V	7311	39.46	30.33	6.32	24.55	40.00	54	-14.00	AV
V	9748	52.52	30.85	7.45	24.69	53.81	74	-20.19	PK
V	9748	37.66	30.85	7.45	24.69	38.95	54	-15.05	AV
H	4874	52.89	30.55	5.77	24.66	52.77	74	-21.23	PK
H	4874	42.18	30.55	5.77	24.66	42.06	54	-11.94	AV
H	7311	53.53	30.33	6.32	24.55	54.07	74	-19.93	PK
H	7311	40.90	30.33	6.32	24.55	41.44	54	-12.56	AV
H	9748	53.43	30.85	7.45	24.69	54.72	74	-19.28	PK
H	9748	36.29	30.85	7.45	24.69	37.58	54	-16.42	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	54.59	30.55	5.77	24.66	54.47	74	-19.53	PK
V	4924	41.53	30.55	5.77	24.66	41.41	54	-12.59	AV
V	7386	52.56	30.33	6.32	24.55	53.10	74	-20.90	PK
V	7386	40.66	30.33	6.32	24.55	41.20	54	-12.80	AV
V	9848	51.07	30.85	7.45	24.69	52.36	74	-21.64	PK
V	9848	40.56	30.85	7.45	24.69	41.85	54	-12.15	AV
H	4924	54.44	30.55	5.77	24.66	54.32	74	-19.68	PK
H	4924	41.76	30.55	5.77	24.66	41.64	54	-12.36	AV
H	7386	52.47	30.33	6.32	24.55	53.01	74	-20.99	PK
H	7386	41.69	30.33	6.32	24.55	42.23	54	-11.77	AV
H	9848	51.70	30.85	7.45	24.69	52.99	74	-21.01	PK
H	9848	37.59	30.85	7.45	24.69	38.88	54	-15.12	AV

802.11n20-ANT1

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	53.19	30.55	5.77	24.66	53.07	74	-20.93	PK
V	4824	42.65	30.55	5.77	24.66	42.53	54	-11.47	AV
V	7236	53.05	30.33	6.32	24.55	53.59	74	-20.41	PK
V	7236	39.74	30.33	6.32	24.55	40.28	54	-13.72	AV
V	9648	52.29	30.85	7.45	24.69	53.58	74	-20.42	PK
V	9648	40.43	30.85	7.45	24.69	41.72	54	-12.28	AV
H	4824	54.73	30.55	5.77	24.66	54.61	74	-19.39	PK
H	4824	40.35	30.55	5.77	24.66	40.23	54	-13.77	AV
H	7236	52.42	30.33	6.32	24.55	52.96	74	-21.04	PK
H	7236	40.75	30.33	6.32	24.55	41.29	54	-12.71	AV
H	9648	52.73	30.85	7.45	24.69	54.02	74	-19.98	PK
H	9648	37.66	30.85	7.45	24.69	38.95	54	-15.05	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	54.78	30.55	5.77	24.66	54.66	74	-19.34	PK
V	4874	42.69	30.55	5.77	24.66	42.57	54	-11.43	AV
V	7311	52.54	30.33	6.32	24.55	53.08	74	-20.92	PK
V	7311	39.80	30.33	6.32	24.55	40.34	54	-13.66	AV
V	9748	51.08	30.85	7.45	24.69	52.37	74	-21.63	PK
V	9748	39.80	30.85	7.45	24.69	41.09	54	-12.91	AV
H	4874	53.64	30.55	5.77	24.66	53.52	74	-20.48	PK
H	4874	40.82	30.55	5.77	24.66	40.70	54	-13.30	AV
H	7311	53.02	30.33	6.32	24.55	53.56	74	-20.44	PK
H	7311	40.64	30.33	6.32	24.55	41.18	54	-12.82	AV
H	9748	52.75	30.85	7.45	24.69	54.04	74	-19.96	PK
H	9748	38.45	30.85	7.45	24.69	39.74	54	-14.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	52.62	30.55	5.77	24.66	52.50	74	-21.50	PK
V	4924	41.62	30.55	5.77	24.66	41.50	54	-12.50	AV
V	7386	53.38	30.33	6.32	24.55	53.92	74	-20.08	PK
V	7386	40.31	30.33	6.32	24.55	40.85	54	-13.15	AV
V	9848	51.44	30.85	7.45	24.69	52.73	74	-21.27	PK
V	9848	38.22	30.85	7.45	24.69	39.51	54	-14.49	AV
H	4924	52.74	30.55	5.77	24.66	52.62	74	-21.38	PK
H	4924	40.93	30.55	5.77	24.66	40.81	54	-13.19	AV
H	7386	52.24	30.33	6.32	24.55	52.78	74	-21.22	PK
H	7386	39.33	30.33	6.32	24.55	39.87	54	-14.13	AV
H	9848	52.62	30.85	7.45	24.69	53.91	74	-20.09	PK
H	9848	38.84	30.85	7.45	24.69	40.13	54	-13.87	AV

802.11n40-ANT1

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844	54.88	30.55	5.77	24.66	54.76	74	-19.24	PK
V	4844	39.82	30.55	5.77	24.66	39.70	54	-14.30	AV
V	7266	52.18	30.33	6.32	24.55	52.72	74	-21.28	PK
V	7266	39.48	30.33	6.32	24.55	40.02	54	-13.98	AV
V	9688	52.30	30.85	7.45	24.69	53.59	74	-20.41	PK
V	9688	39.37	30.85	7.45	24.69	40.66	54	-13.34	AV
H	4844	54.78	30.55	5.77	24.66	54.66	74	-19.34	PK
H	4844	41.55	30.55	5.77	24.66	41.43	54	-12.57	AV
H	7266	51.94	30.33	6.32	24.55	52.48	74	-21.52	PK
H	7266	40.58	30.33	6.32	24.55	41.12	54	-12.88	AV
H	9688	52.46	30.85	7.45	24.69	53.75	74	-20.25	PK
H	9688	38.23	30.85	7.45	24.69	39.52	54	-14.48	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	51.82	30.55	5.77	24.66	51.70	74	-22.30	PK
V	4874	40.78	30.55	5.77	24.66	40.66	54	-13.34	AV
V	7311	53.71	30.33	6.32	24.55	54.25	74	-19.75	PK
V	7311	40.55	30.33	6.32	24.55	41.09	54	-12.91	AV
V	9748	52.24	30.85	7.45	24.69	53.53	74	-20.47	PK
V	9748	37.19	30.85	7.45	24.69	38.48	54	-15.52	AV
H	4874	52.84	30.55	5.77	24.66	52.72	74	-21.28	PK
H	4874	42.21	30.55	5.77	24.66	42.09	54	-11.91	AV
H	7311	52.02	30.33	6.32	24.55	52.56	74	-21.44	PK
H	7311	41.73	30.33	6.32	24.55	42.27	54	-11.73	AV
H	9748	52.93	30.85	7.45	24.69	54.22	74	-19.78	PK
H	9748	40.36	30.85	7.45	24.69	41.65	54	-12.35	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904	52.75	30.55	5.77	24.66	52.63	74	-21.37	PK
V	4904	41.20	30.55	5.77	24.66	41.08	54	-12.92	AV
V	7356	53.29	30.33	6.32	24.55	53.83	74	-20.17	PK
V	7356	40.82	30.33	6.32	24.55	41.36	54	-12.64	AV
V	9808	53.29	30.85	7.45	24.69	54.58	74	-19.42	PK
V	9808	39.55	30.85	7.45	24.69	40.84	54	-13.16	AV
H	4904	54.53	30.55	5.77	24.66	54.41	74	-19.59	PK
H	4904	41.30	30.55	5.77	24.66	41.18	54	-12.82	AV
H	7356	52.76	30.33	6.32	24.55	53.30	74	-20.70	PK

H	7356	40.45	30.33	6.32	24.55	40.99	54	-13.01	AV
H	9808	53.67	30.85	7.45	24.69	54.96	74	-19.04	PK
H	9808	39.58	30.85	7.45	24.69	40.87	54	-13.13	AV

802.11b-ANT2

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	55.14	30.55	5.77	24.66	55.02	74	-18.98	PK
V	4824	40.07	30.55	5.77	24.66	39.95	54	-14.05	AV
V	7236	53.33	30.33	6.32	24.55	53.87	74	-20.13	PK
V	7236	40.92	30.33	6.32	24.55	41.46	54	-12.54	AV
V	9648	51.42	30.85	7.45	24.69	52.71	74	-21.29	PK
V	9648	38.48	30.85	7.45	24.69	39.77	54	-14.23	AV
H	4824	52.78	30.55	5.77	24.66	52.66	74	-21.34	PK
H	4824	41.87	30.55	5.77	24.66	41.75	54	-12.25	AV
H	7236	51.85	30.33	6.32	24.55	52.39	74	-21.61	PK
H	7236	39.58	30.33	6.32	24.55	40.12	54	-13.88	AV
H	9648	51.47	30.85	7.45	24.69	52.76	74	-21.24	PK
H	9648	39.62	30.85	7.45	24.69	40.91	54	-13.09	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	52.82	30.55	5.77	24.66	52.70	74	-21.30	PK
V	4874	39.92	30.55	5.77	24.66	39.80	54	-14.20	AV
V	7311	52.03	30.33	6.32	24.55	52.57	74	-21.43	PK
V	7311	39.75	30.33	6.32	24.55	40.29	54	-13.71	AV
V	9748	53.09	30.85	7.45	24.69	54.38	74	-19.62	PK
V	9748	36.21	30.85	7.45	24.69	37.50	54	-16.50	AV
H	4874	54.96	30.55	5.77	24.66	54.84	74	-19.16	PK
H	4874	41.13	30.55	5.77	24.66	41.01	54	-12.99	AV
H	7311	53.72	30.33	6.32	24.55	54.26	74	-19.74	PK
H	7311	39.31	30.33	6.32	24.55	39.85	54	-14.15	AV
H	9748	52.95	30.85	7.45	24.69	54.24	74	-19.76	PK
H	9748	39.71	30.85	7.45	24.69	41.00	54	-13.00	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	54.11	30.55	5.77	24.66	53.99	74	-20.01	PK
V	4924	41.93	30.55	5.77	24.66	41.81	54	-12.19	AV
V	7386	52.82	30.33	6.32	24.55	53.36	74	-20.64	PK
V	7386	41.46	30.33	6.32	24.55	42.00	54	-12.00	AV
V	9848	53.06	30.85	7.45	24.69	54.35	74	-19.65	PK
V	9848	36.72	30.85	7.45	24.69	38.01	54	-15.99	AV
H	4924	54.04	30.55	5.77	24.66	53.92	74	-20.08	PK
H	4924	41.84	30.55	5.77	24.66	41.72	54	-12.28	AV

H	7386	52.04	30.33	6.32	24.55	52.58	74	-21.42	PK
H	7386	39.83	30.33	6.32	24.55	40.37	54	-13.63	AV
H	9848	51.84	30.85	7.45	24.69	53.13	74	-20.87	PK
H	9848	40.40	30.85	7.45	24.69	41.69	54	-12.31	AV

802.11g-ANT2

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	54.83	30.55	5.77	24.66	54.71	74	-19.29	PK
V	4824	41.38	30.55	5.77	24.66	41.26	54	-12.74	AV
V	7236	53.05	30.33	6.32	24.55	53.59	74	-20.41	PK
V	7236	38.86	30.33	6.32	24.55	39.40	54	-14.60	AV
V	9648	52.43	30.85	7.45	24.69	53.72	74	-20.28	PK
V	9648	36.63	30.85	7.45	24.69	37.92	54	-16.08	AV
H	4824	52.93	30.55	5.77	24.66	52.81	74	-21.19	PK
H	4824	40.57	30.55	5.77	24.66	40.45	54	-13.55	AV
H	7236	52.14	30.33	6.32	24.55	52.68	74	-21.32	PK
H	7236	41.60	30.33	6.32	24.55	42.14	54	-11.86	AV
H	9648	50.87	30.85	7.45	24.69	52.16	74	-21.84	PK
H	9648	39.58	30.85	7.45	24.69	40.87	54	-13.13	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	53.41	30.55	5.77	24.66	53.29	74	-20.71	PK
V	4874	42.33	30.55	5.77	24.66	42.21	54	-11.79	AV
V	7311	53.59	30.33	6.32	24.55	54.13	74	-19.87	PK
V	7311	39.20	30.33	6.32	24.55	39.74	54	-14.26	AV
V	9748	51.86	30.85	7.45	24.69	53.15	74	-20.85	PK
V	9748	36.98	30.85	7.45	24.69	38.27	54	-15.73	AV
H	4874	52.22	30.55	5.77	24.66	52.10	74	-21.90	PK
H	4874	41.78	30.55	5.77	24.66	41.66	54	-12.34	AV
H	7311	52.83	30.33	6.32	24.55	53.37	74	-20.63	PK
H	7311	39.33	30.33	6.32	24.55	39.87	54	-14.13	AV
H	9748	51.12	30.85	7.45	24.69	52.41	74	-21.59	PK
H	9748	37.86	30.85	7.45	24.69	39.15	54	-14.85	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	55.65	30.55	5.77	24.66	55.53	74	-18.47	PK
V	4924	41.39	30.55	5.77	24.66	41.27	54	-12.73	AV
V	7386	52.20	30.33	6.32	24.55	52.74	74	-21.26	PK
V	7386	39.30	30.33	6.32	24.55	39.84	54	-14.16	AV
V	9848	53.01	30.85	7.45	24.69	54.30	74	-19.70	PK
V	9848	36.51	30.85	7.45	24.69	37.80	54	-16.20	AV
H	4924	53.00	30.55	5.77	24.66	52.88	74	-21.12	PK

H	4924	40.26	30.55	5.77	24.66	40.14	54	-13.86	AV
H	7386	53.70	30.33	6.32	24.55	54.24	74	-19.76	PK
H	7386	40.71	30.33	6.32	24.55	41.25	54	-12.75	AV
H	9848	50.79	30.85	7.45	24.69	52.08	74	-21.92	PK
H	9848	37.80	30.85	7.45	24.69	39.09	54	-14.91	AV

802.11n-ANT2

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	54.34	30.55	5.77	24.66	54.22	74	-19.78	PK
V	4824	41.34	30.55	5.77	24.66	41.22	54	-12.78	AV
V	7236	52.05	30.33	6.32	24.55	52.59	74	-21.41	PK
V	7236	40.42	30.33	6.32	24.55	40.96	54	-13.04	AV
V	9648	50.94	30.85	7.45	24.69	52.23	74	-21.77	PK
V	9648	37.98	30.85	7.45	24.69	39.27	54	-14.73	AV
H	4824	53.37	30.55	5.77	24.66	53.25	74	-20.75	PK
H	4824	42.34	30.55	5.77	24.66	42.22	54	-11.78	AV
H	7236	52.21	30.33	6.32	24.55	52.75	74	-21.25	PK
H	7236	40.71	30.33	6.32	24.55	41.25	54	-12.75	AV
H	9648	52.86	30.85	7.45	24.69	54.15	74	-19.85	PK
H	9648	37.95	30.85	7.45	24.69	39.24	54	-14.76	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	53.97	30.55	5.77	24.66	53.85	74	-20.15	PK
V	4874	41.43	30.55	5.77	24.66	41.31	54	-12.69	AV
V	7311	52.07	30.33	6.32	24.55	52.61	74	-21.39	PK
V	7311	40.48	30.33	6.32	24.55	41.02	54	-12.98	AV
V	9748	52.38	30.85	7.45	24.69	53.67	74	-20.33	PK
V	9748	35.93	30.85	7.45	24.69	37.22	54	-16.78	AV
H	4874	51.93	30.55	5.77	24.66	51.81	74	-22.19	PK
H	4874	41.21	30.55	5.77	24.66	41.09	54	-12.91	AV
H	7311	53.16	30.33	6.32	24.55	53.70	74	-20.30	PK
H	7311	41.66	30.33	6.32	24.55	42.20	54	-11.80	AV
H	9748	52.24	30.85	7.45	24.69	53.53	74	-20.47	PK
H	9748	37.66	30.85	7.45	24.69	38.95	54	-15.05	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	55.09	30.55	5.77	24.66	54.97	74	-19.03	PK
V	4924	41.00	30.55	5.77	24.66	40.88	54	-13.12	AV
V	7386	52.27	30.33	6.32	24.55	52.81	74	-21.19	PK
V	7386	39.71	30.33	6.32	24.55	40.25	54	-13.75	AV
V	9848	53.16	30.85	7.45	24.69	54.45	74	-19.55	PK
V	9848	40.44	30.85	7.45	24.69	41.73	54	-12.27	AV

H	4924	55.37	30.55	5.77	24.66	55.25	74	-18.75	PK
H	4924	40.46	30.55	5.77	24.66	40.34	54	-13.66	AV
H	7386	53.14	30.33	6.32	24.55	53.68	74	-20.32	PK
H	7386	40.36	30.33	6.32	24.55	40.90	54	-13.10	AV
H	9848	51.83	30.85	7.45	24.69	53.12	74	-20.88	PK
H	9848	38.91	30.85	7.45	24.69	40.20	54	-13.80	AV

802.11n40-ANT2

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844	54.58	30.55	5.77	24.66	54.46	74	-19.54	PK
V	4844	40.89	30.55	5.77	24.66	40.77	54	-13.23	AV
V	7266	53.28	30.33	6.32	24.55	53.82	74	-20.18	PK
V	7266	40.20	30.33	6.32	24.55	40.74	54	-13.26	AV
V	9688	51.39	30.85	7.45	24.69	52.68	74	-21.32	PK
V	9688	36.37	30.85	7.45	24.69	37.66	54	-16.34	AV
H	4844	55.49	30.55	5.77	24.66	55.37	74	-18.63	PK
H	4844	40.54	30.55	5.77	24.66	40.42	54	-13.58	AV
H	7266	52.40	30.33	6.32	24.55	52.94	74	-21.06	PK
H	7266	40.45	30.33	6.32	24.55	40.99	54	-13.01	AV
H	9688	51.61	30.85	7.45	24.69	52.90	74	-21.10	PK
H	9688	38.47	30.85	7.45	24.69	39.76	54	-14.24	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	52.49	30.55	5.77	24.66	52.37	74	-21.63	PK
V	4874	41.82	30.55	5.77	24.66	41.70	54	-12.30	AV
V	7311	52.23	30.33	6.32	24.55	52.77	74	-21.23	PK
V	7311	39.63	30.33	6.32	24.55	40.17	54	-13.83	AV
V	9748	51.21	30.85	7.45	24.69	52.50	74	-21.50	PK
V	9748	36.69	30.85	7.45	24.69	37.98	54	-16.02	AV
H	4874	52.02	30.55	5.77	24.66	51.90	74	-22.10	PK
H	4874	40.59	30.55	5.77	24.66	40.47	54	-13.53	AV
H	7311	52.09	30.33	6.32	24.55	52.63	74	-21.37	PK
H	7311	41.47	30.33	6.32	24.55	42.01	54	-11.99	AV
H	9748	52.65	30.85	7.45	24.69	53.94	74	-20.06	PK
H	9748	36.31	30.85	7.45	24.69	37.60	54	-16.40	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904	54.79	30.55	5.77	24.66	54.67	74	-19.33	PK
V	4904	42.36	30.55	5.77	24.66	42.24	54	-11.76	AV
V	7356	52.90	30.33	6.32	24.55	53.44	74	-20.56	PK
V	7356	41.75	30.33	6.32	24.55	42.29	54	-11.71	AV
V	9808	52.04	30.85	7.45	24.69	53.33	74	-20.67	PK
V	9808	39.12	30.85	7.45	24.69	40.41	54	-13.59	AV

H	4904	53.18	30.55	5.77	24.66	53.06	74	-20.94	PK
H	4904	42.65	30.55	5.77	24.66	42.53	54	-11.47	AV
H	7356	51.95	30.33	6.32	24.55	52.49	74	-21.51	PK
H	7356	40.30	30.33	6.32	24.55	40.84	54	-13.16	AV
H	9808	52.82	30.85	7.45	24.69	54.11	74	-19.89	PK
H	9808	37.82	30.85	7.45	24.69	39.11	54	-14.89	AV

MIMO-802.11n

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	55.04	30.55	5.77	24.66	54.92	74	-19.08	PK
V	4824	41.47	30.55	5.77	24.66	41.35	54	-12.65	AV
V	7236	53.33	30.33	6.32	24.55	53.87	74	-20.13	PK
V	7236	39.26	30.33	6.32	24.55	39.80	54	-14.20	AV
V	9648	51.47	30.85	7.45	24.69	52.76	74	-21.24	PK
V	9648	36.39	30.85	7.45	24.69	37.68	54	-16.32	AV
H	4824	54.76	30.55	5.77	24.66	54.64	74	-19.36	PK
H	4824	41.48	30.55	5.77	24.66	41.36	54	-12.64	AV
H	7236	53.58	30.33	6.32	24.55	54.12	74	-19.88	PK
H	7236	40.54	30.33	6.32	24.55	41.08	54	-12.92	AV
H	9648	53.10	30.85	7.45	24.69	54.39	74	-19.61	PK
H	9648	35.94	30.85	7.45	24.69	37.23	54	-16.77	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	51.92	30.55	5.77	24.66	51.80	74	-22.20	PK
V	4874	40.33	30.55	5.77	24.66	40.21	54	-13.79	AV
V	7311	53.14	30.33	6.32	24.55	53.68	74	-20.32	PK
V	7311	40.67	30.33	6.32	24.55	41.21	54	-12.79	AV
V	9748	51.19	30.85	7.45	24.69	52.48	74	-21.52	PK
V	9748	36.75	30.85	7.45	24.69	38.04	54	-15.96	AV
H	4874	54.99	30.55	5.77	24.66	54.87	74	-19.13	PK
H	4874	41.54	30.55	5.77	24.66	41.42	54	-12.58	AV
H	7311	52.72	30.33	6.32	24.55	53.26	74	-20.74	PK
H	7311	41.39	30.33	6.32	24.55	41.93	54	-12.07	AV
H	9748	51.19	30.85	7.45	24.69	52.48	74	-21.52	PK
H	9748	38.91	30.85	7.45	24.69	40.20	54	-13.80	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	54.37	30.55	5.77	24.66	54.25	74	-19.75	PK
V	4924	40.50	30.55	5.77	24.66	40.38	54	-13.62	AV
V	7386	51.93	30.33	6.32	24.55	52.47	74	-21.53	PK
V	7386	41.46	30.33	6.32	24.55	42.00	54	-12.00	AV
V	9848	51.58	30.85	7.45	24.69	52.87	74	-21.13	PK

V	9848	36.58	30.85	7.45	24.69	37.87	54	-16.13	AV
H	4924	53.95	30.55	5.77	24.66	53.83	74	-20.17	PK
H	4924	41.71	30.55	5.77	24.66	41.59	54	-12.41	AV
H	7386	53.52	30.33	6.32	24.55	54.06	74	-19.94	PK
H	7386	41.26	30.33	6.32	24.55	41.80	54	-12.20	AV
H	9848	51.01	30.85	7.45	24.69	52.30	74	-21.70	PK
H	9848	36.72	30.85	7.45	24.69	38.01	54	-15.99	AV

MIMO-802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844	51.94	30.55	5.77	24.66	51.82	74	-22.18	PK
V	4844	40.37	30.55	5.77	24.66	40.25	54	-13.75	AV
V	7266	51.99	30.33	6.32	24.55	52.53	74	-21.47	PK
V	7266	39.70	30.33	6.32	24.55	40.24	54	-13.76	AV
V	9688	53.45	30.85	7.45	24.69	54.74	74	-19.26	PK
V	9688	39.16	30.85	7.45	24.69	40.45	54	-13.55	AV
H	4844	54.37	30.55	5.77	24.66	54.25	74	-19.75	PK
H	4844	40.60	30.55	5.77	24.66	40.48	54	-13.52	AV
H	7266	52.31	30.33	6.32	24.55	52.85	74	-21.15	PK
H	7266	38.88	30.33	6.32	24.55	39.42	54	-14.58	AV
H	9688	52.60	30.85	7.45	24.69	53.89	74	-20.11	PK
H	9688	36.05	30.85	7.45	24.69	37.34	54	-16.66	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	52.47	30.55	5.77	24.66	52.35	74	-21.65	PK
V	4874	41.05	30.55	5.77	24.66	40.93	54	-13.07	AV
V	7311	52.13	30.33	6.32	24.55	52.67	74	-21.33	PK
V	7311	41.73	30.33	6.32	24.55	42.27	54	-11.73	AV
V	9748	52.82	30.85	7.45	24.69	54.11	74	-19.89	PK
V	9748	37.84	30.85	7.45	24.69	39.13	54	-14.87	AV
H	4874	54.54	30.55	5.77	24.66	54.42	74	-19.58	PK
H	4874	40.77	30.55	5.77	24.66	40.65	54	-13.35	AV
H	7311	53.70	30.33	6.32	24.55	54.24	74	-19.76	PK
H	7311	41.74	30.33	6.32	24.55	42.28	54	-11.72	AV
H	9748	52.70	30.85	7.45	24.69	53.99	74	-20.01	PK
H	9748	39.04	30.85	7.45	24.69	40.33	54	-13.67	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904	52.38	30.55	5.77	24.66	52.26	74	-21.74	PK
V	4904	41.66	30.55	5.77	24.66	41.54	54	-12.46	AV
V	7356	53.14	30.33	6.32	24.55	53.68	74	-20.32	PK
V	7356	38.93	30.33	6.32	24.55	39.47	54	-14.53	AV

V	9808	51.82	30.85	7.45	24.69	53.11	74	-20.89	PK
V	9808	38.96	30.85	7.45	24.69	40.25	54	-13.75	AV
H	4904	54.60	30.55	5.77	24.66	54.48	74	-19.52	PK
H	4904	41.52	30.55	5.77	24.66	41.40	54	-12.60	AV
H	7356	52.01	30.33	6.32	24.55	52.55	74	-21.45	PK
H	7356	38.94	30.33	6.32	24.55	39.48	54	-14.52	AV
H	9808	53.43	30.85	7.45	24.69	54.72	74	-19.28	PK
H	9808	39.86	30.85	7.45	24.69	41.15	54	-12.85	AV

5.RADIATED BAND EMISSIONMEASUREMENT**5.1 TEST REQUIREMENT:**

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

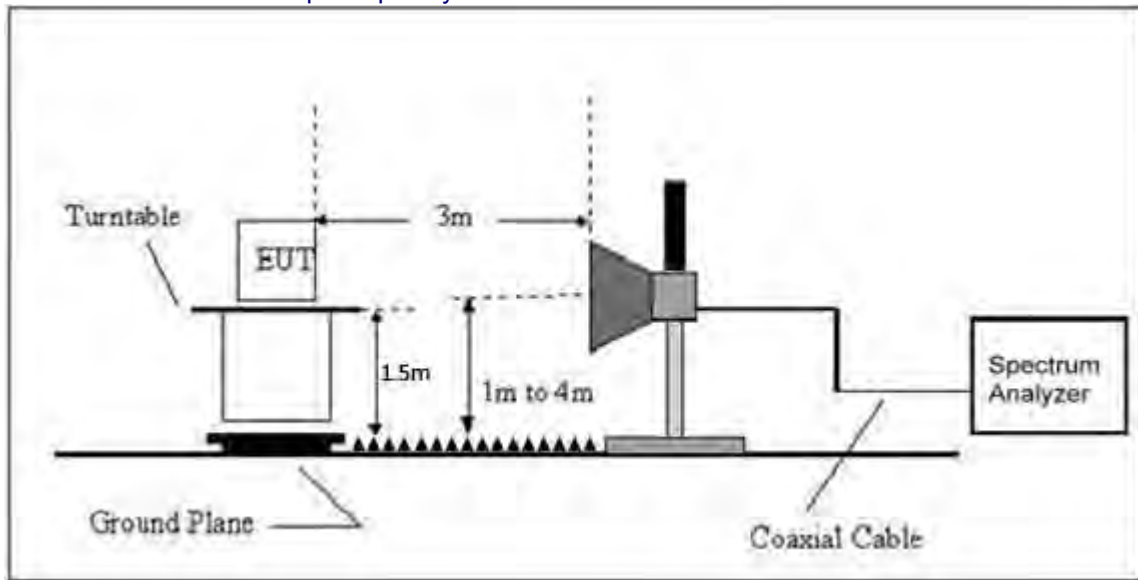

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

ANT1

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	61.88	30.22	4.85	23.98	60.49	74	PK	PASS
	H	2390.00	48.45	30.22	4.85	23.98	47.06	54	AV	PASS
	H	2400.00	65.36	30.22	4.85	23.98	63.97	74	PK	PASS
	H	2400.00	45.94	30.22	4.85	23.98	44.55	54	AV	PASS
	V	2390.00	63.89	30.22	4.85	23.98	62.50	74	PK	PASS
	V	2390.00	46.51	30.22	4.85	23.98	45.12	54	AV	PASS
	V	2400.00	60.78	30.22	4.85	23.98	59.39	74	PK	PASS
	V	2400.00	46.41	30.22	4.85	23.98	45.02	54	AV	PASS
	High Channel 2462MHz									
	H	2483.50	59.46	30.22	4.85	23.98	58.07	74	PK	PASS
	H	2485.50	47.81	30.22	4.85	23.98	46.42	54	AV	PASS
	H	2483.50	64.02	30.22	4.85	23.98	62.63	74	PK	PASS
	H	2485.50	42.87	30.22	4.85	23.98	41.48	54	AV	PASS
	V	2483.50	62.31	30.22	4.85	23.98	60.92	74	PK	PASS
	V	2485.50	45.11	30.22	4.85	23.98	43.72	54	AV	PASS
	V	2483.50	64.23	30.22	4.85	23.98	62.84	74	PK	PASS
	V	2485.50	49.56	30.22	4.85	23.98	48.17	54	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	64.57	30.22	4.85	23.98	63.18	74	PK	PASS
	H	2390.00	48.22	30.22	4.85	23.98	46.83	54	AV	PASS
	H	2400.00	65.66	30.22	4.85	23.98	64.27	74	PK	PASS
	H	2400.00	48.50	30.22	4.85	23.98	47.11	54	AV	PASS
	V	2390.00	64.71	30.22	4.85	23.98	63.32	74	PK	PASS
	V	2390.00	46.49	30.22	4.85	23.98	45.10	54	AV	PASS
	V	2400.00	59.01	30.22	4.85	23.98	57.62	74	PK	PASS
	V	2400.00	47.32	30.22	4.85	23.98	45.93	54	AV	PASS
	High Channel 2462MHz									
	H	2483.50	61.88	30.22	4.85	23.98	60.49	74	PK	PASS
	H	2485.50	48.53	30.22	4.85	23.98	47.14	54	AV	PASS
	H	2483.50	66.57	30.22	4.85	23.98	65.18	74	PK	PASS
	H	2485.50	44.58	30.22	4.85	23.98	43.19	54	AV	PASS
	V	2483.50	64.84	30.22	4.85	23.98	63.45	74	PK	PASS
	V	2485.50	48.28	30.22	4.85	23.98	46.89	54	AV	PASS
	V	2483.50	66.28	30.22	4.85	23.98	64.89	74	PK	PASS
	V	2485.50	44.68	30.22	4.85	23.98	43.29	54	AV	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	64.32	30.22	4.85	23.98	62.93	74	PK	PASS
	H	2390.00	48.34	30.22	4.85	23.98	46.95	54	AV	PASS
	H	2400.00	64.48	30.22	4.85	23.98	63.09	74	PK	PASS
	H	2400.00	46.16	30.22	4.85	23.98	44.77	54	AV	PASS
	V	2390.00	65.90	30.22	4.85	23.98	64.51	74	PK	PASS
	V	2390.00	48.44	30.22	4.85	23.98	47.05	54	AV	PASS
	V	2400.00	61.49	30.22	4.85	23.98	60.10	74	PK	PASS
	V	2400.00	48.43	30.22	4.85	23.98	47.04	54	AV	PASS
	High Channel 2462MHz									
	H	2483.50	59.49	30.22	4.85	23.98	58.10	74	PK	PASS
	H	2485.50	46.57	30.22	4.85	23.98	45.18	54	AV	PASS
	H	2483.50	59.86	30.22	4.85	23.98	58.47	74	PK	PASS
	H	2485.50	48.19	30.22	4.85	23.98	46.80	54	AV	PASS

	V	2483.50	60.23	30.22	4.85	23.98	58.84	74	PK	PASS
	V	2485.50	45.82	30.22	4.85	23.98	44.43	54	AV	PASS
	V	2483.50	65.99	30.22	4.85	23.98	64.60	74	PK	PASS
	V	2485.50	49.48	30.22	4.85	23.98	48.09	54	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

802.11n40	Low Channel 2422MHz									
	H	2390.00	64.02	30.22	4.85	23.98	62.63	74	PK	PASS
	H	2390.00	48.58	30.22	4.85	23.98	47.19	54	AV	PASS
	H	2400.00	63.20	30.22	4.85	23.98	61.81	74	PK	PASS
	H	2400.00	46.84	30.22	4.85	23.98	45.45	54	AV	PASS
	V	2390.00	64.08	30.22	4.85	23.98	62.69	74	PK	PASS
	V	2390.00	47.27	30.22	4.85	23.98	45.88	54	AV	PASS
	V	2400.00	62.00	30.22	4.85	23.98	60.61	74	PK	PASS
	V	2400.00	45.81	30.22	4.85	23.98	44.42	54	AV	PASS
	High Channel 2452MHz									
	H	2483.50	58.86	30.22	4.85	23.98	57.47	74	PK	PASS
	H	2485.50	43.29	30.22	4.85	23.98	41.90	54	AV	PASS
	H	2483.50	65.99	30.22	4.85	23.98	64.60	74	PK	PASS
	H	2485.50	49.38	30.22	4.85	23.98	47.99	54	AV	PASS
	V	2483.50	62.29	30.22	4.85	23.98	60.90	74	PK	PASS
	V	2485.50	49.00	30.22	4.85	23.98	47.61	54	AV	PASS
	V	2483.50	60.85	30.22	4.85	23.98	59.46	74	PK	PASS
	V	2485.50	46.79	30.22	4.85	23.98	45.40	54	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

ANT2

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detector Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	62.39	30.22	4.85	23.98	61.00	74	PK	PASS
	H	2390.00	47.34	30.22	4.85	23.98	45.95	54	AV	PASS
	H	2400.00	65.20	30.22	4.85	23.98	63.81	74	PK	PASS
	H	2400.00	47.80	30.22	4.85	23.98	46.41	54	AV	PASS
	V	2390.00	65.28	30.22	4.85	23.98	63.89	74	PK	PASS
	V	2390.00	46.92	30.22	4.85	23.98	45.53	54	AV	PASS
	V	2400.00	61.77	30.22	4.85	23.98	60.38	74	PK	PASS
	V	2400.00	47.85	30.22	4.85	23.98	46.46	54	AV	PASS
	High Channel 2462MHz									
	H	2483.50	60.40	30.22	4.85	23.98	59.01	74	PK	PASS
	H	2485.50	44.58	30.22	4.85	23.98	43.19	54	AV	PASS
	H	2483.50	63.66	30.22	4.85	23.98	62.27	74	PK	PASS
	H	2485.50	46.01	30.22	4.85	23.98	44.62	54	AV	PASS
	V	2483.50	62.07	30.22	4.85	23.98	60.68	74	PK	PASS
	V	2485.50	49.23	30.22	4.85	23.98	47.84	54	AV	PASS
	V	2483.50	64.22	30.22	4.85	23.98	62.83	74	PK	PASS
	V	2485.50	46.23	30.22	4.85	23.98	44.84	54	AV	PASS

802.11g	Low Channel 2412MHz									
	H	2390.00	62.10	30.22	4.85	23.98	60.71	74	PK	PASS
	H	2390.00	48.38	30.22	4.85	23.98	46.99	54	AV	PASS

	H	2400.00	64.86	30.22	4.85	23.98	63.47	74	PK	PASS
	H	2400.00	46.59	30.22	4.85	23.98	45.20	54	AV	PASS
	V	2390.00	67.37	30.22	4.85	23.98	65.98	74	PK	PASS
	V	2390.00	49.25	30.22	4.85	23.98	47.86	54	AV	PASS
	V	2400.00	62.69	30.22	4.85	23.98	61.30	74	PK	PASS
	V	2400.00	45.99	30.22	4.85	23.98	44.60	54	AV	PASS
	High Channel 2462MHz									
	H	2483.50	60.95	30.22	4.85	23.98	59.56	74	PK	PASS
	H	2485.50	46.59	30.22	4.85	23.98	45.20	54	AV	PASS
	H	2483.50	60.37	30.22	4.85	23.98	58.98	74	PK	PASS
	H	2485.50	43.42	30.22	4.85	23.98	42.03	54	AV	PASS
	V	2483.50	59.67	30.22	4.85	23.98	58.28	74	PK	PASS
	V	2485.50	43.73	30.22	4.85	23.98	42.34	54	AV	PASS
	V	2483.50	63.79	30.22	4.85	23.98	62.40	74	PK	PASS
	V	2485.50	43.99	30.22	4.85	23.98	42.60	54	AV	PASS

802.11n20	Low Channel 2412MHz									
	H	2390.00	61.81	30.22	4.85	23.98	60.42	74	PK	PASS
	H	2390.00	48.14	30.22	4.85	23.98	46.75	54	AV	PASS
	H	2400.00	62.91	30.22	4.85	23.98	61.52	74	PK	PASS
	H	2400.00	46.29	30.22	4.85	23.98	44.90	54	AV	PASS
	V	2390.00	67.73	30.22	4.85	23.98	66.34	74	PK	PASS
	V	2390.00	47.33	30.22	4.85	23.98	45.94	54	AV	PASS
	V	2400.00	60.53	30.22	4.85	23.98	59.14	74	PK	PASS
	V	2400.00	46.08	30.22	4.85	23.98	44.69	54	AV	PASS
	High Channel 2462MHz									
	H	2483.50	60.16	30.22	4.85	23.98	58.77	74	PK	PASS
	H	2485.50	45.08	30.22	4.85	23.98	43.69	54	AV	PASS
	H	2483.50	61.89	30.22	4.85	23.98	60.50	74	PK	PASS
	H	2485.50	45.34	30.22	4.85	23.98	43.95	54	AV	PASS
	V	2483.50	63.56	30.22	4.85	23.98	62.17	74	PK	PASS
	V	2485.50	43.14	30.22	4.85	23.98	41.75	54	AV	PASS
	V	2483.50	63.67	30.22	4.85	23.98	62.28	74	PK	PASS
	V	2485.50	45.67	30.22	4.85	23.98	44.28	54	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

802.11n40	Low Channel 2422MHz									
	H	2390.00	64.51	30.22	4.85	23.98	63.12	74	PK	PASS
	H	2390.00	46.21	30.22	4.85	23.98	44.82	54	AV	PASS
	H	2400.00	63.53	30.22	4.85	23.98	62.14	74	PK	PASS
	H	2400.00	46.25	30.22	4.85	23.98	44.86	54	AV	PASS
	V	2390.00	65.17	30.22	4.85	23.98	63.78	74	PK	PASS
	V	2390.00	47.08	30.22	4.85	23.98	45.69	54	AV	PASS
	V	2400.00	59.72	30.22	4.85	23.98	58.33	74	PK	PASS
	V	2400.00	47.01	30.22	4.85	23.98	45.62	54	AV	PASS
	High Channel 2452MHz									
	H	2483.50	59.30	30.22	4.85	23.98	57.91	74	PK	PASS
	H	2485.50	45.49	30.22	4.85	23.98	44.10	54	AV	PASS
	H	2483.50	64.34	30.22	4.85	23.98	62.95	74	PK	PASS
	H	2485.50	45.43	30.22	4.85	23.98	44.04	54	AV	PASS
	V	2483.50	59.18	30.22	4.85	23.98	57.79	74	PK	PASS
	V	2485.50	44.24	30.22	4.85	23.98	42.85	54	AV	PASS
	V	2483.50	62.76	30.22	4.85	23.98	61.37	74	PK	PASS
	V	2485.50	44.88	30.22	4.85	23.98	43.49	54	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

MIMO										
802.11n20	Low Channel 2412MHz									
	H	2390.00	63.84	30.22	4.85	23.98	62.45	74	PK	PASS
	H	2390.00	47.81	30.22	4.85	23.98	46.42	54	AV	PASS
	H	2400.00	63.36	30.22	4.85	23.98	61.97	74	PK	PASS
	H	2400.00	47.43	30.22	4.85	23.98	46.04	54	AV	PASS
	V	2390.00	66.61	30.22	4.85	23.98	65.22	74	PK	PASS
	V	2390.00	48.48	30.22	4.85	23.98	47.09	54	AV	PASS
	V	2400.00	60.94	30.22	4.85	23.98	59.55	74	PK	PASS
	V	2400.00	46.73	30.22	4.85	23.98	45.34	54	AV	PASS
	High Channel 2462MHz									
	H	2483.50	60.78	30.22	4.85	23.98	59.39	74	PK	PASS
	H	2485.50	47.43	30.22	4.85	23.98	46.04	54	AV	PASS
	H	2483.50	60.08	30.22	4.85	23.98	58.69	74	PK	PASS
	H	2485.50	47.43	30.22	4.85	23.98	46.04	54	AV	PASS
	V	2483.50	59.53	30.22	4.85	23.98	58.14	74	PK	PASS
	V	2485.50	43.89	30.22	4.85	23.98	42.50	54	AV	PASS
	V	2483.50	59.62	30.22	4.85	23.98	58.23	74	PK	PASS
	V	2485.50	46.12	30.22	4.85	23.98	44.73	54	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

802.11n40	Low Channel 2422MHz									
	H	2390.00	64.20	30.22	4.85	23.98	62.81	74	PK	PASS
	H	2390.00	47.68	30.22	4.85	23.98	46.29	54	AV	PASS
	H	2400.00	64.53	30.22	4.85	23.98	63.14	74	PK	PASS
	H	2400.00	46.45	30.22	4.85	23.98	45.06	54	AV	PASS
	V	2390.00	64.01	30.22	4.85	23.98	62.62	74	PK	PASS
	V	2390.00	48.04	30.22	4.85	23.98	46.65	54	AV	PASS
	V	2400.00	58.77	30.22	4.85	23.98	57.38	74	PK	PASS
	V	2400.00	48.59	30.22	4.85	23.98	47.20	54	AV	PASS
	High Channel 2452MHz									
	H	2483.50	58.79	30.22	4.85	23.98	57.40	74	PK	PASS
	H	2485.50	48.58	30.22	4.85	23.98	47.19	54	AV	PASS
	H	2483.50	60.09	30.22	4.85	23.98	58.70	74	PK	PASS
	H	2485.50	48.45	30.22	4.85	23.98	47.06	54	AV	PASS
	V	2483.50	63.41	30.22	4.85	23.98	62.02	74	PK	PASS
	V	2485.50	43.68	30.22	4.85	23.98	42.29	54	AV	PASS
	V	2483.50	60.12	30.22	4.85	23.98	58.73	74	PK	PASS
	V	2485.50	42.80	30.22	4.85	23.98	41.41	54	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V

Test mode	Test channel	Power Spectral Density (dBm/MHz)			Limit:	Result
		ANT1	ANT2	SUM		
802.11b	Lowest	-17.771	-15.074	/	8dBm	PASS
	Middle	-17.272	-14.227	/		
	Highest	-16.691	-14.563	/		
802.11g	Lowest	-17.66	-16.402	/	8dBm	PASS
	Middle	-15.899	-16.668	/		
	Highest	-16.203	-17.193	/		
802.11n(HT20)	Lowest	-17.52	-17.383	-14.44	5.99dBm	PASS
	Middle	-15.989	-16.139	-13.05		
	Highest	-15.928	-16.093	-13.00		
802.11n(HT40)	Lowest	-18.739	-19.647	-16.16	5.99dBm	PASS
	Middle	-18.919	-19.387	-16.14		
	Highest	-17.63	-18.579	-15.07		

Remark:

1. Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Please refer to following plots;
4. The PSD limits of IEEE 802.11n HT20 and IEEE 802.11 n HT40 for MIMO with CDD technology should be reduce $10 \cdot \log(2) = 3.010 \text{ dB}$ according to KDB662911D01;
5. For MIMO with CCD technology device, The Directional Gain= Gain of individual transmit antennas (dBi) + Array gain;
 $\text{Array gain} = 10 \log (\text{Nant})$, where Nant is the number of transmit antennas.



Middle channel



Middle channel



Highest channel



Highest channel



ANT1

802.11g

Lowest channel



ANT2

802.11g


Lowest channel



Middle channel





Middle channel

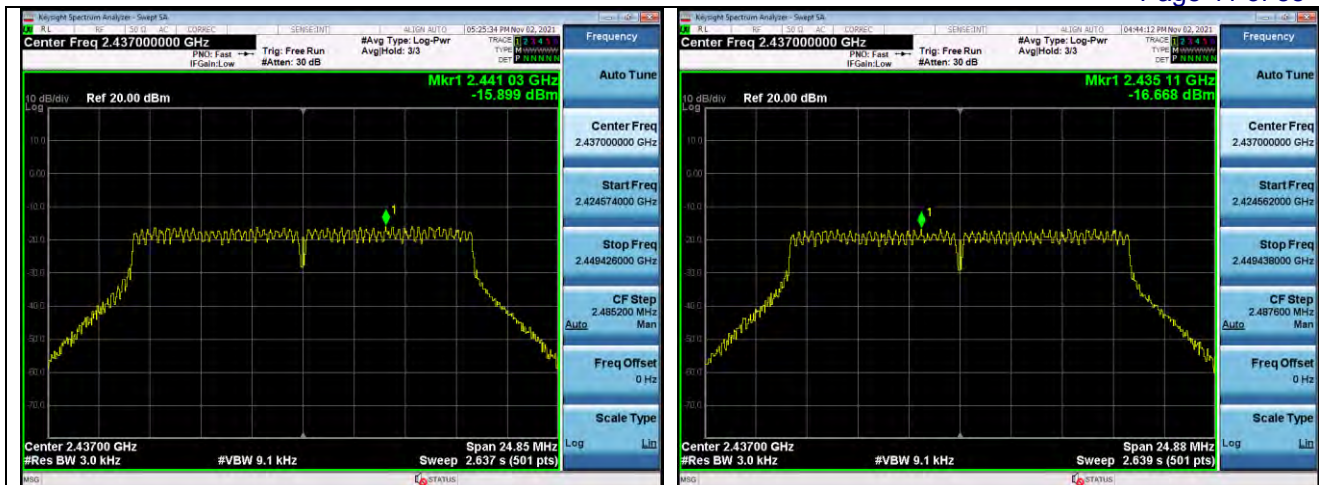


Highest channel

Highest channel

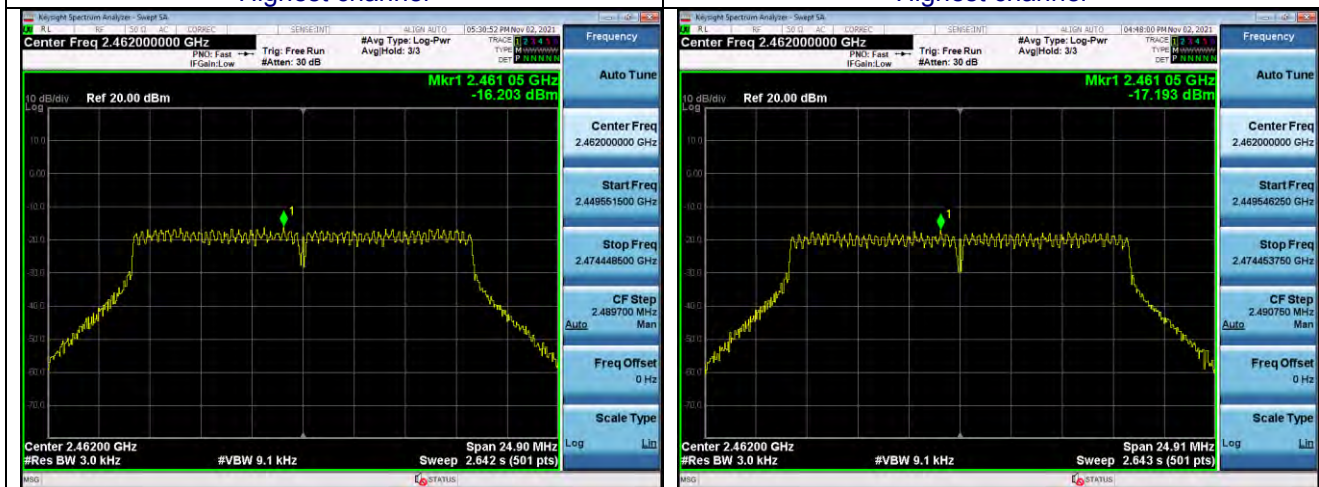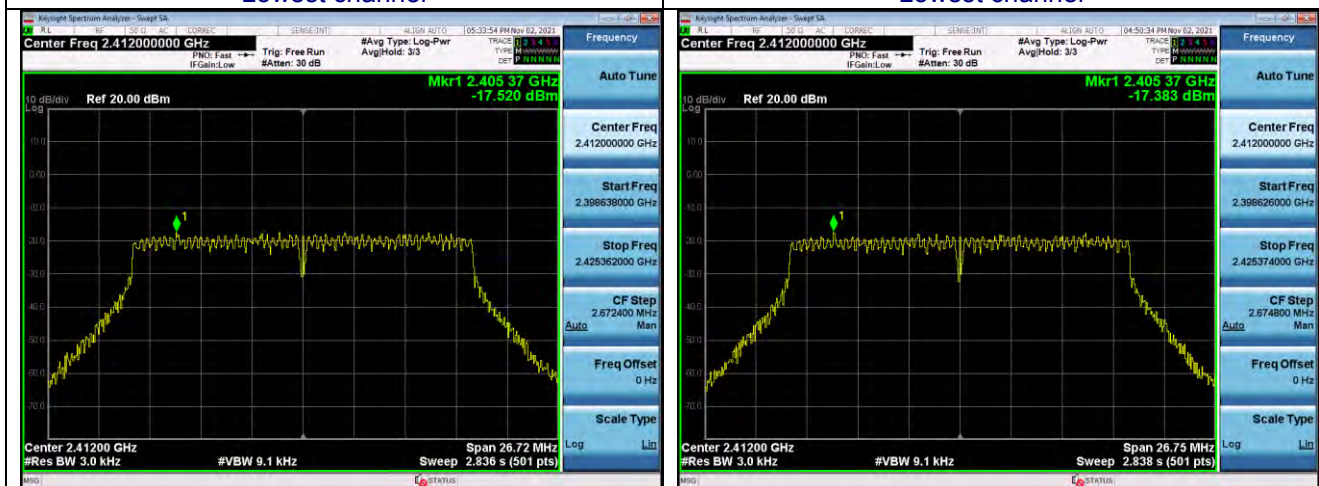ANT1
802.11n(HT20)
Lowest channelANT2
802.11n(HT20)
Lowest channel



Middle channel

Middle channel

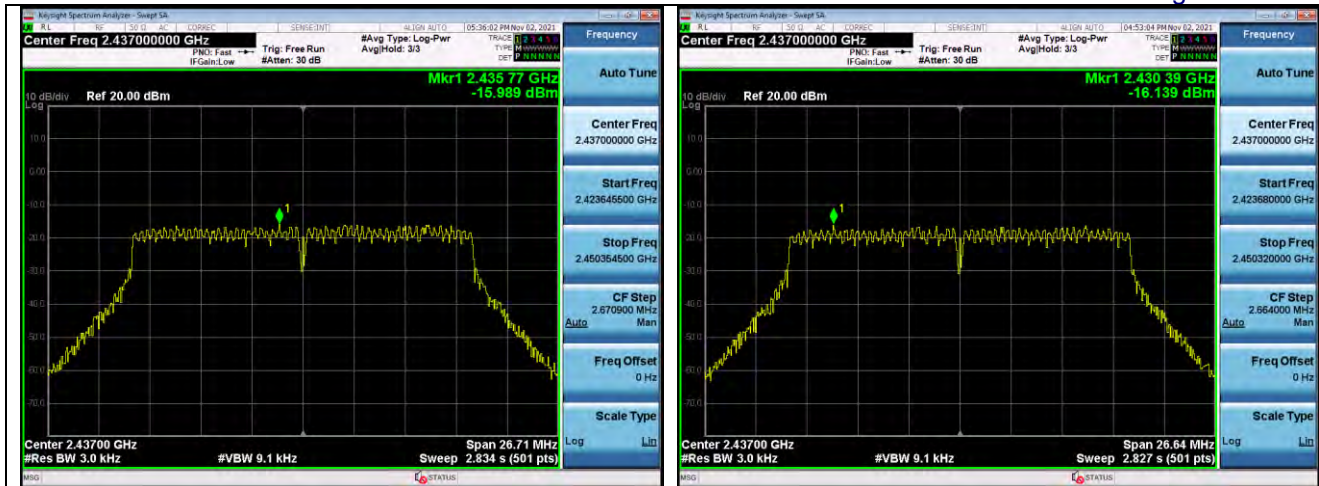


Highest channel

Highest channel

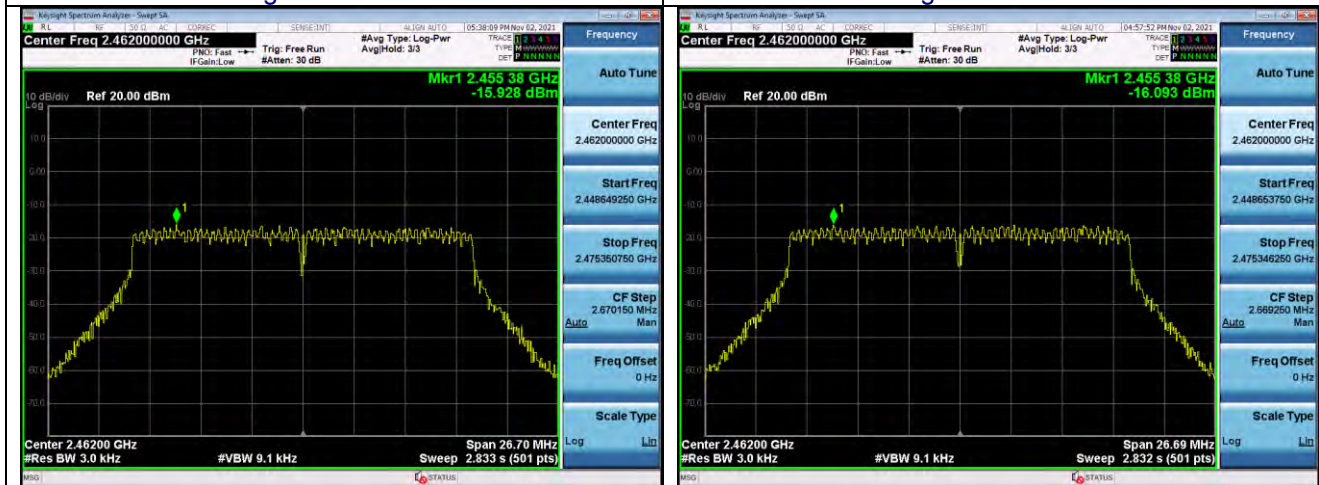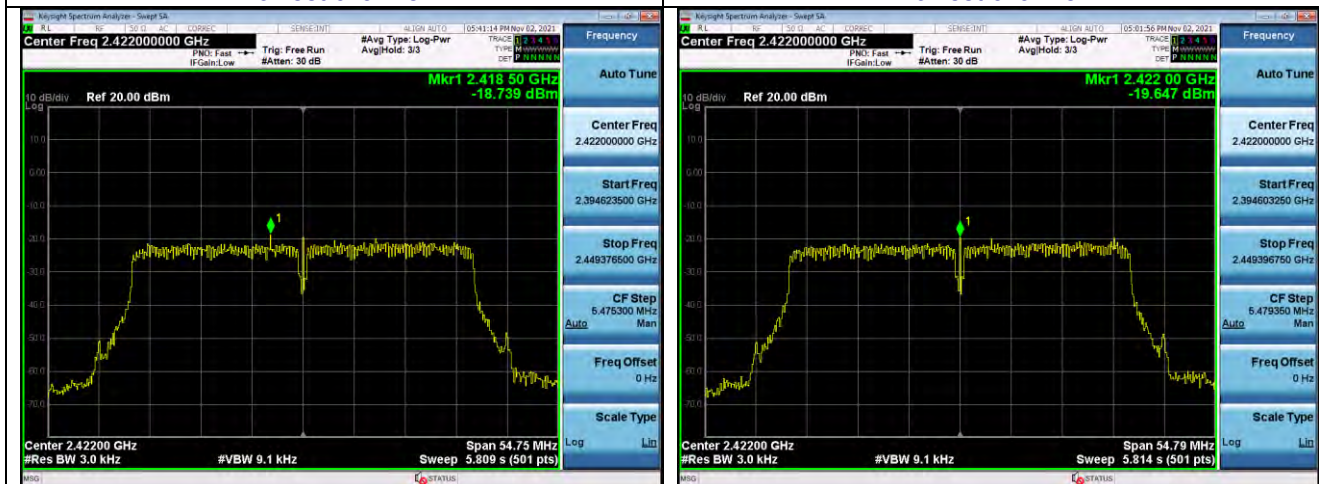ANT1
802.11n(HT40)
Lowest channelANT2
802.11n(HT40)
Lowest channel


Middle channel

Middle channel

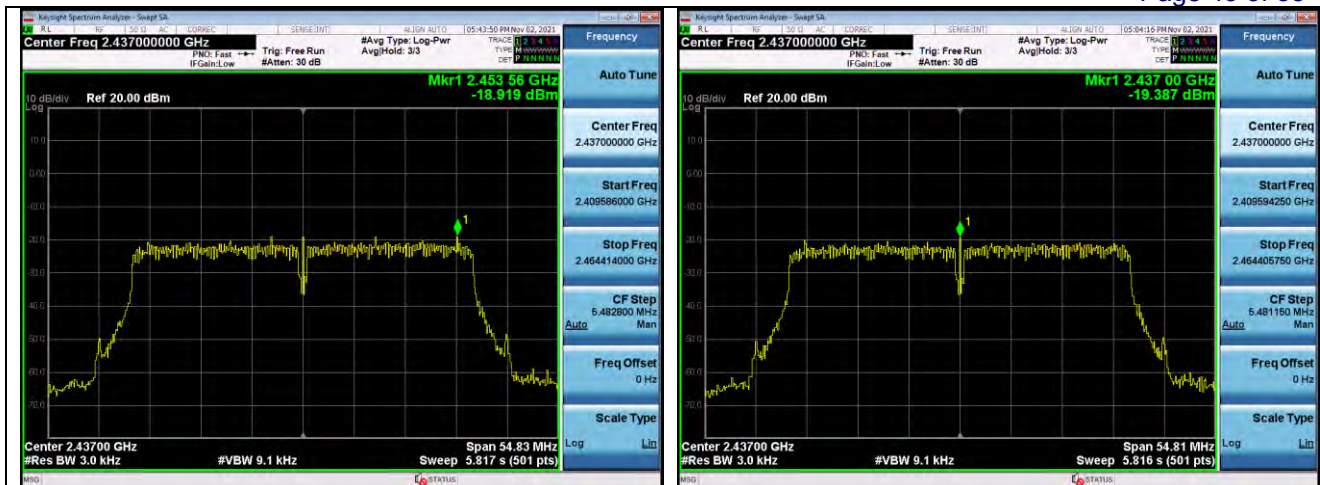

Highest channel

Highest channel

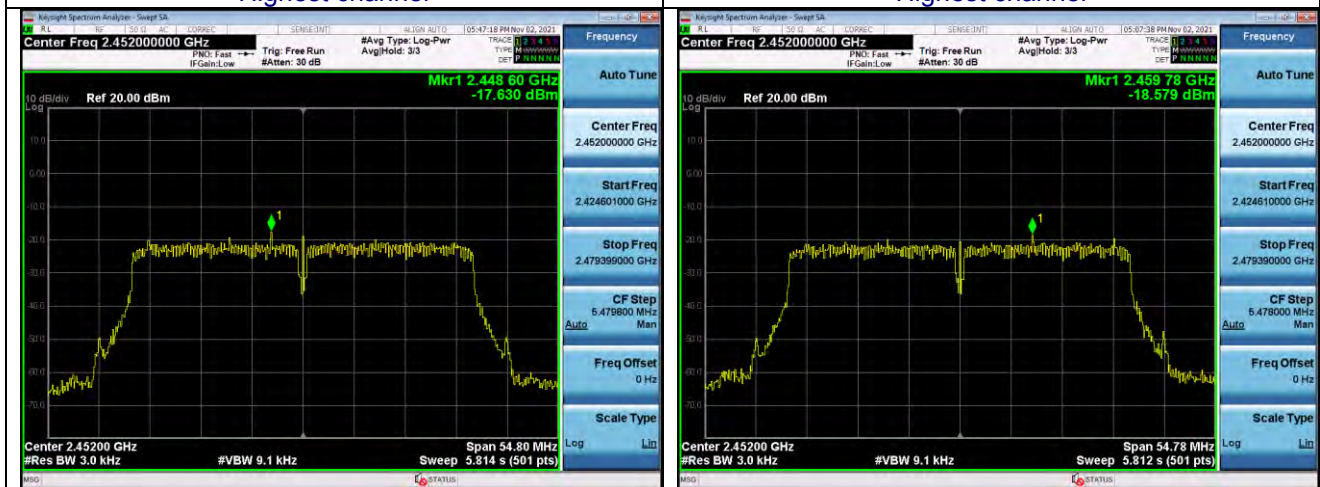

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120
Test Mode :	TX Mode		

Test mode	Test channel	6dB Emission Bandwidth (MHz)		Limit:	Test Result:
		ANT1	ANT2		
802.11b	Lowest	9.034	9.056	>500kHz	PASS
	Middle	9.079	8.612		
	Highest	9.091	9.049		
802.11g	Lowest	16.59	16.59	>500kHz	PASS
	Middle	16.57	16.58		
	Highest	16.60	16.60		
802.11n(HT20)	Lowest	17.82	17.83	>500kHz	PASS
	Middle	17.81	17.76		
	Highest	17.80	17.80		
802.11n(HT40)	Lowest	36.50	36.53	>500kHz	PASS
	Middle	36.55	36.54		
	Highest	36.53	36.52		



Test plot as follows:

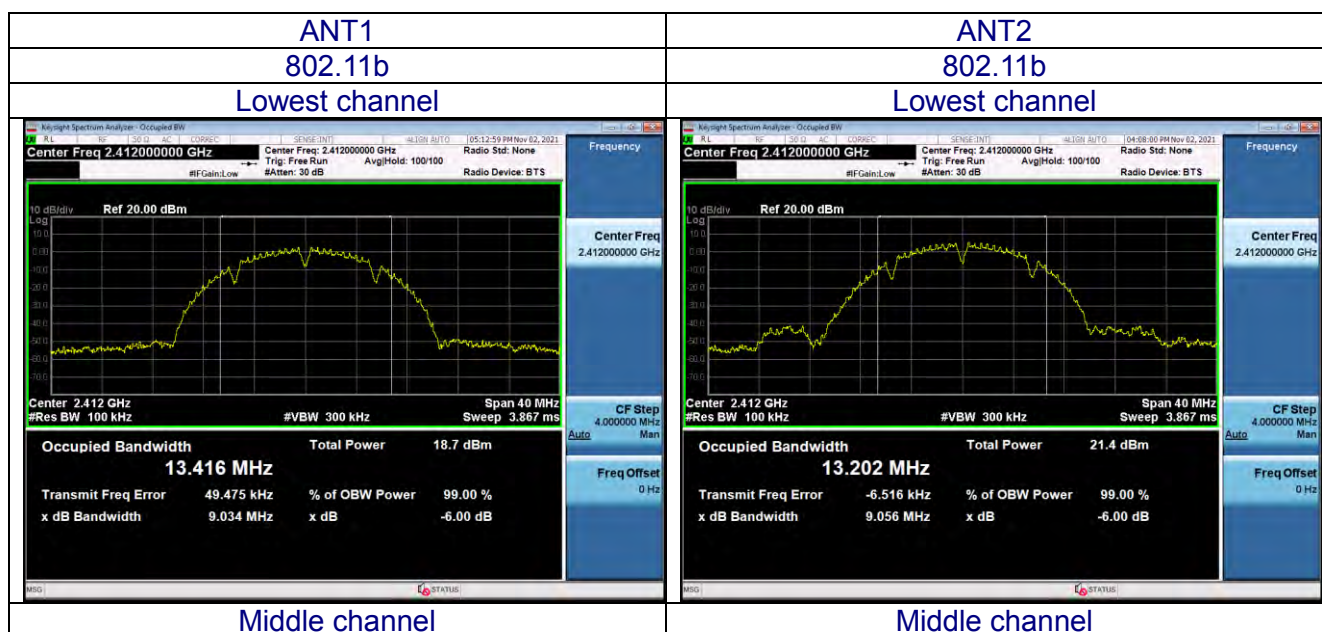

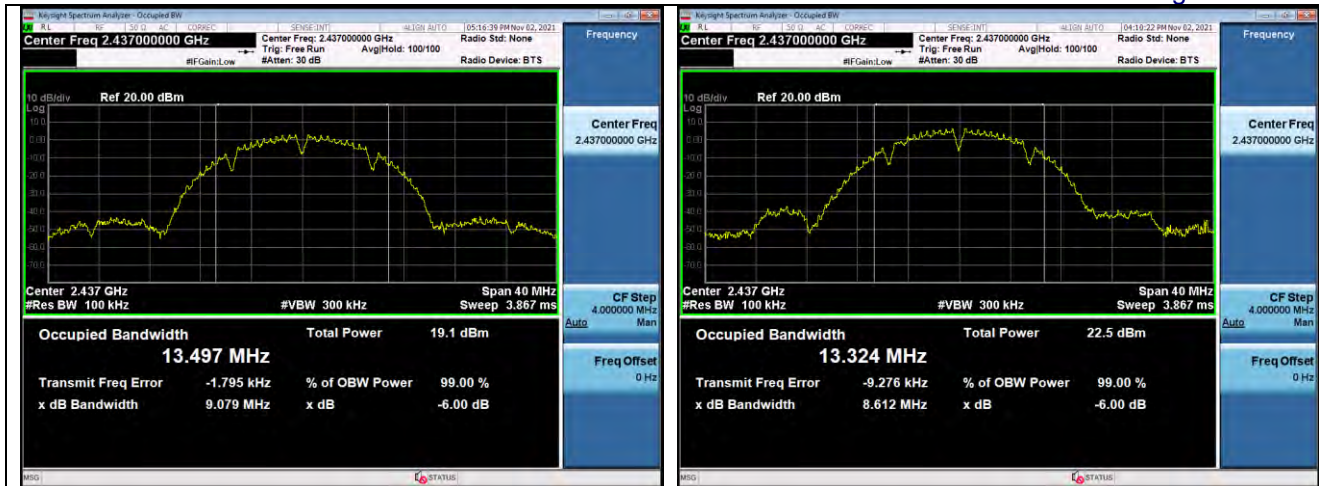


Highest channel

Highest channel

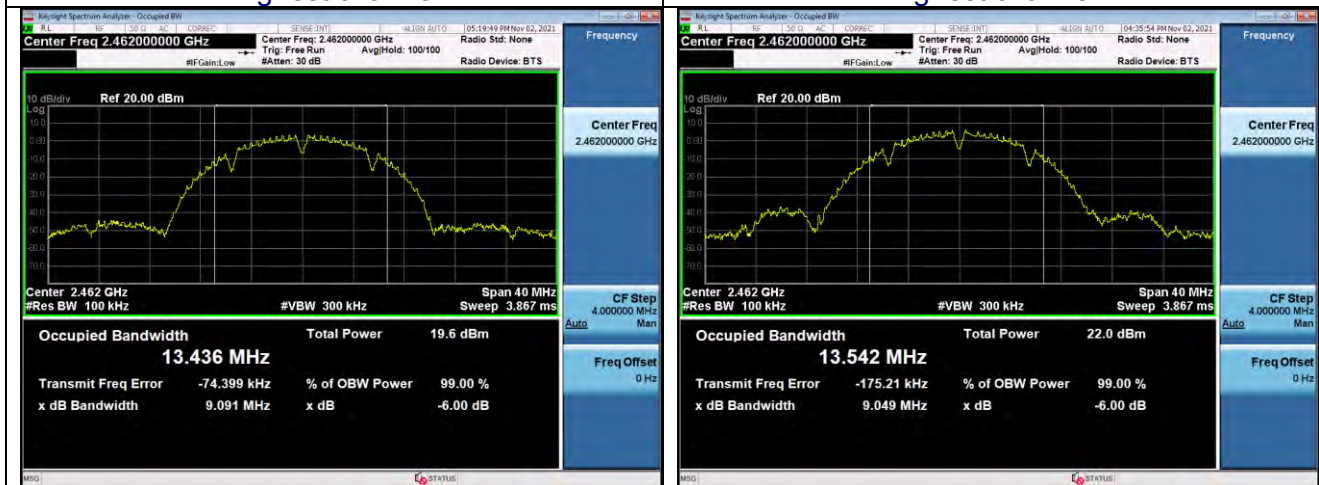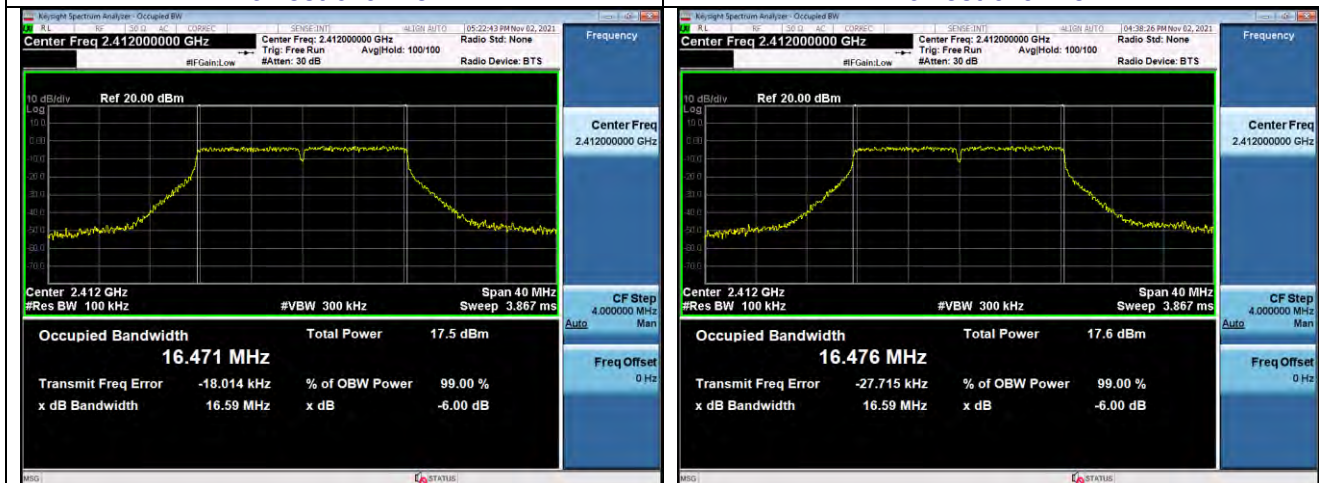ANT1
802.11g
Lowest channelANT2
802.11g
Lowest channel



Middle channel

Middle channel

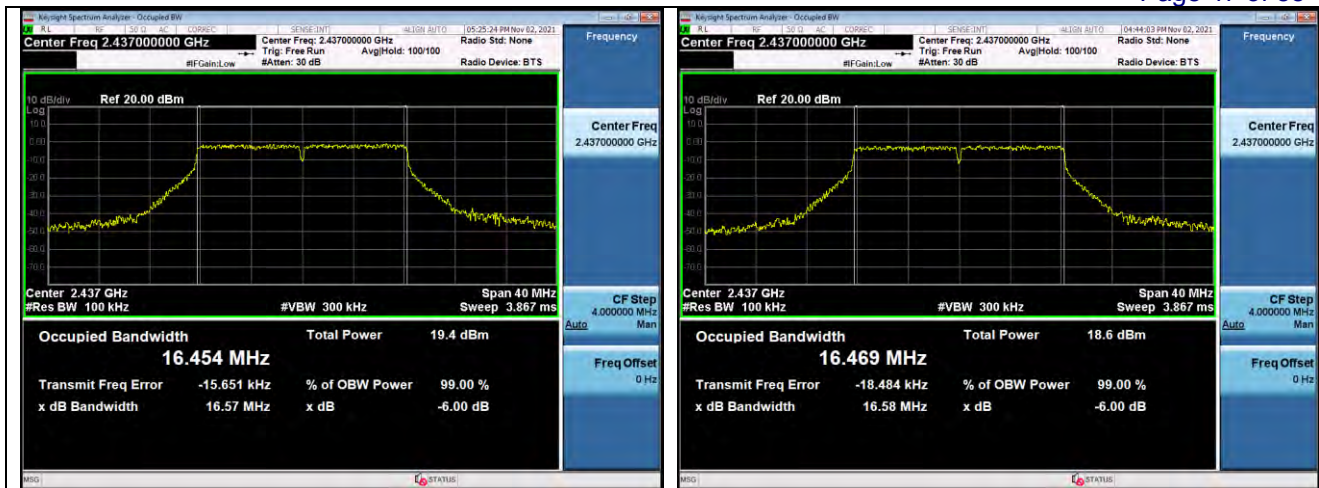


Highest channel

Highest channel

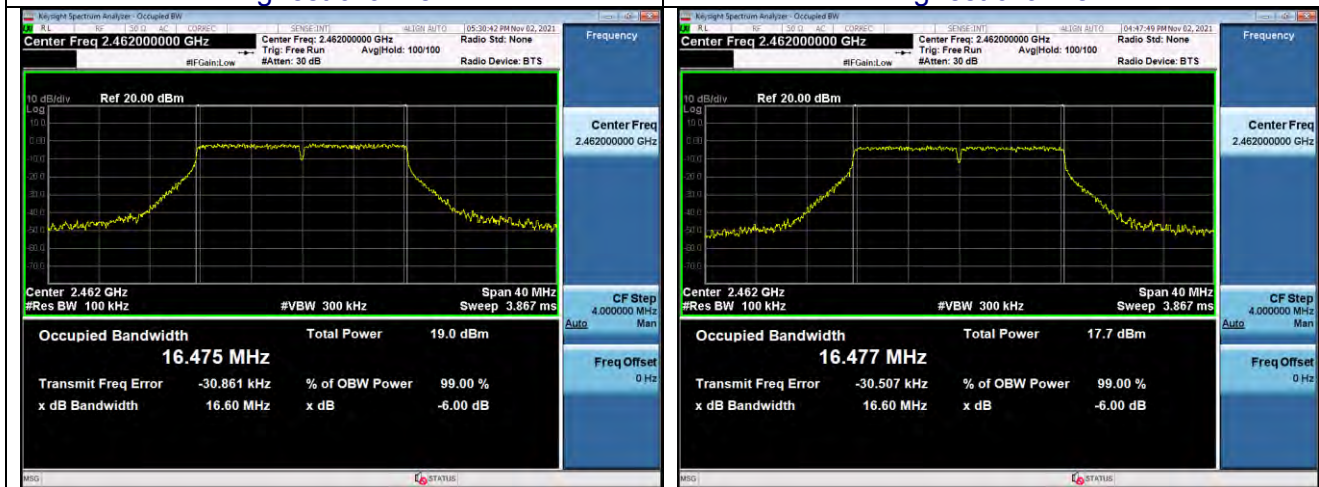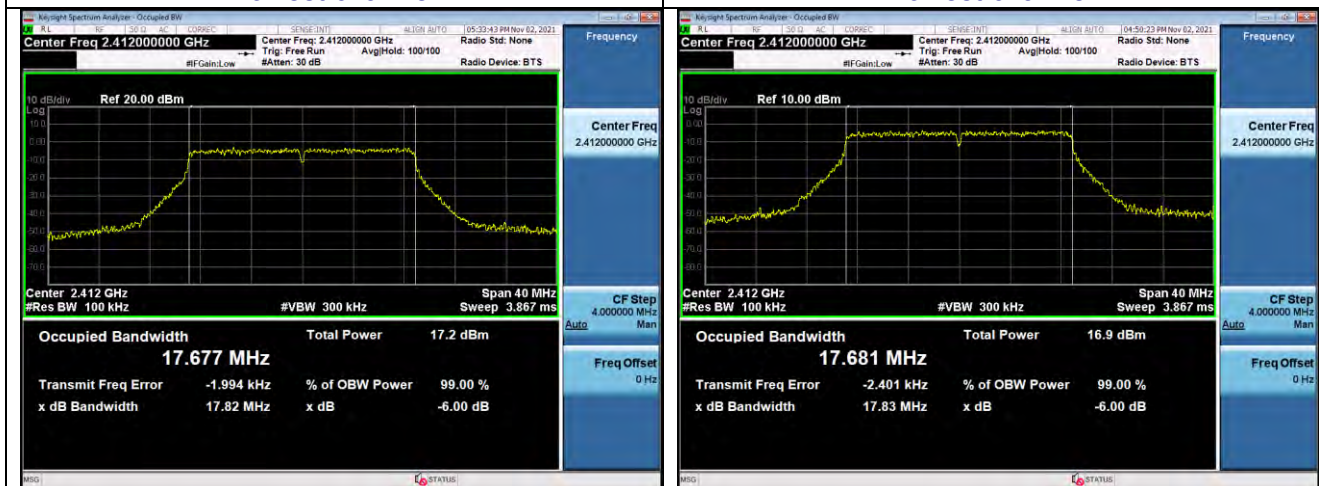ANT1
802.11n(HT20)
Lowest channelANT2
802.11n(HT20)
Lowest channel



Middle channel

Middle channel

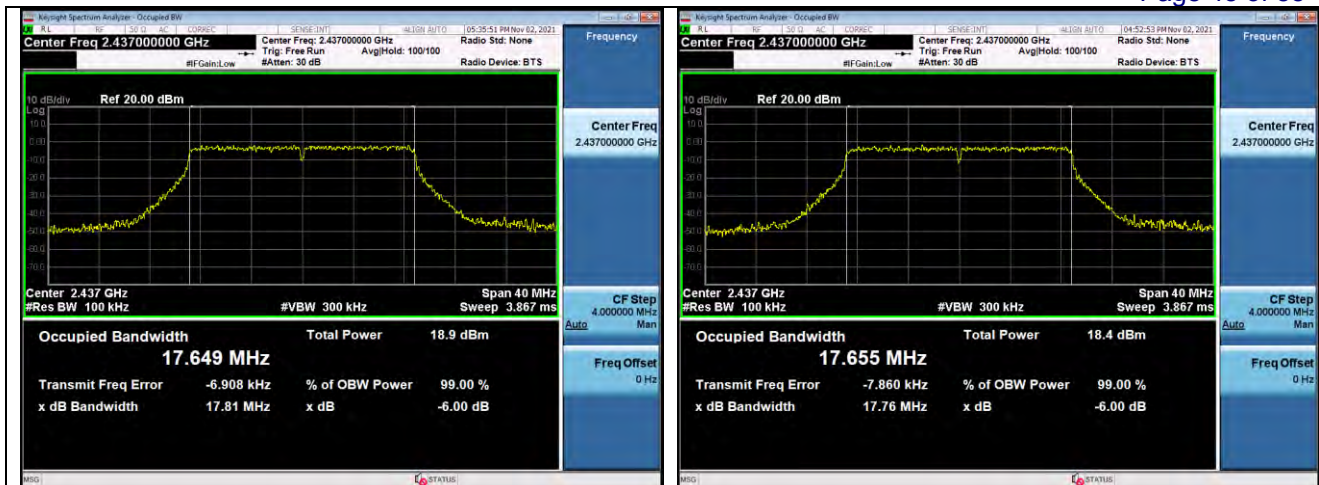


Highest channel

Highest channel

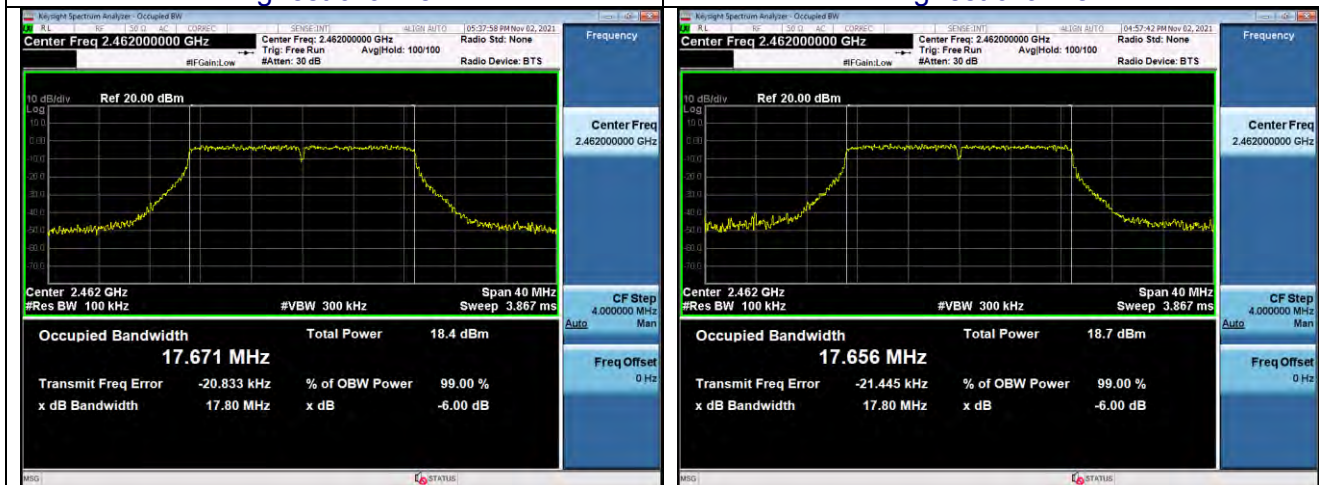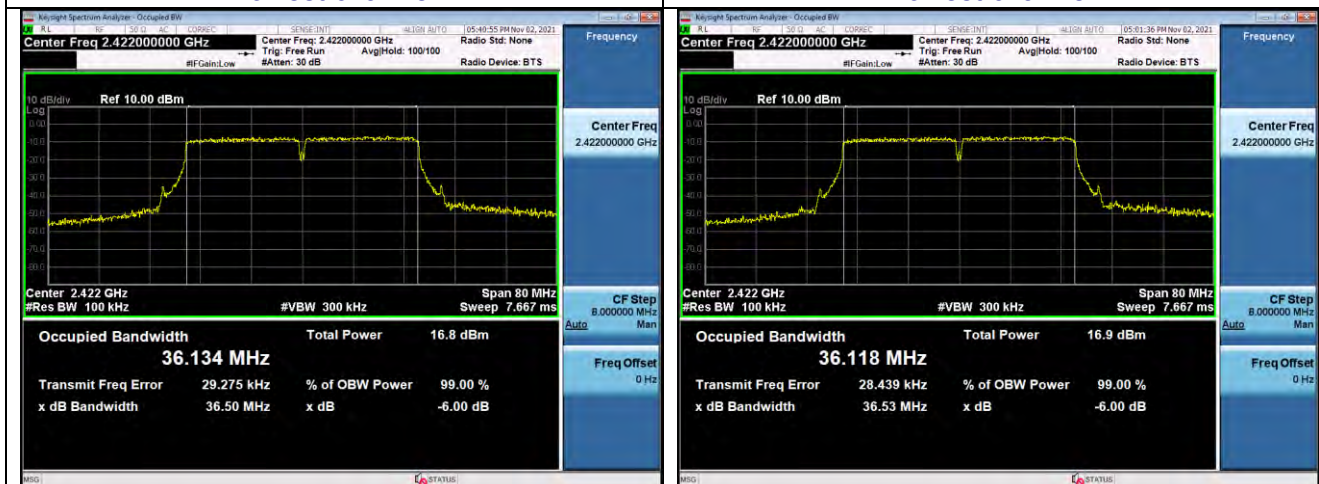ANT1
802.11n(HT40)
Lowest channelANT2
802.11n(HT40)
Lowest channel

Middle channel

Middle channel

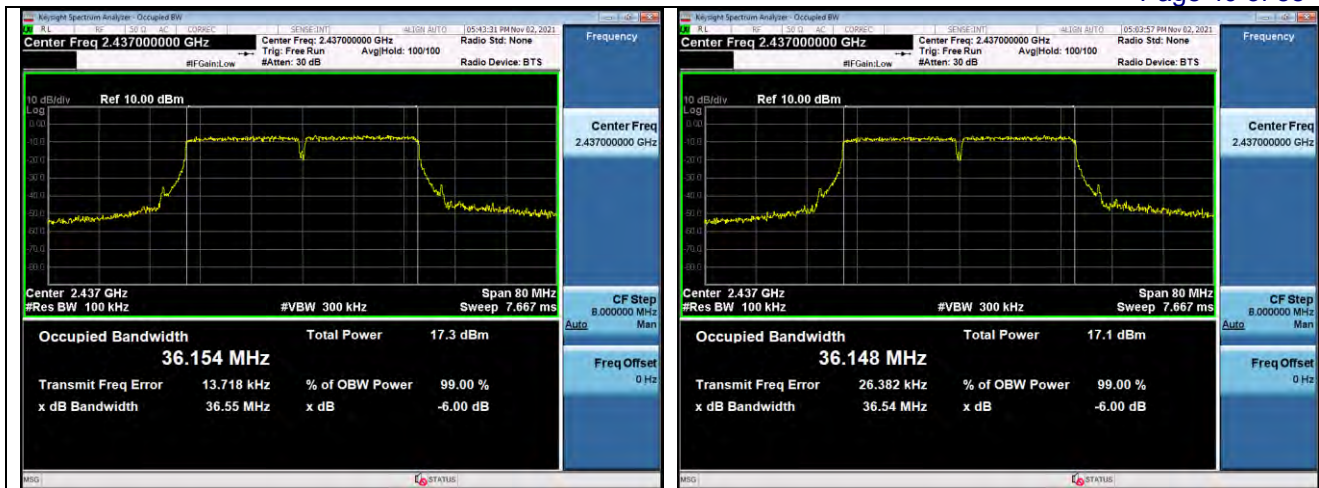

Highest channel

Highest channel



8. OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V

Test Channel	Frequency	Maximum Peak Conducted Output Power (dBm)			LIMIT
	(MHz)	Antenna 1	Antenna 2	MIMO	dBm
TX 802.11b Mode					
CH01	2412	15.15	15.14	/	30
CH06	2437	15.85	16.26	/	30
CH11	2462	14.36	14.86	/	30
TX 802.11g Mode					
CH01	2412	11.78	12.04	/	30
CH06	2437	13.80	12.92	/	30
CH11	2462	13.45	12.88	/	30
TX 802.11n20 Mode					
CH01	2412	11.73	11.34	14.55	27.99
CH06	2437	13.34	12.57	15.98	27.99
CH11	2462	12.94	13.23	16.10	27.99
TX 802.11n40 Mode					
CH03	2422	10.99	11.07	14.04	27.99
CH06	2437	11.52	11.41	14.48	27.99
CH09	2452	11.71	11.11	14.43	27.99
Note: This product supports antenna 1 and antenna 2 launch, but only support 802.11 n for MIMO mode, not support 802.11 b and 802.11 g for MIMO mode.					

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



9.6 TEST RESULTS

Test plot as follows:

802.11b Modulation

Spurious emission

Low Channel

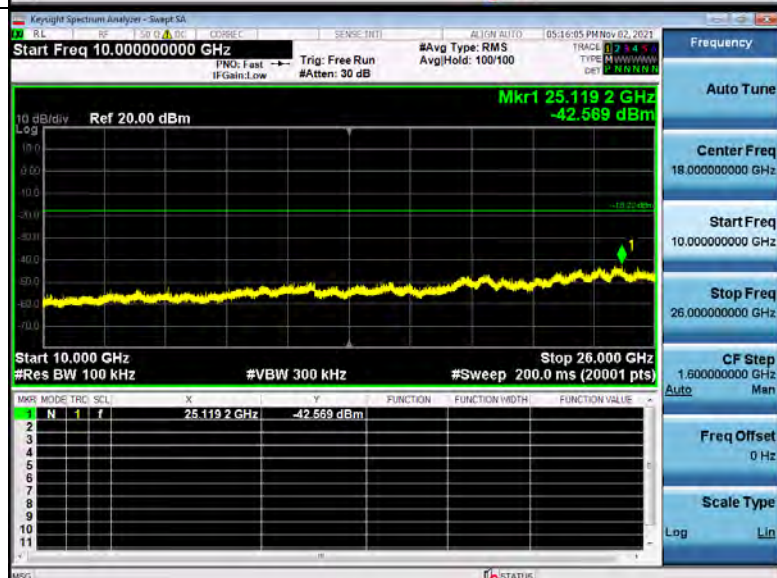
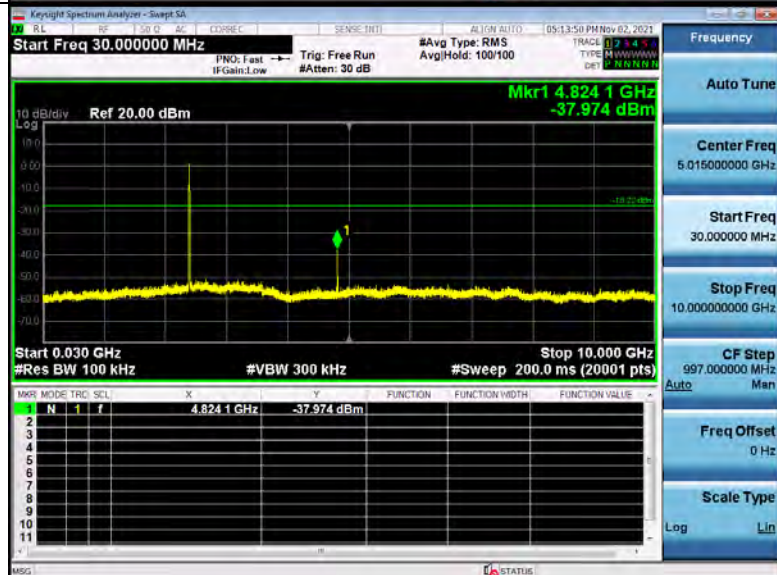


The screenshot displays a Keysight Spectrum Analyzer interface. The main plot shows a yellow trace of a signal centered at 2.437 GHz. A green horizontal line indicates the noise floor at -172 dBm. The peak of the signal is marked with a green diamond and labeled "Mkr1 2.436 485 GHz 2.276 dBm". The y-axis is labeled "10 dB/div Log" and ranges from -70 to 10. The x-axis is labeled "Center Freq 2.43700000 GHz". The right-hand side of the screen contains various control panels:

- Frequency**: Auto Tune
- Center Freq**: 2.43700000 GHz
- Start Freq**: 2.417000000 GHz
- Stop Freq**: 2.457000000 GHz
- CF Step**: 4.000000 MHz (Auto)
- Freq Offset**: 0 Hz
- Scale Type**: Log

At the bottom, the following parameters are displayed:

- Center 2.43700 GHz
- #Res BW 100 kHz
- #VBW 300 kHz
- Sweep 4.267 ms (8001 pts)
- Span 40.00 MHz

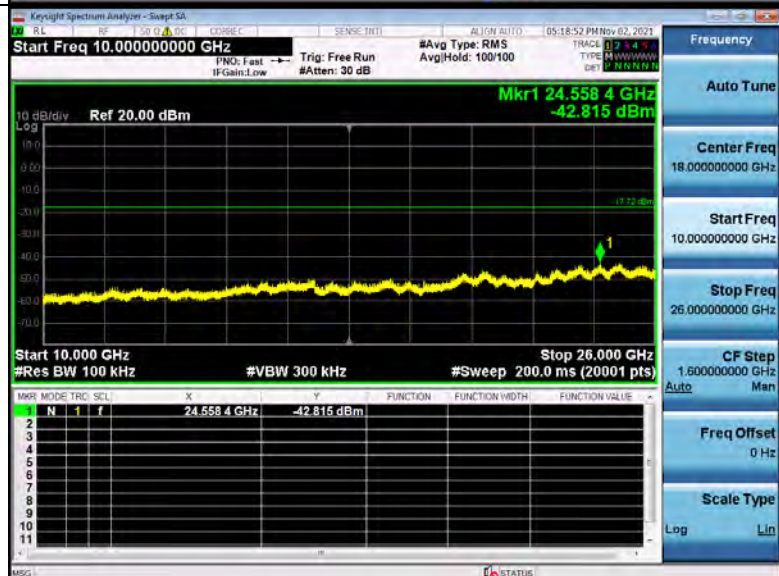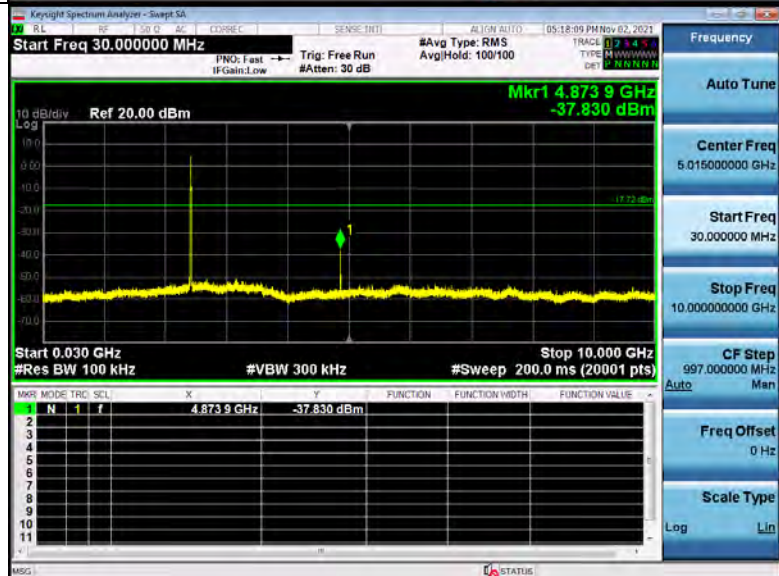

Keysight Spectrum Analyzer - Sweep SA

Center Freq 2.46200000 GHz

Ref 20.00 dBm

10 dB/div

Log

Mkr1 2.461480 GHz 2.660 dBm

Center 2.46200 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 40.00 MHz

Sweep 4.267 ms (8001 pts)

Frequency

Auto Tune

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz

Stop Freq 2.48200000 GHz



CF Step 4.000000 MHz

Auto Man


Freq Offset 0 Hz

Scale Type


Log Lin

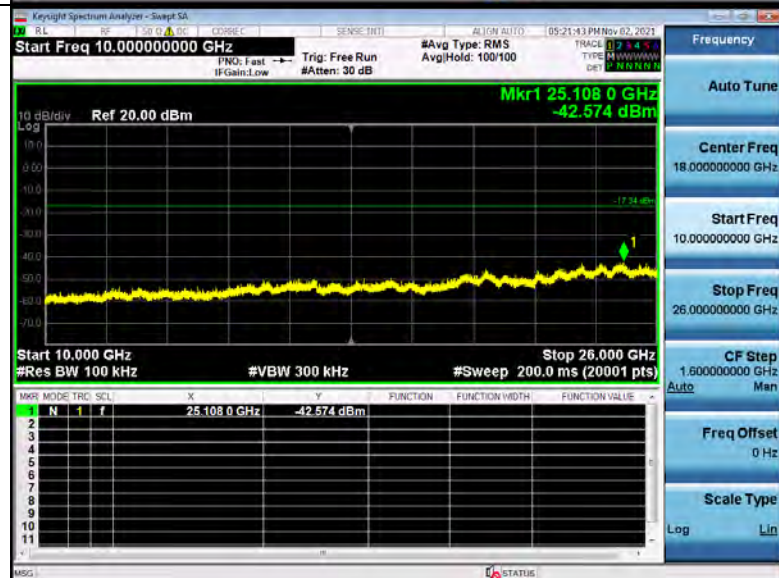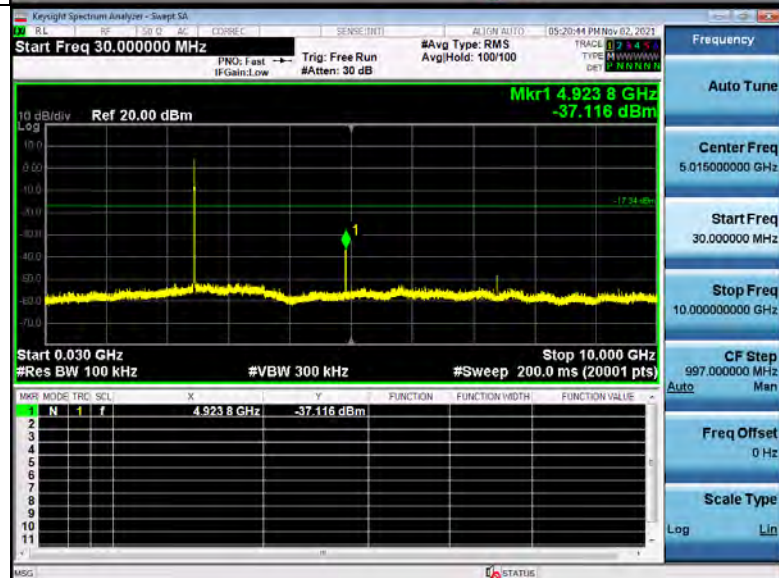

Lowest Channel

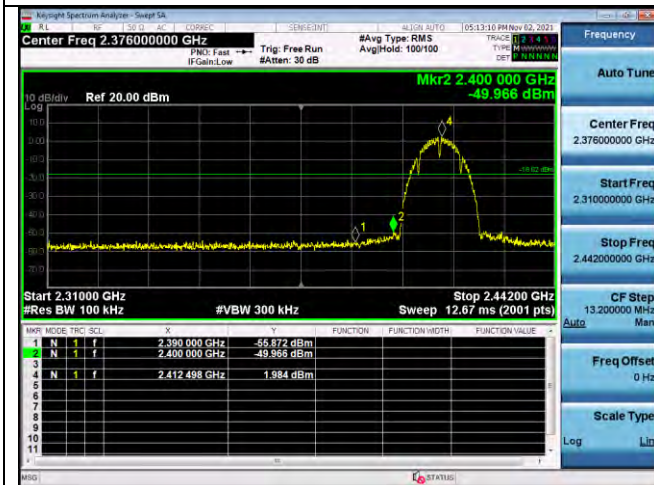

Highest Channel

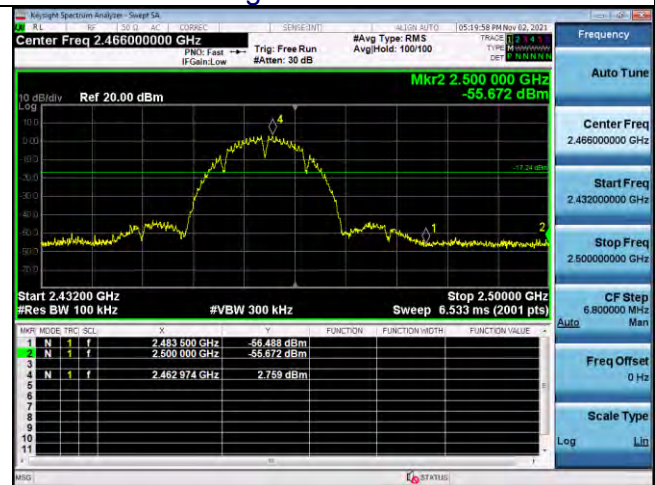



Left Band Edge

Right Band Edge



802.11g Modulation

Spurious emission

Low Channel

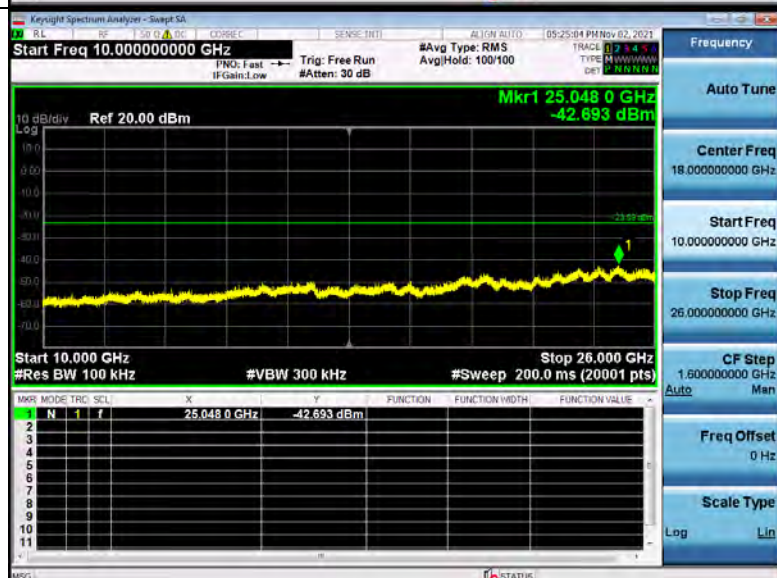
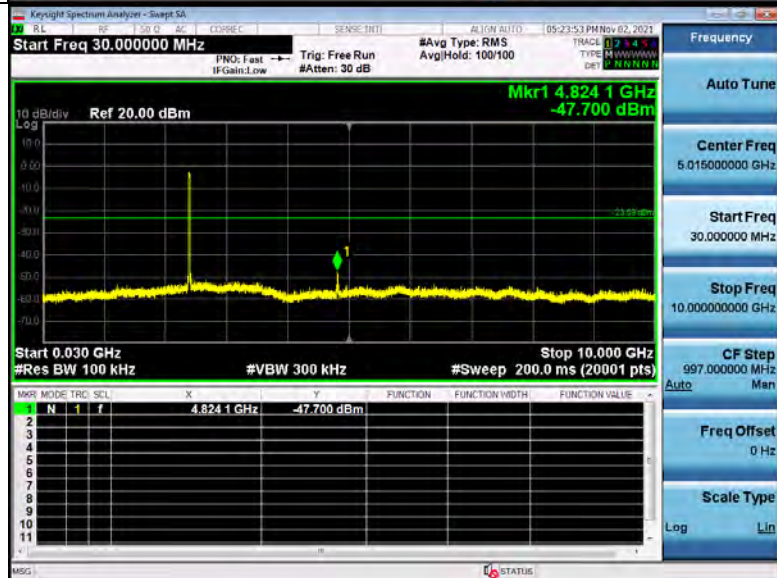


Middle Channel

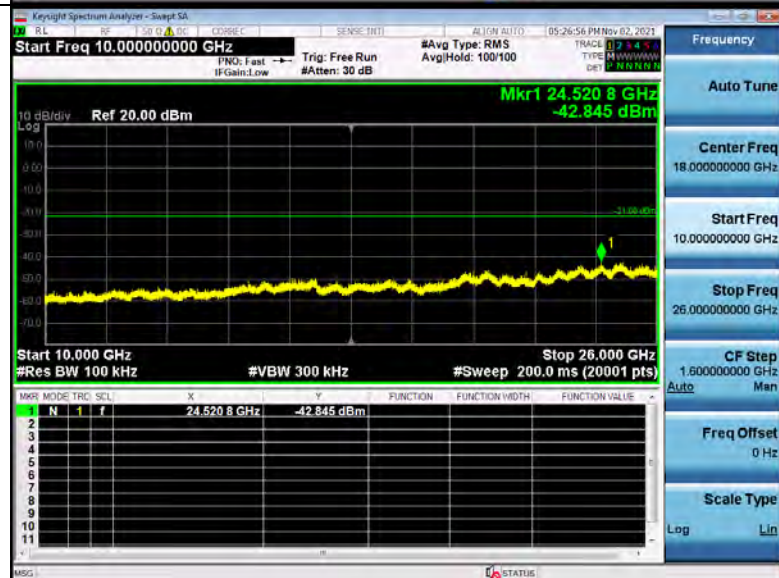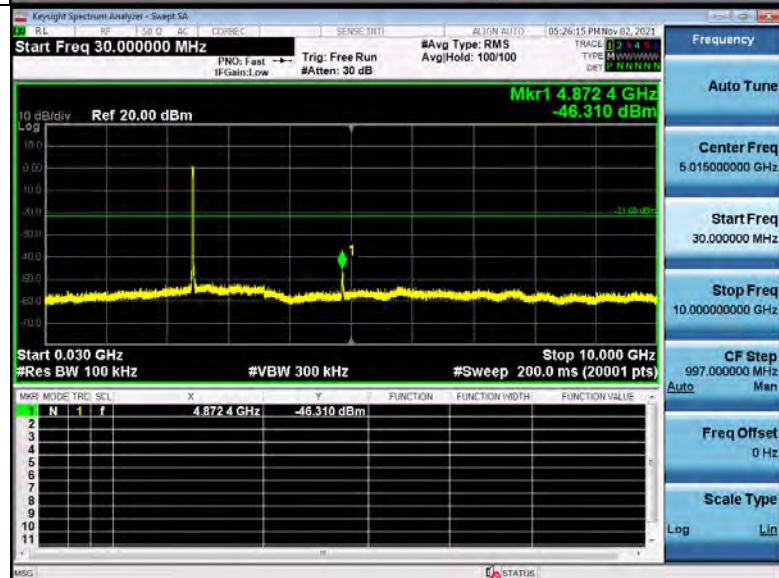




High Channel

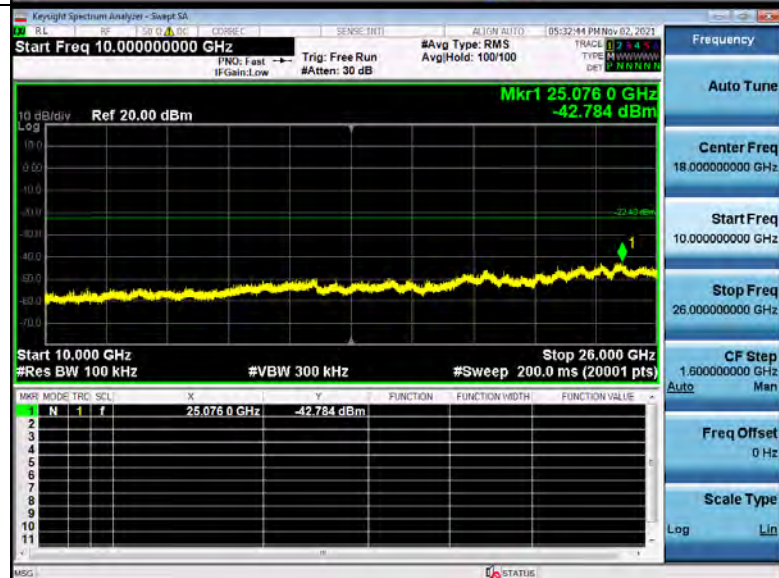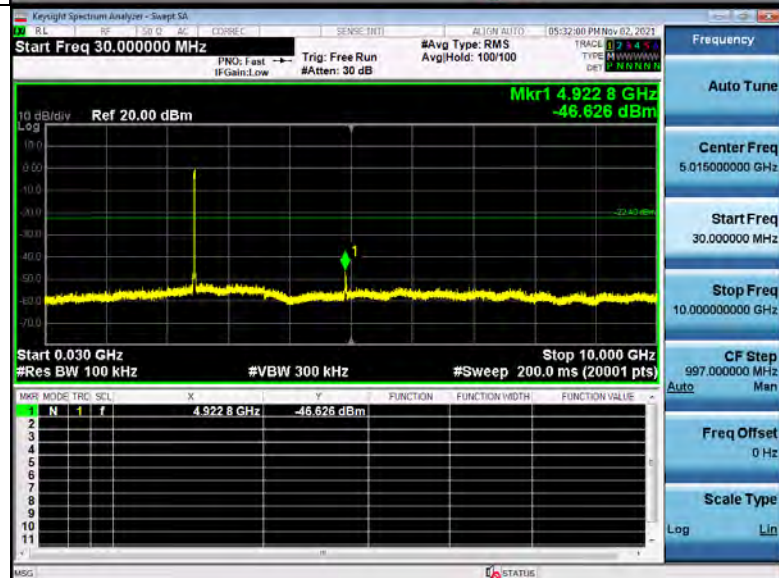


Lowest Channel

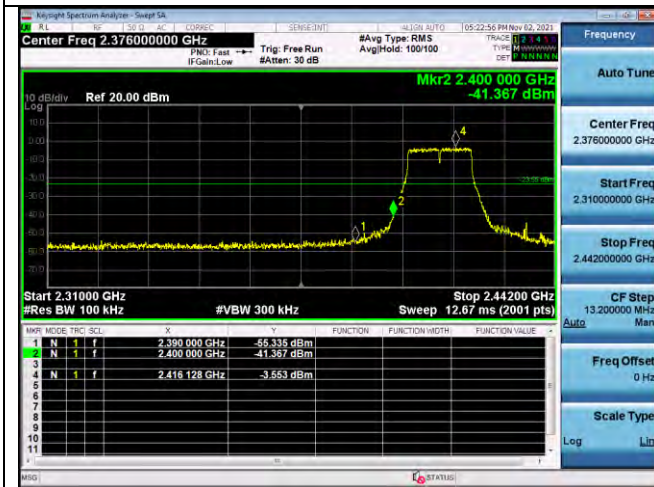

Left Band Edge


Highest Channel

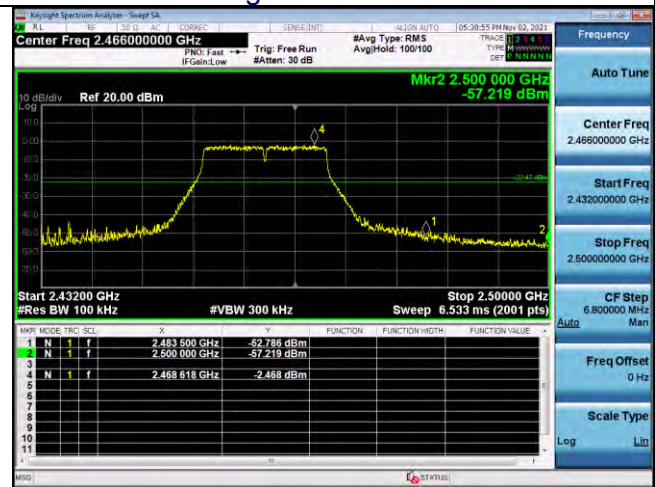



Right Band Edge

802.11n20 Modulation



Spurious emission

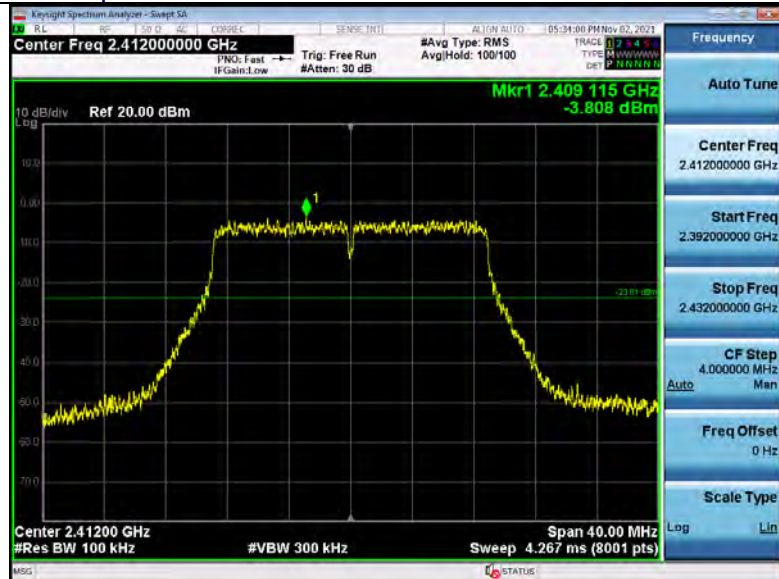

Low Channel

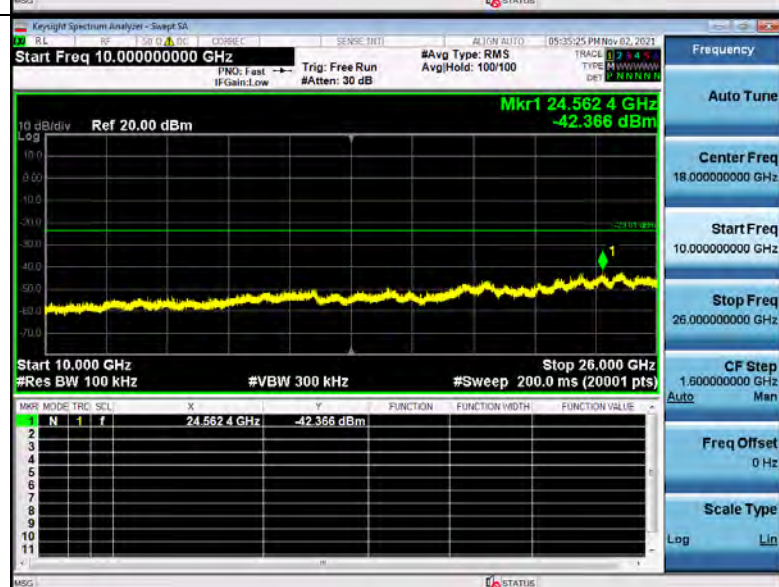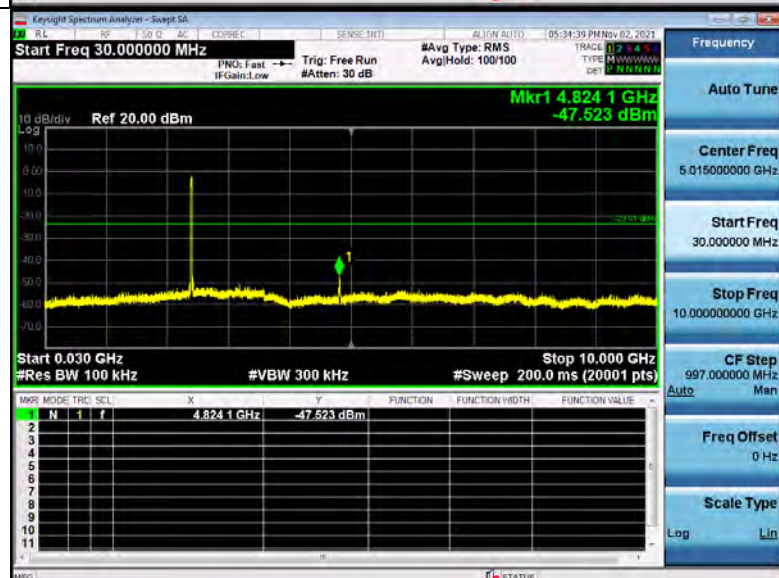

Middle Channel

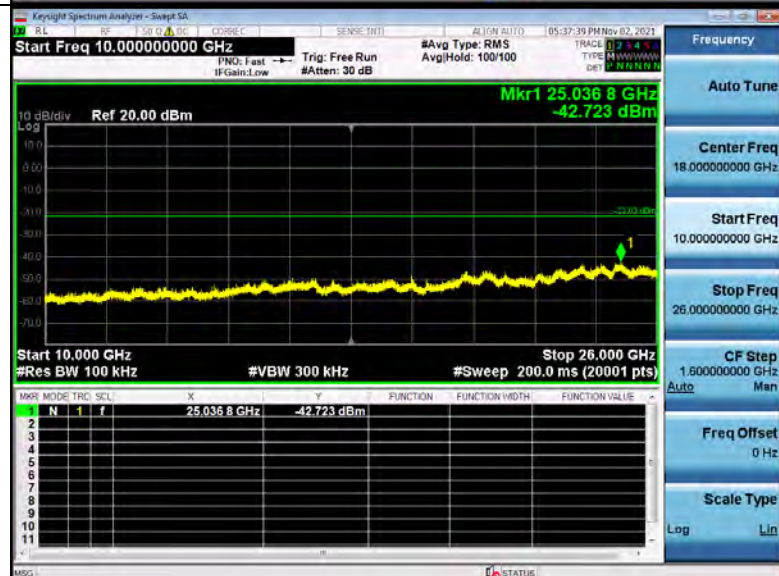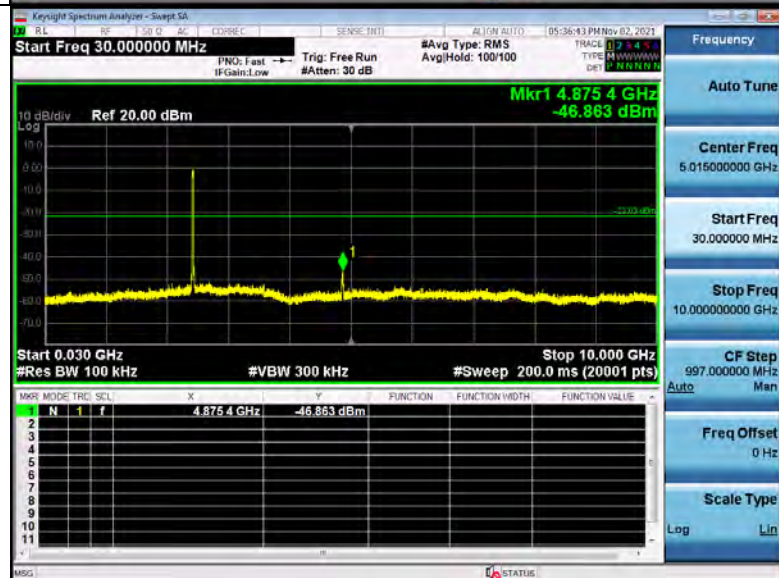

Keysight Spectrum Analyzer - Setup SA

SENSE INT1

ALN AUTO

05:38:14 PM Nov 02, 2021

Center Freq 2.46200000 GHz

#Avg Type: RMS

Avg/Hold: 600/100

TRAC1 1 2 3 4 5 6

TYPE: MWWWWWW

DET: PWR

Frequency

Auto Tune

Center Freq 2.46200000 GHz

Start Freq 2.442000000 GHz

Stop Freq 2.482000000 GHz

CF Step 4.000000 MHz

Auto Man

Freq Offset 0 Hz

Scale Type

Log Lin

10 dB/div Ref 20.00 dBm

PNO: Fast

IF Gain: Low

Trig: Free Run

#Att: 30 dB

Mkr1 2.459 115 GHz -2.451 dBm

Center 2.46200 GHz

#Res BW 100 kHz



#VBW 300 kHz

Span 40.00 MHz


Sweep 4.267 ms (8001 pts)

MSVC


F6 STATUS

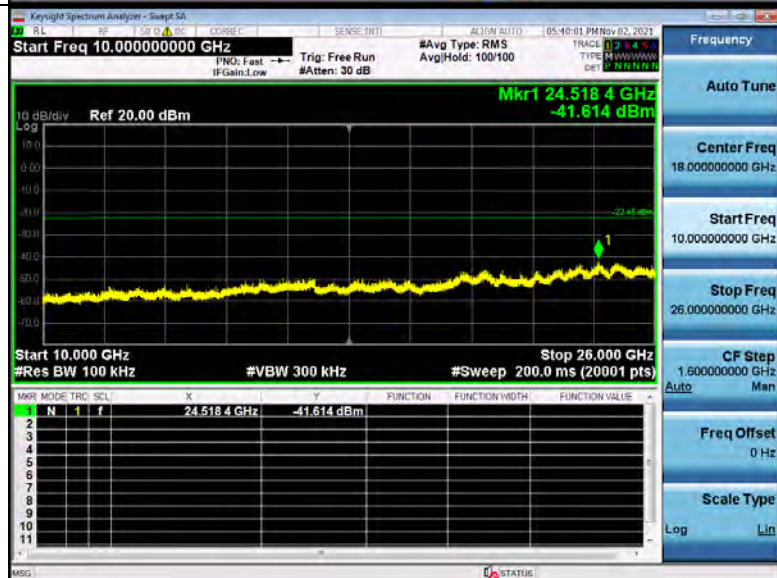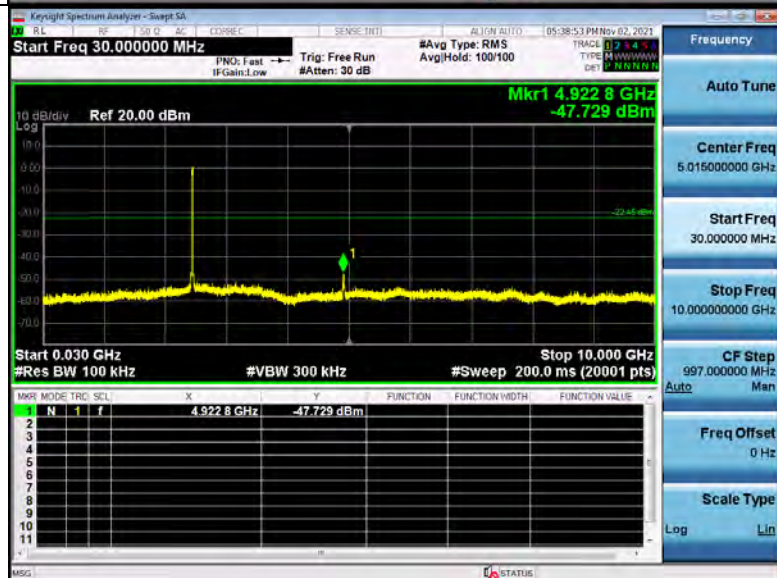

Lowest Channel

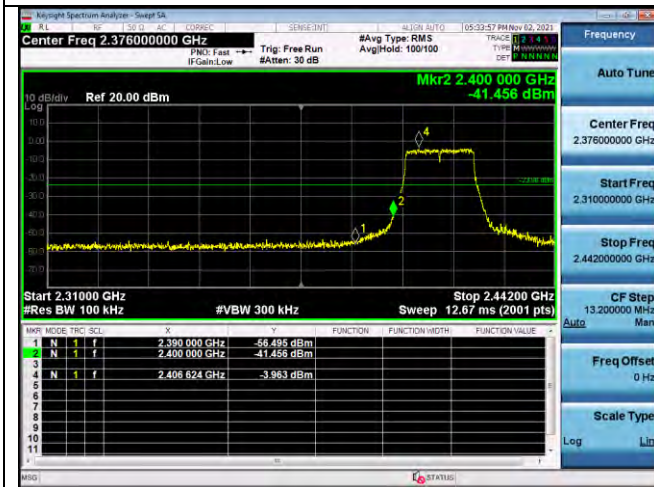

Highest Channel

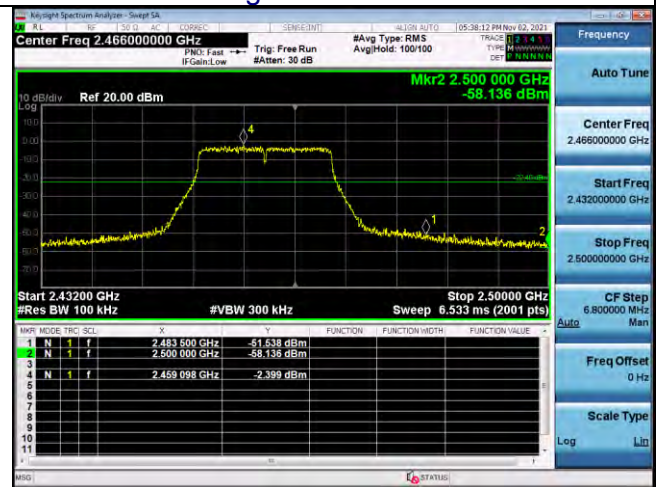

Left Band Edge

Right Band Edge

Keysight Spectrum Analyzer - Setup SA

Center Freq 2.43700000 GHz

10 dB/div Ref 20.00 dBm

10.000000 0.000000 -20.000000 -40.000000 -60.000000 -80.000000 -100.000000

Center 2.437000 GHz

Span 80.00 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 8.000 ms (8001 pts)

Frequency

Auto Tune

Center Freq 2.43700000 GHz

Start Freq 2.397000000 GHz

Stop Freq 2.477000000 GHz



CF Step 8.000000 MHz

Auto Man

Freq Offset 0 Hz

Scale Type

Log Lin

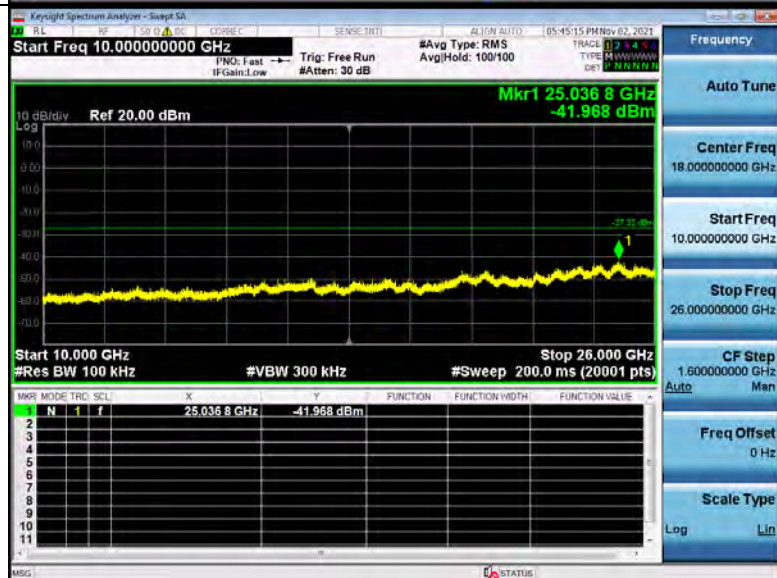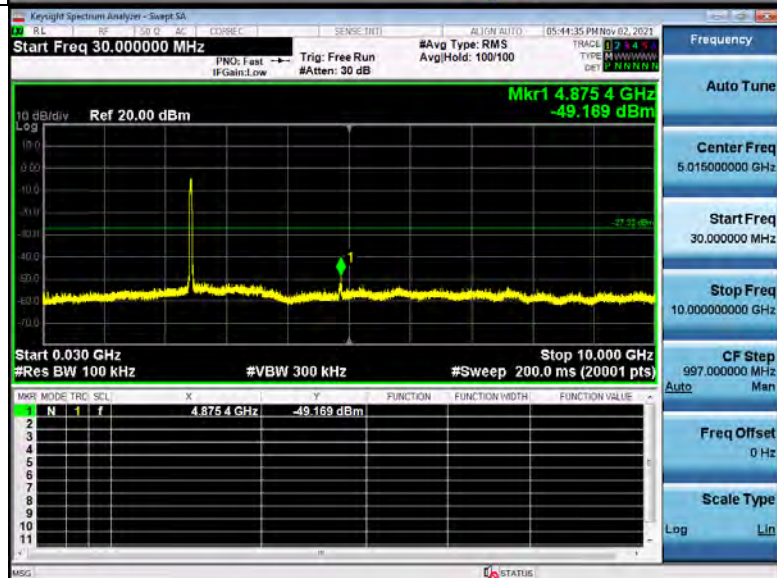

Keysight Spectrum Analyzer - Screenshot

Center Freq 2.452000000 GHz

Span 80.00 MHz

Resolution BW 100 kHz

Video BW 300 kHz

Frequency: 2.452000000 GHz

Auto Tune

Center Freq: 2.452000000 GHz

Start Freq: 2.412000000 GHz

Stop Freq: 2.492000000 GHz

CF Step: 8.000000 MHz

Freq Offset: 0 Hz

Scale Type: Log

Log

Ref 20.00 dBm

10 dB/div

Log

Mkr1 2.465 35 GHz -7.172 dBm

Trig: Free Run

#Att: 30 dB

#Avg Type: RMS

Avg Hold: 100/100

Trace 1 2 3 4 5 6

Type M W W W W W

Def 2 1 0 1 0 1 0

05:47:25 PM Nov 02, 2021

ALION AUTO

SENSE INT

RF

100.0

20.0

0.0

-20.0

-40.0

-60.0

-80.0

-100.0

0.00

0.01

0.02

0.03

0.04

0.05

0.06

0.07

0.08

0.09

0.10

0.11

0.12

0.13

0.14

0.15

0.16

0.17

0.18

0.19

0.20

0.21

0.22

0.23

0.24

0.25

0.26

0.27

0.28

0.29

0.30

0.31

0.32

0.33

0.34

0.35

0.36

0.37

0.38

0.39

0.40

0.41

0.42

0.43

0.44

0.45

0.46

0.47

0.48

0.49

0.50

0.51

0.52

0.53

0.54

0.55

0.56

0.57

0.58

0.59

0.60

0.61

0.62

0.63

0.64

0.65

0.66

0.67

0.68

0.69

0.70

0.71

0.72

0.73

0.74

0.75

0.76

0.77

0.78

0.79

0.80

0.81

0.82

0.83

0.84

0.85

0.86

0.87

0.88

0.89

0.90

0.91

0.92

0.93

0.94

0.95

0.96

0.97

0.98

0.99

1.00

1.01

1.02

1.03

1.04

1.05

1.06

1.07

1.08

1.09

1.10

1.11

1.12

1.13

1.14

1.15

1.16

1.17

1.18

1.19

1.20

1.21

1.22

1.23

1.24

1.25

1.26

1.27

1.28

1.29

1.30

1.31

1.32

1.33

1.34

1.35

1.36

1.37

1.38

1.39

1.40

1.41

1.42

1.43

1.44

1.45

1.46

1.47

1.48

1.49

1.50

1.51

1.52

1.53

1.54

1.55

1.56

1.57

1.58

1.59

1.60

1.61

1.62

1.63

1.64

1.65

1.66

1.67

1.68

1.69

1.70

1.71

1.72

1.73

1.74

1.75

1.76

1.77

1.78

1.79

1.80

1.81

1.82

1.83

1.84

1.85

1.86

1.87

1.88

1.89

1.90

1.91

1.92

1.93

1.94

1.95

1.96

1.97

1.98

1.99

2.00

2.01

2.02

2.03

2.04

2.05

2.06

2.07

2.08

2.09

2.10

2.11

2.12

2.13

2.14

2.15

2.16

2.17

2.18

2.19

2.20

2.21

2.22

2.23

2.24

2.25

2.26

2.27

2.28

2.29

2.30

2.31

2.32

2.33

2.34

2.35

2.36

2.37

2.38

2.39

2.40

2.41

2.42

2.43

2.44

2.45

2.46

2.47

2.48

2.49

2.50

2.51

2.52

2.53

2.54

2.55

2.56

2.57

2.58

2.59

2.60

2.61

2.62

2.63

2.64

2.65

2.66

2.67

2.68

2.69

2.70

2.71

2.72

2.73

2.74

2.75

2.76

2.77

2.78

2.79

2.80

2.81

2.82

2.83

2.84

2.85

2.86

2.87

2.88

2.89

2.90

2.91

2.92

2.93

2.94

2.95

2.96

2.97

2.98

2.99

3.00

3.01

3.02

3.03

3.04

3.05

3.06

3.07

3.08

3.09

3.10

3.11

3.12

3.13

3.14

3.15

3.16

3.17

3.18

3.19

3.20

3.21

3.22

3.23

3.24

3.25

3.26

3.27

3.28

3.29

3.30

3.31

3.32

3.33

3.34

3.35

3.36

3.37

3.38

3.39

3.40

3.41

3.42

3.43

3.44

3.45

3.46

3.47



3.48

3.49

3.50

3.51

3.5

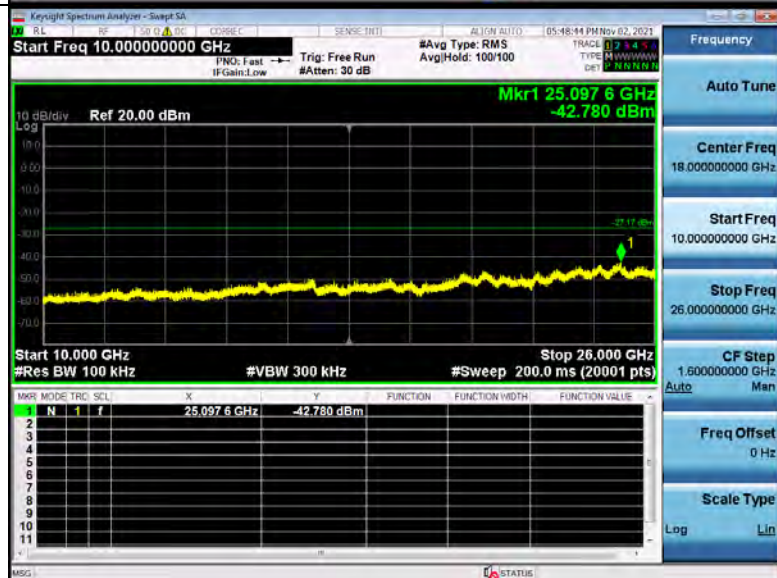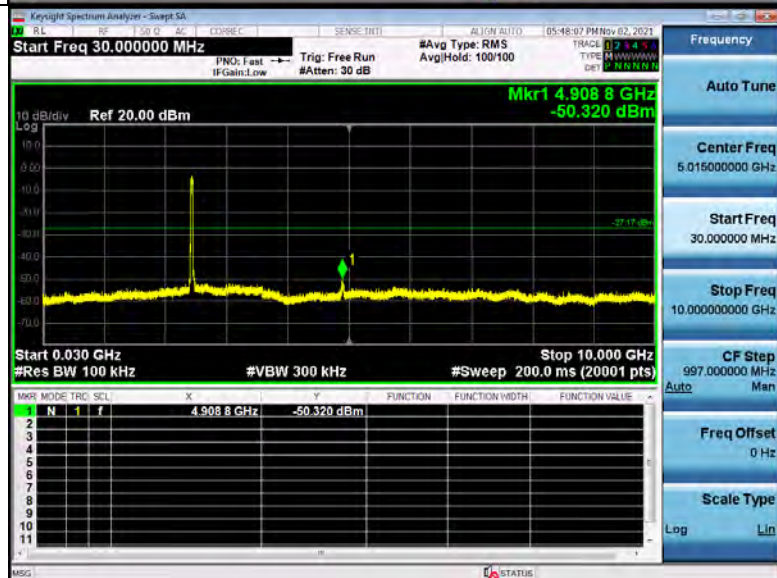




ANT2



802.11b Modulation

Spurious emission

Low Channel

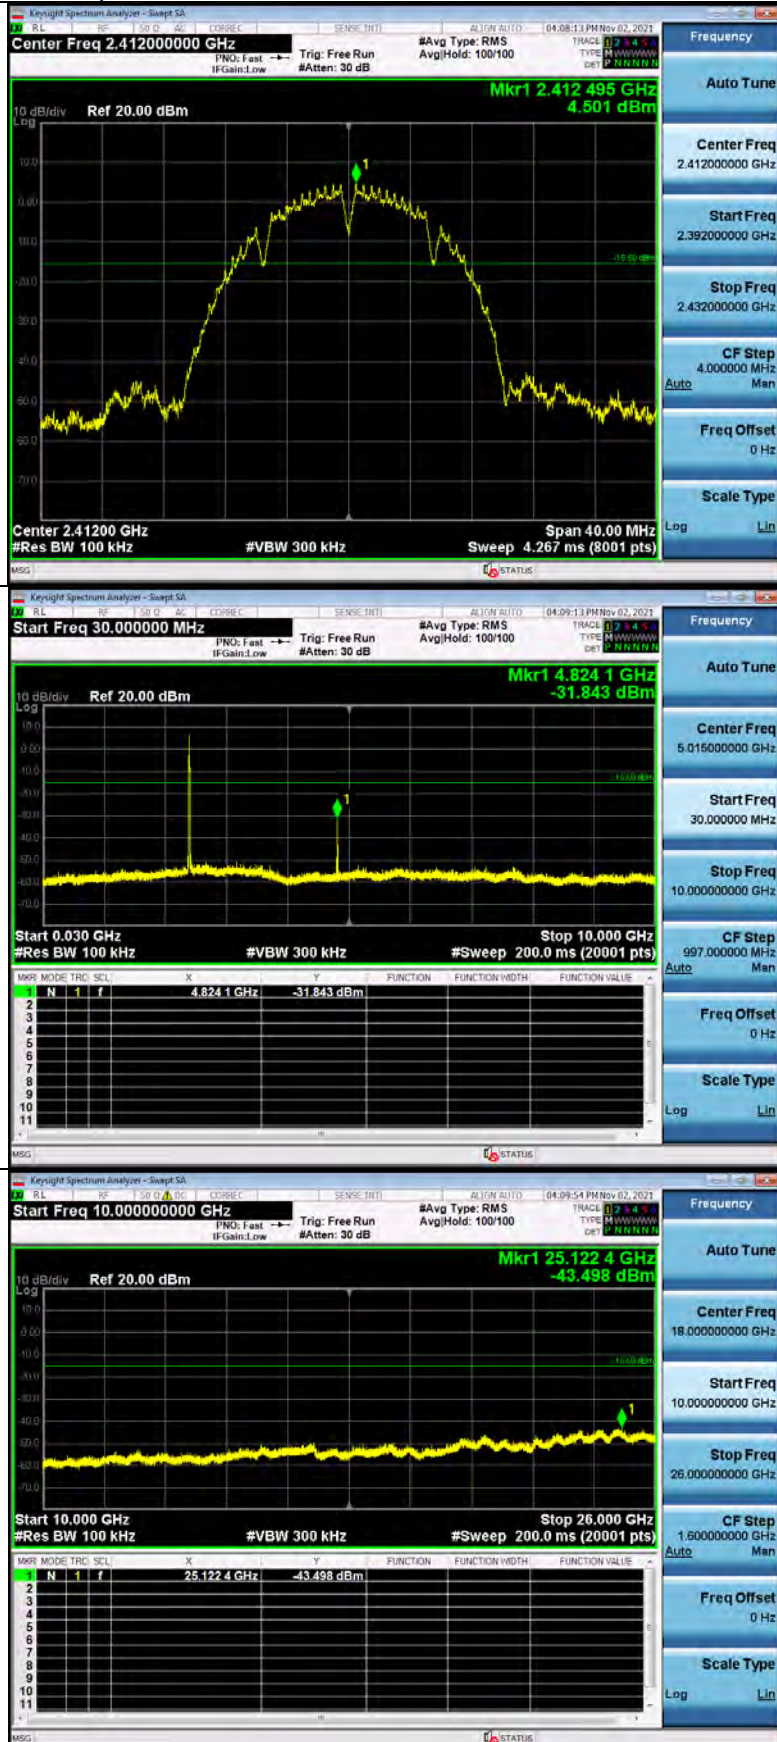

Middle Channel

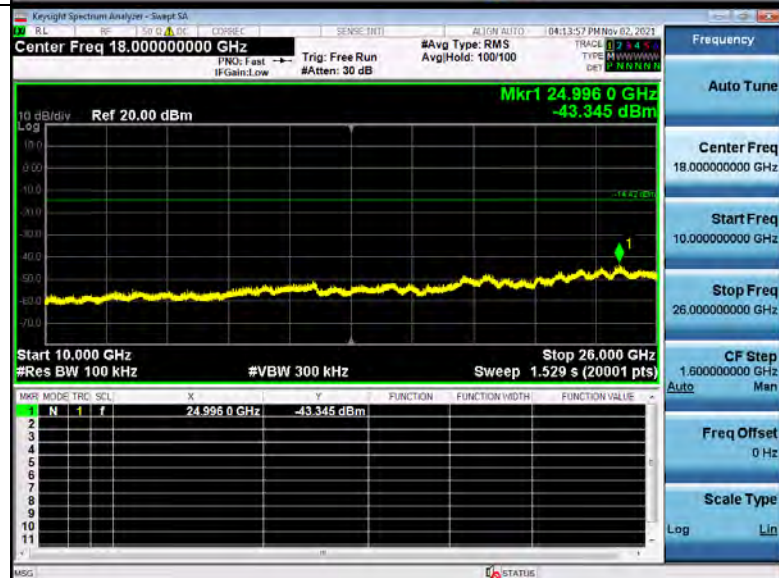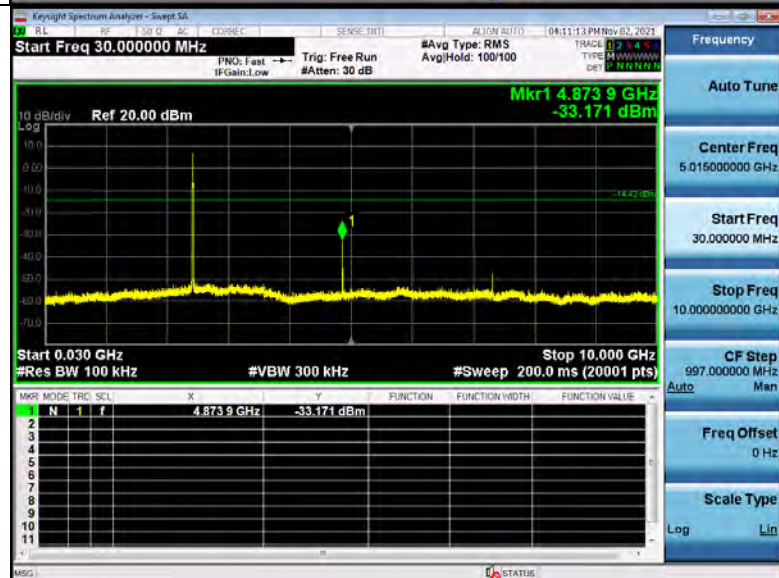

Keylight Spectrum Analyzer - Sweep SA



Center Freq 2.46200000 GHz

10 dB/div Ref 20.00 dBm


Center Freq 2.461475 GHz 3.286 dBm

Mkr1


Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Span 40.00 MHz Sweep 4.267 ms (8001 pts)

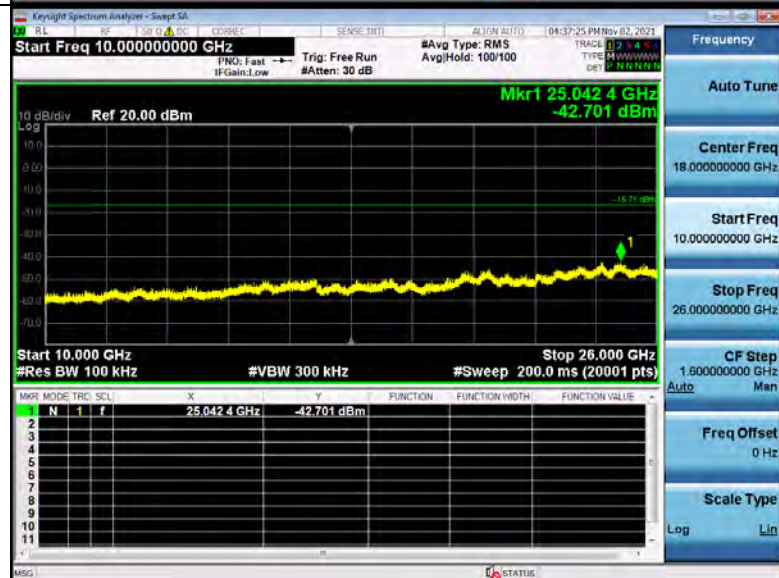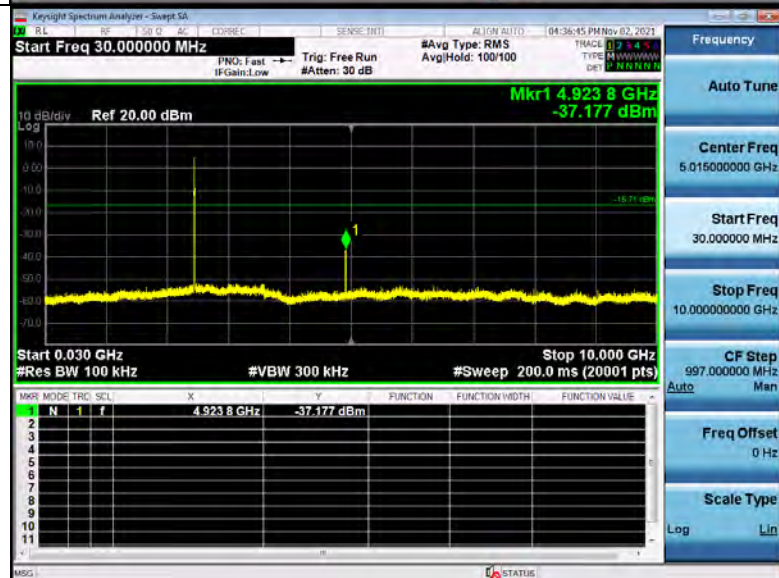

Lowest Channel

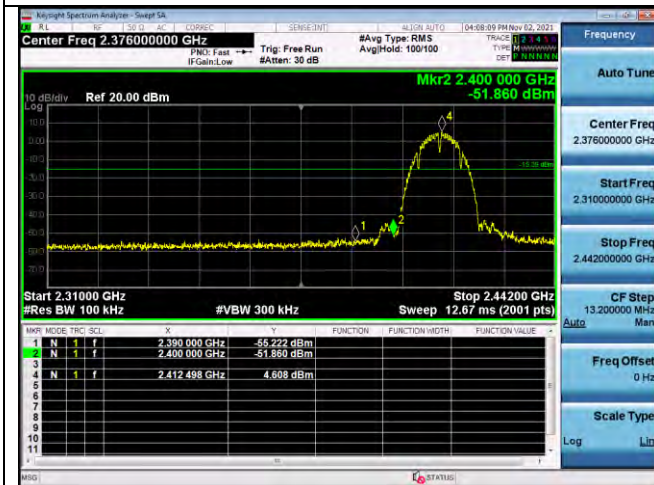

Highest Channel

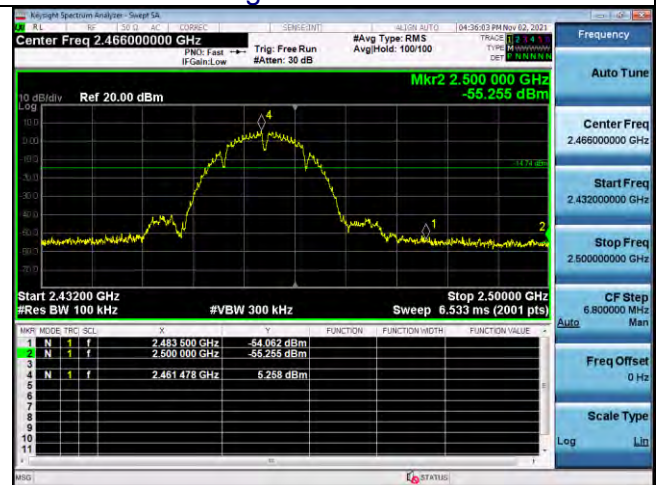



Left Band Edge

Right Band Edge




802.11g Modulation

Spurious emission




Low Channel

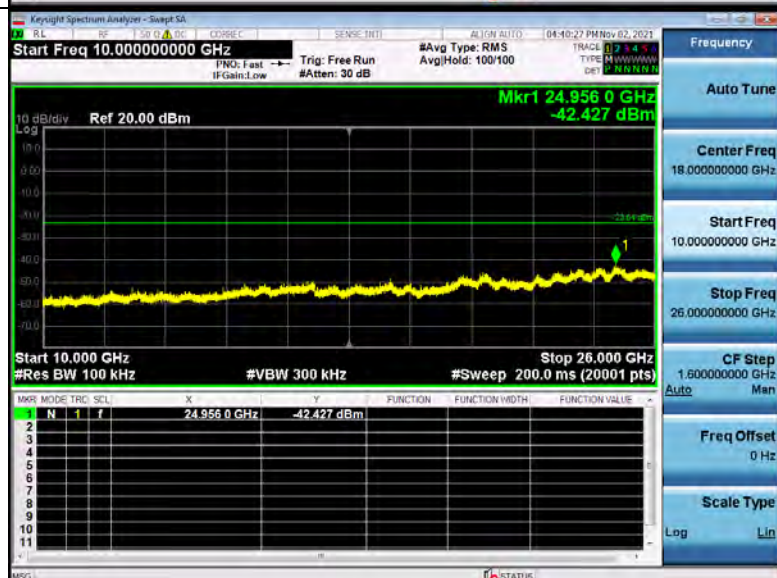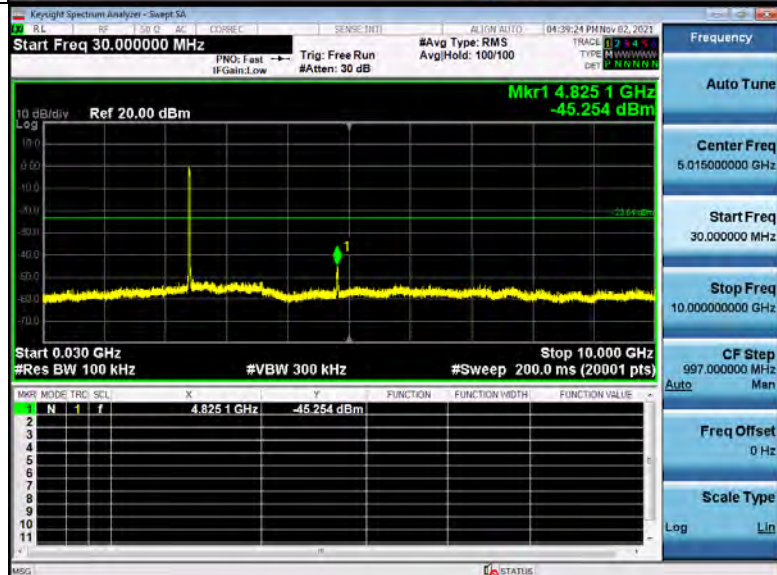


Middle Channel

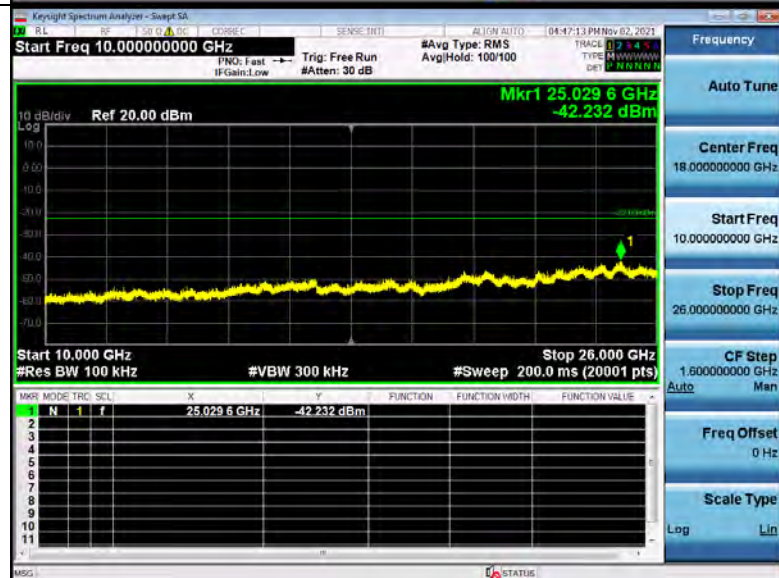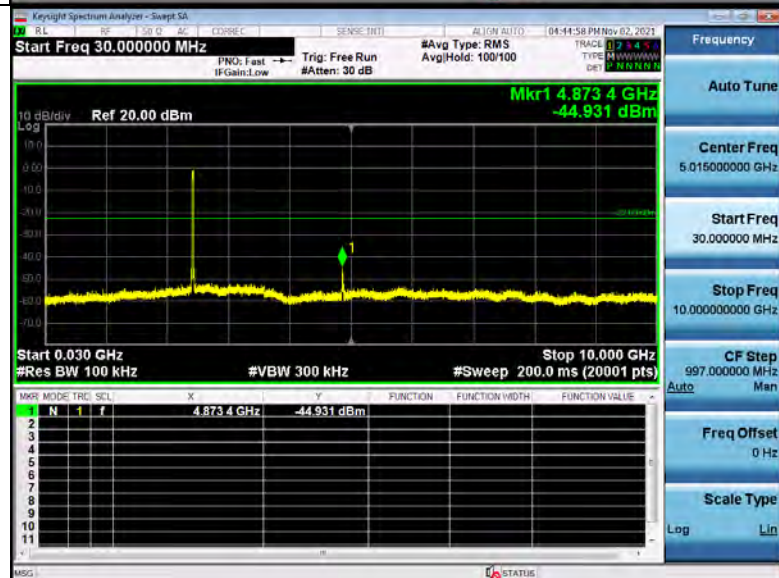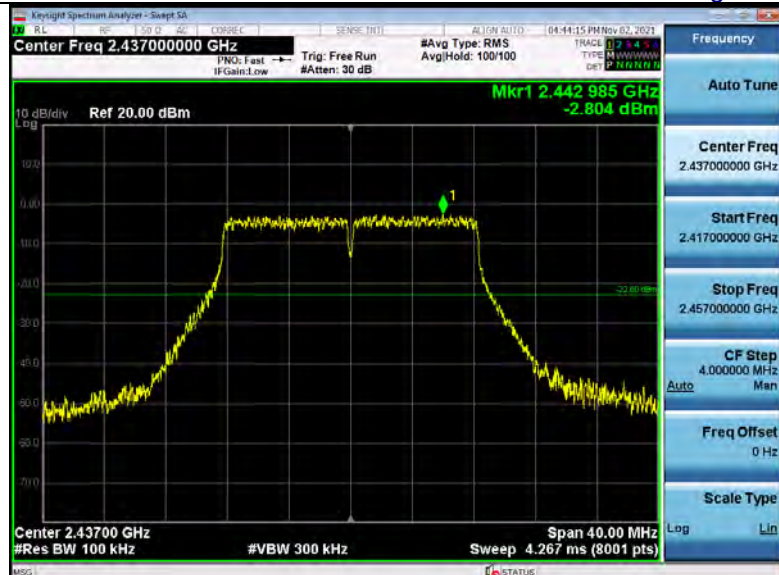

High Channel

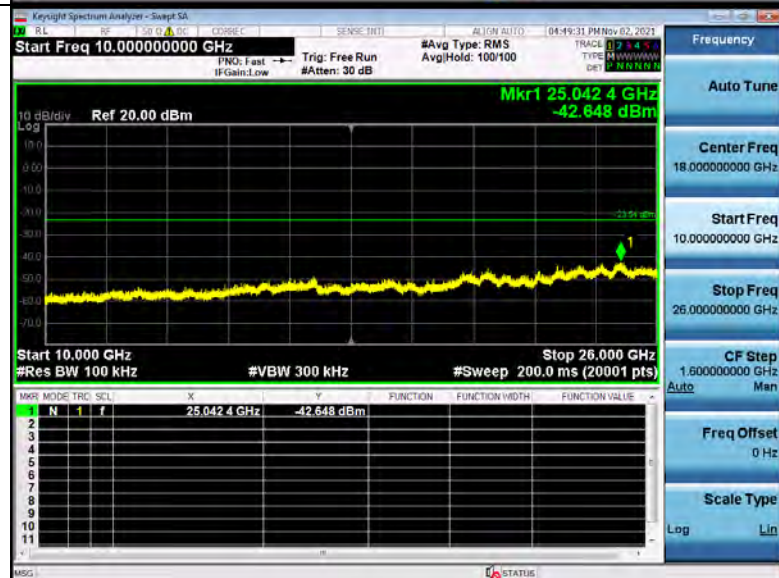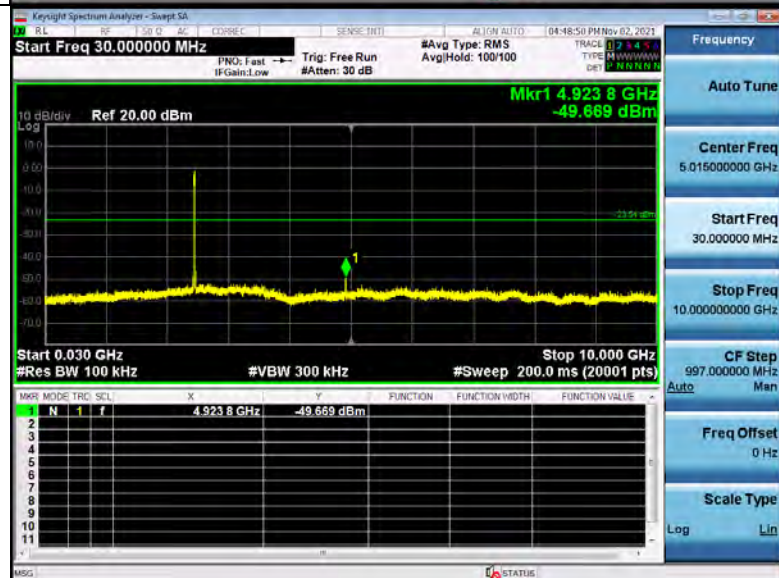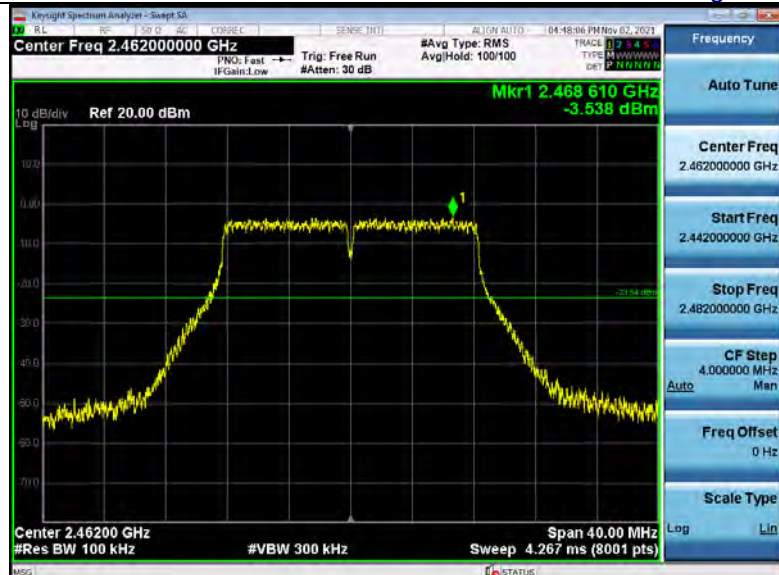


Lowest Channel

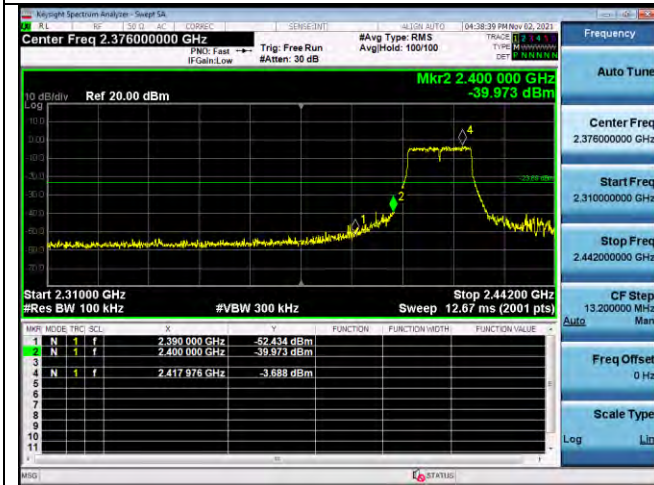

Left Band Edge

Highest Channel



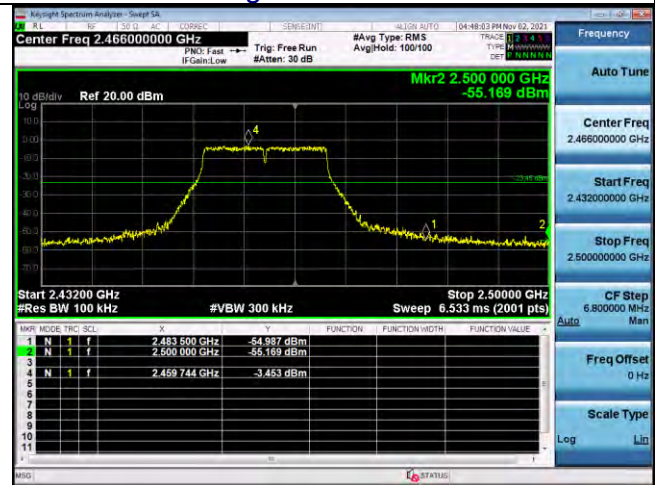


Right Band Edge



802.11n20 Modulation

Spurious emission




Low Channel

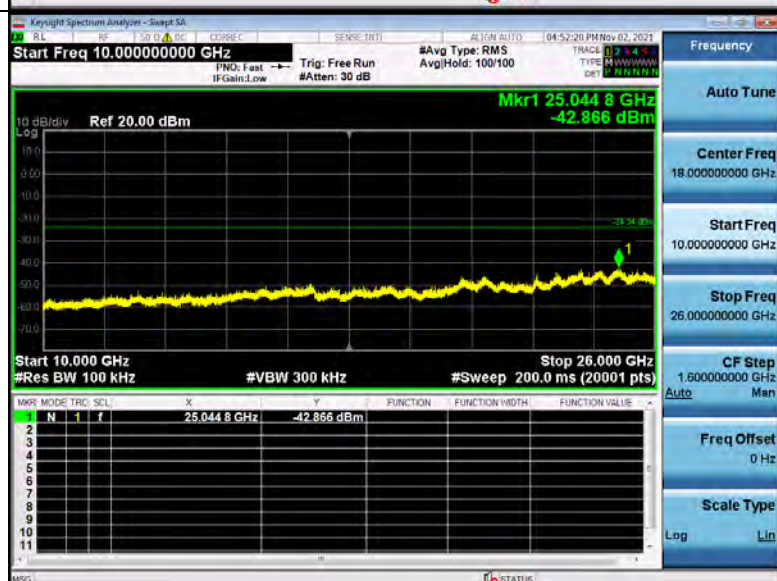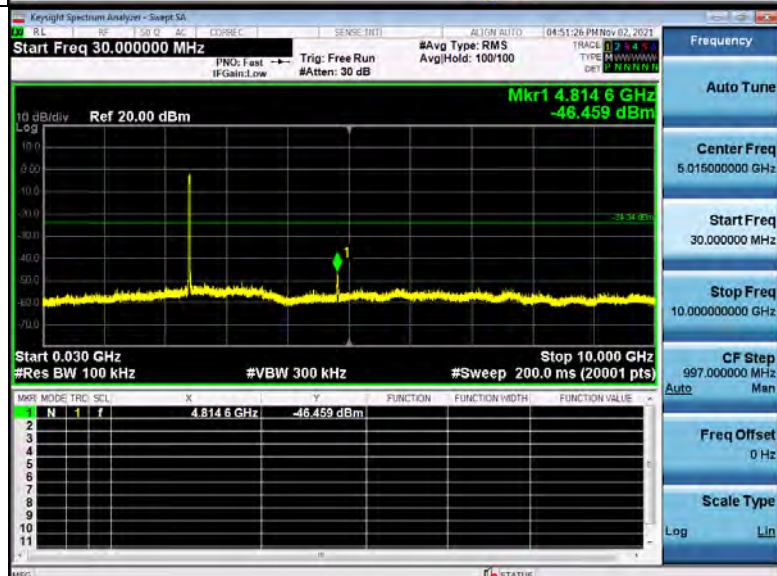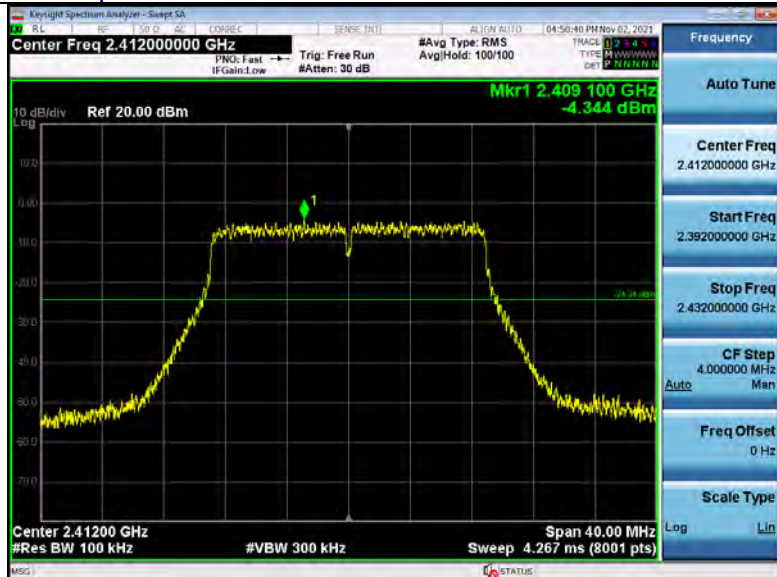


Middle Channel

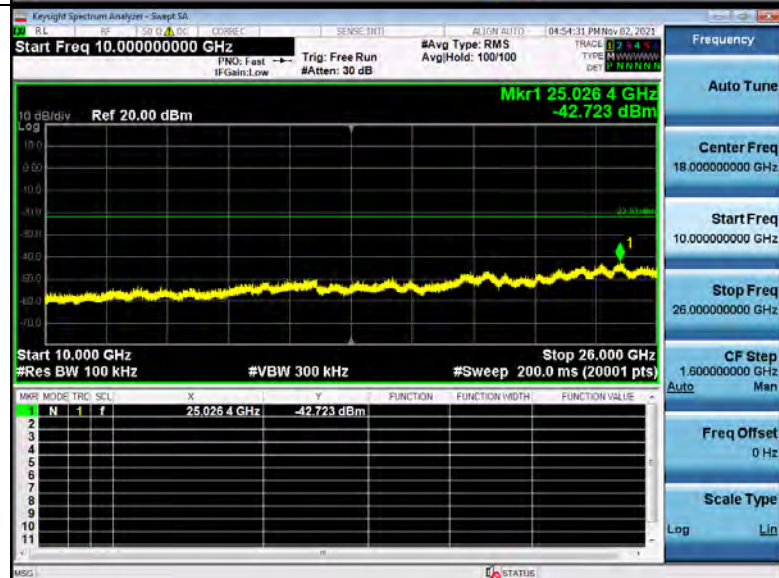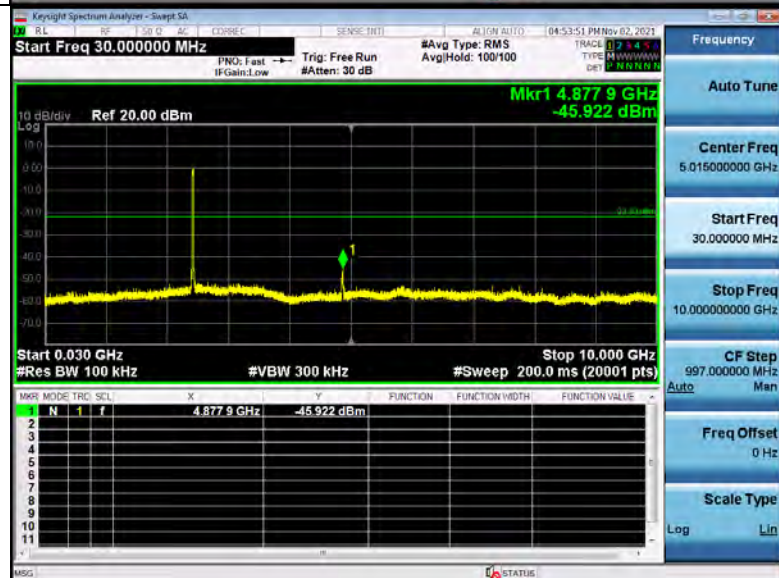

High Channel

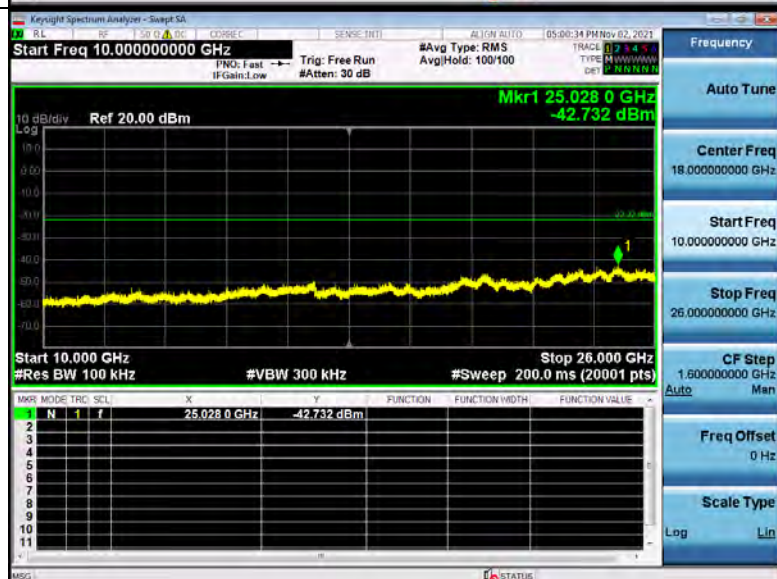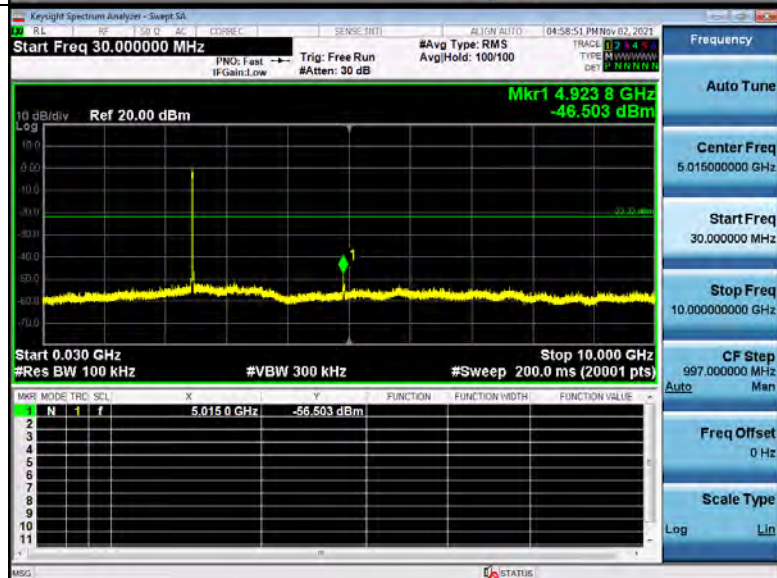
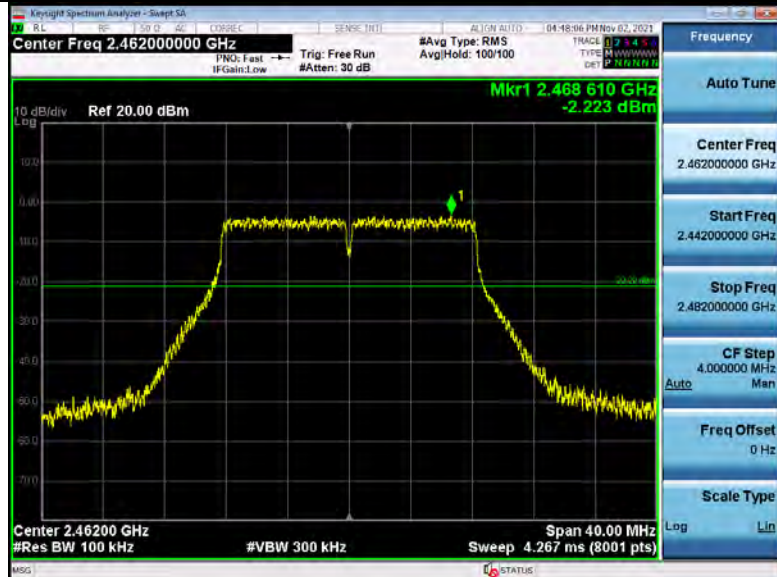


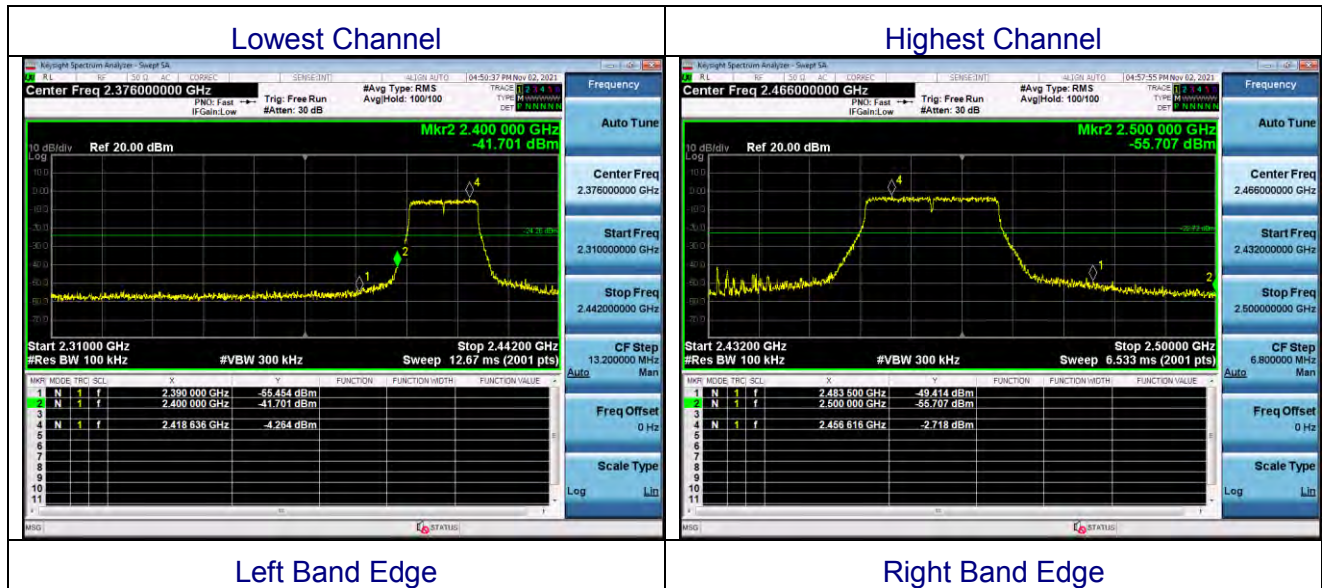

802.11n40 Modulation

Spurious emission

Low Channel

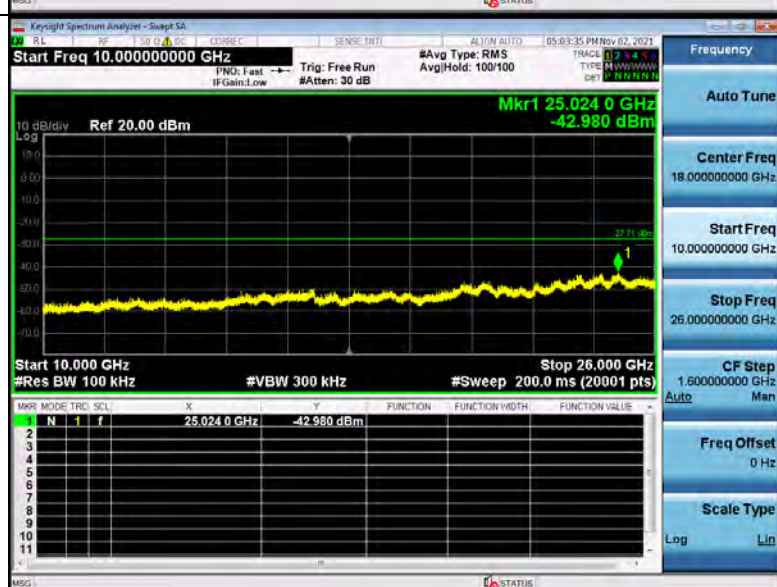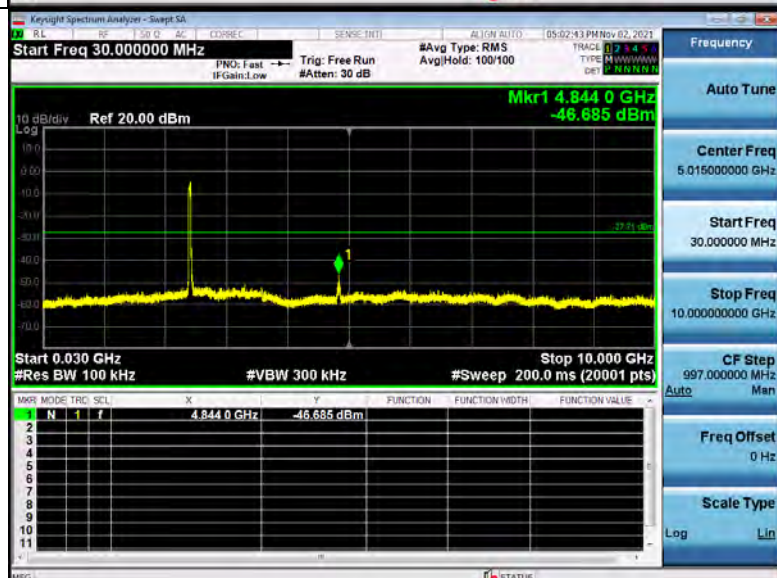

Keysight Spectrum Analyzer - Screenshot

Center Freq 2.43700000 GHz

Span 80.00 MHz

Res BW 100 kHz

VBW 300 kHz

Sweep 8.000 ms (8001 pts)

Marker 1: 2.44473 GHz, -7.796 dBm

Frequency: 2.43700000 GHz

Auto Tune

Center Freq: 2.43700000 GHz

Start Freq: 2.39700000 GHz



Stop Freq: 2.47700000 GHz

CF Step: 8.000000 MHz



Auto

Freq Offset: 0 Hz


Scale Type: Log

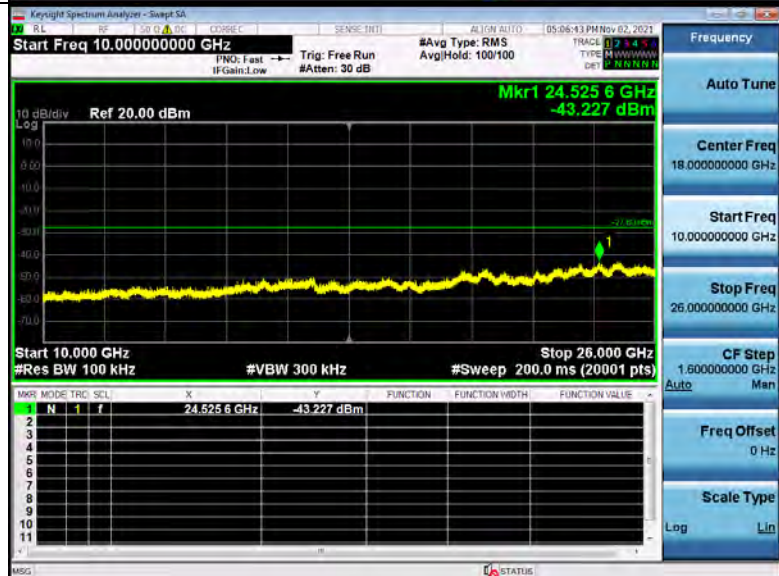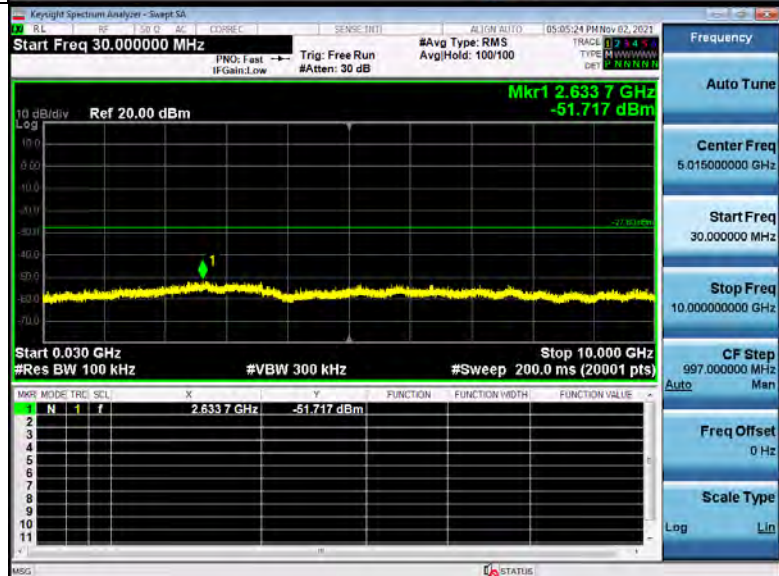

High Channel

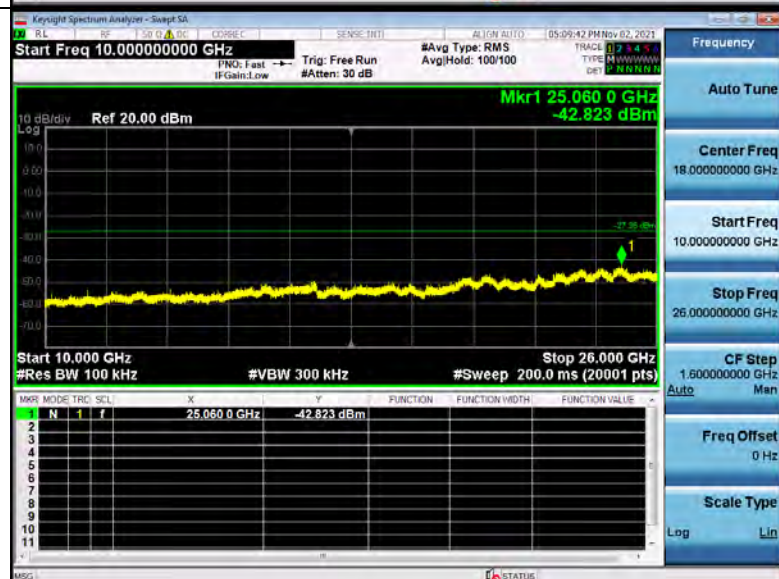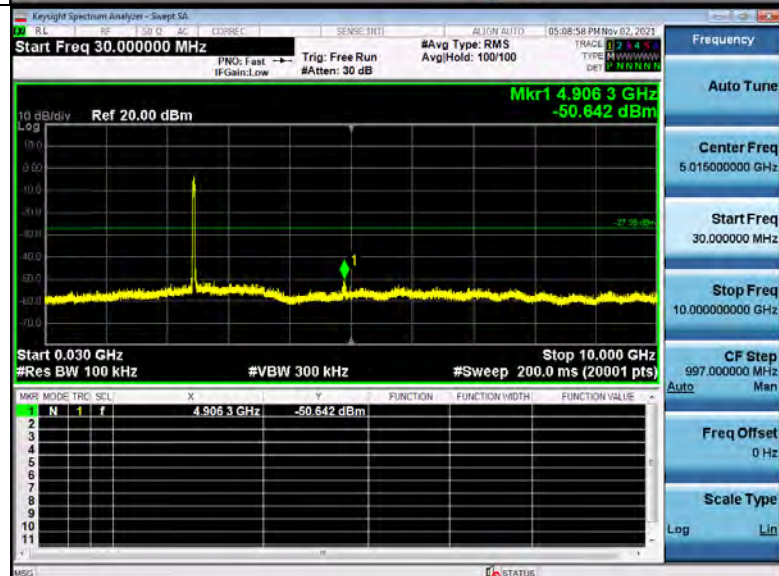


Lowest Channel

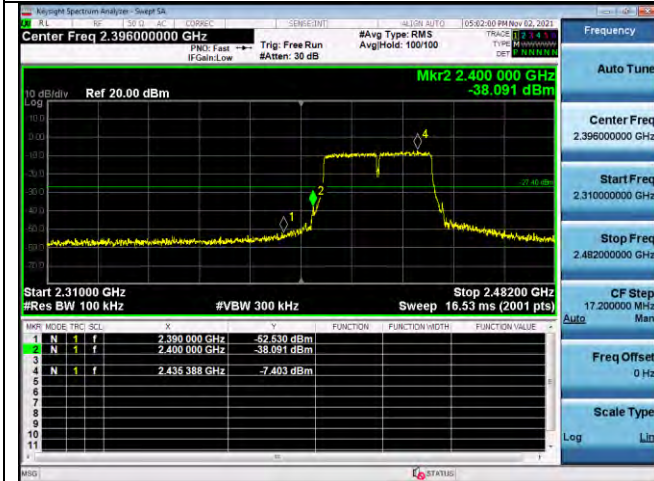


Left Band Edge

Highest Channel

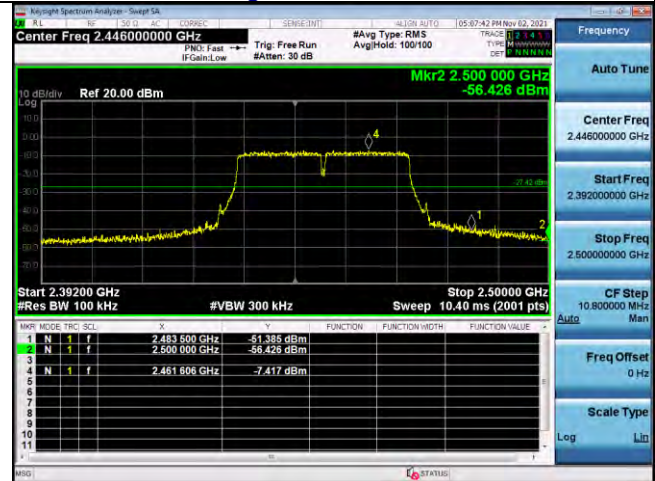

Right Band Edge

10. ANTENNA REQUIREMENT

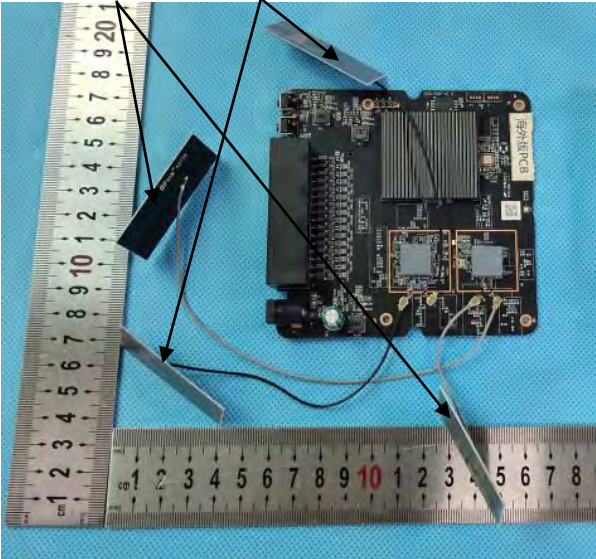Standard requirement:	FCC Part15 C Section 15.203 /247(c)
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. Refer to statement below for compliance. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed. Antenna Connected Construction The antenna used in this product is a Glue stick antenna, and the best case gain of the antenna is antenna port 1:5dBi and Antenna port 2:5dBi, and MIMO: 8.01dBi EUT Antenna: 2.4Gwifi ant 5Gwifi ant 	

11. TEST SETUP PHOTO





12. EUT CONSTRUCTIONAL DETAILS

Please refer to external photos file and internal photos file

***** END OF REPORT *****