

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_14.17.17

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

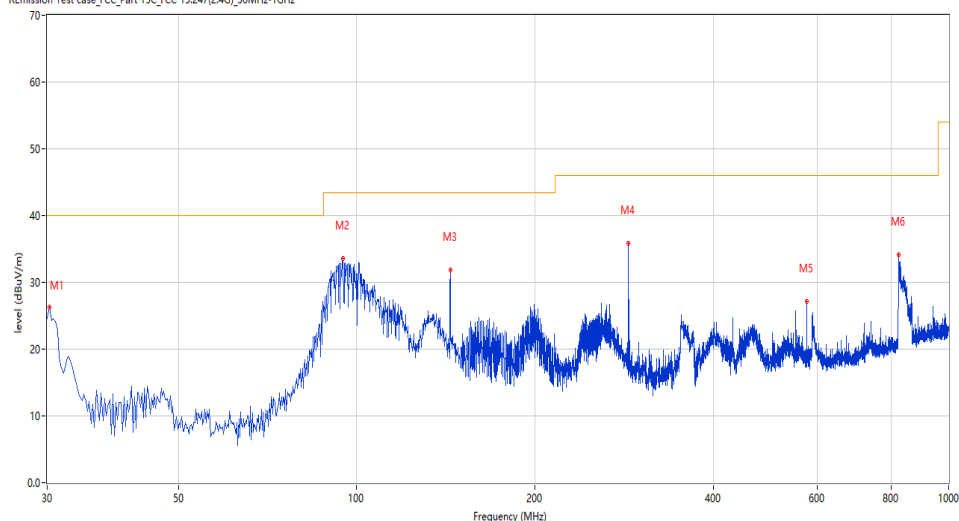

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	24.57	-29.82	40.0	-15.43	Peak	357.20	150	Horizontal	Pass
2	94.731	33.60	-27.43	43.5	-9.90	Peak	240.90	150	Horizontal	Pass
3	143.947	31.82	-30.00	43.5	-11.68	Peak	23.10	150	Horizontal	Pass
4	287.956	35.84	-24.10	46.0	-10.16	Peak	360.00	150	Horizontal	Pass
5	575.974	27.12	-16.81	46.0	-18.88	Peak	166.00	150	Horizontal	Pass
6	823.262	34.07	-11.84	46.0	-11.93	Peak	206.60	100	Horizontal	Pass

BLE-Vertical-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_13.44.28

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23

Hum.: 54%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

RÉmission Test case_FCC_Part 15C_FCC 15.247(24G)_30MHz-1GHz

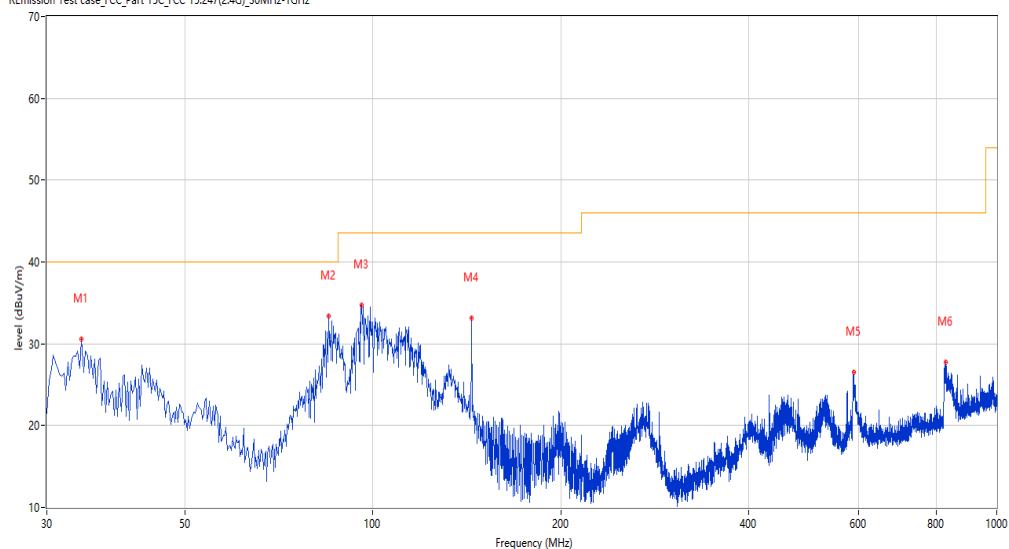

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.121	30.63	-28.36	40.0	-9.37	Peak	173.50	100	Vertical	Pass
2	84.791	33.42	-30.51	40.0	-6.58	Peak	334.30	100	Vertical	Pass
3	95.944	34.72	-27.17	43.5	-8.78	Peak	261.30	100	Vertical	Pass
4	143.947	33.16	-30.00	43.5	-10.34	Peak	316.00	100	Vertical	Pass
5	589.550	26.53	-15.82	46.0	-19.47	Peak	178.30	100	Vertical	Pass
6	828.838	27.80	-11.66	46.0	-18.20	Peak	275.10	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.37.06

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

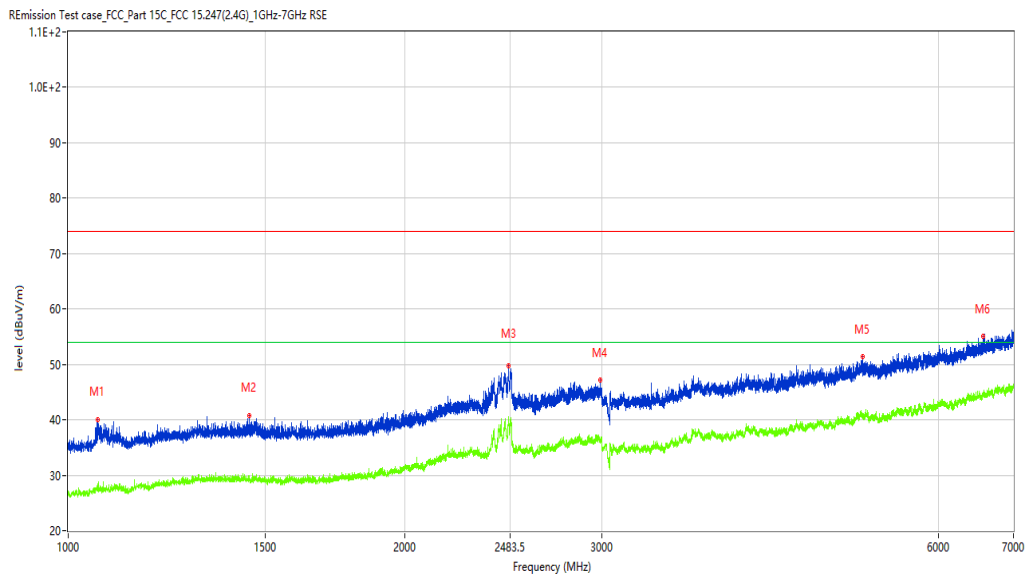

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1062.242	40.07	-14.38	74.0	-33.93	Peak	46.60	100	Horizontal	Pass
1**	1062.242	28.38	-14.38	54.0	-25.62	AV	46.60	100	Horizontal	Pass
2	1452.443	40.83	-12.88	74.0	-33.17	Peak	18.30	100	Horizontal	Pass
2**	1452.443	29.84	-12.88	54.0	-24.16	AV	18.30	100	Horizontal	Pass
3	2475.316	49.69	-2.13	74.0	-24.31	Peak	358.30	100	Horizontal	Pass
3**	2475.316	39.73	-2.13	54.0	-14.27	AV	358.30	100	Horizontal	Pass
4	2990.501	47.22	-3.09	74.0	-26.78	Peak	114.30	100	Horizontal	Pass
4**	2990.501	36.38	-3.09	54.0	-17.62	AV	114.30	100	Horizontal	Pass
5	5128.234	51.42	1.22	74.0	-22.58	Peak	288.00	100	Horizontal	Pass
5**	5128.234	40.59	1.22	54.0	-13.41	AV	288.00	100	Horizontal	Pass
6	6576.553	55.04	4.23	74.0	-18.96	Peak	248.50	100	Horizontal	Pass
6**	6576.553	44.40	4.23	54.0	-9.60	AV	248.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.53.37

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

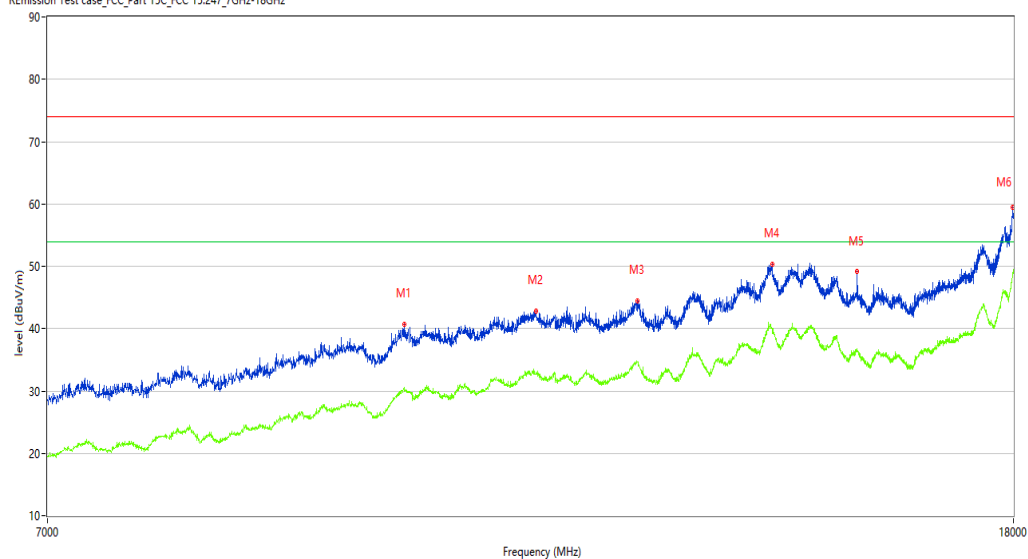

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9922.519	40.72	9.89	74.0	-33.28	Peak	165.20	100	Horizontal	Pass
1**	9922.519	29.98	9.89	54.0	-24.02	AV	165.20	100	Horizontal	Pass
2	11286.178	42.84	12.36	74.0	-31.16	Peak	130.90	100	Horizontal	Pass
2**	11286.178	33.03	12.36	54.0	-20.97	AV	130.90	100	Horizontal	Pass
3	12460.135	44.51	12.54	74.0	-29.49	Peak	219.90	100	Horizontal	Pass
3**	12460.135	34.73	12.54	54.0	-19.27	AV	219.90	100	Horizontal	Pass
4	14222.444	50.39	18.98	74.0	-23.61	Peak	1.10	100	Horizontal	Pass
4**	14222.444	40.04	18.98	54.0	-13.96	AV	1.10	100	Horizontal	Pass
5	15451.387	49.12	13.05	74.0	-24.88	Peak	359.70	100	Horizontal	Pass
5**	15451.387	36.70	13.05	54.0	-17.30	AV	359.70	100	Horizontal	Pass
6	17991.752	59.42	27.41	74.0	-14.58	Peak	165.20	100	Horizontal	Pass
6**	17991.752	49.06	27.41	54.0	-4.94	AV	165.20	100	Horizontal	Pass

BLE-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.25.40

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

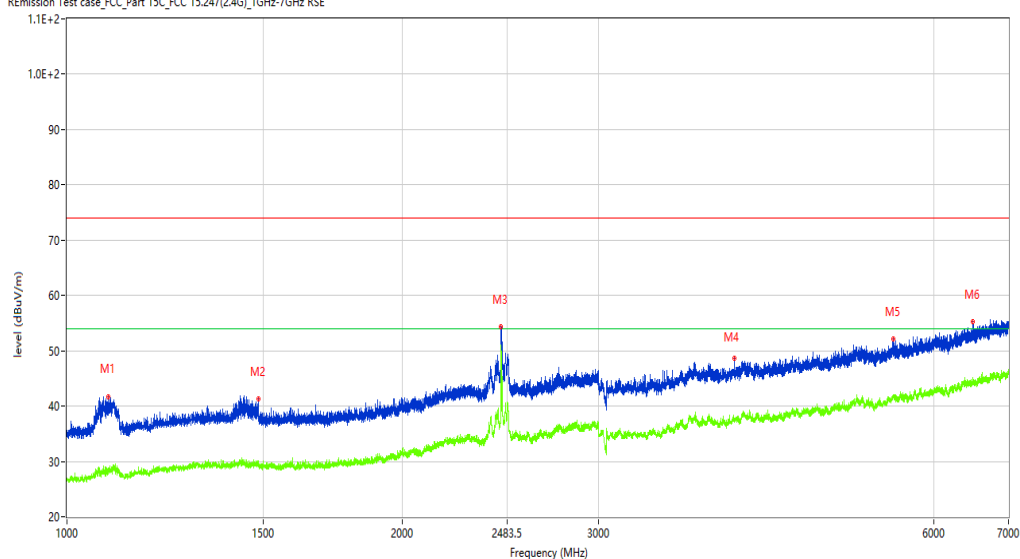

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1088.489	41.72	-14.22	74.0	-32.28	Peak	331.30	100	Vertical	Pass
1**	1088.489	28.84	-14.22	54.0	-25.16	AV	331.30	100	Vertical	Pass
2	1485.189	41.30	-13.02	74.0	-32.70	Peak	316.40	100	Vertical	Pass
2**	1485.189	29.63	-13.02	54.0	-24.37	AV	316.40	100	Vertical	Pass
3	2452.818	54.39	-2.76	74.0	-19.61	Peak	173.10	100	Vertical	Pass
3**	2452.818	50.96	-2.76	54.0	-3.04	AV	173.10	100	Vertical	Pass
4	3971.379	48.58	-1.36	74.0	-25.42	Peak	358.90	100	Vertical	Pass
4**	3971.379	37.19	-1.36	54.0	-16.81	AV	358.90	100	Vertical	Pass
5	5521.185	52.07	1.46	74.0	-21.93	Peak	8.10	100	Vertical	Pass
5**	5521.185	41.71	1.46	54.0	-12.29	AV	8.10	100	Vertical	Pass
6	6502.062	55.26	3.93	74.0	-18.74	Peak	294.70	100	Vertical	Pass
6**	6502.062	44.23	3.93	54.0	-9.77	AV	294.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_18.01.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

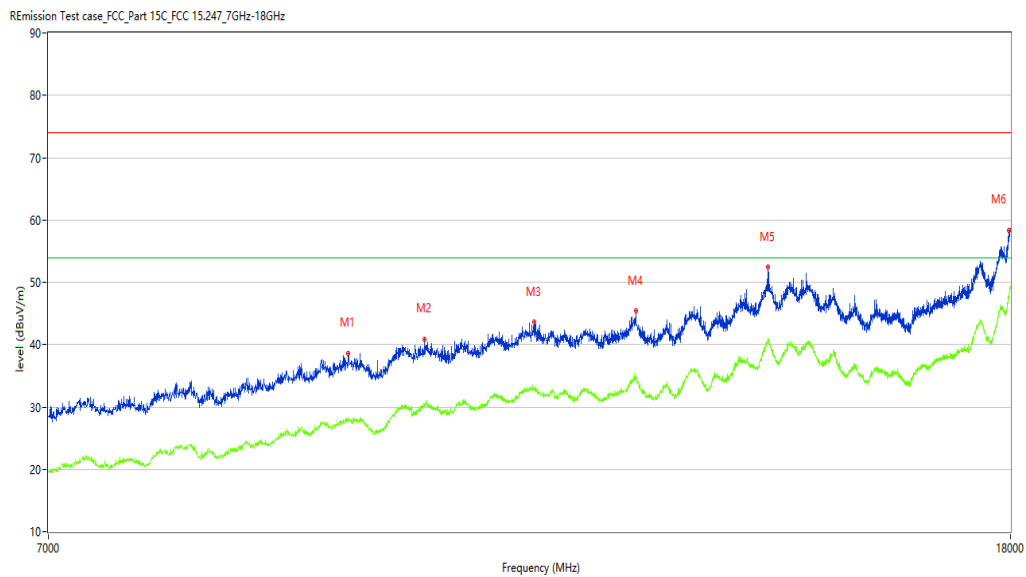

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9397.401	38.58	7.66	74.0	-35.42	Peak	13.50	100	Vertical	Pass
1**	9397.401	28.24	7.66	54.0	-25.76	AV	13.50	100	Vertical	Pass
2	10125.969	40.86	9.44	74.0	-33.14	Peak	22.80	100	Vertical	Pass
2**	10125.969	30.10	9.44	54.0	-23.90	AV	22.80	100	Vertical	Pass
3	11275.181	43.59	12.22	74.0	-30.41	Peak	292.30	100	Vertical	Pass
3**	11275.181	32.91	12.22	54.0	-21.09	AV	292.30	100	Vertical	Pass
4	12460.135	45.40	12.54	74.0	-28.60	Peak	359.00	100	Vertical	Pass
4**	12460.135	34.65	12.54	54.0	-19.35	AV	359.00	100	Vertical	Pass
5	14186.703	52.41	19.72	74.0	-21.59	Peak	211.10	100	Vertical	Pass
5**	14186.703	40.83	19.72	54.0	-13.17	AV	211.10	100	Vertical	Pass
6	17978.005	58.29	26.56	74.0	-15.71	Peak	220.80	100	Vertical	Pass
6**	17978.005	48.11	26.56	54.0	-5.89	AV	220.80	100	Vertical	Pass

BLE-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.39.25

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

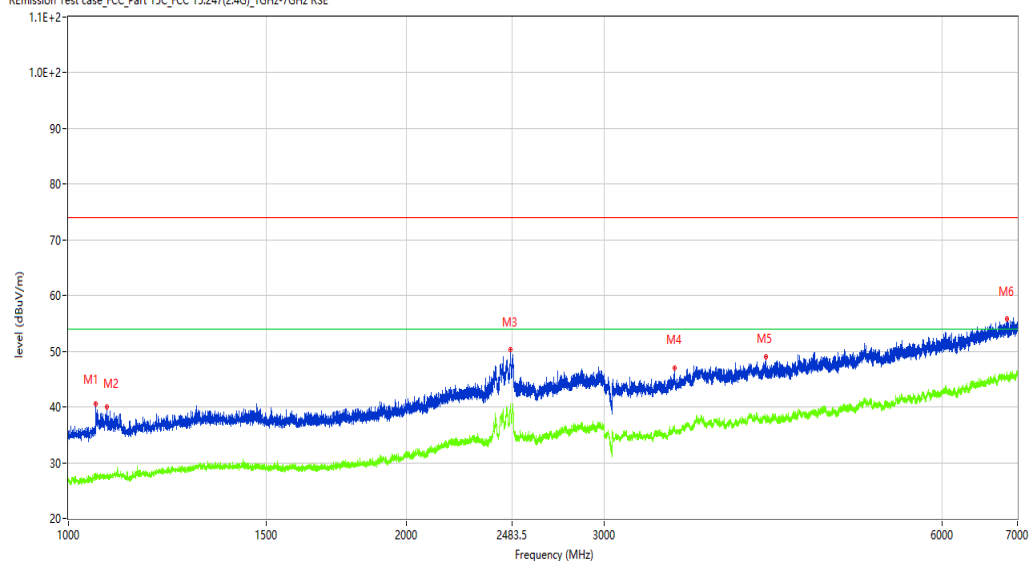

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1058.243	40.58	-14.33	74.0	-33.42	Peak	52.90	100	Horizontal	Pass
1**	1058.243	28.08	-14.33	54.0	-25.92	AV	52.90	100	Horizontal	Pass
2	1082.740	39.97	-14.25	74.0	-34.03	Peak	78.20	100	Horizontal	Pass
2**	1082.740	27.95	-14.25	54.0	-26.05	AV	78.20	100	Horizontal	Pass
3	2475.816	50.24	-2.12	74.0	-23.76	Peak	10.10	100	Horizontal	Pass
3**	2475.816	39.94	-2.12	54.0	-14.06	AV	10.10	100	Horizontal	Pass
4	3464.442	47.08	-3.91	74.0	-26.92	Peak	17.10	100	Horizontal	Pass
4**	3464.442	36.64	-3.91	54.0	-17.36	AV	17.10	100	Horizontal	Pass
5	4177.853	48.96	-1.50	74.0	-25.04	Peak	300.60	100	Horizontal	Pass
5**	4177.853	37.73	-1.50	54.0	-16.27	AV	300.60	100	Horizontal	Pass
6	6849.519	55.88	5.04	74.0	-18.12	Peak	134.30	100	Horizontal	Pass
6**	6849.519	45.22	5.04	54.0	-8.78	AV	134.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.56.07

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

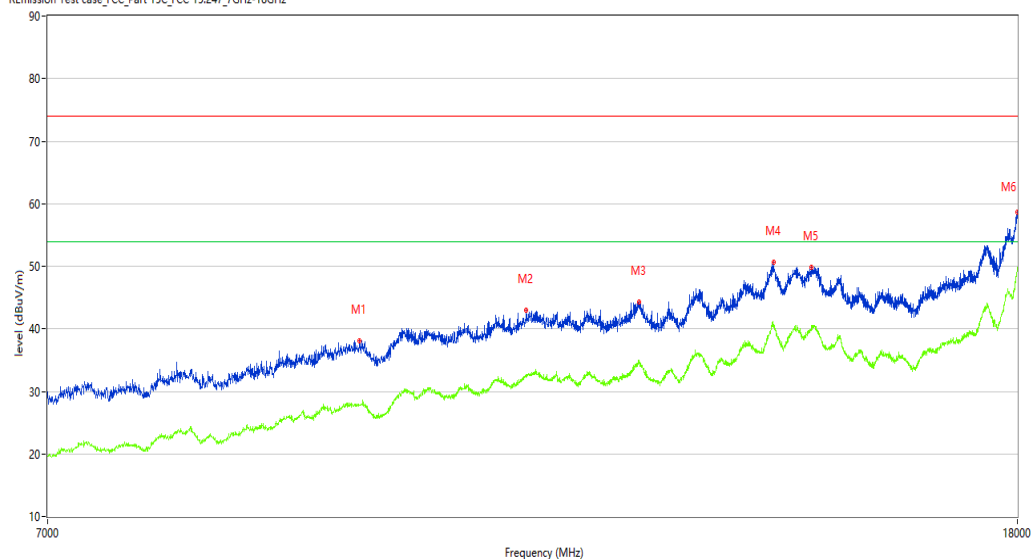

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9482.629	38.08	7.80	74.0	-35.92	Peak	360.00	100	Horizontal	Pass
1**	9482.629	27.72	7.80	54.0	-26.28	AV	360.00	100	Horizontal	Pass
2	11156.961	42.96	10.91	74.0	-31.04	Peak	131.80	100	Horizontal	Pass
2**	11156.961	32.72	10.91	54.0	-21.28	AV	131.80	100	Horizontal	Pass
3	12454.636	44.29	12.52	74.0	-29.71	Peak	122.10	100	Horizontal	Pass
3**	12454.636	34.58	12.52	54.0	-19.42	AV	122.10	100	Horizontal	Pass
4	14197.701	50.64	19.55	74.0	-23.36	Peak	272.90	100	Horizontal	Pass
4**	14197.701	40.64	19.55	54.0	-13.36	AV	272.90	100	Horizontal	Pass
5	14731.067	49.88	18.49	74.0	-24.12	Peak	336.50	100	Horizontal	Pass
5**	14731.067	40.08	18.49	54.0	-13.92	AV	336.50	100	Horizontal	Pass
6	18000.000	58.69	27.92	74.0	-15.31	Peak	0.00	100	Horizontal	Pass
6**	18000.000	49.80	27.92	54.0	-4.20	AV	0.00	100	Horizontal	Pass

BLE-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.30.11

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

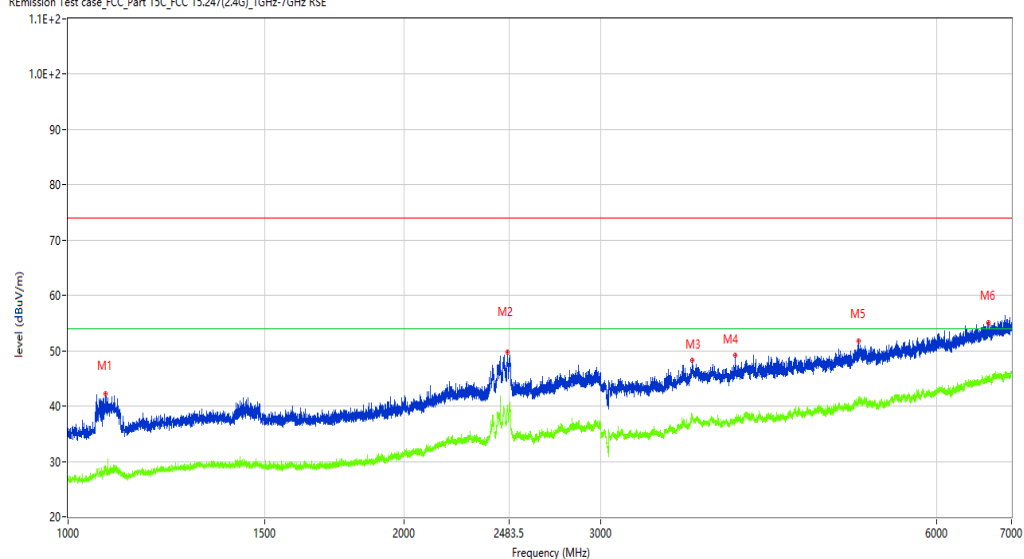

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1079.740	42.31	-14.22	74.0	-31.69	Peak	315.70	100	Vertical	Pass
1**	1079.740	28.76	-14.22	54.0	-25.24	AV	315.70	100	Vertical	Pass
2	2475.316	49.78	-2.13	74.0	-24.22	Peak	290.00	100	Vertical	Pass
2**	2475.316	39.99	-2.13	54.0	-14.01	AV	290.00	100	Vertical	Pass
3	3625.922	48.30	-1.59	74.0	-25.70	Peak	350.80	100	Vertical	Pass
3**	3625.922	37.83	-1.59	54.0	-16.17	AV	350.80	100	Vertical	Pass
4	3958.880	49.25	-1.51	74.0	-24.75	Peak	178.90	100	Vertical	Pass
4**	3958.880	37.44	-1.51	54.0	-16.56	AV	178.90	100	Vertical	Pass
5	5111.236	51.85	1.31	74.0	-22.15	Peak	355.30	100	Vertical	Pass
5**	5111.236	40.86	1.31	54.0	-13.14	AV	355.30	100	Vertical	Pass
6	6674.041	55.00	4.51	74.0	-19.00	Peak	359.20	100	Vertical	Pass
6**	6674.041	44.74	4.51	54.0	-9.26	AV	359.20	100	Vertical	Pass

Test result

Project Number: 1744444

Test Time: 2022-05-30_18.06.07

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part15C_FCC 15.247_7GHz-18GHz

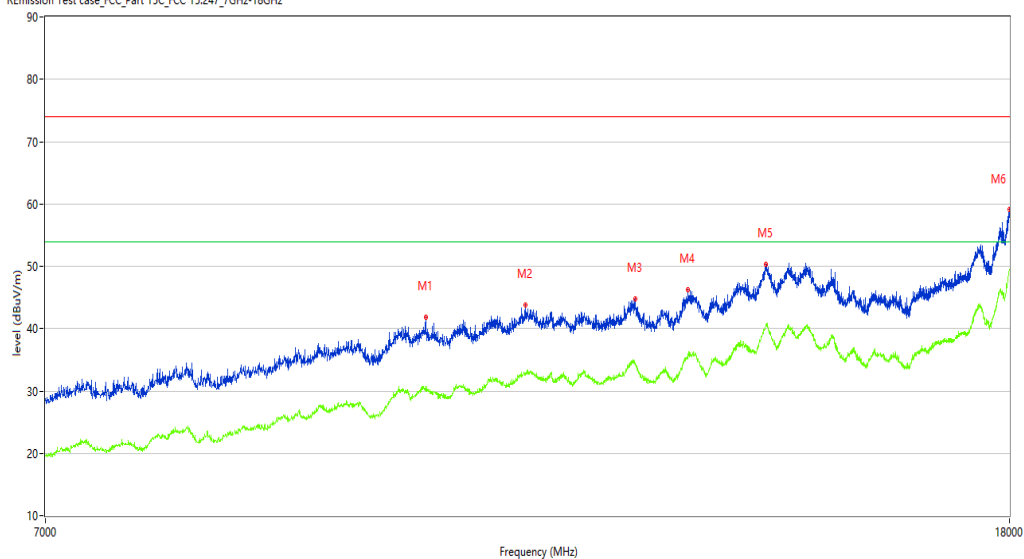

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10161.710	41.84	9.18	74.0	-32.16	Peak	157.00	100	Vertical	Pass
1**	10161.710	30.33	9.18	54.0	-23.67	AV	157.00	100	Vertical	Pass
2	11200.950	43.79	11.27	74.0	-30.21	Peak	166.70	100	Vertical	Pass
2**	11200.950	32.83	11.27	54.0	-21.17	AV	166.70	100	Vertical	Pass
3	12476.631	44.82	12.31	74.0	-29.18	Peak	41.70	100	Vertical	Pass
3**	12476.631	34.20	12.31	54.0	-19.80	AV	41.70	100	Vertical	Pass
4	13133.717	46.29	13.90	74.0	-27.71	Peak	85.60	100	Vertical	Pass
4**	13133.717	35.55	13.90	54.0	-18.45	AV	85.60	100	Vertical	Pass
5	14172.957	50.40	19.28	74.0	-23.60	Peak	219.90	100	Vertical	Pass
5**	14172.957	40.51	19.28	54.0	-13.49	AV	219.90	100	Vertical	Pass
6	18000.000	59.12	27.92	74.0	-14.88	Peak	147.70	100	Vertical	Pass
6**	18000.000	49.53	27.92	54.0	-4.47	AV	147.70	100	Vertical	Pass

BLE-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.41.30

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_1GHz-7GHz RSE

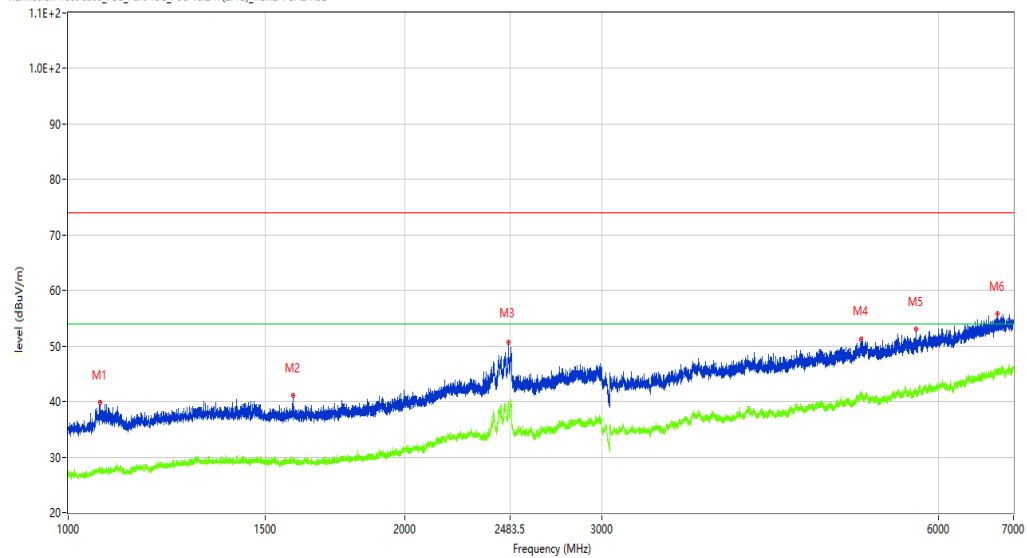

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1068.241	39.88	-14.28	74.0	-34.12	Peak	59.50	100	Horizontal	Pass
1**	1068.241	27.57	-14.28	54.0	-26.43	AV	59.50	100	Horizontal	Pass
2	1587.677	41.06	-13.07	74.0	-32.94	Peak	360.00	100	Horizontal	Pass
2**	1587.677	29.34	-13.07	54.0	-24.66	AV	360.00	100	Horizontal	Pass
3	2475.566	50.66	-2.12	74.0	-23.34	Peak	0.00	100	Horizontal	Pass
3**	2475.566	39.96	-2.12	54.0	-14.04	AV	0.00	100	Horizontal	Pass
4	5118.235	51.32	1.28	74.0	-22.68	Peak	22.60	100	Horizontal	Pass
4**	5118.235	41.49	1.28	54.0	-12.51	AV	22.60	100	Horizontal	Pass
5	5724.659	53.03	1.61	74.0	-20.97	Peak	22.60	100	Horizontal	Pass
5**	5724.659	41.99	1.61	54.0	-12.01	AV	22.60	100	Horizontal	Pass
6	6772.528	55.87	5.09	74.0	-18.13	Peak	193.40	100	Horizontal	Pass
6**	6772.528	45.22	5.09	54.0	-8.78	AV	193.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.57.51

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

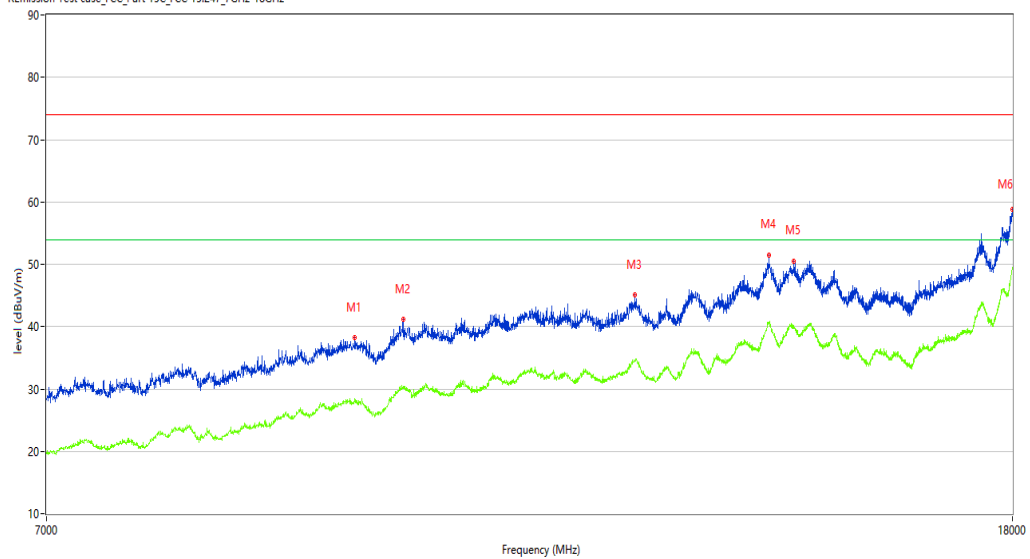

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9463.384	38.20	7.71	74.0	-35.80	Peak	201.40	100	Horizontal	Pass
1**	9463.384	27.92	7.71	54.0	-26.08	AV	201.40	100	Horizontal	Pass
2	9922.519	41.13	9.89	74.0	-32.87	Peak	327.20	100	Horizontal	Pass
2**	9922.519	30.12	9.89	54.0	-23.88	AV	327.20	100	Horizontal	Pass
3	12443.639	45.07	12.47	74.0	-28.93	Peak	196.60	100	Horizontal	Pass
3**	12443.639	34.53	12.47	54.0	-19.47	AV	196.60	100	Horizontal	Pass
4	14183.954	51.52	19.63	74.0	-22.48	Peak	17.90	100	Horizontal	Pass
4**	14183.954	40.53	19.63	54.0	-13.47	AV	17.90	100	Horizontal	Pass
5	14538.615	50.56	17.42	74.0	-23.44	Peak	61.10	100	Horizontal	Pass
5**	14538.615	39.68	17.42	54.0	-14.32	AV	61.10	100	Horizontal	Pass
6	18000.000	58.89	27.92	74.0	-15.11	Peak	96.10	100	Horizontal	Pass
6**	18000.000	49.45	27.92	54.0	-4.55	AV	96.10	100	Horizontal	Pass

BLE-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.32.49

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

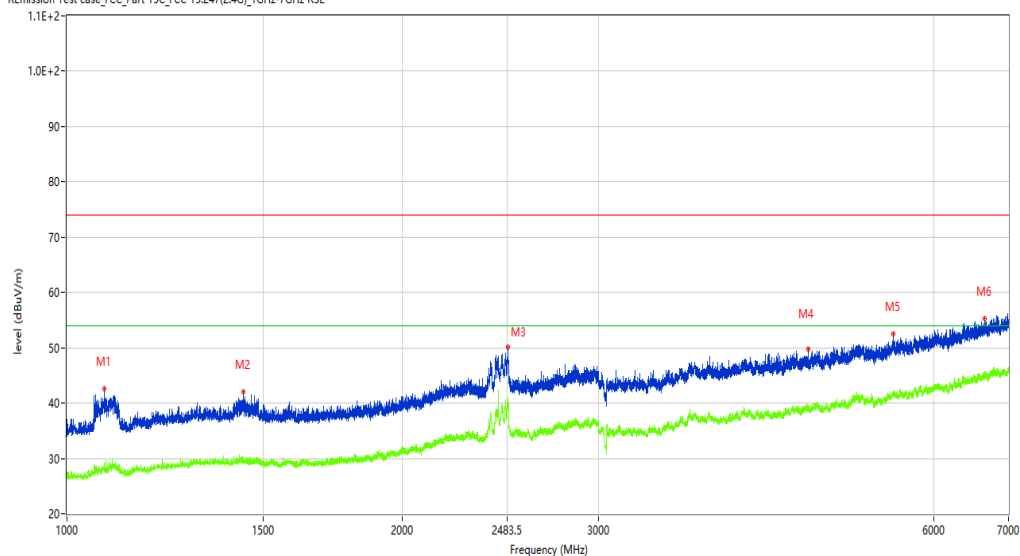

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1080.740	42.60	-14.23	74.0	-31.40	Peak	319.70	100	Vertical	Pass
1**	1080.740	29.19	-14.23	54.0	-24.81	AV	319.70	100	Vertical	Pass
2	1440.945	42.00	-12.74	74.0	-32.00	Peak	260.60	100	Vertical	Pass
2**	1440.945	30.04	-12.74	54.0	-23.96	AV	260.60	100	Vertical	Pass
3	2487.314	50.07	-1.89	74.0	-23.93	Peak	2.80	100	Vertical	Pass
3**	2487.314	40.14	-1.89	54.0	-13.86	AV	2.80	100	Vertical	Pass
4	4630.796	49.77	-0.41	74.0	-24.23	Peak	126.50	100	Vertical	Pass
4**	4630.796	38.63	-0.41	54.0	-15.37	AV	126.50	100	Vertical	Pass
5	5515.186	52.54	1.50	74.0	-21.46	Peak	179.30	100	Vertical	Pass
5**	5515.186	41.68	1.50	54.0	-12.32	AV	179.30	100	Vertical	Pass
6	6662.542	55.30	4.53	74.0	-18.70	Peak	189.00	100	Vertical	Pass
6**	6662.542	45.62	4.53	54.0	-8.38	AV	189.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_18.07.58

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

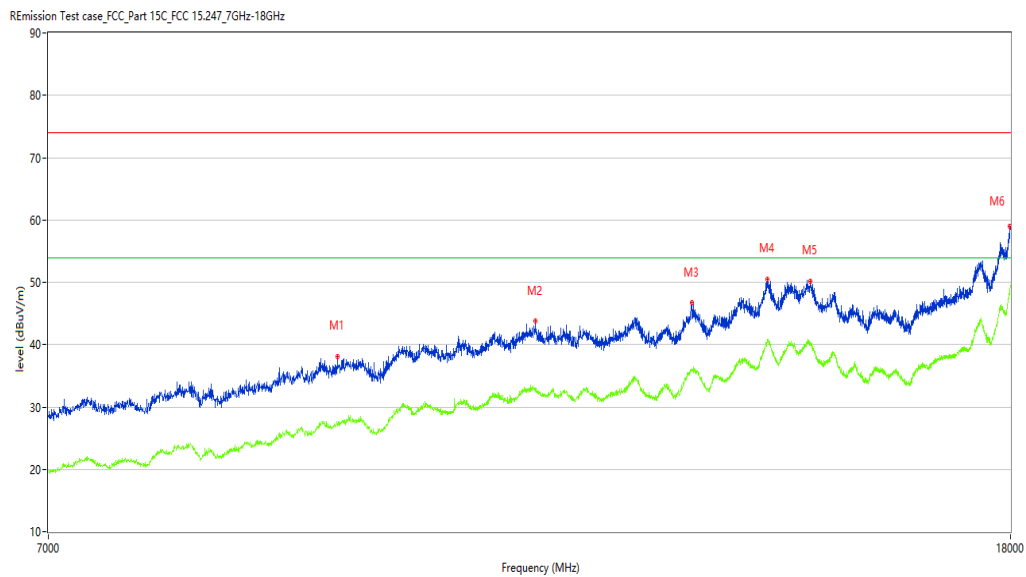

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9298.425	38.08	6.78	74.0	-35.92	Peak	206.60	100	Vertical	Pass
1**	9298.425	27.29	6.78	54.0	-26.71	AV	206.60	100	Vertical	Pass
2	11291.677	43.75	12.31	74.0	-30.25	Peak	147.80	100	Vertical	Pass
2**	11291.677	33.06	12.31	54.0	-20.94	AV	147.80	100	Vertical	Pass
3	13161.210	46.66	14.00	74.0	-27.34	Peak	299.30	100	Vertical	Pass
3**	13161.210	36.01	14.00	54.0	-17.99	AV	299.30	100	Vertical	Pass
4	14181.205	50.52	19.55	74.0	-23.48	Peak	359.40	100	Vertical	Pass
4**	14181.205	40.84	19.55	54.0	-13.16	AV	359.40	100	Vertical	Pass
5	14788.803	50.23	18.48	74.0	-23.77	Peak	113.20	100	Vertical	Pass
5**	14788.803	39.99	18.48	54.0	-14.01	AV	113.20	100	Vertical	Pass
6	17991.752	58.94	27.41	74.0	-15.06	Peak	127.70	100	Vertical	Pass
6**	17991.752	48.85	27.41	54.0	-5.15	AV	127.70	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.46.16

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R:Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

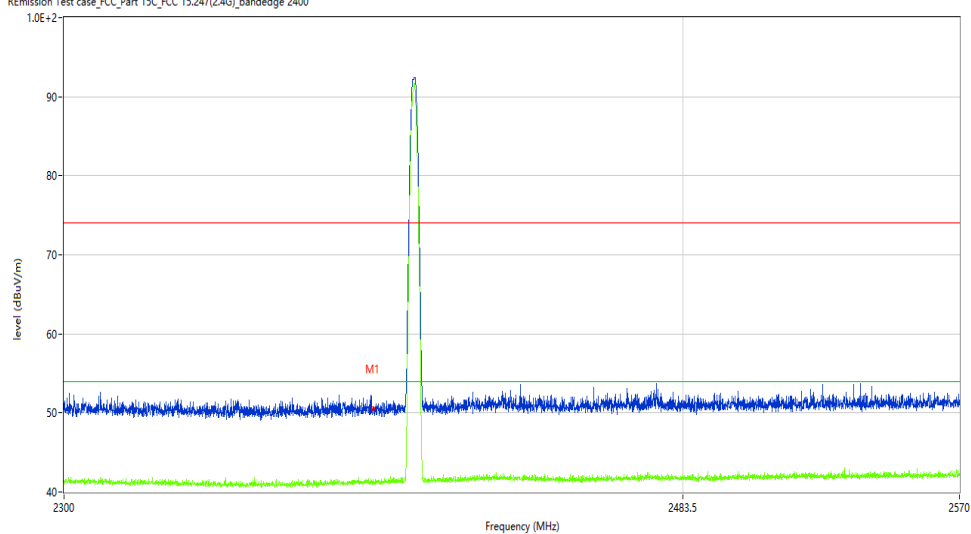

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.54	-9.96	74.0	-23.46	Peak	310.10	100	H	Pass
1**	2390.000	41.22	-9.96	54.0	-12.78	AV	310.10	100	H	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.58.01

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

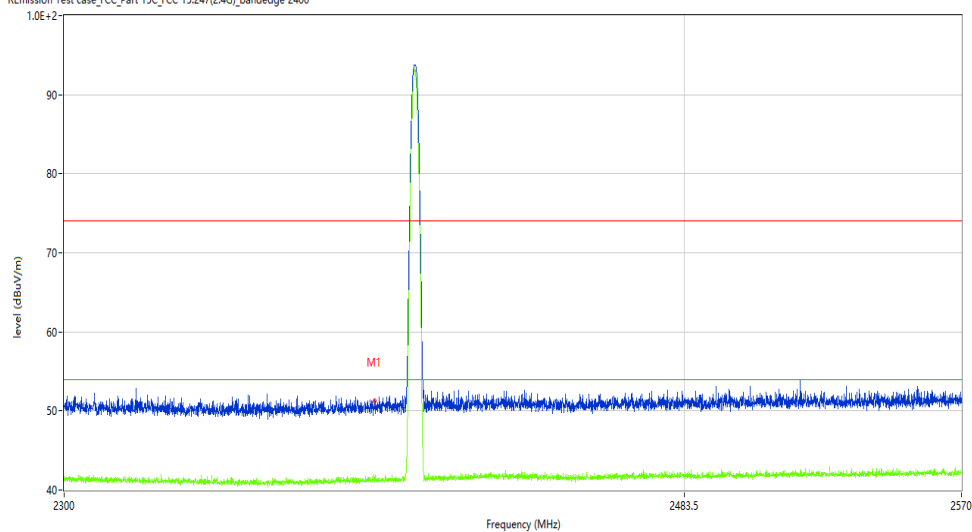

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.10	-9.96	74.0	-22.90	Peak	311.86	100	V	Pass
1**	2390.000	41.24	-9.96	54.0	-12.76	AV	311.86	100	V	Pass

BLE-Bandedge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.50.45

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R:Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

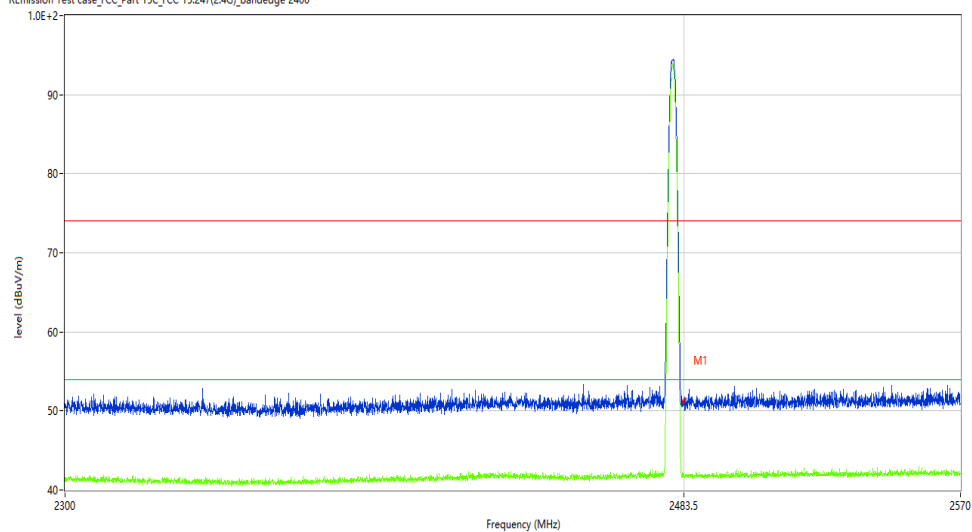

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.21	-9.51	74.0	-22.79	Peak	313.38	100	H	Pass
1**	2483.500	41.72	-9.51	54.0	-12.28	AV	313.38	100	H	Pass

BLE-Bandedge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.54.53

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

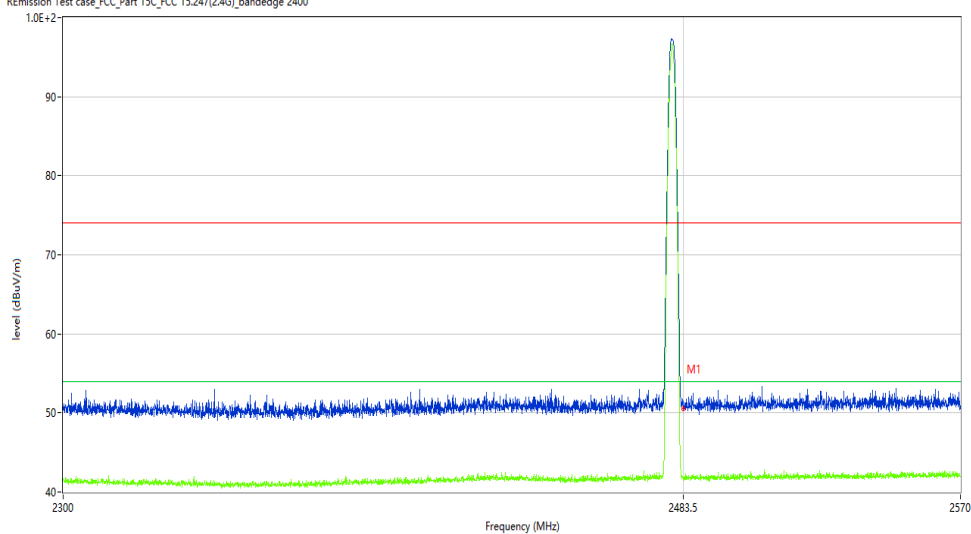

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.49	-9.51	74.0	-23.51	Peak	213.03	100	V	Pass
1**	2483.500	41.65	-9.51	54.0	-12.35	AV	213.03	100	V	Pass