


## 产品介绍 Introduction

FS-R3ABL-ESC-BS 采用 2A-BS 协议，是一款集 10A 无刷电调和 LED 灯组的 3 通道二合一接收机。本接收机外置单天线，输出 PWM 信号和车灯控制信号，支持双向传输，采用上电自动对码，设计小巧紧凑，可适配多款模型车使用。

The FS-R3ABL-ESC-BS, in compliance with the 2A-BS protocol, is a 3-Channel 2-in-1 receiver with 10A brushless ESC and LED light set. The receiver, equipped with a single external antenna, can output PWM signals and LED light control signals, featuring 2-way transmission, auto-bind upon power-on, compact design, and adaptation to a variety of RC cars.

## 接收机概览 Receiver Overview

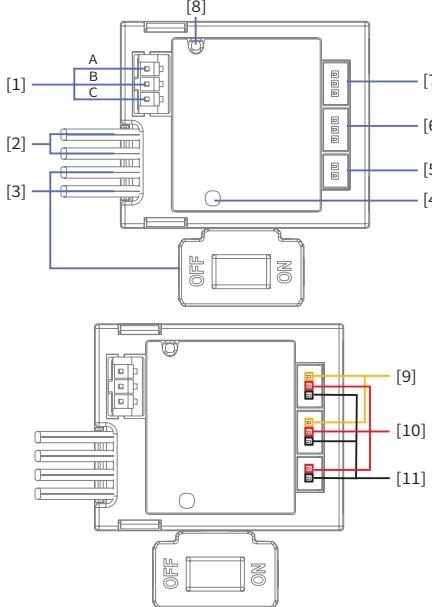

[1] 马达接口	[7] CH3
[2] 电池接口	[8] 天线
[3] 电源开关	[9] S (通道接口信号端)
[4] LED	[10] + (通道 / 车灯接口正极)
[5] 车灯接口	[11] - (通道 / 车灯接口负极)
[6] CH1	

[1] Motor Connector
[2] Battery Connector
[3] Power Switch
[4] LED
[5] LED Light Connector
[6] CH1
[7] CH3
[8] Antenna
[9] Signal Pin (CH Connector)
[10] + (Anode of LED Light/CH Connector)
[11] - (Cathode of LED Light/CH Connector)

注：马达接口为 PH2.0\*3Pin 母座端子；电池接口为 Molex51005 母座接口；CH1 和 CH3 通道接口为标准 1.25mm\*3Pin 端子座；车灯接口为标准 1.25mm\*2Pin 端子座。

## Notes:

The spec of motor connector: PH2.0\*3Pin female connector  
 The spec of battery connector: Molex51005 female connector  
 The spec of CH1/CH3 channel connector: 1.25mm\*3Pin connector  
 The spec of the LED light connector: 1.25mm\*2Pin connector

## 产品规格 Product Specifications

- 产品型号: FS-R3ABL-ESC-BS
- 适配发射机: FS-MG6-BS, FS-MG11-BS, FS-G4P1-BS, FS-MG41-BS
- 适合模型: 1/18, 1/24 仿真、攀爬车
- 适配电机: FS-MD1212 无刷电机
- 通道个数: 3
- 车灯组数: 1
- 无线频率: 2.4GHz ISM
- 发射功率: <20dBm
- 无线协议: 2A-BS
- 天线类型: 外置单天线
- 工作电压: 2-3S LiPo
- BEC 输出: 5V/1A
- 持续 / 峰值电流: 10A/40A
- 遥控距离: > 100 米 (空旷无干扰地面距离)
- 数据输出: PWM
- 温度范围: -10°C ~ +60°C
- 湿度范围: 20% ~ 95%
- 防水等级: PPX4
- 在线更新: 无
- 外形尺寸: 33.0\*27.4\*14.0mm
- 机身重量: 13g
- 认证: CE, FCC ID: 2A2UNR3ABL00

- Product Model: FS-R3ABL-ESC-BS
- Compatible Transmitters: FS-MG6-BS, FS-MG11-BS, FS-G4P1-BS or FS-MG41-BS
- Compatible RC Models: 1/18, 1/24 simulation cars or crawlers
- Applicable Motors: FS-MD1212 brushless motor
- Number of Channels: 3
- Number of LED Light Connectors: 1
- RF: 2.4GHz ISM
- Maximum Power: <20dBm (e.i.r.p.) (EU)
- RF Protocol: 2A-BS
- Antenna: Single external antenna
- Operating Voltage: 2-3S LiPo
- BEC Output: 5V/1A
- Continuous / Peak Current: 10A/40A
- Distance: More than 100m (Ground distance without interference)
- Data Output: PWM
- Temperature Range: -10°C ~ +60°C
- Humidity Range: 20% ~ 95%
- Waterproof: PPX4
- Online Update: None
- Dimensions: 33.0\*27.4\*14.0mm
- Weight: 13g
- Certifications: CE, FCC ID: 2A2UNR3ABL00

## 对码 Binding

本款接收机支持双向对码，通电自动进入对码状态：

- 接收机上电即进入等待连接状态，等待与已对码的发射机建立通信；
- 若 2 秒未与已对码的发射机建立通信，则自动进入对码状态，此状态持续 10 秒；
- 若与发射机对码成功，即进入正常通信状态；否则退出对码状态，回到等待连接状态。

注：对码时，接收机 LED 灯快闪；等待连接时，接收机 LED 灯慢闪；正常通信时，接收机 LED 灯常亮。

对码步骤如下：

1. 将发射机进入对码状态；
2. 接收机通电等待 2 秒没有连接后自动进入对码状态，此时接收机 LED 快闪；
3. 对码成功后，接收机 LED 指示灯常亮；
4. 检查发射机、接收机是否正常工作。如需重新对码，请重复以上步骤。

注：对码时请先将发射机进入对码状态，再将接收机进入对码状态，若 10 秒内对码没有完成，接收机指示灯进入慢闪状态。

This receiver is compatible with two-way binding, and is to automatically enter the binding mode upon power-on.

- The receiver will enter the waiting-for-connection status upon power-on, waiting for the connection to the bound transmitter.
- If the receiver does not connect the bound transmitter within 2 seconds, it will automatically enter the binding state. This state lasts for 10 seconds.
- If the binding with the transmitter is successful, it will enter the normal communication status, otherwise, it will exit the binding state and return to the waiting-for-connection status.

Note: In case of binding, the receiver LED flashes quickly. In case of waiting-for-connection, the receiver LED flashes slowly. In case of normal communication, the receiver LED is solid on.

The binding steps are as below.

1. Put the transmitter into binding mode.
2. Turn on the receiver, and it will wait 2 seconds for connection. If without connection, the receiver will enter the binding mode automatically. At this time, the receiver LED will be flashing fast.
3. After the binding is successful, the receiver LED is solid on.
4. Verify that the transmitter and receiver are working properly. If you need to re-bind, repeat the above steps.

Note: Set the transmitter to its binding state first, and then set the receiver to its binding status. If the binding is not finished within 10 seconds, the receiver LED will enter a slow flashing status.

## 保护功能 Protection

本接收机具有电池电压过低和过高保护功能。

- 电压过低保护：当检测到电池电压过低时，CH2 通道无输出，车灯慢闪提示。
- 电压过高保护：所有通道无输出，车灯快闪提示。

本接收机电调具有过热保护。

- 过热保护：当检测到整机温度过高时，CH2 马达无输出，CH1 和 CH3 正常输出；当温度正常后，通道恢复输出。

可将电池电压（高、中、低、过低）回传到发射机端。

- 用于发射机端指示接收机电池电量状态。

The receiver has low and high voltage protection function.

- Low Voltage Protection: When the voltage is detected to be low, CH2 will no output and the LED light will flash slowly for prompt.
- High Voltage Protection: When the voltage is detected to be high, all channels will not output. The LED light will flash fast for prompt.

The receiver ESC has overheating protection function.

- Overheating Protection: When the internal temperature of the ESC is detected to be too high, CH2 will not output and the LED light will flash fast for prompt. When the temperature is normal, the channel resumes output.

The receiver can return the battery voltage (high, medium, low, ultra-low) back to the transmitter side.

- The transmitter can indicate the battery power status of the receiver.

## 车灯控制 LED Light Control

在发射机与接收机正常通信状态下，按发射机的 BIND 按键以打开或关闭车灯。默认为关闭状态。

注：接收机每次通电开机瞬间车灯亮一秒后灭。

### 车灯控制 LED Light Control

When the transmitter is in normal communication with the receiver, press the BIND button of the transmitter to turn on or turn off the LED light. By default, the LED light is off.

Note: After the receiver is turned on, the LED light will be on for one second and then go out.

### 电调与马达介绍 ESC & Motor Instruction

本接收机电调功能支持在发射机端设置电调拖刹力度设置（0%、50%、75% 和 100% 四个等级）及运行模式（正转 / 反转、正转 / 反转 / 刹车）的设置，详见发射机说明书相关章节。

本接收机须适配富斯标配马达（FS-MD1212）。马达连接后，会以声音先提示连接的电池类型，再提示油门中位校准信息。

• 当接收机连接的电池类型为锂电池时，若连接 2S 锂电，马达快响两声提示，若快响 3 声，则代表连接的电池是 3S 锂电。

• 当油门中位识别通过后，马达长响 1 声提示。

若未识别油门中位，马达持续快响提示，此时马达无动力输出。

注：电调拖刹力度默认为 0%，运行模式默认为正转 / 反转 / 刹车。

This receiver ESC function supports the settings of drag brake (0%, 50%, 75% or 100%) and running mode (forward/reverse or forward/reverse/brake) at the transmitter side. See the relevant section of the transmitter manual for details.

This receiver must be compatible with the FlySky standard motor (FS-MD1212). After the motor is connected, the connected battery type will be prompted by sounding, and then the throttle neutral calibration information.

• When the connected battery type is lithium-ion, such as 2S LiPo, the motor fast beeps twice (3 beeps represent 3S LiPo).

• When the throttle neutral is recognized, the motor will long beep once.

If the throttle neutral is not recognized, the motor will continue to beep quickly. There is no power output from the motor at this time.

Note: The drag brake force is set to 0% by default, and the running mode is set to forward/reverse/brake by default.

### 失控保护 Failsafe

此功能用于当接收机无法正常收到发射机的信号不受控制时，接收机按设置好的失控保护值进行通道输出以保护模型及人员安全。

• CH2 失控保护默认开启，失控后电调进入刹车模式；CH1、CH3 通道默认为未设置，未设置时保持最后输出。可在发射机端设置 CH1、CH3 通道失控保护值。

• 车灯保持失控前状态。

The failsafe function is used when radio signal connection is lost between the transmitter and receiver. The receiver performs channel output according to the set fail-safe value to protect the safety of the model and personnel.

• By default, the failsafe for CH2 is enabled, and the ESC will enter the brake status when the receiver is out-of-control. By default, the CH1 and CH3 channels are not set, and these two channels will maintain the last output in case of out-of-control. You can set the failsafe value for CH1 and CH3 channels at the transmitter side.

• The LED light will remain in the same status as before the out-of-control.

### 注意事项:

- 使用前必须确保本产品与模型安装正确，否则可能导致模型发生严重损坏。
- 关闭时，请务必先关闭接收机电源，然后关闭发射机。如果关闭发射机电源时接收机仍然在工作，将会导致遥控设备失控。失控保护设置不合理可能引起事故。
- 确保接收机安装在远离电机，电子调速器或电子噪声过多的区域。
- 接收机天线需远离导电材料，例如金属棒和碳物质。为了避免影响正常工作，请确保接收机天线和导电材料之间至少有 1 厘米以上的距离。
- 准备过程中，请勿连接接收机电源，避免造成不必要的损失。
- 若在发射机端调整油门通道微调后，接收机须重新通电以识别新的油门通道中位，否则可能会出现倒车异常的现象。

### Attention:

- Make sure the product is installed and calibrated correctly, failure to do so may result in serious injury.
- Make sure the receiver's battery is disconnected before turning off the transmitter, failure to do so can result out of control. Unreasonable setting of the Failsafe may cause accidents.
- Make sure the receiver is mounted away from motors, electronic speed controllers or any device that emits excessive

electrical noise.

- Keep the receiver's antenna at least 1cm away from conductive materials such as carbon or metal.
- Do not power on the receiver during the setup process to prevent loss of control.
- If the throttle trim is changed on the transmitter side, the receiver needs to be re-powered to recognize the new throttle neutral. Otherwise, an exception may occur during vehicle reversing.

## 认证相关 Certifications

### FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### EU DoC Declaration

Hereby, [ShenZhen FLYSKY Technology Co., Ltd.] declares that the Radio Equipment [FS-R3ABL-ESC-BS] is in compliance with RED 2014/53/EU. The full text of the EU Doc is available at the following internet address: [www.flskytech.com/info\\_detail/10.html](http://www.flskytech.com/info_detail/10.html)

### RF Exposure Compliance

This equipment complies with FCC/ISED RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

### Environmentally friendly disposal

Old electrical appliances must not be disposed of together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.



FCC ID:2A2UNR3ABL00



微信公众号



Bilibili



Website



Facebook

Manufacturer: ShenZhen FLYSKY Technology Co., Ltd.

Address: 16F, Huafeng Building, No. 6006 Shennan Road, Futian District, Shenzhen, Guangdong, China

本说明书中的图片和插图仅供参考，可能与实际产品外观有所不同。产品设计和规格可能会有所更改，恕不另行通知。  
Figures and illustrations in this manual are provided for reference only and may differ from actual product appearance. Product design and specifications may be changed without notice.