



Appendix F

RF Test Data for 5.5G WIFI (Conducted Measurement)

Product Name: LAVA Guitar

Test Model: LAVA ME PLAY

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Li Huan





F.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant0	20.173	≥ 0.5	Pass
NVNT	a	5580	Ant0	19.924	≥ 0.5	Pass
NVNT	a	5700	Ant0	19.685	≥ 0.5	Pass
NVNT	n20	5500	Ant0	20.382	≥ 0.5	Pass
NVNT	n20	5580	Ant0	20.131	≥ 0.5	Pass
NVNT	n20	5700	Ant0	20.22	≥ 0.5	Pass
NVNT	n40	5510	Ant0	39.916	≥ 0.5	Pass
NVNT	n40	5550	Ant0	39.324	≥ 0.5	Pass
NVNT	n40	5670	Ant0	40.309	≥ 0.5	Pass
NVNT	ac20	5500	Ant0	20.53	≥ 0.5	Pass
NVNT	ac20	5580	Ant0	20.229	≥ 0.5	Pass
NVNT	ac20	5700	Ant0	20.309	≥ 0.5	Pass
NVNT	ac40	5510	Ant0	39.385	≥ 0.5	Pass
NVNT	ac40	5550	Ant0	39.754	≥ 0.5	Pass
NVNT	ac40	5670	Ant0	39.371	≥ 0.5	Pass
NVNT	ac80	5530	Ant0	79.149	≥ 0.5	Pass
NVNT	ac80	5610	Ant0	79.201	≥ 0.5	Pass








Test Graphs

-26dB Bandwidth NVNT a 5500MHz Ant0

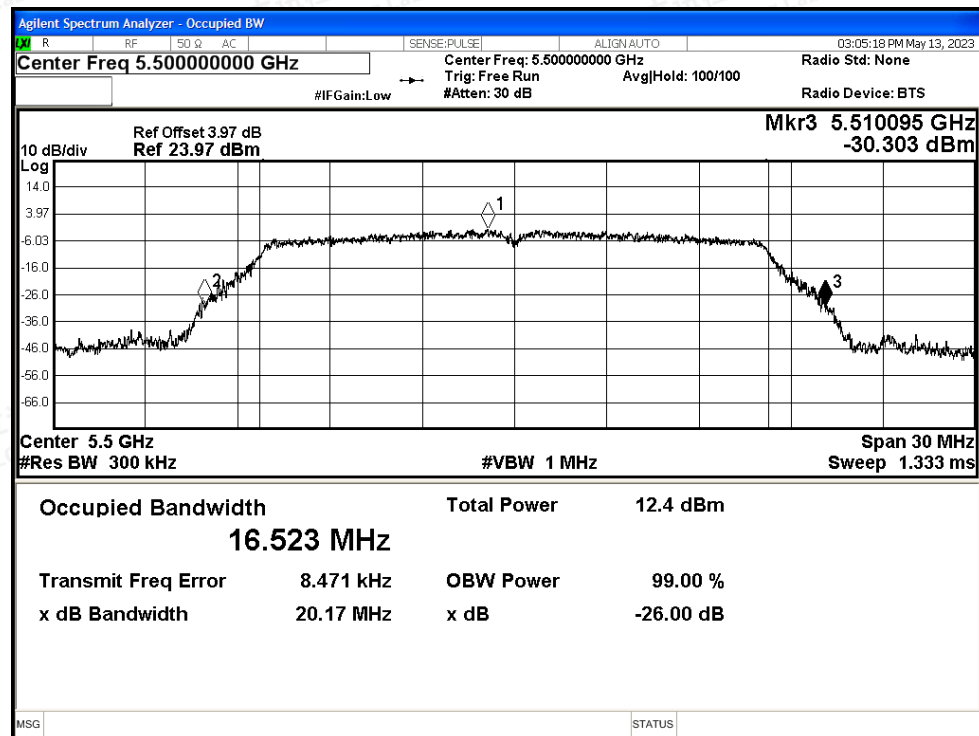

-26dB Bandwidth NVNT a 5580MHz Ant0

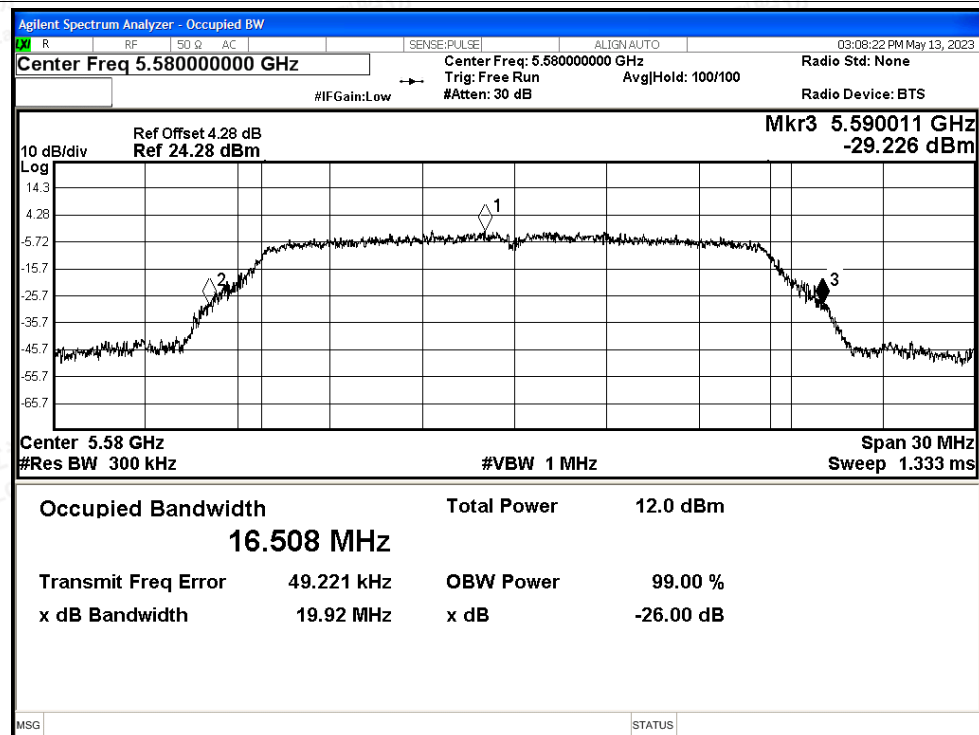

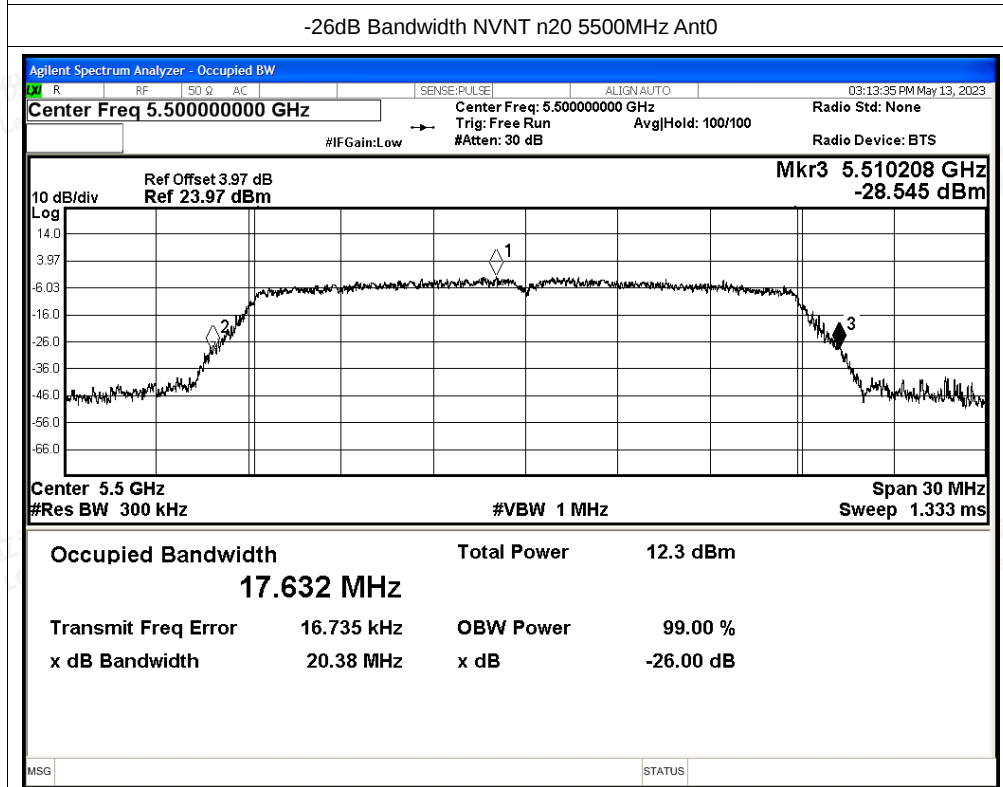
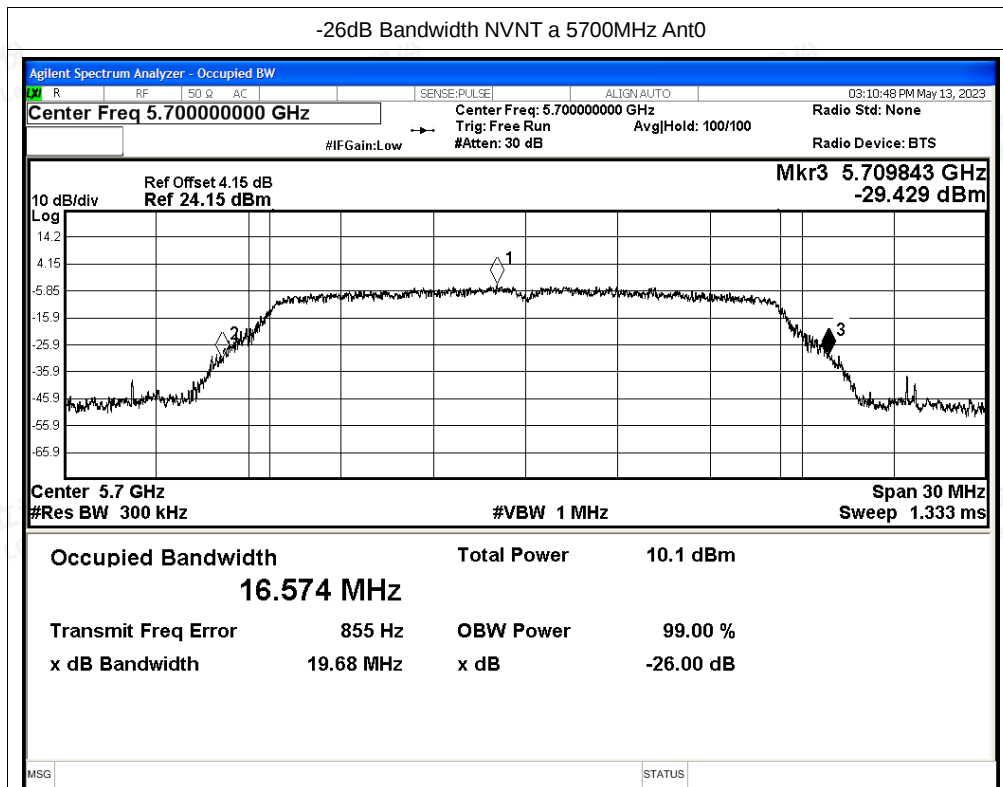


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

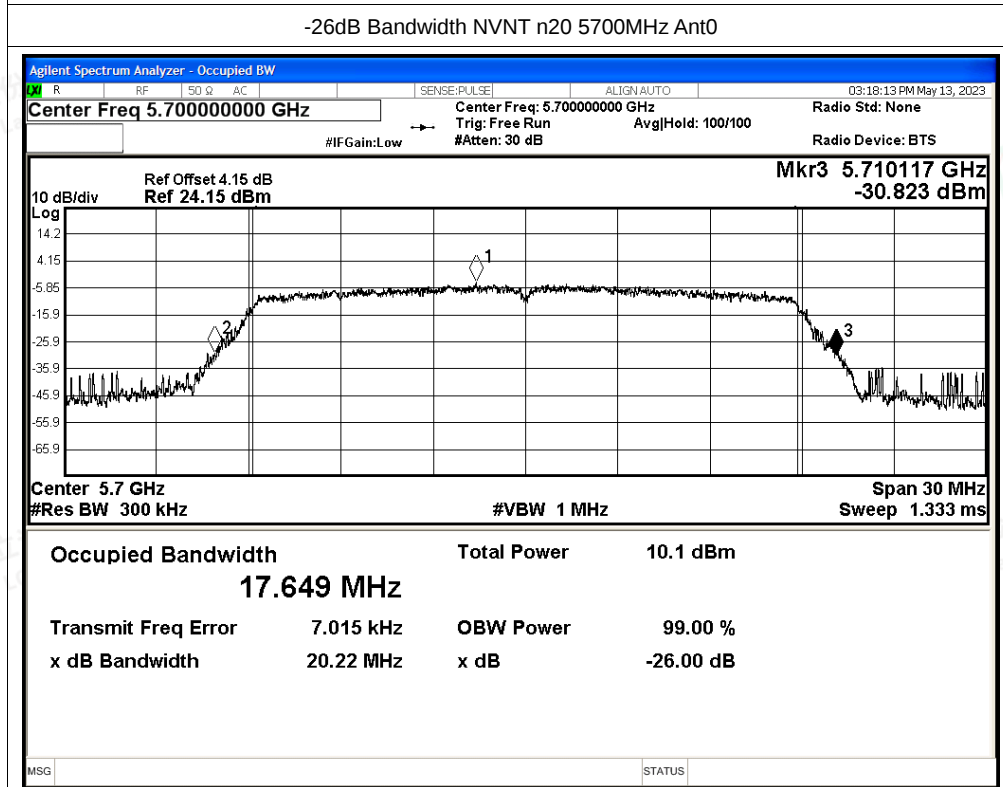
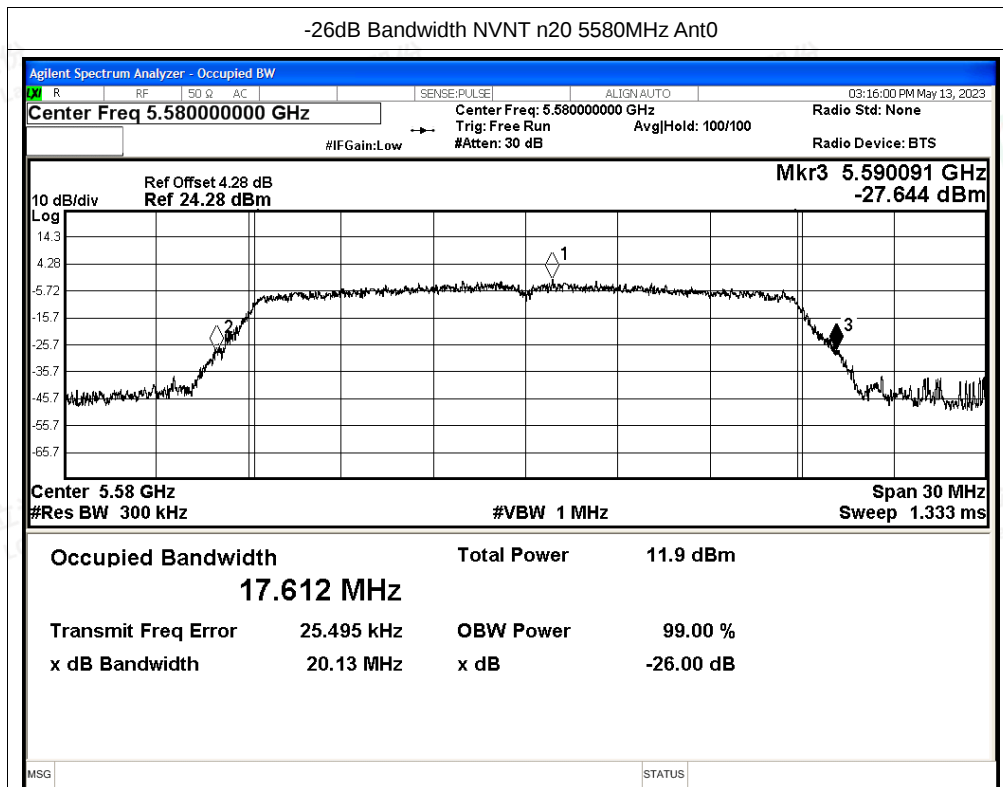




Shenzhen LCS Compliance Testing Laboratory Ltd.



Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

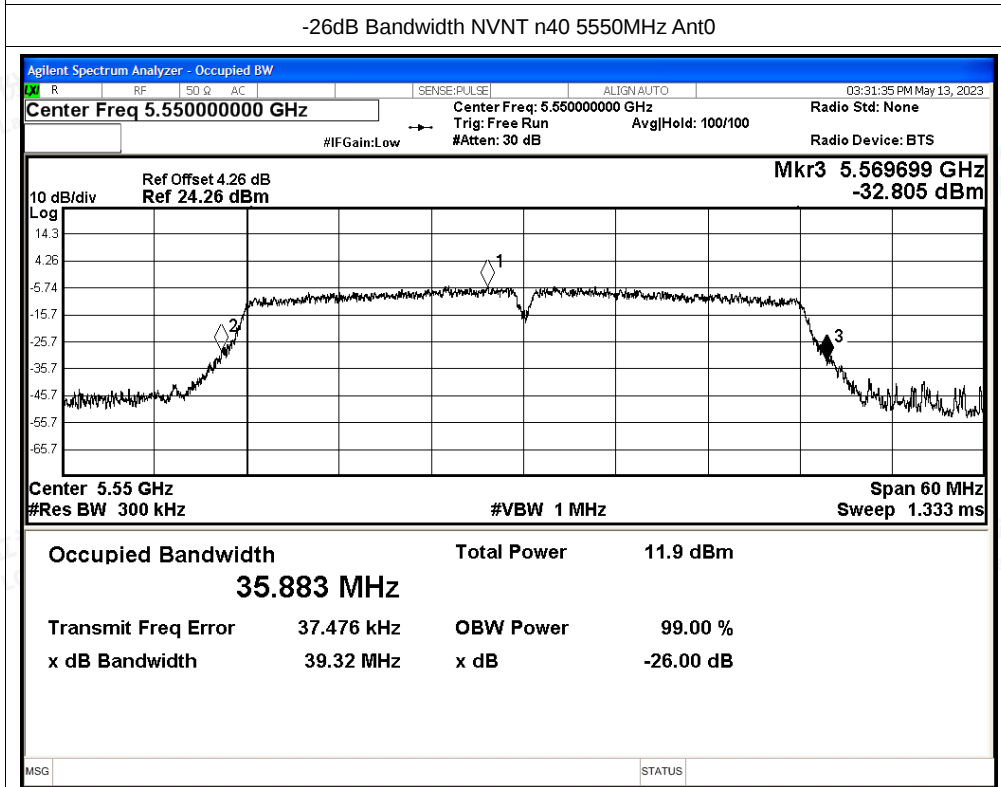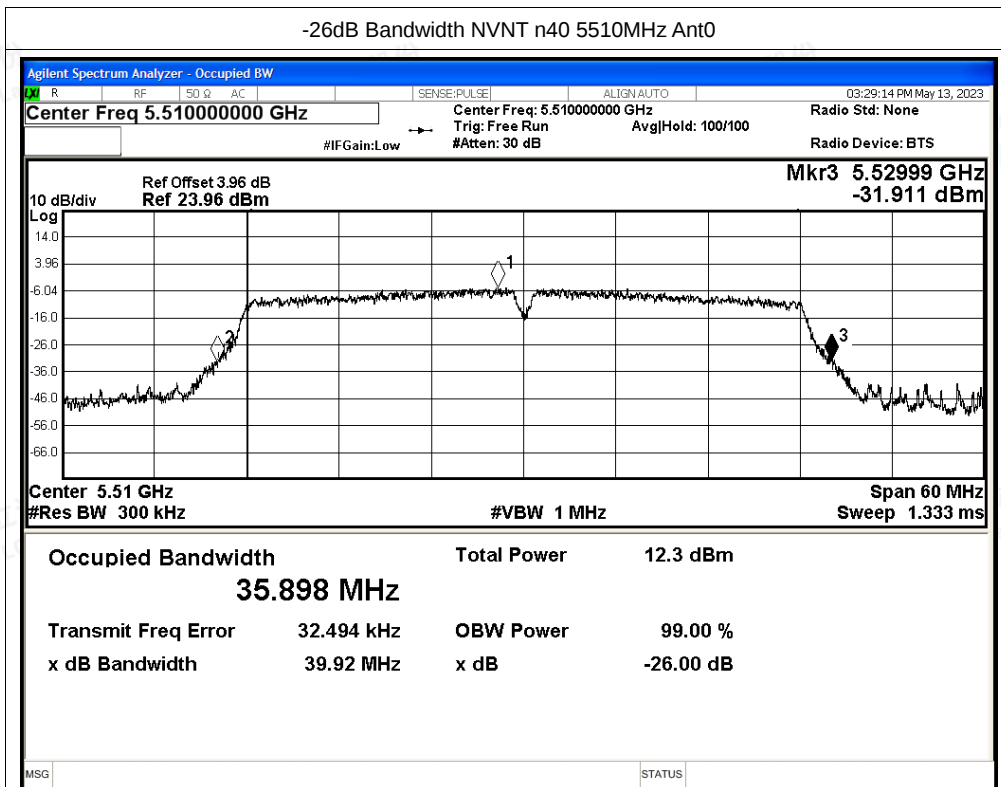


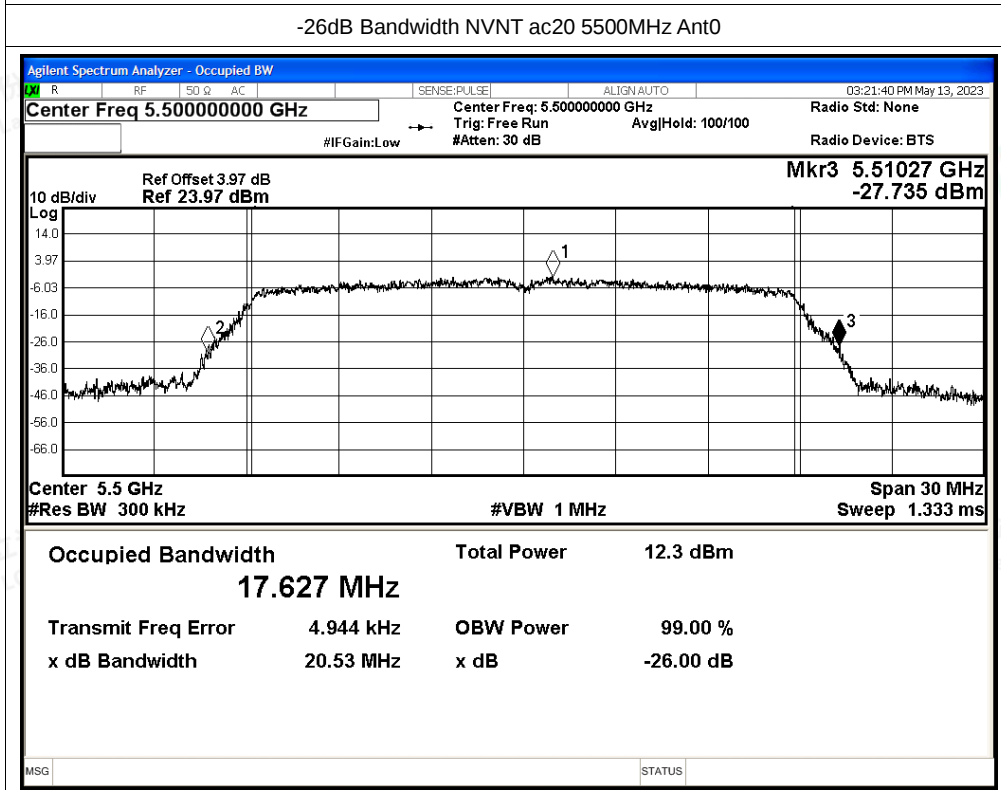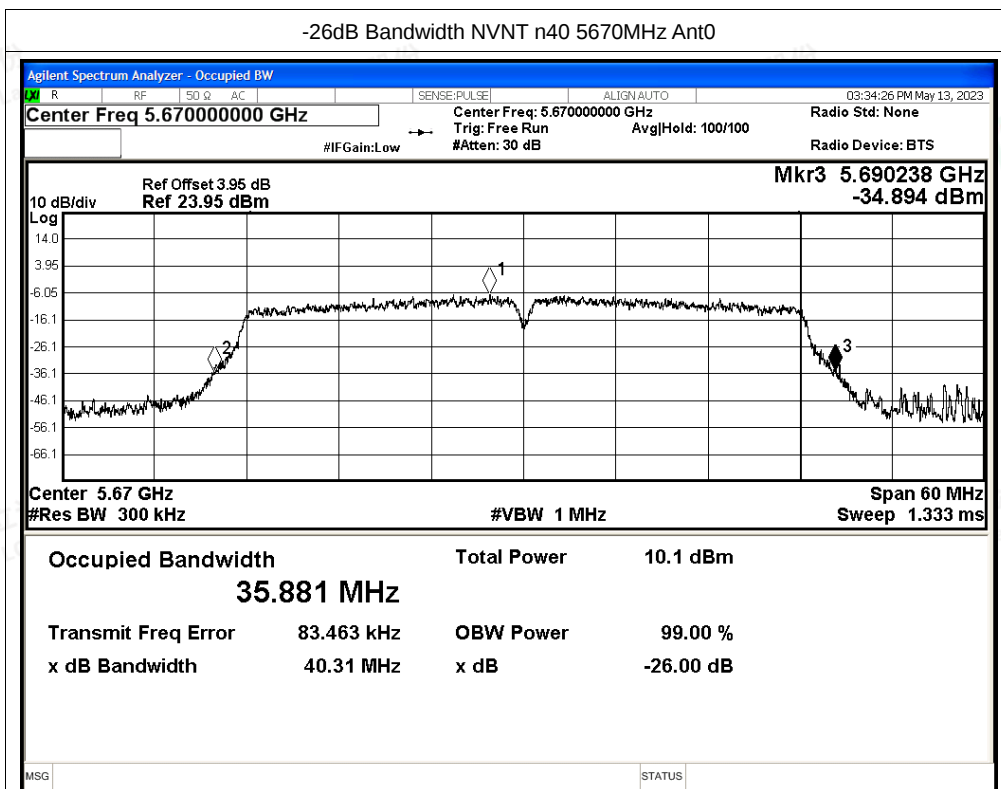

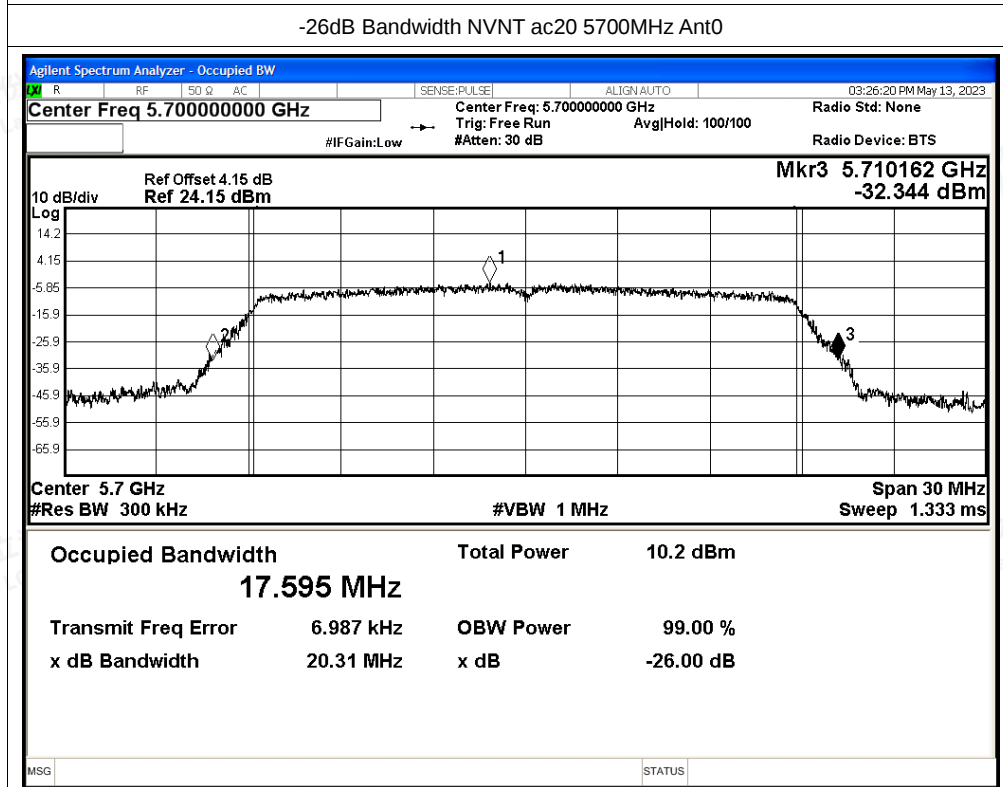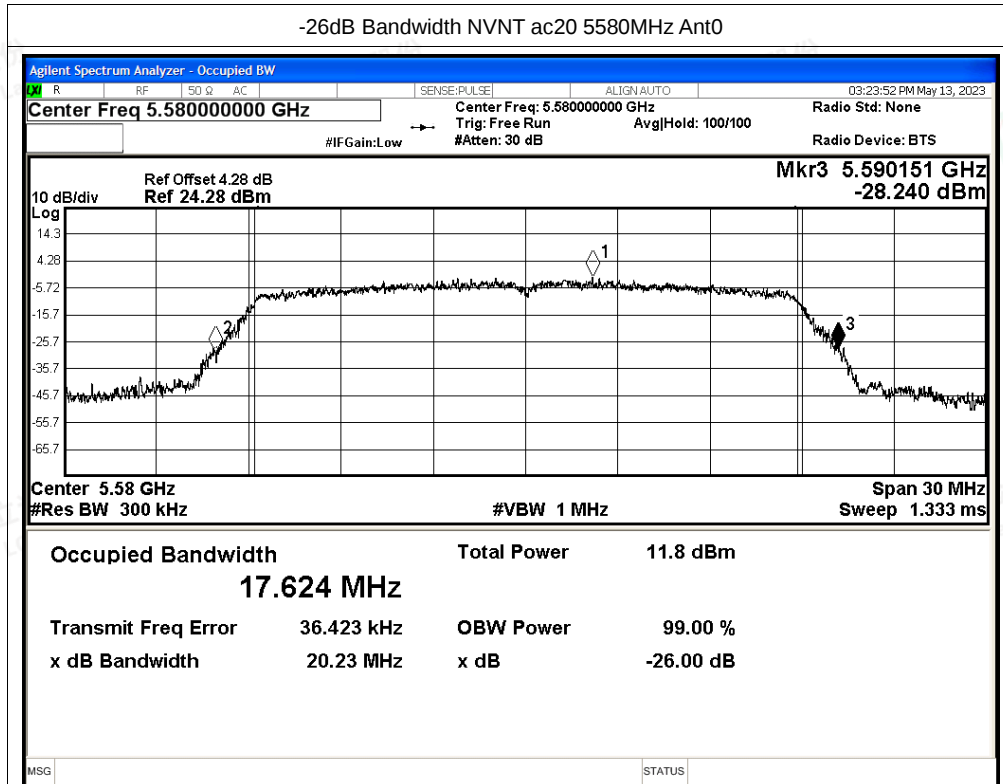




-26dB Bandwidth NVNT ac40 5510MHz Ant0

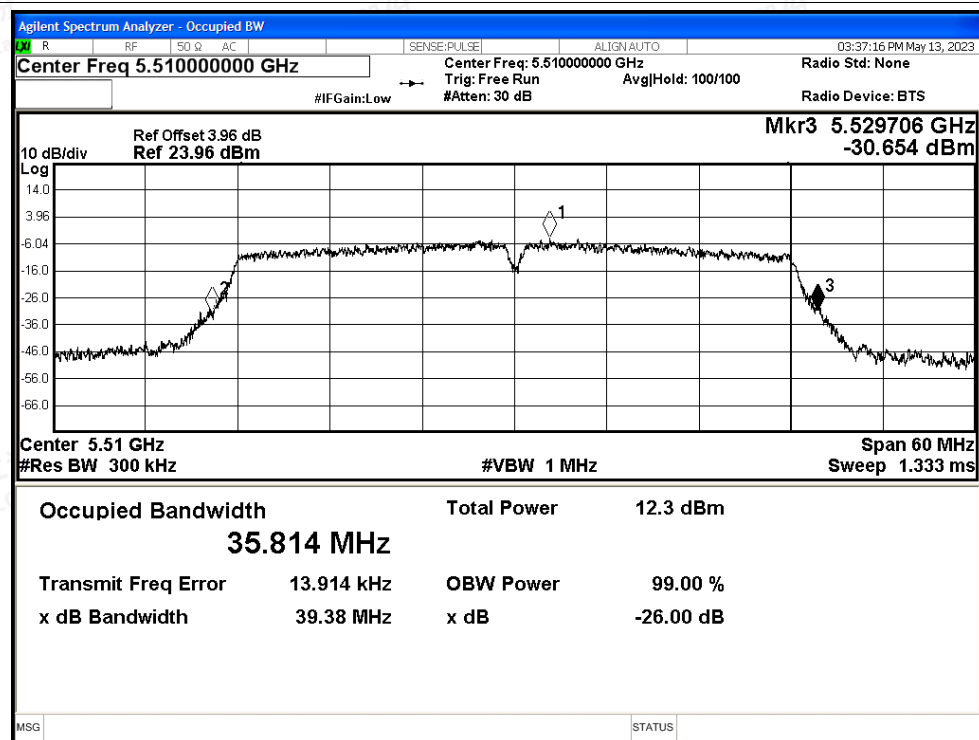

-26dB Bandwidth NVNT ac40 5550MHz Ant0

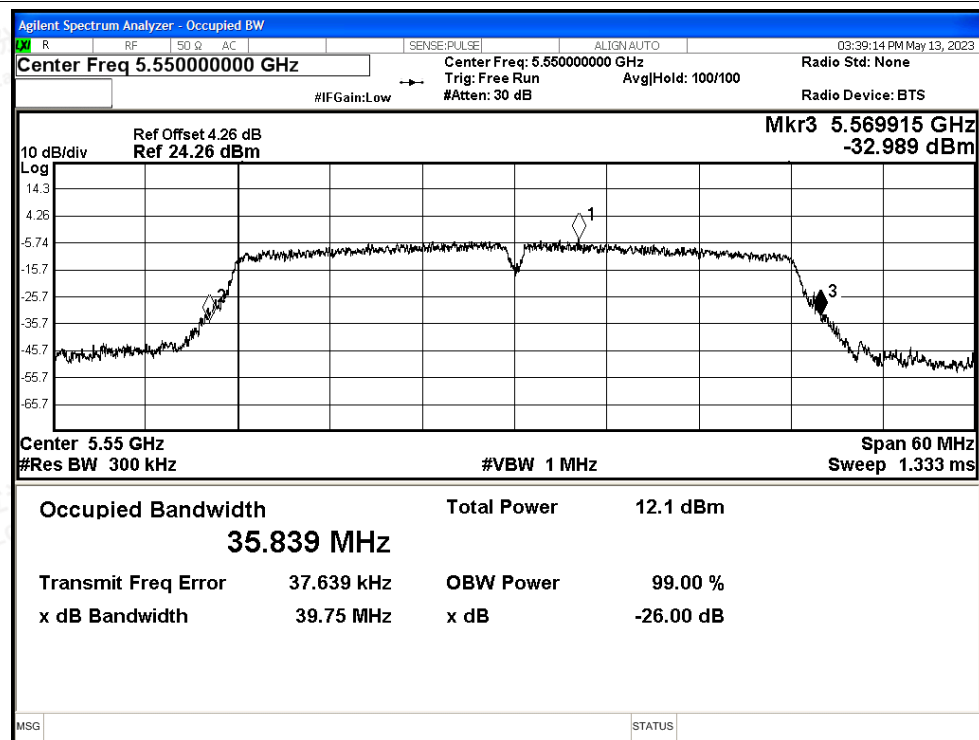

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




-26dB Bandwidth NVNT ac40 5670MHz Ant0

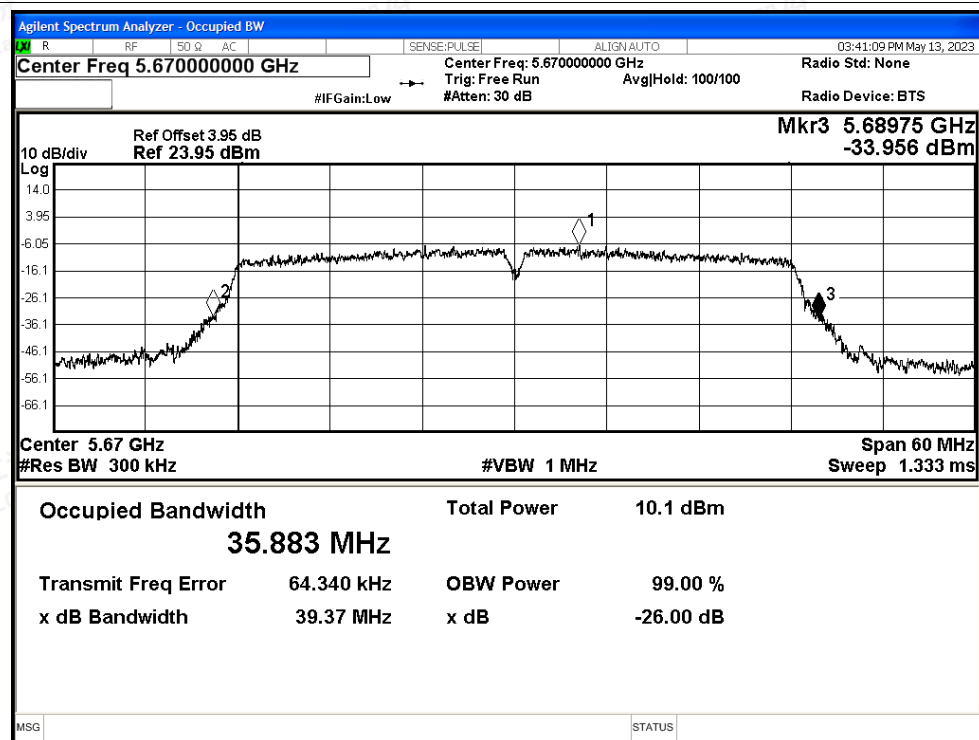

-26dB Bandwidth NVNT ac80 5530MHz Ant0

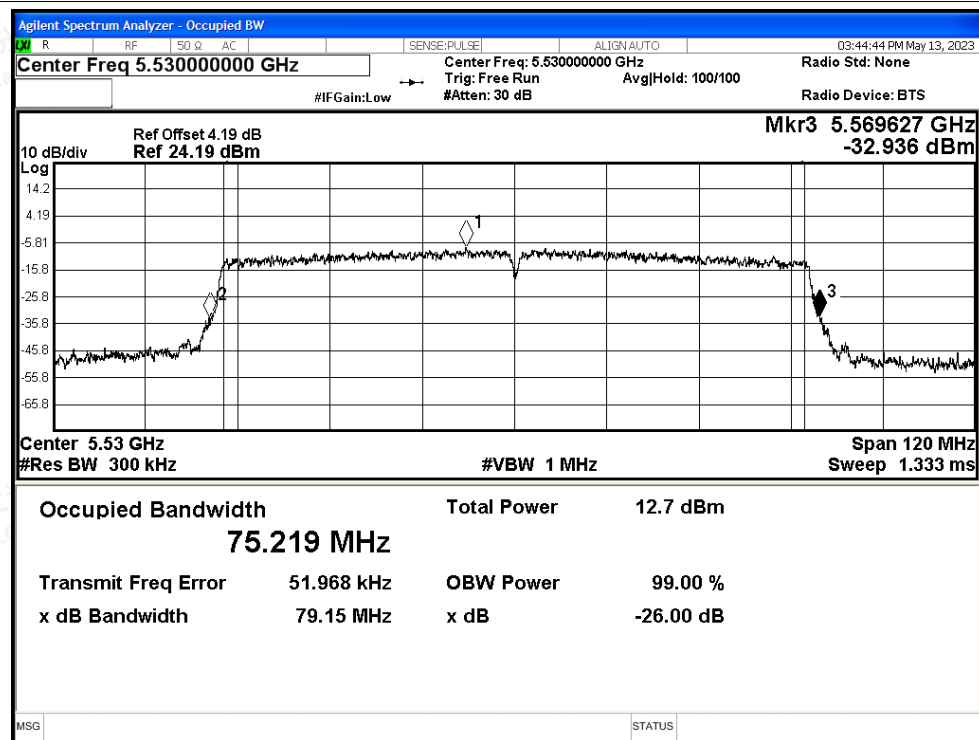

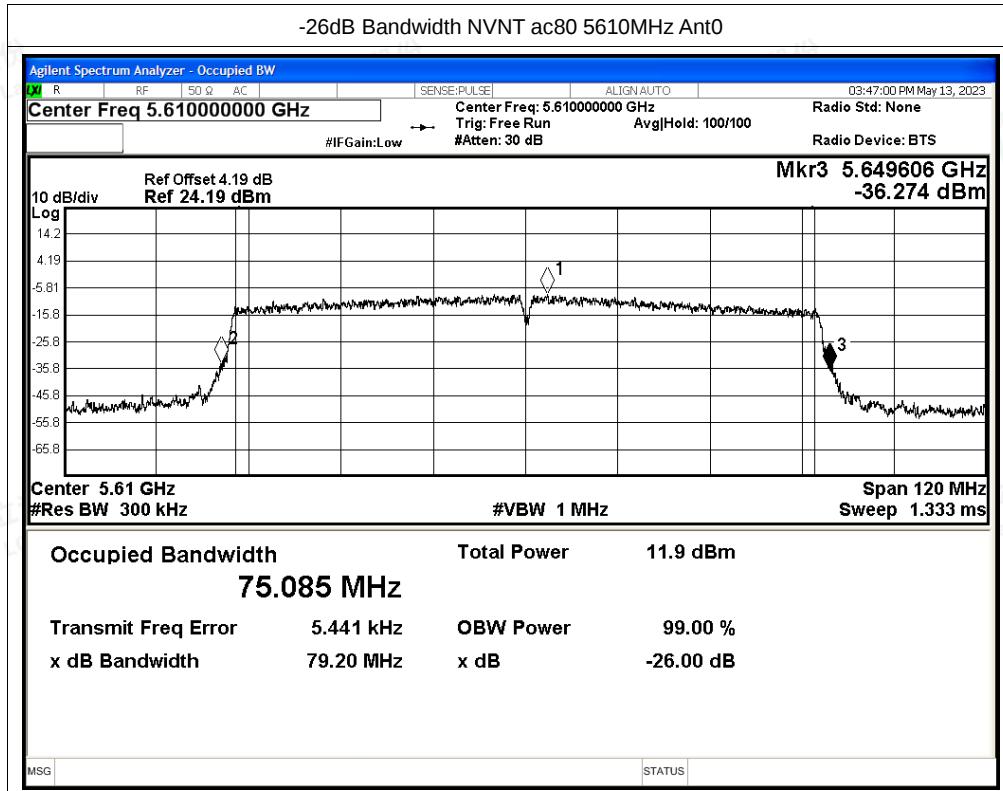




Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant1	19.966	≥ 0.5	Pass
NVNT	a	5580	Ant1	19.92	≥ 0.5	Pass
NVNT	a	5700	Ant1	20.172	≥ 0.5	Pass
NVNT	n20	5500	Ant1	20.265	≥ 0.5	Pass
NVNT	n20	5580	Ant1	20.661	≥ 0.5	Pass
NVNT	n20	5700	Ant1	20.414	≥ 0.5	Pass
NVNT	n40	5510	Ant1	39.615	≥ 0.5	Pass
NVNT	n40	5550	Ant1	39.762	≥ 0.5	Pass
NVNT	n40	5670	Ant1	39.176	≥ 0.5	Pass
NVNT	ac20	5500	Ant1	20.528	≥ 0.5	Pass
NVNT	ac20	5580	Ant1	20.31	≥ 0.5	Pass
NVNT	ac20	5700	Ant1	20.239	≥ 0.5	Pass
NVNT	ac40	5510	Ant1	39.651	≥ 0.5	Pass
NVNT	ac40	5550	Ant1	39.884	≥ 0.5	Pass
NVNT	ac40	5670	Ant1	40.115	≥ 0.5	Pass
NVNT	ac80	5530	Ant1	79.524	≥ 0.5	Pass
NVNT	ac80	5610	Ant1	79.434	≥ 0.5	Pass






Test Graphs

-26dB Bandwidth NVNT a 5500MHz Ant1

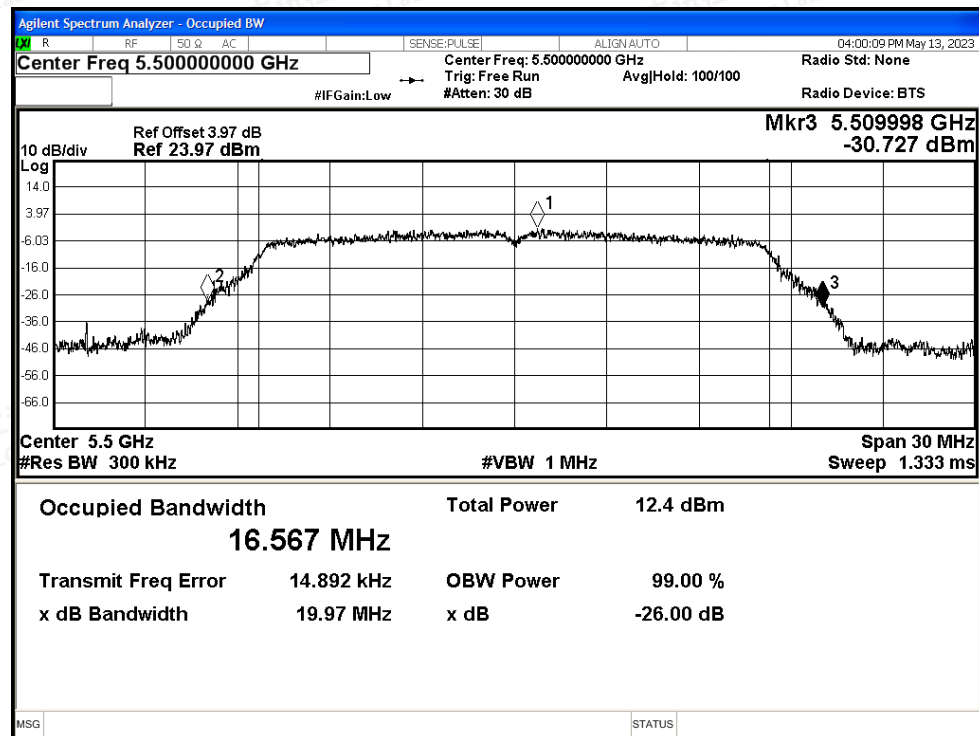

-26dB Bandwidth NVNT a 5580MHz Ant1


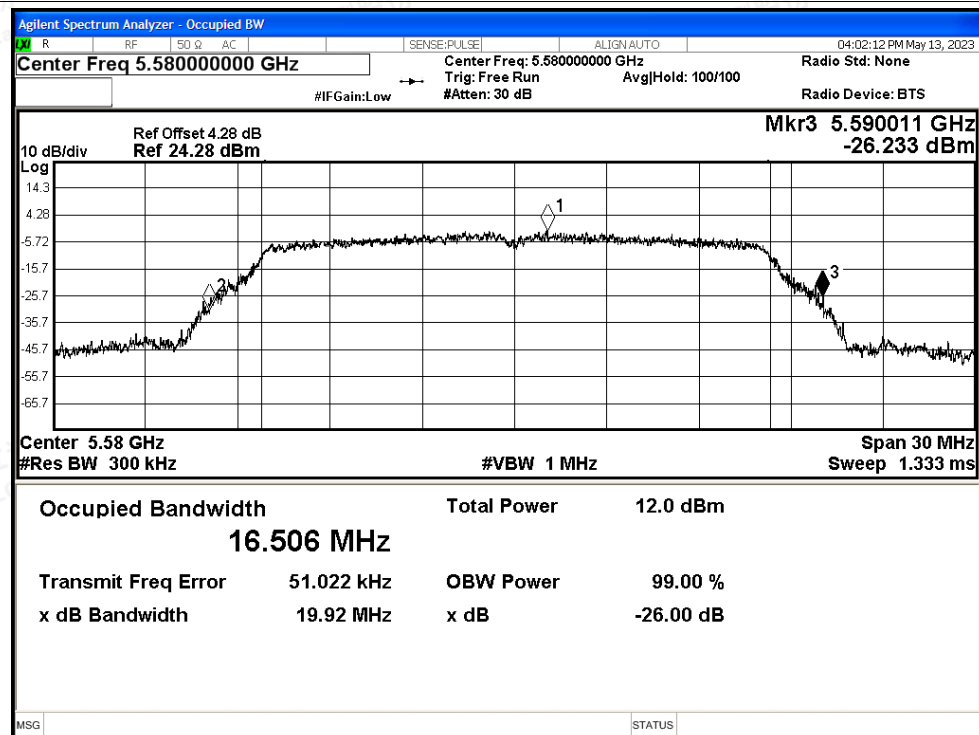




Shenzhen LCS Compliance Testing Laboratory Ltd.



Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

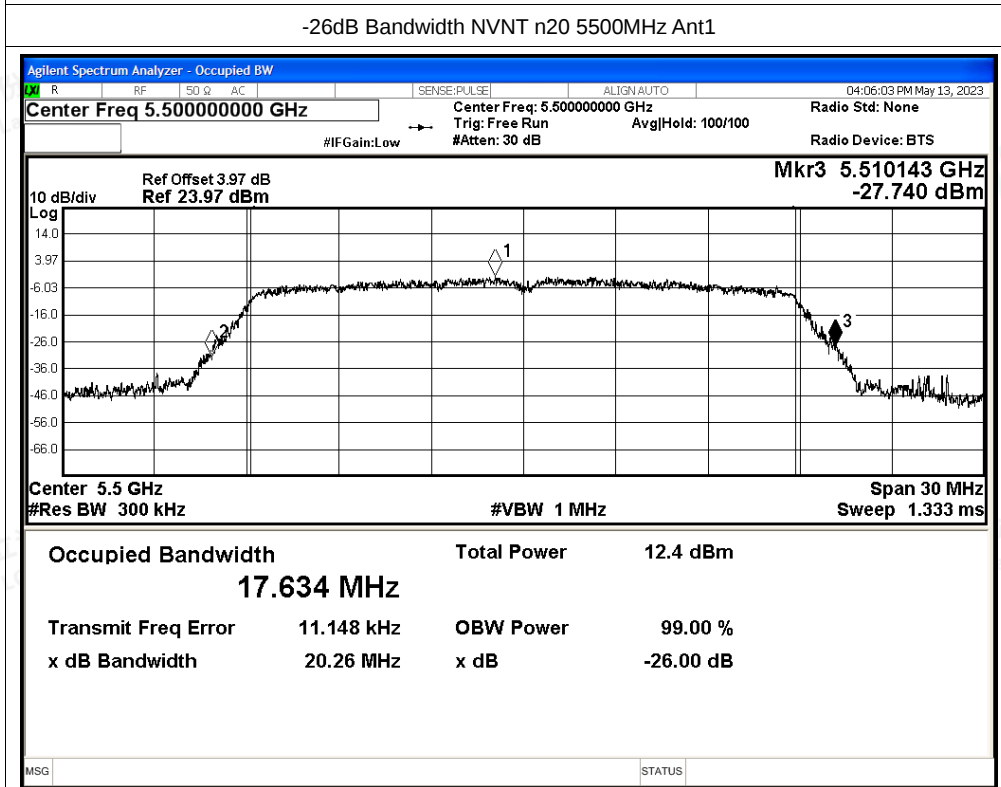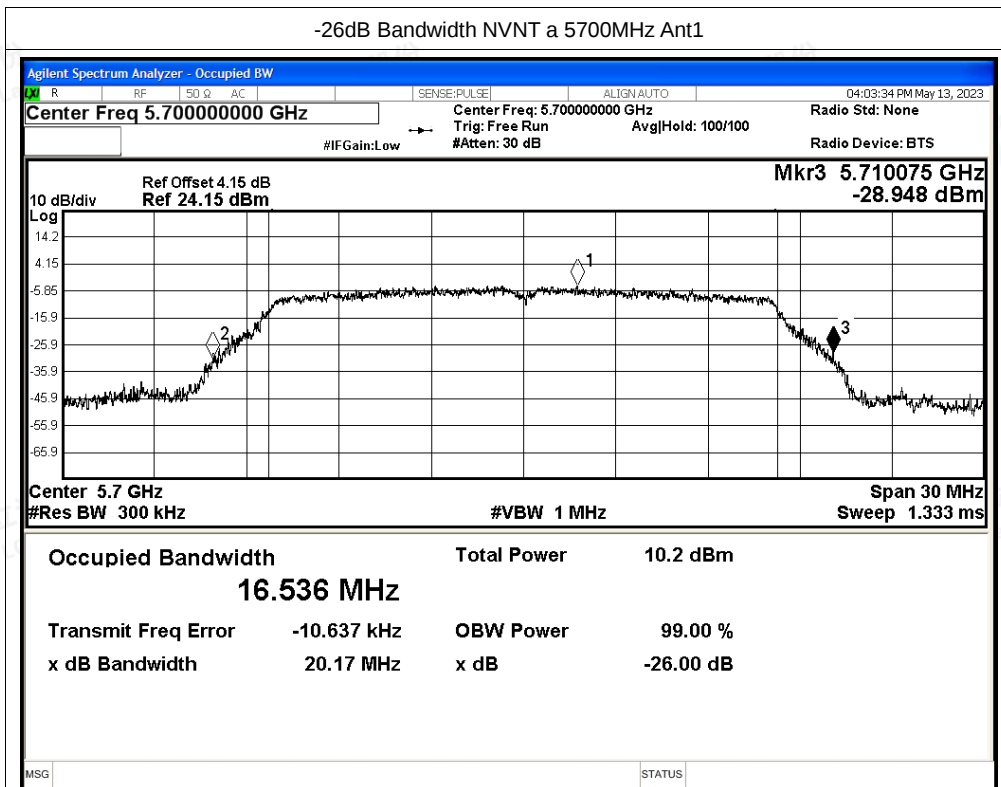

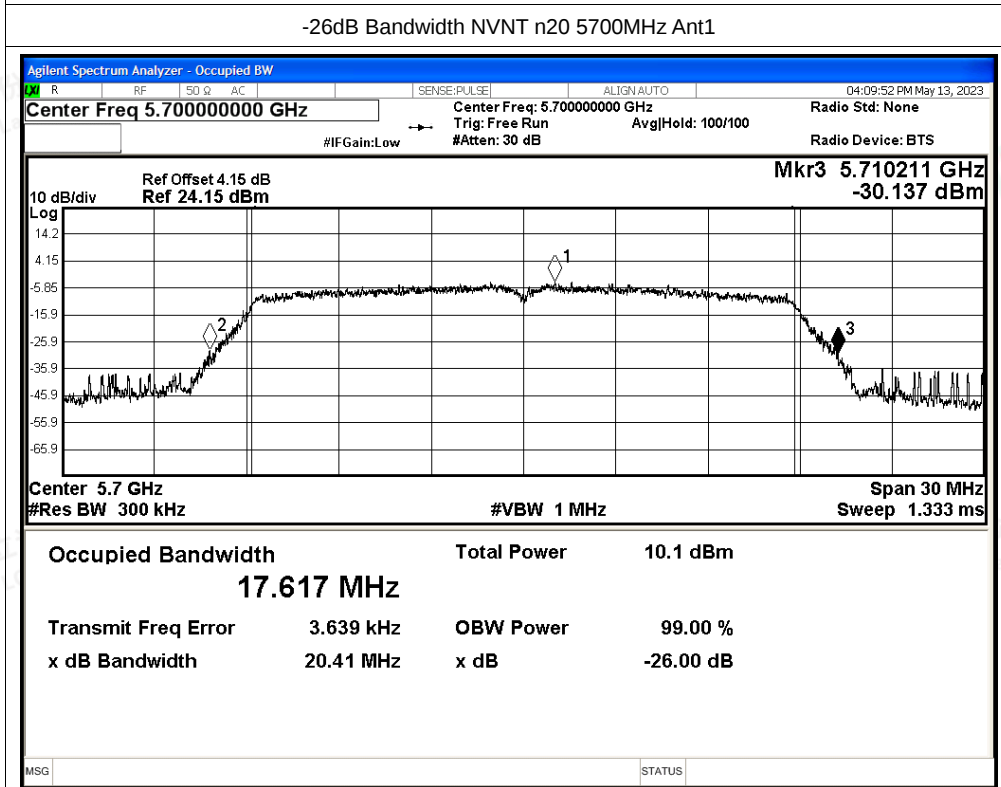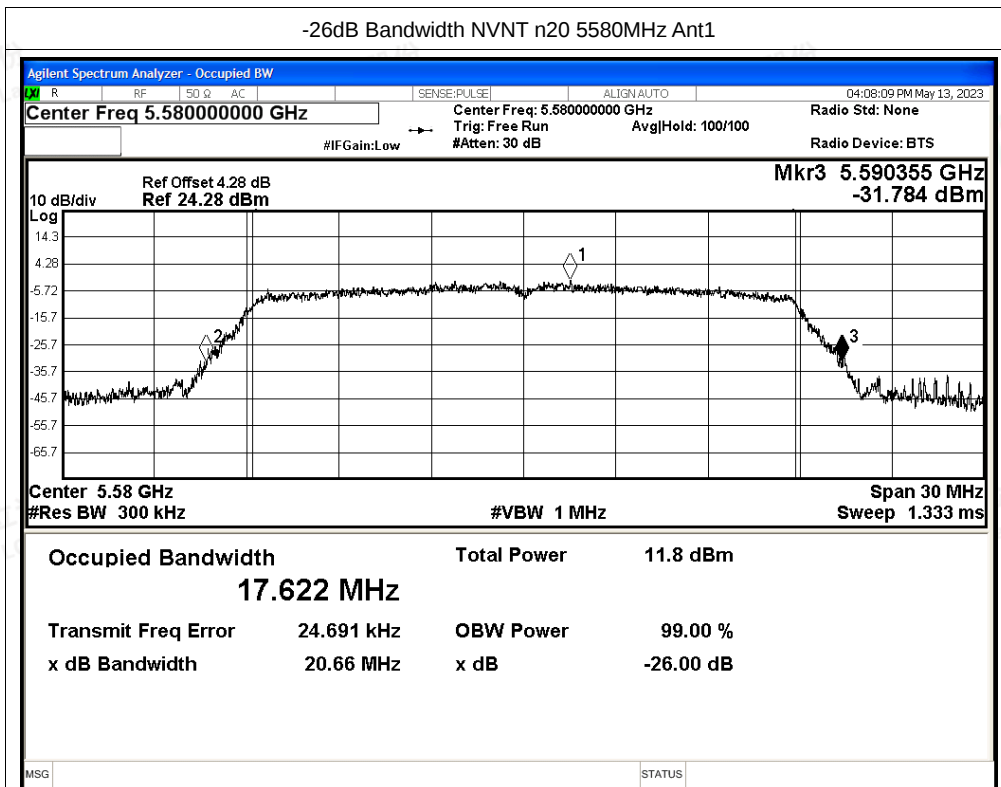

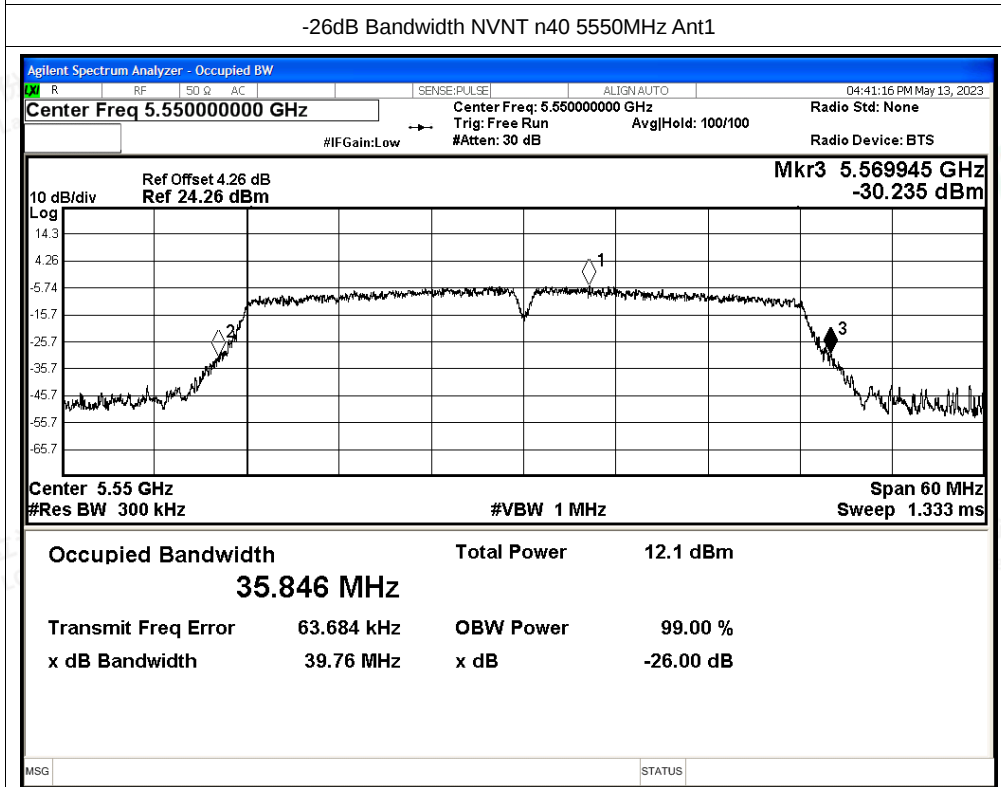
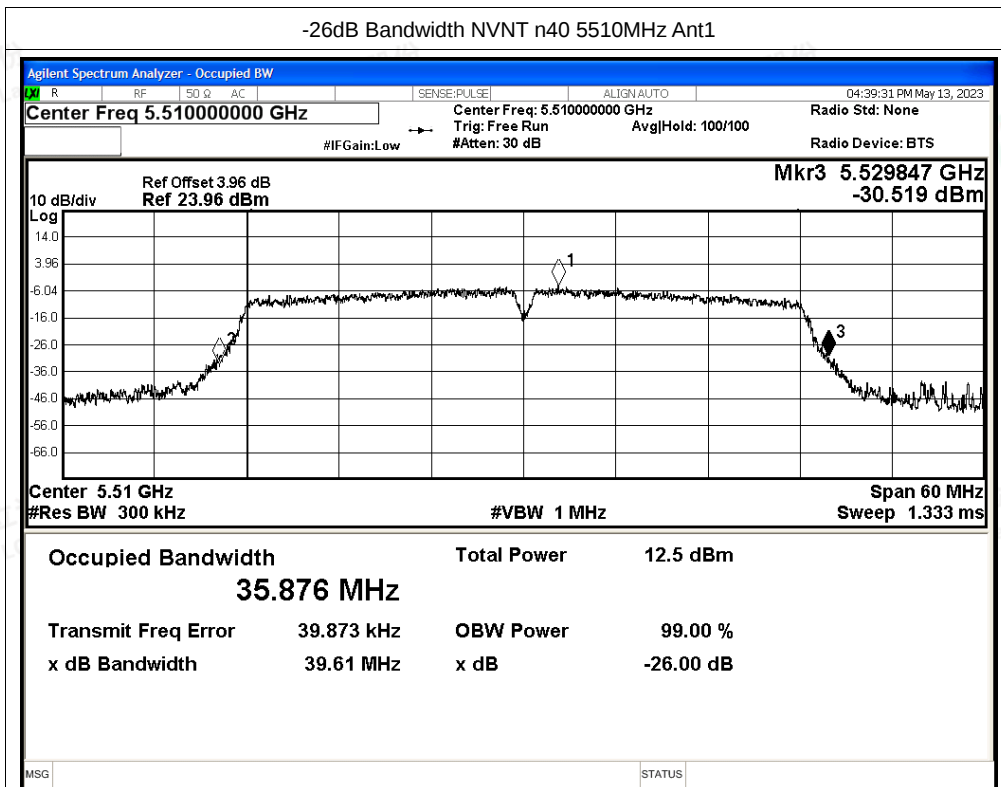


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

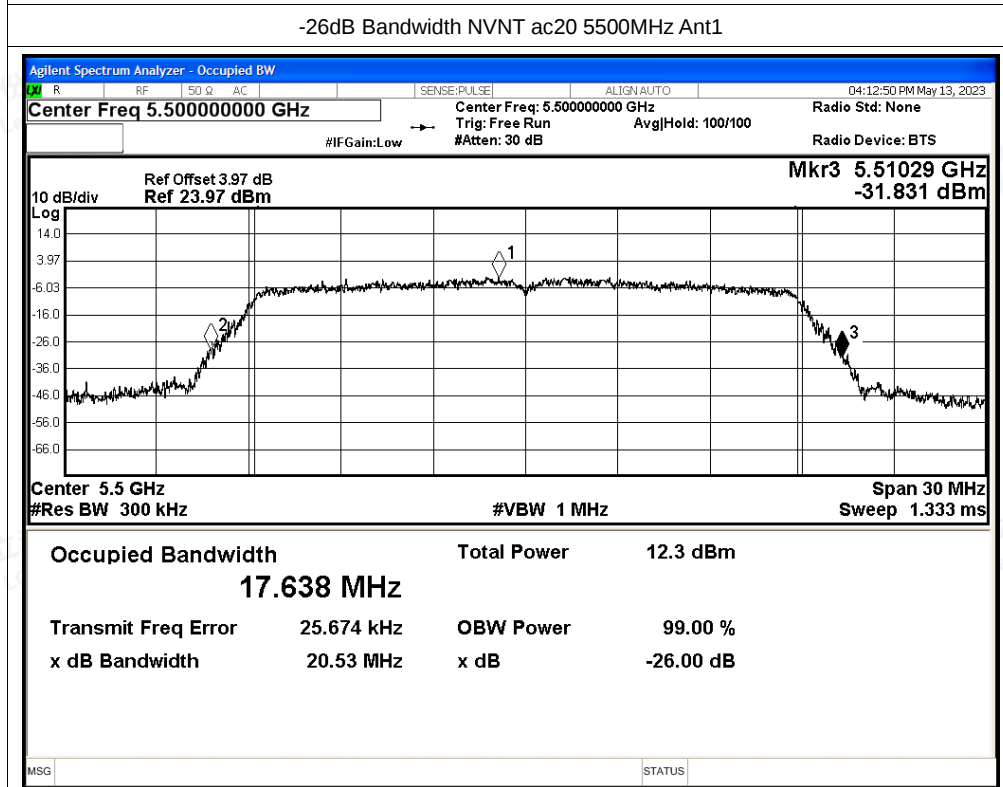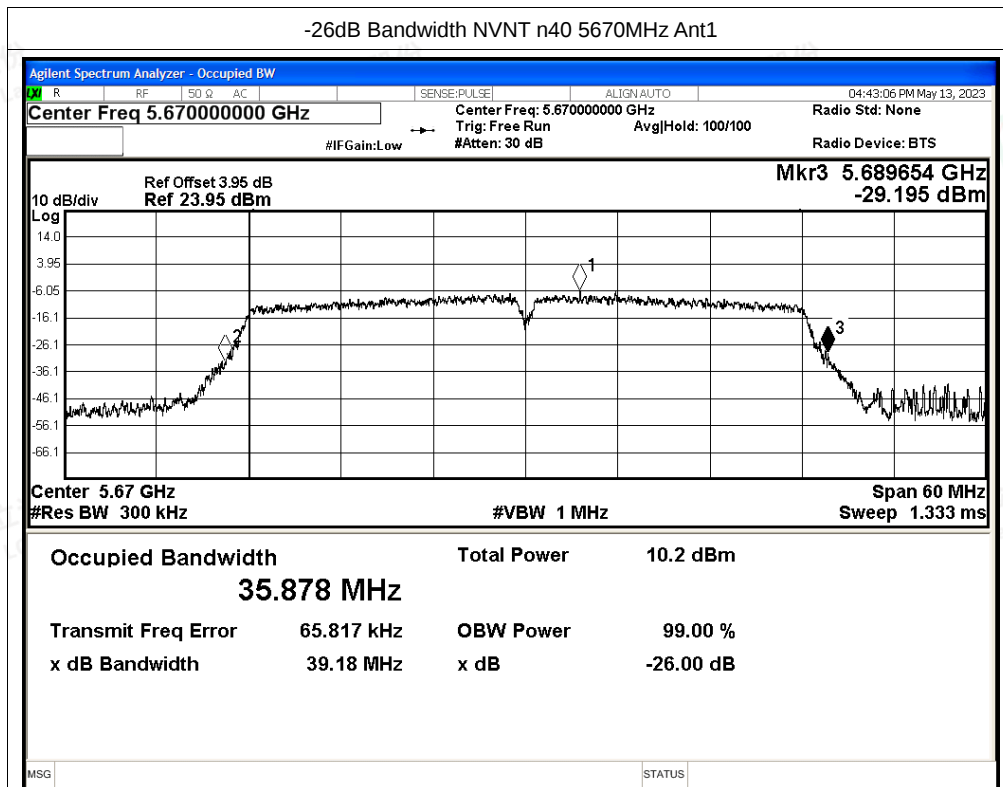

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5580MHz Ant1

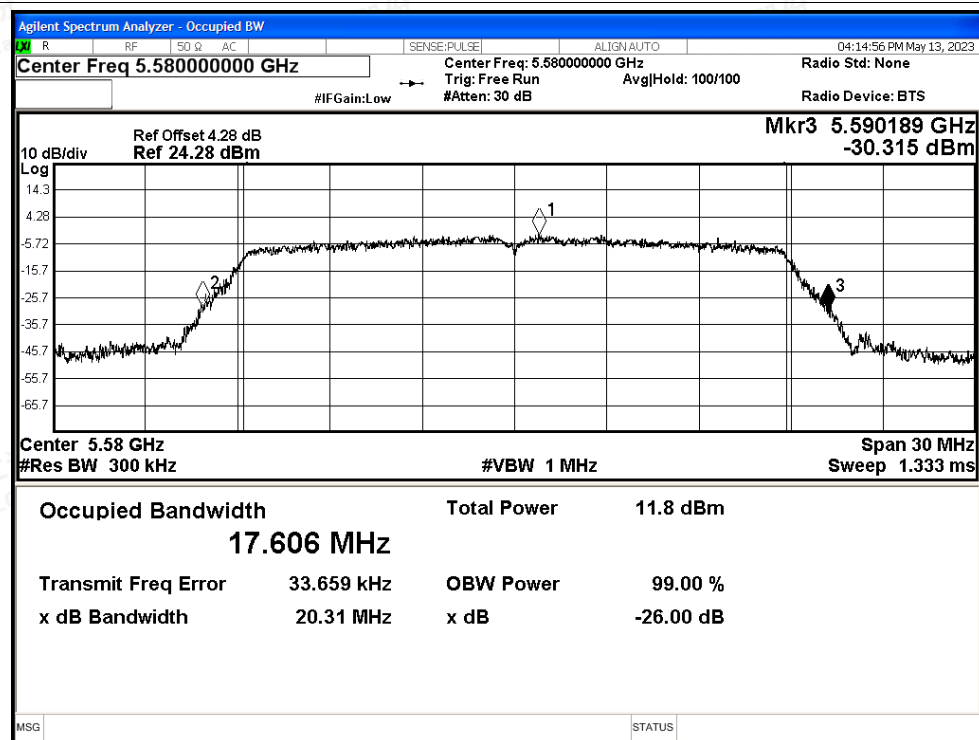


-26dB Bandwidth NVNT ac20 5700MHz Ant1

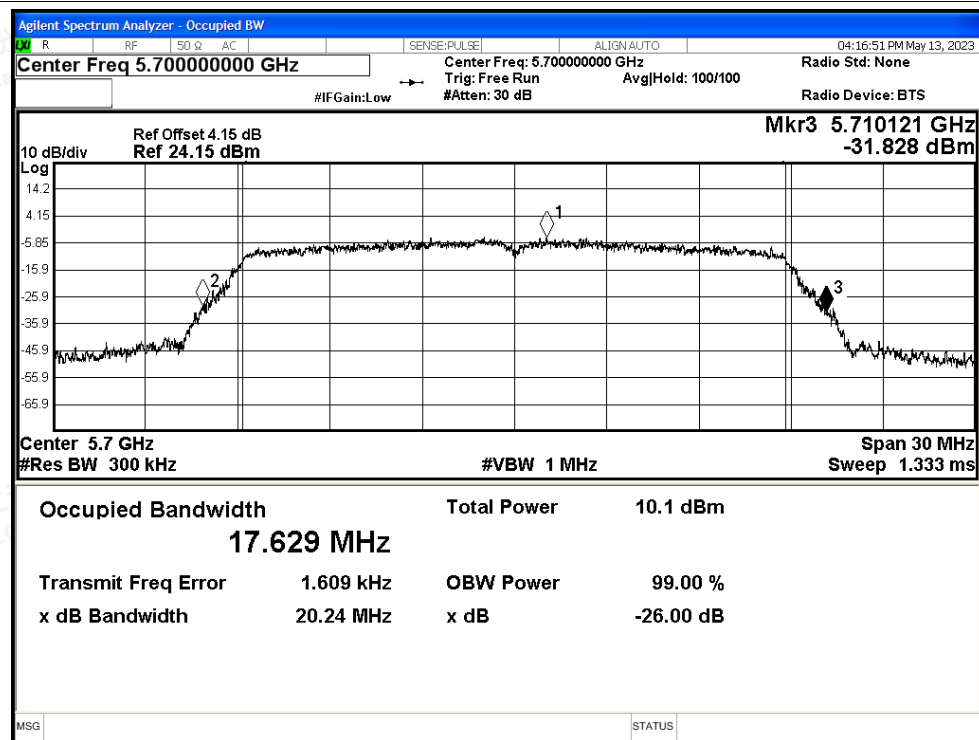




-26dB Bandwidth NVNT ac40 5510MHz Ant1

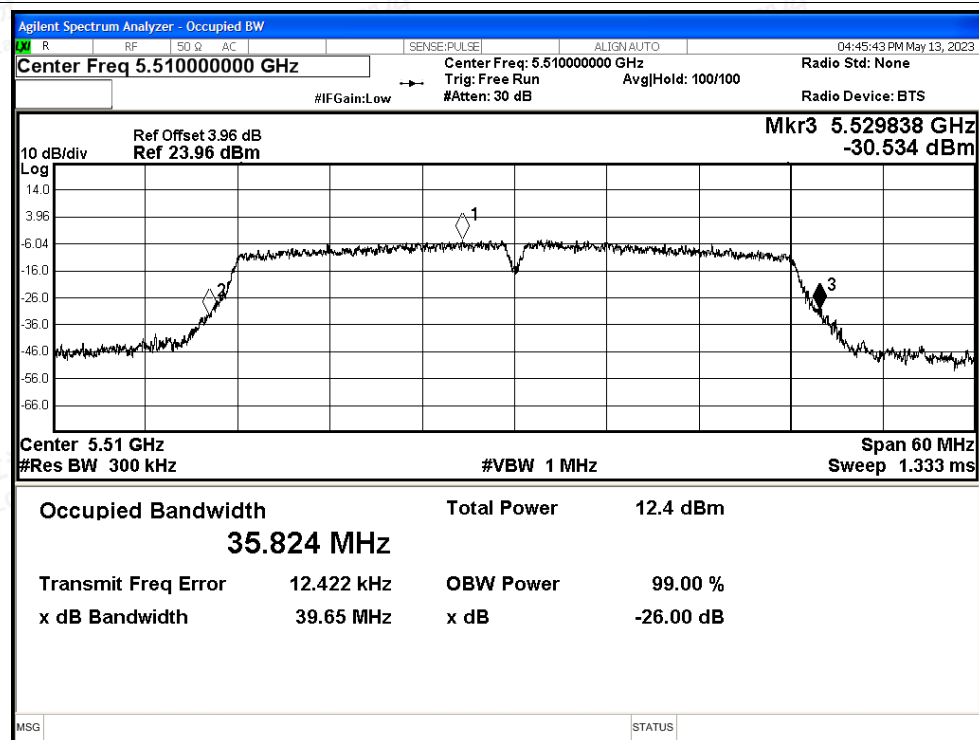


-26dB Bandwidth NVNT ac40 5550MHz Ant1

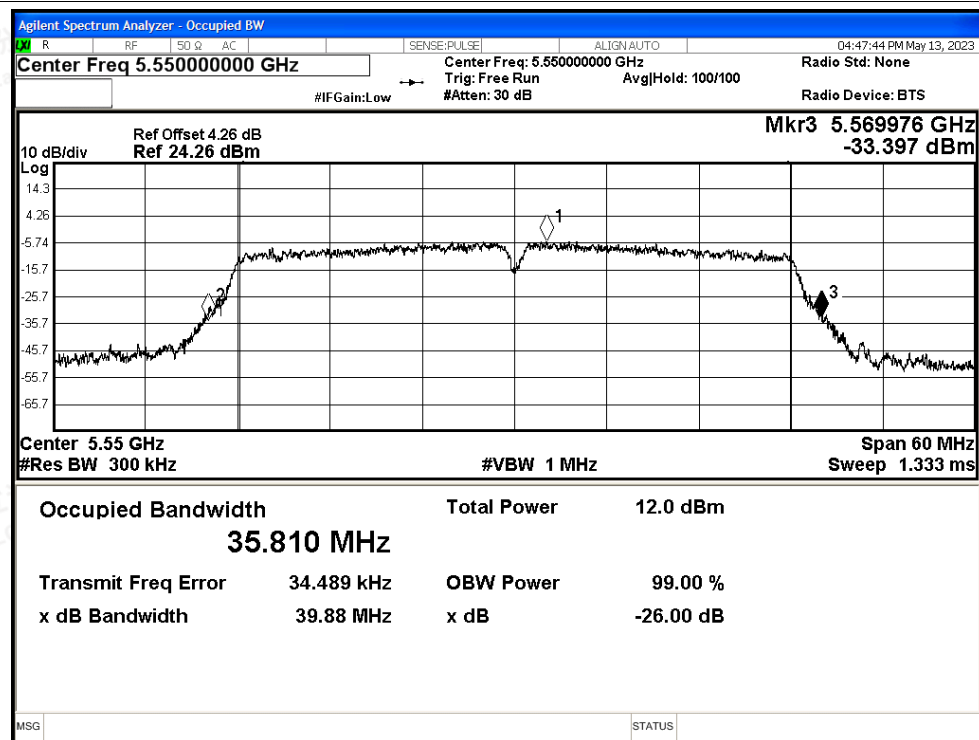




-26dB Bandwidth NVNT ac40 5670MHz Ant1

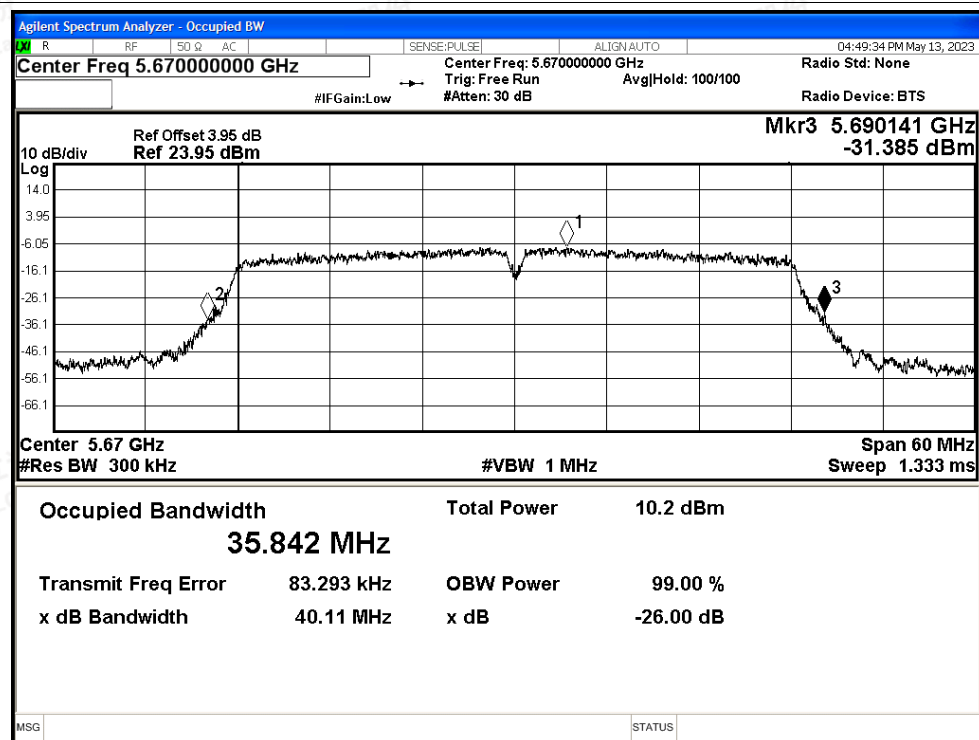

-26dB Bandwidth NVNT ac80 5530MHz Ant1

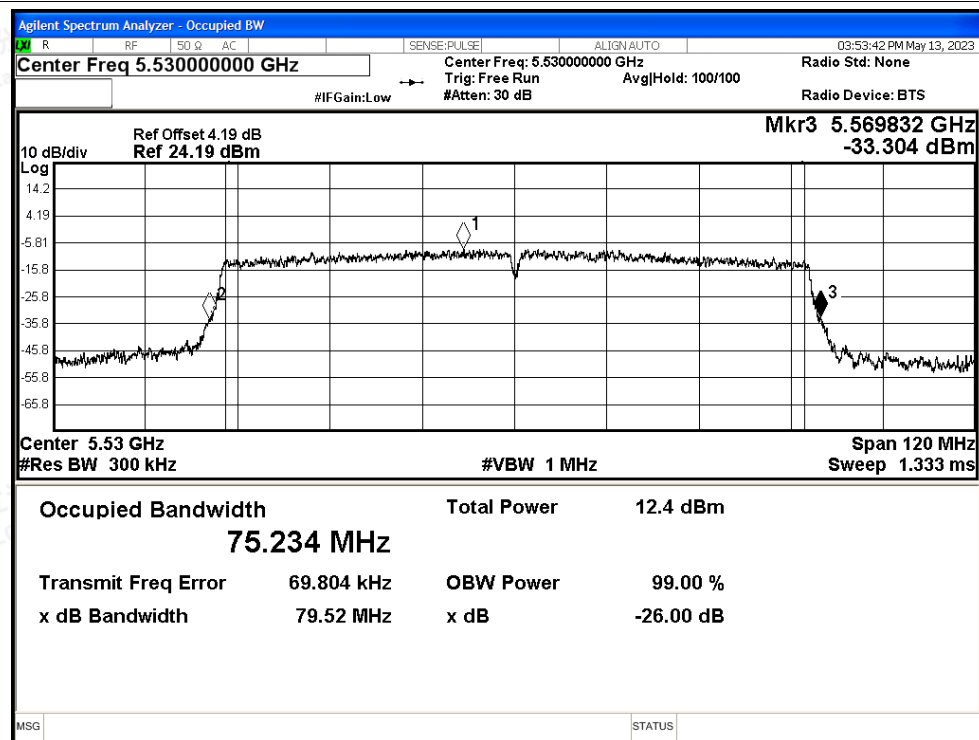


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

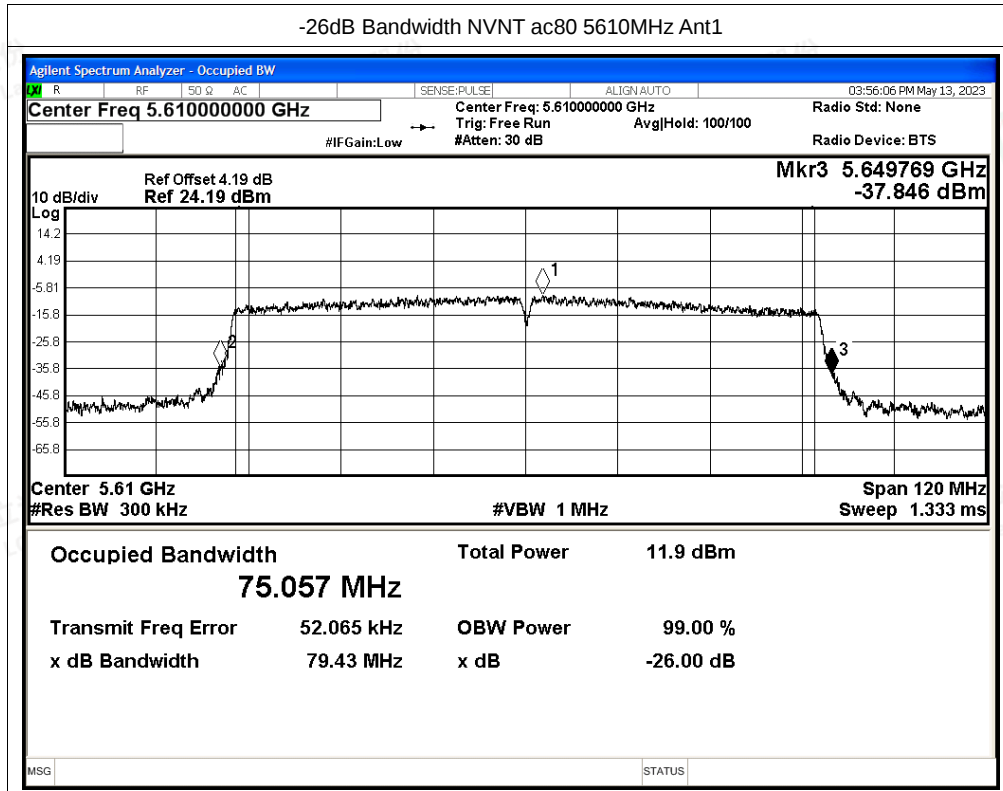



F.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant0	6.74	0.13	6.87	24	Pass
NVNT	a	5580	Ant0	6.3	0.13	6.43	24	Pass
NVNT	a	5700	Ant0	4.54	0.13	4.67	24	Pass
NVNT	n20	5500	Ant0	6.65	0.15	6.8	24	Pass
NVNT	n20	5580	Ant0	6.2	0.14	6.34	24	Pass
NVNT	n20	5700	Ant0	4.49	0.14	4.63	24	Pass
NVNT	n40	5510	Ant0	6.37	0.28	6.65	24	Pass
NVNT	n40	5550	Ant0	5.97	0.28	6.25	24	Pass
NVNT	n40	5670	Ant0	4.14	0.29	4.43	24	Pass
NVNT	ac20	5500	Ant0	6.65	0.14	6.79	24	Pass
NVNT	ac20	5580	Ant0	6.15	0.14	6.29	24	Pass
NVNT	ac20	5700	Ant0	4.45	0.14	4.59	24	Pass
NVNT	ac40	5510	Ant0	6.26	0.28	6.54	24	Pass
NVNT	ac40	5550	Ant0	6.13	0.28	6.41	24	Pass
NVNT	ac40	5670	Ant0	4.14	0.28	4.42	24	Pass
NVNT	ac80	5530	Ant0	5.97	0.55	6.52	24	Pass
NVNT	ac80	5610	Ant0	5.43	0.55	5.98	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	6.79	0.14	6.93	24	Pass
NVNT	a	5580	Ant1	6.31	0.13	6.44	24	Pass
NVNT	a	5700	Ant1	4.59	0.13	4.72	24	Pass
NVNT	n20	5500	Ant1	6.67	0.14	6.81	24	Pass
NVNT	n20	5580	Ant1	6.13	0.14	6.27	24	Pass
NVNT	n20	5700	Ant1	4.48	0.14	4.62	24	Pass
NVNT	n40	5510	Ant1	6.65	0.27	6.92	24	Pass
NVNT	n40	5550	Ant1	6.15	0.29	6.44	24	Pass
NVNT	n40	5670	Ant1	4.29	0.29	4.58	24	Pass
NVNT	ac20	5500	Ant1	6.63	0.14	6.77	24	Pass
NVNT	ac20	5580	Ant1	6.12	0.14	6.26	24	Pass
NVNT	ac20	5700	Ant1	4.41	0.14	4.55	24	Pass
NVNT	ac40	5510	Ant1	6.39	0.28	6.67	24	Pass
NVNT	ac40	5550	Ant1	5.93	0.28	6.21	24	Pass
NVNT	ac40	5670	Ant1	4.22	0.28	4.5	24	Pass
NVNT	ac80	5530	Ant1	5.83	0.55	6.38	24	Pass
NVNT	ac80	5610	Ant1	5.49	0.55	6.04	24	Pass





MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5500	6.8	6.81	9.82	24	Pass
NVNT	n20	5580	6.34	6.27	9.32	24	Pass
NVNT	n20	5700	4.63	4.62	7.64	24	Pass
NVNT	n40	5510	6.65	6.92	9.80	24	Pass
NVNT	n40	5550	6.25	6.44	9.36	24	Pass
NVNT	n40	5670	4.43	4.58	7.52	24	Pass
NVNT	ac20	5500	6.79	6.77	9.79	24	Pass
NVNT	ac20	5580	6.29	6.26	9.29	24	Pass
NVNT	ac20	5700	4.59	4.55	7.58	24	Pass
NVNT	ac40	5510	6.54	6.67	9.62	24	Pass
NVNT	ac40	5550	6.41	6.21	9.32	24	Pass
NVNT	ac40	5670	4.42	4.5	7.47	24	Pass
NVNT	ac80	5530	6.52	6.38	9.46	24	Pass
NVNT	ac80	5610	5.98	6.04	9.02	24	Pass





F.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant0	-2.73	0.13	-2.6	11	Pass
NVNT	a	5580	Ant0	-3.21	0.13	-3.08	11	Pass
NVNT	a	5700	Ant0	-5.24	0.13	-5.11	11	Pass
NVNT	n20	5500	Ant0	-3.18	0.15	-3.03	11	Pass
NVNT	n20	5580	Ant0	-3.68	0.14	-3.54	11	Pass
NVNT	n20	5700	Ant0	-5.13	0.14	-4.99	11	Pass
NVNT	n40	5510	Ant0	-5.99	0.28	-5.71	11	Pass
NVNT	n40	5550	Ant0	-6.8	0.28	-6.52	11	Pass
NVNT	n40	5670	Ant0	-8.68	0.29	-8.39	11	Pass
NVNT	ac20	5500	Ant0	-3	0.14	-2.86	11	Pass
NVNT	ac20	5580	Ant0	-3.76	0.14	-3.62	11	Pass
NVNT	ac20	5700	Ant0	-5.36	0.14	-5.22	11	Pass
NVNT	ac40	5510	Ant0	-6.09	0.28	-5.81	11	Pass
NVNT	ac40	5550	Ant0	-6.31	0.28	-6.03	11	Pass
NVNT	ac40	5670	Ant0	-8.76	0.28	-8.48	11	Pass
NVNT	ac80	5530	Ant0	-9.99	0.55	-9.44	11	Pass
NVNT	ac80	5610	Ant0	-10.01	0.55	-9.46	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant1	-2.86	0.14	-2.72	11	Pass
NVNT	a	5580	Ant1	-3.34	0.13	-3.21	11	Pass
NVNT	a	5700	Ant1	-4.74	0.13	-4.61	11	Pass
NVNT	n20	5500	Ant1	-2.99	0.14	-2.85	11	Pass
NVNT	n20	5580	Ant1	-3.84	0.14	-3.7	11	Pass
NVNT	n20	5700	Ant1	-5.53	0.14	-5.39	11	Pass
NVNT	n40	5510	Ant1	-5.95	0.27	-5.68	11	Pass
NVNT	n40	5550	Ant1	-6.31	0.29	-6.02	11	Pass
NVNT	n40	5670	Ant1	-8.14	0.29	-7.85	11	Pass
NVNT	ac20	5500	Ant1	-3.21	0.14	-3.07	11	Pass
NVNT	ac20	5580	Ant1	-3.51	0.14	-3.37	11	Pass
NVNT	ac20	5700	Ant1	-5.57	0.14	-5.43	11	Pass
NVNT	ac40	5510	Ant1	-6.21	0.28	-5.93	11	Pass
NVNT	ac40	5550	Ant1	-6.52	0.28	-6.24	11	Pass
NVNT	ac40	5670	Ant1	-8.54	0.28	-8.26	11	Pass
NVNT	ac80	5530	Ant1	-10.15	0.55	-9.6	11	Pass
NVNT	ac80	5610	Ant1	-10.29	0.55	-9.74	11	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



MIMO

Test Mode	Channel	Frequency (MHz)	Ant 0 Conducted Power (dBm/MHz)	Ant 1 Conducted Power (dBm/MHz)	MIMO AV Conducted Power (dBm/MHz)	Limit (dBm/MHz)	Verdict
n20	100	5500	-3.03	-2.85	0.07	10.79	Pass
	116	5580	-3.54	-3.7	-0.61	10.79	Pass
	140	5700	-4.99	-5.39	-2.18	10.79	Pass
N40	102	5510	-5.71	-5.68	-2.68	10.79	Pass
	110	5550	-6.52	-6.02	-3.25	10.79	Pass
	134	5670	-8.39	-7.85	-5.10	10.79	Pass
ac20	100	5500	-2.86	-3.07	0.05	10.79	Pass
	116	5580	-3.62	-3.37	-0.48	10.79	Pass
	140	5700	-5.22	-5.43	-2.31	10.79	Pass
ac40	102	5510	-5.81	-5.93	-2.86	10.79	Pass
	110	5550	-6.03	-6.24	-3.12	10.79	Pass
	134	5670	-8.48	-8.26	-5.36	10.79	Pass
ac80	106	5530	-9.44	-9.6	-6.51	10.79	Pass
ac80	122	5610	-9.46	-9.74	-6.59	10.79	Pass


Note: The Duty Cycle Factor is compensated in the graph.








Test Graphs



PSD NVNT a 5500MHz Ant0


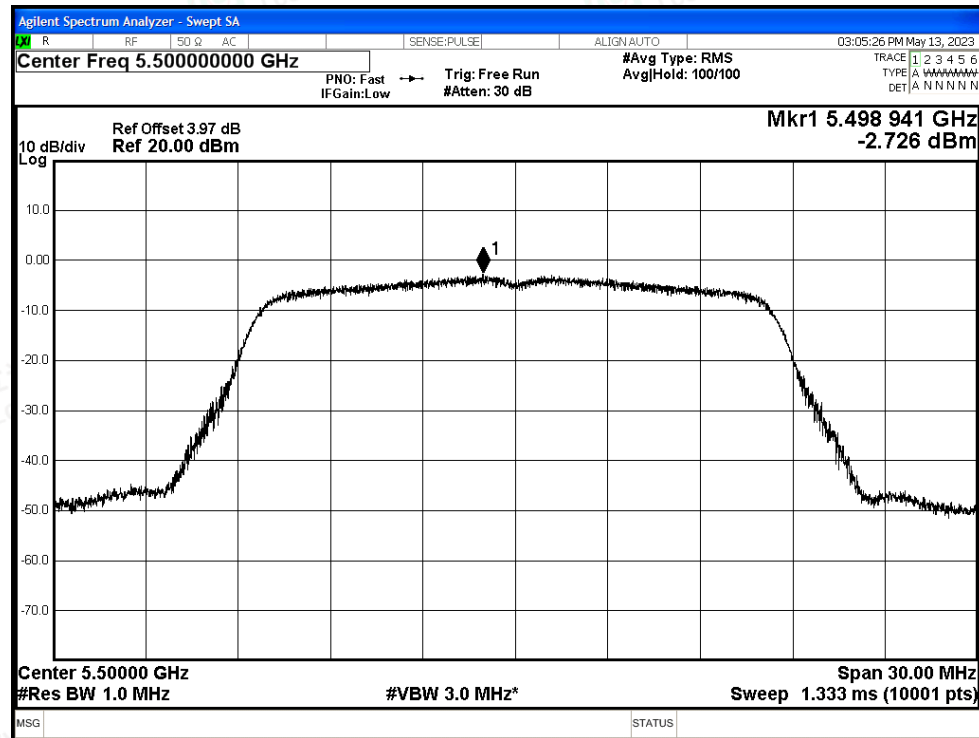




PSD NVNT a 5580MHz Ant0


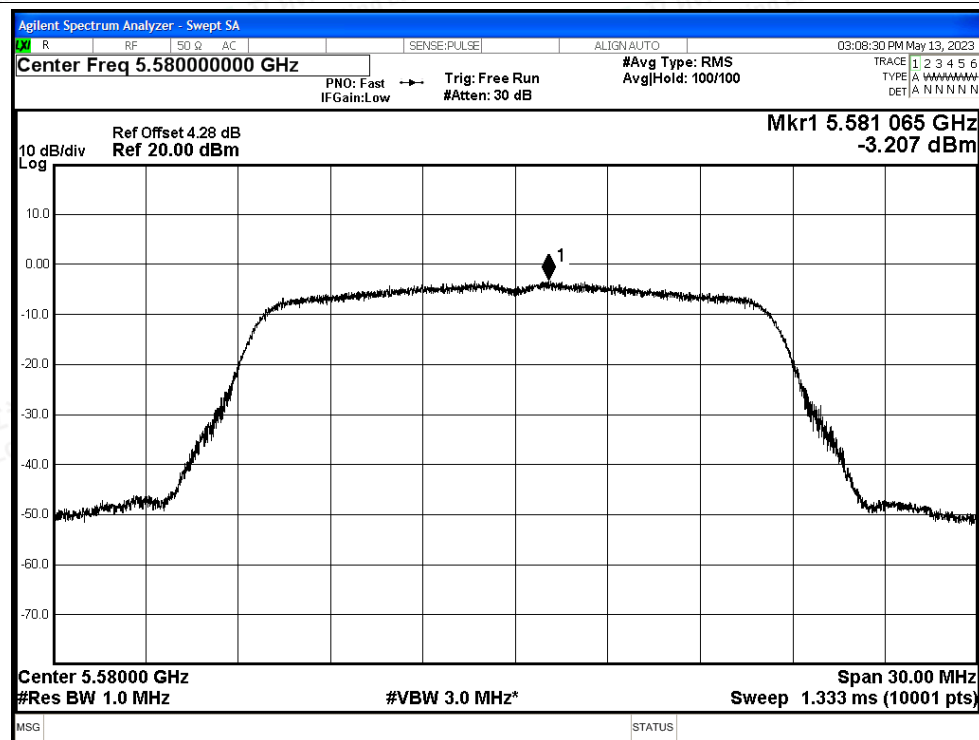


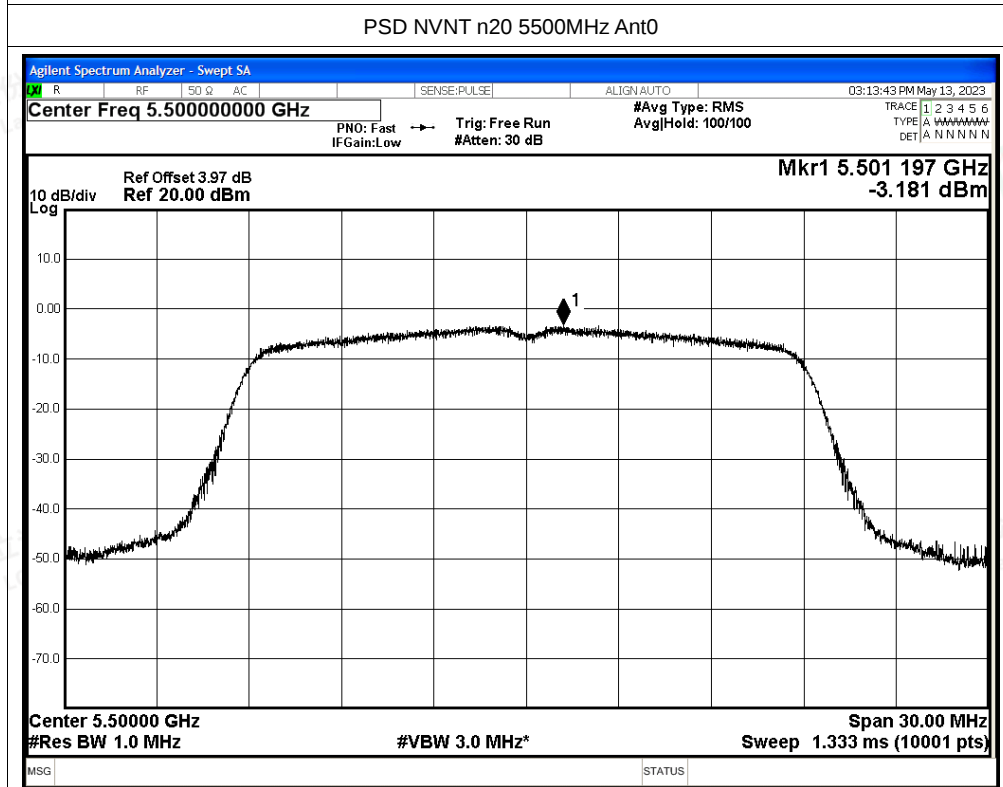
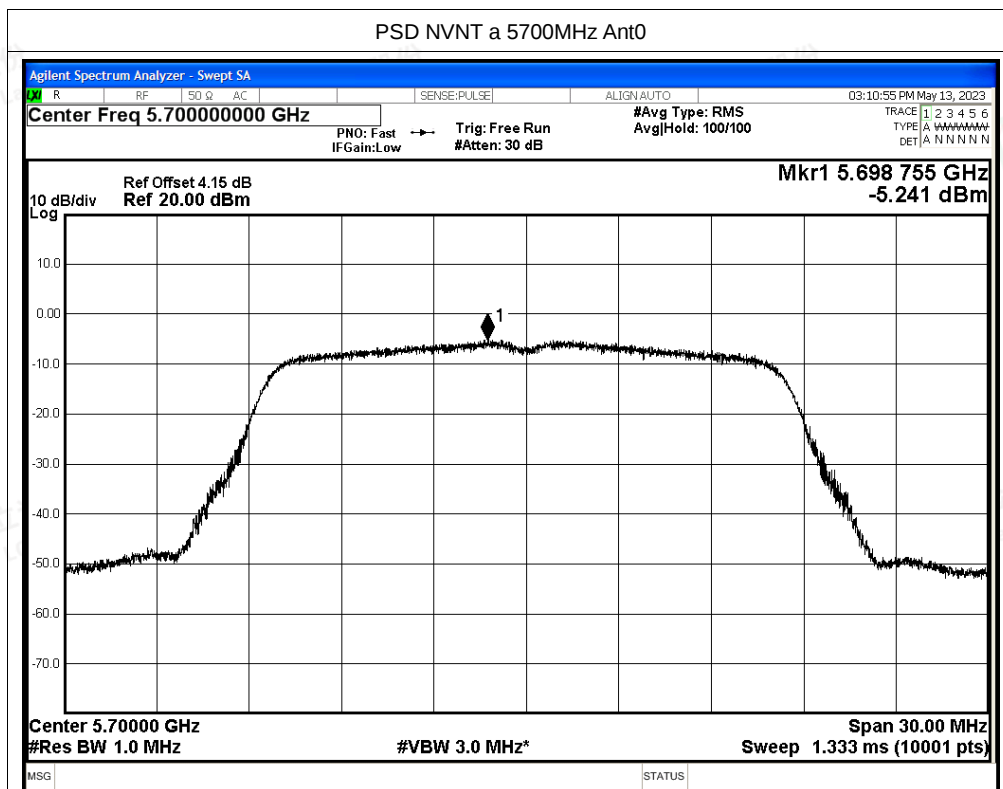


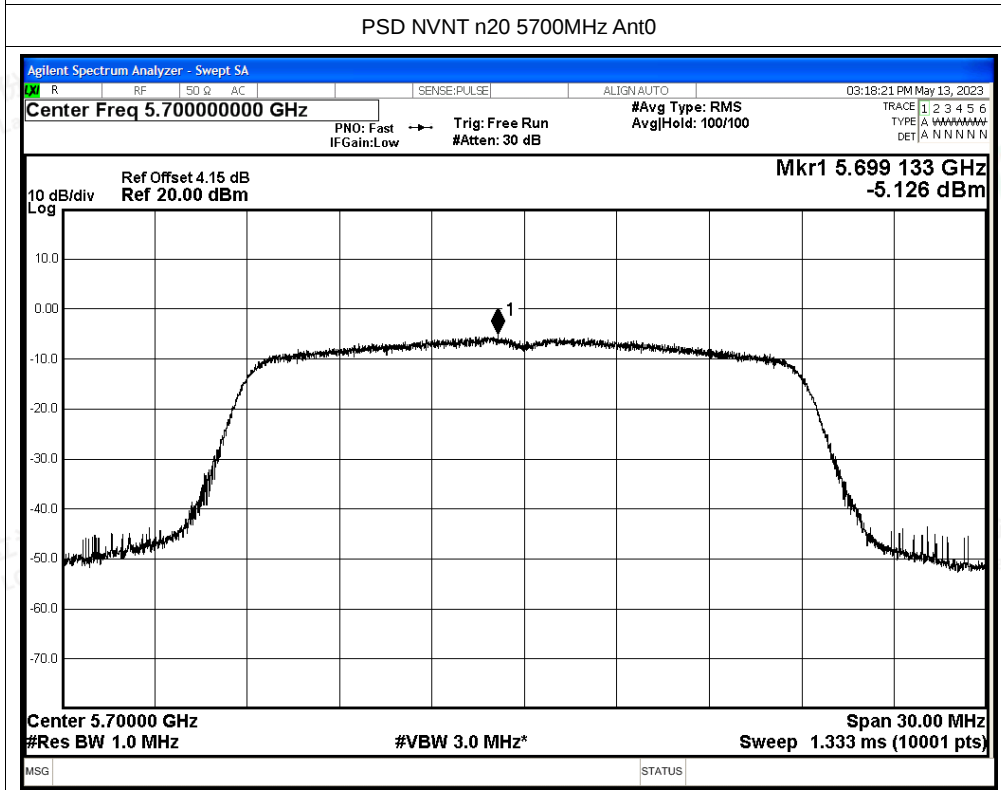
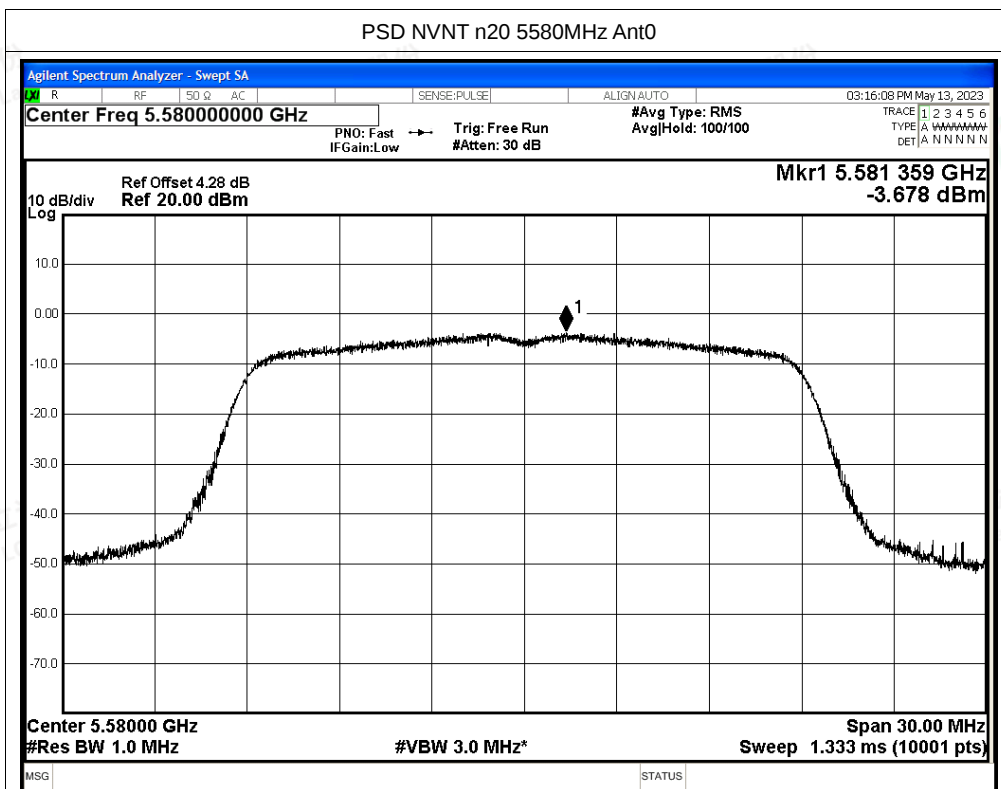


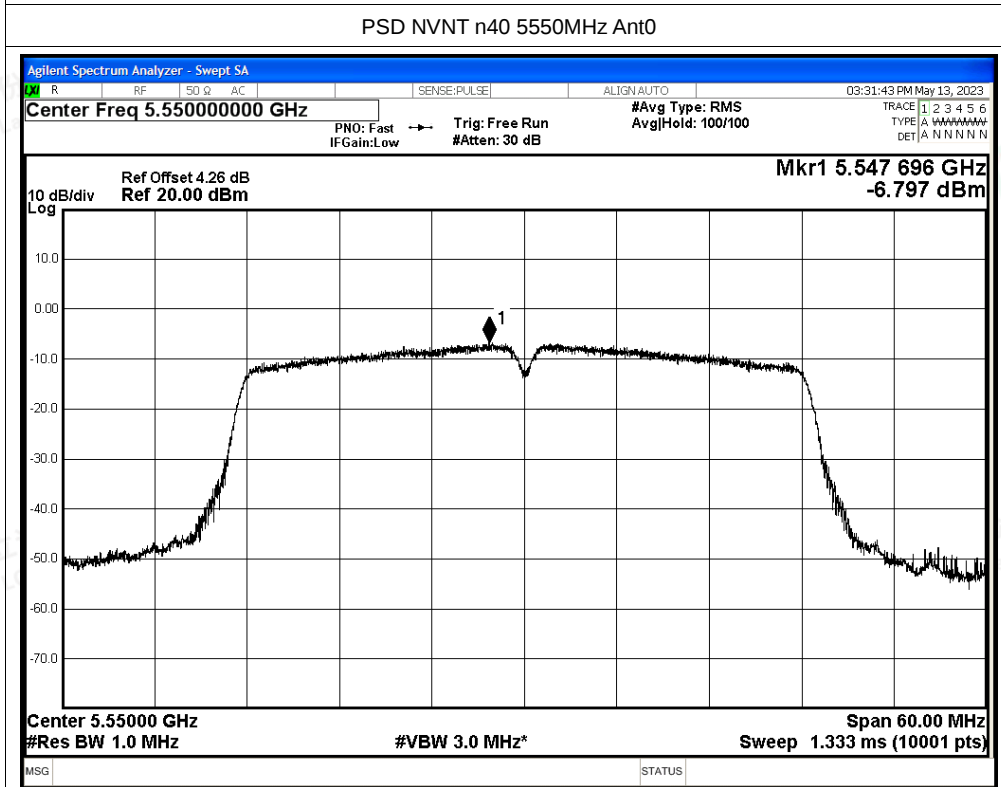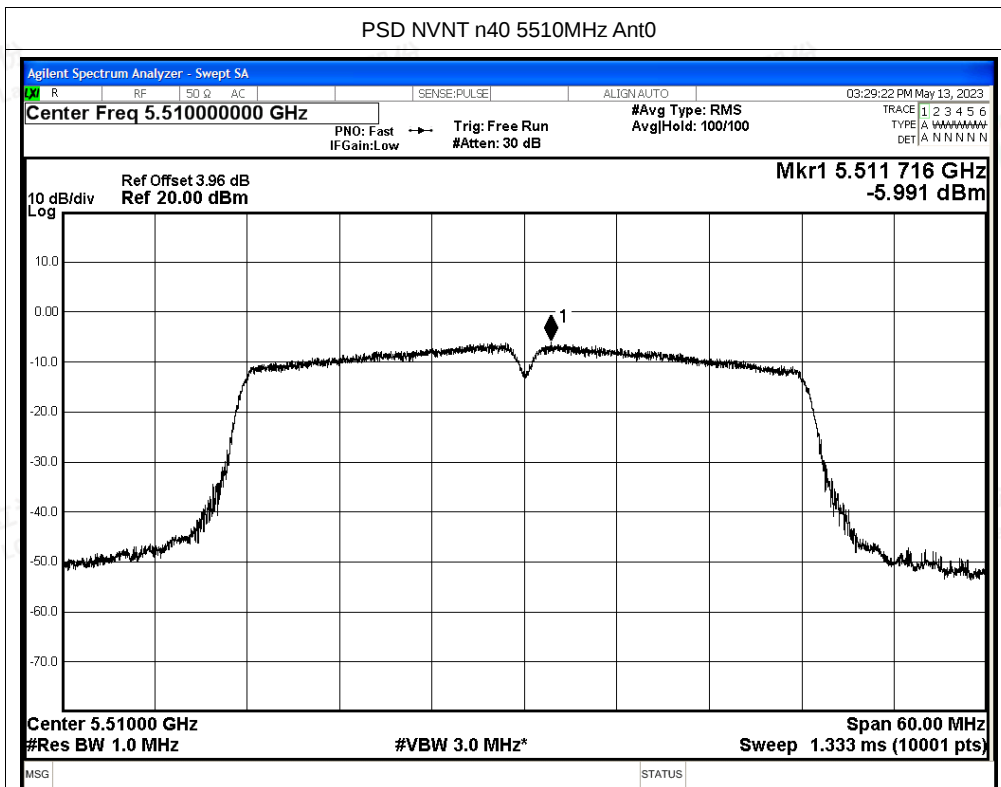


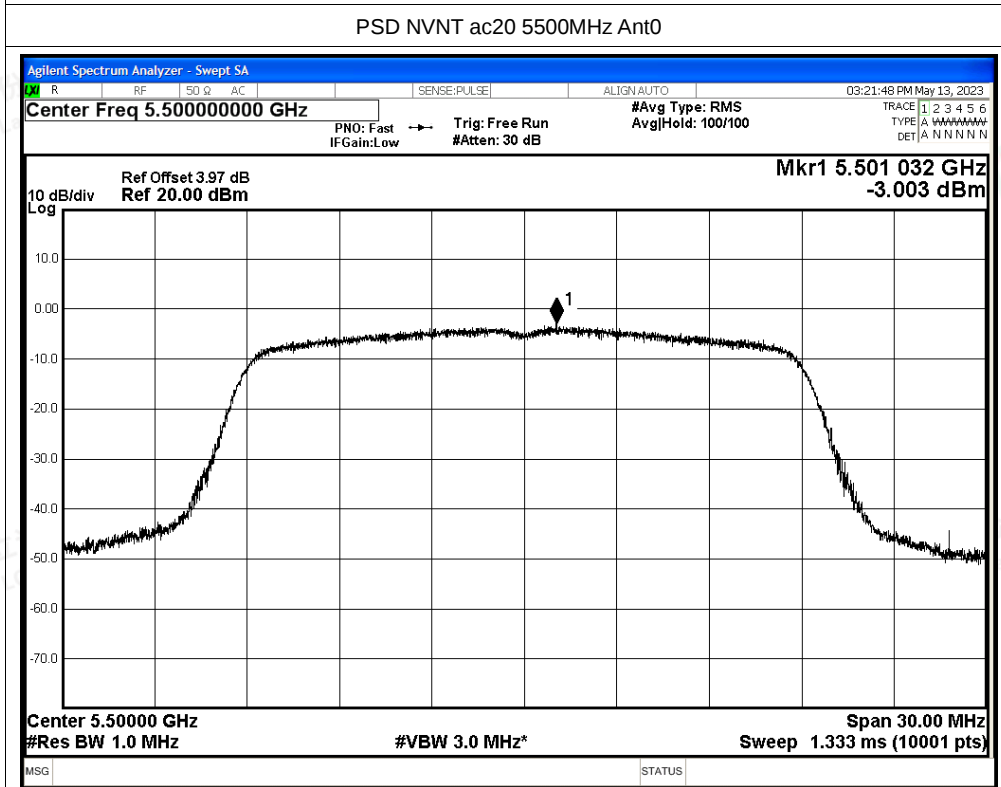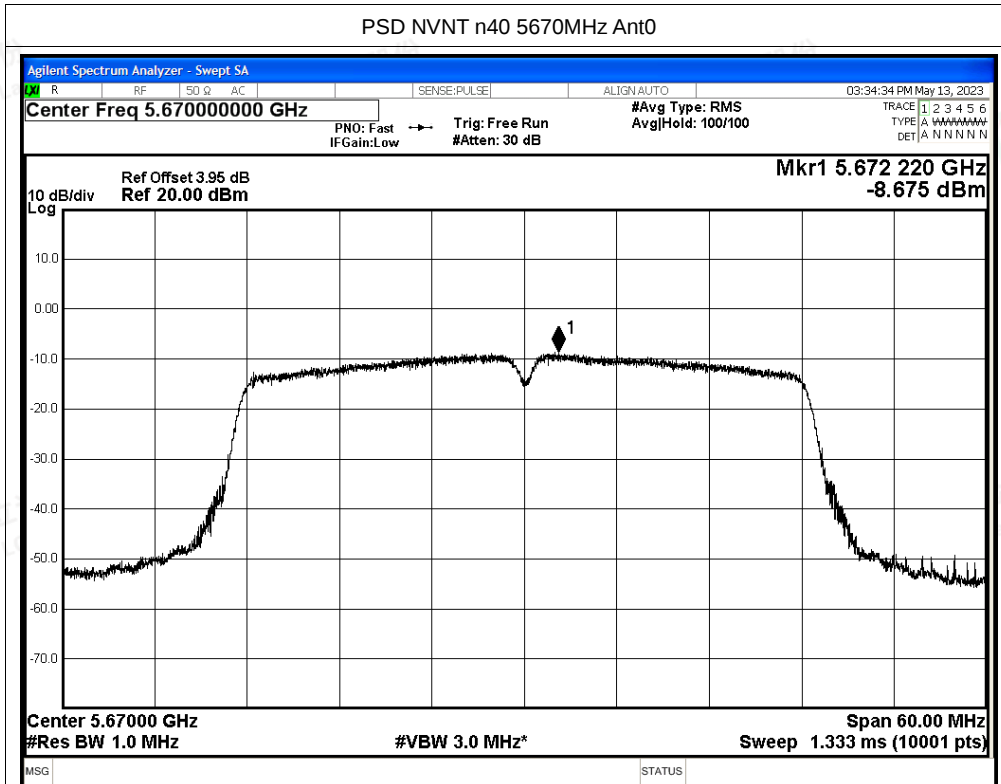

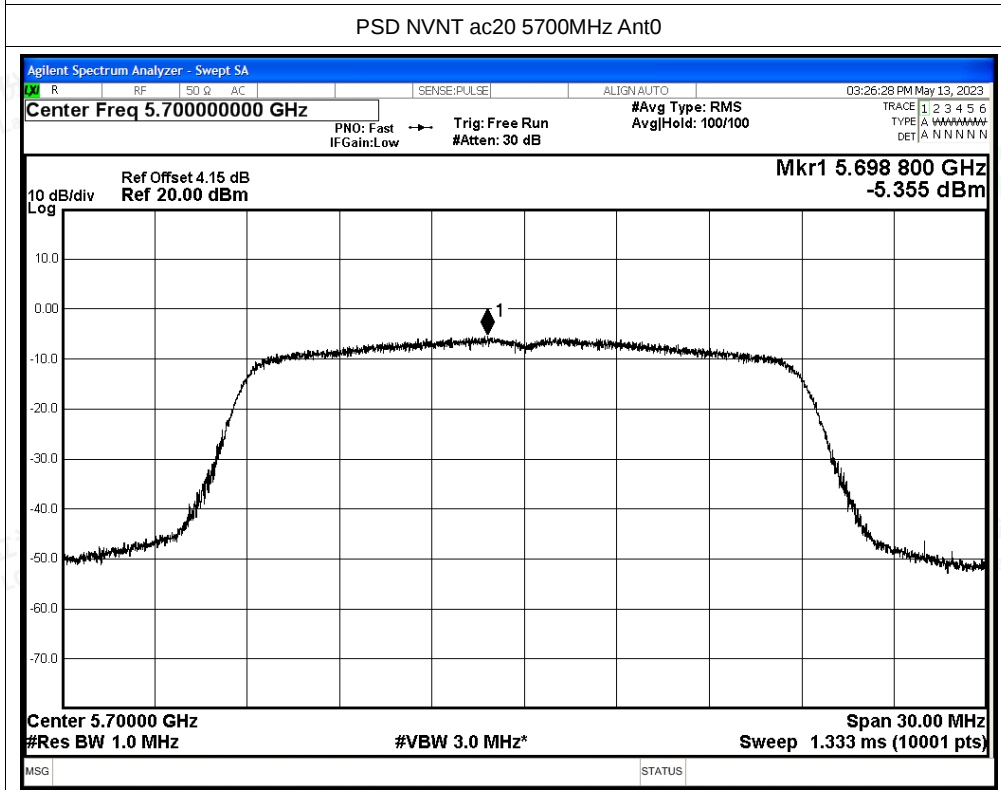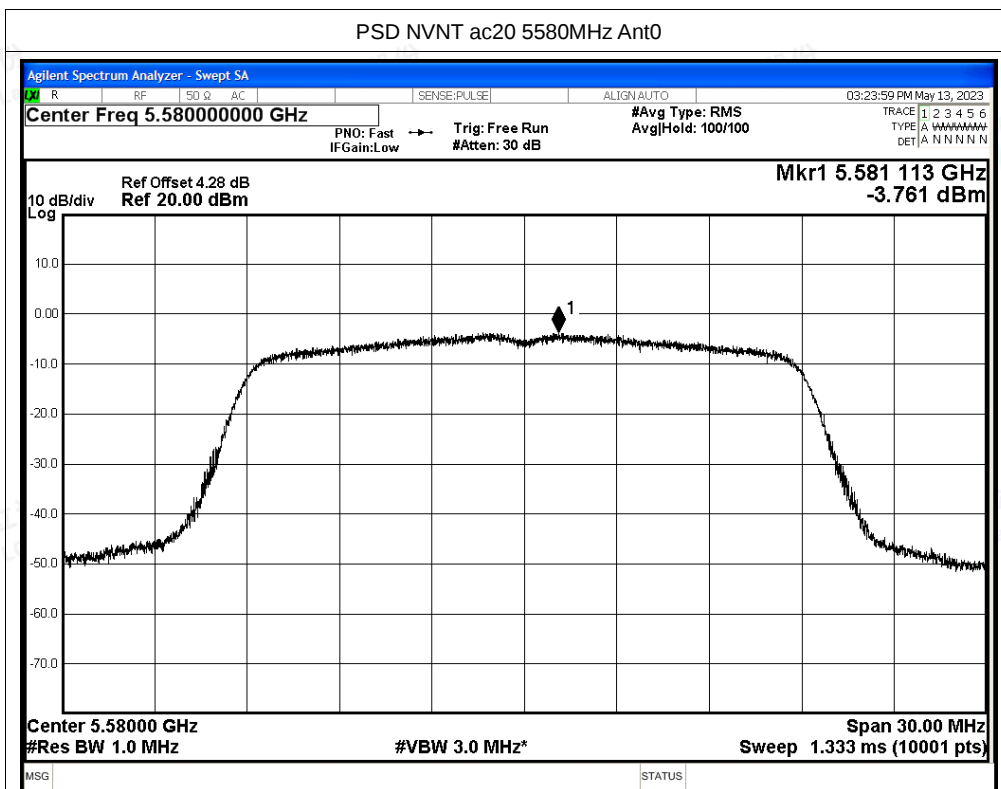

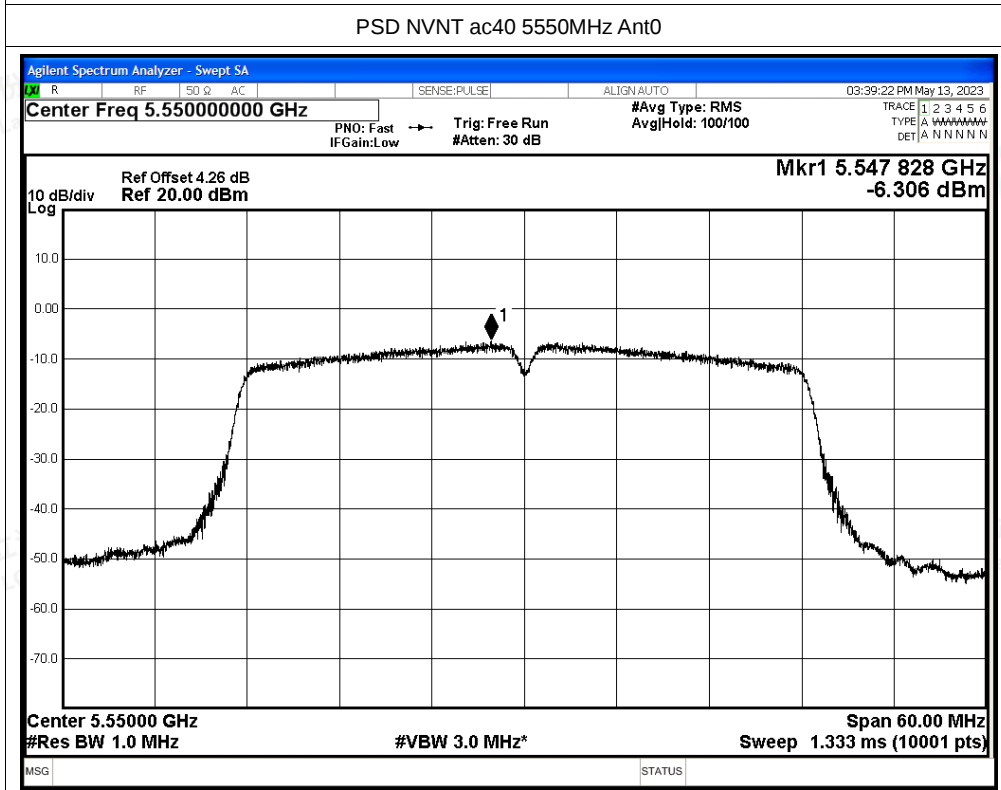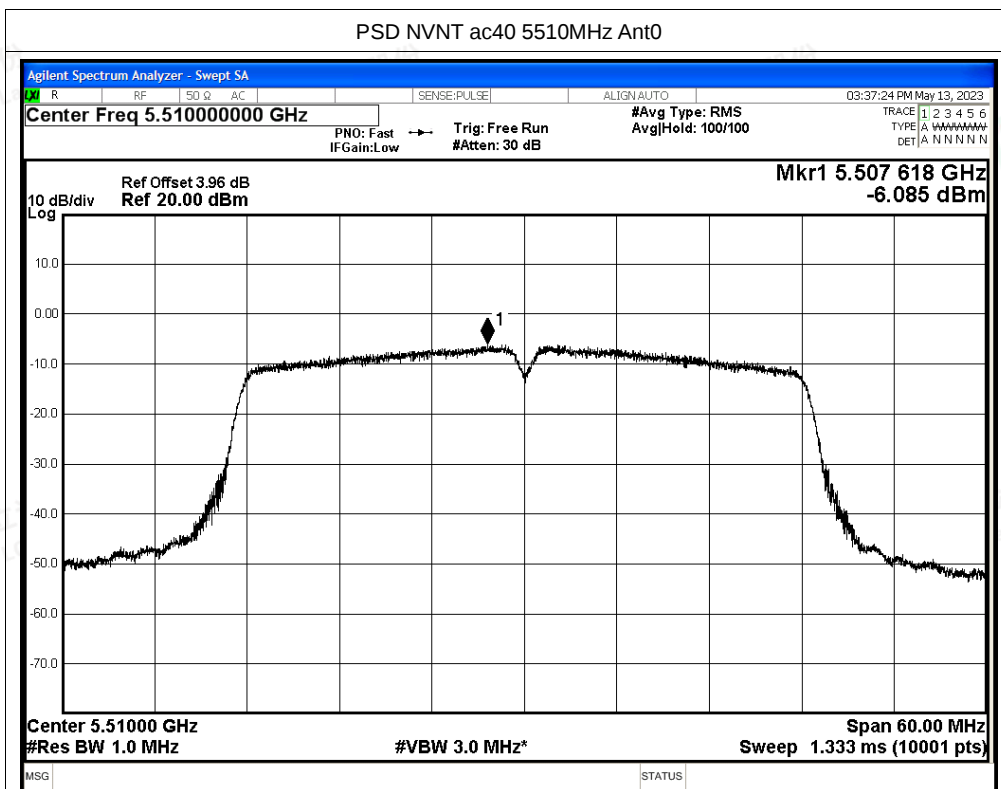

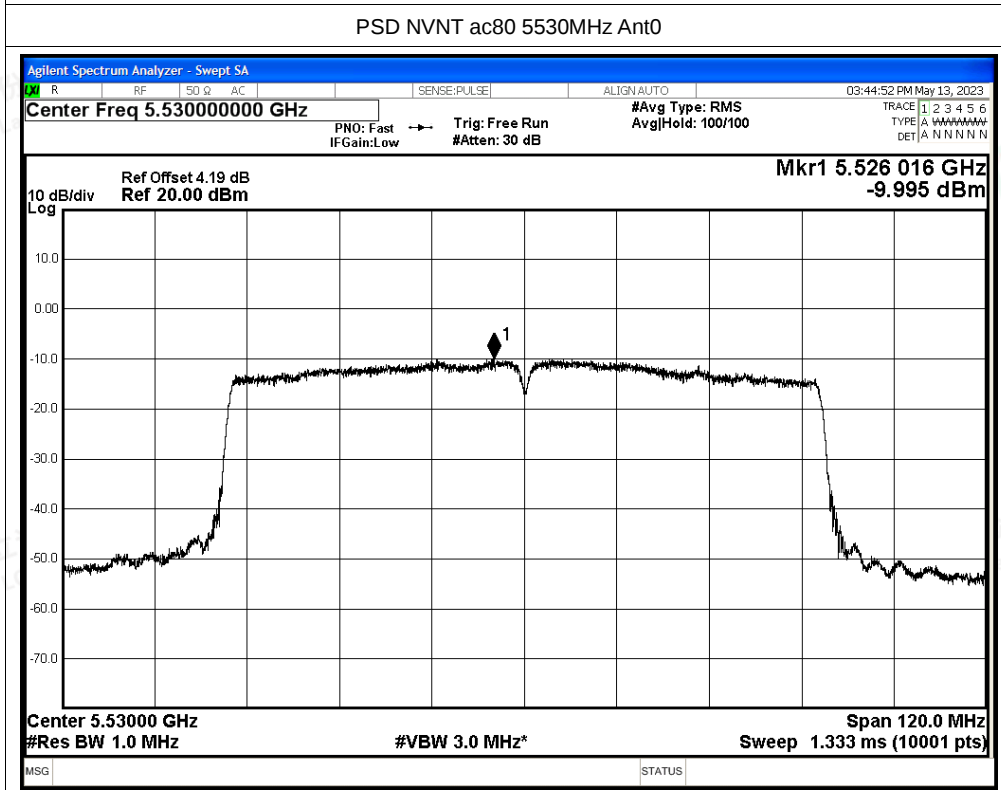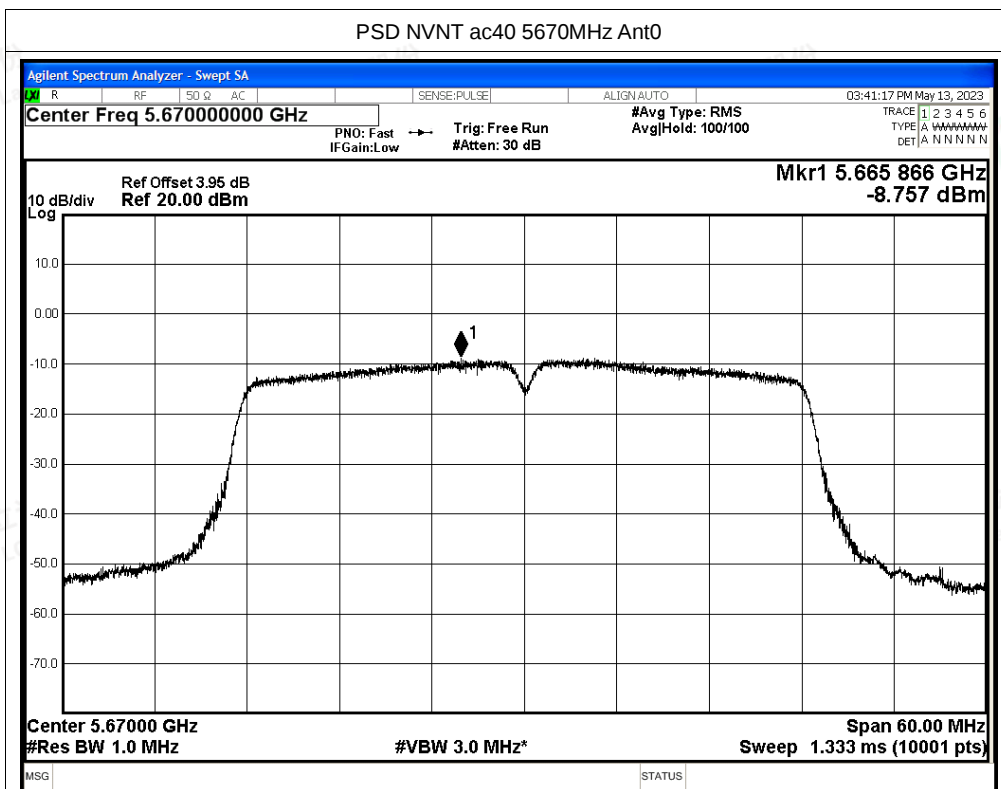


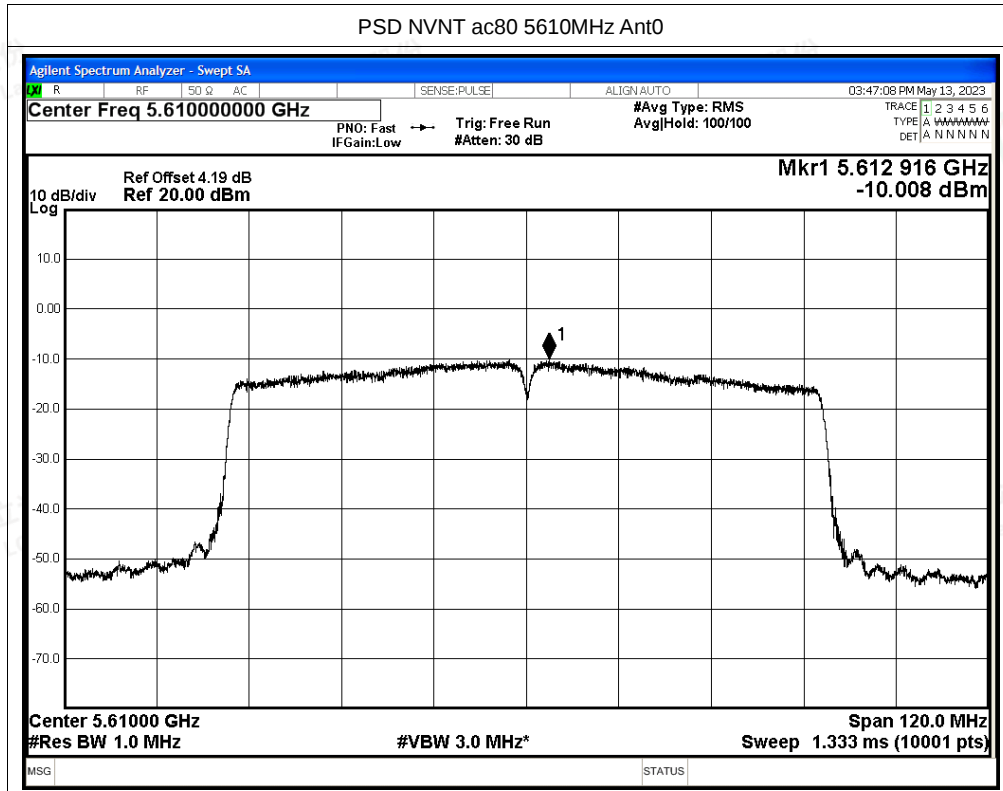






Test Graphs



PSD NVNT a 5500MHz Ant1


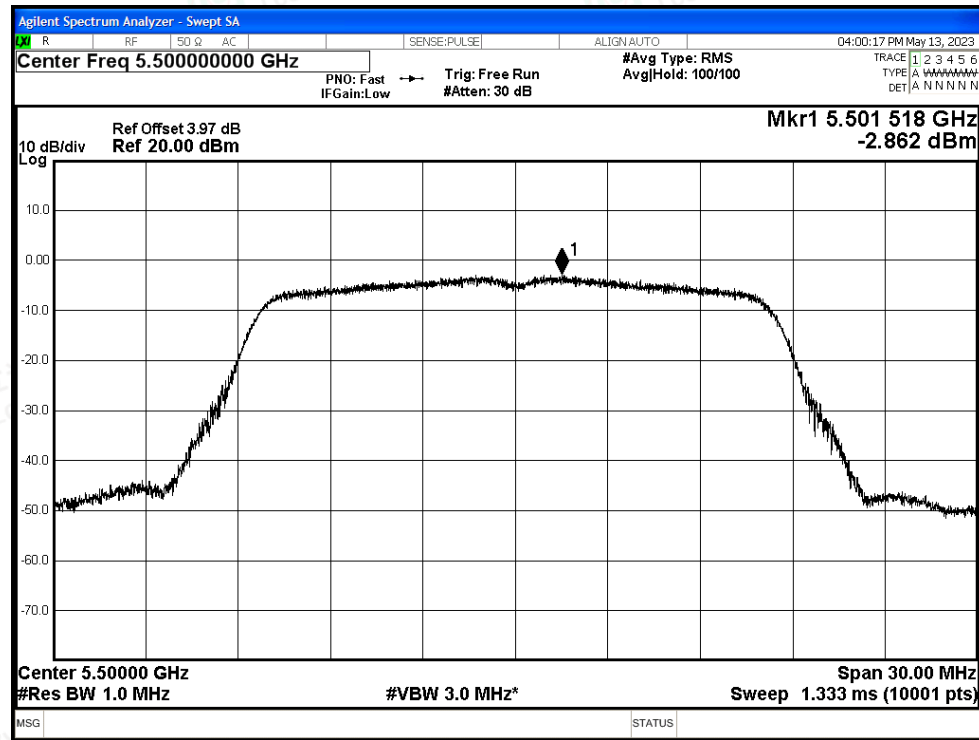




PSD NVNT a 5580MHz Ant1


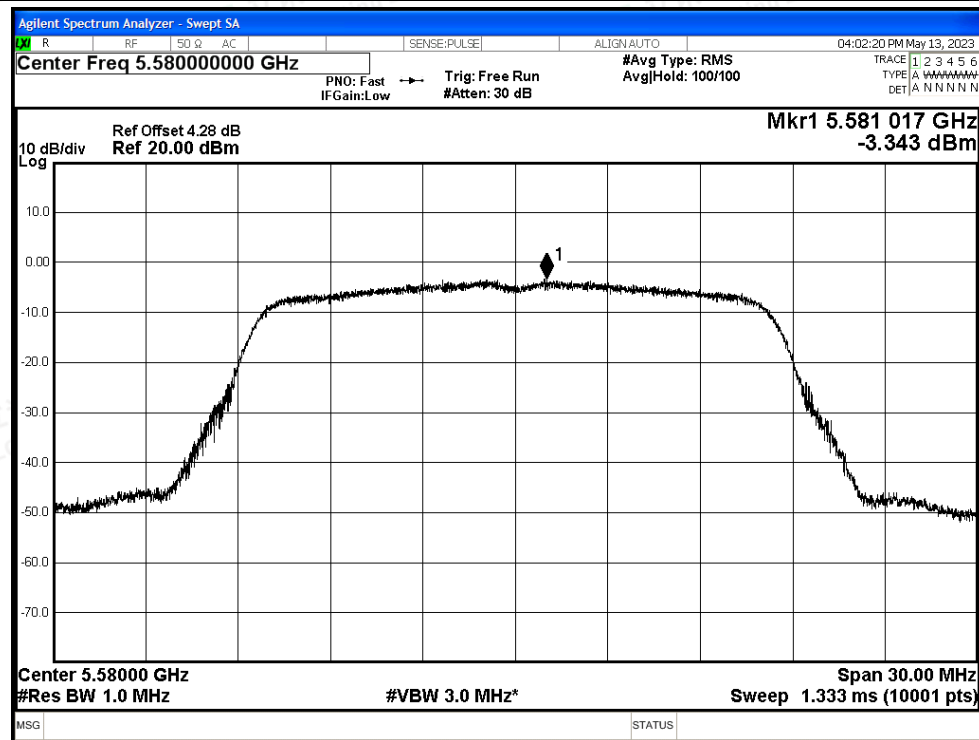


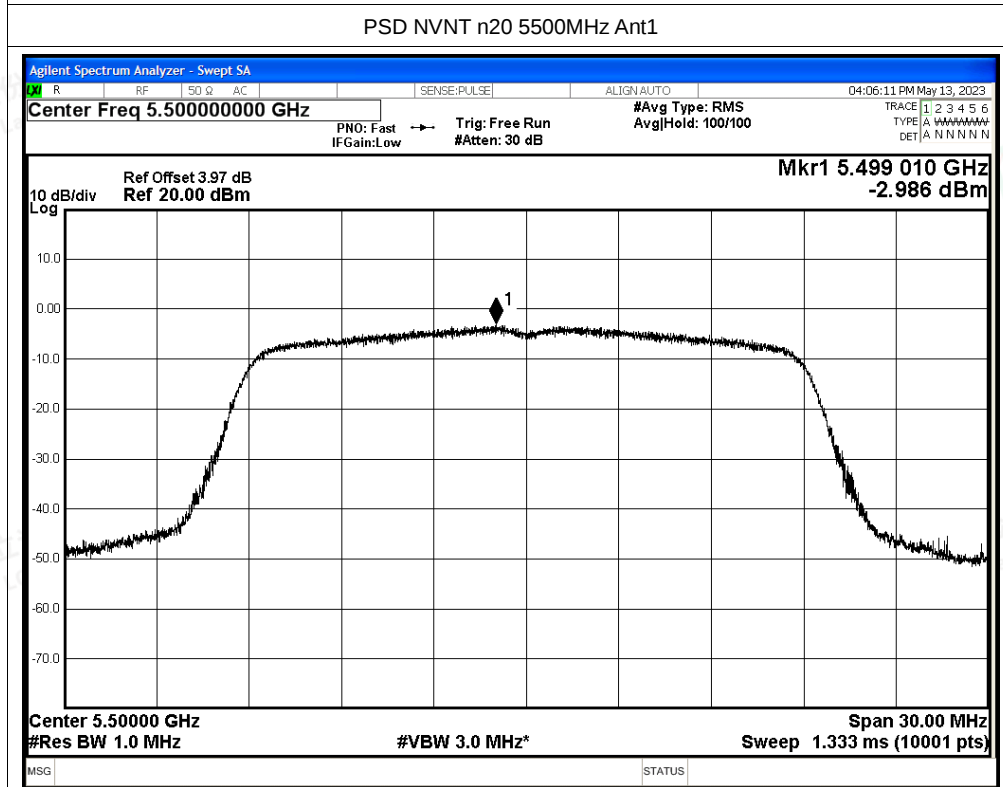
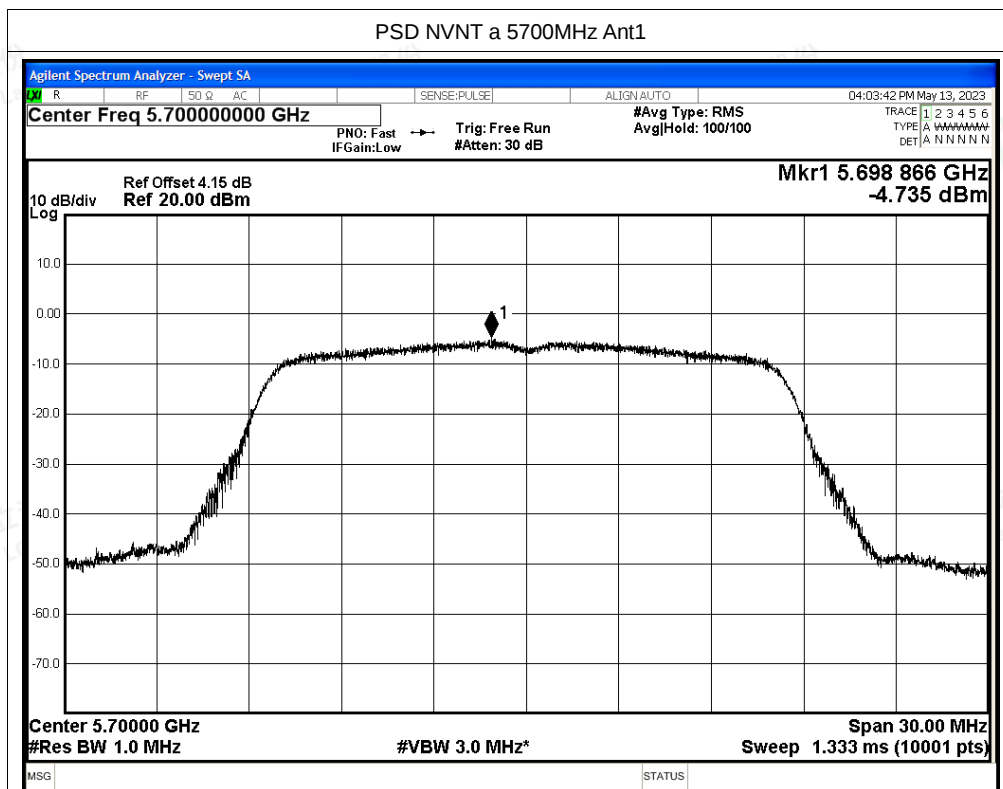


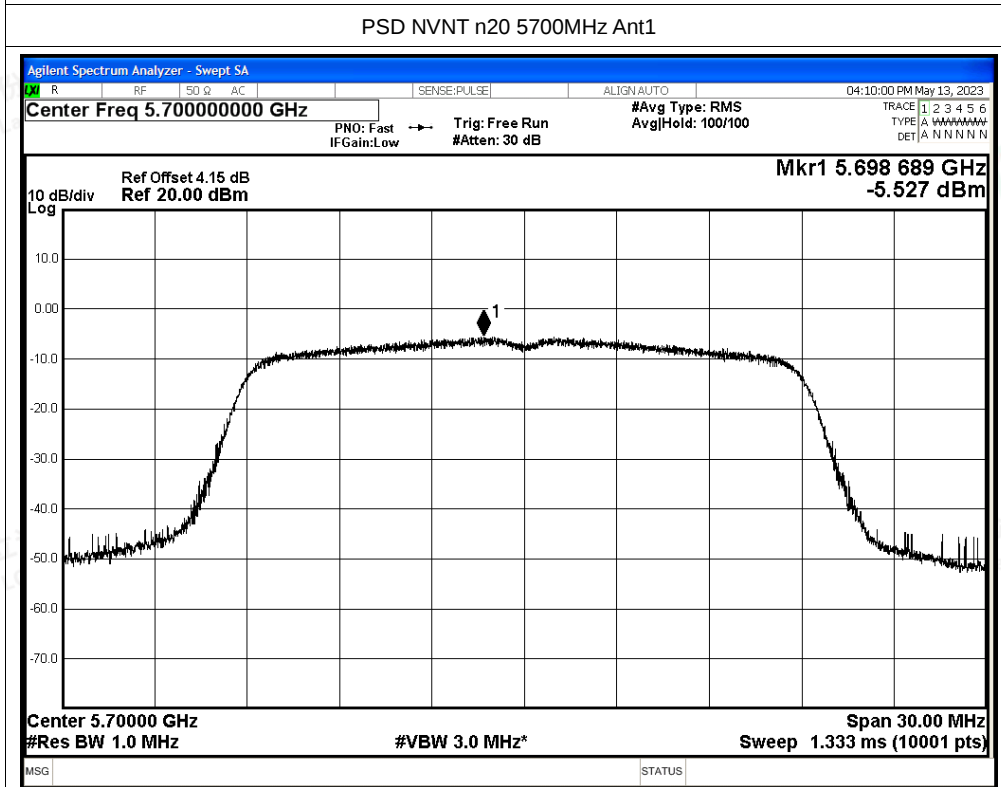
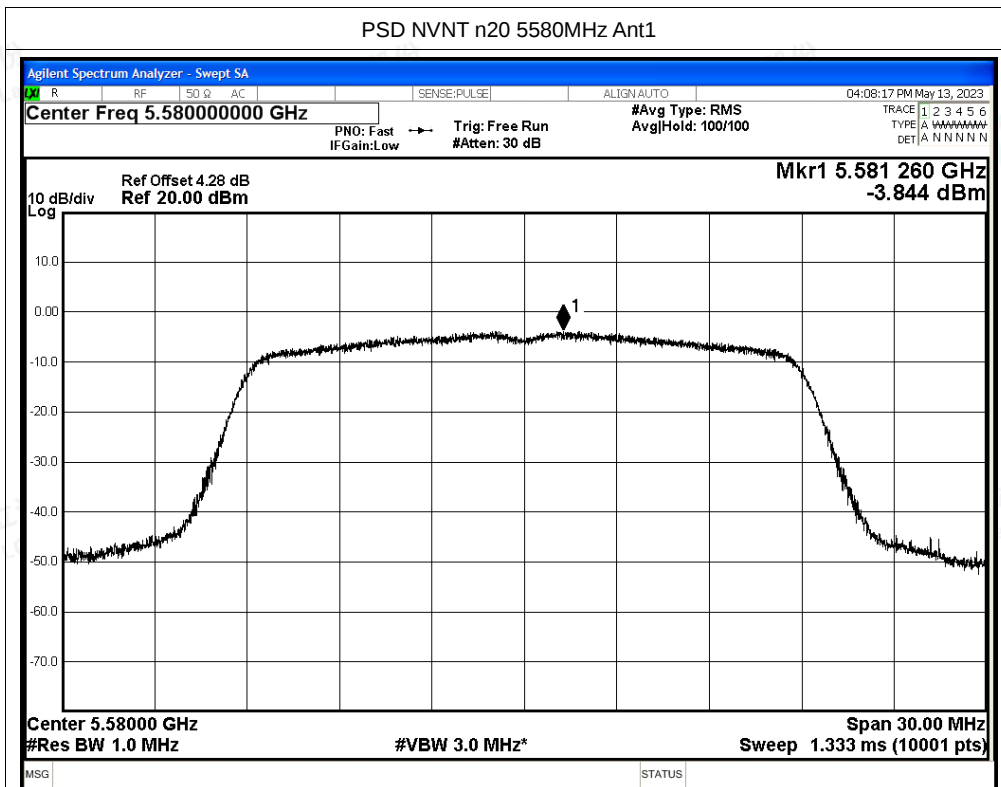


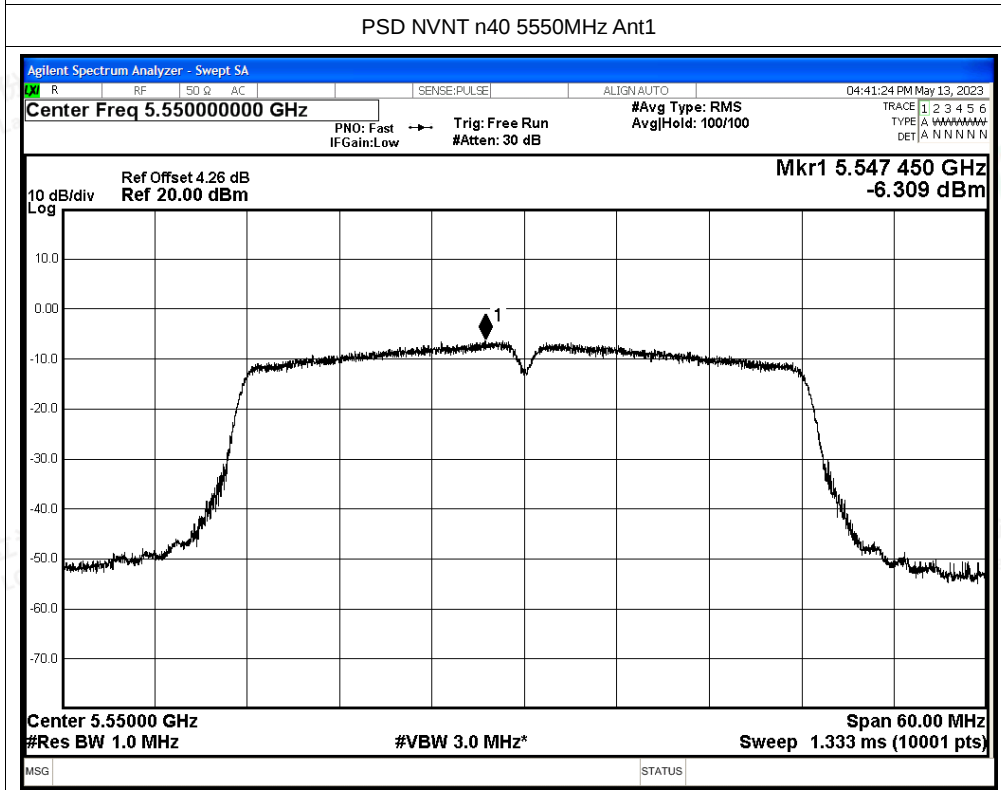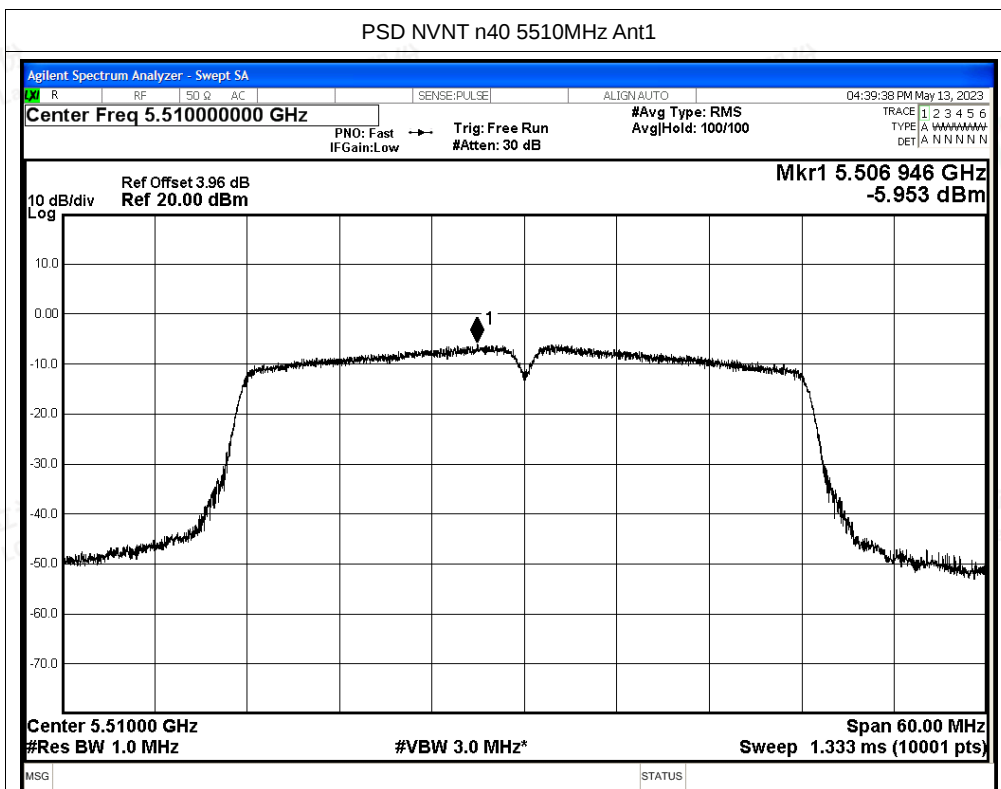


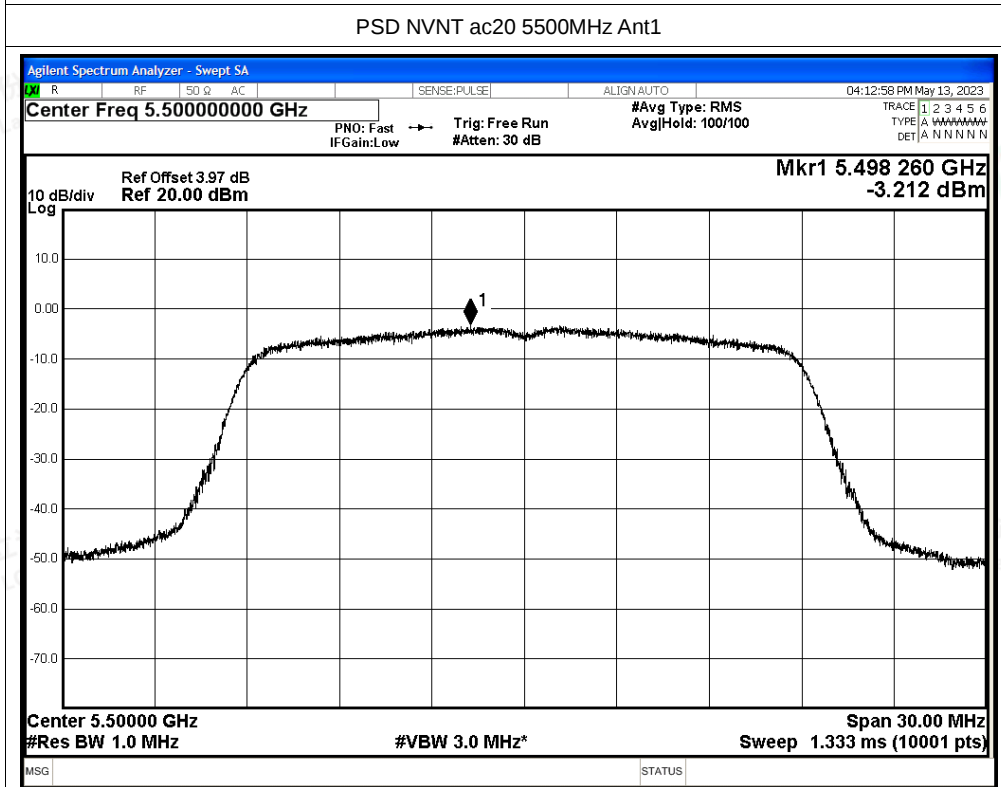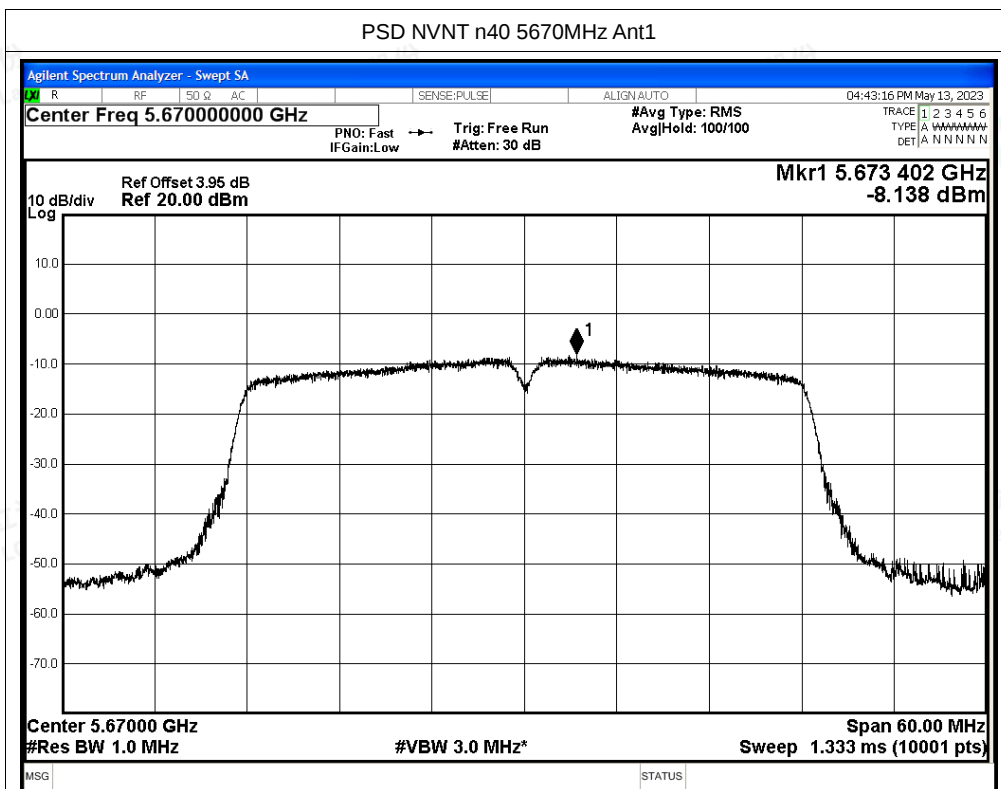

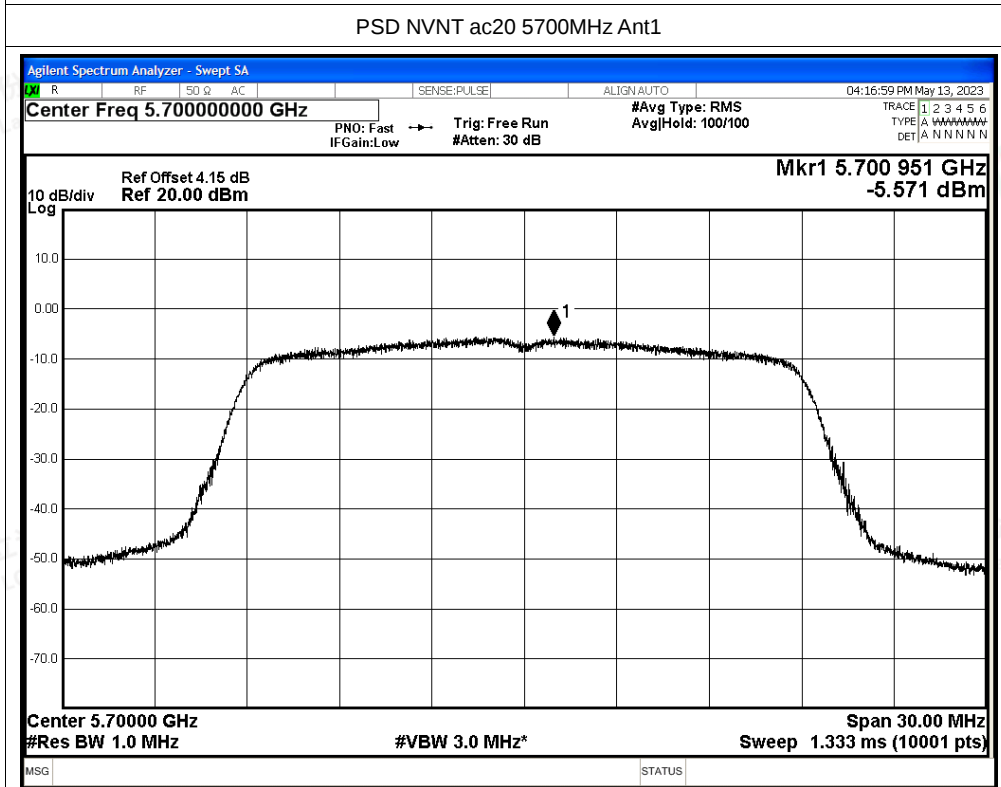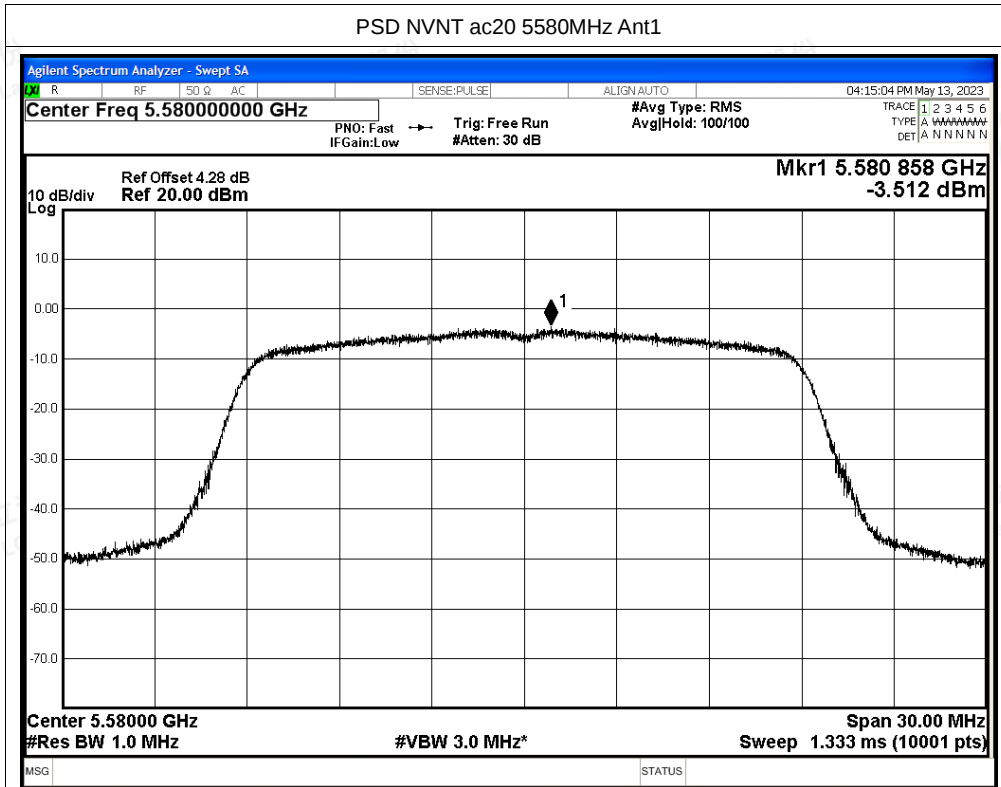

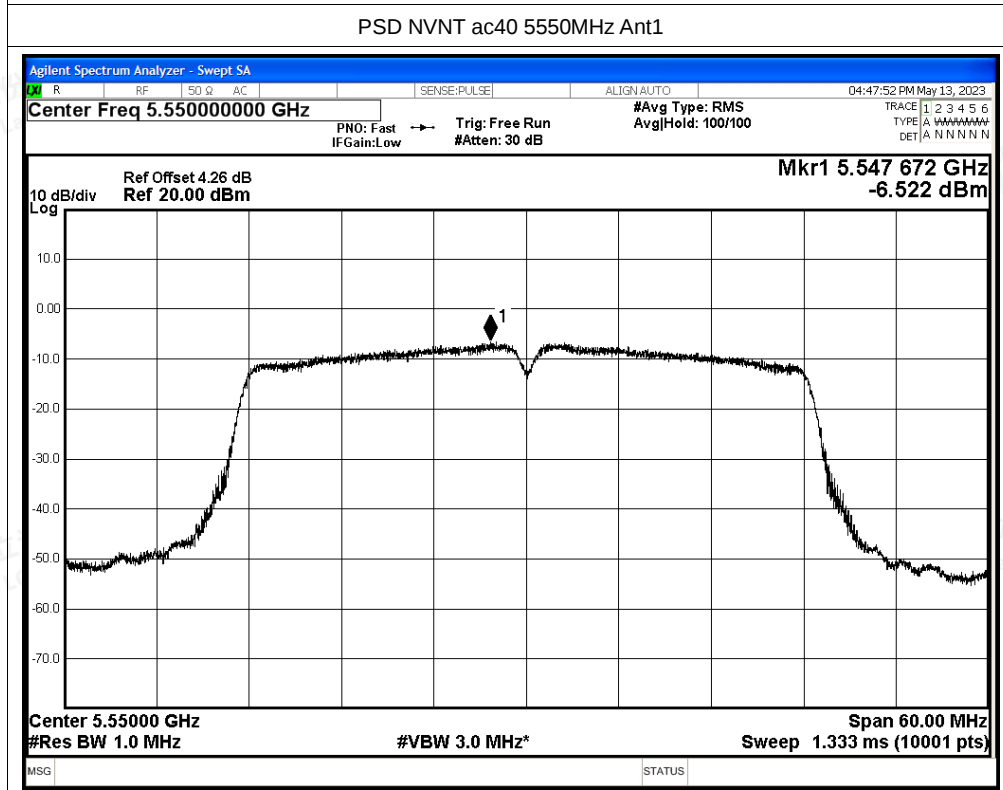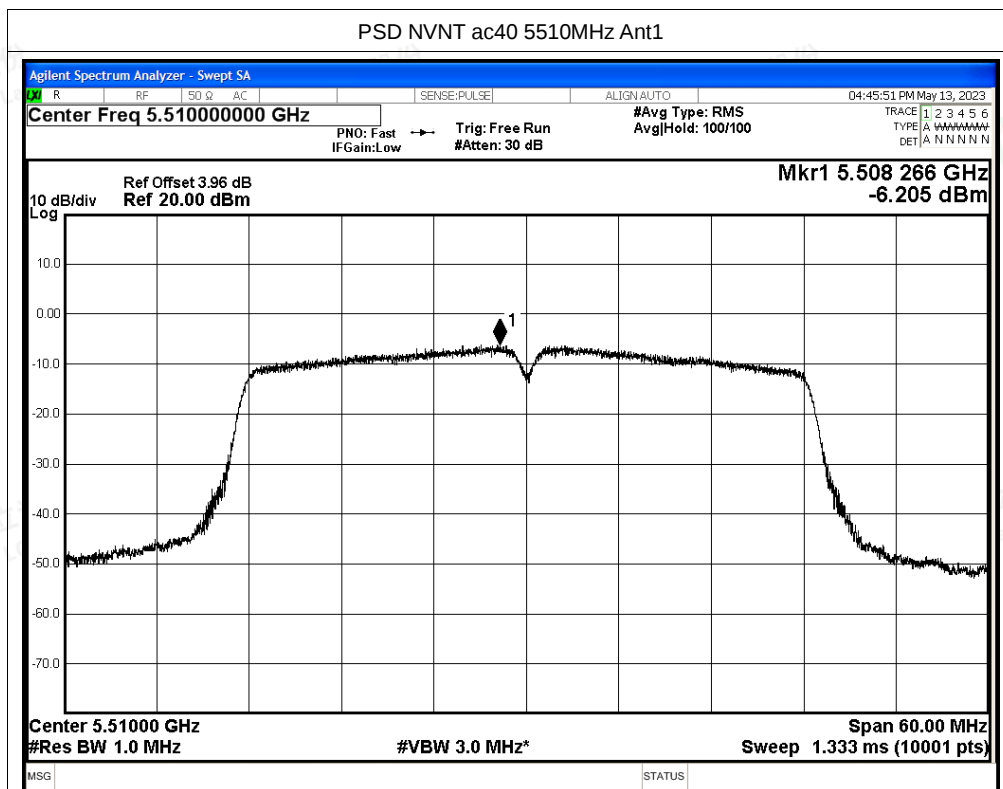

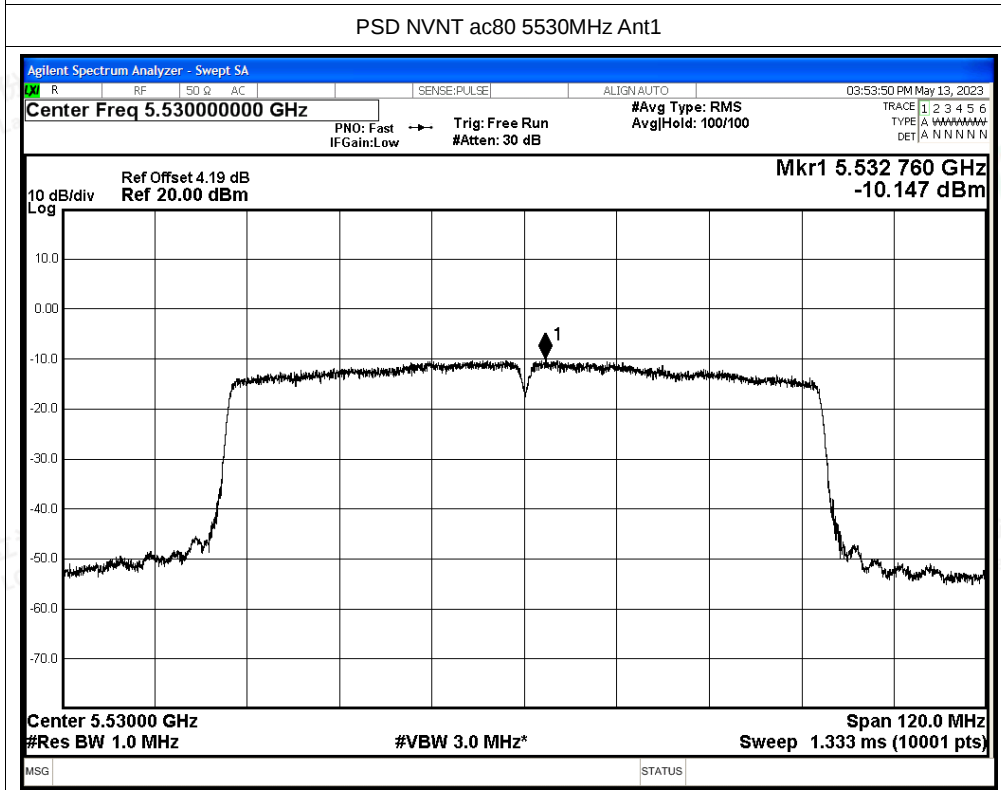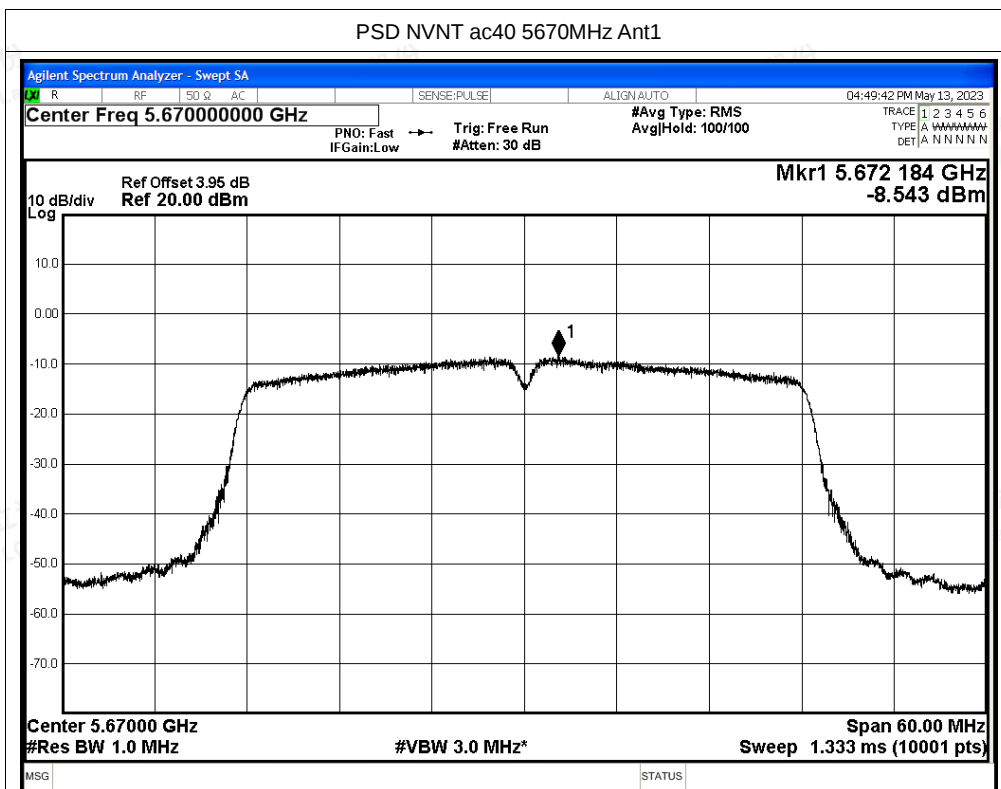

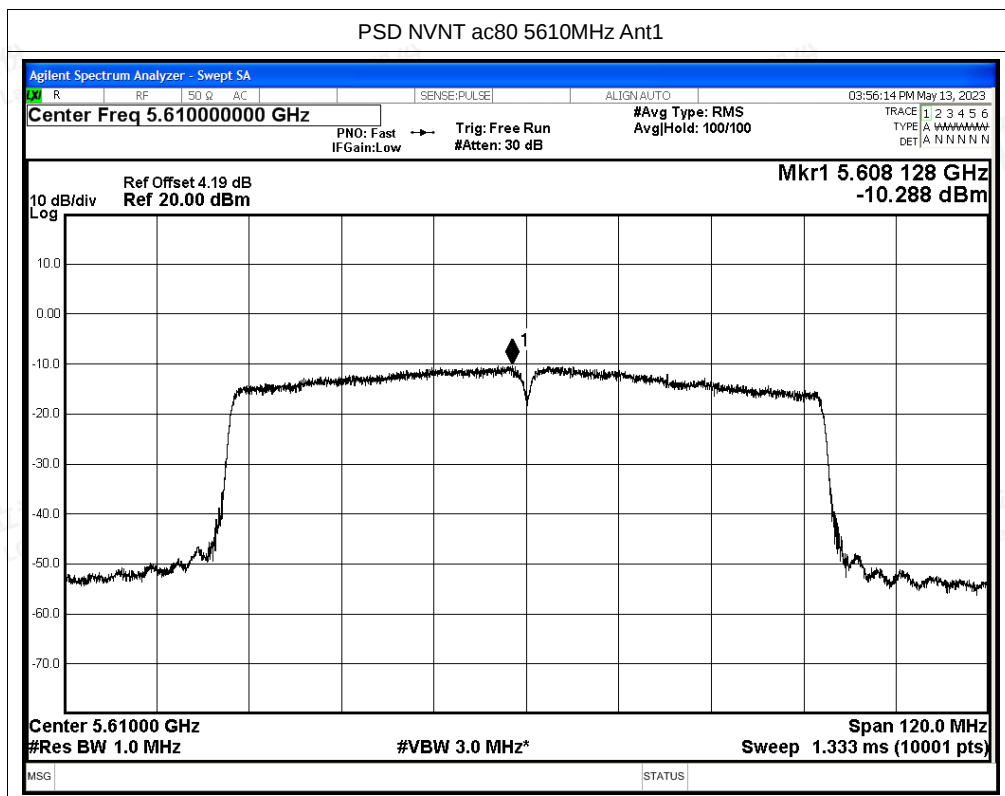



F.4 Restrict Band

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5500	5460	-48.51	3.2	49.92	Peak	68.2	Pass
NVNT	a	5500	5460	-54.83	3.2	43.60	Average	54	Pass
NVNT	a	5500	5469.4	-45.71	3.2	52.72	Peak	68.2	Pass
NVNT	a	5500	5470	-54.38	3.2	44.05	Average	54	Pass
NVNT	a	5500	5470	-47.94	3.2	50.49	Peak	68.2	Pass
NVNT	a	5700	5725	-46.56	3.2	51.87	Peak	68.2	Pass
NVNT	a	5700	5725	-54.32	3.2	44.11	Average	54	Pass
NVNT	a	5700	5729.4	-45.16	3.2	53.27	Peak	68.2	Pass
NVNT	a	5700	5725.8	-54.26	3.2	44.17	Average	54	Pass
NVNT	a	5700	5735	-48.14	3.2	50.29	Peak	68.2	Pass
NVNT	a	5700	5735	-55.1	3.2	43.33	Average	54	Pass
NVNT	n20mimo	5500	5460	-47.08	6.21	54.36	Peak	68.2	Pass
NVNT	n20mimo	5500	5460	-54.82	6.21	46.62	Average	54	Pass
NVNT	n20mimo	5500	5468.6	-39.13	6.21	62.31	Peak	68.2	Pass
NVNT	n20mimo	5500	5469.6	-54.22	6.21	47.22	Average	54	Pass
NVNT	n20mimo	5500	5470	-44.07	6.21	57.37	Peak	68.2	Pass
NVNT	n20mimo	5500	5470	-54.3	6.21	47.14	Average	54	Pass
NVNT	n20mimo	5700	5725	-48.54	6.21	52.90	Peak	68.2	Pass
NVNT	n20mimo	5700	5725	-54.1	6.21	47.34	Average	54	Pass
NVNT	n20mimo	5700	5725.8	-39.51	6.21	61.93	Peak	68.2	Pass
NVNT	n20mimo	5700	5725.4	-53.79	6.21	47.65	Average	54	Pass
NVNT	n20mimo	5700	5735	-47.55	6.21	53.89	Peak	68.2	Pass
NVNT	n20mimo	5700	5735	-55.13	6.21	46.31	Average	54	Pass
NVNT	n40mimo	5510	5460	-46.83	6.21	54.61	Peak	68.2	Pass
NVNT	n40mimo	5510	5460	-54.26	6.21	47.18	Average	54	Pass
NVNT	n40mimo	5510	5467	-36.66	6.21	64.78	Peak	68.2	Pass
NVNT	n40mimo	5510	5469.8	-51.67	6.21	49.77	Average	54	Pass
NVNT	n40mimo	5510	5470	-46.07	6.21	55.37	Peak	68.2	Pass
NVNT	n40mimo	5510	5470	-51.96	6.21	49.48	Average	54	Pass
NVNT	n40mimo	5670	5725	-48.48	6.21	52.96	Peak	68.2	Pass
NVNT	n40mimo	5670	5725	-54.99	6.21	46.45	Average	54	Pass
NVNT	n40mimo	5670	5725.2	-41.15	6.21	60.29	Peak	68.2	Pass
NVNT	n40mimo	5670	5727.8	-54.96	6.21	46.48	Average	54	Pass
NVNT	n40mimo	5670	5735	-47.89	6.21	53.55	Peak	68.2	Pass
NVNT	n40mimo	5670	5735	-55.44	6.21	46.00	Average	54	Pass
NVNT	ac20mimo	5500	5460	-48.1	6.21	53.34	Peak	68.2	Pass
NVNT	ac20mimo	5500	5460	-54.76	6.21	46.68	Average	54	Pass
NVNT	ac20mimo	5500	5469.8	-45.04	6.21	56.40	Peak	68.2	Pass
NVNT	ac20mimo	5500	5469.6	-54.28	6.21	47.16	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




NVNT	ac20mimo	5500	5470	-46.41	6.21	55.03	Peak	68.2	Pass
NVNT	ac20mimo	5500	5470	-54.37	6.21	47.07	Average	54	Pass
NVNT	ac20mimo	5700	5725	-48.09	6.21	53.35	Peak	68.2	Pass
NVNT	ac20mimo	5700	5725	-54.09	6.21	47.35	Average	54	Pass
NVNT	ac20mimo	5700	5727.2	-45.2	6.21	56.24	Peak	68.2	Pass
NVNT	ac20mimo	5700	5735	-47.4	6.21	54.04	Peak	68.2	Pass
NVNT	ac20mimo	5700	5735	-55.11	6.21	46.33	Average	54	Pass
NVNT	ac40mimo	5510	5460	-48.93	6.21	52.51	Peak	68.2	Pass
NVNT	ac40mimo	5510	5460	-54.42	6.21	47.02	Average	54	Pass
NVNT	ac40mimo	5510	5466.8	-44.79	6.21	56.65	Peak	68.2	Pass
NVNT	ac40mimo	5510	5470	-52.64	6.21	48.80	Average	54	Pass
NVNT	ac40mimo	5510	5470	-45.39	6.21	56.05	Peak	68.2	Pass
NVNT	ac40mimo	5670	5725	-49.17	6.21	52.27	Peak	68.2	Pass
NVNT	ac40mimo	5670	5725	-55.3	6.21	46.14	Average	54	Pass
NVNT	ac40mimo	5670	5725.4	-46.78	6.21	54.66	Peak	68.2	Pass
NVNT	ac40mimo	5670	5730	-55.07	6.21	46.37	Average	54	Pass
NVNT	ac40mimo	5670	5735	-48.9	6.21	52.54	Peak	68.2	Pass
NVNT	ac40mimo	5670	5735	-55.52	6.21	45.92	Average	54	Pass
NVNT	ac80mimo	5530	5725	-49.3	6.21	52.14	Peak	68.2	Pass
NVNT	ac80mimo	5530	5725	-55.73	6.21	45.71	Average	54	Pass
NVNT	ac80mimo	5530	5728.16	-45.99	6.21	55.45	Peak	68.2	Pass
NVNT	ac80mimo	5530	5728.445	-55.36	6.21	46.08	Average	54	Pass
NVNT	ac80mimo	5530	5735	-50.49	6.21	50.95	Peak	68.2	Pass
NVNT	ac80mimo	5530	5735	-55.84	6.21	45.60	Average	54	Pass
NVNT	ac80mimo	5530	5460	-47.62	6.21	53.82	Peak	68.2	Pass
NVNT	ac80mimo	5530	5460	-52.16	6.21	49.28	Average	54	Pass
NVNT	ac80mimo	5530	5469.4	-43.03	6.21	58.41	Peak	68.2	Pass
NVNT	ac80mimo	5530	5469.6	-49.76	6.21	51.68	Average	54	Pass
NVNT	ac80mimo	5530	5470	-43.36	6.21	58.08	Peak	68.2	Pass
NVNT	ac80mimo	5530	5470	-49.94	6.21	51.50	Average	54	Pass
NVNT	ac80mimo	5610	5725	-48.56	6.21	52.88	Peak	68.2	Pass
NVNT	ac80mimo	5610	5725	-54.68	6.21	46.76	Average	54	Pass
NVNT	ac80mimo	5610	5729.055	-46.59	6.21	54.85	Peak	68.2	Pass
NVNT	ac80mimo	5610	5725.16	-54.51	6.21	46.93	Average	54	Pass
NVNT	ac80mimo	5610	5735	-47.61	6.21	53.83	Peak	68.2	Pass
NVNT	ac80mimo	5610	5735	-55.25	6.21	46.19	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5500MHz Peak

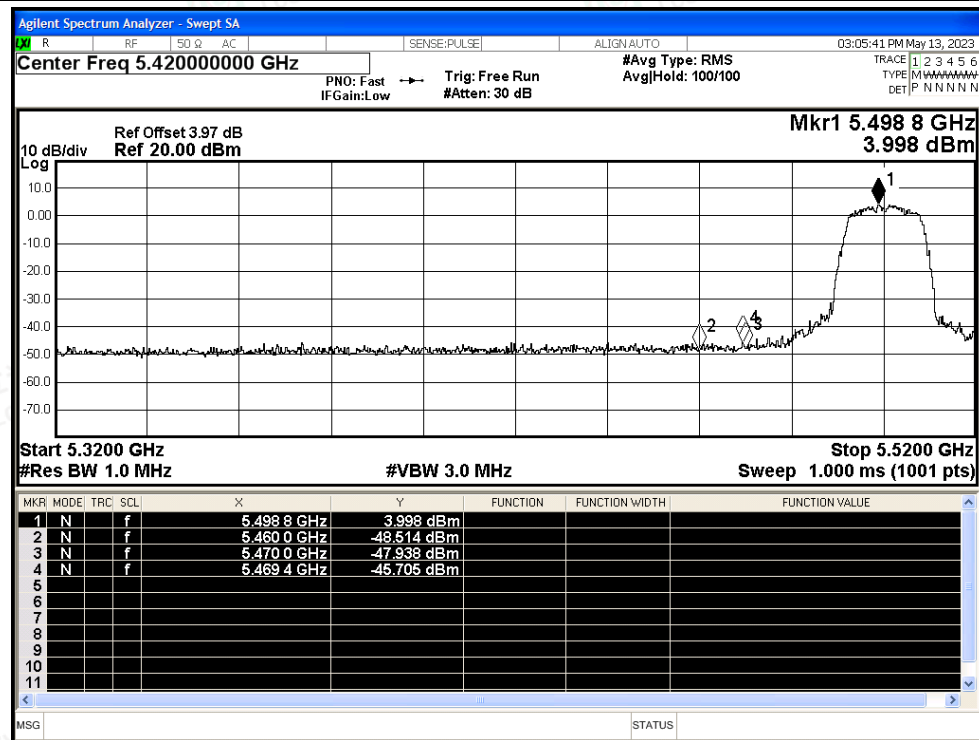

Restrict Band NVNT a 5500MHz Average

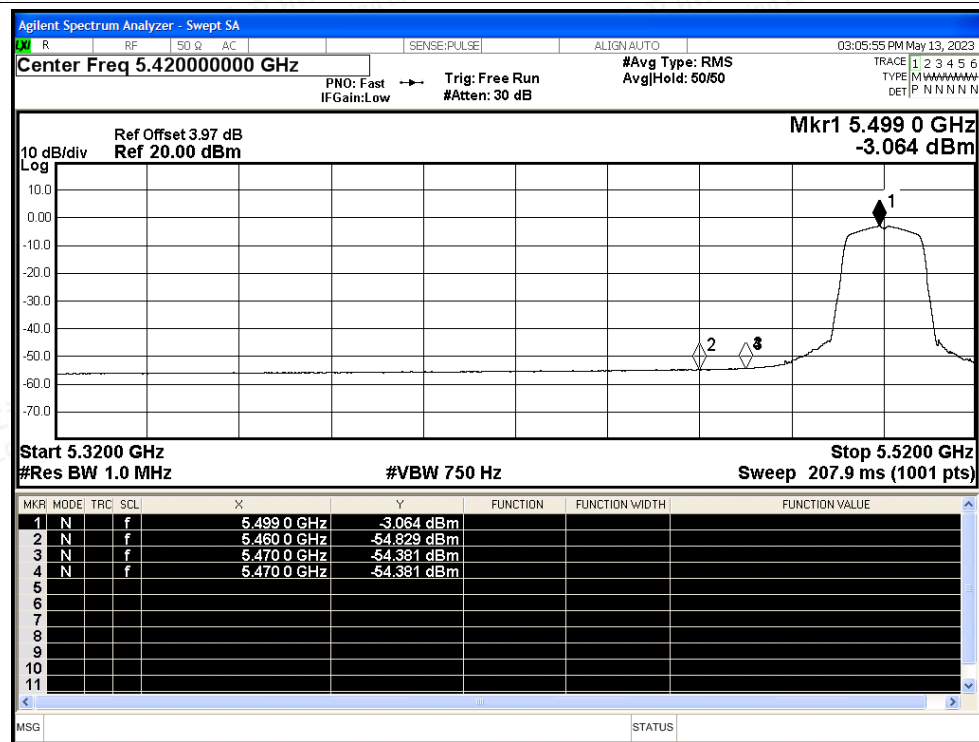

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

