



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

---

## **FCC PART 15.231 TEST REPORT**

### **LOW POWER UNLICENSED TRANSMITTER**

<b>Applicant</b>	LIGHTWAVE TECHNOLOGY
<b>Address</b>	400 WRIGHT STREET ST-LAURENT QUEBEC CANADA
<b>FCC ID</b>	2ABSL3201
<b>Product Description</b>	TRANSMITTER
<b>Date Sample Received</b>	2/7/2014
<b>Date Tested</b>	2/19/14
<b>Report Issue Date</b>	2/24/14
<b>Tested By</b>	Cory Leverett
<b>Approved By</b>	Cory Leverett
<b>Timco Report No.</b>	191AUT14TestReportRev2
<b>Test Results</b>	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

<p><b>THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.</b></p>
--

## Table of Contents

GENERAL REMARKS.....	3
REPORT SUMMARY .....	4
TEST ENVIRONMENT.....	4
TEST SETUP.....	4
DUT SPECIFICATION .....	5
MANUFACTURE DECLARATION OF COMPLIANCE .....	6
TEST EQUIPMENT LIST .....	7
TEST PROCEDURES .....	8
EUT Pictures .....	9
EUT Setup Photo's.....	10
RADIATION INTERFERENCE.....	11
CALCULATION OF DUTY CYCLE.....	13
Total Duration of Pulse Train .....	14
Duration of Short Pulse.....	15
Duration of Long Pulse .....	16
OCCUPIED BANDWIDTH.....	17
20dB Bandwidth Plot .....	17
Transmitter 5 second deactivation.....	18

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report  
☐ not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669

### Authorized Signatory Name:

Cory Leverett  
**Project Manager**

**Date:** 2/24/2014



## REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.231, Pt 15.209, Pt 15.207, ANSI C63.4: 2003
Related Report(s) or Approval(s)	190AUT14TestReport, 192AUT14TestReport

## TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C Relative humidity: 50%

## TEST SETUP

Test Exercise (e.g. software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote security transmitter.

## DUT SPECIFICATION

Applicant	LIGHTWAVE TECHNOLOGY		
Description	TRANSMITTER		
FCC ID	2ABSL3201		
Model Number	LWR-3201		
Frequency Range	433.92MHz		
DUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable

## MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(A)

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Does this device send data with this control signal?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.	<input type="checkbox"/>	<input checked="" type="checkbox"/>
4	Does this device transmit continuously or automatically?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	<input checked="" type="checkbox"/>	<input type="checkbox"/>
6	If automatically operated does it deactivate 5 seconds after activation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>
7	Does it transmit at regular predetermined intervals?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
8	Does it poll or send supervisory information?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	If yes does it do a system integrity check? How often?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Is this a fire, security or safety of life device?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
9	If YES does the device stop transmitting after the alarm condition is satisfied?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
10	Duty cycle: Maximum on-time? 7.08ms	7.08ms	
	If YES, on-time in 100 ms? If Other, please specify here	100ms	
	On time in.	Milliseconds	
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?	ASK	

## TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Antenna: Biconnical	Eaton	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic	Eaton	96005	1243	05/31/13	05/31/15
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	10/5/12	10/5/14
EMI Receiver	Rohde & Schwarz	ESU40*	100320	3/21/13	3/21/15
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	01/15/14	01/15/16
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	01/15/14	01/15/16
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	01/15/14	01/15/16
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	01/15/14	01/15/16

EMI Test Receiver firmware version information

Manufacturer	Model	Receiver Firmware	BIOS Ver
Rohde & Schwarz	ESU40	4.43 SP3	V5.1-24-3

## TEST PROCEDURES

**Power line conducted Emissions:** The test procedure used was ANSI C63.4-2003.

**Spurious Emissions:** The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and a plot was generated. The vertical scale is set to 10 dB per division.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dB $\mu$ V	ACF dB/m	Cable Loss dB	Field Strength dB $\mu$ V/m @ 3 m
33	20	+10.36	+1.2	= 31.56



**ANSI C63.4-2003 Measurement:** The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.



When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



## EUT Pictures

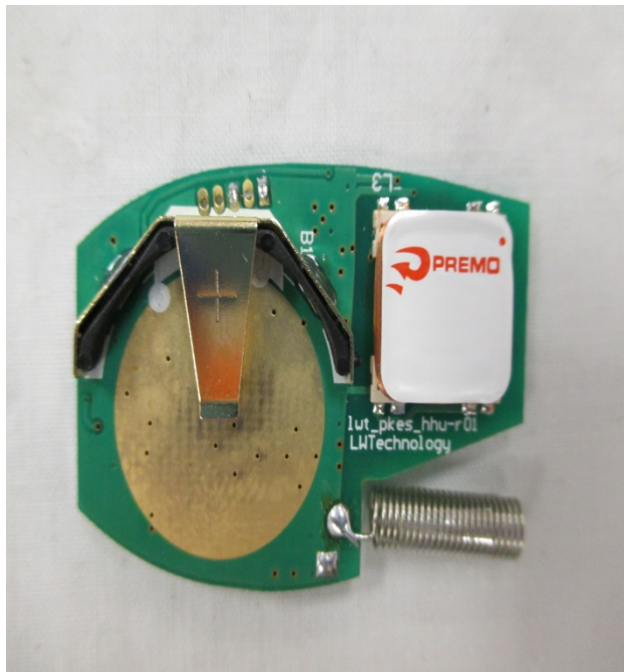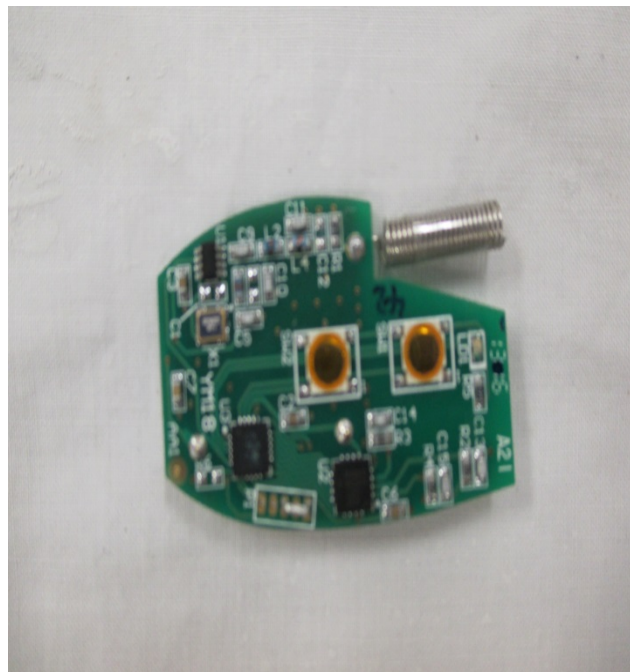

**EUT Setup Photo's**

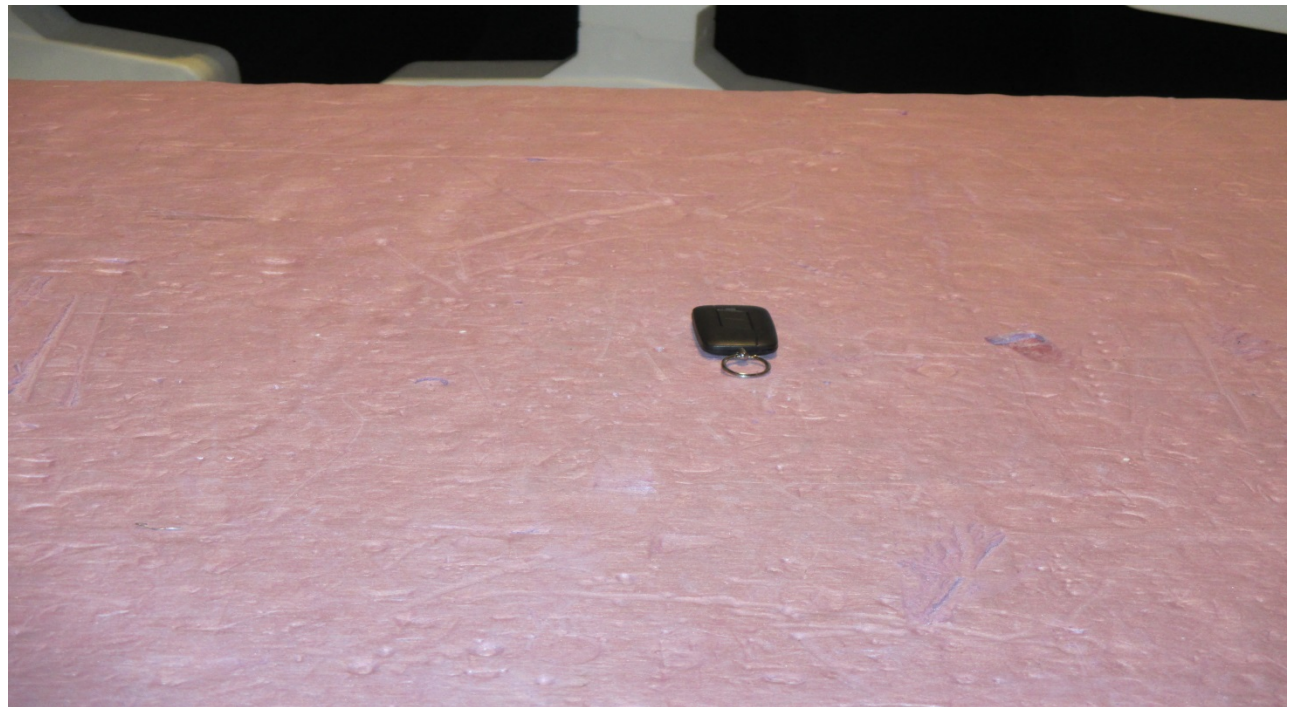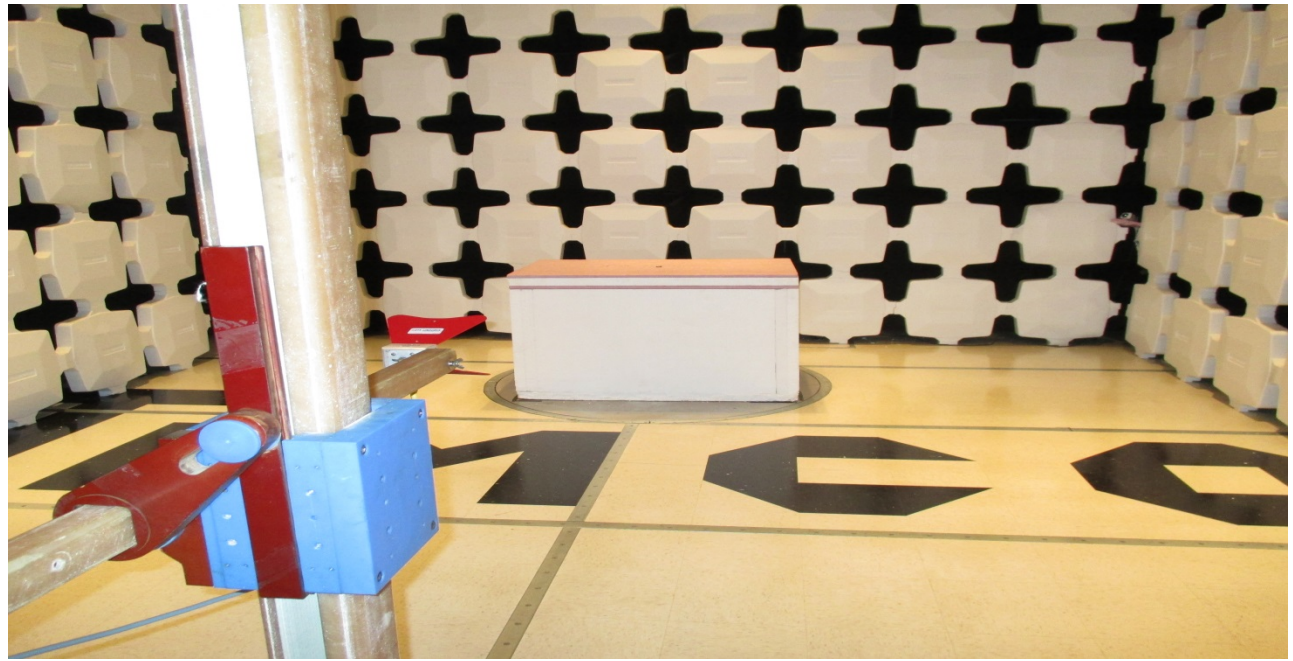

## RADIATION INTERFERENCE

**Rules Part No.:** 15.231

### Requirements:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m)	Field Strength of Harmonics and Spurious Emissions (dB $\mu$ V/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

All limits shown are for Quasi-Peak or Average.

No fundamental frequency is allowed in the restricted bands.

Spurious emissions in the restricted bands must be less than 54 dB $\mu$ V/m or to the limits of 15.209.

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- 1) for the band 130-174 MHz,  $\mu$ V/m at 3 meters =  $56.81818(F) - 6136.3636$ ;
- 2) for the band 260-470 MHz,  $\mu$ V/m at 3 meters =  $41.6667(F) - 7083.3333$ .

Sample calculation of limit @ 315 MHz:

$$41.6667(315) - 7083.3333 = 6041.68 \text{ uV/m}$$

$$20\log(6041.68) = 75.62\text{dBuV/m limit @ 315 MHz}$$

Sample calculation of limit @ 433.92 MHz:

$$41.6667(433.9) - 7083.3333 = 10,995.85 \text{ uV/m}$$

$$20\log(10,995.85) = 80.82 \text{ dBuV/m limit @ 433.9 MHz}$$

### FOR THIS DUT:

The limit for average field strength in dBuV/m for the fundamental frequency is 80.82 dB $\mu$ V/m.

The limit for average field strength in dBuV/m for the harmonics and other spurious frequencies is 60.82 dB $\mu$ V/m unless it is in a restricted band.

**Field Strength Test Data:** All measurements were made using a peak detector; limits are represented for Quasi-peak or average depending on the frequency.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
433.9	49.07	16.9	V	0.50	11.32	23	5.72	55.1
433.9	191.82	15.4	H	0.87	14.07	23	7.34	53.48
433.9	433.92	61.6	H	1.23	15.84	23	55.67	25.15
433.9	433.92	51.6	V	1.23	15.84	23	45.65	35.17
433.9	867.94	26.3	H	1.93	23.06	23	28.29	32.53
433.9	*1,301.76	31.0	H	2.34	28.42	23	38.76	15.24
433.9	1,735.68	30.8	H	2.69	30.17	23	40.66	20.16
433.9	2,169.60	32.8	H	3.02	31.97	23	44.79	16.03

\*\* -Denotes restricted bands

Note: Emissions that are 20 dB below the limit are not required to be reported.

Measurements were made from 9 kHz or the lowest frequency generated to the tenth harmonic.

## CALCULATION OF DUTY CYCLE

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero (0) frequency span. A plot is then made of the pulse train with a sweep time of 100 milliseconds. This sweep determines the duration of the pulse train. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100-millisecond plot, the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the DUT is on within 100 ms.

Long Pulse	2 pulses x .46ms = .92ms
Short Pulse	44 pulses x .14ms = 6.16ms
Total On Time	7.08ms
Total Duration of Pulse Train	19.8ms
Duty Cycle Correction Factor	23dB

$$\text{dB} = 20 \cdot \log(.92\text{ms} + 6.16\text{ms}) / 100\text{ms}$$

$$\text{dB} = 20 \cdot \log(7.08\text{ms} / 100\text{ms})$$

$$\text{dB} = 20 \cdot \log(0.0708\text{ms})$$


$$\text{dB} = 20 \cdot (-1.15)$$

$$\text{dB} = -23$$


See the plots on the following pages.




## Total Duration of Pulse Train

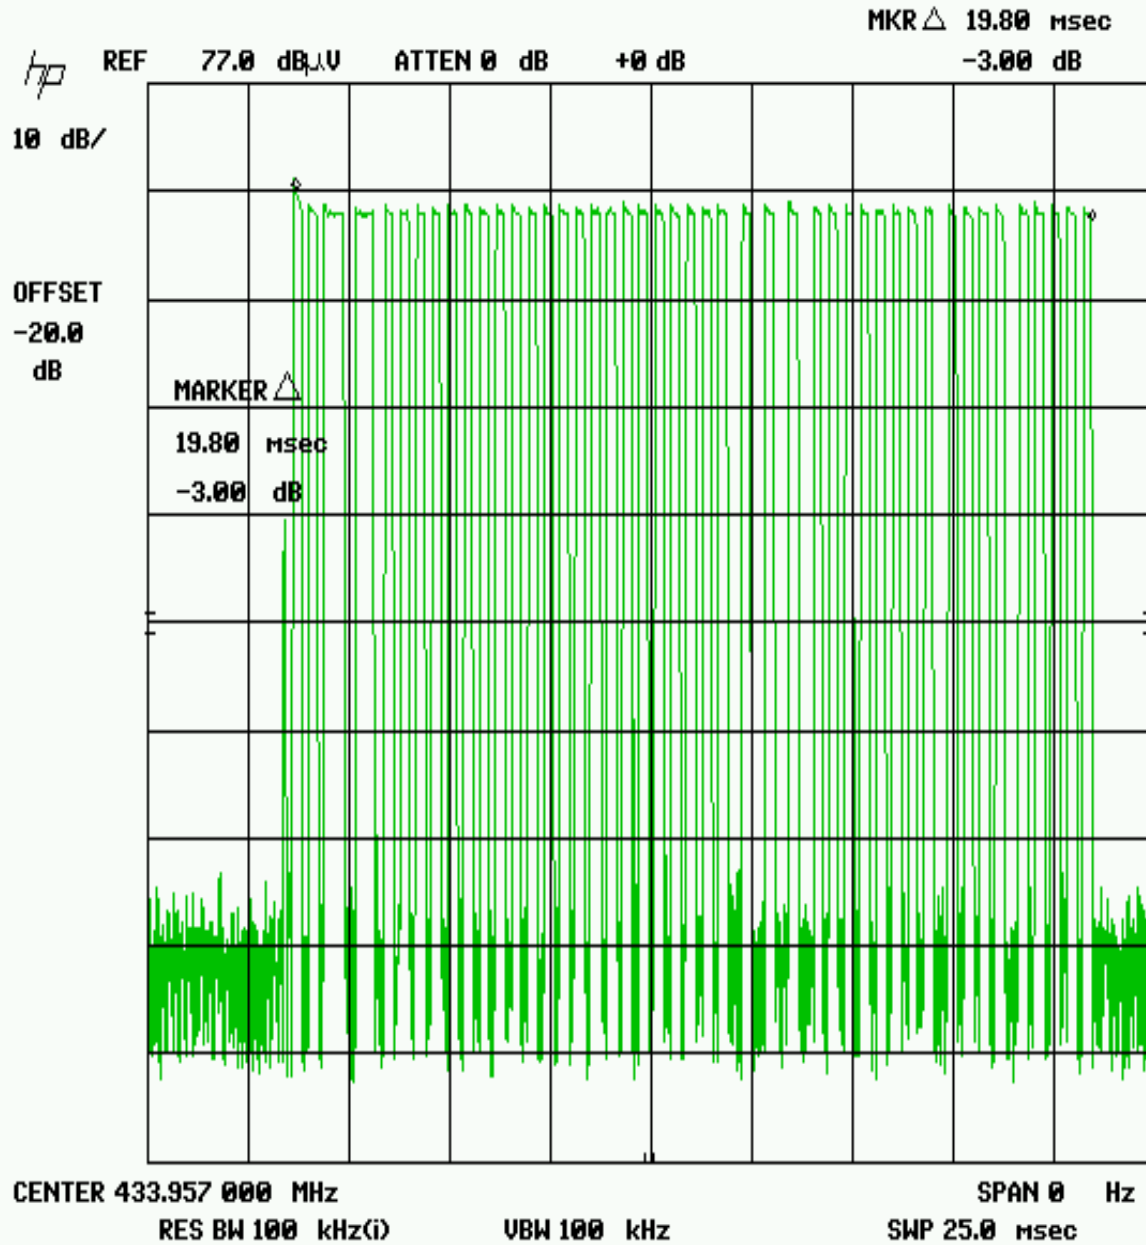

## Duration of Short Pulse

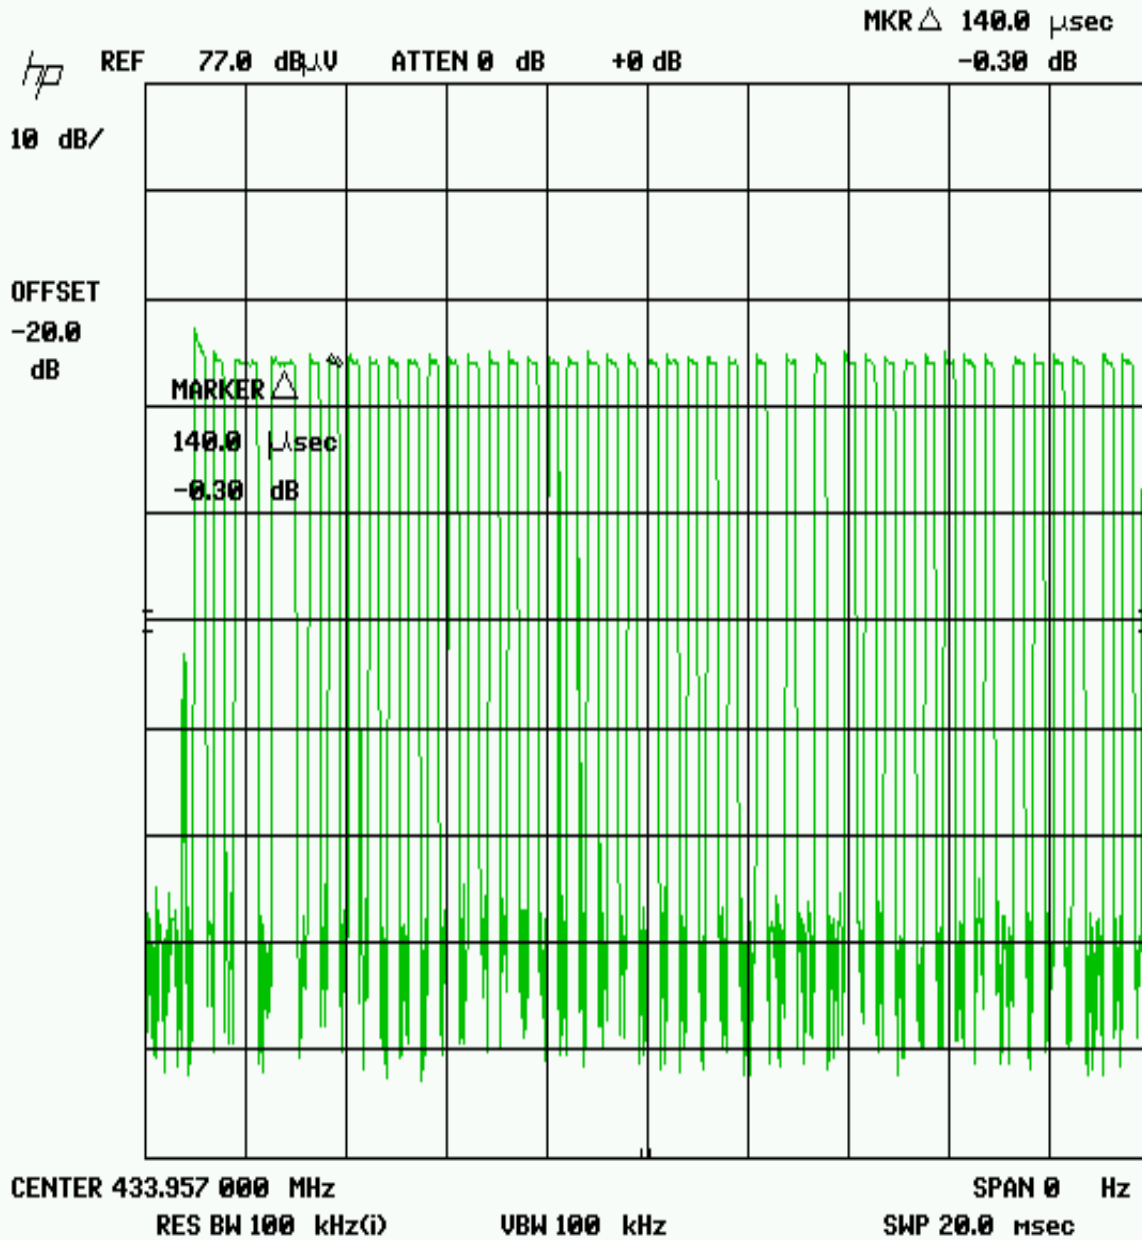

## Duration of Long Pulse

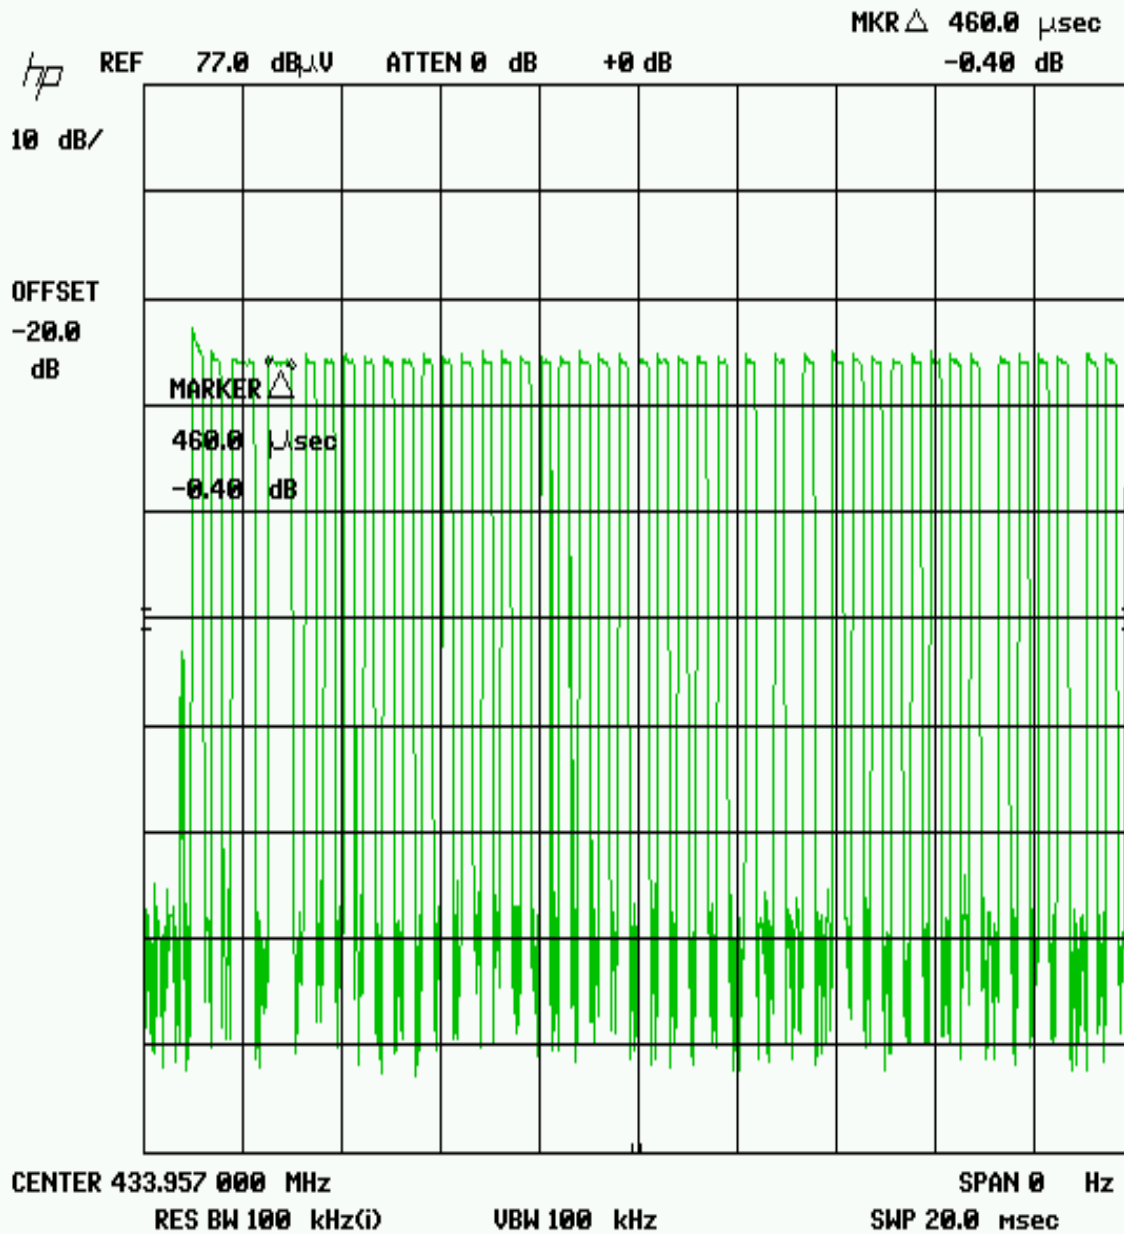



## OCCUPIED BANDWIDTH


**Rules Part No.:** 15.231(C)

**Requirements:** The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

DUT operating frequency

$$= 433.92 \text{ MHz} \times .0025 = 1.0848 \text{ MHz OBW Limit} > .123 \text{ MHz OBW Measurement}$$

**Test Data:** Please refer to the following plots.

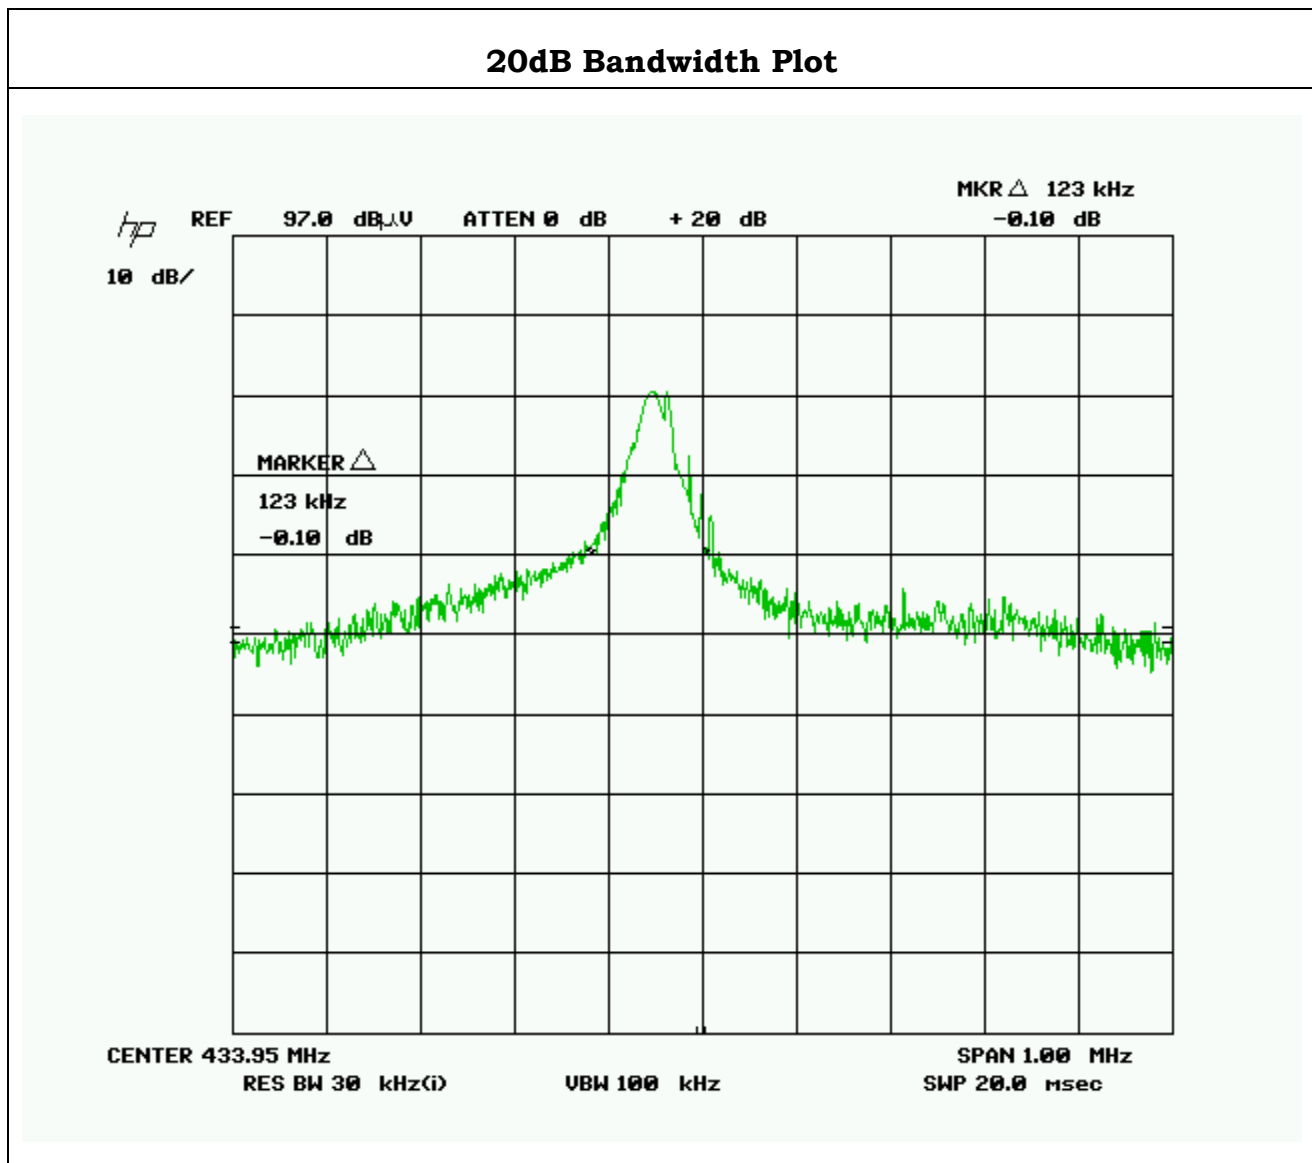

APPLICANT: LIGHTWAVE TECHNOLOGY

FCC ID: 2ABSL3201

REPORT: L\LIGHT\_2ABSL\191AUT14\191AUT14TestReportRev2



## Deactivation time Button Pressed and Held Down for 20 seconds



### Transmitter Deactivation

**Equipment Under Test** 433.92MHz Tx  
**Test Mode** Manual Transmit (Button Held)  
**Antenna Polarity** N/A  
**Detectors Used** Max Peak  
**Test Operator** Cory Leverett  
**Test Specification**  
 FCC 15.231 RSS\_210



25.Feb.14 11:43

Ref 82 dBμV

\* Att 10 dB

RBW 1 MHz

\* VSW 100 kHz


SWT 20 s

Marker 1 [T1]

63.99 dBμV

600.974359 ms

1 AP  
VIEW

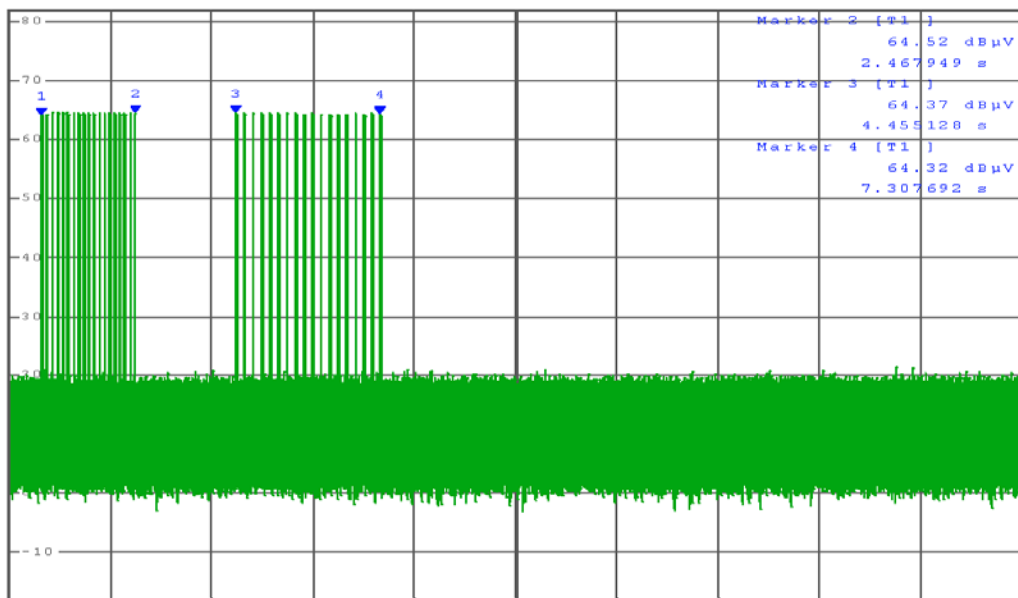

Center 433.92 MHz

2 s/