

DOG TRAINING COLLAR

USER GUIDE

PC30



Our product is designed to cultivate your pets' good habits, not to punish them. Please do not overuse this product on pets.



MADE IN CHINA

Version: V1.0 20240314



NOTE: Please read the user guide before using this product.
Do not discard.

Packing List



Technical Parameter

PC30 Bark collar (Receiver)

Battery	250mAh/3.7V lithium battery	Input voltage	DC5V/1A
Standby time	30 days(triggered 20 times a day)	Collar length	25in/62cm
Waterproof Level	IP67	Operating temperature	-10°C ~+50°C
Net weight	65g	Storage temperature	-20°C ~+50°C
Product Dimension	65.4mm*37.2mm*20.4mm(L*W*H)	Wireless frequency	433.92MHz

PC30 Remote control (Transmitter)

Battery	420mAh/3.7V lithium battery	Input voltage	DC5V/1A
Standby time	30 days(triggered 20 times a day)	Waterproof Level	IP42
Operating temperature	-10°C ~+50°C	Storage temperature	-20°C ~+50°C
Wireless frequency	433.92MHz	Net weight	85g
Product Dimension	59.0mm*21.9mm*150.9mm(L*W*H)	Wireless distance	2000ft (open ground)

! Receiver collar is IP67 waterproof and dustproof, the remote control is not waterproof.

Features

- Remote control(Transmitter) dot matrix colour screen display.
- Three training modes: warning sound, vibration and E-shock.
- Remote control(Transmitter) can be paired with 2 receivers.
- 99 levels of intelligent graded electric shock, 9 levels of vibration. Receiver with battery power indicator and status indicator
- 9-level frequency conversion warning sound
- One-way or two-way wireless communication, wireless distance up to 2000 ft(600 m)
- Using waterproof TYPE-C charging and IP67 dustproof and waterproof rating

Important statement

Safe use statement



1. It is forbidden to use this product for aggressive dogs. Aggressive dogs can cause serious injury or even death to others. If you are not sure whether the product is suitable for your dog, please consult a professional dog training instructor.
2. It is forbidden for children to play with this product, please place the product out of reach of children.

Electric shock safety statement



1. Before using the bark collar, please make sure your dog is healthy. If you are not sure about this, please consult the veterinarian.
2. When the Training Collar is in the power-on state, the human body should avoid touching the electric shock contactors of the product.
3. If you find rashes and sores on the wearing part of your pet, please stop using this product until pet's skin returns to health.

Important statement

Wearing and training safety statement



1. Your pet needs a firm leash to prevent violent reactions during training, so you can hold the leash to prevent your pet from running around. The safety of you and your pet is very important.



2. Pets should not wear the bark collar for more than 12 hours a day, and please adjust the wearing position every 1-2 hours



3. Bark collar is suitable for dogs who weigh more than 7.9lbs, or 7.9lbs and are older than 6 months



4. It is forbidden to use bark collar as a matching collar for a pet leash.



5. It is very important to check the shock vibration contact area on the pet's neck every day for rashes and sores.



6. We recommend that you cut the long hair around the dog's throat appropriately, but it is not recommended to shave the hair completely.





7. Before playing with your pet please remove the collar to avoid false triggering.


8. The IP67 standard indicates that the receiver can be left in water up to 1 m, or 3.2 ft deep for half an hour without water entering the interior of the product and is also dustproof. (remote not waterproof)

Note: The IP67 standard is the result of static laboratory tests.


Receiver Introduction

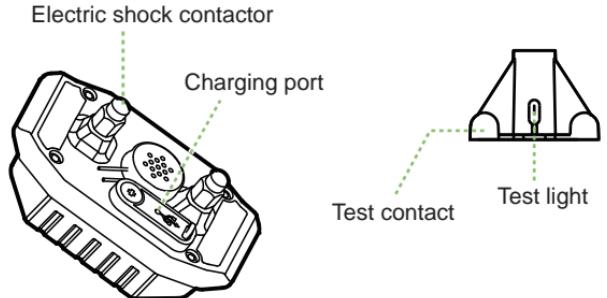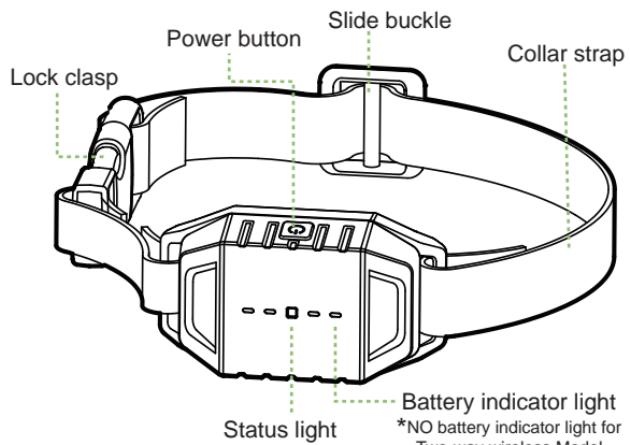


Transmitter Introduction

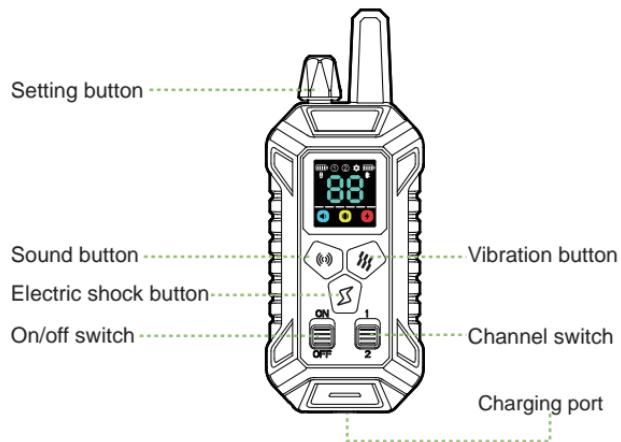

Two-way wireless

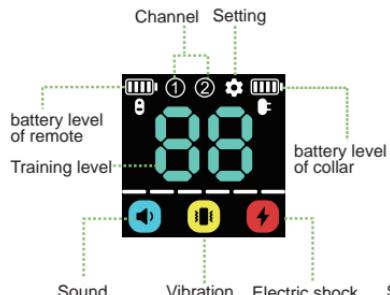


One-way wireless

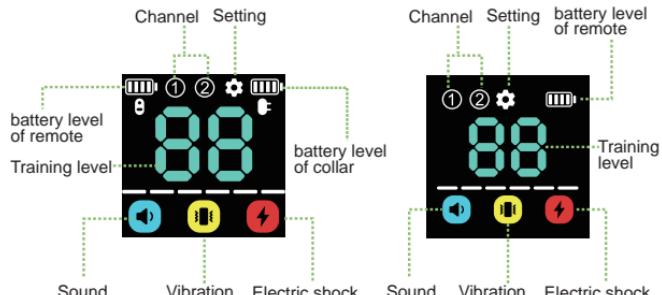

Using Instructions

1. Charge the product before using it

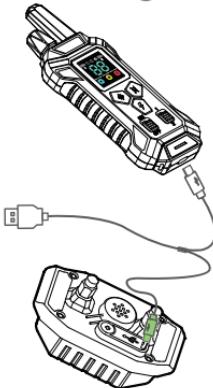

When the remote control(Transmitter) is charging, the battery icon is flashing and the charging time is 2-3 hours. The battery icon remains on when the battery is fully charged.



When the training collar is charging, the status light is red and the charging time is 2-3 hours. When the battery is fully charged, the status light is on in green.

2. Turn ON/OFF

Push the power button up to the ON position, the screen will light up to indicate that it is powered on. In the power-on state, push the power button down to the OFF position, and the screen goes out to indicate a successful boot operation.



Press and hold the receiver's button for 2 seconds, the receiver will "beeping beeping" twice means power on. In the power-on state, the green status light flashes once every 5 seconds (The status light will turn off within 10 minutes of each operation). Press and hold the button for 2 seconds, and the receiver will make a long "beeping" to indicate that power off.

Using Instructions

3. Channel Switching



Turn the channel switch upward, and the icon ① displayed on the screen indicates that the current transmitter is set to channel 1; turn the channel switch downward, and the icon ② displayed on the screen indicates that the current transmitter is set to channel 2. When the receiver receives the channel switching command from the transmitter, the prompt light will flash Cyan three times.

4. Sound Level Setting



In the power-on state, press the setting button until flashes to enter the sound level setting page. At this time, rotate the setting button clockwise to increase, and rotate the setting button counterclockwise to decrease. The sound level is adjusted from 1 to 9. The larger the number, the higher the frequency of the sound.

Using Instructions

5. Shock Level Settings



In the power-on state, press the setting button until flashes to enter the shock level setting page. At this time, rotate the setting key clockwise to increase, and rotate the setting key counterclockwise to decrease. The vibration level is adjusted from 00 to 99. The larger the number, the stronger the electric shock. 00 means the electric shock is turned off.


6. Vibration level setting




In the power-on state, press the setting button until flashes to enter the vibration level setting page. At this time, rotate the setting button clockwise to increase, and rotate the setting button counterclockwise to decrease. The vibration level can be adjusted from 1 to 9. The larger the number, the stronger the vibration.

Using Instructions

7. Training Operations

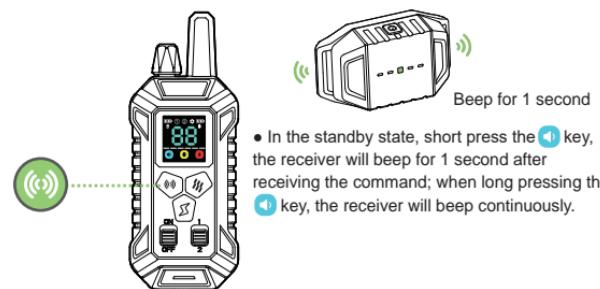


- In the standby state, short press the key, the receiver will beep for 1 second after receiving the command; when long pressing the key, the receiver will beep continuously.

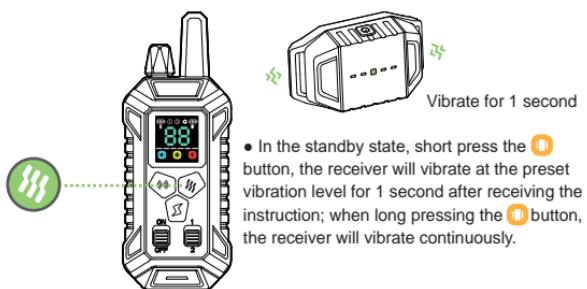


- In the standby state, short press the button, the receiver will vibrate at the preset vibration level for 1 second after receiving the instruction; when long pressing the button, the receiver will vibrate continuously.


Using Instructions

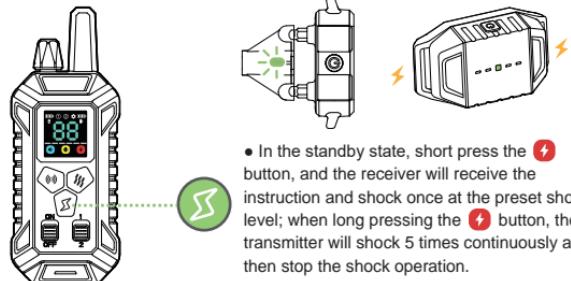


8.Pairing Instruction

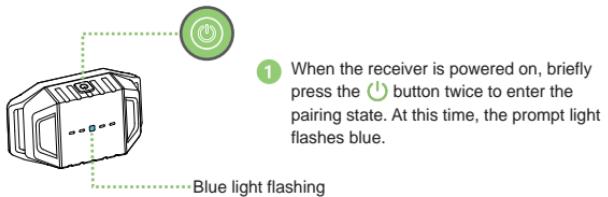

Using Instructions

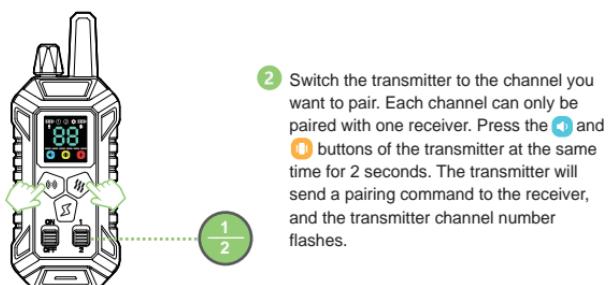

The blue light stays on for 3 seconds



3 After successful pairing, the blue indicator light on the receiver will stay on for 3 seconds.

4 In the pairing state, if the pairing is not successful for more than 30 seconds, the receiver will automatically exit the pairing state.


Using Instructions

9. Transmitter Factory Reset



Within 15 seconds of restarting, press and hold the **E** button and the **Light** button for 2 seconds, the backlight flashes 5 times, indicating that the factory reset is successful.

10. Low Battery



Flashes once every 5 seconds

When the battery of the receiver is lower than 1 bar, the red status light flashes once every 5 seconds, the receiver will automatically shut down after 20 minutes.



When the battery of the transmitter is lower than 1 bar, the battery icon flashes, the transmitter will automatically shut down after 20 minutes.

Setting Guide

Choose the appropriate level according to the dog's temper and set the appropriate level according to the dog's temper and the degree of endurance to electric shocks. Please start training from the lowest level. For example, the dog responds to the level of electric shock with ear shaking, tongue licking, neck tightening, etc. This is the appropriate level. The level of electric shock varies according to the training conditions. If the dog's attention is highly distracted, a strong level is needed to stimulate it.

Dog	11-22lbs	22-33lbs	33-55lbs	55-77lbs	77-110lbs
Sound	Default	Default	Default	Default	Default
Vibration	1-2	3-4	5-6	7-8	8-9
E-shock	OFF	10+	30+	50+	70+

11. Assemble the receiver

Install the E-shock contactors

Select the appropriate long/short E-shock contactors, and use the mounting plate to install them on the holes on the back of the product.



Select contacts



Rotary tightening contacts



OK!

⚠ Please use appropriate force, otherwise the device will be damaged.

Install the silicon protective sleeve

Then choose the long/short conductive silicone protective sleeve to directly cover the E-shock contact, which can effectively reduce the physical damage of the E-shock contact to the dog's skin.



Choose a sleeve




put on directly



OK!


Function Testing

After assembly is complete, functional testing is recommended. Please follow the steps below to test.

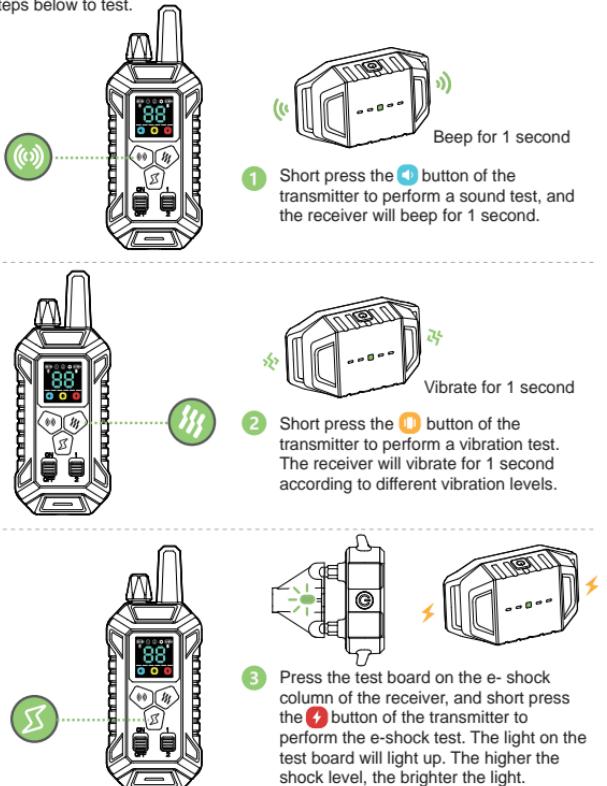

Wear the Bark Collar

The collar ranges from 20 cm to 62 cm (8 inches to 25 inches). Before wearing, please adjust the buckles and sliders to make the collar size to the correct length to ensure the shock contacts can be firmly attached to the dog On the neck, if you can fit a finger between the collar strap and the dog's neck it's the right size.

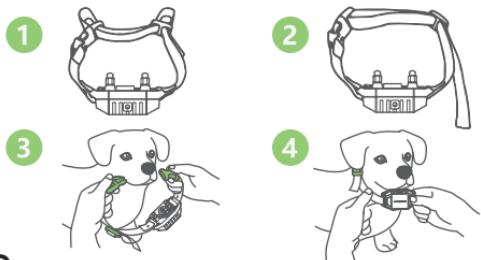

FAQ

Q: Why doesn't the receiver work when the transmitter is operated by e-shock function?

A: There may be three reasons for this problem. The first is that the transmitter and receiver are not paired, so try pairing again. Second, the E-shock contacts do not touch the skin, so try again to adjust the tightness of the collar to ensure good skin contact. Third, the level setting is not high enough, so try turning up the level of the E-shock function.

Q: Is the product safe and humane?

A: All means of receiving do not cause any direct damage to the pet's body, but can make them very uncomfortable. Even so, do not over-use this product on pets. See all safety notices in the manual.

Q: Why don't the receiver and transmitter the work ?

A: There may be two reasons for this problem. The first is that the transmitter and receiver are not powered on, please refer to the manual for the power-on operation. Secondly, the transmitter and receiver batteries are exhausted, please charge the receiver and transmitter, the charging time is about 2 hours.

Troubleshooting

Fault Phenomenon	Analysis	Method of exclusion
Can't power on	<ol style="list-style-type: none"> 1. Low battery 2. Can't be power on after charging 	<ol style="list-style-type: none"> 1. Please charge and try again when fully charged 2. Please contact the dealer for replacement
Can not be charged	<ol style="list-style-type: none"> 1. When charging, the red light of the receiver does not light up or the screen of the transmitter does not light up 2. When charging, the red light of the receiver is on or the screen of the transmitter is on, but the battery cannot be charged 	<ol style="list-style-type: none"> 1. Please check whether the charging cable interface is in good contact 2. Please contact the dealer for replacement
The receiver does not respond to the operation of the transmitter	<ol style="list-style-type: none"> 1. The receiver is not power on 2. Transmitter channel number error 3. Transmitter and receiver are not paired 4. Receiver is damaged 	<ol style="list-style-type: none"> 1. Power on the receiver 2. Please adjust the channel number 3. Re-pair the transmitter and receiver 4. Please contact the dealer for an exchange

Terms of Use & Liability

Terms of Use & Liability

1.Terms of use

When you start using the product, it means that you have accepted all the terms, conditions, and statements in this user guide.

2.Use it correctly

This product is designed for pets that need training. Please use this product correctly and carefully read the user guide and any specific "safety" and "caution" statements.

3.Illegal use is forbidden

This product is suitable for pets. This device is not designed to harm pets. Using this product not in accordance with the user guide may violate local laws.

4.Scope of responsibility

The manufacturer is not responsible for any direct, indirect, punitive, non-significant losses and other indirect losses caused by incorrect use or abuse of this product. The buyer assumes all risks and responsibilities of using this product.

5.Modification of terms and conditions

The manufacturer reserves the right to change the terms, conditions, and declarations related to the products.

Certification Statements



This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Certification Statements



The company declares under its own responsibility that this product complies with the basic requirements of CE (2014/30/EU) and RoHS (2011/65/EU). Without the approval of our company or the distributor, unauthorized changes or modifications to the equipment may violate the CE regulations, may cause the user to lose the right to operate the equipment, and invalidate the warranty.



Recycling Information&Battery Disposal

Please observe the regulations for electronic and electrical devices to be disposed of in the respective country. In some countries or regions, this device must be recycled. If this device is no longer required, it must not be disposed of with normal municipal waste. Separate collection of spent batteries is required in many regions; check the regulations in your area before discarding spent batteries. For more recycling information, please refer to local regulations.



This product is in compliance with the applicable requirements for products sold within Great Britain.