FCC&ISED Radio Test Report

FCC ID: 2AFZI-AVI1010B

IC: 20544-AVI1010B

This report concerns (check one): ☐**Original Grant** ☐**Class I Change** ☒**Class II Change**

Project No.	:	1711C205A
Equipment	:	Avi-on 1010
Test Model	:	AVI1010-B
Series Model	:	AVI1010VIA-B
Applicant	:	Avi-on Labs, Inc.
Address	:	2750 Rasmussen, Suite 206 Park City, Utah United States 84098

Date of Receipt	:	Nov. 23, 2017
Date of Test	:	Nov. 23, 2017 ~ Feb. 06, 2018
Issued Date	:	Feb. 28, 2018
Tested by	:	BTL Inc.

Testing Engineer : Paul. Li
(Paul Li)

Technical Manager : Shawn xiao
(Shawn Xiao)

Authorized Signatory : David Mao
(David Mao)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

NVLAP TESTING
NVLAP LAB CODE 200788-0

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents Page

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FICP-1-1711C205	Original Report.	Feb. 28, 2018
BTL-FICP-1-1711C205A	Compared with the previous report (BTL-FICP-1-1711C205), Please refer to Page 7 Note 2.	Feb. 28, 2018
MDG1803020	The model name is updated.	Mar. 13, 2018

1. CERTIFICATION

Equipment	:	Avi-on 1010
Brand Name	:	Avi-ON
Test Model	:	AVI1010-B
Series Model	:	AVI1010VIA-B
Applicant	:	Avi-on Labs, Inc.
Manufacturer	:	Iton Technology Corp.,Ltd
Address	:	Room 1302, Block A, Building 4, Tianan Cyber Park, Huangge Road, Longgang District, Shenzhen, China
Factory	:	Iton Technology Corp.,Ltd
Address	:	Floor 3, Building E, Ainan Road, w\Weixinda Industrial Park,Longgang District, Shenzhen, China
Date of Test	:	Nov. 23, 2017 ~ Feb. 06, 2018
Test Sample	:	Engineering Sample
Standard(s)	:	FCC Part15, Subpart C (15.247) / ANSI C63.10-2013 RSS-247 Issue 2, Feb. 2017 RSS-GEN Issue 4, Nov. 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-1-1711C205A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C Canada RSS-247 Issue 2, Feb. 2017, RSS-GEN Issue 4, Nov. 2014				
Standard(s) Section		Test Item	Judgment	Remark
FCC	IC			
15.207	RSS-GEN 8.8	Conducted Emission	PASS	
15.247(d)	RSS-247 5.5	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	RSS-247 5.2 (a)	6dB Bandwidth	PASS	
15.247(b)(3)	RSS-247 5.4 (d)	Peak Output Power	PASS	
15.247(e)	RSS-247 5.2 (b)	Power Spectral Density	PASS	
15.203	-	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	RSS-247 5.5	Transmitter Radiated Emissions	PASS	

NOTE:

(1) ” N/A” denotes test is not applicable to this device.

(2) This is to request a Class II permissive change for FCC ID: ZAFZ1-AVI1010, IC: 20544-AVI1010, originally granted on XX/XX/2018.

The major change filed under this application is:

1. Model names (AVI1010UFL and AVI1010NA) are removed, model name (AVI1010VIA) is added.

2. Implementation in new platform.

Model number/ Product name:

1) AVI4101VIA / Eaton Outdoor Sensor Daughter Card - Aurolite Motion Head

2) AVI4102VIA / Eaton Outdoor Sensor Daughter Card - TCL Floodlight

3. Addition one type antenna (Ant. 4), the antenna gain is lower than the original application.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Wire Monopole	N/A	3.18	AVI1010
2	N/A	N/A	Wire Monopole	N/A	2.61	AVI1010
3	Laird TECHNOLOGIES	N/A	Dipole	N/A	5.50	AVI1010
4	N/A	N/A	PIFA	N/A	1.42	AVI1010 / AVI1010VIA

Note: There are 4 options for the antenna of product, only one antenna is used at a time.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 319330
BTL's designation number for FCC: CN5020
BTL's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) k=1.96 or k=2(which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, U=2xUc(y).

The BTL measurement uncertainty as below table:

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Avi-on 1010	
Brand Name	Avi-ON	
Test Model	AVI1010-B	
Series Model	AVI1010VIA-B	
Model Difference	Differ in antenna matched with it, please see below note 2 for the details.	
Product Description	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps)
	Bit Rate of Transmitter	
	Output Power (Max.)	9.72 dBm (1Mbps)
Power Source	Supplied from host.	
Power Rating	DC 3.3V	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2.

Model	Antenna
AVI1010-B	ANT1(6005ANT) / ANT2(6008ANT)/ ANT3(Dipole Antenna)/ ANT4(6007ANT)
AVI1010VIA-B	ANT4(6007ANT)

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Wire Monopole	N/A	3.18	N/A
2	N/A	N/A	Wire Monopole	N/A	2.61	N/A
3	Laird TECHNOLOGIES	N/A	Dipole	N/A	5.50	N/A
4	N/A	N/A	PIFA	N/A	1.42	N/A

Note:
There are 3 options for the antenna of product, only one antenna is used at a time.

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode **NOTE (1)**

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode **NOTE (1)**

Note:

(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE

Test Software Version	CSR µEnergy Tools 2.4.3		
Frequency (MHz)	2402	2440	2480
BT LE	7	7	7

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

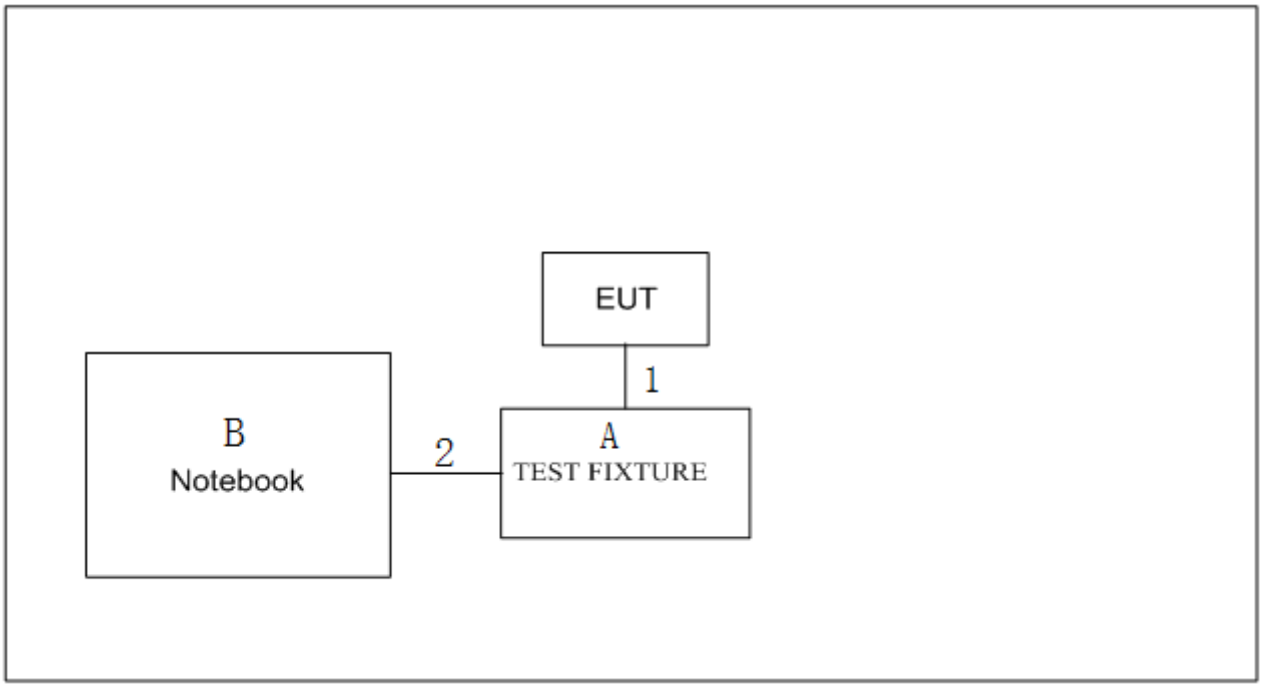

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Test Fixture	N/A	N/A	N/A	N/A
B	Notebook	DELL	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	0.05m	Data Cable
2	NO	NO	1m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	50	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

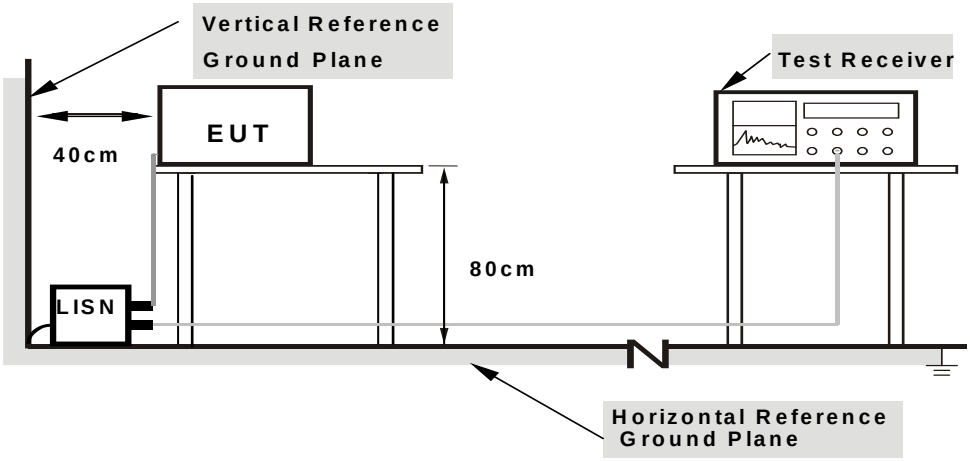

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
(2) Measuring frequency range from 150KHz to 30MHz.
(3) " N/A" denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a) and RSS-247 5.5, then the 15.209(a) and RSS-Gen limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C and RSS-247.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

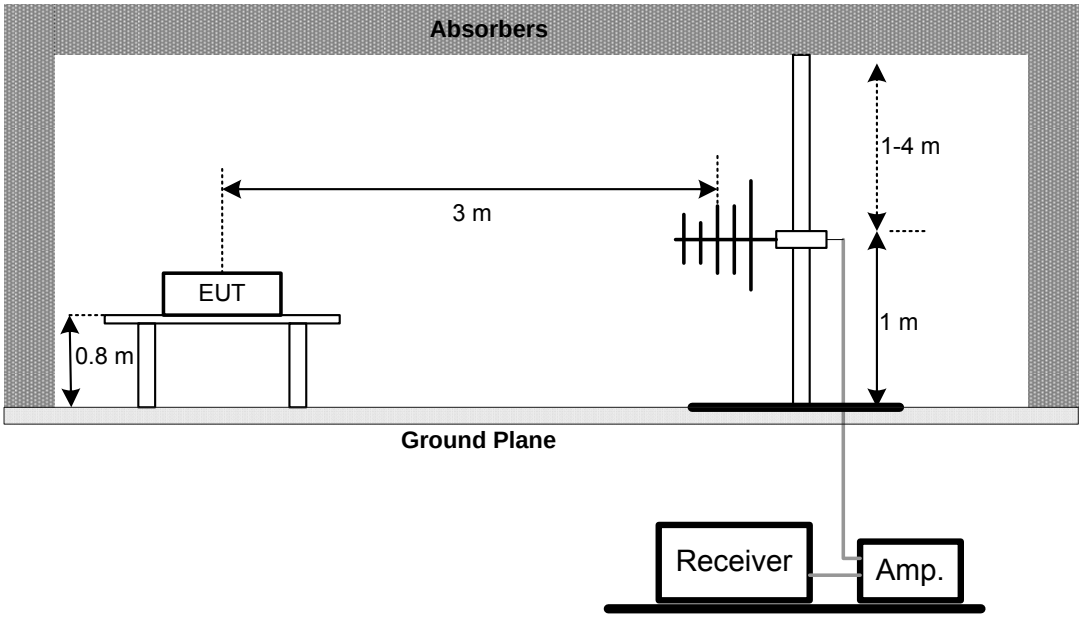

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

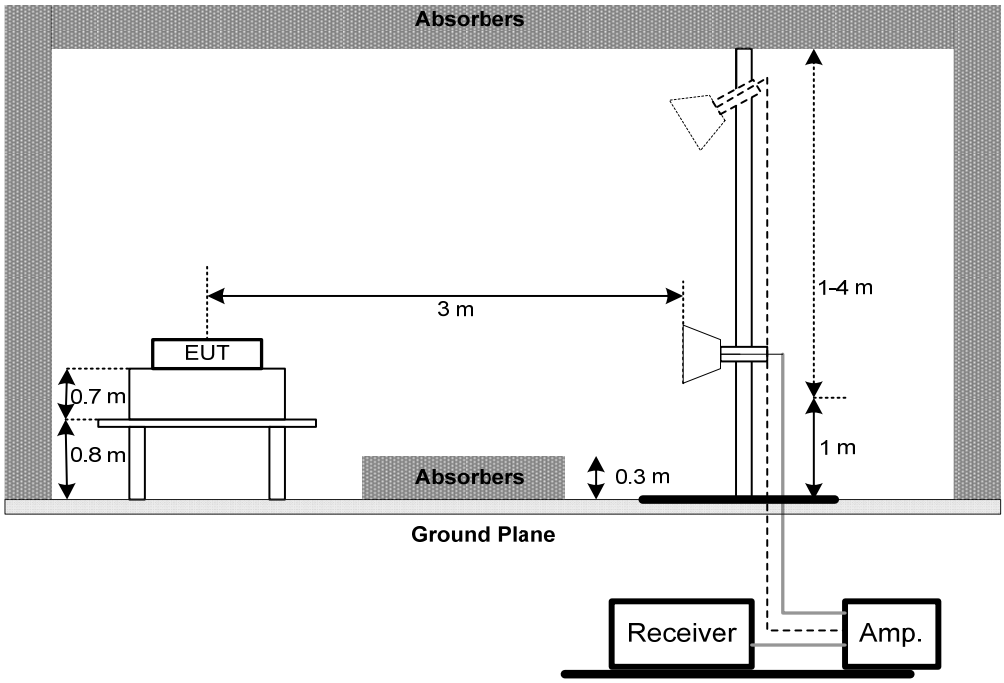

(C) For radiated emissions below 30MHz

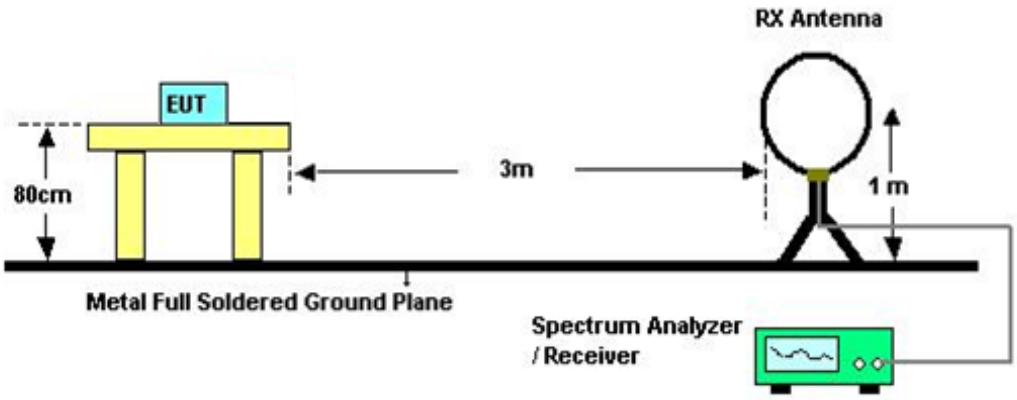

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 22°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

4.2.7TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

(1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
(2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
(3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix C.

4.2.9TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C / RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2) RSS-GEN section 6.6 RSS-247 5.2 (a)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C / RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS-247 5.4 (d)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C / RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-247 5.2 (b)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Oct. 19, 2018

Radiated Emission Measurement - Below 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Antenna	EM	EM-6876-1	230	Mar. 06, 2018

Radiated Emission Measurement - Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 08, 2018
3	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
5	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
6	Antenna	EM	EM-6876-1	230	Mar. 06, 2018
7	Controller	CT	SC100	N/A	N/A
8	Controller	MF	MF-7802	MF780208416	N/A
9	Cable	emci	EMC104-SM-SM-1 2000(12m)	N/A	Jun. 26, 2018
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 26, 2018
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 26, 2018

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Remark: ”N/A” denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTO

Conducted Measurement Photos_ AVI4101VIA

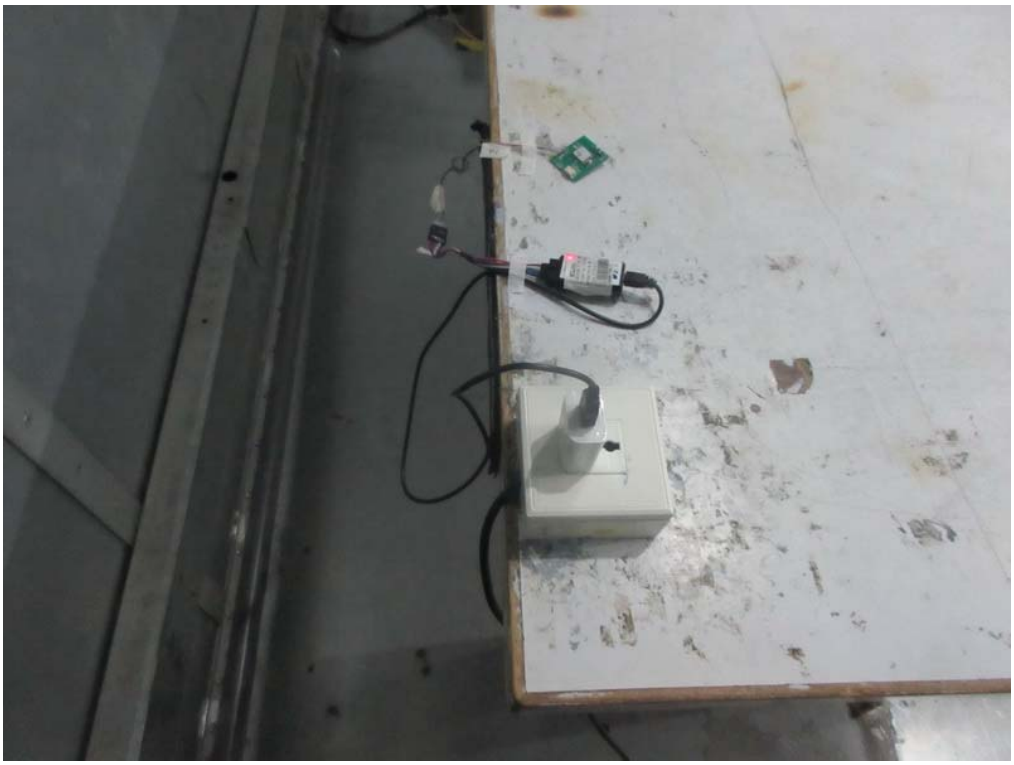

Conducted Measurement Photos_ AVI4102VIA

Radiated Measurement Photos

9KHz to 30MHz_ AVI4101VIA

Radiated Measurement Photos

9KHz to 30MHz_ AVI4102VIA

Radiated Measurement Photos

30MHz to 1000MHz_ AVI4101VIA

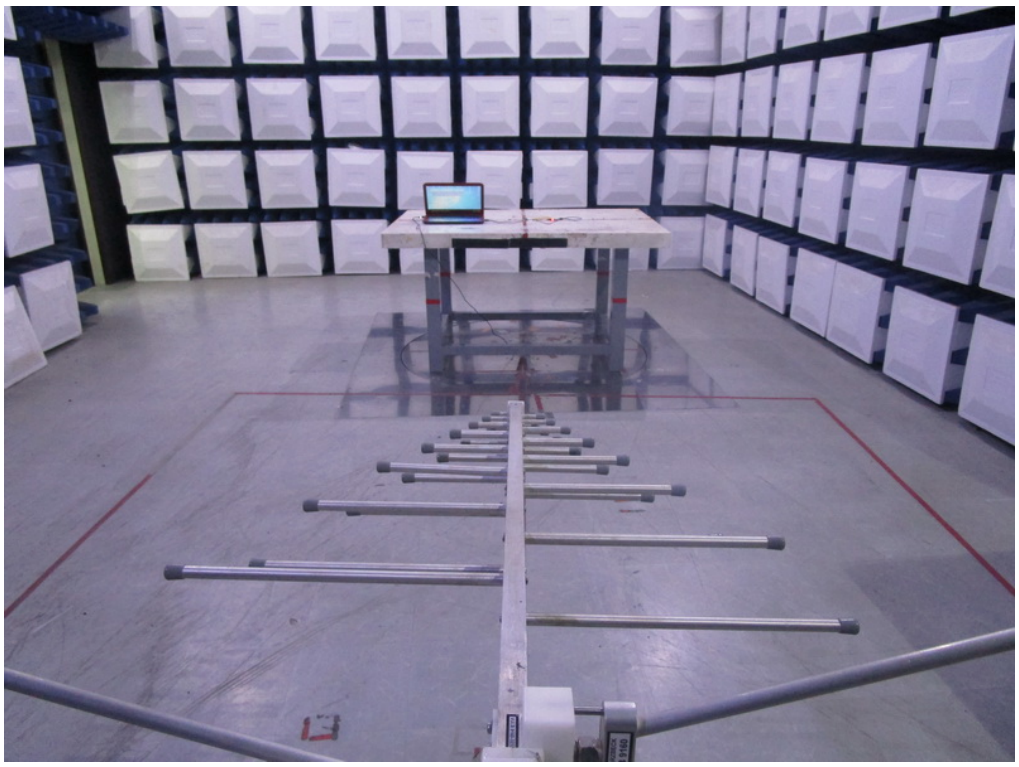

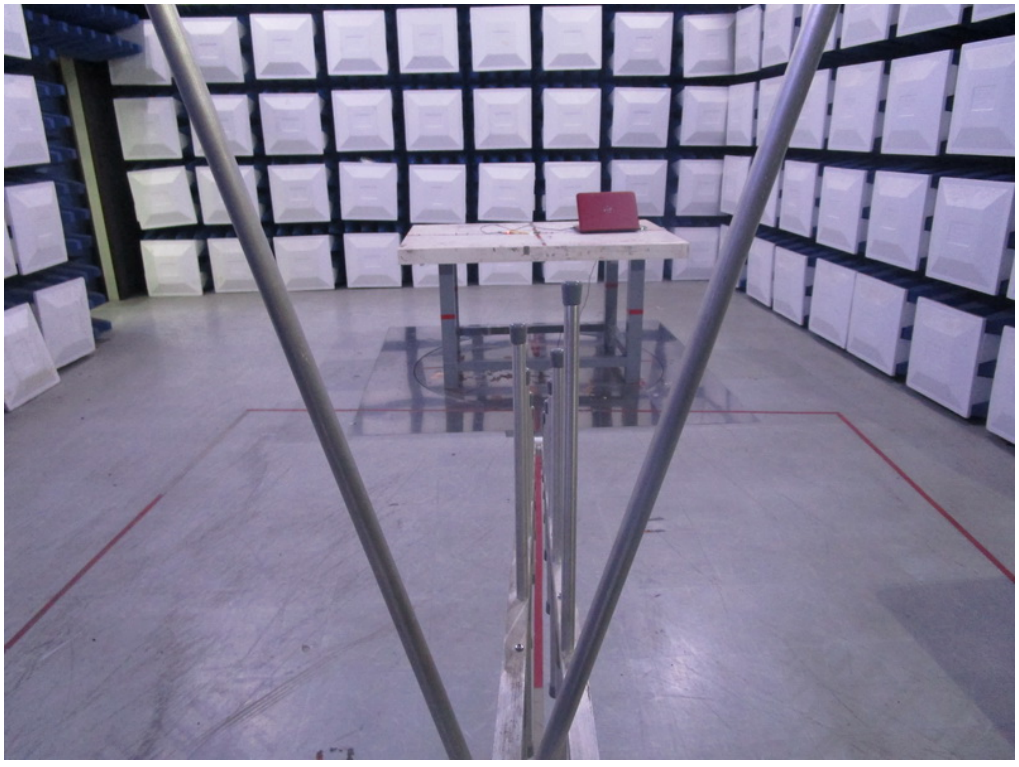

Radiated Measurement Photos

30MHz to 1000MHz_ AVI4102VIA

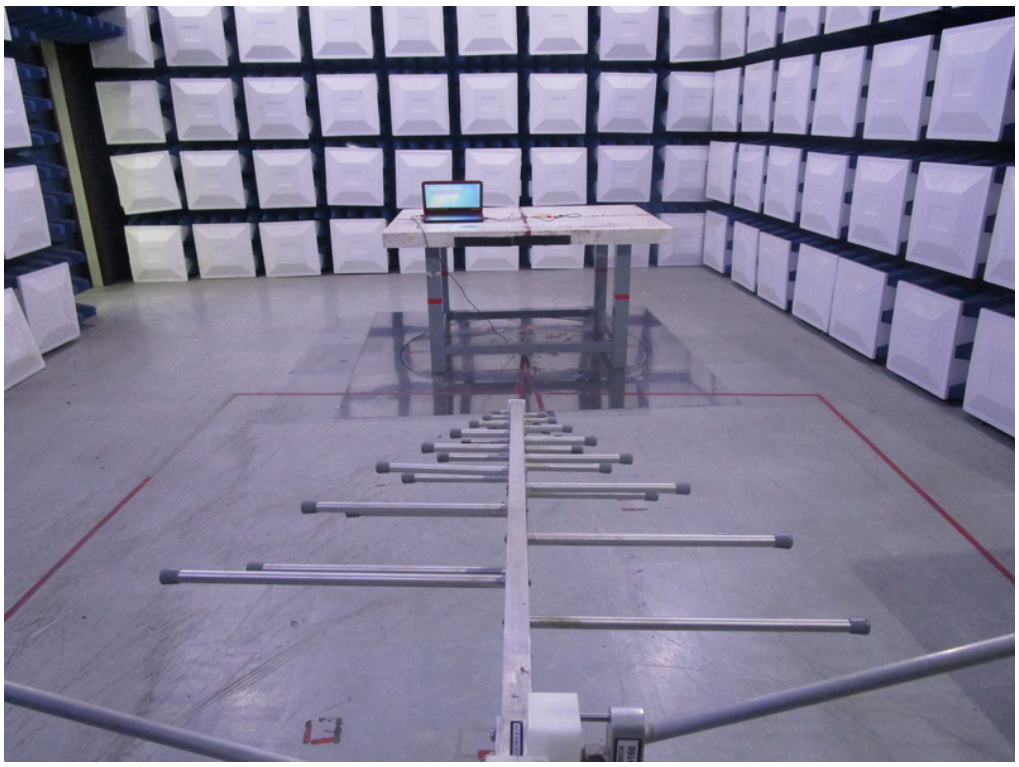

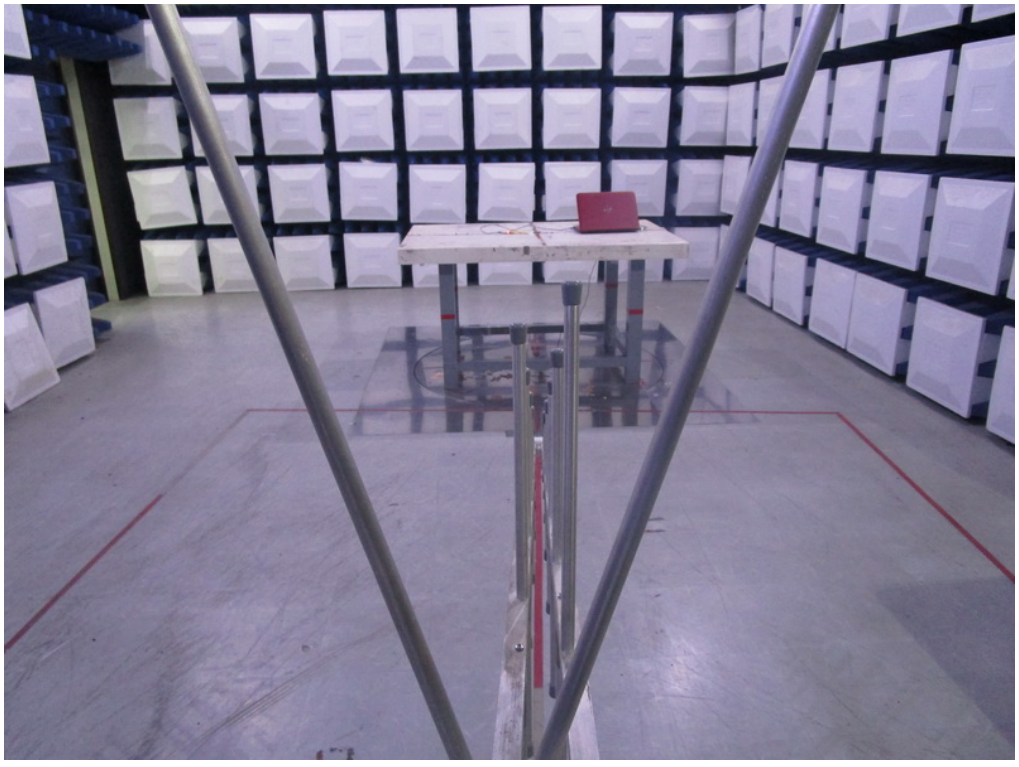

Radiated Measurement Photos

Above 1000MHz_ AVI4101VIA

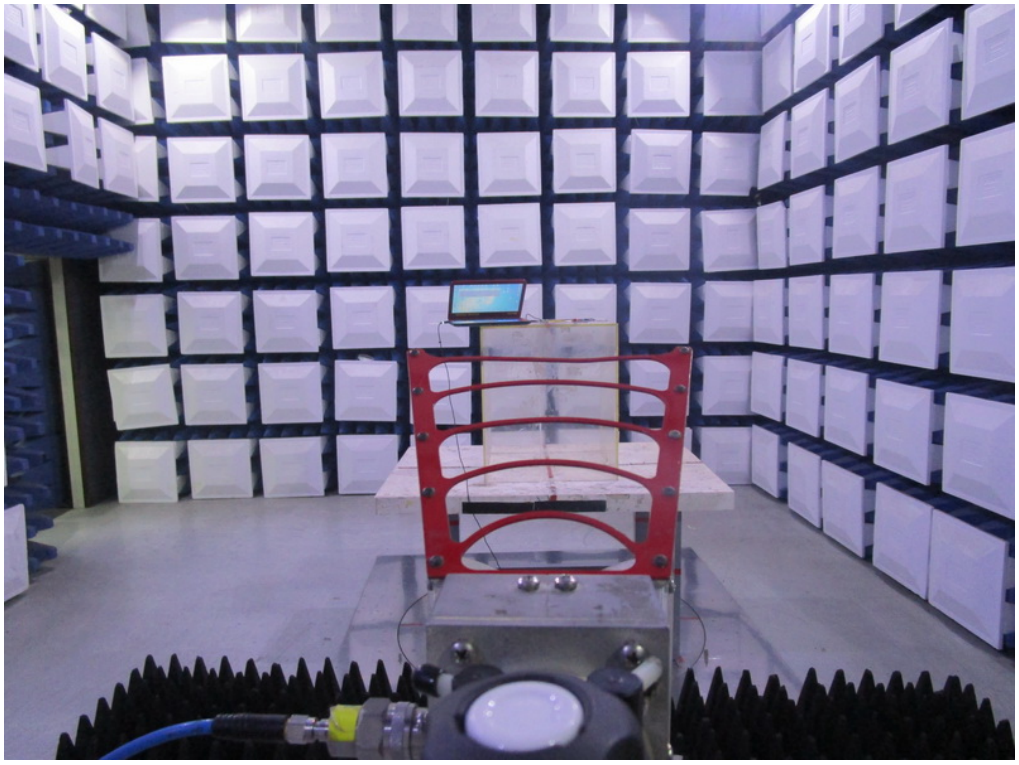

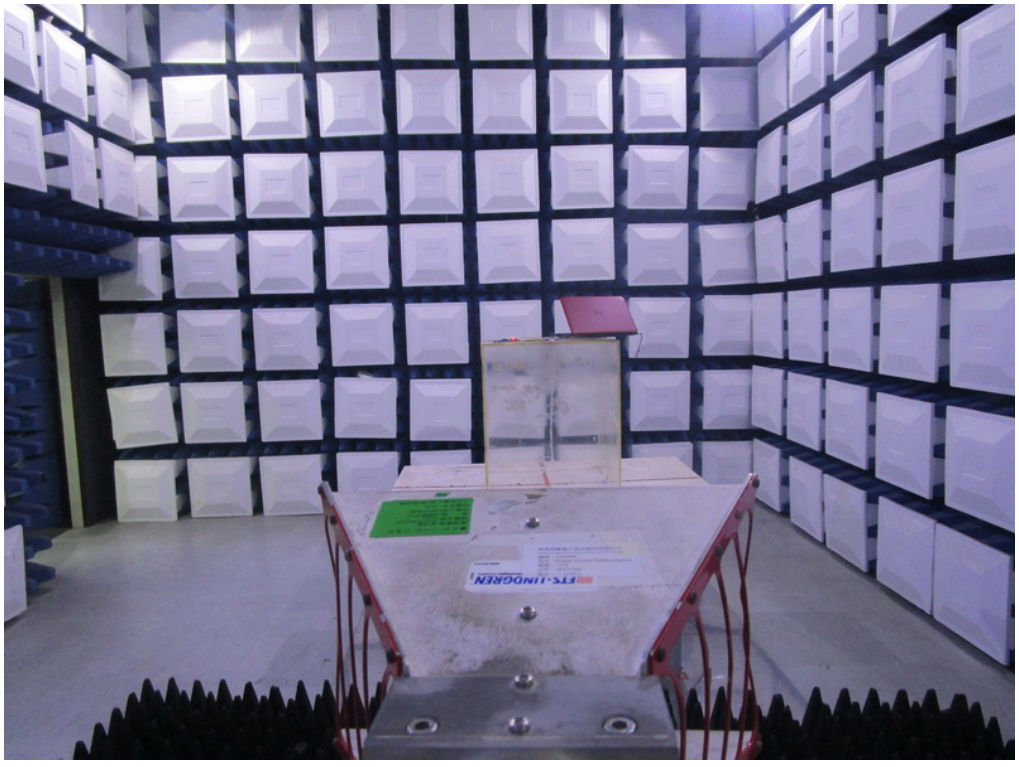

Radiated Measurement Photos

Above 1000MHz_ AVI4102VIA

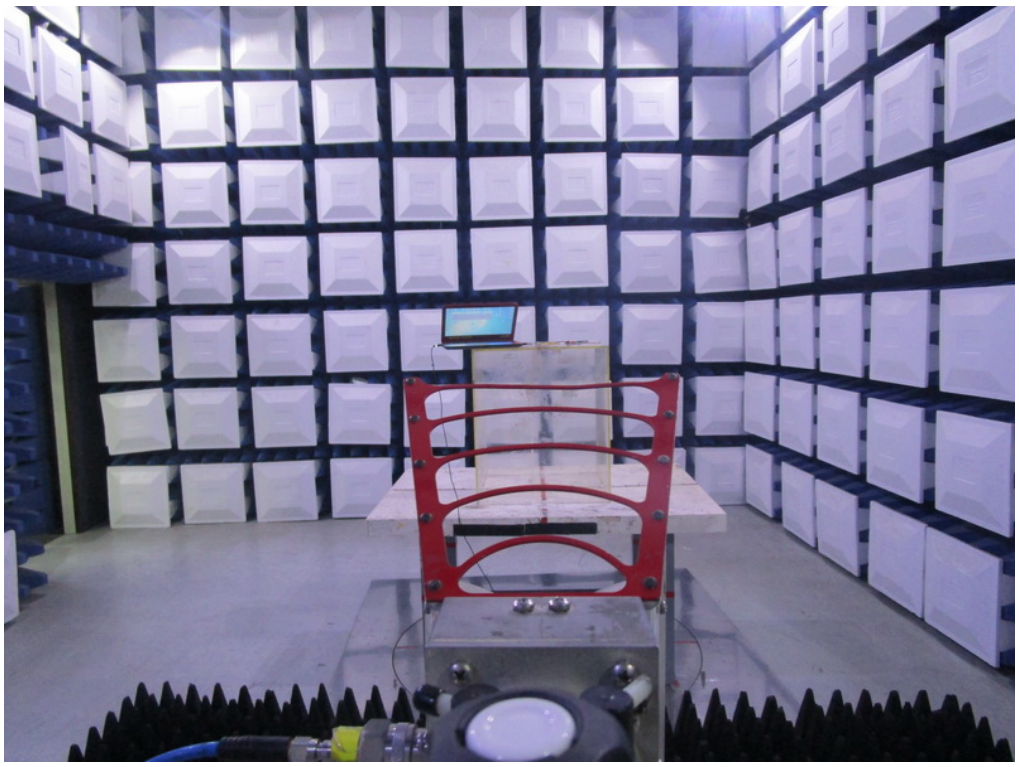

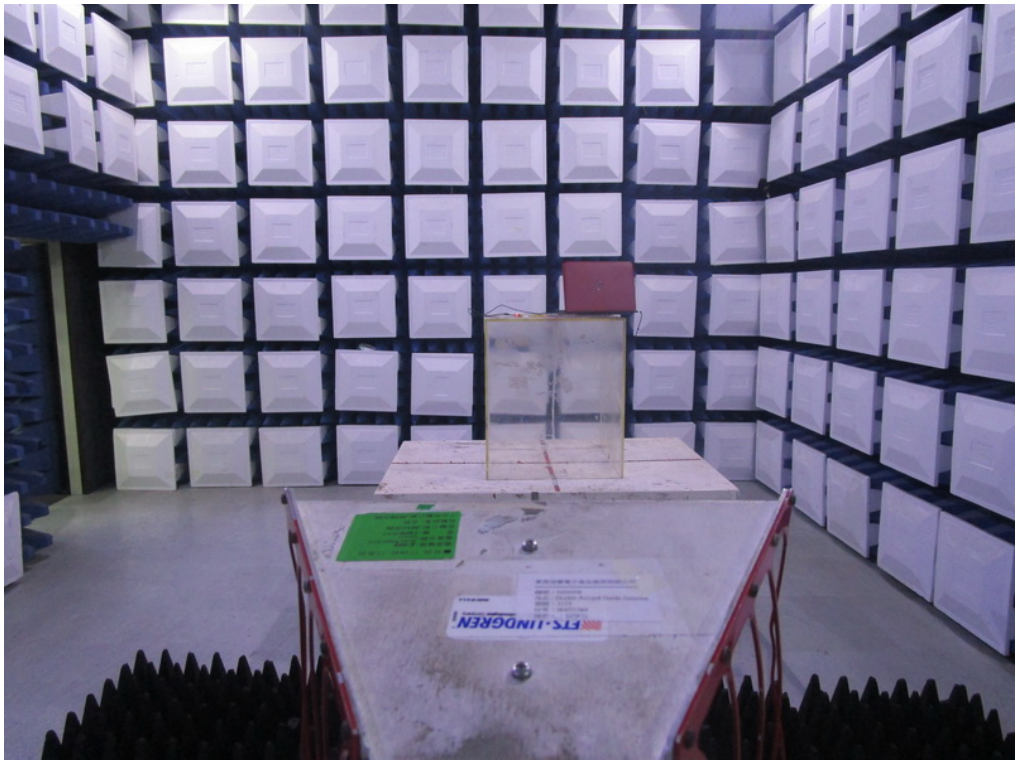

APPENDIX A - CONDUCTED EMISSION

Test Mode:	TX Mode_ AVI4101VIA

Line

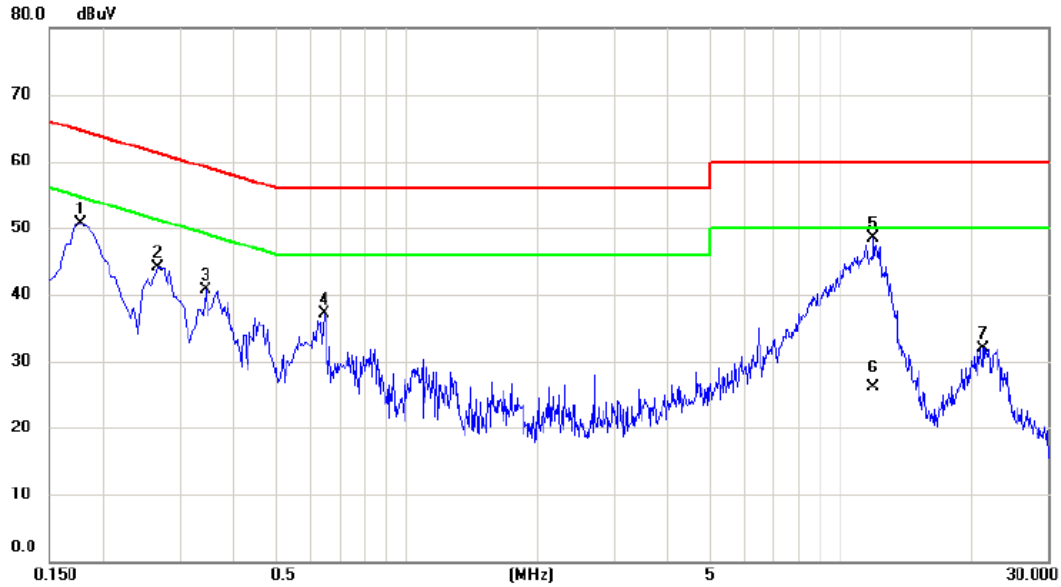

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1770	40.98	9.78	50.76	64.63	-13.87	peak	
2		0.2670	34.25	9.76	44.01	61.21	-17.20	peak	
3		0.3435	30.90	9.79	40.69	59.12	-18.43	peak	
4		0.6450	27.35	9.81	37.16	56.00	-18.84	peak	
5	*	11.8725	38.14	10.42	48.56	60.00	-11.44	peak	
6		11.8725	15.60	10.42	26.02	50.00	-23.98	AVG	
7		21.3315	21.24	10.68	31.92	60.00	-28.08	peak	

Test Mode:	TX Mode_ AVI4101VIA

Neutral

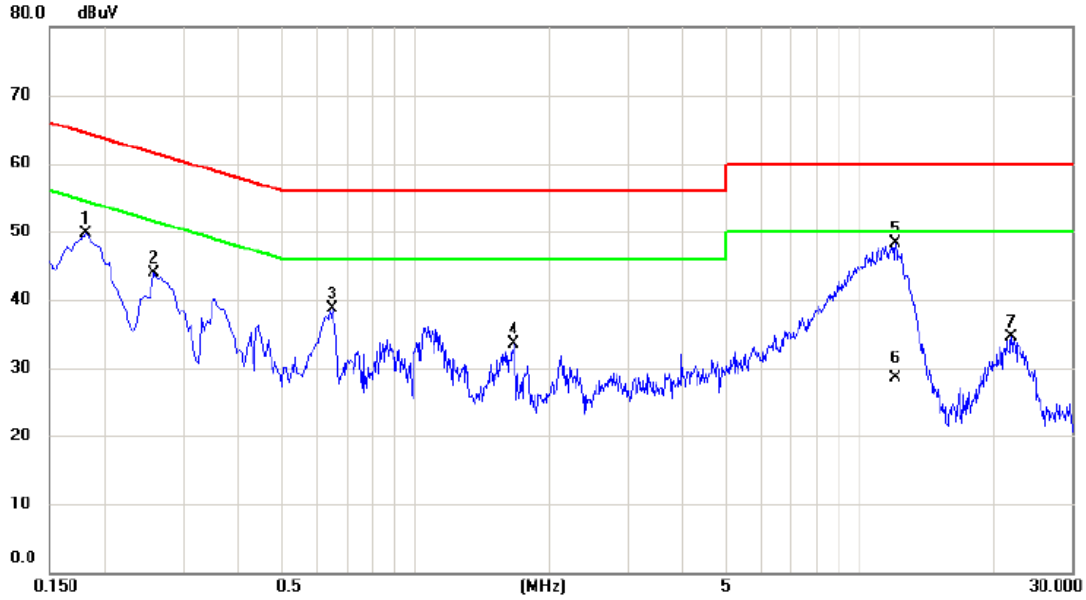

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1815	40.01	9.68	49.69	64.42	-14.73	peak	
2		0.2580	34.30	9.67	43.97	61.50	-17.53	peak	
3		0.6495	28.95	9.71	38.66	56.00	-17.34	peak	
4		1.6620	23.68	9.81	33.49	56.00	-22.51	peak	
5	*	12.0165	37.88	10.41	48.29	60.00	-11.71	peak	
6		12.0165	18.10	10.41	28.51	50.00	-21.49	AVG	
7		21.8490	23.68	10.82	34.50	60.00	-25.50	peak	

Test Mode:	TX Mode_ AVI4102VIA

Line

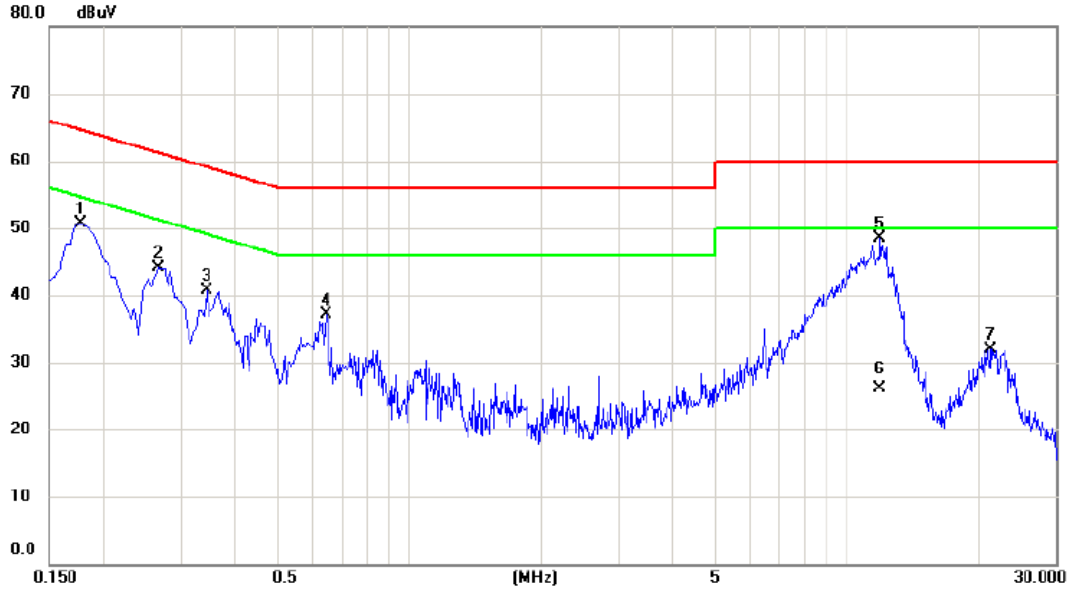

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1770	40.98	9.78	50.76	64.63	-13.87	peak	
2		0.2670	34.25	9.76	44.01	61.21	-17.20	peak	
3		0.3435	30.90	9.79	40.69	59.12	-18.43	peak	
4		0.6450	27.35	9.81	37.16	56.00	-18.84	peak	
5	*	11.8725	38.14	10.42	48.56	60.00	-11.44	peak	
6		11.8725	15.60	10.42	26.02	50.00	-23.98	AVG	
7		21.3315	21.24	10.68	31.92	60.00	-28.08	peak	

Test Mode:	TX Mode_ AVI4102VIA

Neutral

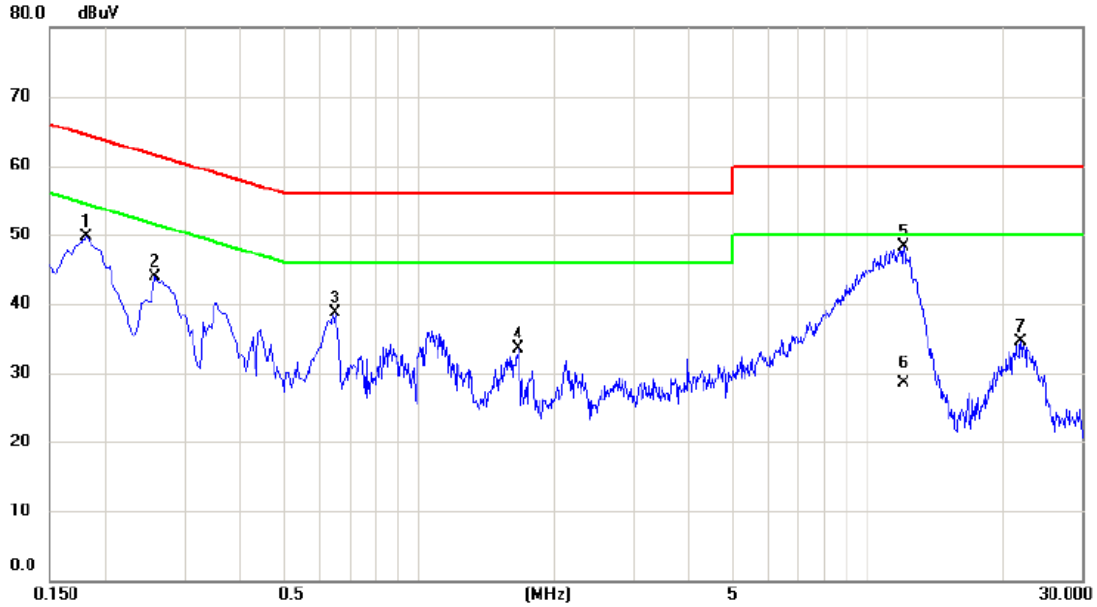

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1815	40.01	9.68	49.69	64.42	-14.73	peak	
2		0.2580	34.30	9.67	43.97	61.50	-17.53	peak	
3		0.6495	28.95	9.71	38.66	56.00	-17.34	peak	
4		1.6620	23.68	9.81	33.49	56.00	-22.51	peak	
5	*	12.0165	37.88	10.41	48.29	60.00	-11.71	peak	
6		12.0165	18.10	10.41	28.51	50.00	-21.49	AVG	
7		21.8490	23.68	10.82	34.50	60.00	-25.50	peak	

APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX Mode_ AVI4101VIA

Ant 0°

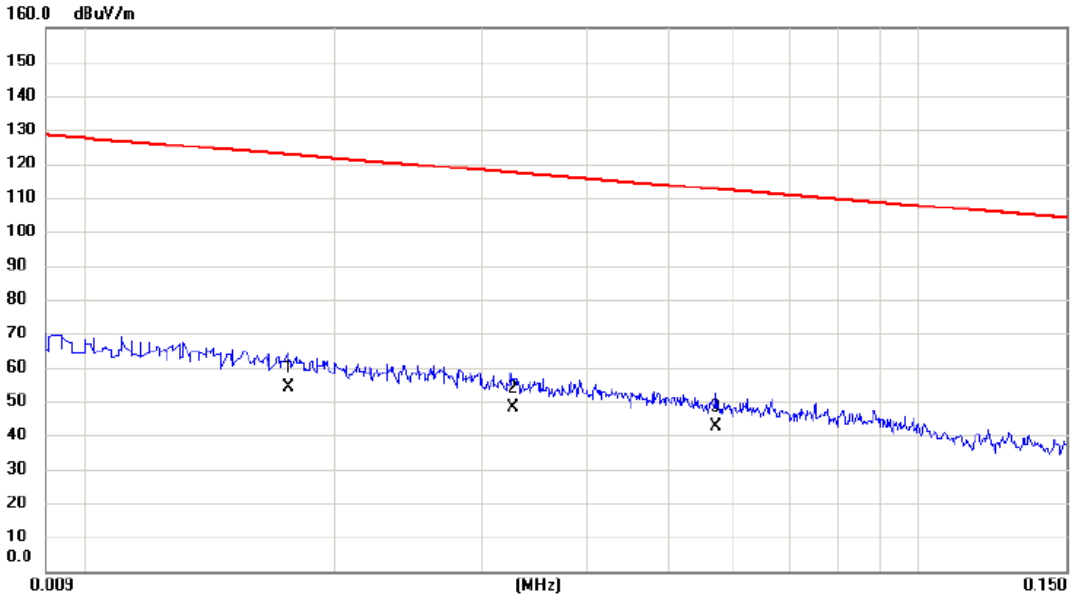

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0176	34.13	19.93	54.06	122.69	-68.63	AVG	
2		0.0326	29.07	19.24	48.31	117.34	-69.03	AVG	
3		0.0571	23.94	18.59	42.53	112.47	-69.94	AVG	

Test Mode:	TX Mode_ AVI4101VIA

Ant 0°

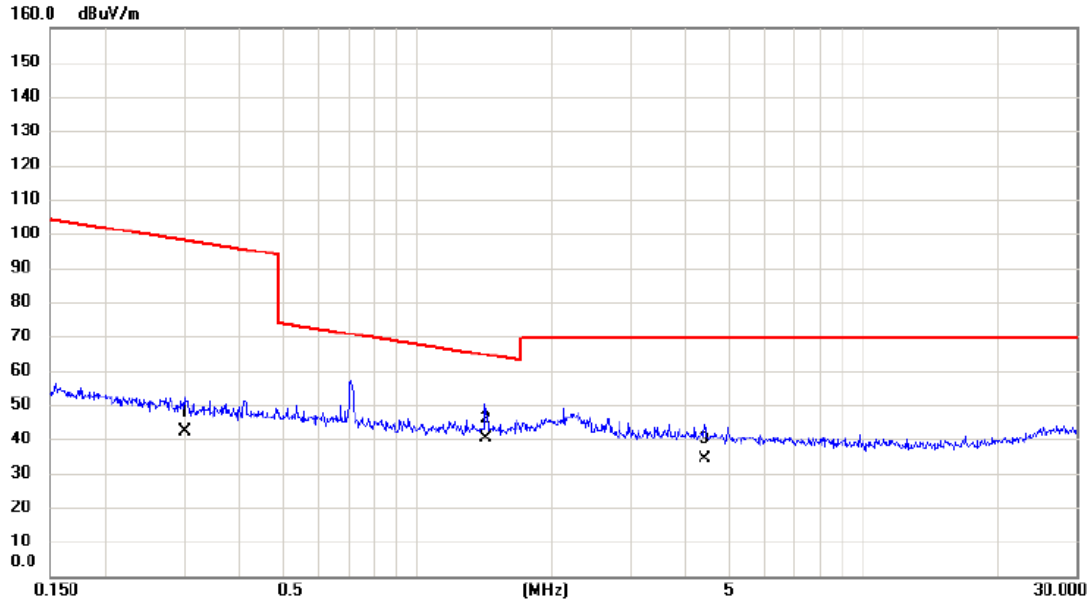

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.3003	25.50	16.62	42.12	98.05	-55.93	AVG	
2	*	1.4182	24.58	15.73	40.31	64.57	-24.26	QP	
3		4.4071	19.37	14.72	34.09	69.54	-35.45	QP	

Test Mode:	TX Mode_ AVI4101VIA

Ant 90°

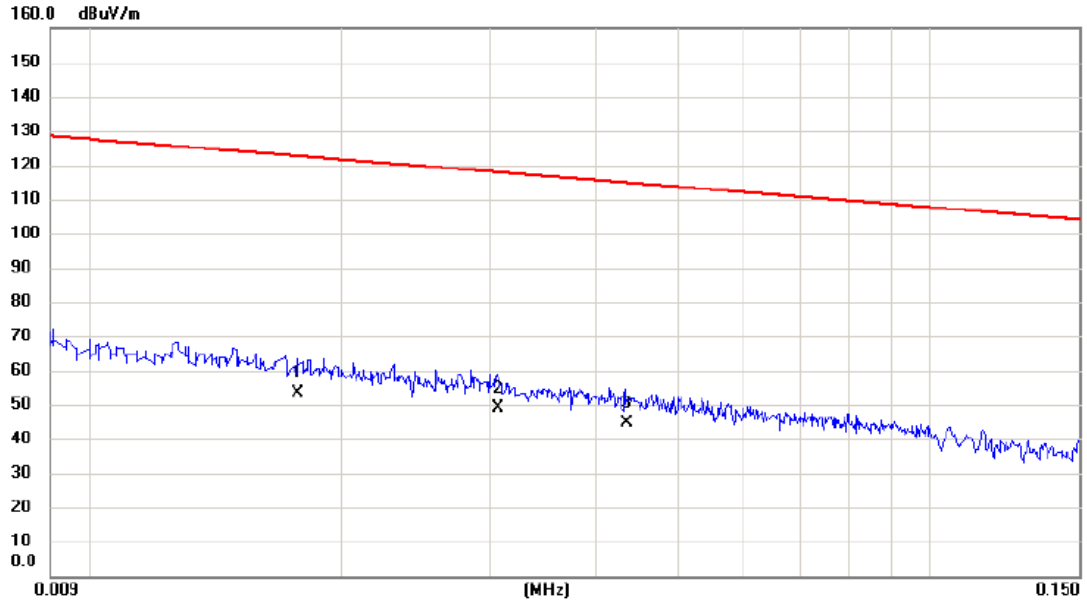

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0177	33.67	19.92	53.59	122.65	-69.06	AVG	
2		0.0306	29.51	19.30	48.81	117.89	-69.08	AVG	
3		0.0435	25.73	18.91	44.64	114.84	-70.20	AVG	

Test Mode:	TX Mode_ AVI4101VIA

Ant 90°

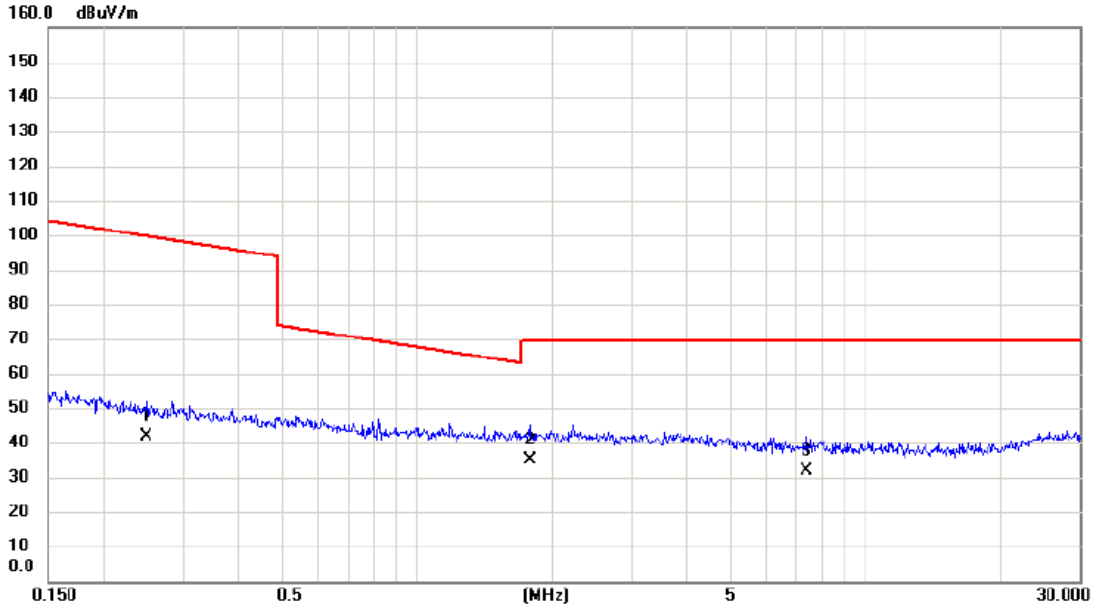

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2481	25.31	16.67	41.98	99.71	-57.73	AVG	
2	*	1.7810	19.29	15.60	34.89	69.54	-34.65	QP	
3		7.3680	17.61	14.08	31.69	69.54	-37.85	QP	

Test Mode:	TX Mode_ AVI4102VIA

Ant 0°

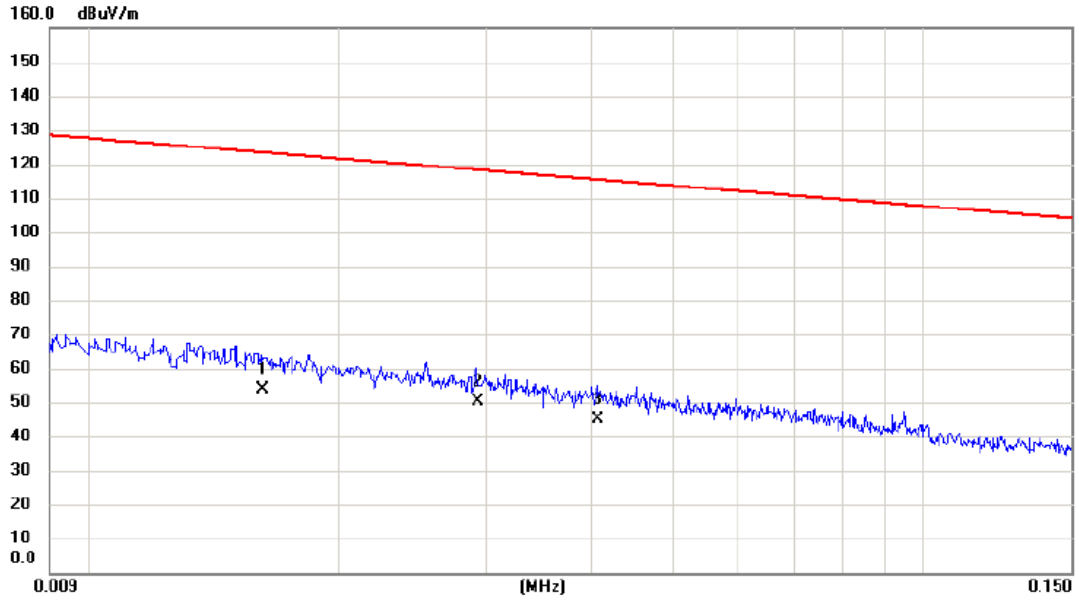

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0162	33.89	20.11	54.00	123.41	-69.41	AVG	
2	*	0.0293	30.72	19.34	50.06	118.27	-68.21	AVG	
3		0.0408	26.11	19.00	45.11	115.39	-70.28	AVG	

Test Mode:	TX Mode_ AVI4102VIA

Ant 0°

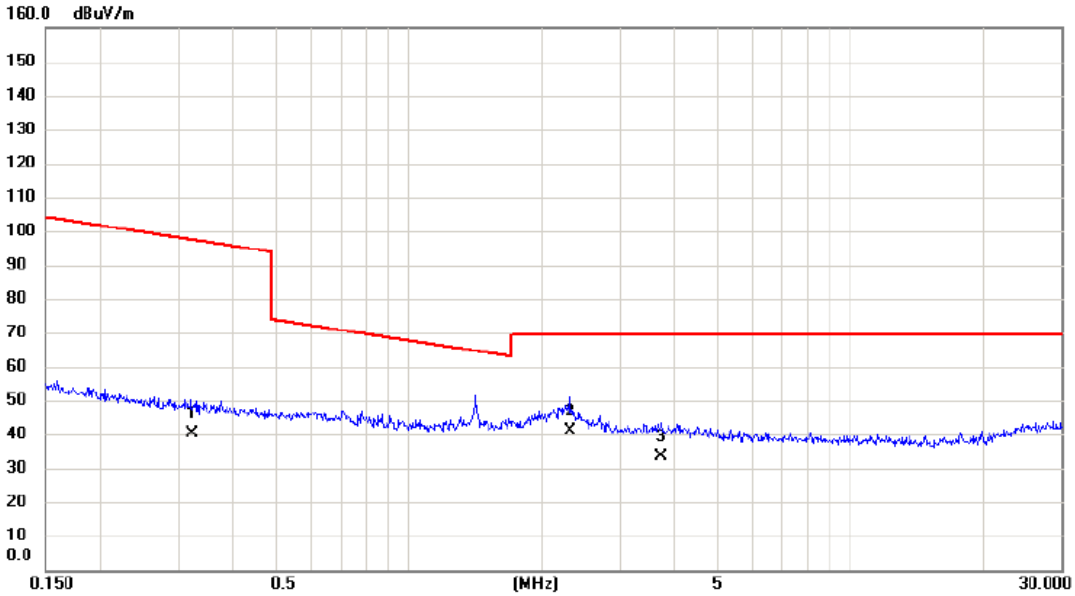

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.3217	23.69	16.60	40.29	97.46	-57.17	AVG	
2	*	2.3090	25.59	15.43	41.02	69.54	-28.52	QP	
3		3.7198	18.27	15.02	33.29	69.54	-36.25	QP	

Test Mode:	TX Mode_ AVI4102VIA

Ant 90°

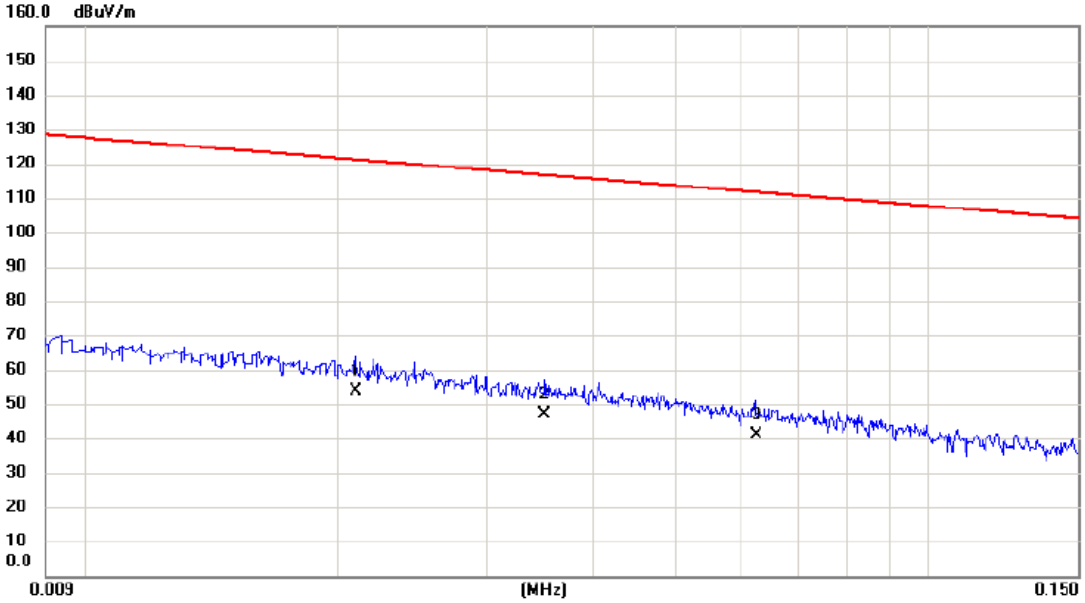

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0210	34.31	19.59	53.90	121.16	-67.26	AVG	
2		0.0351	27.69	19.17	46.86	116.70	-69.84	AVG	
3		0.0624	22.40	18.48	40.88	111.70	-70.82	AVG	

Test Mode:	TX Mode_ AVI4102VIA

Ant 90°

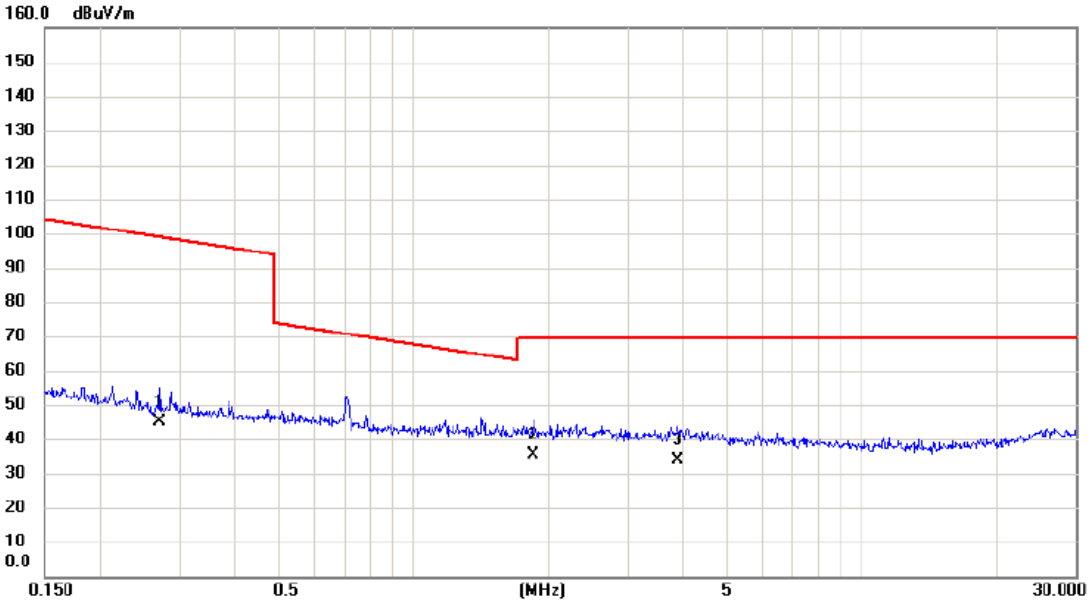

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2714	28.45	16.64	45.09	98.93	-53.84	AVG	
2	*	1.8483	19.65	15.57	35.22	69.54	-34.32	QP	
3		3.8808	18.78	14.99	33.77	69.54	-35.77	QP	

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX 2402MHz _CH00_1Mbps_ AVI4101VIA

Vertical

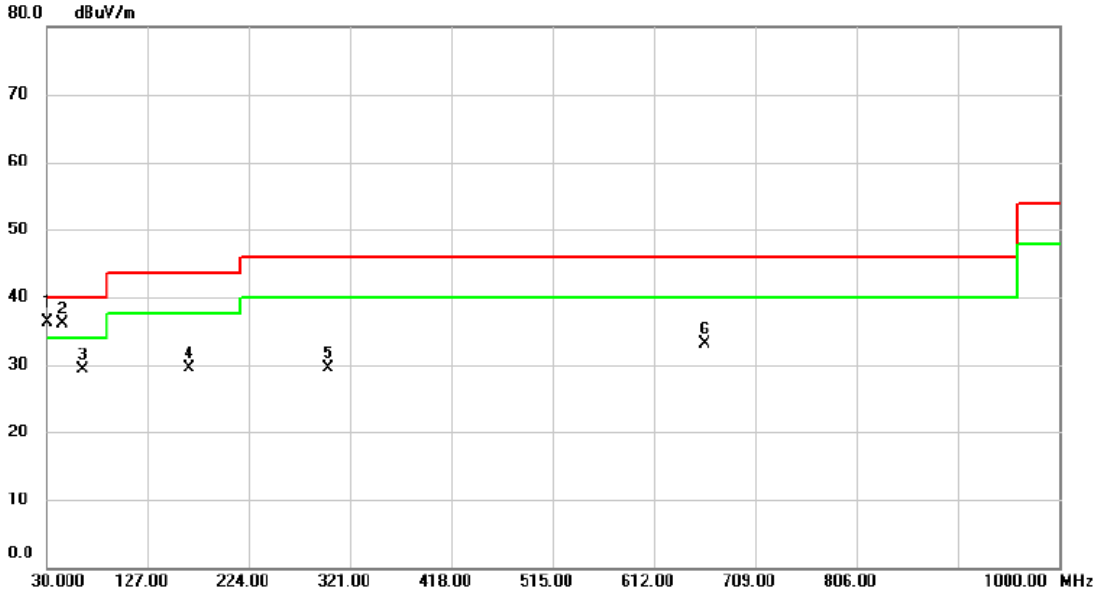

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	30.970	50.13	-13.87	36.26	40.00	-3.74	QP	
2	!	44.550	48.06	-11.94	36.12	40.00	-3.88	peak	
3		63.950	43.07	-13.69	29.38	40.00	-10.62	peak	
4		165.800	40.84	-11.29	29.55	43.50	-13.95	peak	
5		299.660	40.14	-10.64	29.50	46.00	-16.50	peak	
6		660.500	34.98	-1.93	33.05	46.00	-12.95	peak	

Test Mode:	TX 2402MHz _CH00_1Mbps_ AVI4101VIA

Horizontal

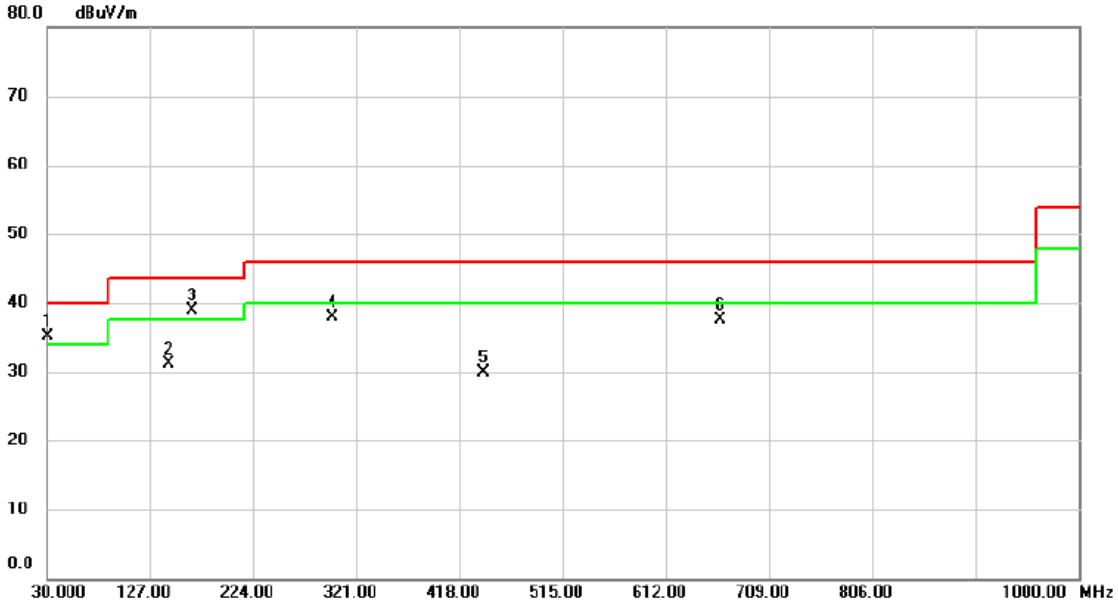

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	30.970	48.96	-13.87	35.09	40.00	-4.91	peak	
2		144.460	43.45	-12.26	31.19	43.50	-12.31	peak	
3	*	166.770	50.07	-11.25	38.82	43.50	-4.68	peak	
4		298.690	48.60	-10.75	37.85	46.00	-8.15	peak	
5		440.310	37.07	-7.11	29.96	46.00	-16.04	peak	
6		663.410	39.45	-1.85	37.60	46.00	-8.40	peak	

Test Mode:	TX 2440MHz _CH19_1Mbps_ AVI4101VIA

Vertical

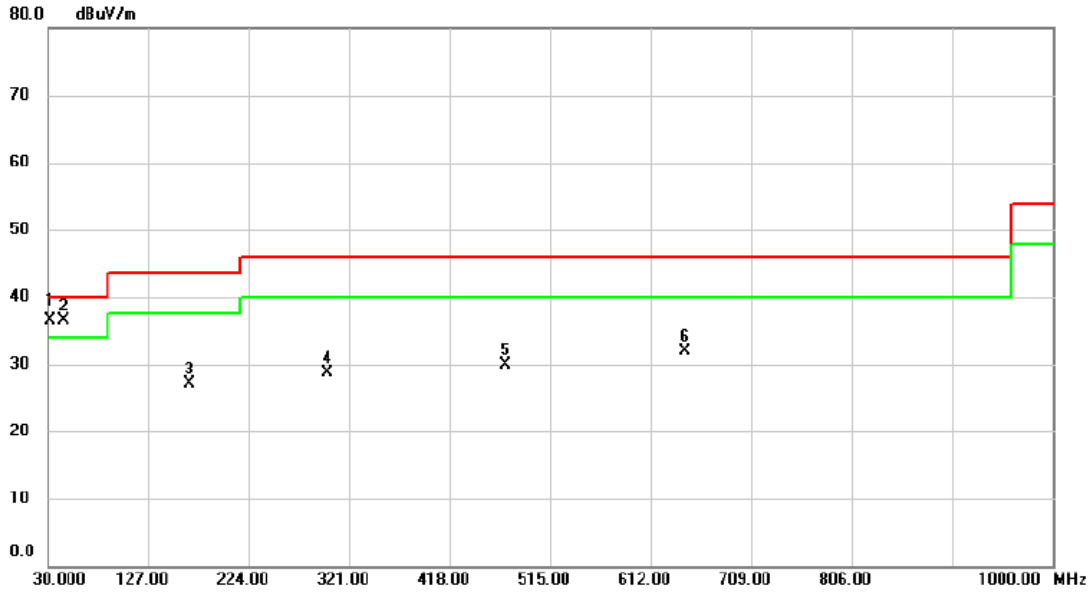

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	31.940	50.24	-13.72	36.52	40.00	-3.48	QP	
2	!	44.550	48.46	-11.94	36.52	40.00	-3.48	peak	
3		166.770	38.26	-11.25	27.01	43.50	-16.49	peak	
4		299.660	39.42	-10.64	28.78	46.00	-17.22	peak	
5		471.350	36.36	-6.39	29.97	46.00	-16.03	peak	
6		644.980	34.29	-2.34	31.95	46.00	-14.05	peak	

Test Mode:	TX 2440MHz _CH19_1Mbps_ AVI4101VIA

Horizontal

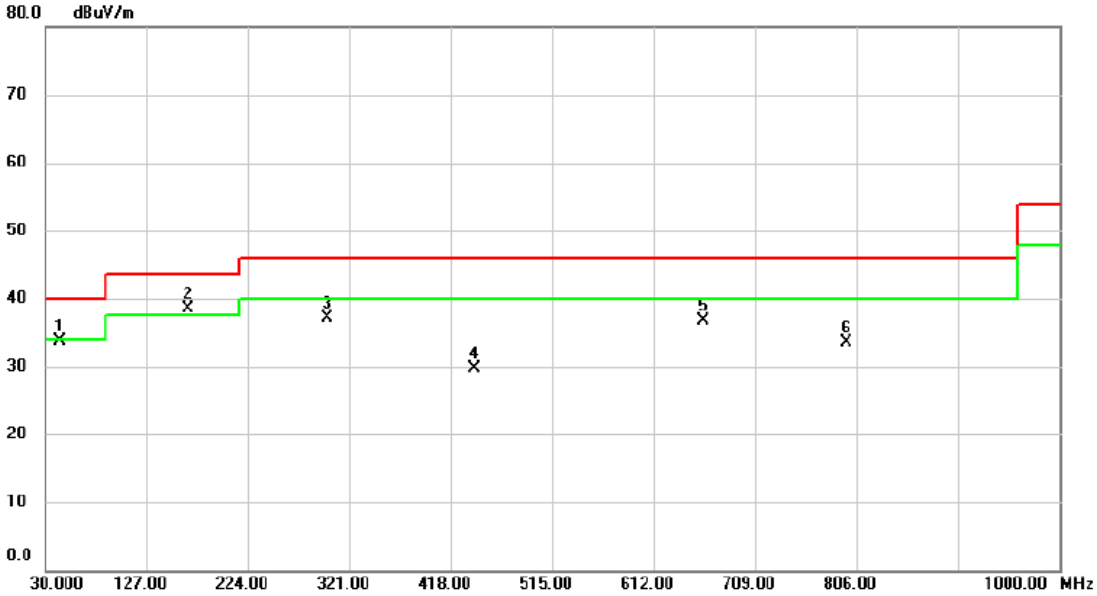

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		43.580	45.85	-12.11	33.74	40.00	-6.26	peak	
2	*	166.770	49.82	-11.25	38.57	43.50	-4.93	peak	
3		299.660	47.75	-10.64	37.11	46.00	-8.89	peak	
4		440.310	36.86	-7.11	29.75	46.00	-16.25	peak	
5		658.560	38.73	-1.98	36.75	46.00	-9.25	peak	
6		796.300	32.72	0.80	33.52	46.00	-12.48	peak	

Test Mode:	TX 2480MHz _CH39_1Mbps_ AVI4101VIA

Vertical

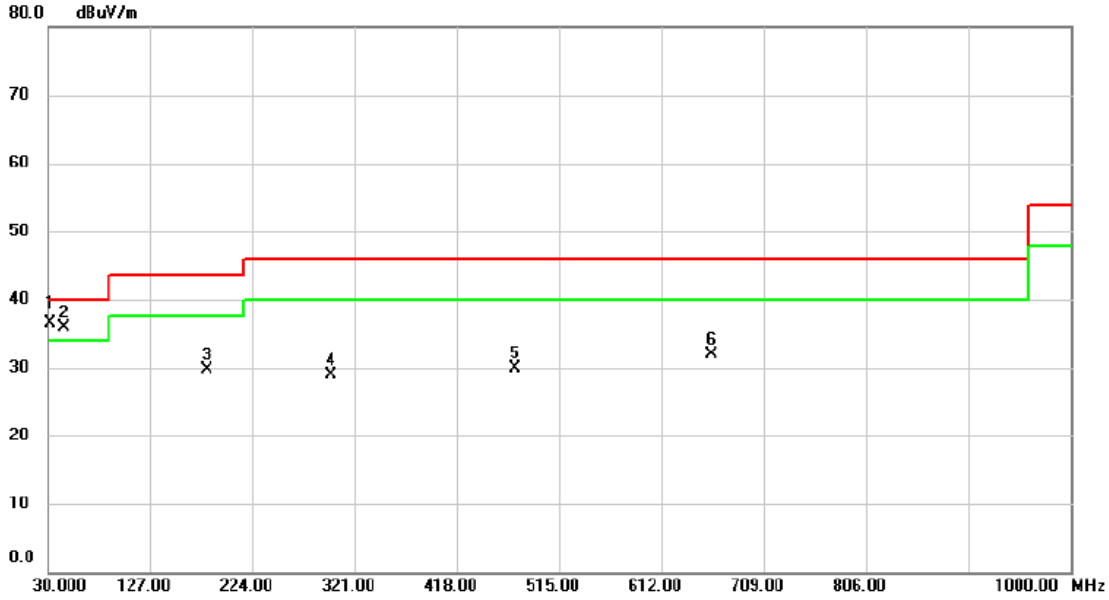

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	31.940	50.29	-13.72	36.57	40.00	-3.43	QP	
2	!	44.550	47.92	-11.94	35.98	40.00	-4.02	peak	
3		180.350	41.20	-11.43	29.77	43.50	-13.73	peak	
4		298.690	39.74	-10.75	28.99	46.00	-17.01	peak	
5		473.290	36.24	-6.34	29.90	46.00	-16.10	peak	
6		658.560	33.92	-1.98	31.94	46.00	-14.06	peak	

Test Mode:	TX 2480MHz _CH39_1Mbps_ AVI4101VIA

Horizontal

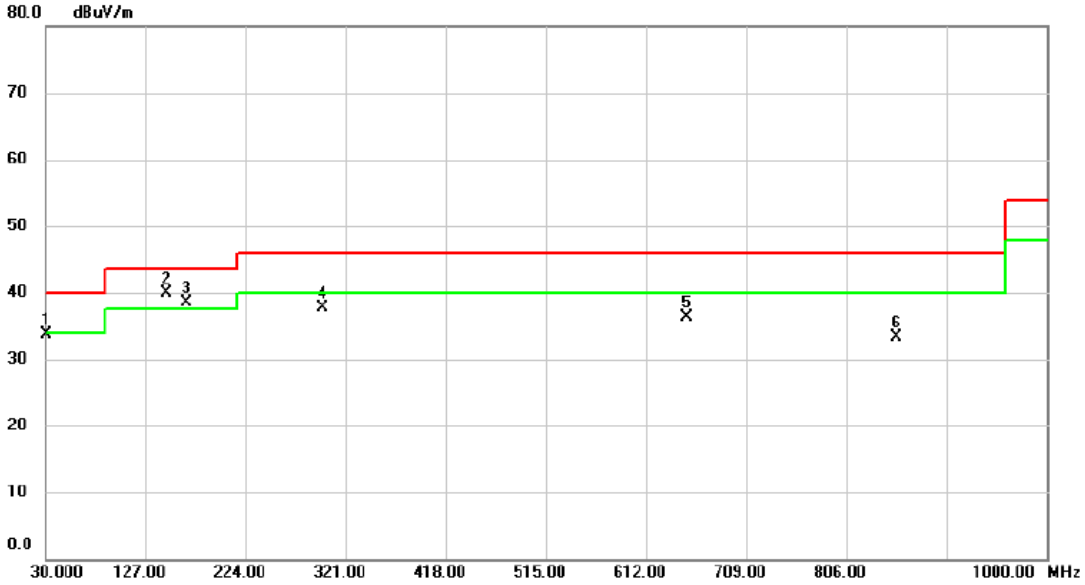

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		30.970	47.65	-13.87	33.78	40.00	-6.22	peak	
2	*	146.400	52.09	-12.17	39.92	43.50	-3.58	peak	
3	!	165.800	49.89	-11.29	38.60	43.50	-4.90	peak	
4		298.690	48.36	-10.75	37.61	46.00	-8.39	peak	
5		651.770	38.50	-2.14	36.36	46.00	-9.64	peak	
6		854.500	31.25	2.03	33.28	46.00	-12.72	peak	

Test Mode:	TX 2402MHz _CH00_1Mbps_ AVI4102VIA

Vertical

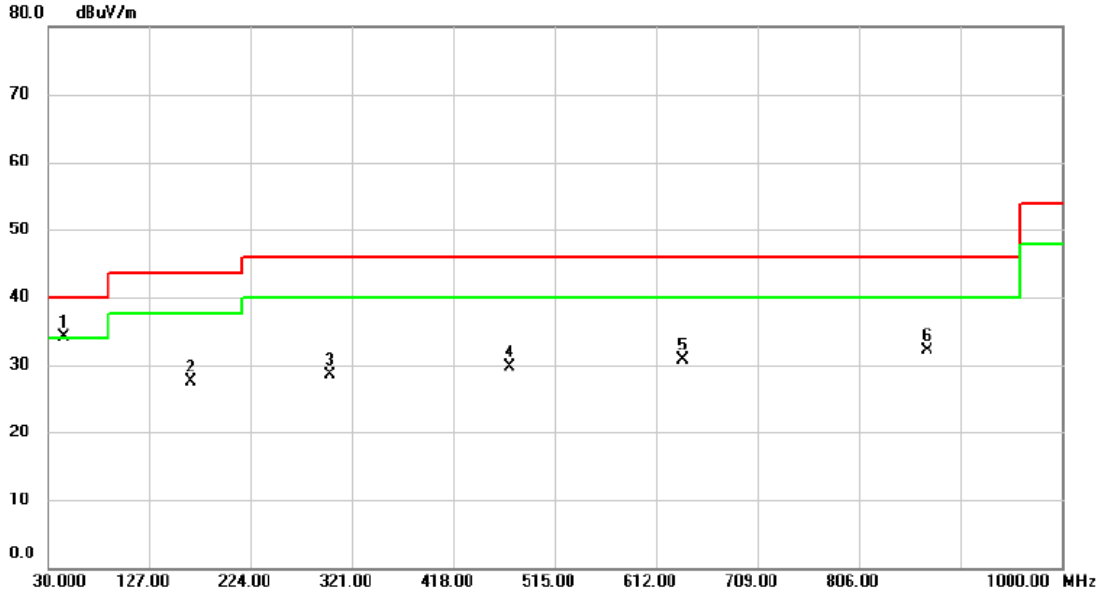

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	44.550	46.06	-11.94	34.12	40.00	-5.88	peak	
2		165.800	38.84	-11.29	27.55	43.50	-15.95	peak	
3		299.660	39.14	-10.64	28.50	46.00	-17.50	peak	
4		471.350	36.14	-6.39	29.75	46.00	-16.25	peak	
5		637.220	33.35	-2.57	30.78	46.00	-15.22	peak	
6		870.990	29.71	2.34	32.05	46.00	-13.95	peak	

Test Mode:	TX 2402MHz _CH00_1Mbps_ AVI4102VIA

Horizontal

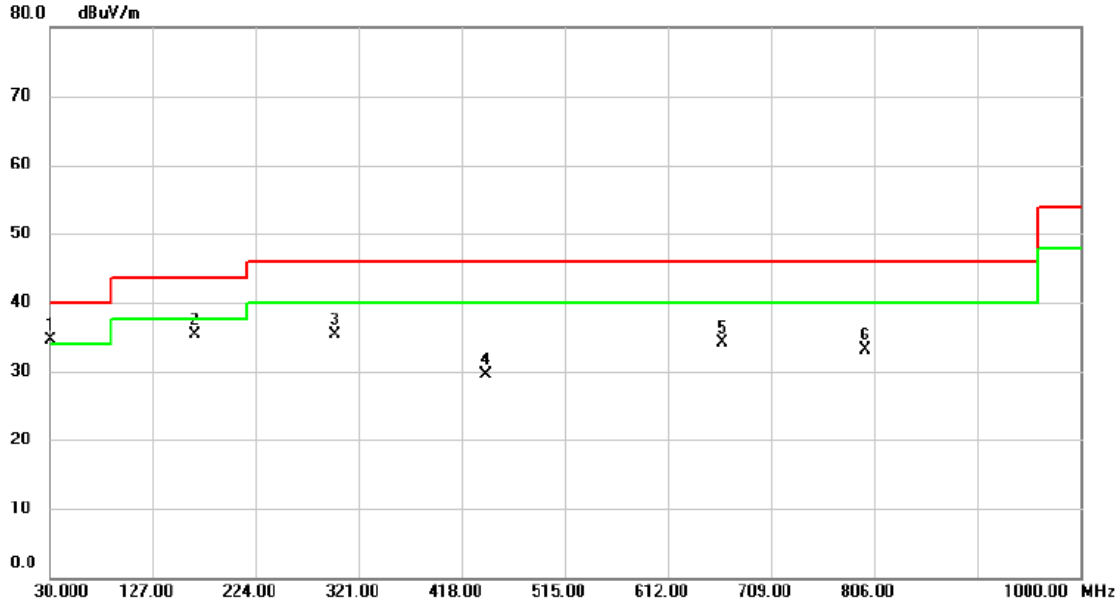

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	30.970	48.46	-13.87	34.59	40.00	-5.41	peak	
2		166.770	46.57	-11.25	35.32	43.50	-8.18	peak	
3		298.690	46.10	-10.75	35.35	46.00	-10.65	peak	
4		440.310	36.57	-7.11	29.46	46.00	-16.54	peak	
5		663.410	35.95	-1.85	34.10	46.00	-11.90	peak	
6		797.270	32.25	0.82	33.07	46.00	-12.93	peak	

Test Mode:	TX 2440MHz _CH19_1Mbps_ AVI4102VIA

Vertical

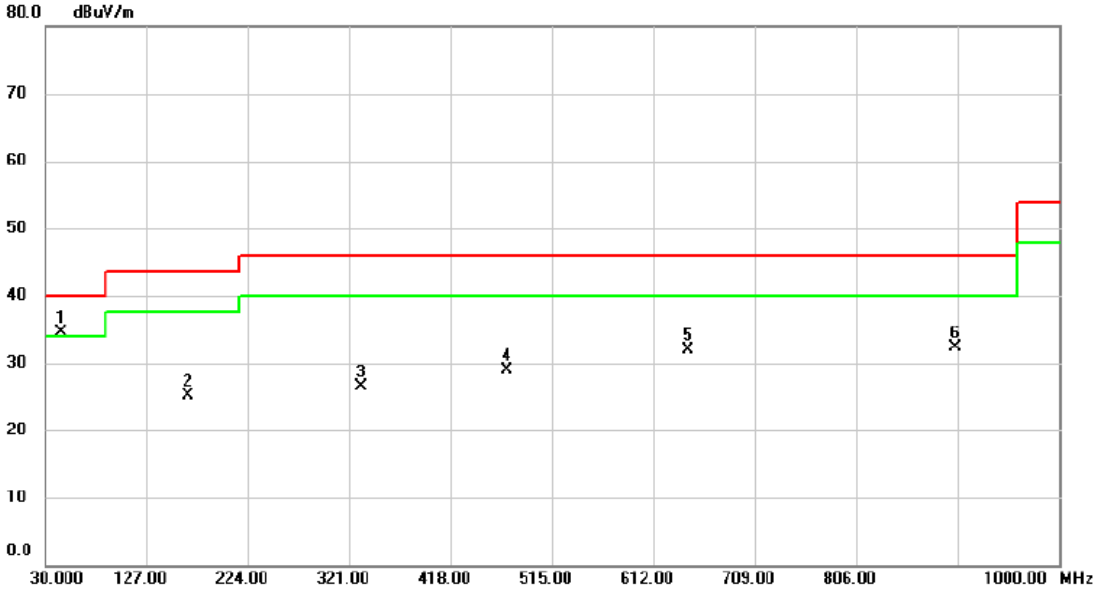

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	44.550	46.46	-11.94	34.52	40.00	-5.48	peak	
2		166.770	36.26	-11.25	25.01	43.50	-18.49	peak	
3		331.670	36.31	-9.86	26.45	46.00	-19.55	peak	
4		471.350	35.36	-6.39	28.97	46.00	-17.03	peak	
5		644.980	34.29	-2.34	31.95	46.00	-14.05	peak	
6		901.060	29.40	2.91	32.31	46.00	-13.69	peak	

Test Mode:	TX 2440MHz _CH19_1Mbps_ AVI4102VIA

Horizontal

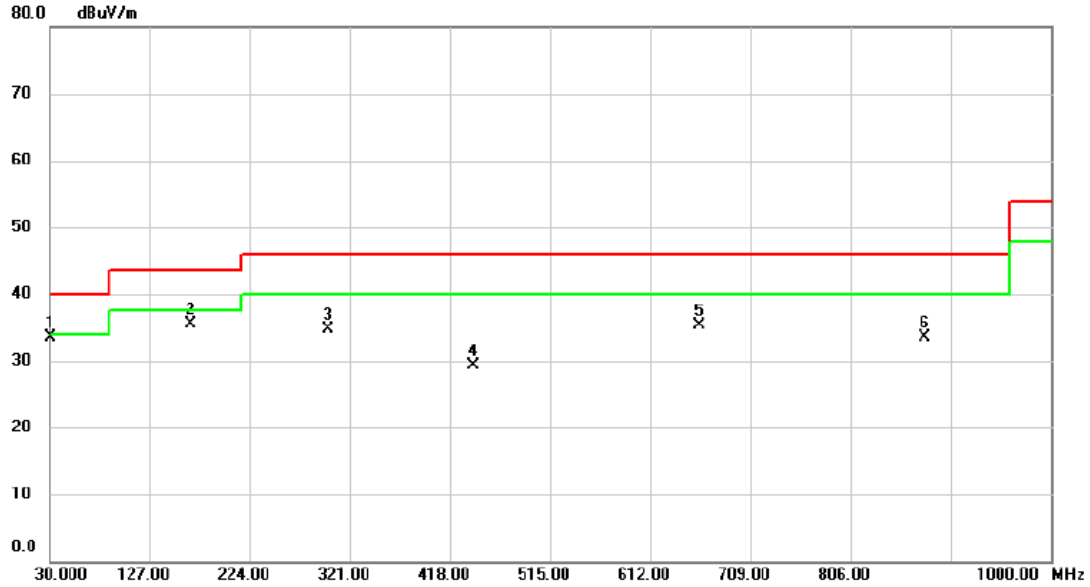

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	30.970	47.28	-13.87	33.41	40.00	-6.59	peak	
2		166.770	46.82	-11.25	35.57	43.50	-7.93	peak	
3		299.660	45.25	-10.64	34.61	46.00	-11.39	peak	
4		440.310	36.36	-7.11	29.25	46.00	-16.75	peak	
5		658.560	37.23	-1.98	35.25	46.00	-10.75	peak	
6		877.780	31.05	2.48	33.53	46.00	-12.47	peak	

Test Mode:	TX 2480MHz _CH39_1Mbps_ AVI4102VIA

Vertical

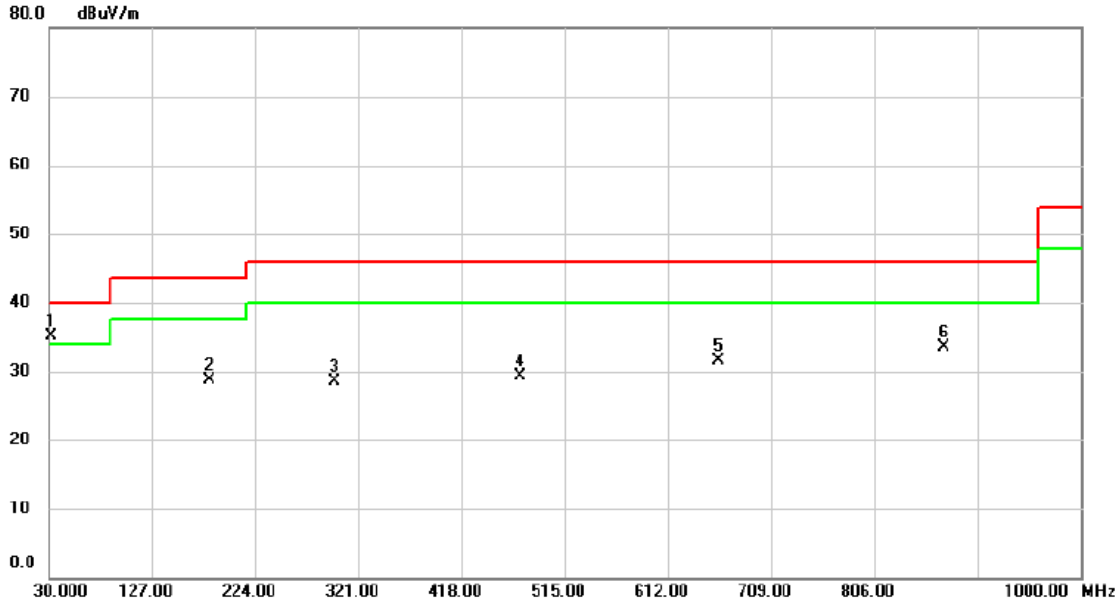

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	31.940	48.78	-13.72	35.06	40.00	-4.94	peak	
2		180.350	40.20	-11.43	28.77	43.50	-14.73	peak	
3		298.690	39.24	-10.75	28.49	46.00	-17.51	peak	
4		473.290	35.74	-6.34	29.40	46.00	-16.60	peak	
5		658.560	33.42	-1.98	31.44	46.00	-14.56	peak	
6		870.990	31.25	2.34	33.59	46.00	-12.41	peak	

Test Mode:	TX 2480MHz _CH39_1Mbps_ AVI4102VIA

Horizontal

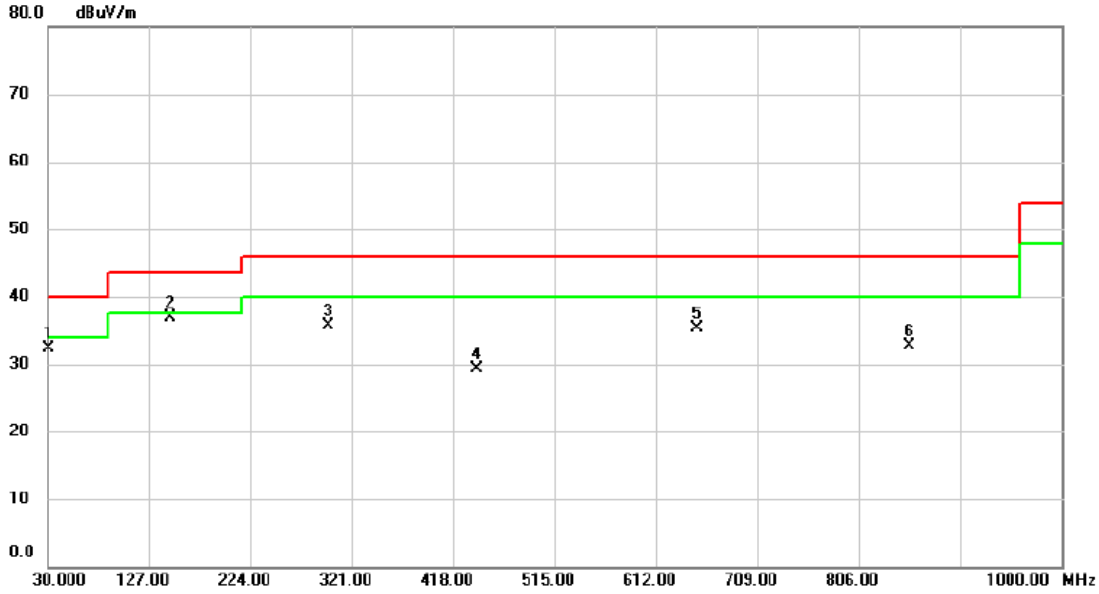

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		30.970	46.15	-13.87	32.28	40.00	-7.72	peak	
2	*	146.400	49.09	-12.17	36.92	43.50	-6.58	peak	
3		298.690	46.36	-10.75	35.61	46.00	-10.39	peak	
4		440.310	36.38	-7.11	29.27	46.00	-16.73	peak	
5		651.770	37.50	-2.14	35.36	46.00	-10.64	peak	
6		854.500	30.75	2.03	32.78	46.00	-13.22	peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4101VIA

Vertical

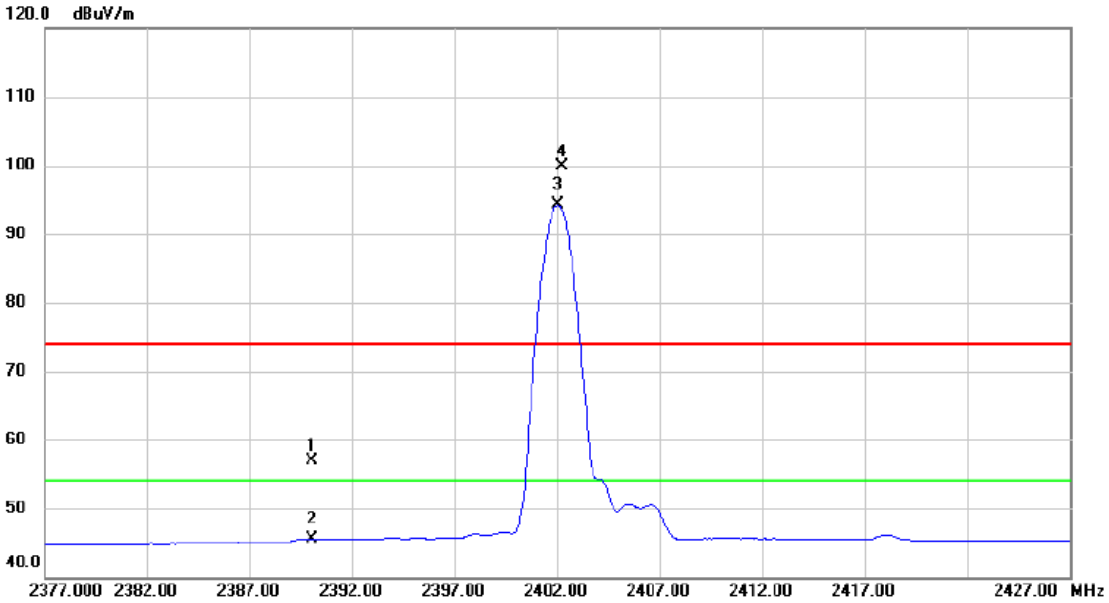

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.81	33.05	56.86	74.00	-17.14	peak	
2		2390.000	12.45	33.05	45.50	54.00	-8.50	AVG	
3	*	2402.050	61.11	33.11	94.22	54.00	40.22	AVG	No Limit
4	X	2402.250	66.84	33.11	99.95	74.00	25.95	peak	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4101VIA

Vertical

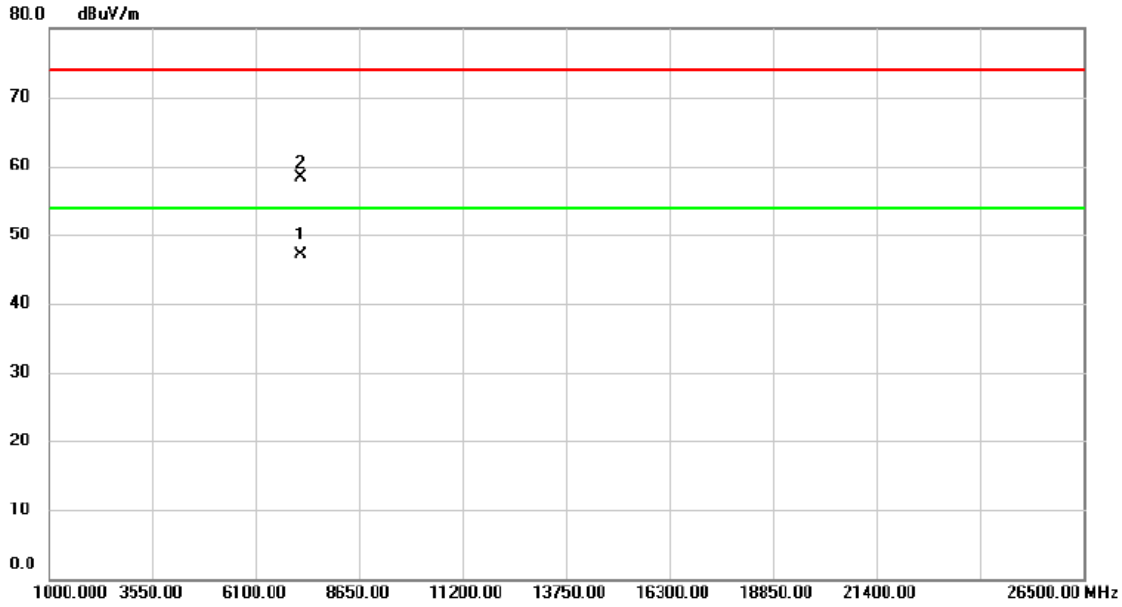

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7206.560	33.94	13.14	47.08	54.00	-6.92	AVG	
2		7206.810	45.21	13.14	58.35	74.00	-15.65	peak	

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4101VIA

Horizontal

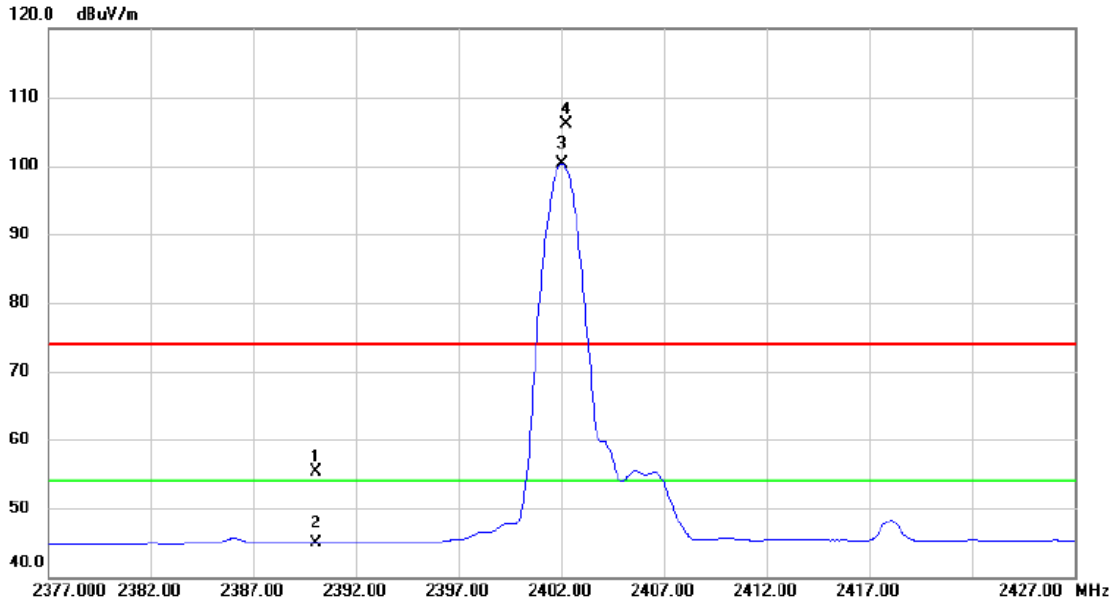

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.17	33.05	55.22	74.00	-18.78	peak	
2		2390.000	11.88	33.05	44.93	54.00	-9.07	AVG	
3	*	2402.050	67.25	33.11	100.36	54.00	46.36	AVG	No Limit
4	X	2402.250	72.96	33.11	106.07	74.00	32.07	peak	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4101VIA

Horizontal

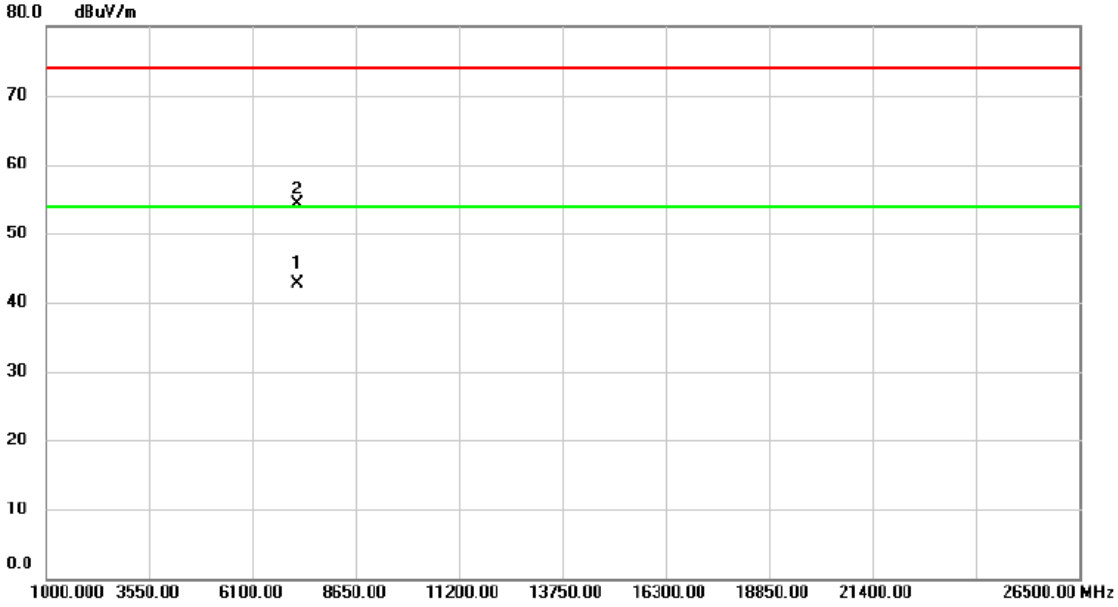

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7206.565	29.65	13.14	42.79	54.00	-11.21	AVG	
2		7206.845	41.20	13.14	54.34	74.00	-19.66	peak	

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4101VIA

Vertical

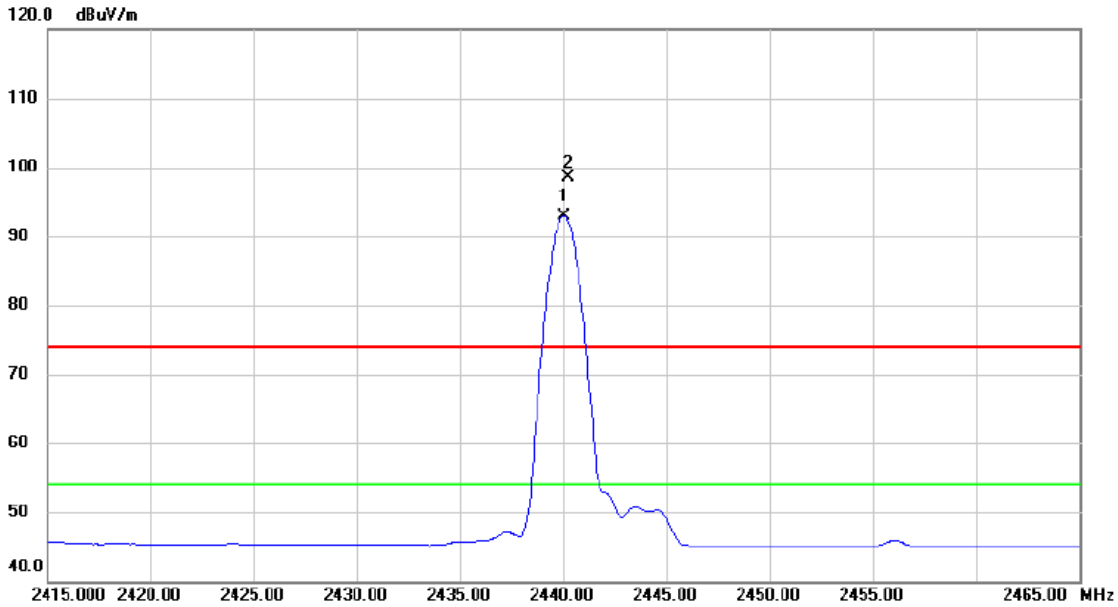

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2440.000	59.70	33.24	92.94	54.00	38.94	AVG	No Limit
2	X	2440.250	65.35	33.24	98.59	74.00	24.59	peak	No Limit

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4101VIA

Vertical

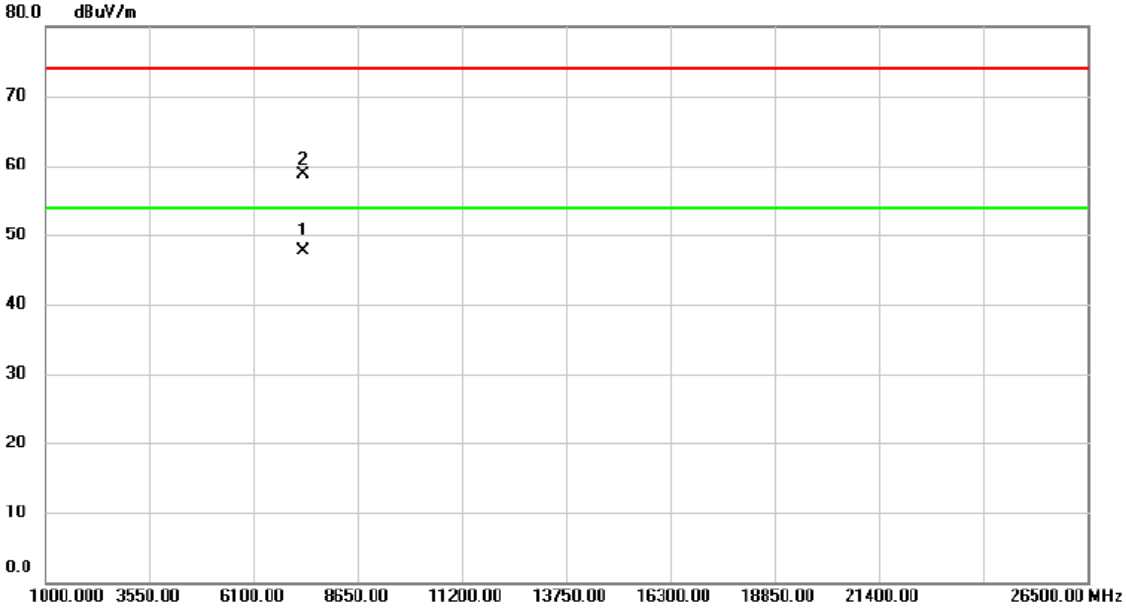

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7320.565	34.44	13.22	47.66	54.00	-6.34	AVG	
2		7320.625	45.47	13.22	58.69	74.00	-15.31	peak	

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4101VIA

Horizontal

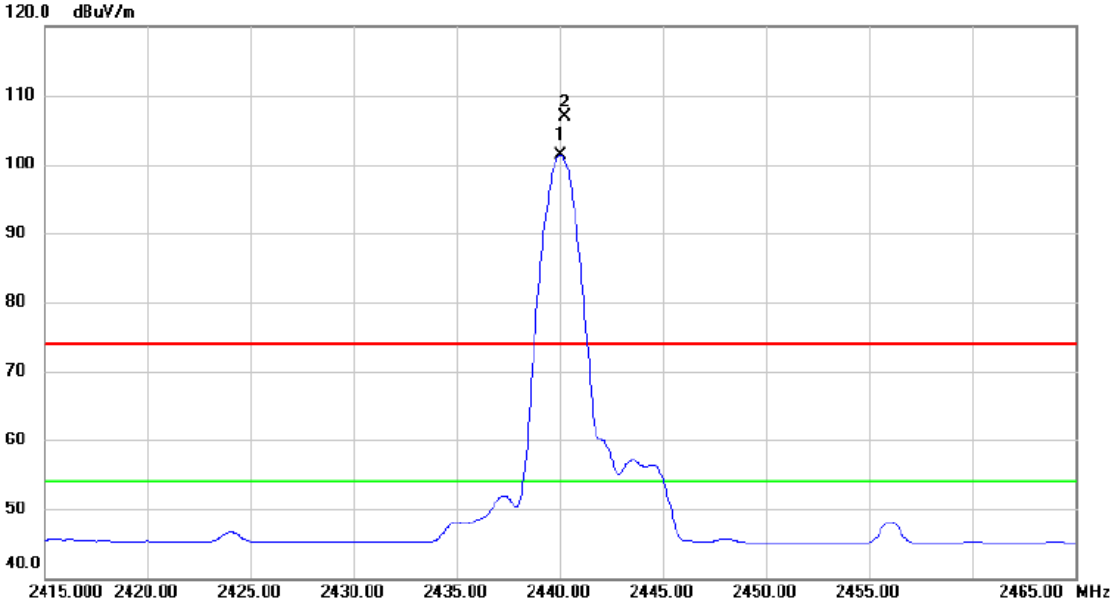

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2440.000	68.07	33.24	101.31	54.00	47.31	AVG	No Limit
2	X	2440.250	73.75	33.24	106.99	74.00	32.99	peak	No Limit

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4101VIA

Horizontal

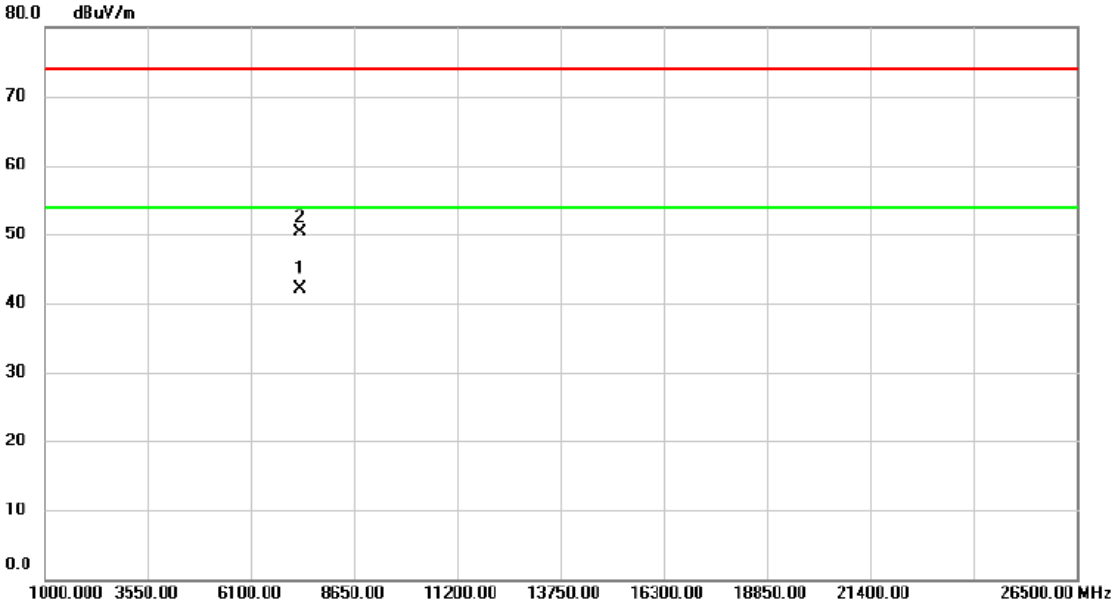

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7320.610	28.84	13.22	42.06	54.00	-11.94	AVG	
2		7320.705	37.13	13.22	50.35	74.00	-23.65	peak	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4101VIA

Vertical

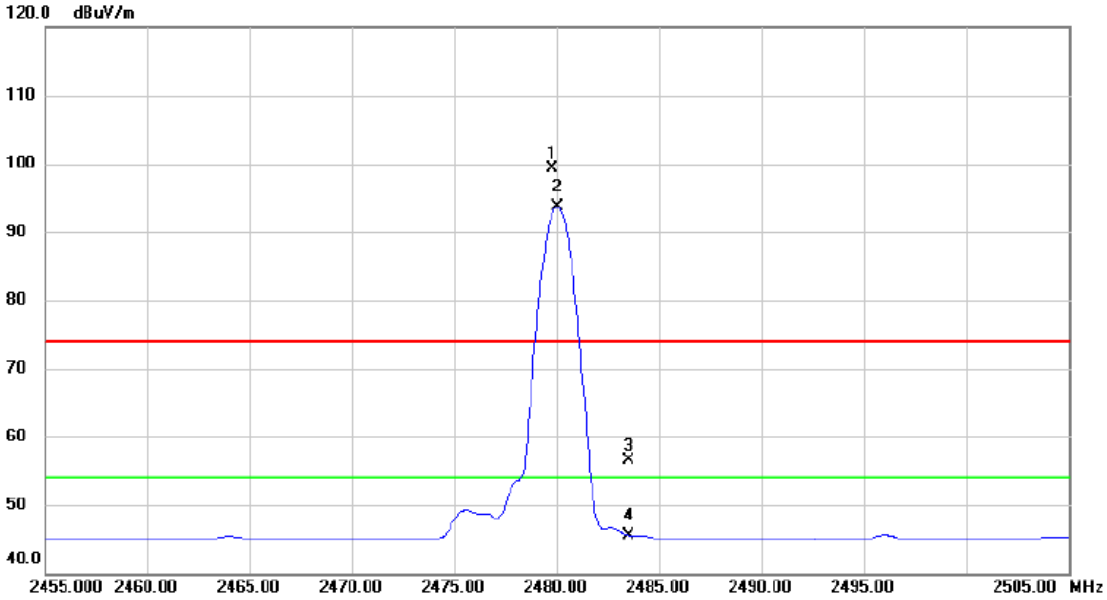

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.750	65.95	33.40	99.35	74.00	25.35	peak	No Limit
2	*	2480.000	60.33	33.40	93.73	54.00	39.73	AVG	No Limit
3		2483.500	23.11	33.41	56.52	74.00	-17.48	peak	
4		2483.500	12.15	33.41	45.56	54.00	-8.44	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4101VIA

Vertical

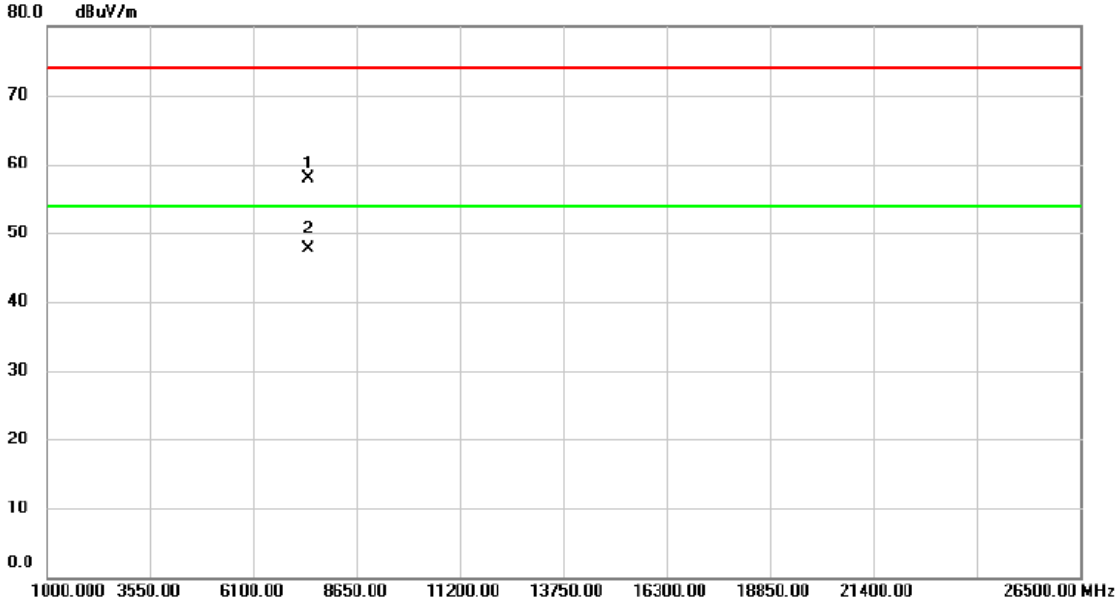

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7439.225	44.64	13.31	57.95	74.00	-16.05	peak	
2	*	7439.415	34.49	13.31	47.80	54.00	-6.20	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4101VIA

Horizontal

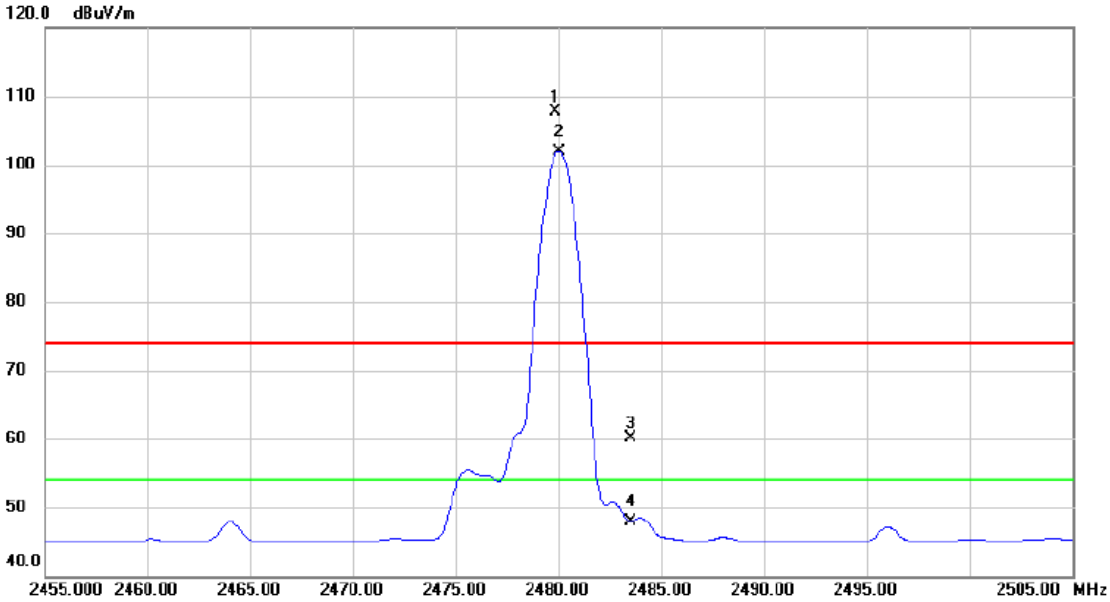

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.800	74.22	33.40	107.62	74.00	33.62	peak	No Limit
2	*	2480.000	68.60	33.40	102.00	54.00	48.00	AVG	No Limit
3		2483.500	26.75	33.41	60.16	74.00	-13.84	peak	
4		2483.500	14.47	33.41	47.88	54.00	-6.12	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4101VIA

Horizontal

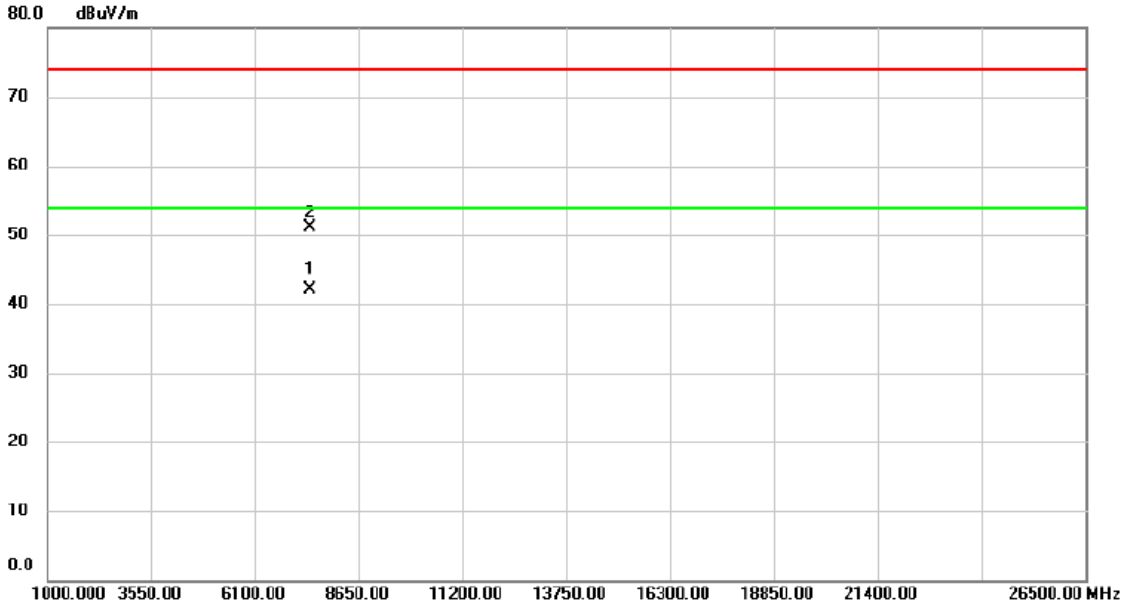

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7439.430	28.78	13.31	42.09	54.00	-11.91	AVG	
2		7440.800	37.85	13.31	51.16	74.00	-22.84	peak	

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4102VIA

Vertical

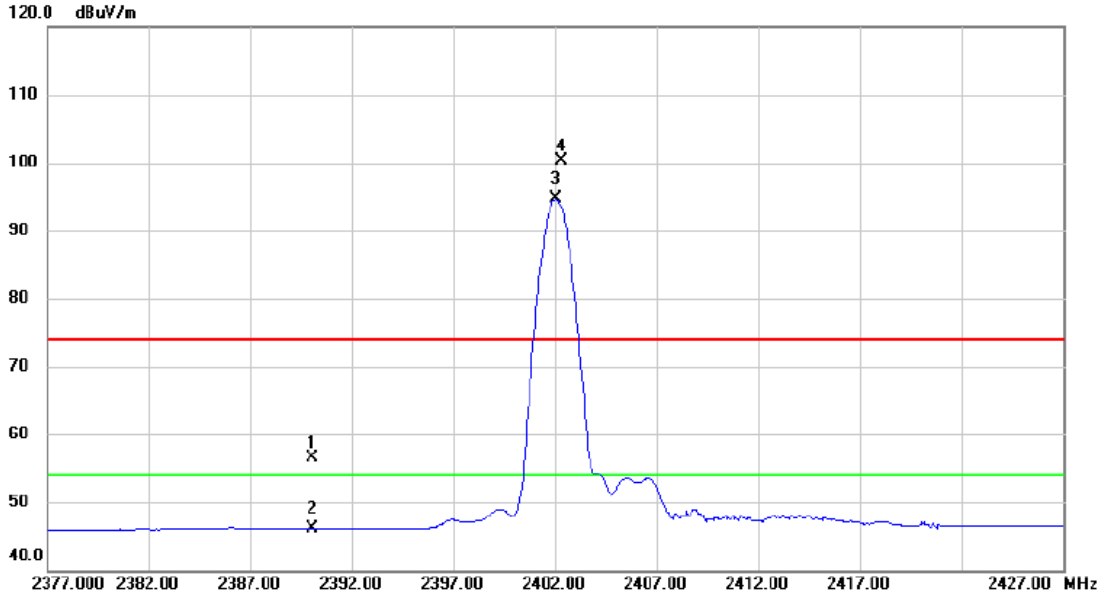

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.55	33.05	56.60	74.00	-17.40	peak	
2		2390.000	13.05	33.05	46.10	54.00	-7.90	AVG	
3	*	2402.050	61.54	33.11	94.65	54.00	40.65	AVG	No Limit
4	X	2402.300	67.24	33.11	100.35	74.00	26.35	peak	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4102VIA

Vertical

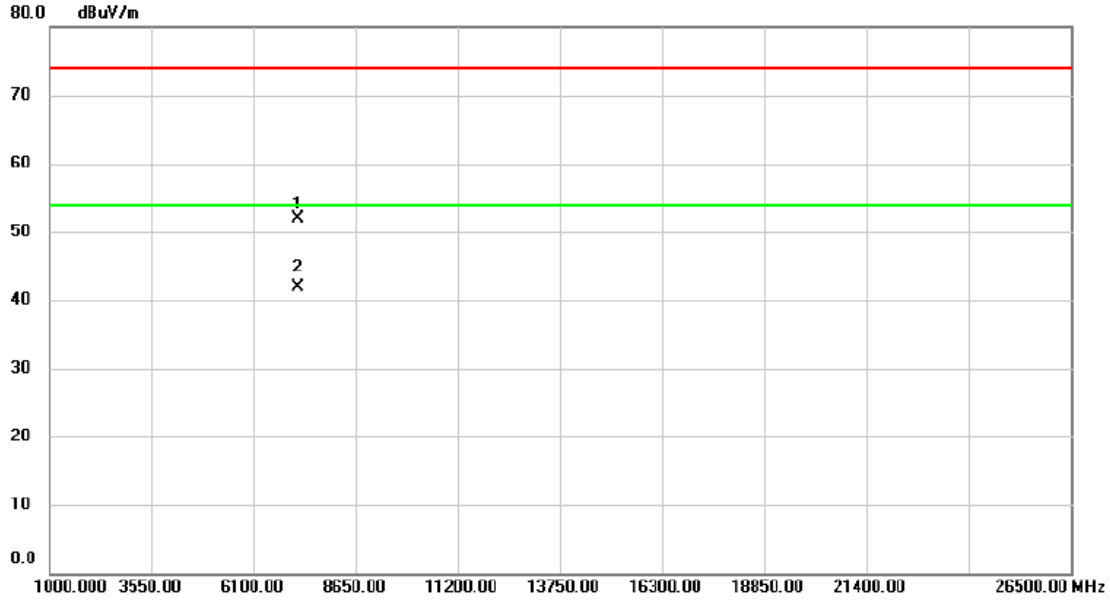

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7206.550	38.77	13.14	51.91	74.00	-22.09	peak	
2	*	7206.670	28.83	13.14	41.97	54.00	-12.03	AVG	

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4102VIA

Horizontal

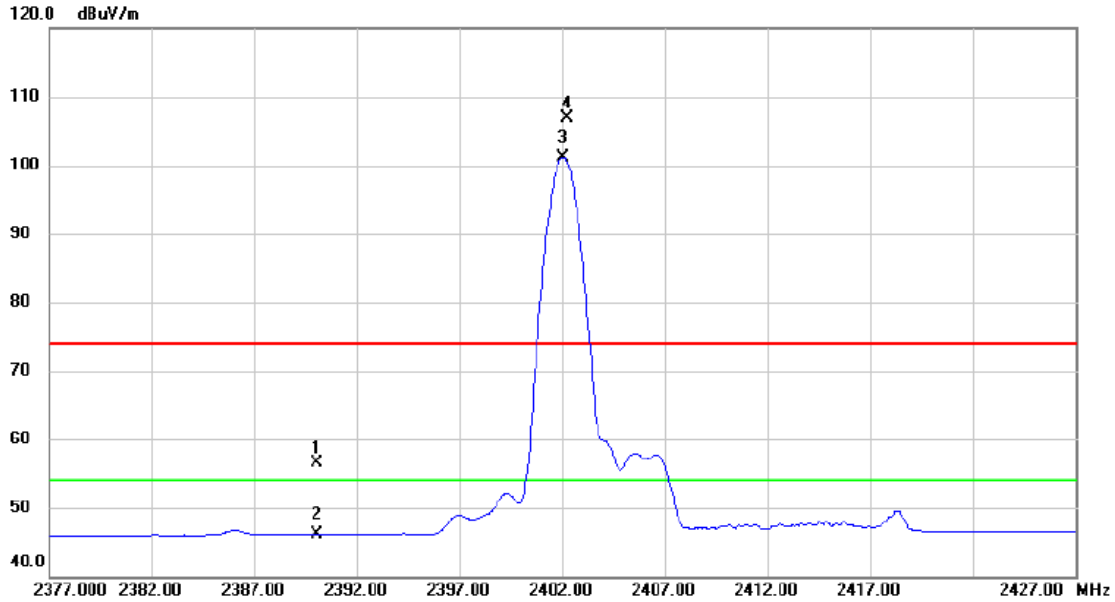

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.38	33.05	56.43	74.00	-17.57	peak	
2		2390.000	13.06	33.05	46.11	54.00	-7.89	AVG	
3	*	2402.050	68.06	33.11	101.17	54.00	47.17	AVG	No Limit
4	X	2402.250	73.73	33.11	106.84	74.00	32.84	peak	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps_ AVI4102VIA

Horizontal

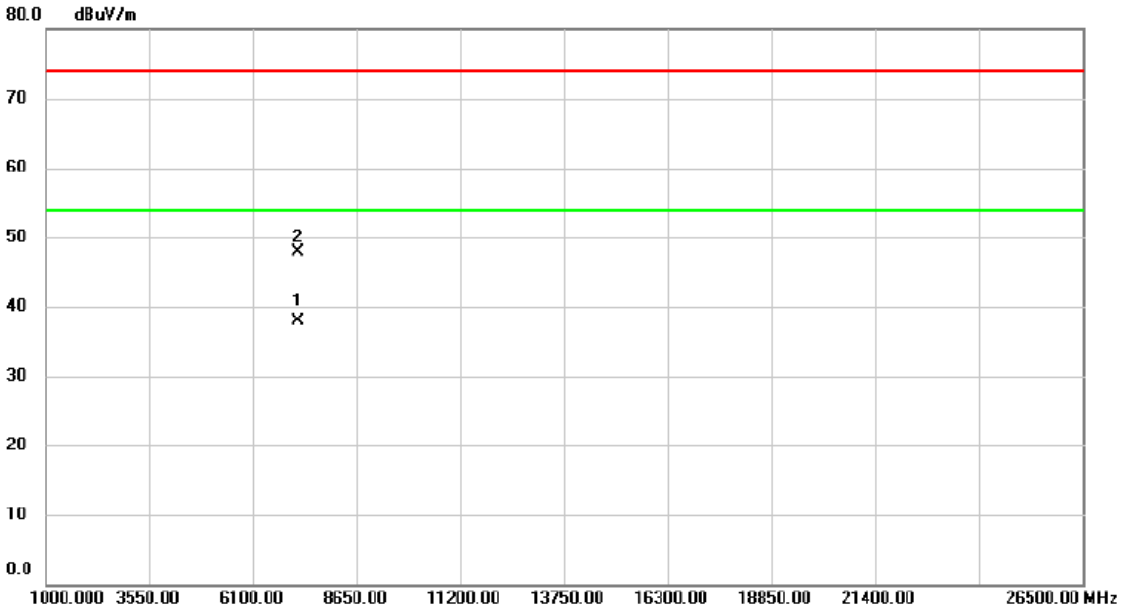

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7206.610	24.69	13.14	37.83	54.00	-16.17	AVG	
2		7206.635	34.86	13.14	48.00	74.00	-26.00	peak	

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4102VIA

Vertical

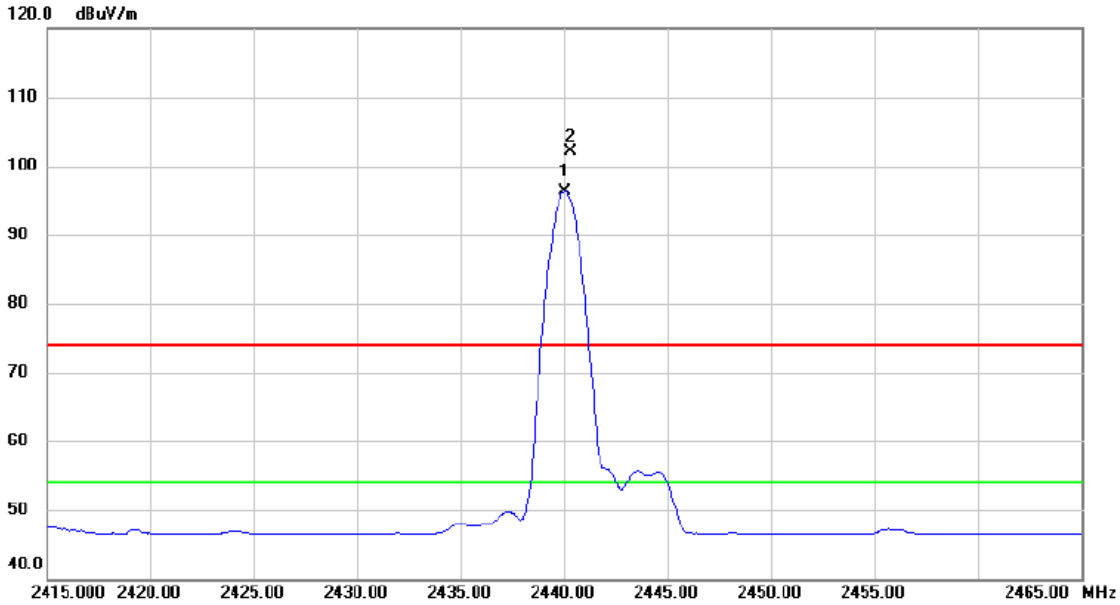

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2440.000	63.04	33.24	96.28	54.00	42.28	AVG	No Limit
2	X	2440.300	68.80	33.24	102.04	74.00	28.04	peak	No Limit

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4102VIA

Vertical

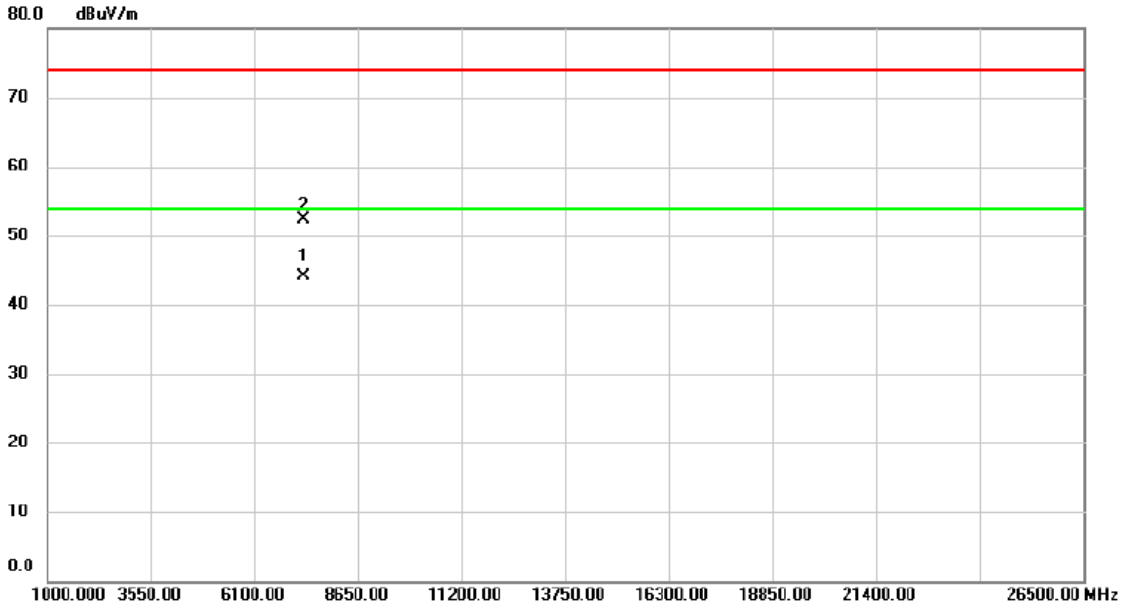

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7320.645	30.91	13.22	44.13	54.00	-9.87	AVG	
2		7320.830	39.16	13.22	52.38	74.00	-21.62	peak	

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4102VIA

Horizontal

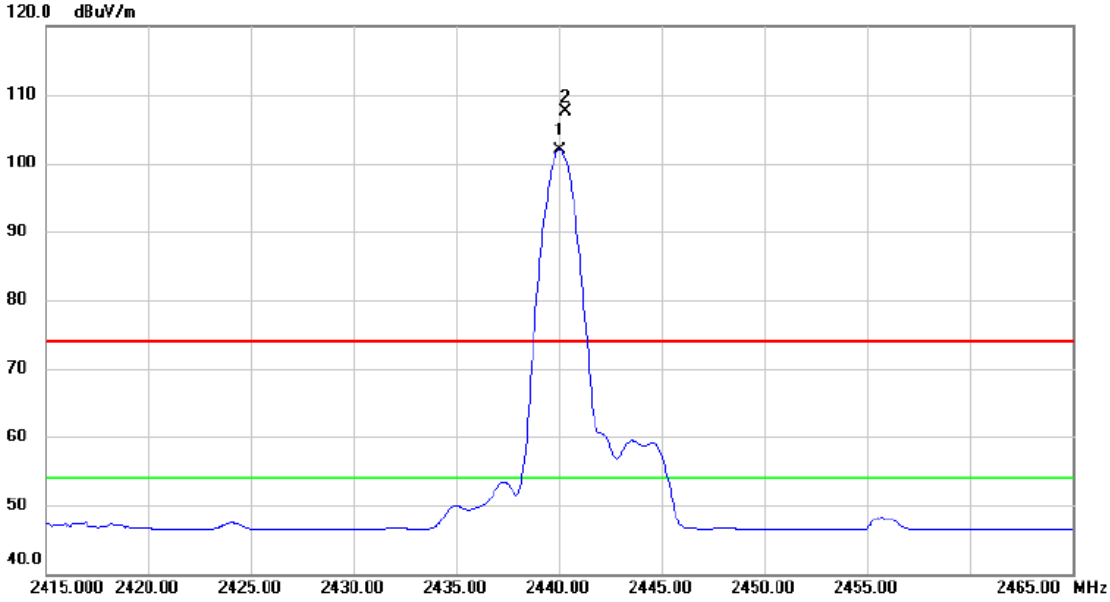

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2440.000	68.65	33.24	101.89	54.00	47.89	AVG	No Limit
2	X	2440.300	74.33	33.24	107.57	74.00	33.57	peak	No Limit

Test Mode :	TX 2440MHz _CH19_1Mbps_ AVI4102VIA

Horizontal

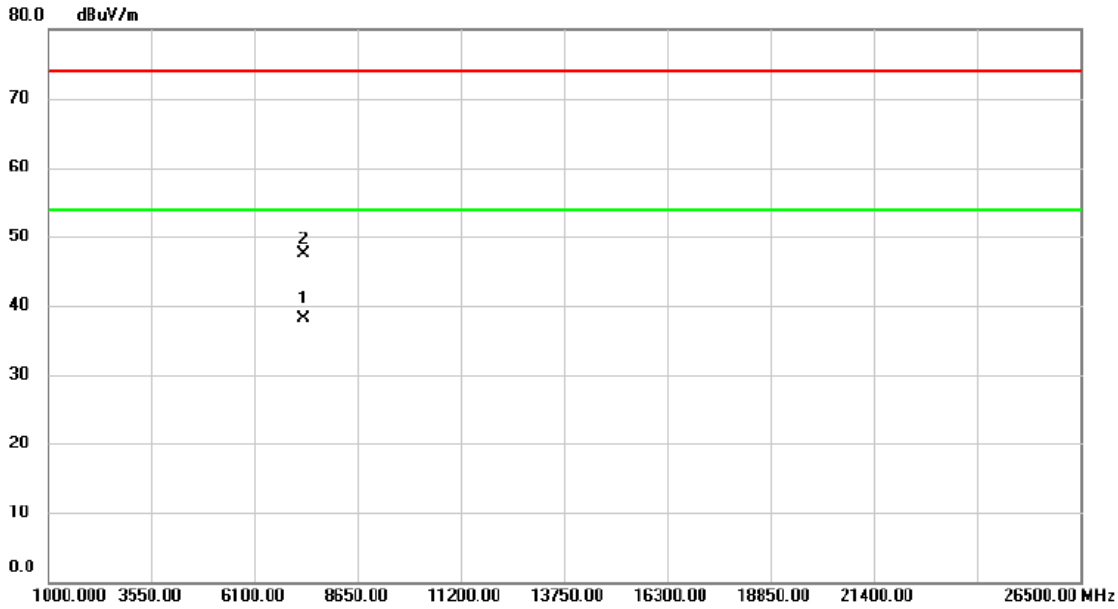

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7320.010	24.86	13.22	38.08	54.00	-15.92	AVG	
2		7320.115	34.37	13.22	47.59	74.00	-26.41	peak	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4102VIA

Vertical

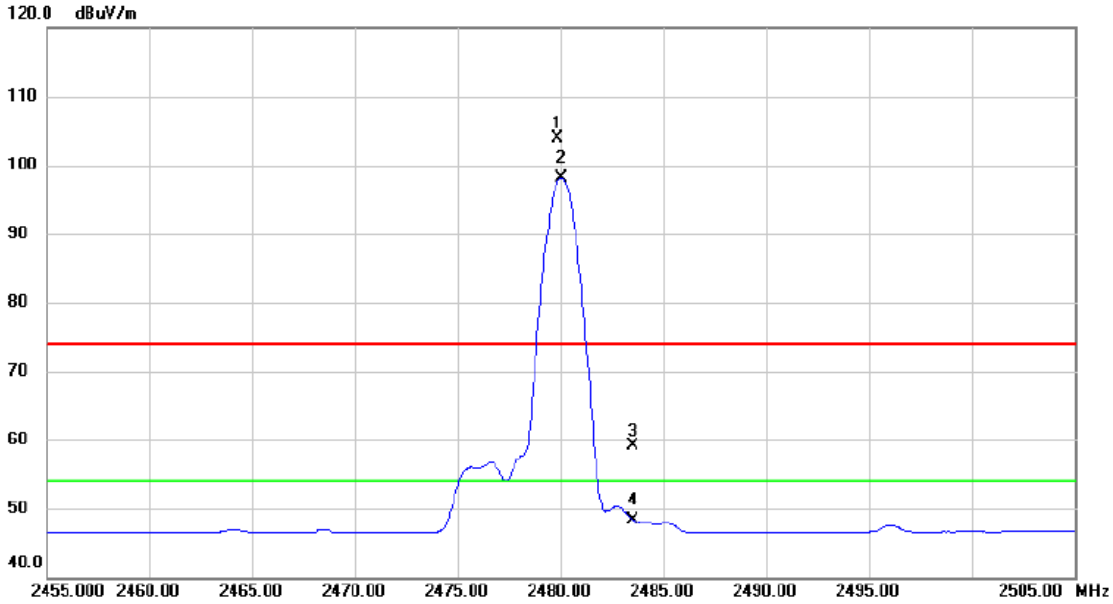

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.800	70.42	33.40	103.82	74.00	29.82	peak	No Limit
2	*	2480.000	64.77	33.40	98.17	54.00	44.17	AVG	No Limit
3		2483.500	25.60	33.41	59.01	74.00	-14.99	peak	
4		2483.500	14.89	33.41	48.30	54.00	-5.70	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4102VIA

Vertical

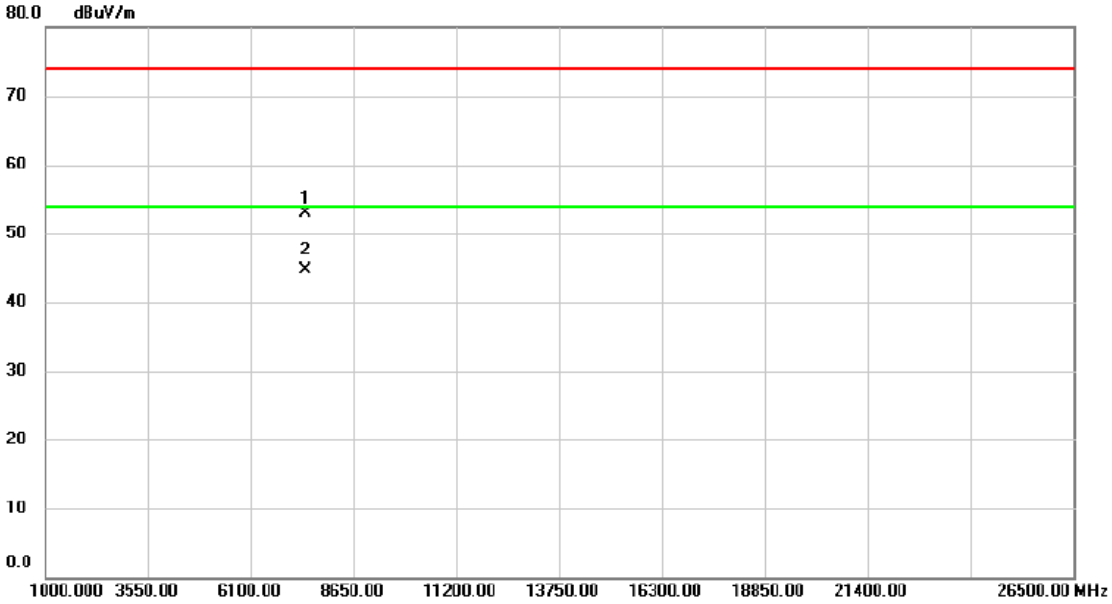

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7439.215	39.62	13.31	52.93	74.00	-21.07	peak	
2	*	7439.415	31.41	13.31	44.72	54.00	-9.28	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4102VIA

Horizontal

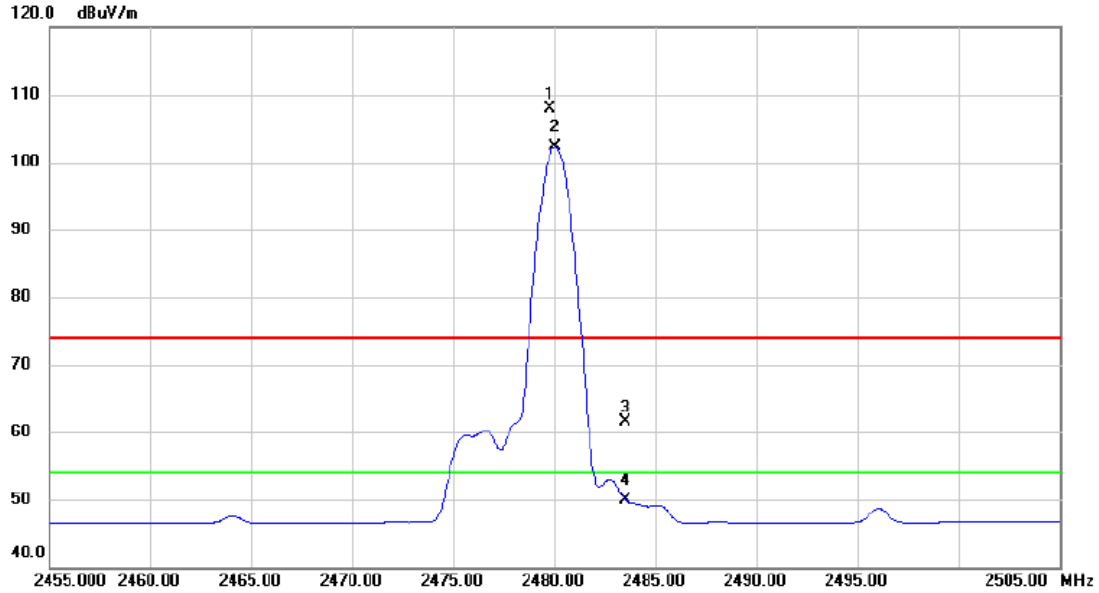

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.750	74.48	33.40	107.88	74.00	33.88	peak	No Limit
2	*	2480.000	68.84	33.40	102.24	54.00	48.24	AVG	No Limit
3		2483.500	28.15	33.41	61.56	74.00	-12.44	peak	
4		2483.500	16.58	33.41	49.99	54.00	-4.01	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps_ AVI4102VIA

Horizontal

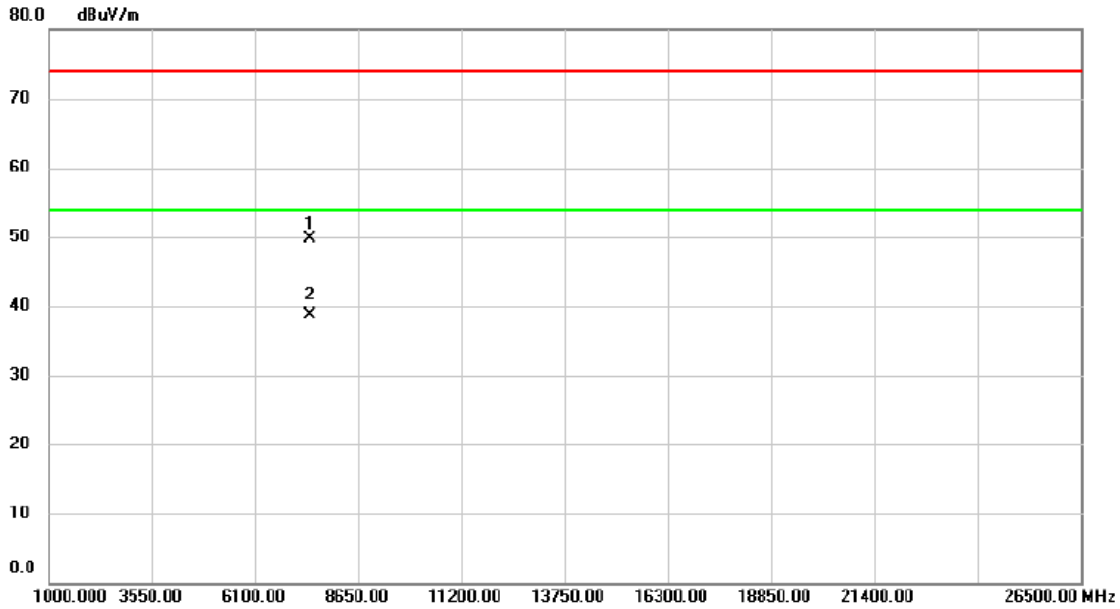

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7439.265	36.35	13.31	49.66	74.00	-24.34	peak	
2	*	7439.475	25.42	13.31	38.73	54.00	-15.27	AVG	

APPENDIX E - BANDWIDTH

Test Mode:	TX Mode

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.670	1.040	500	Pass
2440	0.670	1.036	500	Pass
2480	0.698	1.040	500	Pass

TX CH00

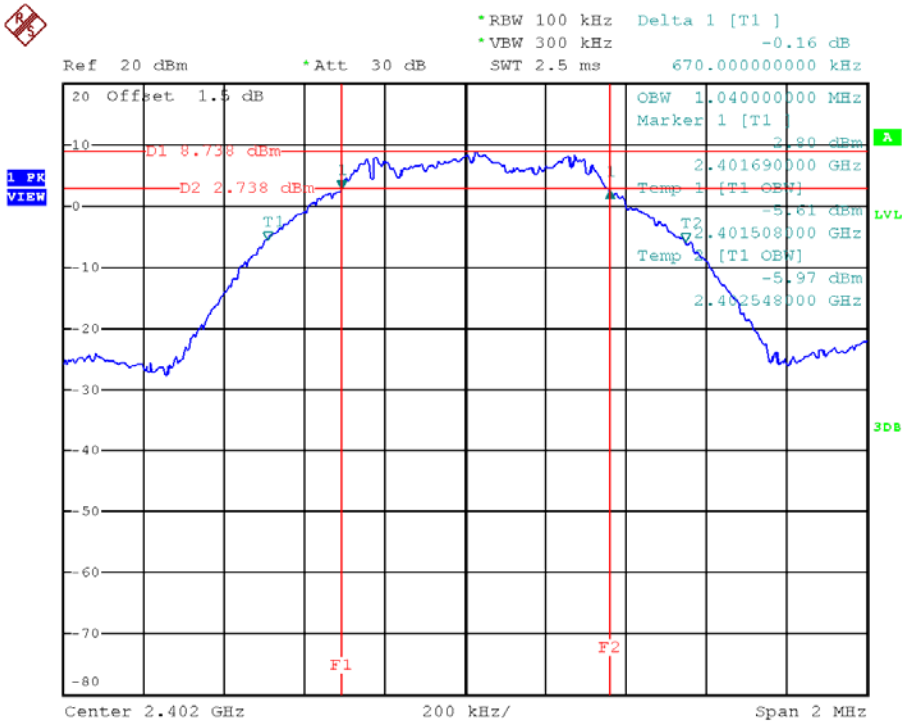

Date: 12.DEC.2017 17:51:23

TX CH19

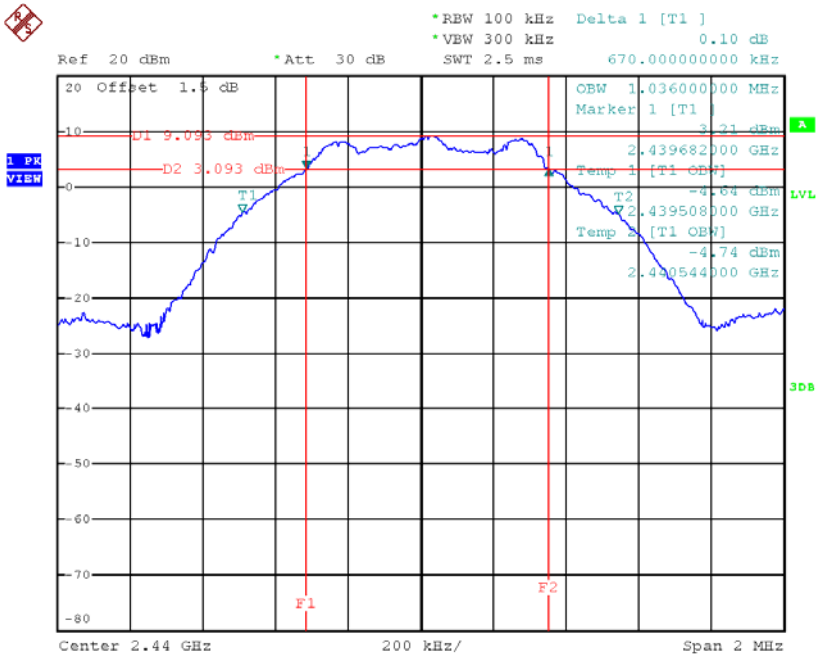

Date: 12.DEC.2017 17:52:45

TX CH39

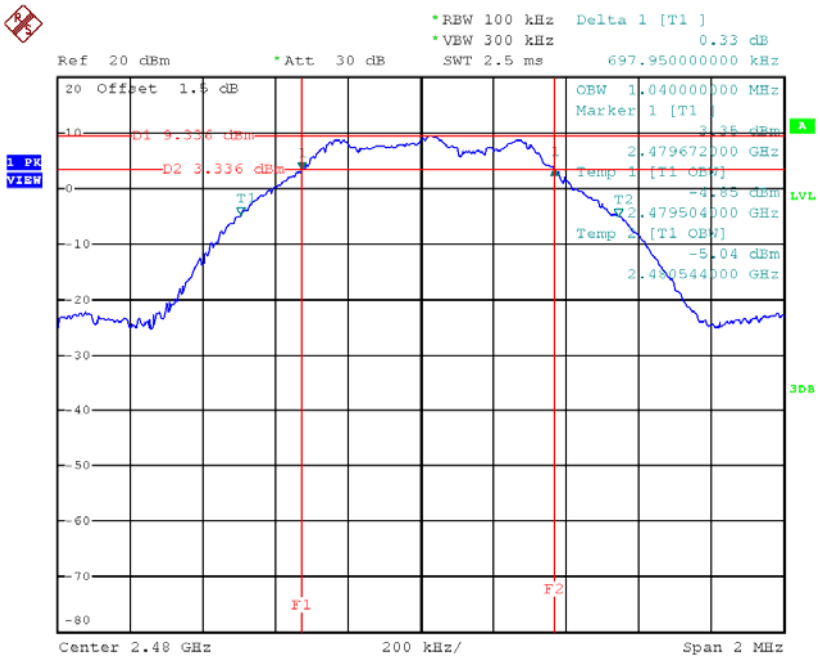

Date: 12.DEC.2017 17:54:08

APPENDIX F - MAXIMUM OUTPUT POWER TEST

Test Mode :	CH00, CH19 , CH39 - 1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	9.18	0.0083	30.00	1.00	Pass
2440	9.51	0.0089	30.00	1.00	Pass
2480	9.72	0.0094	30.00	1.00	Pass

APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode :	CH00, CH19 , CH39 - 1Mbps

CH00 (Lower) - 1Mbps

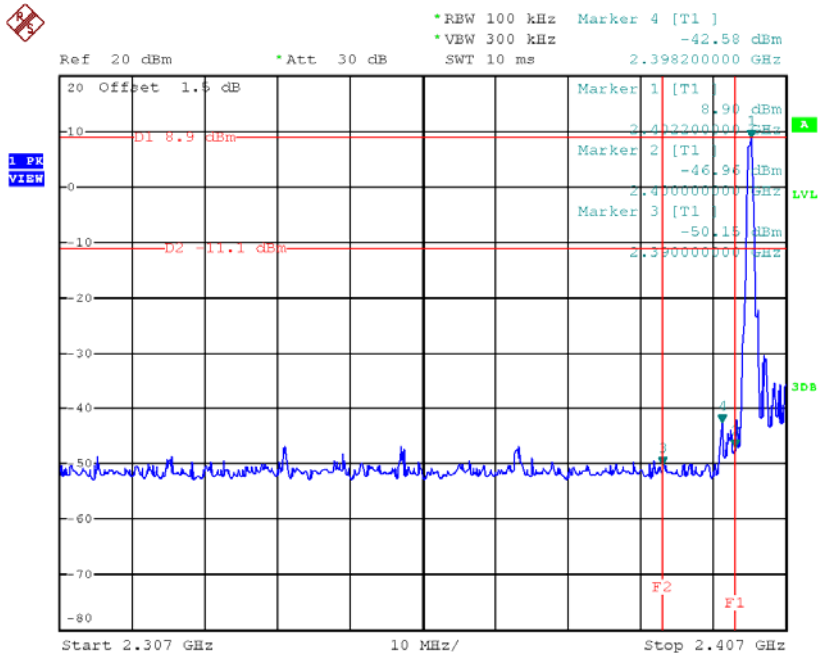

Date: 12.DEC.2017 17:51:31

CH39 (upper) - 1Mbps

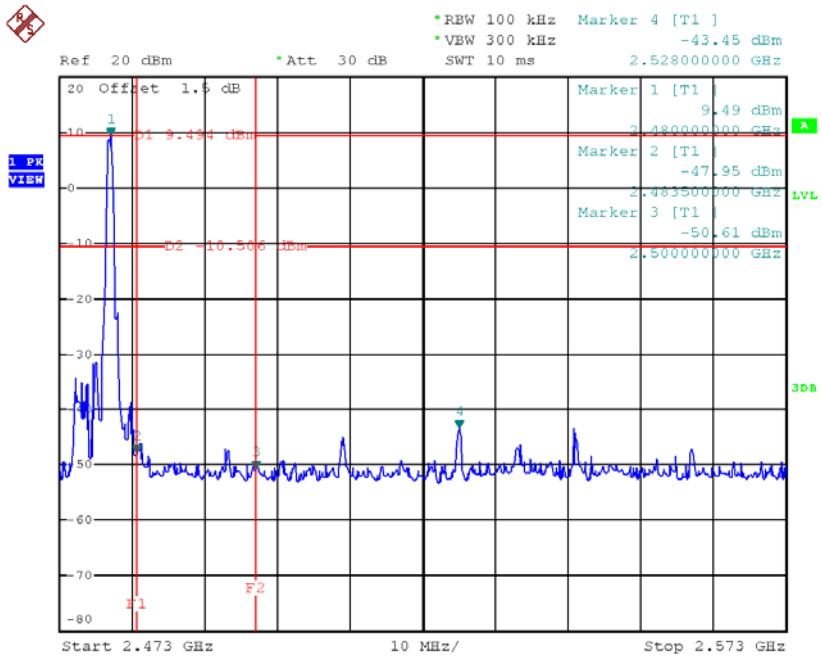

Date: 12.DEC.2017 17:54:16

CH00 (10 Harmonic of the frequency) 1

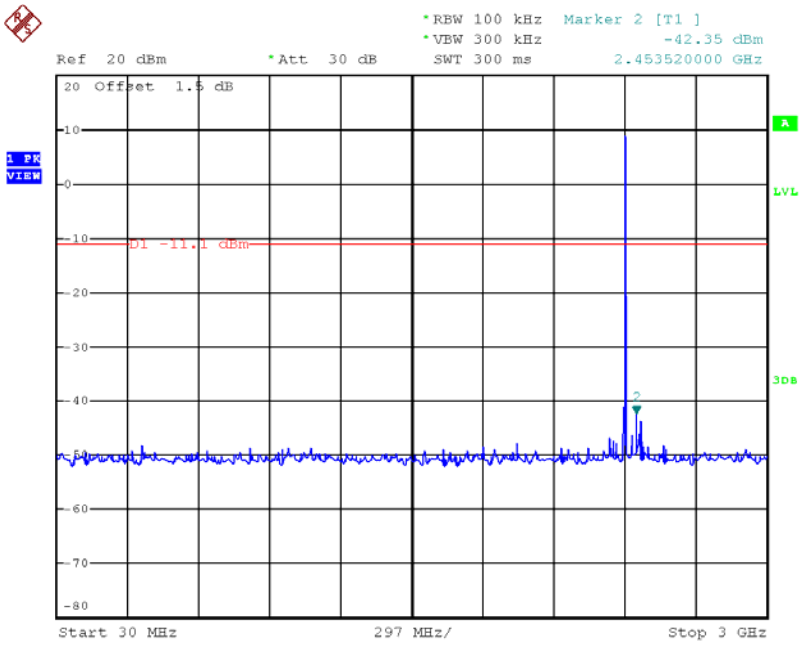

Date: 12.DEC.2017 17:51:45

CH00 (10 Harmonic of the frequency) 2

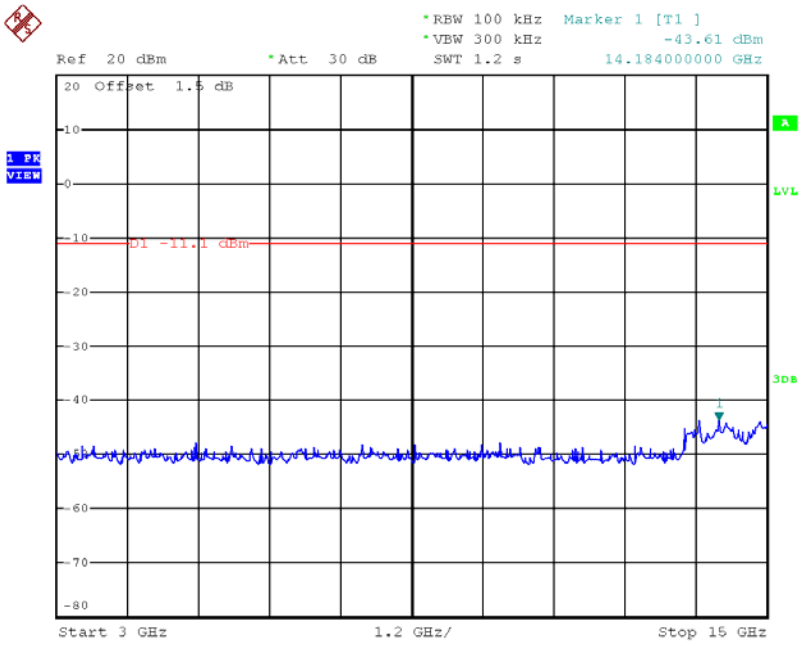

Date: 12.DEC.2017 17:51:53

CH00 (10 Harmonic of the frequency) 3

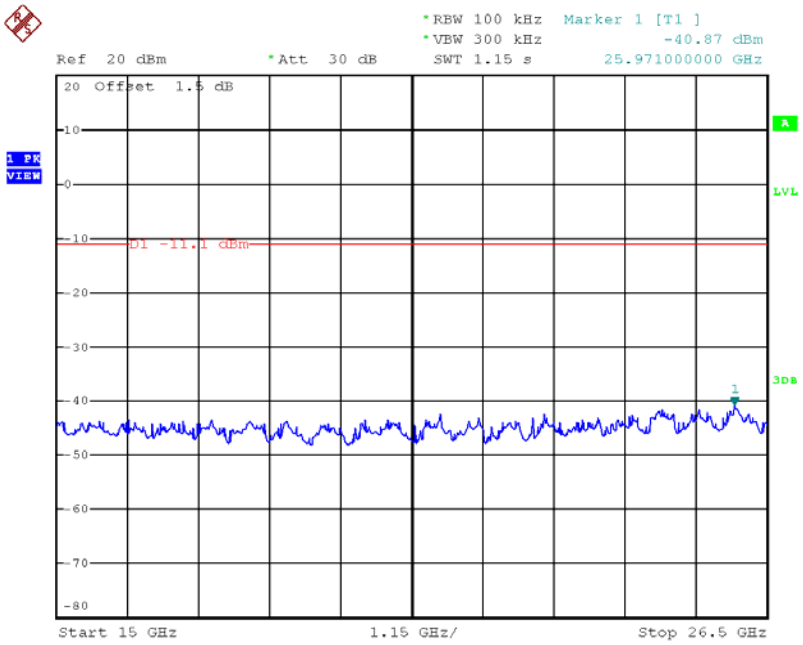

Date: 12.DEC.2017 17:52:01

CH19 (10 Harmonic of the frequency) 1

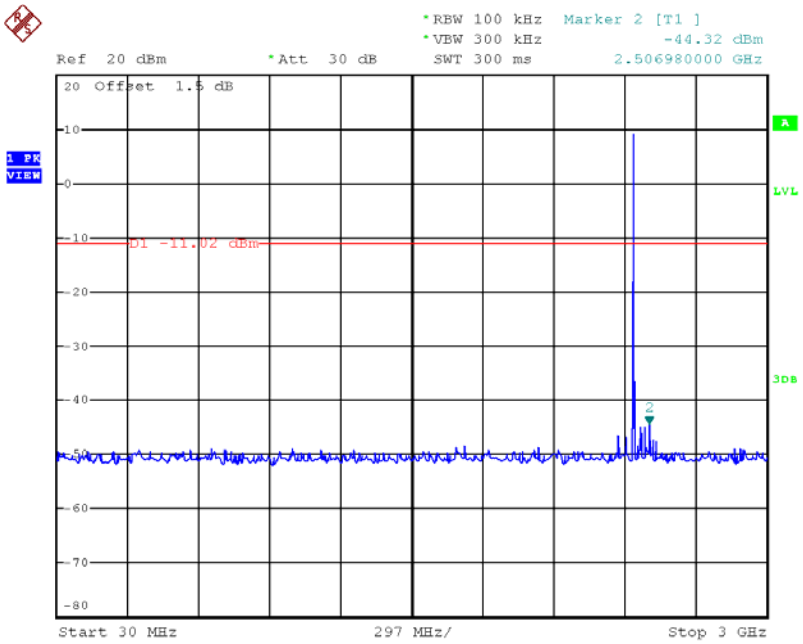

Date: 12.DEC.2017 17:53:07

CH19 (10 Harmonic of the frequency) 2

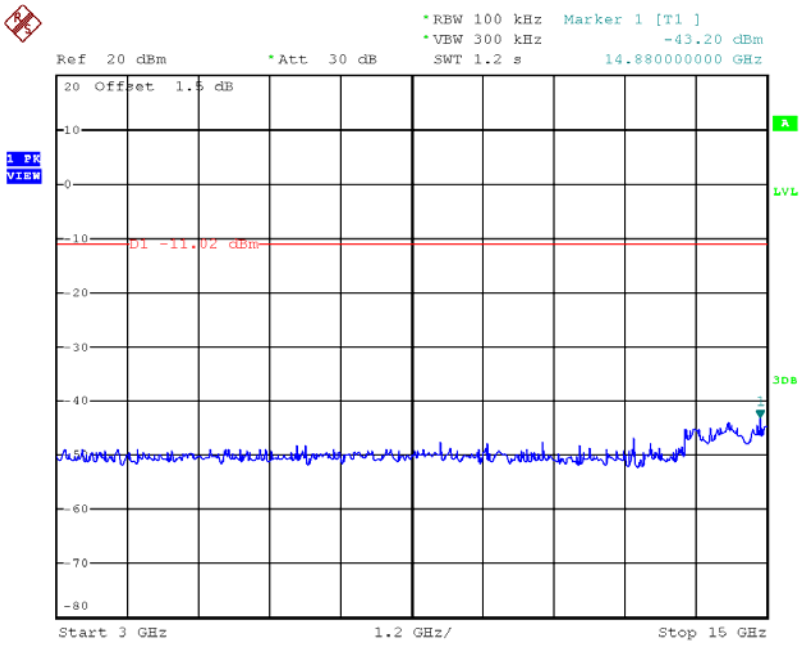

Date: 12.DEC.2017 17:53:15

CH19 (10 Harmonic of the frequency) 3

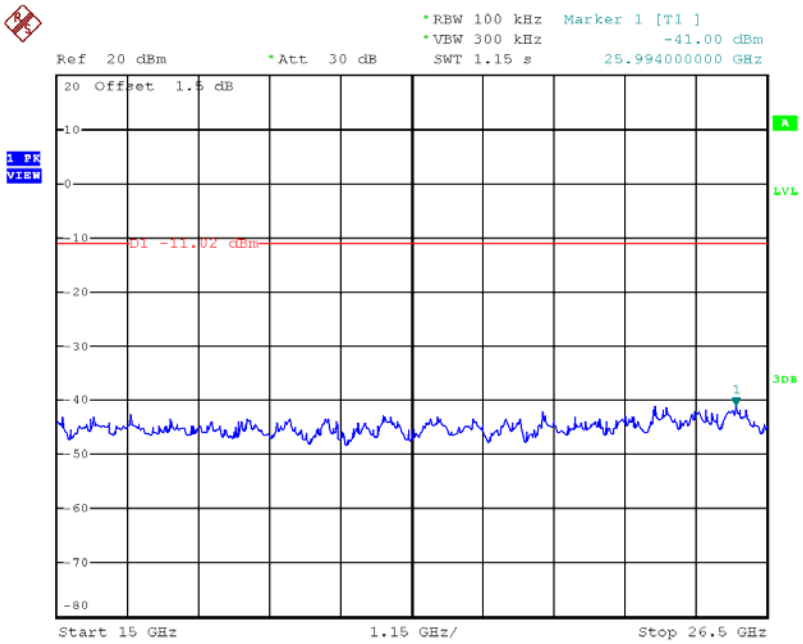

Date: 12.DEC.2017 17:53:23

CH39 (10 Harmonic of the frequency) 1

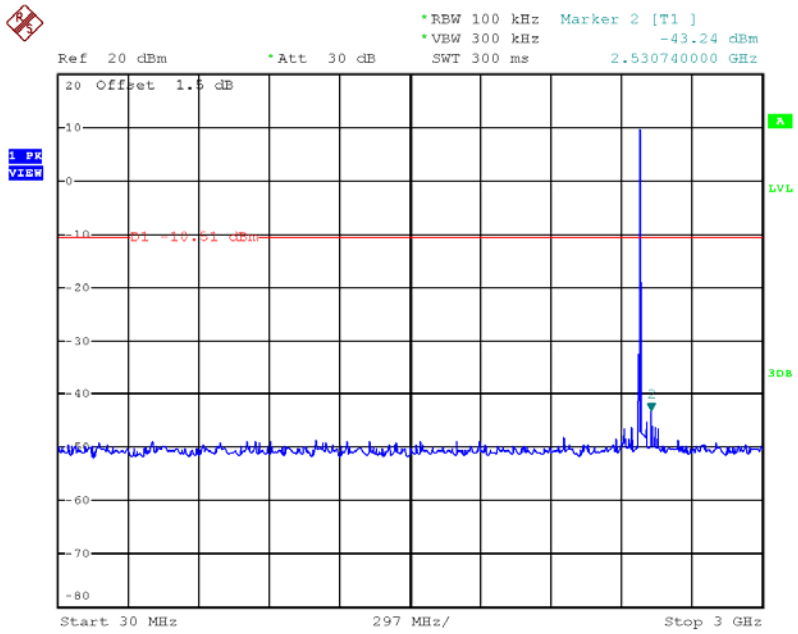

Date: 12.DEC.2017 17:54:30

CH39 (10 Harmonic of the frequency) 2

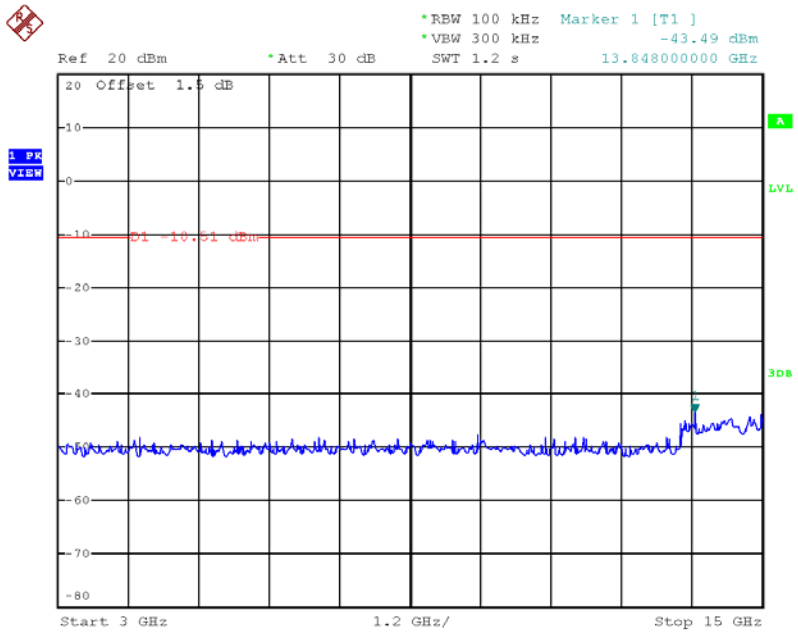

Date: 12.DEC.2017 17:54:38

CH39 (10 Harmonic of the frequency) 3

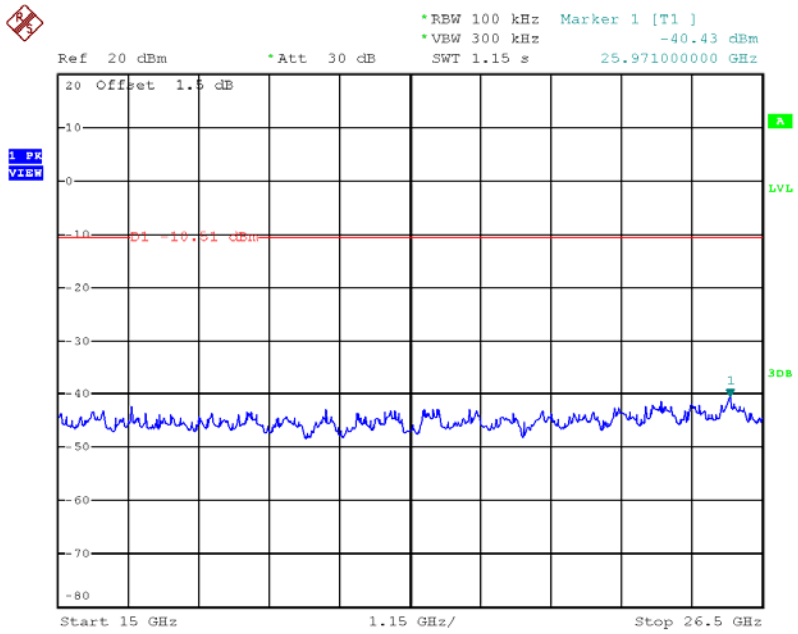

Date: 12.DEC.2017 17:54:46

APPENDIX H - POWER SPECTRAL DENSITY TEST

Test Mode:	CH00, CH19 , CH39 - 1Mbps

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-7.050	0.197	8.00	Pass
2440	-6.720	0.213	8.00	Pass
2480	-5.960	0.254	8.00	Pass

TX CH00

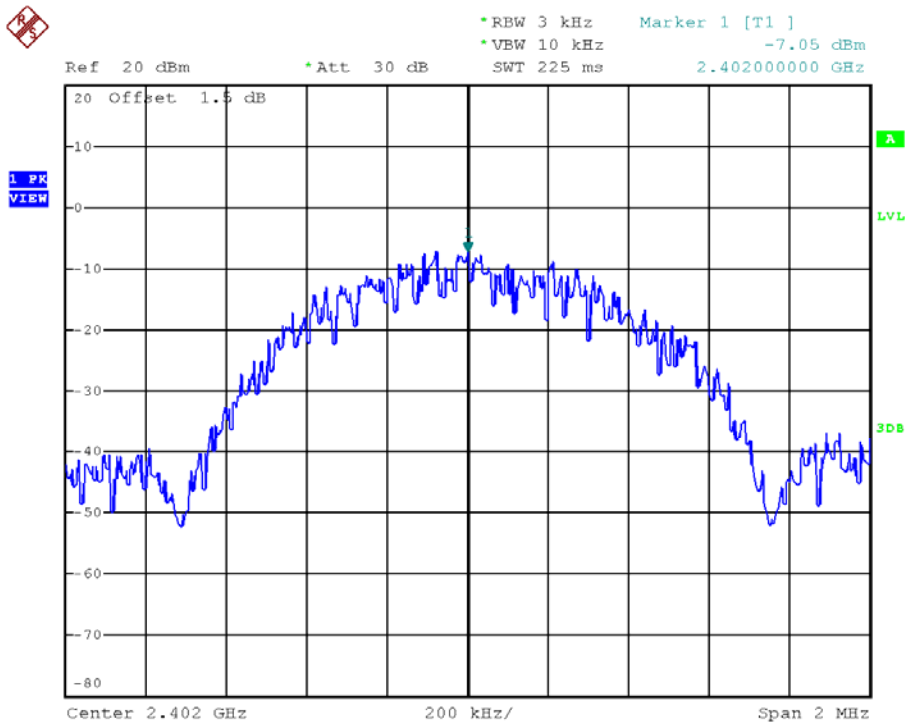

Date: 12.DEC.2017 17:52:07

TX CH19

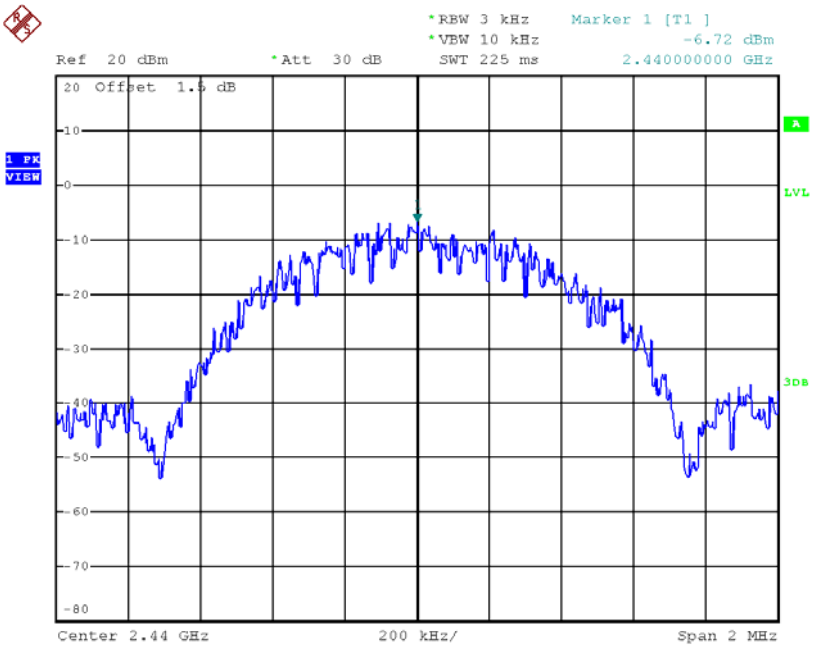

Date: 12.DEC.2017 17:53:29

TX CH39

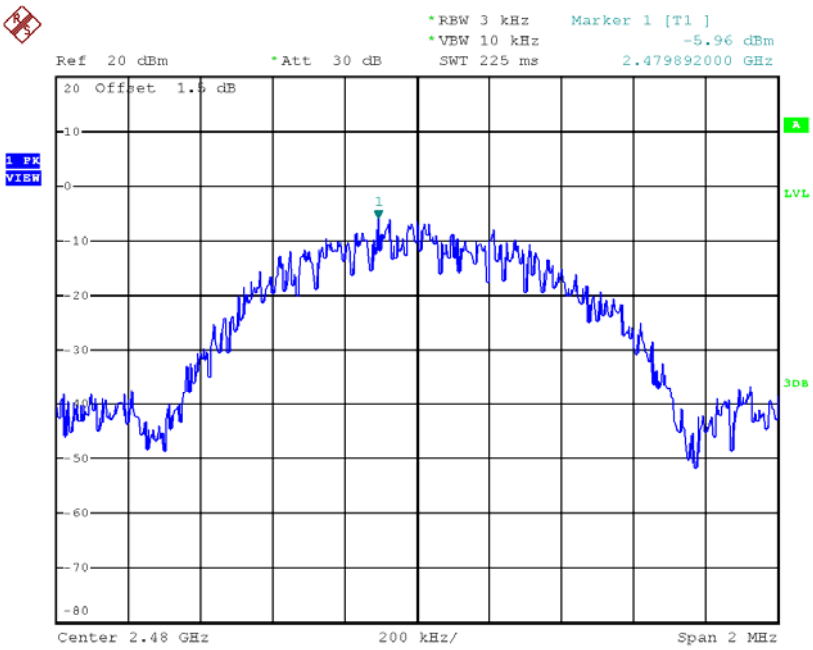

Date: 12.DEC.2017 17:54:53