



MOD007




三模键盘用户手册

Mechanical Keyboard
User Manual

快速开始指南 ►
Quick Start Guide

为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参考。

包装内容

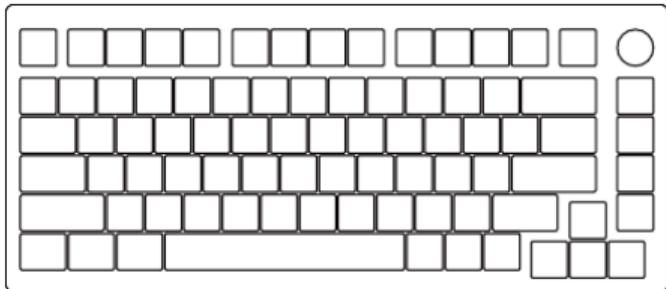

系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本


安装步骤

将键盘USB连接线插入电脑的USB接口即可开始使用。

独立指示灯

状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	红灯慢闪	红灯快闪	红灯常亮2s熄灭
BT2	按键R灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT3	按键T灯	黄灯慢闪	黄灯快闪	黄灯常亮2s熄灭
2.4G	按键Y灯	绿灯慢闪	绿灯快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	白灯常亮2s熄灭
状态	指示灯位置	指示方式		
低电	独立LED指示灯 (空格键附近)	红灯慢闪		
充电		红灯常亮		
充满		灯灭		
Caps	Caps按键灯位	白灯常亮		
锁Win	左Win键灯位	白灯常亮		

MOD007B PC组合键功能


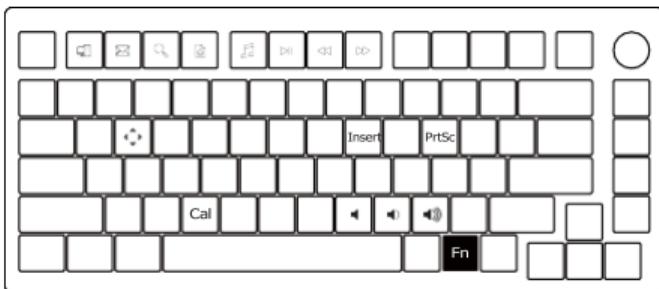


	F1	我的电脑
	F2	电子邮件
Fn+	F3	= Windows搜索
	F4	浏览器主页
	F5	多媒体播放器

	F6	播放 / 暂停
	F7	上一首
Fn+	F8	= 下一首
	P	Prtsc
	C	计算器

	I	Insert
	M	静音
Fn+	<	= 音量减小
	>	音量增加
	W	将 WASD 与 ↑ ↓ ← → 键对调

MOD007B PC系统功能 (Windows)

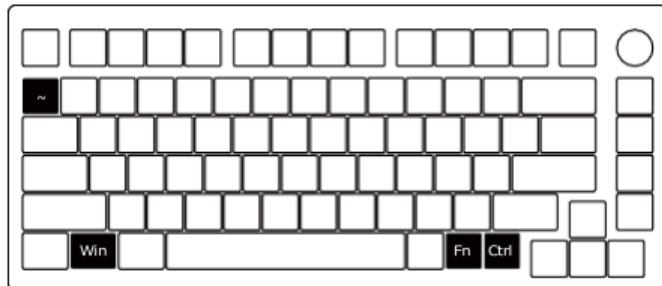

旋钮功能

锁Win键

Fn + 左Win


恢复出厂设置

长按 Fn + ~ 5秒

切换成菜单键

长按Fn + 右Ctrl 3秒

MOD007B PC系统功能 (Mac)

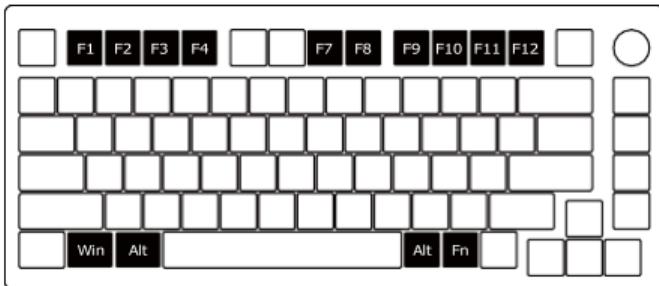

F1 降低显示屏亮度

F2 增加显示屏亮度

F3 打开任务控制

呼出 Siri

F7 上一曲

F8 播放/暂停

F9 下一曲

F10 静音

F11 调低音量

F12 调高音量

左Win Option

左Alt Command


右Alt

Command

Fn + (F1~12)

F1 ~ F12

MOD007B PC灯光调节

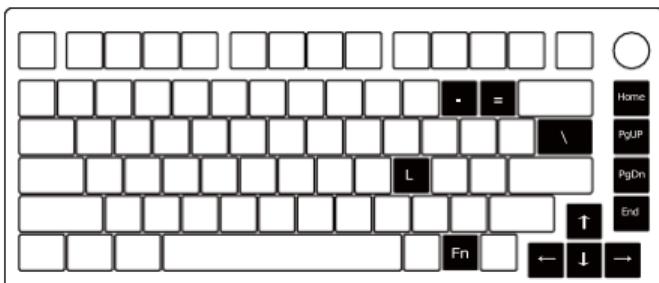

灯光速度变慢

Fn+Home

常亮、涟漪、如影随形、川流不息、流星

灯光速度变快

Fn+PgUp

繁星点点、霓虹、光波、层出不穷、彩泉涌动

灯光变亮

Fn+End

呼吸、极光、正弦波、雨滴、峰回路转

灯光变暗

Fn+PgDn

斜风细雨、踏雪无痕、聚合、一石二鸟、百花争艳

灯光方向向左

Fn+\


切换背光致7种单色+RGB循环

灯光方向向右

Fn+L

灯光关闭/开启

MOD007B PC连接使用指南

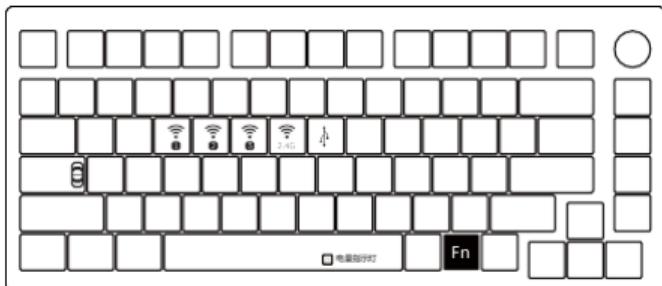

E	蓝牙设备1	开关位于 Caps按键右侧	上: MAC (内置电源开)
R	蓝牙设备2		中: Windows (内置电源关)
T	蓝牙设备3		下: Windows (内置电源开)
Y	2.4G无线设备		
U	有线模式		

蓝牙配对

键盘开机后，按下Fn+E/R/T进入蓝牙模式，长按Fn+E/R/T组合键3S，键盘进入对码状态，红\蓝\黄色指示灯快闪，连上后指示灯常亮2S，如果没有连上设备指示灯熄灭，键盘进入睡眠。

2.4G配对

键盘开机后，按下Fn+Y进入2.4G模式，再按下Fn+Y组合键3S进入配对模式后，插入接收器，指示灯快闪，配对成功后退出对码，模式灯常亮2S，找不到配对设备30s后，退出对码模式灯熄灭，键盘进入睡眠。

电量查询

按下组合键Fn+空格，电量低于30%空格键上红光；30-50% 空格键上提示为橙色；50-70% 空格键上提示为紫色；70-90% 空格键上提示为黄色；90-100% 空格键上提示为绿色。

按键/灯光自定义说明和调用说明

1. 键盘三种工作模式下均可连接驱动并进行灯光和按键自定义
2. 键盘三种工作模式下可搭配驱动实现音乐律动
3. 请在我司官网下载“Akko Cloud”驱动
4. 驱动下载地址www.akkogear.com

AKKO保修和服务声明

1. Akko为中国大陆的客户提供一年保修。对于其他地区，请联系您的卖家（Akko分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，Akko也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 由于私自拆卸产品、使用不当和安装不当而导致的缺陷不在保修范围内。
4. 官方售后服务时间为每周一至周五上午10: 00至下午18: 00
节假日以国家法定节日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：www.akkogear.com

产地：中国·深圳

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China



WARNING:

Water and Beverages can't be
poured into the Keyboard.




中国制造/Made in China

注意事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品
请按照电子产品保护方式爱惜使用。

To provide you with a better user experience, please read this manual carefully before using the product.

Packing List

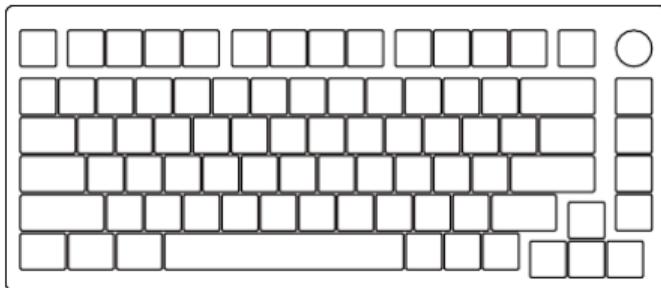

System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version

USB Connection


Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

MOD007B PC Multi-modes RGB User Manual

Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Red light blinks slowly	Red light blinks fast	Red light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Yellow light blinks slowly	Yellow light blinks fast	Yellow light stays on for 2 seconds and then turns off
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	White light stays on for 2 seconds and then turns off



Status	Indicator	Indicating mode
Low Battery		Red light blinks slowly
Charging	Independent LED Indicator (near spacebar)	Steady red
Fully Charged		Light off
Caps	LED for Caps Key	Steady white
Lock Win	LED for left Win Key	Steady white

MOD007B PC HotKeys

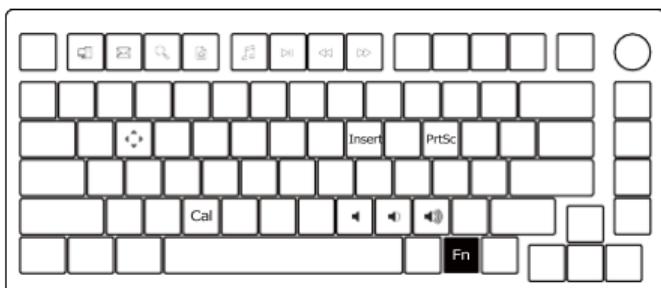

F1	My Computer
F2	E-mail
F3	Windows Search
F4	Browser Homepage
F5	Multimedia Player
F6	Play/Pause
F7	Previous Song
Fn + F8	= (Next Song)
F9	Print SCR
C	Calculator
I	Insert
M	Mute
<	Decrease Volume
>	Increase Volume
W	Swap WASD with ↑ ↓ ← →

MOD007B PC System Commands (Windows)

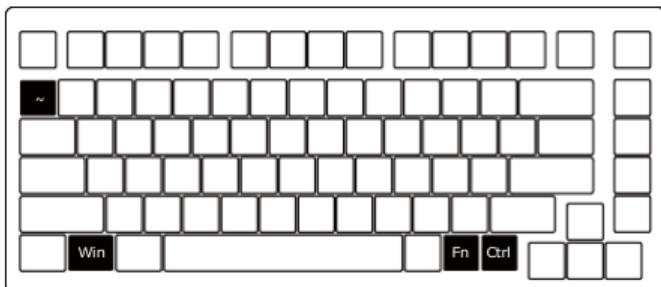

Adjust Volume / Light Brightness

Lock Windows Key

Press Fn and Left Win Key


Restore Factory Settings

Hold down Fn and press ~ Key for 5s

Revert Ctrl into Menu Key

Hold down Fn and press right Ctrl for 3s

MOD007B PC System Commands (Mac)

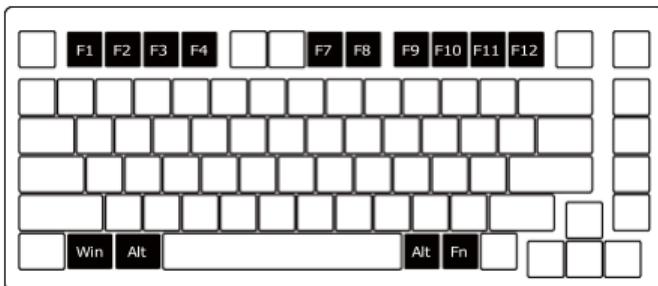

F1 Decrease display brightness
F2 Increase display brightness
F3 Open mission control
F4 Activate Siri

F7 Skip back (Audio)
F8 Pause/Play (Audio)
F9 Skip forward (Audio)
F10 Mute


F11 Volume down
F12 Volume up
Left Win Option
Left Alt Command

Right Alt Command

Fn + (F1~12) F1 ~ F12

MOD007B PC Backlight Settings

Fn+-
Fn+=
Fn+↑
Fn+↓
Fn+←
Fn+→

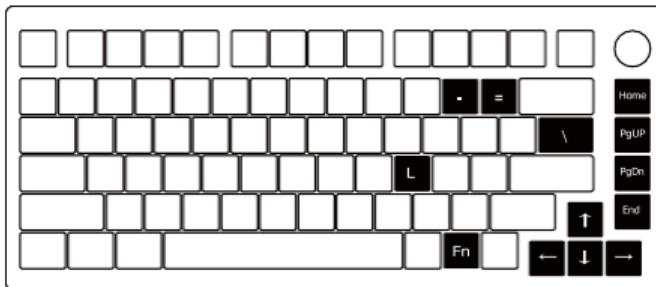

Slower Animation

Fn+Home

Effect1, Effect2, Effect3, Effect4, Effect5

Faster Animation

Fn+PgUP

Effect6, Effect7, Effect8, Effect9, Effect10

Bright

Fn+End

Effect11, Effect12, Effect13, Effect14, Effect15

Dim

Fn+PgDn

Effect16, Effect17, Effect18, Effect19, Effect20

Set animation direction to left

Fn+\


This shortcut allows you to set the backlight color to 7 single color with RGB loop effect

Set animation direction to right

Fn+L

Light Off/On

MOD007B PC Wireless/Wired Connection Guide

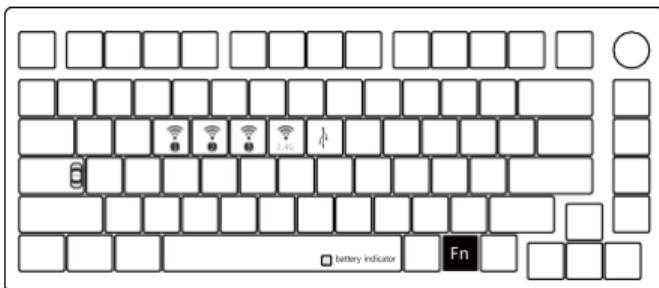

E	Bluetooth Device 1	The switch is located under the CAPS key	Top: Mac (built-in power supply on)
R	Bluetooth Device 2		Middle: Default Windows (built-in power supply off)
T	Bluetooth Device 3		Bottom: Windows (built-in power supply on)
Y	2.4G Wireless Device		
U	Wired Mode		

Bluetooth Pairing

After turning on the keyboard, press Fn+E/R/T to enter Bluetooth mode. Press and hold the Fn+E/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the red/blue/yellow indicator light flashing quickly. Once the connection is established, the indicator light will stay on for 2 seconds. If the device fails to connect, the indicator light will turn off and the keyboard will enter sleep mode.

2.4 G Pairing

After turning on the keyboard, press Fn+Y to enter 2.4G mode. Then press and hold the Fn+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and the indicator light will flash quickly. Once pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

Press the Fn + Space combination keys to check the battery level. If the battery level is below 30%, the space key will show a red light. If it's between 30-50%, the space key will show an orange light. If it's between 50-70%, the space key will show a purple light. If it's between 70-90%, the space key will show a yellow light. If it's 90-100%, the space key will show a green light.

Key/Lighting Effects Customization Instruction

1. The driver can be connected and lighting and key can be customized under the three working modes of the keyboard
2. The three working modes of the keyboard can be matched to drive the music rhythm
3. Please download the Akko Cloud driver on our website
4. Users can download the driver via en.akkogear.com

AKKO Warranty and Service Statement

1. Akko provides One-Year warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves.
However, users shall take full responsibility for any loss happened during self-repair.
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: www.akkogear.com

Origin: Shenzhen, China



WARNING:

Water and Beverages can't be poured into the Keyboard.



中国制造/Made in China

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.



AKKO

www.akkogear.com



@akkogear



扫描关注官方微信



扫描关注官方微博