

TEST REPORT

Product Name: android screen
FCC ID: 2A4LB-KS-W195
Trademark: Koason , Panos, Ugode
KS-W195, KS-W195Q, KS-H507Q, KS-W808, KS-W508, KS-H509Q,
KS-W601, KS-W701, KS-W711Q, KS-W197, KS-W507, KS-W601Q,
KS-H509Q, UB-8601Q-F15, UB-8601Q-E70, UB-8601Q-F25,
UB-8601Q-F30, UB-8601Q-F10, UB-8601HQ, UB-8503HQ, UB-8501Q,
UB-8504Q, UB-8702Q
Model Number:
Prepared For: Shenzhen Youchangshumadianzi Youxiangongsi
Address: Xixiangjiedao, Shuikulu, Zhongxi ECOguoji 316-318, ShenzhenShi
Baoanqu, Guangdong
Manufacturer 1: Shenzhen Youchangshumadianzi Youxiangongsi
Address 1: Xixiangjiedao, Shuikulu, Zhongxi ECOguoji 316-318, ShenzhenShi
Baoanqu, Guangdong
Manufacturer 2: Koason auto
Address 2: Xixiangjiedao, Shuikulu, Zhongxi ECOguoji 316-318, ShenzhenShi
Baoanqu, Guangdong
Manufacturer 3: KJD
Address 3: 7th Floor, east Area, Building B, FengHuang Xuda Industrital Park,
Fuyong, Baoan Shenzhen
Manufacturer 4: XHD
Address 4: 4/f Building B1, mingjun industrial park, dalang, longhua, Shenzhen
City, Guangdong
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community,
Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Feb. 11, 2022
Sample tested Date: Feb. 11, 2022 to Feb. 28, 2022
Issue Date: Feb. 28, 2022
Report No.: CTB220218010RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

Chen ZhengArron LiuBin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup	14
7.2 Limit	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	82
8.1 Block Diagram Of Test Setup	82
8.2 Limit	82
8.3 Test procedure	82
8.4 Test Result	83
9. CONDUCTED OUTPUT POWER	90
9.1 Block Diagram Of Test Setup	90
9.2 Limit	90
9.3 Test procedure	90
9.4 Test Result	91
10. 6DB OCCUPIED BANDWIDTH	96
10.1 Block Diagram Of Test Setup	96
10.2 Limit	96
10.3 Test procedure	96
10.4 Test Result	96
11. POWER SPECTRAL DENSITY	102
11.1 Block Diagram Of Test Setup	102
11.2 Limit	102

11.3	Test procedure	102
11.4	Test Result	103
12.	ANTENNA REQUIREMENT	108
13.	EUT PHOTOGRAPHS	109
14.	EUT TEST SETUP PHOTOGRAPHS	112

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220218010RFX	Feb. 28, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

3. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	KS-W195, KS-W195Q, KS-H507Q, KS-W808, KS-W508, KS-H509Q, KS-W601, KS-W701, KS-W711Q, KS-W197, KS-W507, KS-W601Q, KS-H509Q, UB-8601Q-F15, UB-8601Q-E70, UB-8601Q-F25, UB-8601Q-F30, UB-8601Q-F10, UB-8601HQ, UB-8503HQ, UB-8501Q, UB-8504Q, UB-8702Q
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: KS-W195
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	UGO-BMW-MB6816_V02-20211203
Software Version:	Ksw-Q-Userdebug_OS_v3.4.7
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 7.54dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G) : 1.0dBi
Ratings:	Battery DC 12V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle > 98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	12V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

Test mode	rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

	Automatic test software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

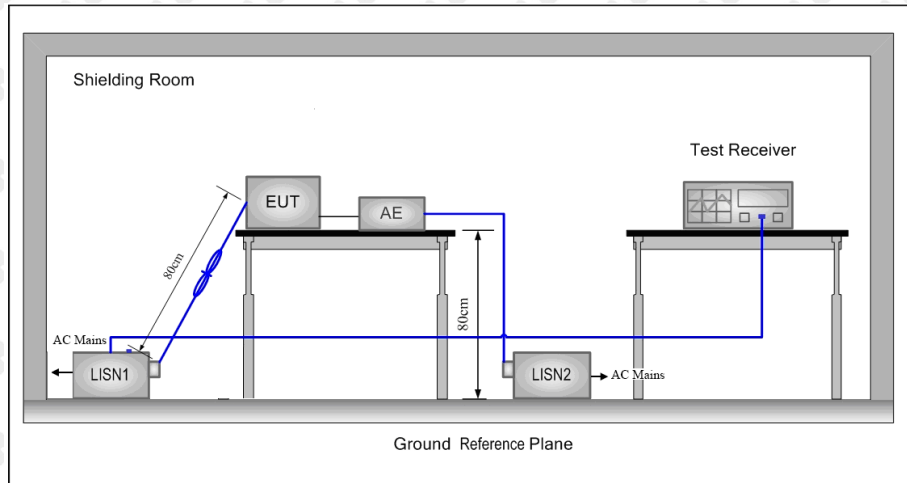

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference

plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

N/A

NOTE: This EUT is powered by DC power only, this test item is not applicable

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

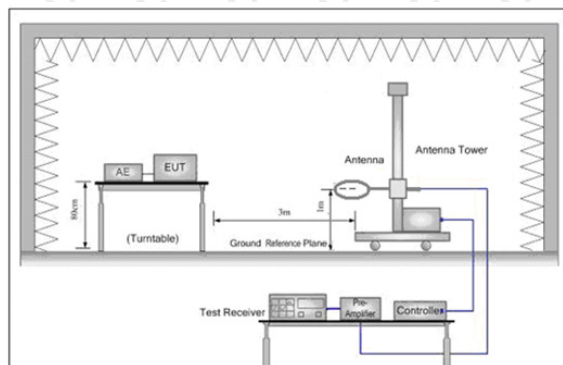


Figure 1. Below 30MHz

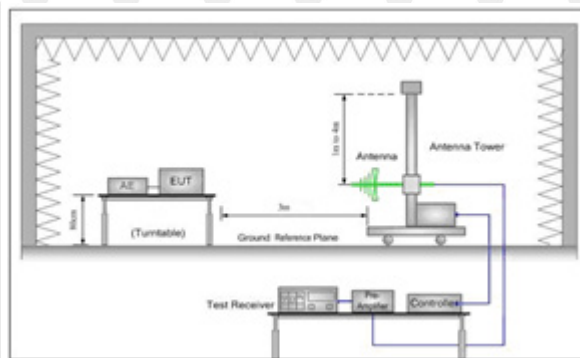


Figure 2. 30MHz to 1GHz

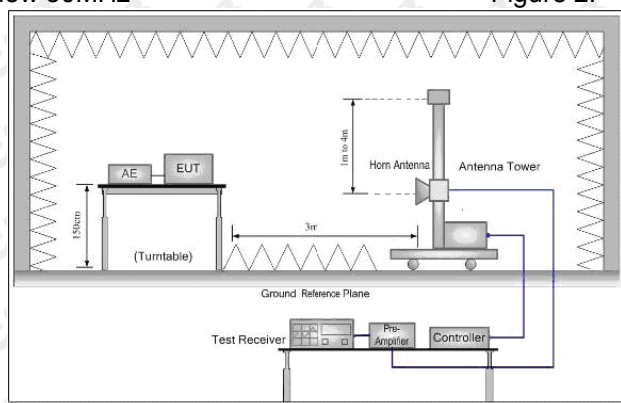


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


After pre-scanning three directions, the report recorded the worst case

7.4 Test Result

Below 1GHz Test Results:

(8.8-inch)


Antenna polarity: H

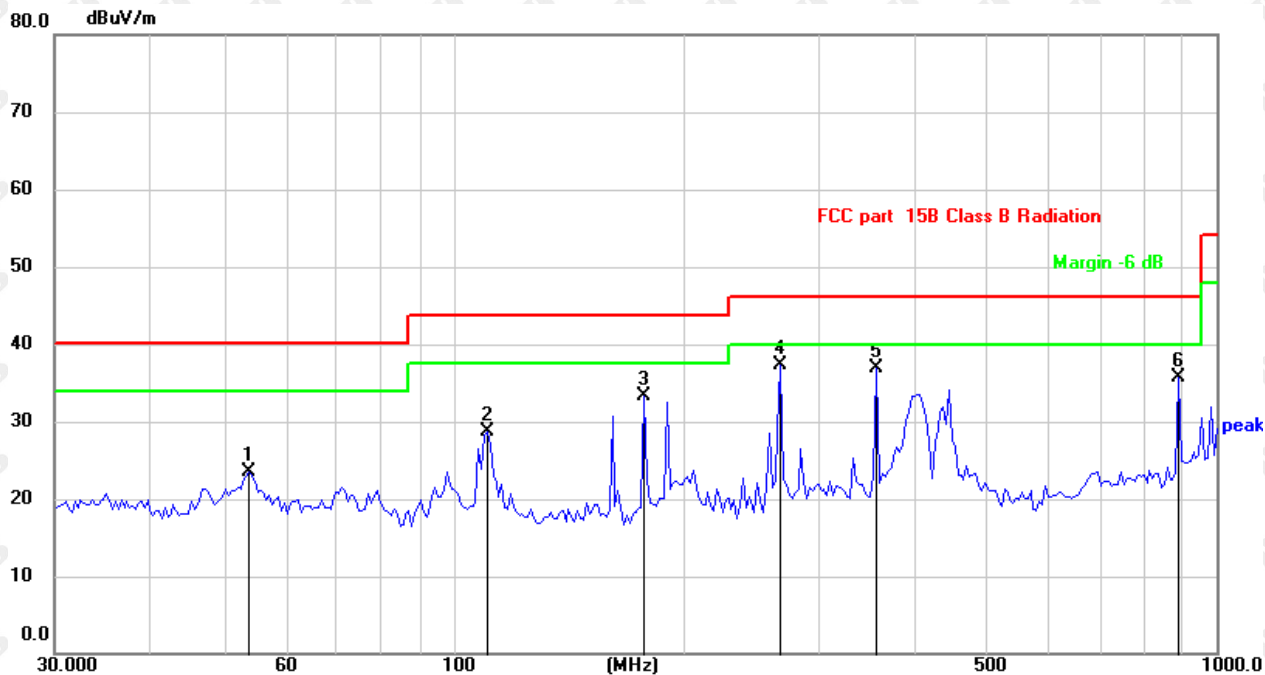

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		53.9763	29.44	-5.85	23.59	40.00	-16.41	QP
2		110.7626	36.65	-7.91	28.74	43.50	-14.76	QP
3		177.8206	40.74	-7.44	33.30	43.50	-10.20	QP
4	*	268.4852	42.86	-5.52	37.34	46.00	-8.66	QP
5		358.5568	40.03	-3.15	36.88	46.00	-9.12	QP
6		892.2907	29.51	6.20	35.71	46.00	-10.29	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

(8.8-inch)
Antenna polarity : V

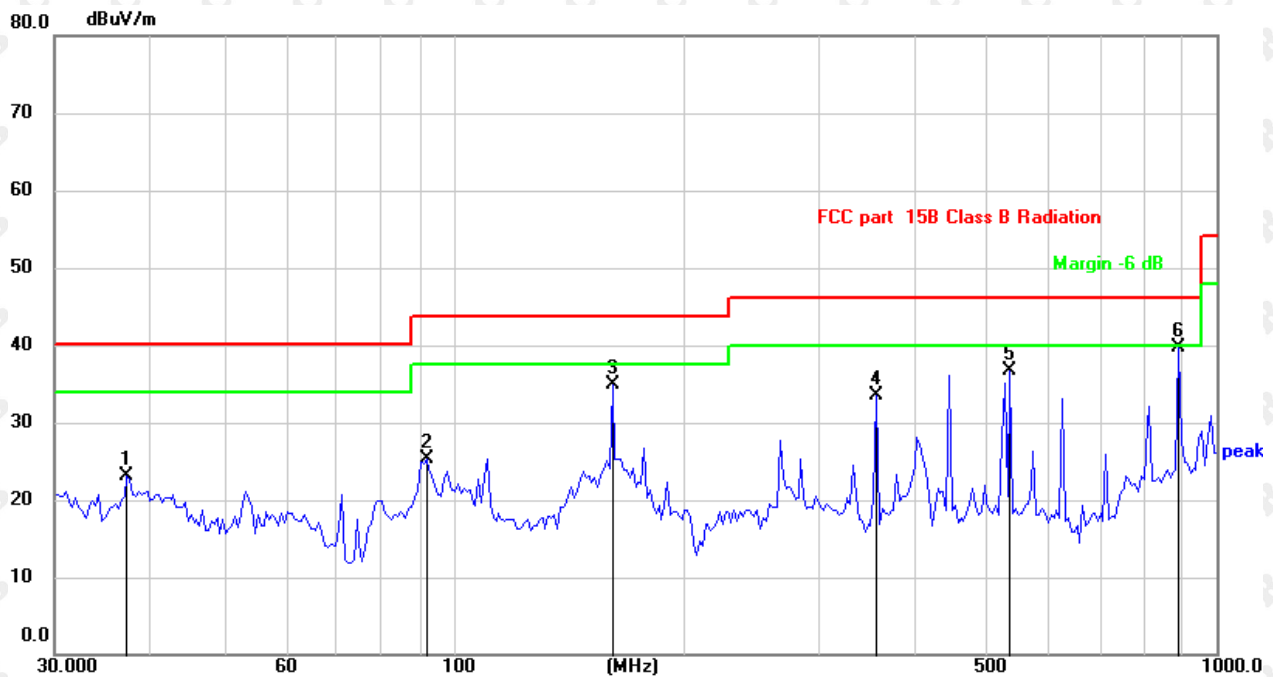


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.3509	29.10	-5.91	23.19	40.00	-16.81	QP
2		92.1386	34.71	-9.50	25.21	43.50	-18.29	QP
3		161.4738	40.66	-5.66	35.00	43.50	-8.50	QP
4		358.5568	36.73	-3.15	33.58	46.00	-12.42	QP
5		536.6471	35.23	1.39	36.62	46.00	-9.38	QP
6	*	892.2907	33.42	6.20	39.62	46.00	-6.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put.


Below 1GHz Test Results:
(10.25-inch)
Antenna polarity: H

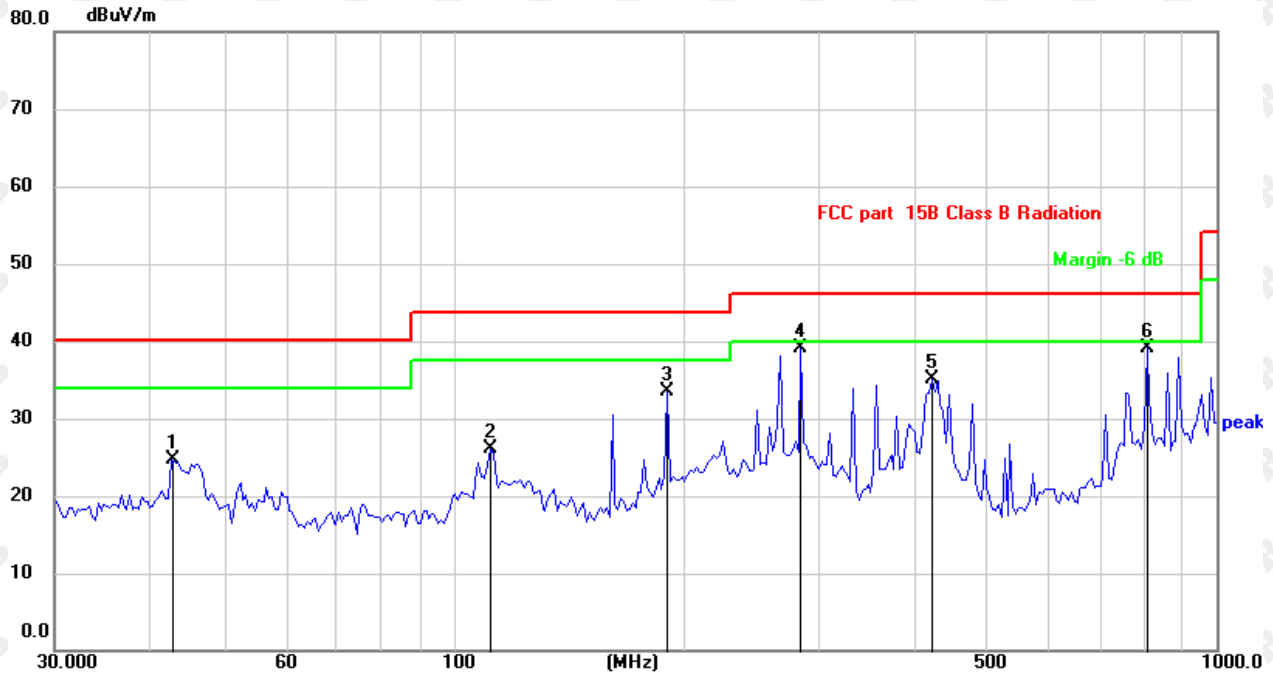

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.6000	30.15	-5.37	24.78	40.00	-15.22	QP
2		111.7377	33.94	-7.80	26.14	43.50	-17.36	QP
3		190.7390	41.62	-8.09	33.53	43.50	-9.97	QP
4	*	285.4768	44.52	-5.36	39.16	46.00	-6.84	QP
5		423.5402	36.30	-1.12	35.18	46.00	-10.82	QP
6		810.2653	33.00	6.05	39.05	46.00	-6.95	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

(10.25-inch)
Antenna polarity : V

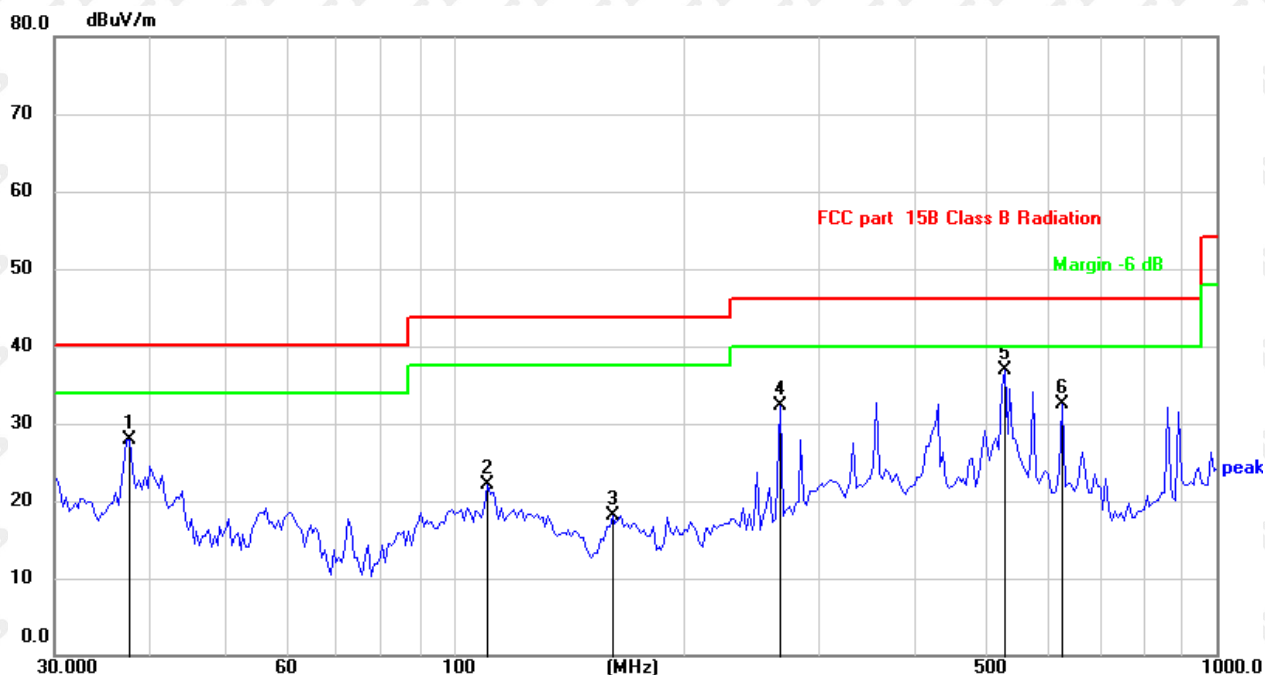


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.6796	33.78	-5.83	27.95	40.00	-12.05	QP
2		110.7626	29.97	-7.91	22.06	43.50	-21.44	QP
3		161.4738	23.86	-5.66	18.20	43.50	-25.30	QP
4		268.4852	37.84	-5.52	32.32	46.00	-13.68	QP
5	*	527.3201	35.61	1.22	36.83	46.00	-9.17	QP
6		628.3745	29.57	2.97	32.54	46.00	-13.46	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put.


Below 1GHz Test Results:
(12.3-inch)
Antenna polarity: H

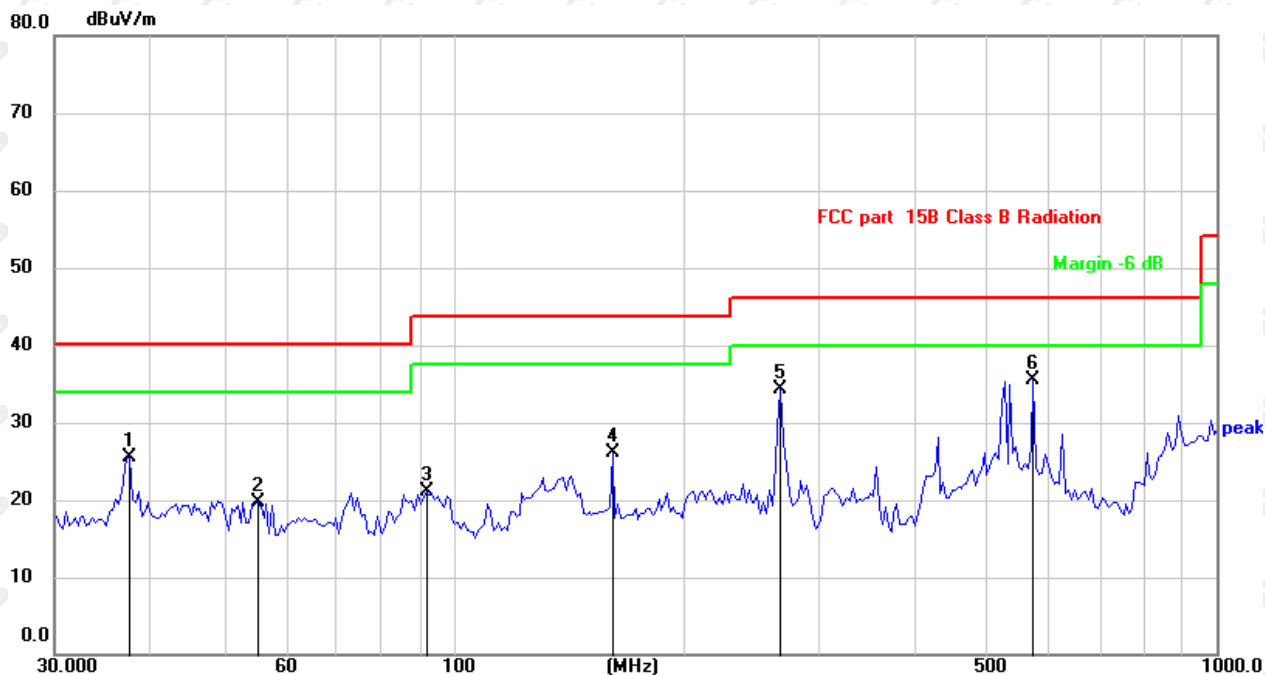

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
		MHz	Level	Factor	ment		
			dBuV	dB	dBuV/m	dB/m	dB
1		37.6796	31.28	-5.83	25.45	40.00	-14.55
2		55.4147	25.72	-5.93	19.79	40.00	-20.21
3		92.1386	30.54	-9.50	21.04	43.50	-22.46
4		161.4738	31.86	-5.66	26.20	43.50	-17.30
5		268.4852	39.84	-5.52	34.32	46.00	-11.68
6	*	575.6340	33.48	2.12	35.60	46.00	-10.40

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit - Level

(12.3-inch)
Antenna polarity: V

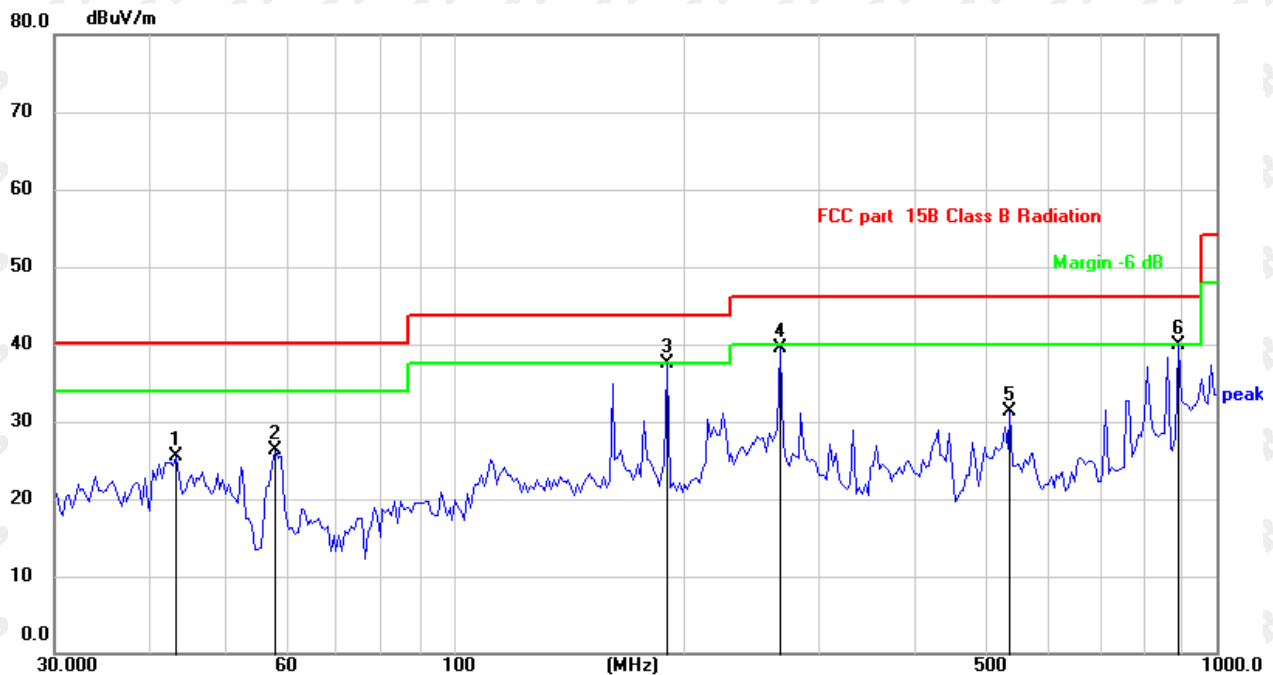

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.3534	30.88	-5.39	25.49	40.00	-14.51	QP
2		58.4074	32.37	-6.09	26.28	40.00	-13.72	QP
3	*	190.7390	45.62	-8.09	37.53	43.50	-5.97	QP
4		268.4852	45.02	-5.52	39.50	46.00	-6.50	QP
5		536.6471	29.85	1.39	31.24	46.00	-14.76	QP
6		892.2907	33.75	6.20	39.95	46.00	-6.05	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put.

Above 1 GHz Test Results:

(8-inch)

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.57	-3.64	60.93	74	-13.07	peak
4824	48.47	-3.64	44.83	54	-9.17	AVG
7236	57.75	-0.95	56.80	74	-17.20	peak
7236	45.45	-0.95	44.50	54	-9.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.82	-3.64	61.18	74	-12.82	peak
4824	47.03	-3.64	43.39	54	-10.61	AVG
7236	58.76	-0.95	57.81	74	-16.19	peak
7236	44.53	-0.95	43.58	54	-10.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Above 1 GHz Test Results:

(10.25-inch)

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.41	-3.64	61.77	74	-12.23	peak
4824	51.03	-3.64	47.39	54	-6.61	AVG
7236	56.93	-0.95	55.98	74	-18.02	peak
7236	44.56	-0.95	43.61	54	-10.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	67.20	-3.64	63.56	74	-10.44	peak
4824	49.61	-3.64	45.97	54	-8.03	AVG
7236	58.90	-0.95	57.95	74	-16.05	peak
7236	45.42	-0.95	44.47	54	-9.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Above 1 GHz Test Results:

(12.3-inch)

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.74	-3.64	60.10	74	-13.90	peak
4824	48.99	-3.64	45.35	54	-8.65	AVG
7236	57.24	-0.95	56.29	74	-17.71	peak
7236	44.90	-0.95	43.95	54	-10.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.47	-3.64	61.83	74	-12.17	peak
4824	47.87	-3.64	44.23	54	-9.77	AVG
7236	56.13	-0.95	55.18	74	-18.82	peak
7236	44.89	-0.95	43.94	54	-10.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(8.8-inch)

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.47	-3.51	59.96	74	-14.04	peak
4874	49.23	-3.51	45.72	54	-8.28	AVG
7311	57.55	-0.82	56.73	74	-17.27	peak
7311	45.61	-0.82	44.79	54	-9.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.97	-3.51	59.46	74	-14.54	peak
4874	49.47	-3.51	45.96	54	-8.04	AVG
7311	59.18	-0.82	58.36	74	-15.64	peak
7311	45.14	-0.82	44.32	54	-9.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(10.25-inch)

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.33	-3.51	61.82	74	-12.18	peak
4874	50.60	-3.51	47.09	54	-6.91	AVG
7311	57.72	-0.82	56.90	74	-17.10	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.86	-3.51	60.35	74	-13.65	peak
4874	48.80	-3.51	45.29	54	-8.71	AVG
7311	59.06	-0.82	58.24	74	-15.76	peak
7311	44.42	-0.82	43.60	54	-10.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(12.3-inch)

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.86	-3.51	61.35	74	-12.65	peak
4874	50.33	-3.51	46.82	54	-7.18	AVG
7311	59.89	-0.82	59.07	74	-14.93	peak
7311	43.99	-0.82	43.17	54	-10.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.21	-3.51	61.70	74	-12.30	peak
4874	48.06	-3.51	44.55	54	-9.45	AVG
7311	59.01	-0.82	58.19	74	-15.81	peak
7311	44.72	-0.82	43.90	54	-10.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(8.8-inch)

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.68	-3.43	60.25	74	-13.75	peak
4924	46.27	-3.43	42.84	54	-11.16	AVG
7386	57.21	-0.75	56.46	74	-17.54	peak
7386	42.54	-0.75	41.79	54	-12.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.92	-3.43	61.49	74	-12.51	peak
4924	48.05	-3.43	44.62	54	-9.38	AVG
7386	58.22	-0.75	57.47	74	-16.53	peak
7386	42.34	-0.75	41.59	54	-12.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(10.25-inch)

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.22	-3.43	59.79	74	-14.21	peak
4924	46.38	-3.43	42.95	54	-11.05	AVG
7386	58.84	-0.75	58.09	74	-15.91	peak
7386	43.67	-0.75	42.92	54	-11.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.10	-3.43	60.67	74	-13.33	peak
4924	47.45	-3.43	44.02	54	-9.98	AVG
7386	57.10	-0.75	56.35	74	-17.65	peak
7386	42.78	-0.75	42.03	54	-11.97	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(12.3-inch)

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.44	-3.43	61.01	74	-12.99	peak
4924	45.91	-3.43	42.48	54	-11.52	AVG
7386	58.75	-0.75	58.00	74	-16.00	peak
7386	43.82	-0.75	43.07	54	-10.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.03	-3.43	61.60	74	-12.40	peak
4924	48.53	-3.43	45.10	54	-8.90	AVG
7386	56.40	-0.75	55.65	74	-18.35	peak
7386	41.66	-0.75	40.91	54	-13.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

(8.8-inch)

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.28	-3.64	60.64	74	-13.36	peak
4824	48.16	-3.64	44.52	54	-9.48	AVG
7236	57.86	-0.95	56.91	74	-17.09	peak
7236	45.87	-0.95	44.92	54	-9.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.66	-3.64	59.02	74	-14.98	peak
4824	46.93	-3.64	43.29	54	-10.71	AVG
7236	59.08	-0.95	58.13	74	-15.87	peak
7236	43.48	-0.95	42.53	54	-11.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(10.25-inch)

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.25	-3.64	61.61	74	-12.39	peak
4824	48.97	-3.64	45.33	54	-8.67	AVG
7236	57.49	-0.95	56.54	74	-17.46	peak
7236	46.56	-0.95	45.61	54	-8.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.23	-3.64	58.59	74	-15.41	peak
4824	48.73	-3.64	45.09	54	-8.91	AVG
7236	58.39	-0.95	57.44	74	-16.56	peak
7236	44.12	-0.95	43.17	54	-10.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(12.3-inch)

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.81	-3.64	61.17	74	-12.83	peak
4824	47.59	-3.64	43.95	54	-10.05	AVG
7236	59.43	-0.95	58.48	74	-15.52	peak
7236	46.65	-0.95	45.70	54	-8.30	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.18	-3.64	60.54	74	-13.46	peak
4824	47.26	-3.64	43.62	54	-10.38	AVG
7236	59.55	-0.95	58.60	74	-15.40	peak
7236	45.69	-0.95	44.74	54	-9.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(8.8-inch)

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.83	-3.51	59.32	74	-14.68	peak
4874	48.76	-3.51	45.25	54	-8.75	AVG
7311	59.77	-0.82	58.95	74	-15.05	peak
7311	44.19	-0.82	43.37	54	-10.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.07	-3.51	59.56	74	-14.44	peak
4874	48.38	-3.51	44.87	54	-9.13	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.02	-0.82	42.20	54	-11.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

(10.25-inch)

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.50	-3.51	58.99	74	-15.01	peak
4874	49.63	-3.51	46.12	54	-7.88	AVG
7311	60.20	-0.82	59.38	74	-14.62	peak
7311	45.42	-0.82	44.60	54	-9.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.19	-3.51	60.68	74	-13.32	peak
4874	47.51	-3.51	44.00	54	-10.00	AVG
7311	56.52	-0.82	55.70	74	-18.30	peak
7311	41.67	-0.82	40.85	54	-13.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(12.3-inch)

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.34	-3.51	59.83	74	-14.17	peak
4874	49.68	-3.51	46.17	54	-7.83	AVG
7311	58.53	-0.82	57.71	74	-16.29	peak
7311	44.25	-0.82	43.43	54	-10.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.83	-3.51	59.32	74	-14.68	peak
4874	47.10	-3.51	43.59	54	-10.41	AVG
7311	57.49	-0.82	56.67	74	-17.33	peak
7311	41.60	-0.82	40.78	54	-13.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(8.8-inch)

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.34	-3.43	60.91	74	-13.09	peak
4924	48.25	-3.43	44.82	54	-9.18	AVG
7386	58.63	-0.75	57.88	74	-16.12	peak
7386	42.62	-0.75	41.87	54	-12.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.21	-3.43	58.78	74	-15.22	peak
4924	47.11	-3.43	43.68	54	-10.32	AVG
7386	56.02	-0.75	55.27	74	-18.73	peak
7386	42.21	-0.75	41.46	54	-12.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(10.25-inch)

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.68	-3.43	61.25	74	-12.75	peak
4924	49.42	-3.43	45.99	54	-8.01	AVG
7386	56.71	-0.75	55.96	74	-18.04	peak
7386	41.91	-0.75	41.16	54	-12.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.92	-3.43	59.49	74	-14.51	peak
4924	48.10	-3.43	44.67	54	-9.33	AVG
7386	56.52	-0.75	55.77	74	-18.23	peak
7386	41.51	-0.75	40.76	54	-13.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(12.3-inch)

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.84	-3.43	60.41	74	-13.59	peak
4924	47.56	-3.43	44.13	54	-9.87	AVG
7386	58.86	-0.75	58.11	74	-15.89	peak
7386	42.40	-0.75	41.65	54	-12.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.62	-3.43	59.19	74	-14.81	peak
4924	48.52	-3.43	45.09	54	-8.91	AVG
7386	56.04	-0.75	55.29	74	-18.71	peak
7386	41.95	-0.75	41.20	54	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

(8.8-inch)

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.83	-3.64	59.19	74	-14.81	peak
4824	47.08	-3.64	43.44	54	-10.56	AVG
7236	57.53	-0.95	56.58	74	-17.42	peak
7236	43.93	-0.95	42.98	54	-11.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.24	-3.64	62.60	74	-11.40	peak
4824	48.43	-3.64	44.79	54	-9.21	AVG
7236	58.56	-0.95	57.61	74	-16.39	peak
7236	44.13	-0.95	43.18	54	-10.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(10.25-inch)

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.35	-3.64	61.71	74	-12.29	peak
4824	46.56	-3.64	42.92	54	-11.08	AVG
7236	58.48	-0.95	57.53	74	-16.47	peak
7236	44.16	-0.95	43.21	54	-10.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.50	-3.64	61.86	74	-12.14	peak
4824	47.75	-3.64	44.11	54	-9.89	AVG
7236	59.17	-0.95	58.22	74	-15.78	peak
7236	42.30	-0.95	41.35	54	-12.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(12.3-inch)

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.47	-3.64	60.83	74	-13.17	peak
4824	47.89	-3.64	44.25	54	-9.75	AVG
7236	56.86	-0.95	55.91	74	-18.09	peak
7236	44.01	-0.95	43.06	54	-10.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.73	-3.64	61.09	74	-12.91	peak
4824	48.69	-3.64	45.05	54	-8.95	AVG
7236	59.79	-0.95	58.84	74	-15.16	peak
7236	45.66	-0.95	44.71	54	-9.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(8.8-inch)

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.99	-3.51	59.48	74.00	-14.52	peak
4874.00	47.59	-3.51	44.08	54.00	-9.92	AVG
7311.00	57.71	-0.82	56.89	74.00	-17.11	peak
7311.00	44.33	-0.82	43.51	54.00	-10.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.40	-3.51	58.89	74.00	-15.11	peak
4874.00	47.17	-3.51	43.66	54.00	-10.34	AVG
7311.00	58.75	-0.82	57.93	74.00	-16.07	peak
7311.00	42.63	-0.82	41.81	54.00	-12.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(10.25-inch)

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.49	-3.51	59.98	74.00	-14.02	peak
4874.00	47.84	-3.51	44.33	54.00	-9.67	AVG
7311.00	59.67	-0.82	58.85	74.00	-15.15	peak
7311.00	45.51	-0.82	44.69	54.00	-9.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.21	-3.51	60.70	74.00	-13.30	peak
4874.00	47.01	-3.51	43.50	54.00	-10.50	AVG
7311.00	57.56	-0.82	56.74	74.00	-17.26	peak
7311.00	42.64	-0.82	41.82	54.00	-12.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(12.3-inch)

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	65.54	-3.51	62.03	74.00	-11.97	peak
4874.00	48.97	-3.51	45.46	54.00	-8.54	AVG
7311.00	56.77	-0.82	55.95	74.00	-18.05	peak
7311.00	43.78	-0.82	42.96	54.00	-11.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.69	-3.51	60.18	74.00	-13.82	peak
4874.00	47.04	-3.51	43.53	54.00	-10.47	AVG
7311.00	58.80	-0.82	57.98	74.00	-16.02	peak
7311.00	43.13	-0.82	42.31	54.00	-11.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(8.8-inch)

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.80	-3.43	58.37	74	-15.63	peak
4924	46.70	-3.43	43.27	54	-10.73	AVG
7386	57.15	-0.75	56.40	74	-17.60	peak
7386	41.34	-0.75	40.59	54	-13.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.94	-3.43	61.51	74	-12.49	peak
4924	47.10	-3.43	43.67	54	-10.33	AVG
7386	57.49	-0.75	56.74	74	-17.26	peak
7386	42.77	-0.75	42.02	54	-11.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(10.25-inch)

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.84	-3.43	60.41	74	-13.59	peak
4924	48.18	-3.43	44.75	54	-9.25	AVG
7386	56.34	-0.75	55.59	74	-18.41	peak
7386	41.74	-0.75	40.99	54	-13.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.03	-3.43	60.60	74	-13.40	peak
4924	46.17	-3.43	42.74	54	-11.26	AVG
7386	58.47	-0.75	57.72	74	-16.28	peak
7386	43.69	-0.75	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(12.3-inch)

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.10	-3.43	60.67	74	-13.33	peak
4924	47.98	-3.43	44.55	54	-9.45	AVG
7386	58.40	-0.75	57.65	74	-16.35	peak
7386	41.59	-0.75	40.84	54	-13.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.23	-3.43	61.80	74	-12.20	peak
4924	45.88	-3.43	42.45	54	-11.55	AVG
7386	58.66	-0.75	57.91	74	-16.09	peak
7386	42.18	-0.75	41.43	54	-12.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(8.8-inch)

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.57	-3.63	61.94	74	-12.06	peak
4844	48.00	-3.63	44.37	54	-9.63	AVG
7266	59.65	-0.94	58.71	74	-15.29	peak
7266	44.13	-0.94	43.19	54	-10.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.16	-3.63	61.53	74	-12.47	peak
4844	47.74	-3.63	44.11	54	-9.89	AVG
7266	59.72	-0.94	58.78	74	-15.22	peak
7266	44.57	-0.94	43.63	54	-10.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(10.25-inch)

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.91	-3.63	62.28	74	-11.72	peak
4844	49.07	-3.63	45.44	54	-8.56	AVG
7266	58.00	-0.94	57.06	74	-16.94	peak
7266	45.79	-0.94	44.85	54	-9.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.93	-3.63	61.30	74	-12.70	peak
4844	47.65	-3.63	44.02	54	-9.98	AVG
7266	57.97	-0.94	57.03	74	-16.97	peak
7266	45.27	-0.94	44.33	54	-9.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(12.3-inch)

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.12	-3.63	59.49	74	-14.51	peak
4844	49.63	-3.63	46.00	54	-8.00	AVG
7266	60.19	-0.94	59.25	74	-14.75	peak
7266	45.94	-0.94	45.00	54	-9.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.26	-3.63	61.63	74	-12.37	peak
4844	47.98	-3.63	44.35	54	-9.65	AVG
7266	59.28	-0.94	58.34	74	-15.66	peak
7266	45.45	-0.94	44.51	54	-9.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

(8.8-inch)

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.34	-3.51	59.83	74	-14.17	peak
4874	47.32	-3.51	43.81	54	-10.19	AVG
7311	58.01	-0.82	57.19	74	-16.81	peak
7311	46.10	-0.82	45.28	54	-8.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.53	-3.51	43.02	54	-10.98	AVG
7311	56.66	-0.82	55.84	74	-18.16	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(10.25-inch)

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.52	-3.51	60.01	74	-13.99	peak
4874	47.47	-3.51	43.96	54	-10.04	AVG
7311	60.24	-0.82	59.42	74	-14.58	peak
7311	44.88	-0.82	44.06	54	-9.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.33	-3.51	58.82	74	-15.18	peak
4874	46.46	-3.51	42.95	54	-11.05	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(12.3-inch)

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.72	-3.51	59.21	74	-14.79	peak
4874	47.10	-3.51	43.59	54	-10.41	AVG
7311	58.17	-0.82	57.35	74	-16.65	peak
7311	43.67	-0.82	42.85	54	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.52	-3.51	43.01	54	-10.99	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(8.8-inch)

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.58	-3.43	61.15	74	-12.85	peak
4904	49.38	-3.43	45.95	54	-8.05	AVG
7356	56.16	-0.75	55.41	74	-18.59	peak
7356	41.01	-0.75	40.26	54	-13.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	61.85	-3.43	58.42	74	-15.58	peak
4904	46.31	-3.43	42.88	54	-11.12	AVG
7356	58.12	-0.75	57.37	74	-16.63	peak
7356	43.19	-0.75	42.44	54	-11.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(10.25-inch)

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.88	-3.43	61.45	74	-12.55	peak
4904	46.79	-3.43	43.36	54	-10.64	AVG
7356	55.85	-0.75	55.10	74	-18.90	peak
7356	43.84	-0.75	43.09	54	-10.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.10	-3.43	58.67	74	-15.33	peak
4904	46.88	-3.43	43.45	54	-10.55	AVG
7356	56.42	-0.75	55.67	74	-18.33	peak
7356	42.53	-0.75	41.78	54	-12.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

(12.3-inch)

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.95	-3.43	59.52	74	-14.48	peak
4904	48.56	-3.43	45.13	54	-8.87	AVG
7356	56.82	-0.75	56.07	74	-17.93	peak
7356	42.73	-0.75	41.98	54	-12.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.11	-3.43	60.68	74	-13.32	peak
4904	45.64	-3.43	42.21	54	-11.79	AVG
7356	57.11	-0.75	56.36	74	-17.64	peak
7356	43.12	-0.75	42.37	54	-11.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

(8.8-inch)

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.34	-5.81	50.53	74	-23.47	peak
2390	/	-5.81	/	54	/	AVG
2399	63.77	-5.84	57.93	74	-16.07	peak
2399	49.88	-5.84	44.04	54	-9.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.97	-5.81	51.16	74	-22.84	peak
2390	/	-5.81	/	54	/	AVG
2399	61.80	-5.84	55.96	74	-18.04	peak
2399	46.13	-5.84	40.29	54	-13.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(10.25-inch)

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.92	-5.81	51.11	74	-22.89	
2390	/	-5.81	/	54	/	AVG
2399	63.47	-5.84	57.63	74	-16.37	peak
2399	48.82	-5.84	42.98	54	-11.02	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.64	-5.81	50.83	74	-23.17	
2390	/	-5.81	/	54	/	AVG
2399	62.08	-5.84	56.24	74	-17.76	peak
2399	46.27	-5.84	40.43	54	-13.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(12.3-inch)

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.50	-5.81	50.69	74	-23.31	
2390	/	-5.81	/	54	/	AVG
2399	64.24	-5.84	58.40	74	-15.60	peak
2399	48.51	-5.84	42.67	54	-11.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.84	-5.81	51.03	74	-22.97	
2390	/	-5.81	/	54	/	AVG
2399	63.19	-5.84	57.35	74	-16.65	peak
2399	47.74	-5.84	41.90	54	-12.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(8.8-inch)

802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.27	-5.65	51.62	74	-22.38	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.66	-5.65	51.01	74	-22.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(10.25-inch)

802.11b Mode TX CH High (2462MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.61	-5.65	50.96	74	-23.04	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.95	-5.65	50.30	74	-23.70	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(12.3-inch)

802.11b Mode TX CH High (2462MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.23	-5.65	50.58	74	-23.42	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(8.8-inch)

802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.70	-5.81	52.89	74	-21.11	peak
2390	/	-5.81	/	54	/	AVG
2399	63.22	-5.84	57.38	74	-16.62	peak
2399	47.26	-5.84	41.42	54	-12.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.65	-5.81	51.84	74	-22.16	peak
2390	/	-5.81	/	54	/	AVG
2399	63.09	-5.84	57.25	74	-16.75	peak
2399	45.77	-5.84	39.93	54	-14.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(10.25-inch)

802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.95	-5.81	53.14	74	-20.86	peak
2390	/	-5.81	/	54	/	AVG
2399	61.78	-5.84	55.94	74	-18.06	peak
2399	45.86	-5.84	40.02	54	-13.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.20	-5.81	50.39	74	-23.61	peak
2390	/	-5.81	/	54	/	AVG
2399	62.91	-5.84	57.07	74	-16.93	peak
2399	45.95	-5.84	40.11	54	-13.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(12.3-inch)

802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.59	-5.81	53.78	74	-20.22	peak
2390	/	-5.81	/	54	/	AVG
2399	61.98	-5.84	56.14	74	-17.86	peak
2399	47.04	-5.84	41.20	54	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.20	-5.81	50.39	74	-23.61	peak
2390	/	-5.81	/	54	/	AVG
2399	62.27	-5.84	56.43	74	-17.57	peak
2399	46.40	-5.84	40.56	54	-13.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(8.8-inch)

TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.94	-5.65	52.29	74	-21.71	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.71	-5.65	51.06	74	-22.94	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

(10.25-inch)

TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.62	-5.65	50.97	74	-23.03	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.13	-5.65	52.48	74	-21.52	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

(12.3-inch)

TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.38	-5.65	50.73	74	-23.27	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.22	-5.65	50.57	74	-23.43	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(8.8-inch)

802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.34	-5.81	50.53	74	-23.47	peak
2390	/	-5.81	/	54	/	AVG
2399	63.70	-5.84	57.86	74	-16.14	peak
2399	48.40	-5.84	42.56	54	-11.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.71	-5.81	49.90	74	-24.10	peak
2390	/	-5.81	/	54	/	AVG
2399	59.76	-5.84	53.92	74	-20.08	peak
2399	47.70	-5.84	41.86	54	-12.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(10.25-inch)

802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.36	-5.81	50.55	74	-23.45	peak
2390	/	-5.81	/	54	/	AVG
2399	63.10	-5.84	57.26	74	-16.74	peak
2399	48.86	-5.84	43.02	54	-10.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.46	-5.81	51.65	74	-22.35	peak
2390	/	-5.81	/	54	/	AVG
2399	60.73	-5.84	54.89	74	-19.11	peak
2399	47.97	-5.84	42.13	54	-11.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(12.3-inch)

802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.51	-5.81	50.70	74	-23.30	peak
2390	/	-5.81	/	54	/	AVG
2399	63.88	-5.84	58.04	74	-15.96	peak
2399	47.42	-5.84	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.35	-5.81	50.54	74	-23.46	peak
2390	/	-5.81	/	54	/	AVG
2399	60.37	-5.84	54.53	74	-19.47	peak
2399	48.22	-5.84	42.38	54	-11.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(8.8-inch)

802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.06	-5.65	51.41	74	-22.59	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.71	-5.65	50.06	74	-23.94	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(10.25-inch)

802.11n/H20 Mode TX CH High (2462MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.29	-5.65	51.64	74	-22.36	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.89	-5.65	51.24	74	-22.76	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(12.3-inch)

802.11n/H20 Mode TX CH High (2462MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.11	-5.65	50.46	74	-23.54	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.48	-5.65	49.83	74	-24.17	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(8.8-inch)

802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.35	-5.81	53.54	74	-20.46	peak
2390	/	-5.81	/	54	/	AVG
2399	62.70	-5.84	56.86	74	-17.14	peak
2399	45.70	-5.84	39.86	54	-14.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.60	-5.81	52.79	74	-21.21	peak
2390	/	-5.81	/	54	/	AVG
2399	61.58	-5.84	55.74	74	-18.26	peak
2399	46.75	-5.84	40.91	54	-13.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

(10.25-inch)

802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.05	-5.81	52.24	74	-21.76	peak
2390	/	-5.81	/	54	/	AVG
2399	64.05	-5.84	58.21	74	-15.79	peak
2399	46.87	-5.84	41.03	54	-12.97	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.85	-5.81	52.04	74	-21.96	peak
2390	/	-5.81	/	54	/	AVG
2399	62.18	-5.84	56.34	74	-17.66	peak
2399	46.60	-5.84	40.76	54	-13.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(12.3-inch)

802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.06	-5.81	52.25	74	-21.75	
2390	/	-5.81	/	54	/	AVG
2399	62.41	-5.84	56.57	74	-17.43	peak
2399	46.55	-5.84	40.71	54	-13.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.64	-5.81	51.83	74	-22.17	
2390	/	-5.81	/	54	/	AVG
2399	62.15	-5.84	56.31	74	-17.69	peak
2399	45.67	-5.84	39.83	54	-14.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

(8.8-inch)

802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.65	51.33	74	-22.67	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.48	-5.65	50.83	74	-23.17	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(10.25-inch)

802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.22	-5.65	51.57	74	-22.43	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.92	-5.65	51.27	74	-22.73	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

(12.3-inch)

802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.80	-5.65	52.15	74	-21.85	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.11	-5.65	50.46	74	-23.54	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

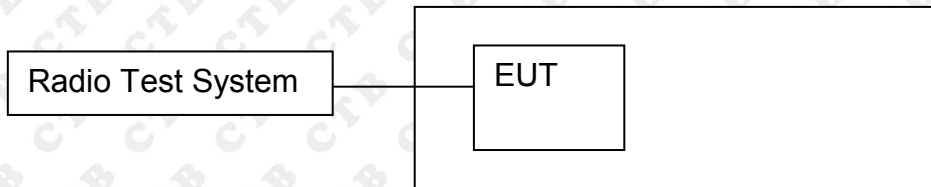

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 30kHz, VBW = 100kHz, Span=2MHz, Sweep = auto

Detector function = peak, Trace = max hold



8.4 Test Result


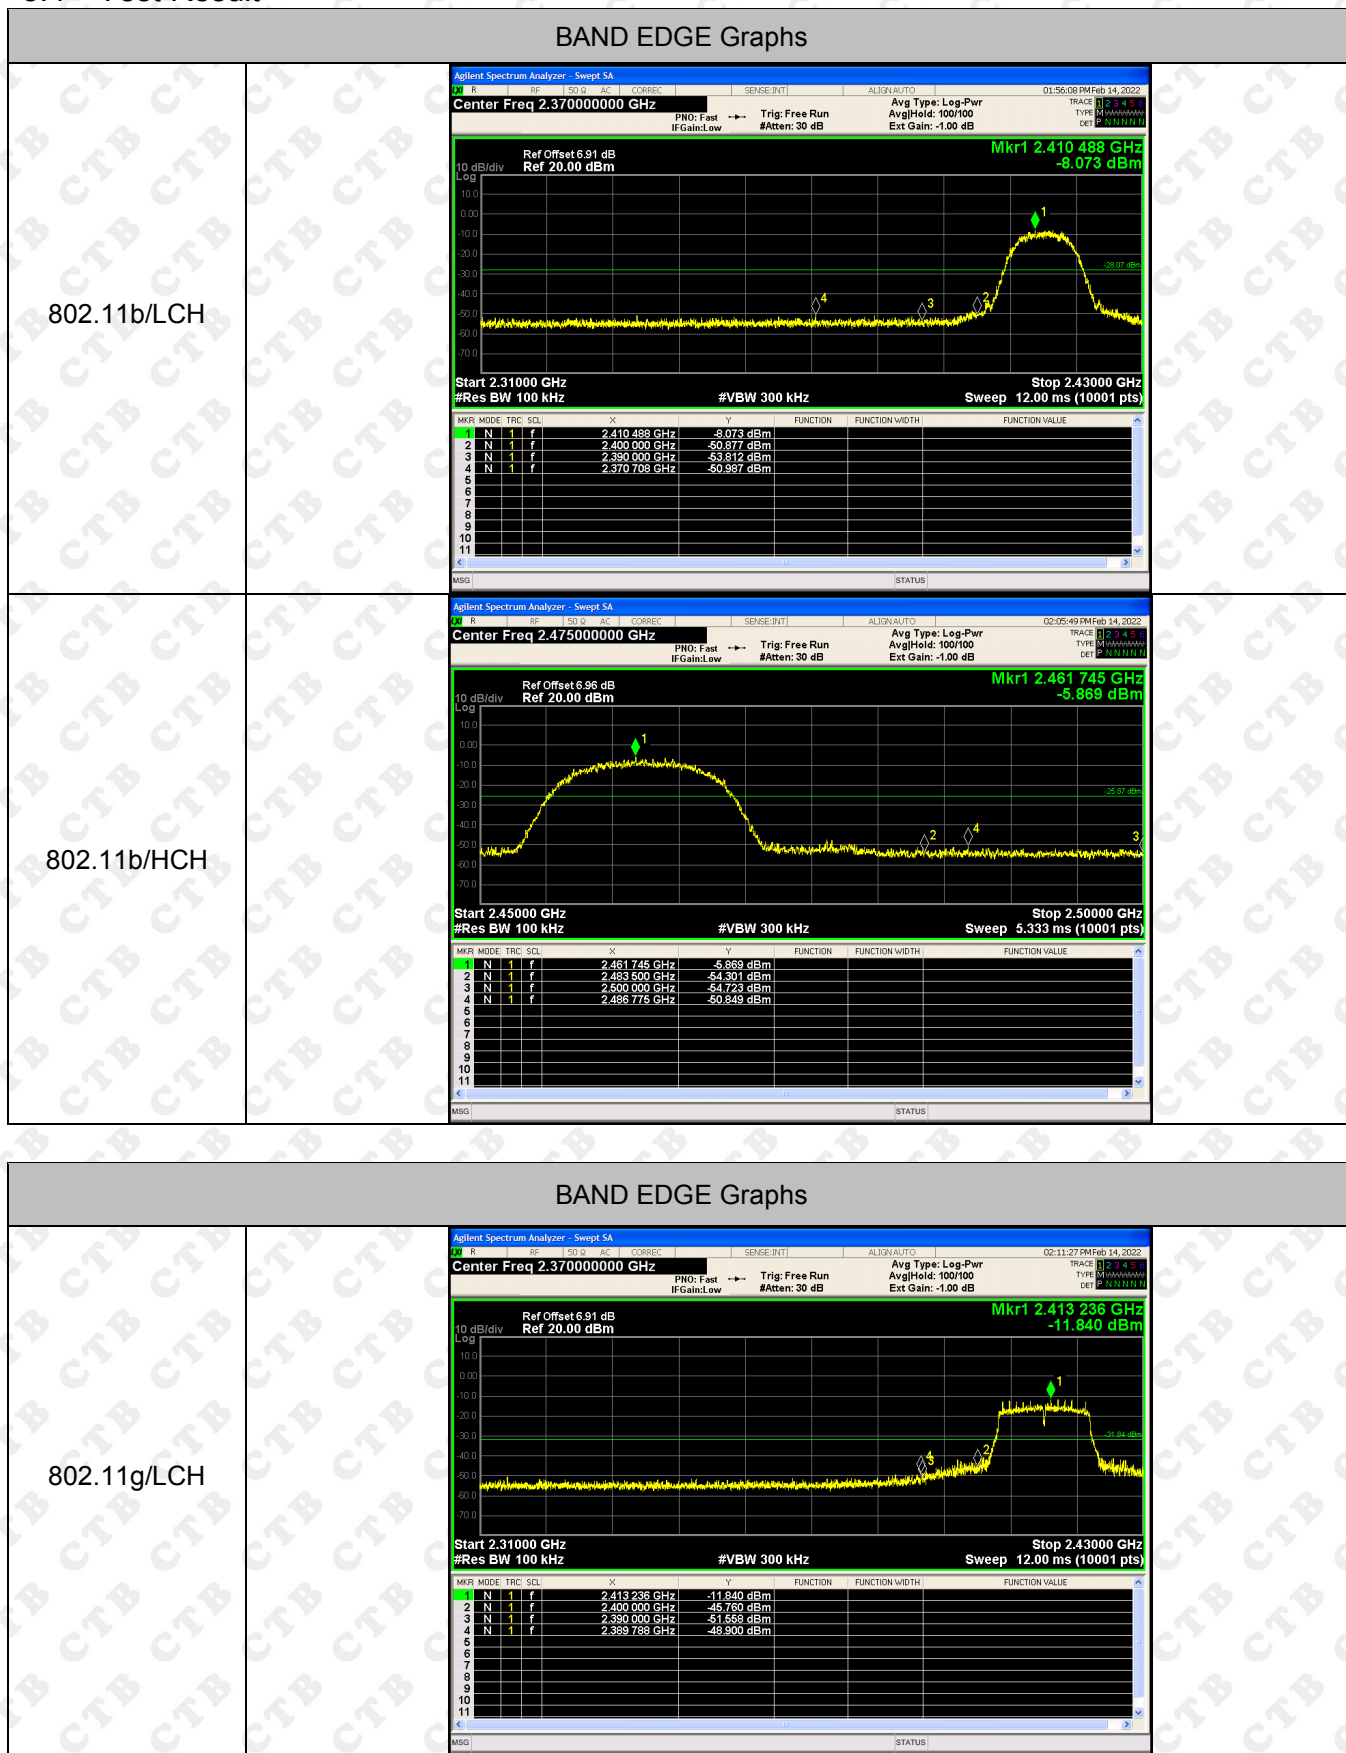


802.11g/HCH

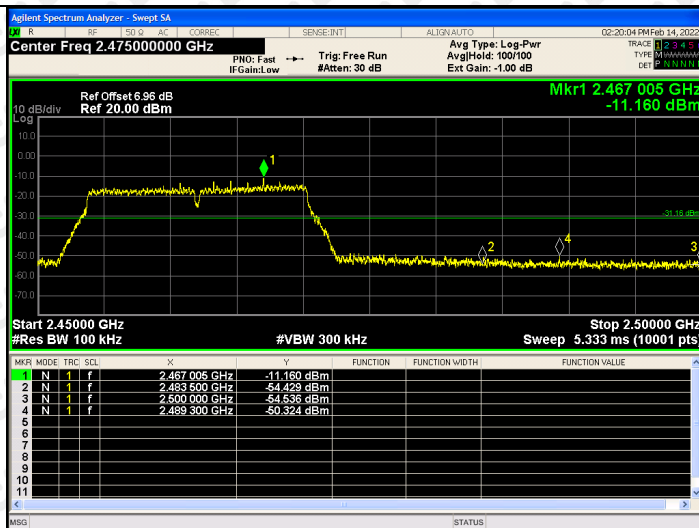


BAND EDGE Graphs

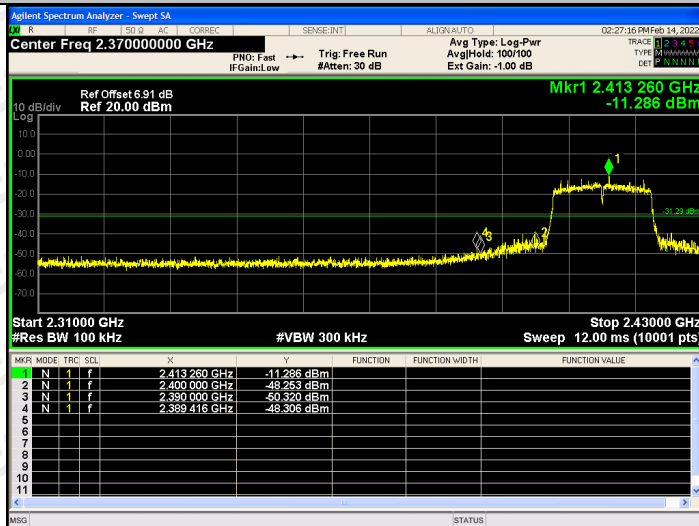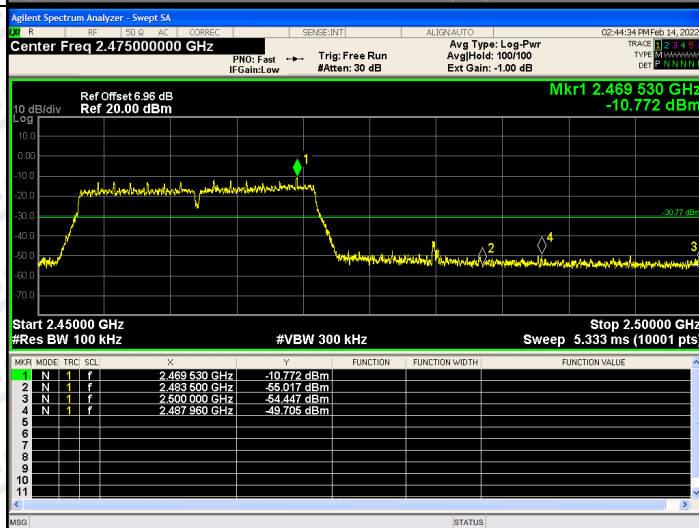802.11n(HT20)/L
CH

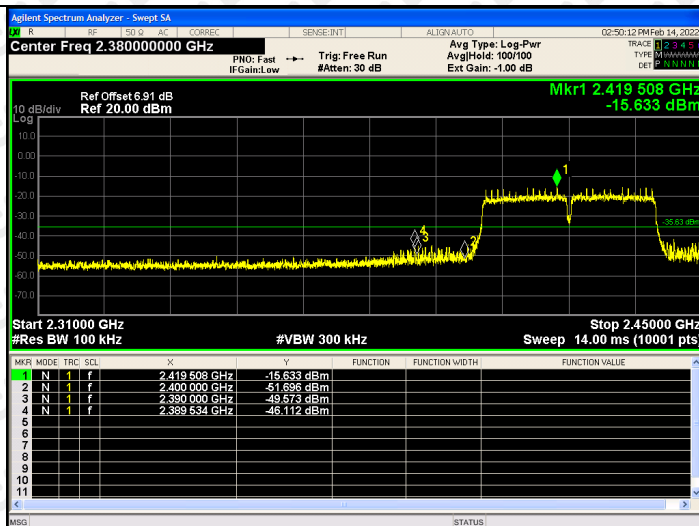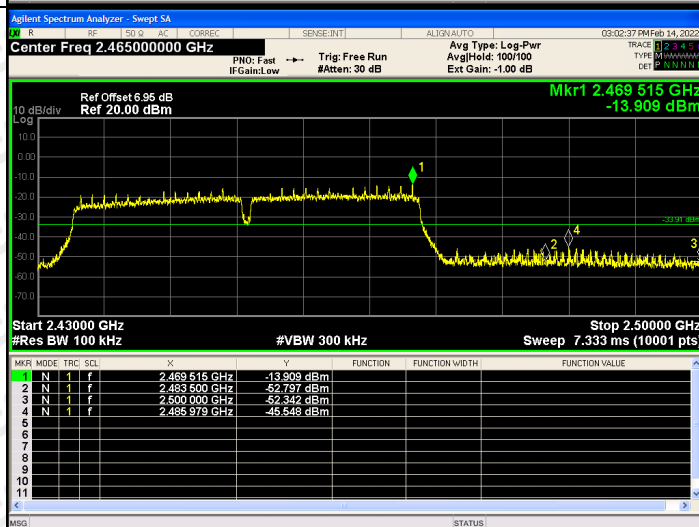802.11n(HT20)/H
CH


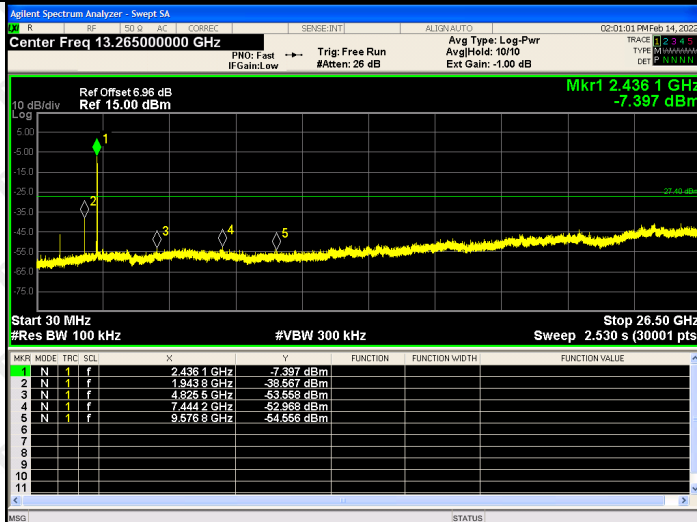
802.11n(HT40)/L
CH

802.11n(HT40)/H
CH

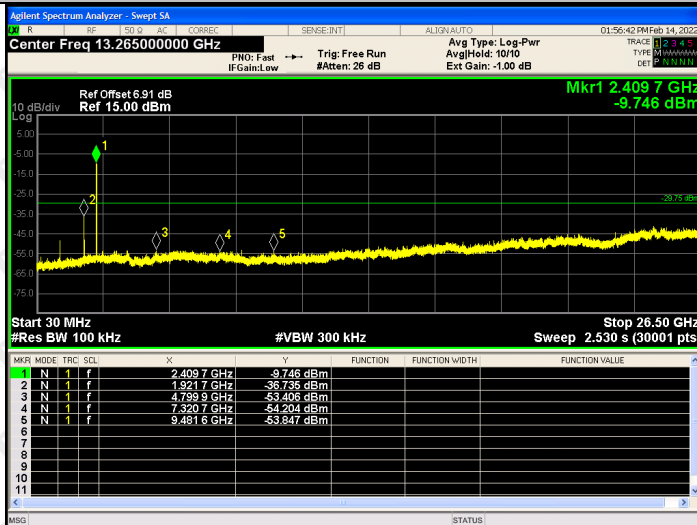
RF Conducted Spurious Emissions Graphs


802.11b
/LCH



802.11b
/MCH




802.11b
/HCH

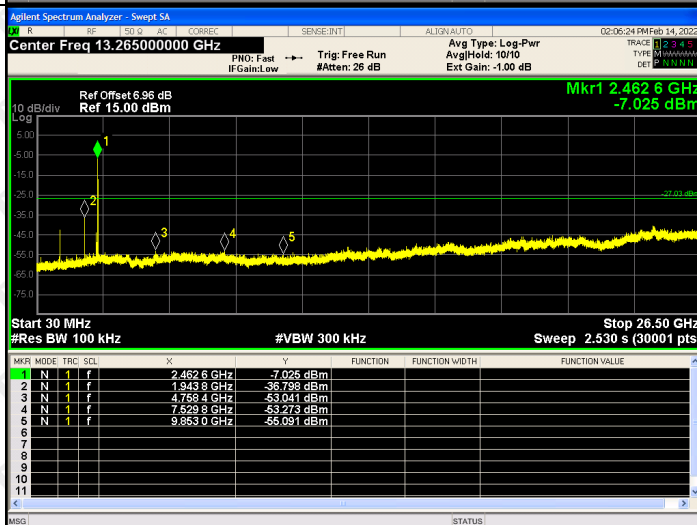


RF Conducted Spurious Emissions Graphs


802.11g
/LCH

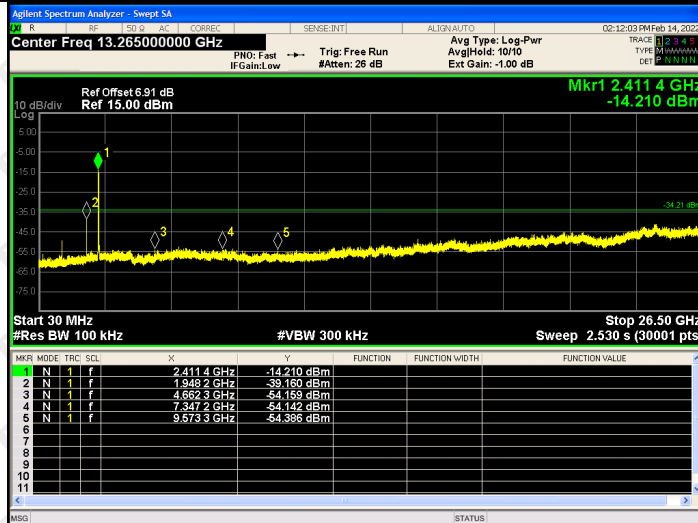

802.11g
/MCH

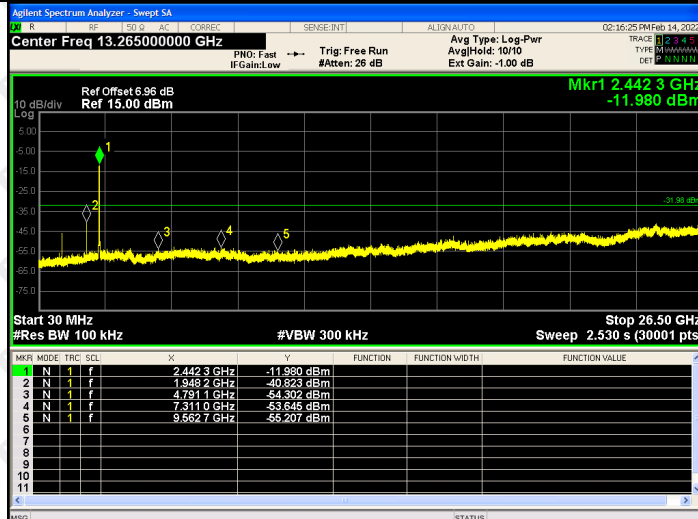


802.11g
/HCH

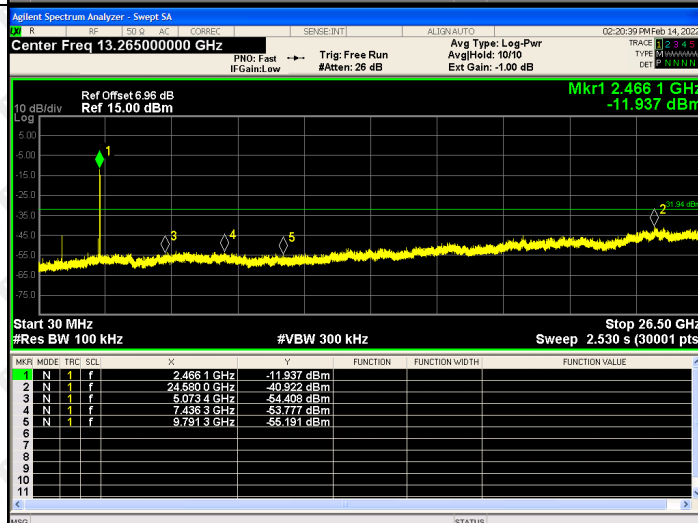


RF Conducted Spurious Emissions Graphs


802.11n
(HT20)/
LCH

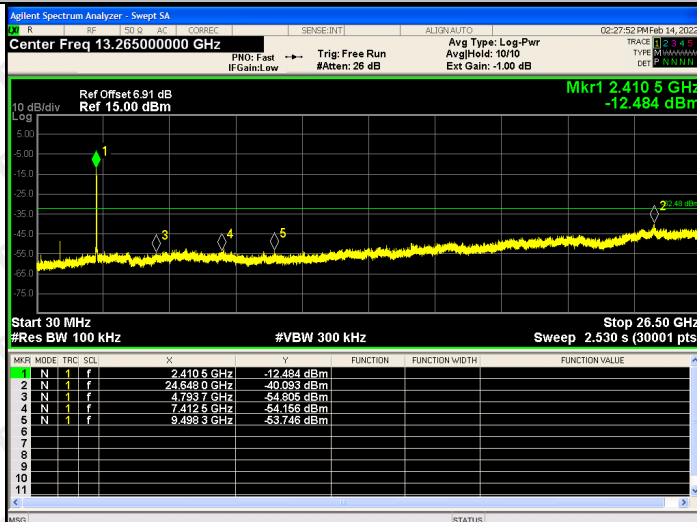


802.11
n(HT20)
/MCH

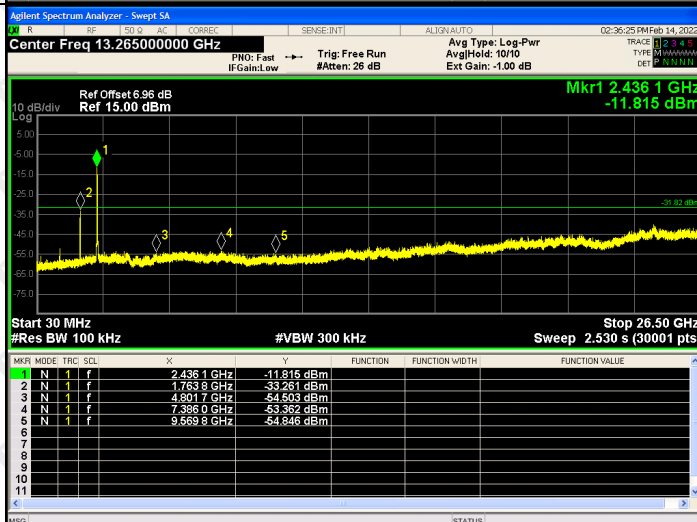

802.11
n(HT20)
/HCH

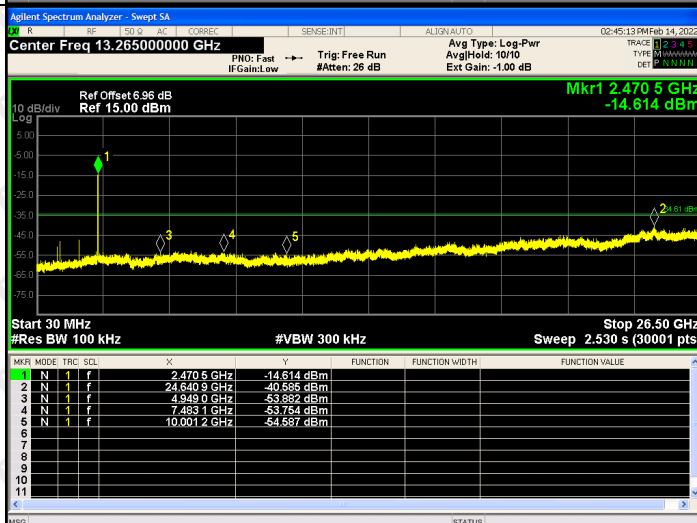


RF Conducted Spurious Emissions Graphs

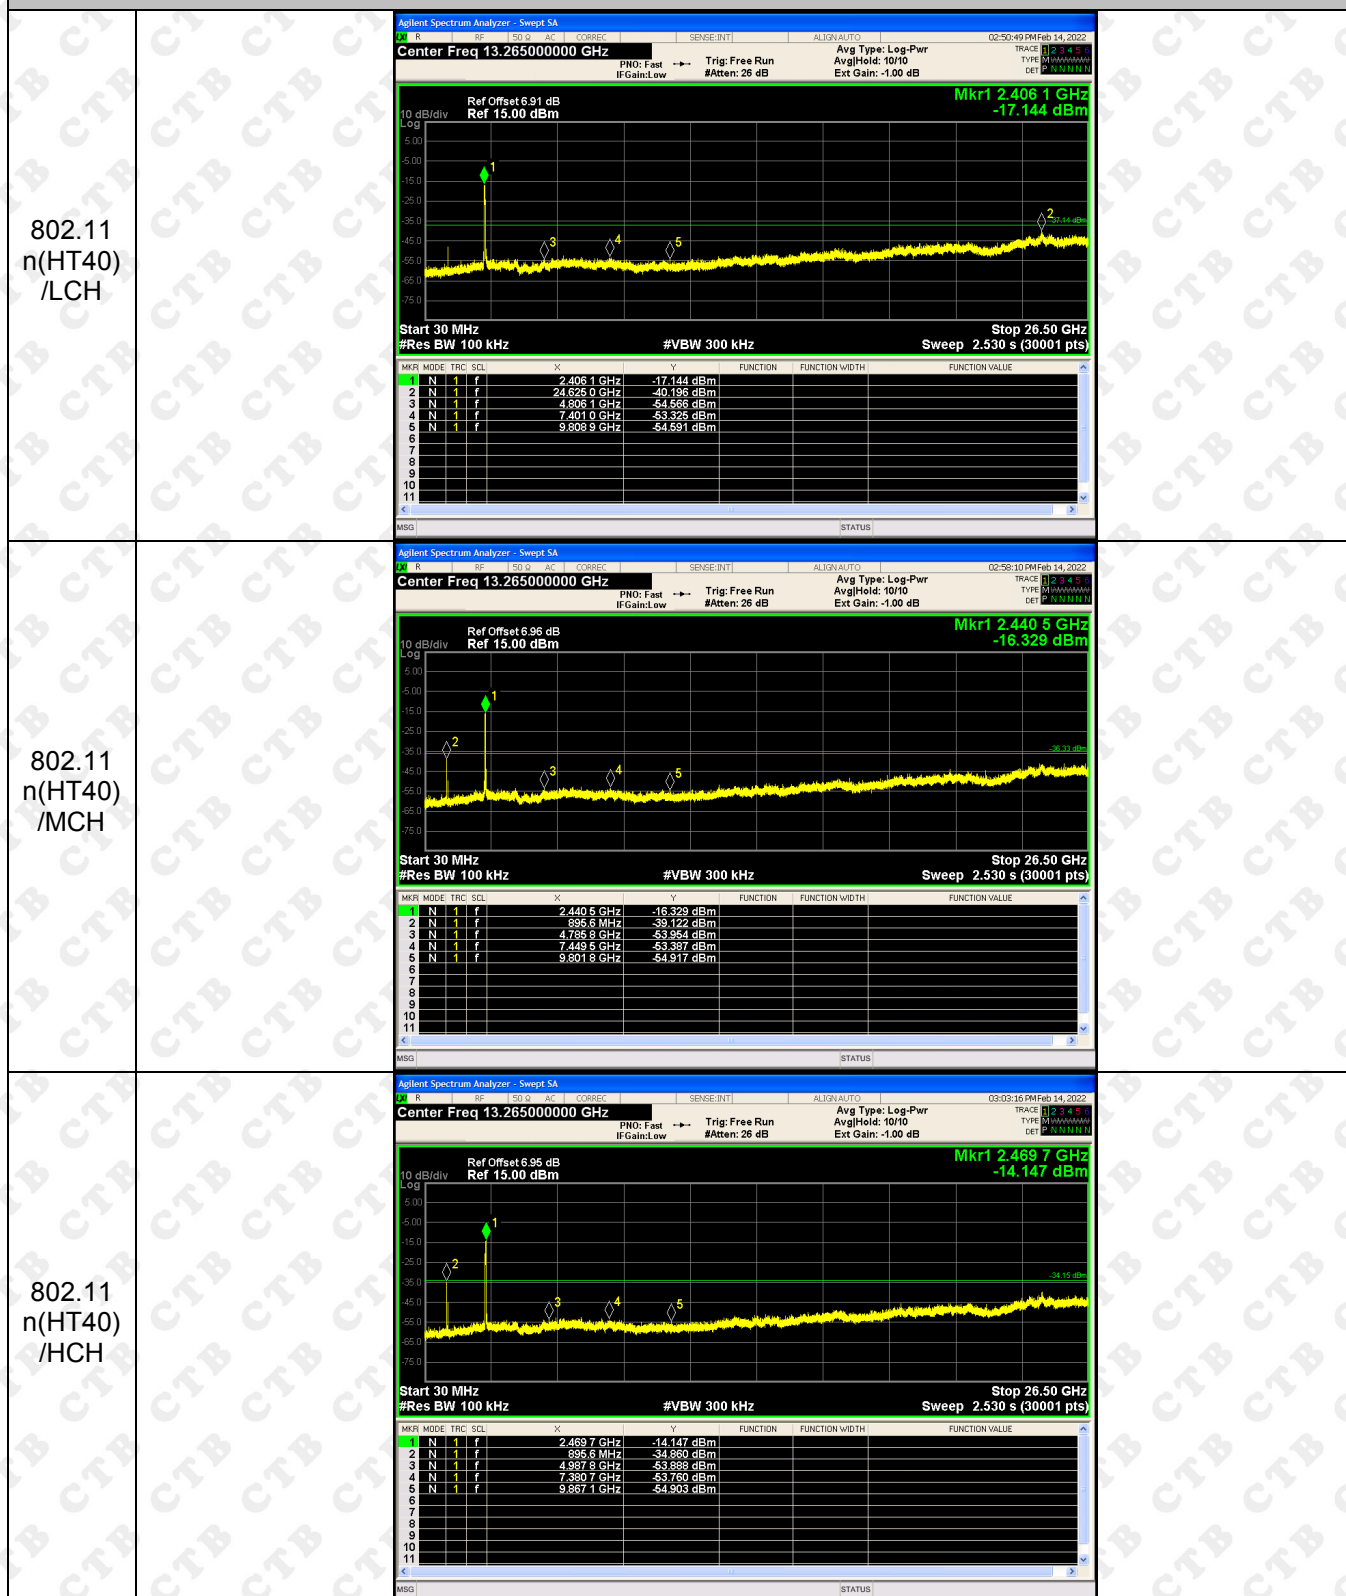

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

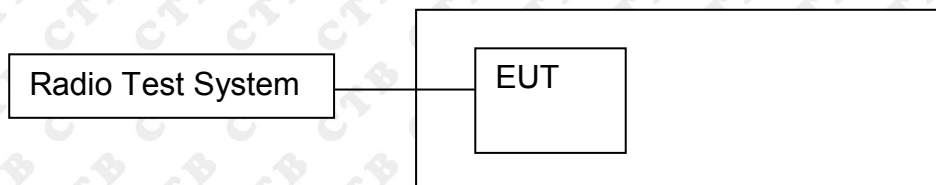

9.2 Limit




FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS




9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.



9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.03	30	PASS
	MCH	7.29	30	PASS
	HCH	7.54	30	PASS
802.11g	LCH	6.19	30	PASS
	MCH	6.86	30	PASS
	HCH	6.46	30	PASS
802.11n(HT20)	LCH	6.08	30	PASS
	MCH	7.03	30	PASS
	HCH	6.47	30	PASS
802.11n(HT40)	LCH	5.53	30	PASS
	MCH	5.10	30	PASS
	HCH	5.44	30	PASS

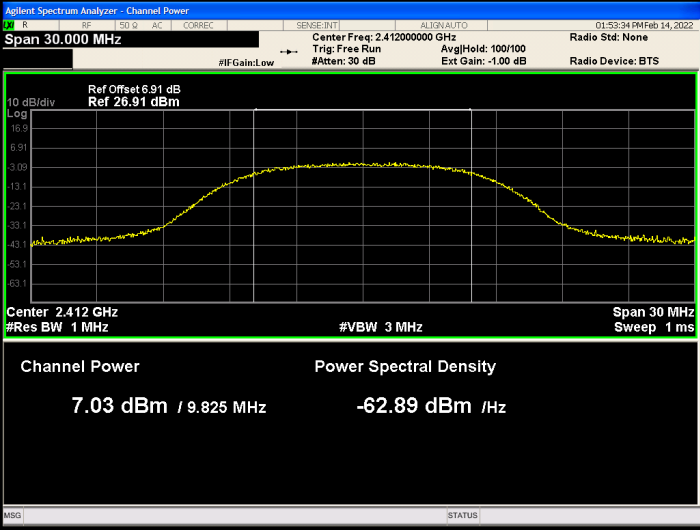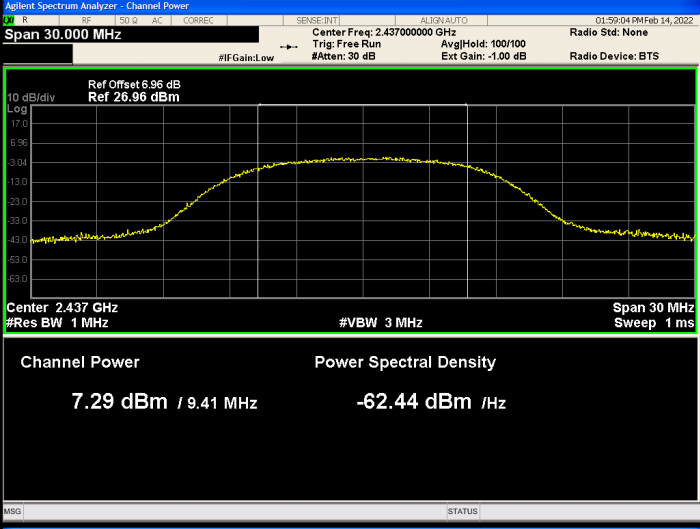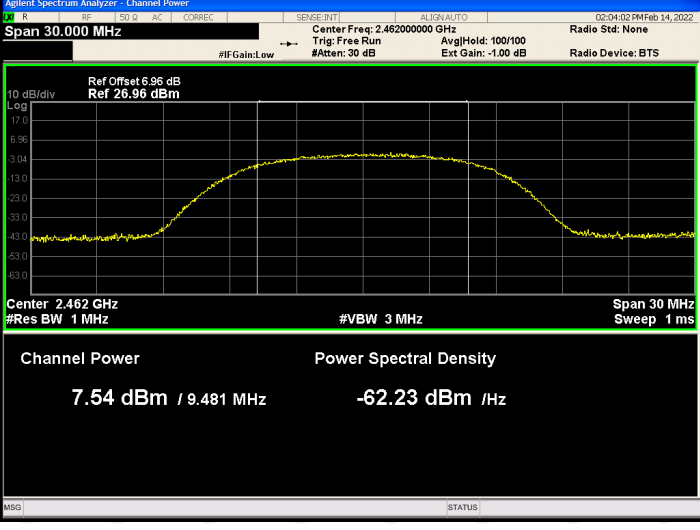Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	
	MCH	
	HCH	

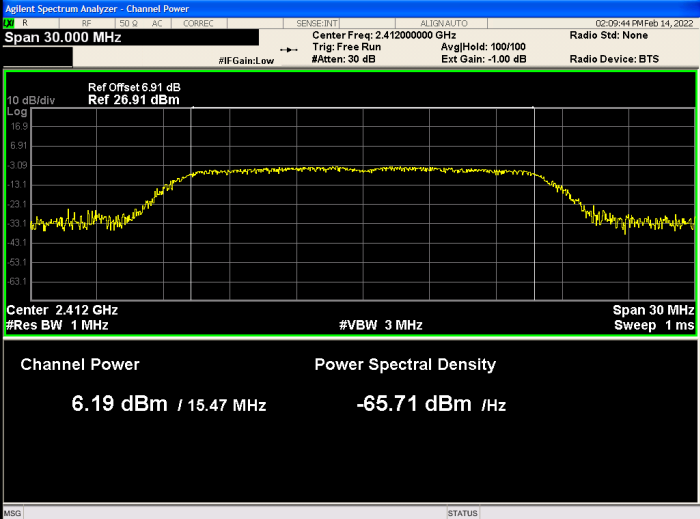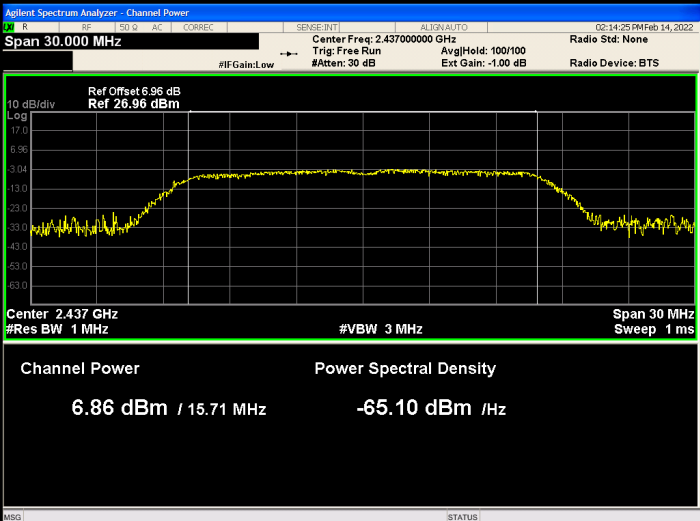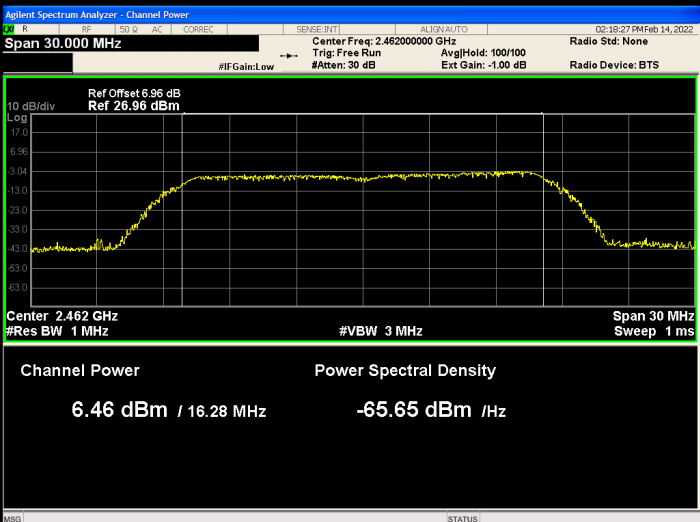	LCH	
802.11g	MCH	
	HCH	

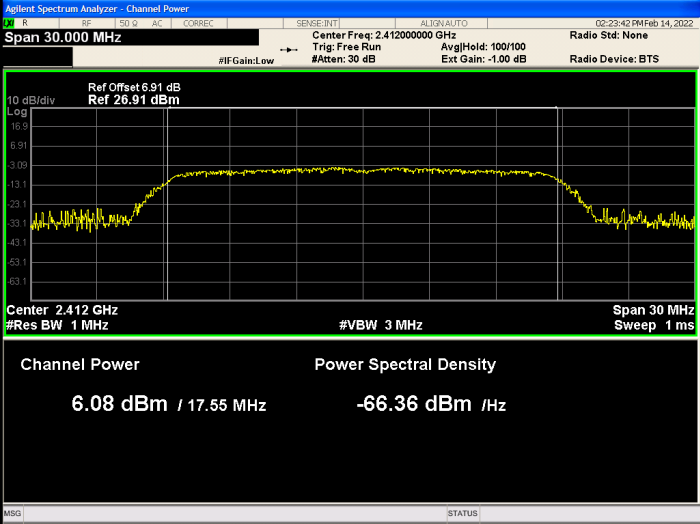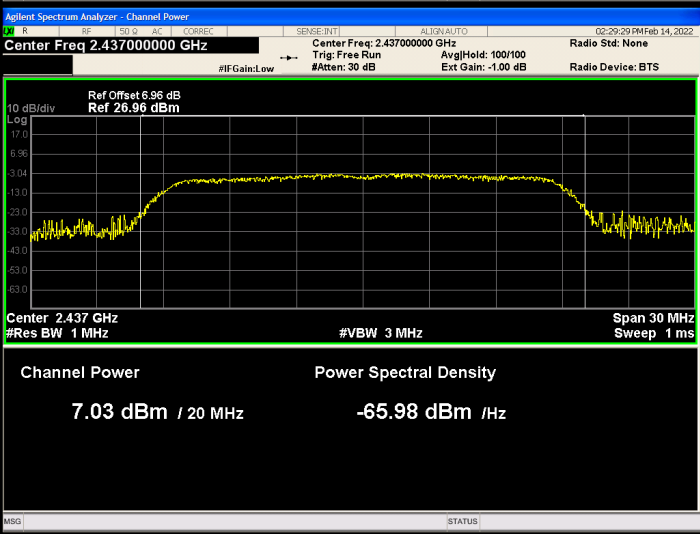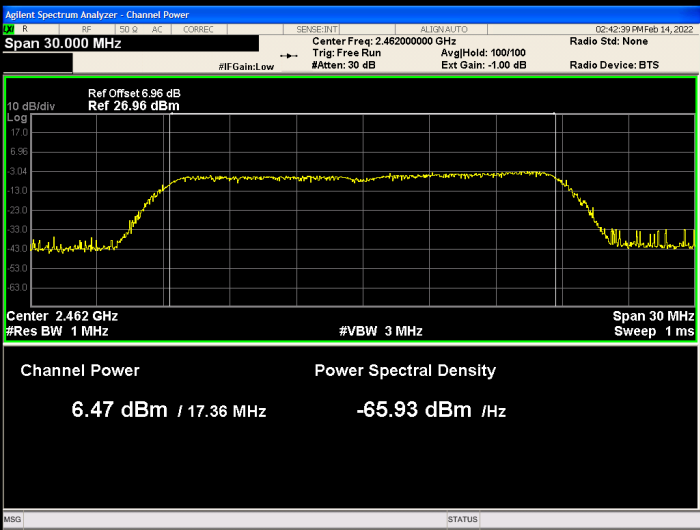	LCH	
802.11n(HT20)	MCH	
	HCH	

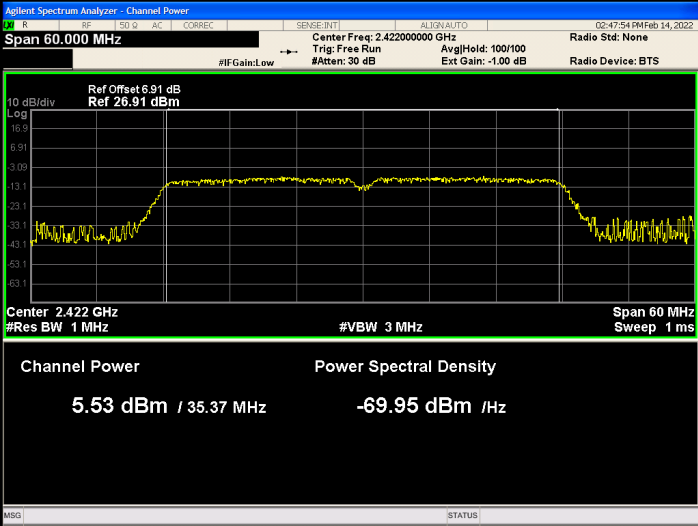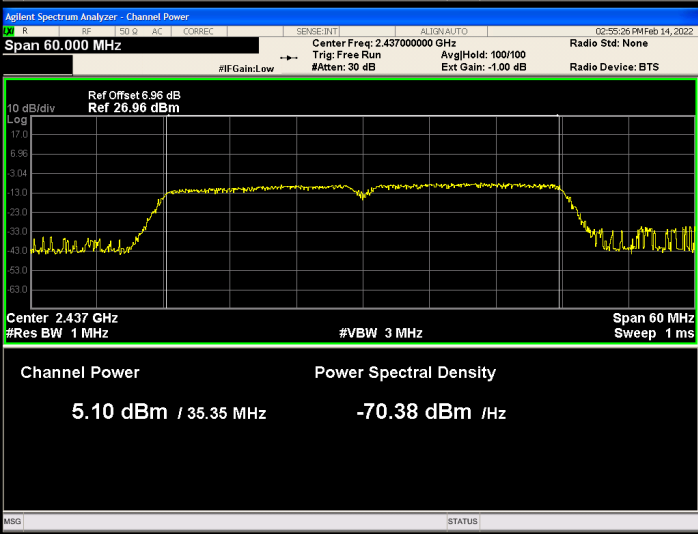	LCH	
802.11n(HT40)	MCH	
	HCH	