

EXHIBIT E- RADIATED SPURIOUS EMISSION DATA

1 WCDMA Band II

1.1 WCDMA Band II MCH

Test result

Project Number: Certification

Test Time: 2023-08-30_17.34.09

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#04

RSE Test case: FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

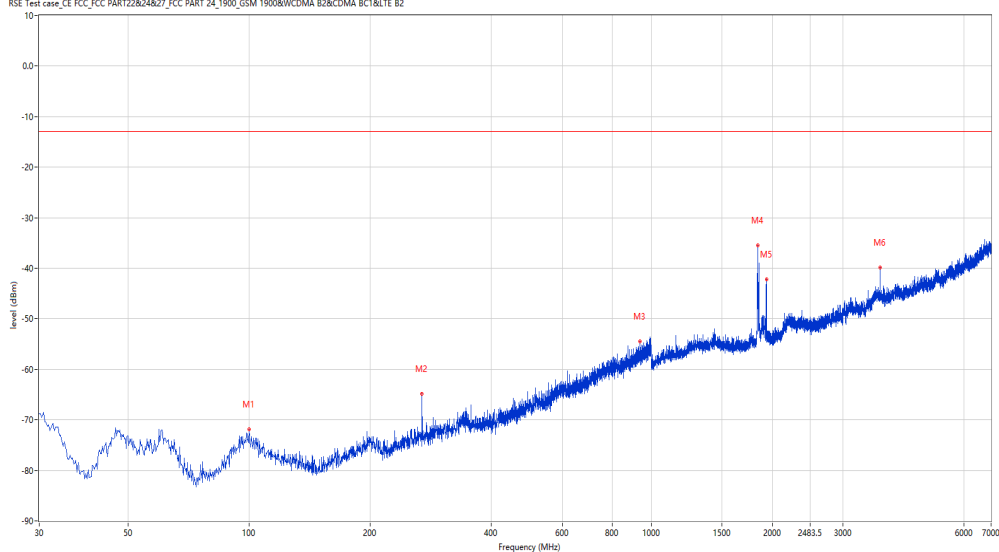

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
99.840	-71.92	-14.03	-13.0	58.92	181.80	Horizontal	Vertical	Pass
268.862	-64.85	-13.51	-13.0	51.85	360.00	Horizontal	Vertical	Pass
938.405	-54.51	0.98	-13.0	41.51	0.00	Horizontal	Vertical	Pass
1841.500	-35.45	2.37	-13.0	22.45	227.30	Horizontal	Vertical	Pass
1933.000	-42.23	0.86	-13.0	29.23	207.20	Horizontal	Vertical	Pass
3707.000	-39.85	11.69	-13.0	26.85	86.10	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-30_19.29.03

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#04

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

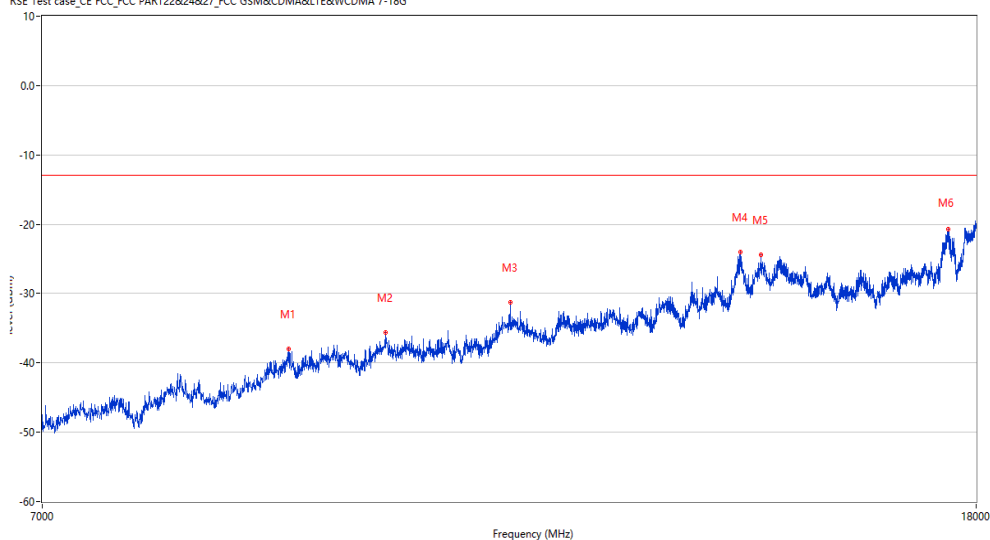

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
8982.750	-37.99	28.67	-13.0	24.99	338.50	Horizontal	Vertical	Pass
9904.000	-35.65	29.93	-13.0	22.65	328.00	Horizontal	Vertical	Pass
11235.000	-31.22	31.40	-13.0	18.22	131.90	Horizontal	Vertical	Pass
14185.750	-24.05	40.30	-13.0	11.05	15.00	Horizontal	Vertical	Pass
14482.750	-24.37	38.73	-13.0	11.37	306.50	Horizontal	Vertical	Pass
17504.999	-20.73	43.00	-13.0	7.73	188.40	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-30_17.31.04

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.2

Hum.: 53%

Test Engineer: LYG


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#04

RSE Test case_CE_FCC_FCC PART2&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

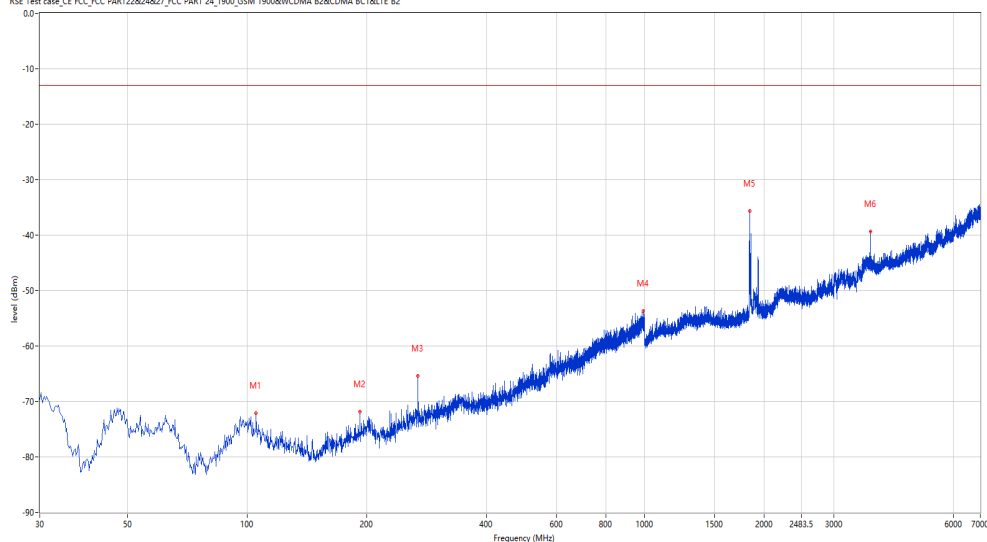

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
105.175	-72.10	-15.28	-13.0	59.10	52.00	Vertical	Vertical	Pass
191.990	-71.79	-15.79	-13.0	58.79	360.00	Vertical	Vertical	Pass
268.620	-65.43	-13.51	-13.0	52.43	0.40	Vertical	Vertical	Pass
991.028	-53.72	2.09	-13.0	40.72	192.00	Vertical	Vertical	Pass
1842.000	-35.71	3.45	-13.0	22.71	221.60	Vertical	Vertical	Pass
3706.000	-39.37	11.70	-13.0	26.37	151.40	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-30_19.37.22

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#04

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

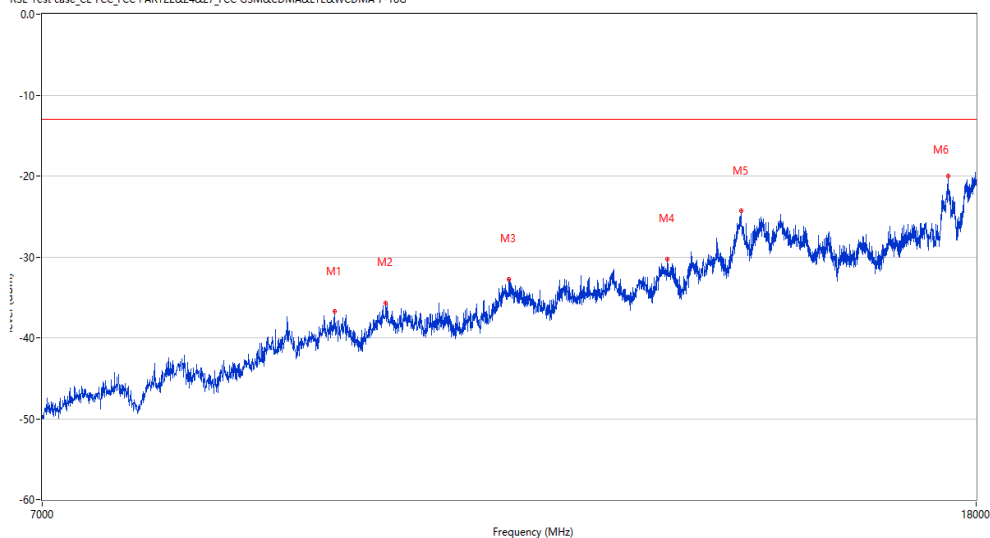

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
9406.250	-36.74	28.40	-13.0	23.74	358.90	Vertical	Vertical	Pass
9909.500	-35.67	29.96	-13.0	22.67	26.50	Vertical	Vertical	Pass
11221.250	-32.72	31.19	-13.0	19.72	360.00	Vertical	Vertical	Pass
13173.750	-30.25	34.09	-13.0	17.25	90.20	Vertical	Vertical	Pass
14196.750	-24.32	40.06	-13.0	11.32	0.00	Vertical	Vertical	Pass
17499.501	-20.01	43.31	-13.0	7.01	111.00	Vertical	Vertical	Pass

2 WCDMA Band IV

2.1 WCDMA Band IV MCH

Test result

Project Number: Certification

Test Time: 2023-08-30_17.37.32

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.2

Hum.: 53%

Test Engineer: LYG


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#04

RSE Test case_CE FCC_PART22&24&27_FCC PART 27_1700_WCDMA B4<E B4&B66

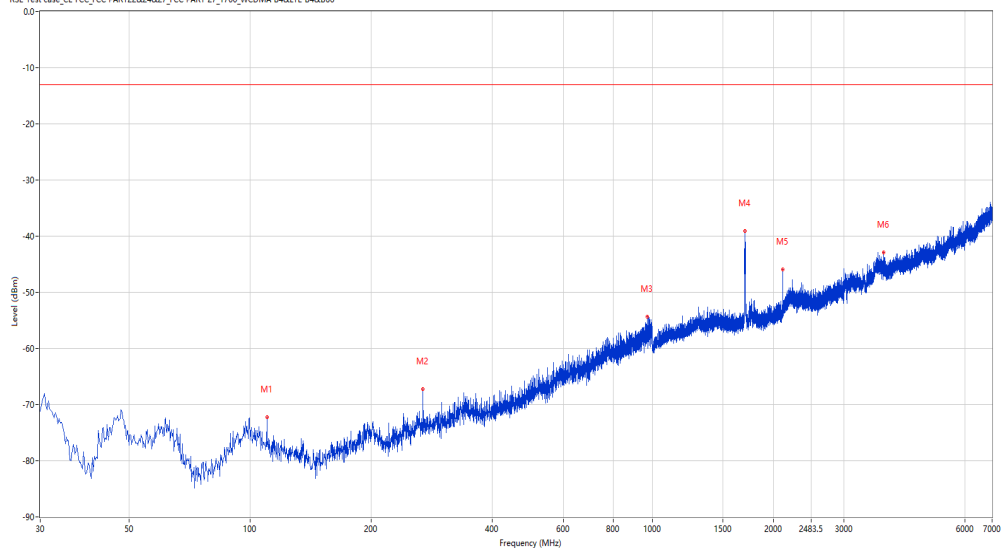

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
110.025	-72.29	-16.48	-13.0	59.29	359.00	Horizontal	Vertical	Pass
268.862	-67.27	-13.52	-13.0	54.27	246.40	Horizontal	Vertical	Pass
972.113	-54.40	1.44	-13.0	41.40	119.90	Horizontal	Vertical	Pass
1702.000	-39.07	1.49	-13.0	26.07	165.40	Horizontal	Vertical	Pass
2113.750	-45.93	2.24	-13.0	32.93	360.00	Horizontal	Vertical	Pass
3766.500	-42.91	11.60	-13.0	29.91	31.90	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-30_19.31.08

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#04

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

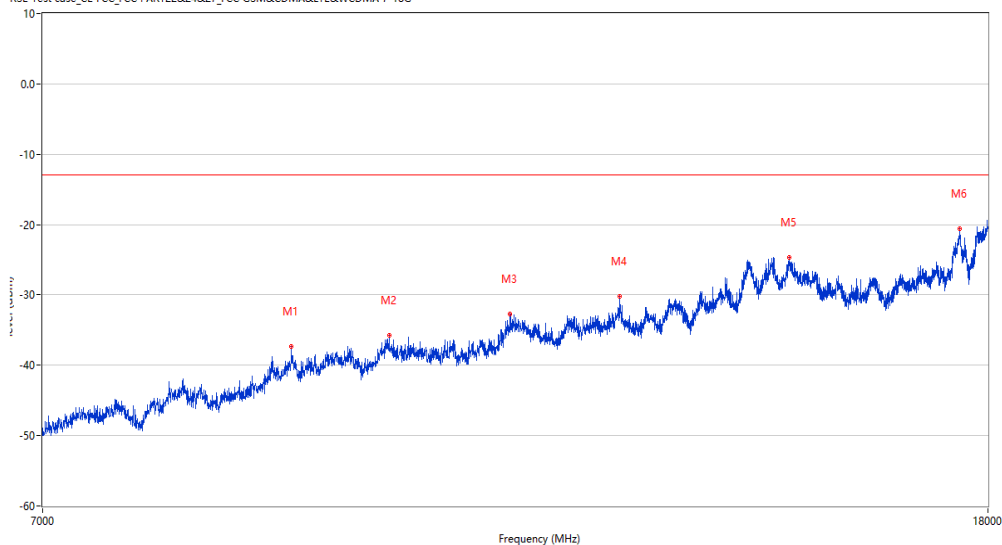

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
8974.500	-37.33	28.59	-13.0	24.33	302.50	Horizontal	Vertical	Pass
9898.500	-35.70	29.88	-13.0	22.70	155.90	Horizontal	Vertical	Pass
11166.250	-32.69	30.81	-13.0	19.69	188.70	Horizontal	Vertical	Pass
12453.250	-30.23	32.74	-13.0	17.23	302.50	Horizontal	Vertical	Pass
14763.250	-24.61	39.86	-13.0	11.61	63.20	Horizontal	Vertical	Pass
17499.501	-20.56	43.31	-13.0	7.56	95.60	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-30_17.41.18

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#04

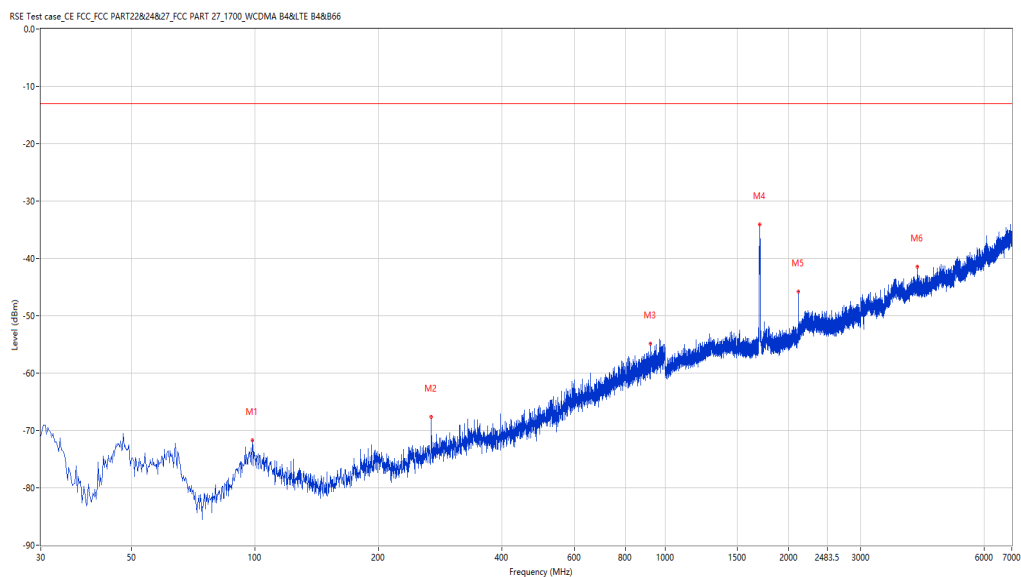

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
98.385	-71.67	-13.78	-13.0	58.67	112.20	Vertical	Vertical	Pass
268.620	-67.59	-13.52	-13.0	54.59	204.10	Vertical	Vertical	Pass
921.188	-54.93	0.34	-13.0	41.93	0.60	Vertical	Vertical	Pass
1702.250	-34.02	1.50	-13.0	21.02	248.10	Vertical	Vertical	Pass
2112.750	-45.81	2.22	-13.0	32.81	0.00	Vertical	Vertical	Pass
4118.500	-41.51	12.14	-13.0	28.51	37.80	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-30_19.35.52

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#04

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

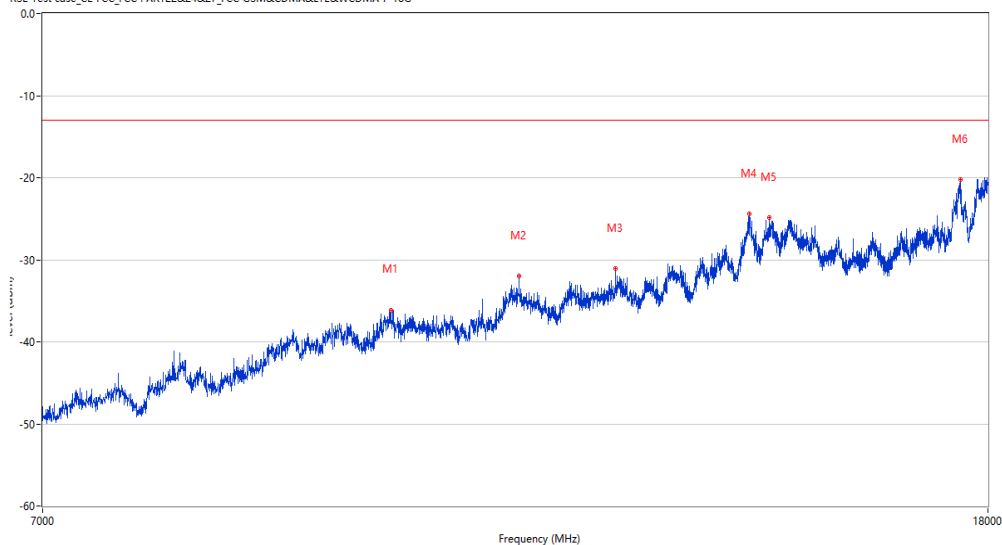

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
9912.250	-36.11	29.97	-13.0	23.11	0.10	Vertical	Vertical	Pass
11268.000	-31.99	31.77	-13.0	18.99	331.90	Vertical	Vertical	Pass
12406.500	-31.13	32.31	-13.0	18.13	24.50	Vertical	Vertical	Pass
14183.000	-24.46	40.24	-13.0	11.46	213.10	Vertical	Vertical	Pass
14469.000	-24.91	38.68	-13.0	11.91	0.10	Vertical	Vertical	Pass
17518.750	-20.21	42.12	-13.0	7.21	193.00	Vertical	Vertical	Pass

3 WCDMA Band V

3.1 WCDMA Band V MCH

Test result

Project Number: Certification

Test Time: 2023-08-30_17.50.10

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.2

Hum.: 53%

Test Engineer: LYG


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#04

RSE Test case_CCE FCC PART22824827_FCC PART 22_850_GSM850<E B5&CDMA BC0&WCDMA B5<E B26

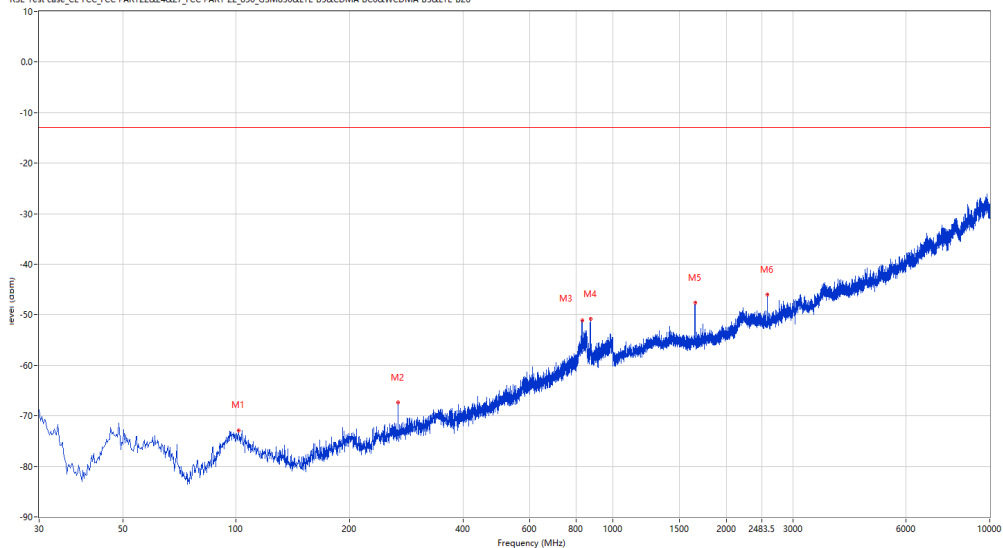

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
101.537	-72.83	-14.45	-13.0	59.83	348.30	Horizontal	Vertical	Pass
268.862	-67.33	-13.46	-13.0	54.33	359.60	Horizontal	Vertical	Pass
827.825	-51.07	2.12	-13.0	38.07	295.90	Horizontal	Vertical	Pass
872.202	-50.82	0.01	-13.0	37.82	4.90	Horizontal	Vertical	Pass
1650.500	-47.65	-0.61	-13.0	34.65	153.10	Horizontal	Vertical	Pass
2564.500	-46.05	4.25	-13.0	33.05	236.10	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-30_17.46.24

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#04

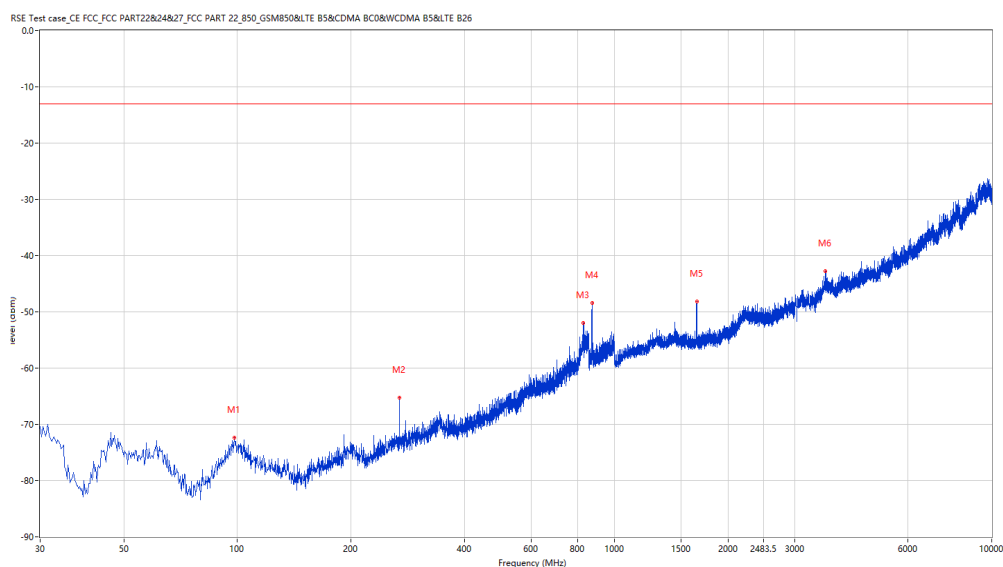

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
98.143	-72.36	-13.73	-13.0	59.36	359.60	Vertical	Vertical	Pass
268.862	-65.32	-13.46	-13.0	52.32	360.00	Vertical	Vertical	Pass
827.583	-51.99	2.10	-13.0	38.99	175.80	Vertical	Vertical	Pass
872.930	-48.48	-0.00	-13.0	35.48	48.20	Vertical	Vertical	Pass
1650.500	-48.16	-0.61	-13.0	35.16	196.70	Vertical	Vertical	Pass
3614.000	-42.74	11.98	-13.0	29.74	1.60	Vertical	Vertical	Pass