

DOG TRAINING COLLAR

DALUIS

MODEL
D4-500



Manual


COMPONENTS



① Handheld Remote



② Receiver




④ Charging Cable



⑤ Wrist Strap



⑥ User Manual



⑦ Test Light Tool



⑧ Long Contact Points




⑨ Silicone Caps


(Components ⑦ ⑧ ⑨ refer to Page10 for more information)

OVERVIEW

Handheld Remote

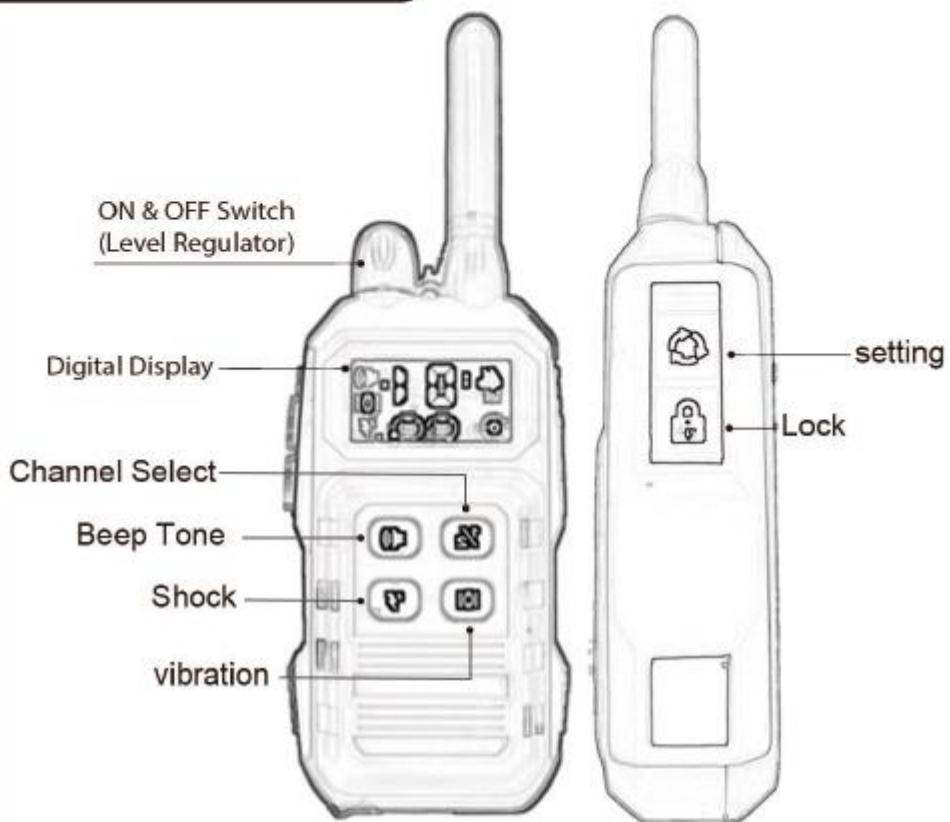

Screen

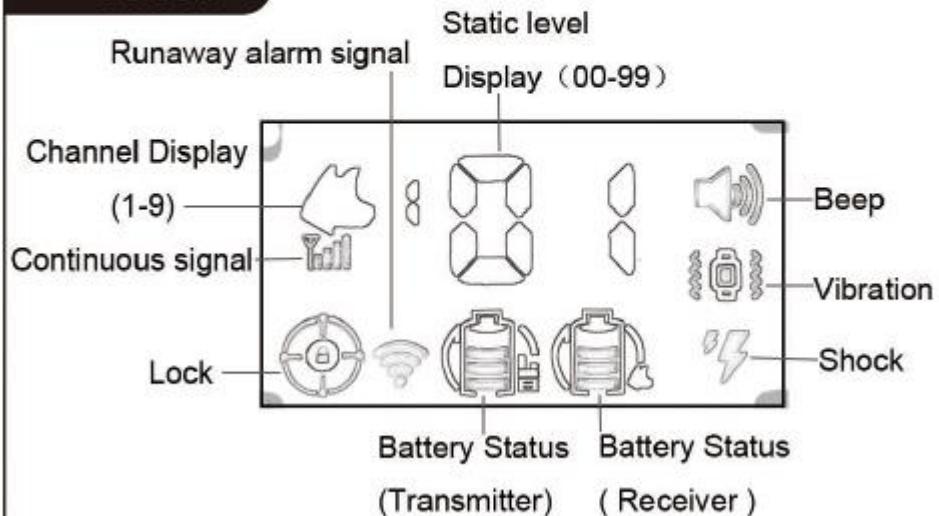


OVERVIEW

Receiver



ON& OFF Switch

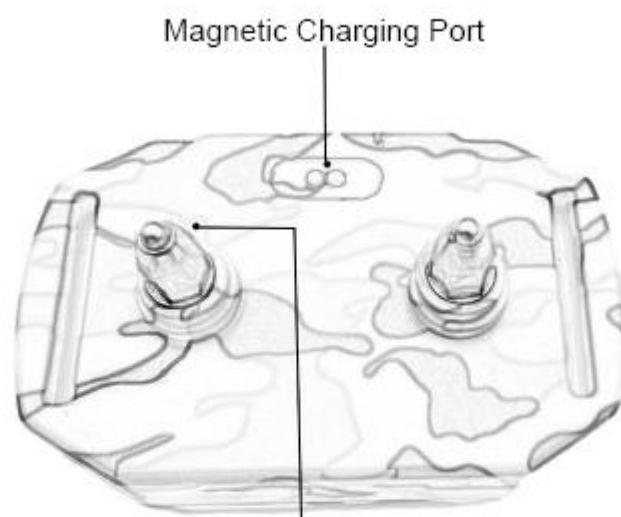

Magnetic Charging Port

Contact Points

Operation

Step1: The First Time Connection

- 1, Transmitter: Rotate the button  to the power-on state, hear a beep, the transmitter is powered on.
- 2, Press and hold the 1/2 button  for 5 seconds, the number 1 flashes, indicating dog 1.
- 3, Receiver connection: Press and hold the power button  for 30 seconds, after hearing the second beep, the blue light flashes, and the display has a dog head mark  , indicating that dog 1 is connected successfully.
- 4, If the blue light not flashing, press and hold for 2 seconds to power off, then press and hold for 30 seconds to connect again.
- 5, Press the sound button  of the transmitter, the receiver will give feedback, confirming that the connection is successful.

Step 2: Vibrate and Shock Setting

- 1, Press the vibration key  and the setting key  at the same time for 2 seconds, hear a continuous beep, and then turn the button  to set the vibration level. Press the lock key  to save.
*(Set the vibration level again, vibration key  and the setting key  at the same time for 2 seconds, hear a continuous beep, and turn the button  to set the vibration level. Press the lock button  to save.)
- 2, Press the shock key  and the setting key  at the same time for 2 seconds, hear a continuous beep, and turn the button  to set the shock level. Press the lock button  to save.
*(To set the shock level again, press the shock button  and the set button  at the same time for 2 seconds, hear a continuous beep, and turn the button  to set the shock level. Press the lock button  to save.)

Step 3: Lock/Unlock

Press the lock button  for 5 seconds, the transmitter is in the protection state, other key operations are invalid, only the rotary switch can work, press the lock button  for 5 seconds to unlock.

Step 4: Add other Dogs

Press the 1/2 button  once to the number 2, then press and hold the 1/2 button  for 5 seconds until the number 2 flashes, at this time, press and hold the power button  of the receiver 2 for 30 seconds, the blue light flashes, and the display has a dog portrait, indicating that it is connected success.

According to the steps of dog 1, set the level of vibration and electric shock for dog 2. And so on for other dogs, up to a maximum of 9 dogs.

Step 5: Remove the Dogs

Press the 1/2 key  to select the dog 1 to be deleted, then press the 1/2 key  for 5 seconds until the number 1 flashes, and then press the set key  10 seconds to delete it.

Other Functions

Continuous use time: Both Transmitter and receiver more than 8 hours. Charging time 2 hours

Display: Color LCD negative display

Wireless distance: Wireless two-way transmission distance of 500 meters in open space

Low battery alert: When battery lower than 10%, the red light will flash, LCD screen of battery icon flashes. Automatic shutdown, when voltage is lower than 3.3V.

Bidirectional function: The LCD screen, 4 grids to display the signal strength of the wireless signal.

Received signal strength feedback.

Display out-of-control warning feedback.

Important Safety Information

This is the safety alert symbol. It is used to alert you to potential injury hazards. Obey all safety messages that follow this symbol to avoid possible injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in serious injury.

Not for use with aggressive dogs. Do not use this product if your dog is prone to aggressive behavior. Aggressive dogs can cause severe injury to their owners and others. If you are not sure that this product is right for your dog, please talk to your veterinarian or a certified trainer.

CAUTION

CAUTION, used with the safety alert symbol, indicates a hazardous situation, which, if not avoided could result in minor or moderate injury.

- Safety during on-leash training. It is vitally important that you and your dog remain safe while learning during on-leash training. Your dog should be on a strong leash, long enough for him to attempt to chase an object, but short enough for him not to reach a road or other unsafe area. You must also be physically strong enough to restrain your dog when he tries to chase.
- This pet training device is not a toy, keep away from children.

CAUTION

CAUTION, used without the safety alert symbol, indicates a hazardous situation, which, if not avoided, could result in harm to your pet.

Risk of skin damage. Please read and follow the instructions in this manual. Proper fit of the collar is important. A collar worn for too long or made too tight on the pet's neck may cause skin damage. Ranging from redness to pressure ulcers; this condition is commonly known as bed sores.

- Avoid leaving the collar on the dog for more than 12 hours per day.
- Possible reposition the collar on the pet's neck every 1 to 3 hours.
- Check the fit to prevent excessive pressure; follow the instructions in this manual.
- Never connect a leash to the electronic collar; it will cause excessive pressure on the contact points.
- When using a separate collar for a leash, don't put pressure on the electronic collar.
- Wash the dog's neck area and the contacts of the collar weekly with a damp cloth.
- Check the contact area daily for signs of a rash or a sore.
- If a rash or sore is found, discontinue use of the collar until the skin has healed. If the condition persists beyond 48 hours, see your veterinarian.

Manufacture

Produce: Huizhou Xinghongtai Electronics Co.,Ltd.

Address: 1&2F,Plant 2,Zhonghai Technology Huizhou Co.,Ltd. Daya Bay ,West District ,Huizhou,Guangdong ,China.

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.