

IRONZON FINGERPRINT LOCK (191Y)



Content

Installation Video QR Code	02
Packing List	03
Installation Dimension	04
Adjust Latch Length	05
Install the Latch and Adjust the Backset of Latch (if needed)	06
Installation Steps	07
Reset Methods	08
Operation of Tuya APP	10
Normally Open Mode On and Off	18
Emergency Unlock	19
IC Caution	20
FCC Statement	22
Useful Tips	24
After-Sales Service	24

Please read this user manual before fitting and using your door lock!
If you need help, please let us know.

Installation Video


Please watch this video first
and use this manual as a guide.



Packing List




Installation Dimension

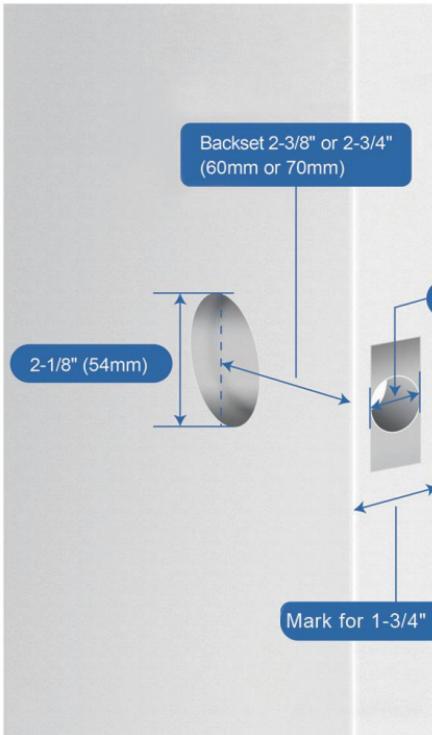

Adjust Latch Length




The length of the latch can be adjusted from 60mm(2-3/8") to 70mm(2-3/4") to accommodate two different distances from the door hole to the door side.



Hold the square hole of the latch and pull it outward until it can no longer be pulled.



Now the latch length is adjusted to 70mm(2-3/4").

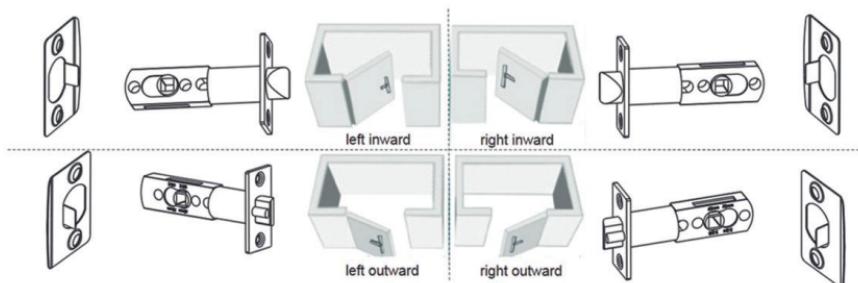

Note: Pay attention to the direction of the Spring Latch and Pinch Plate Buckle Cover when you installing.

Install the Latch and Adjust the Backset of Latch (if needed)




①

Hold the latch in front of the door hole, with the latch face flush against the door edge.





②

If the latch holes are centered in the door hole, no adjustment is required. Proceed to step 2. If latch holes are NOT centered, adjust latch. See "Adjust Latch Length".





③

Latch adjustment (only if needed)



Note: The square hole of the latch remains vertical.



Installation Steps


STEP 1:



Open the battery cover to install the batteries.

 Note: 4 AAA Alkaline Batteries.

STEP 3:



Connect door lock circuit board port.

STEP 2:



Install and fix the door handle.

 Note: The square tube should be aligned with the latch holes.

STEP 4:



Tighten the screw securing the battery cover.

Reset Methods

Method 1:

STEP 1:



Long press the small hole on the inside handle with a small screwdriver for 9s.

STEP 2:



When you hear a tick, the number fades from 6 to 1.

STEP 3:



Until the number blinks, the red light is on, you can stop the operation, the indicator light blinks green, and the voice prompts for a successful reset.



Note: To ensure user safety, perform a system reset before using the door lock.

Method 2:

STEP 1:



Touch to wake up the password area.

STEP 2:



Enter "# + 1 + #", and the indicator will blink blue light.

STEP 3:



Enter the administrator's fingerprint to confirm the information.

STEP 4:



Follow the voice instructions and press "4" for system resetting.

STEP 5:



Press "#" to confirm system reset.

STEP 6:



A flashing red light, followed by a flashing green light, indicates a successful reset.


Operation of Tuya APP

1 .Scan the Given QR Code with Your SmartPhone to Download the APP.




Tuya Smart

II. Add the Door Lock

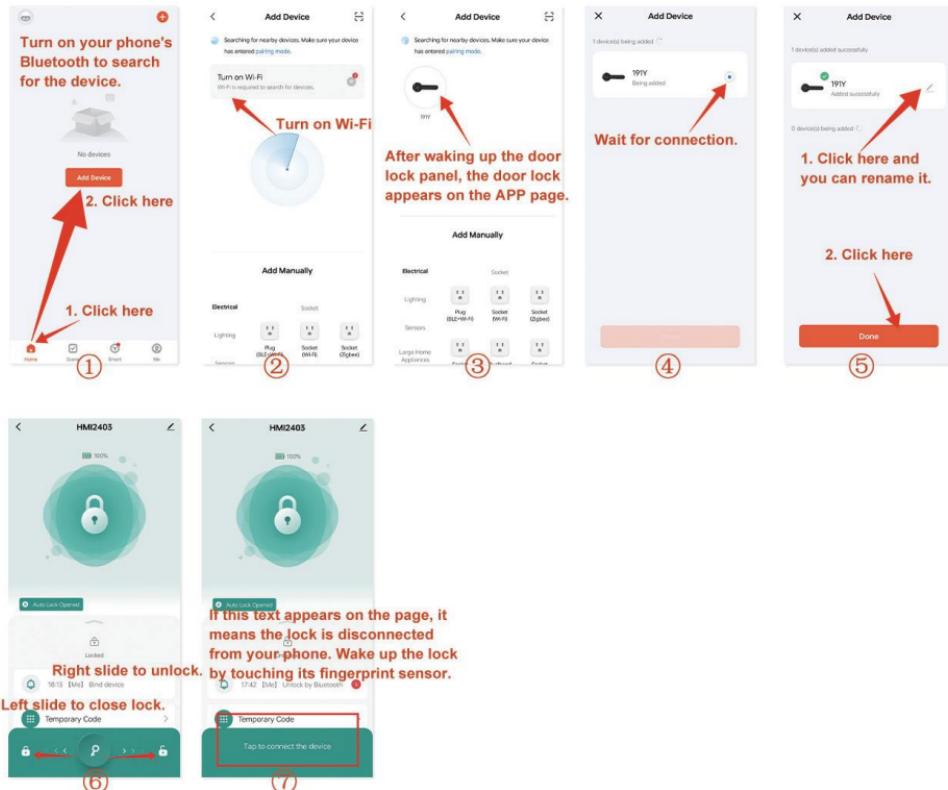

III. Add Members

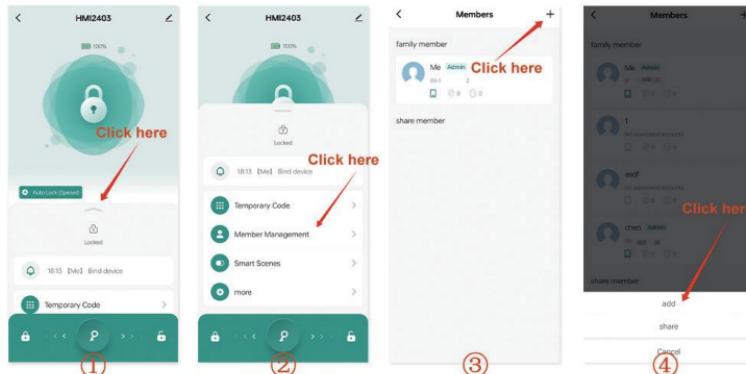


When you add your first family member, the APP will ask you to create a family and then add member. The Tuya account for family members will receive to invitation and it will appear in the family member acceptance.

You can add or invite members and edit their permissions in Member Management.

⚠ Note: Family members cannot be deleted in Member Management but in Home Management of "Me" Page.



IV. Add Fingerprints

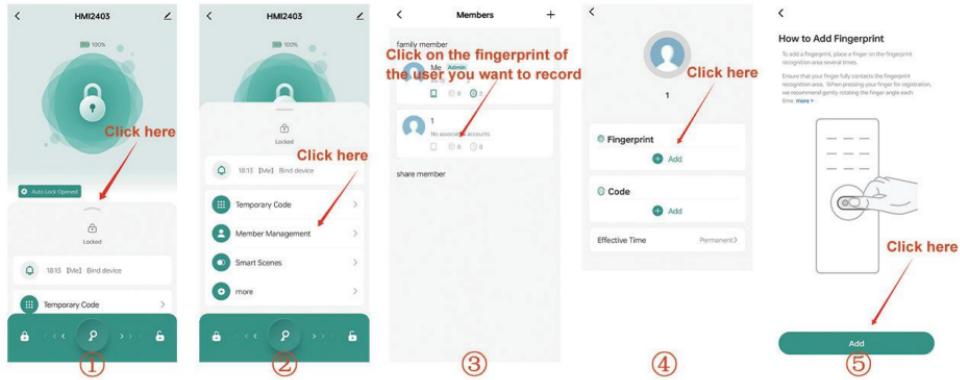

Add the fingerprint from 5 different angles to further improve the recognition rate of fingerprints.




2. Click here





⑥

V. Add User Passwords

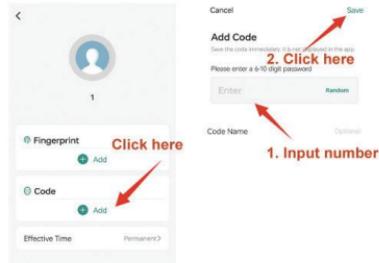

Permanent passwords are valid until you delete them. It is highly recommended to use the password itself as its name.

VI. Delete Passwords and Fingerprints

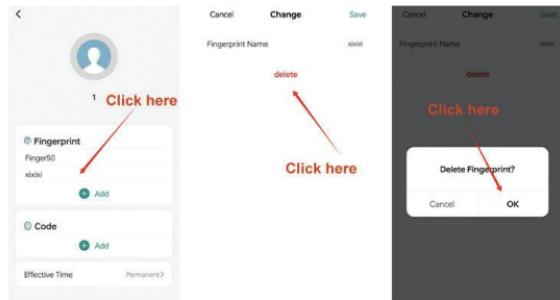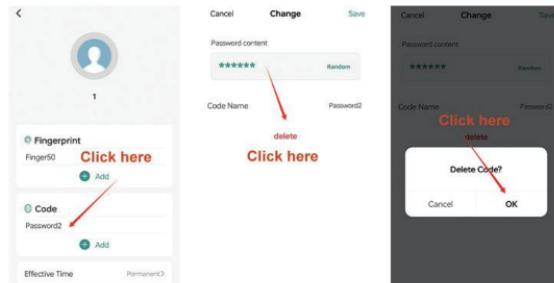

①

②


③

④

⑤


⑥

VII. Add Temporary Passwords

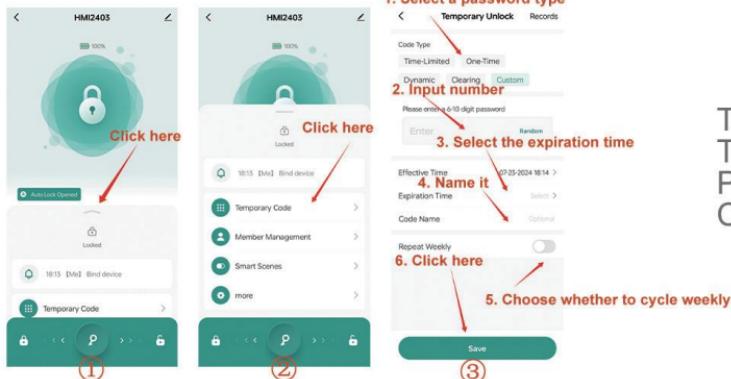

Temporary Passwords include Time-Limited Password, One-Time Password, Dynamic Password and Custom Password.

VIII. Delete Time-limited Passwords

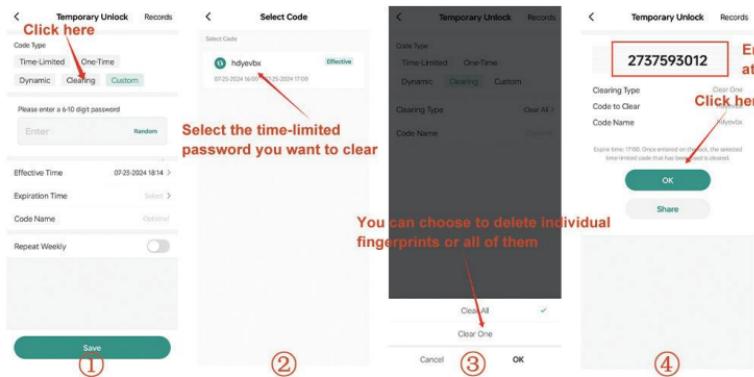


Enter the clearance code at the door lock

Click here



IX. System Settings

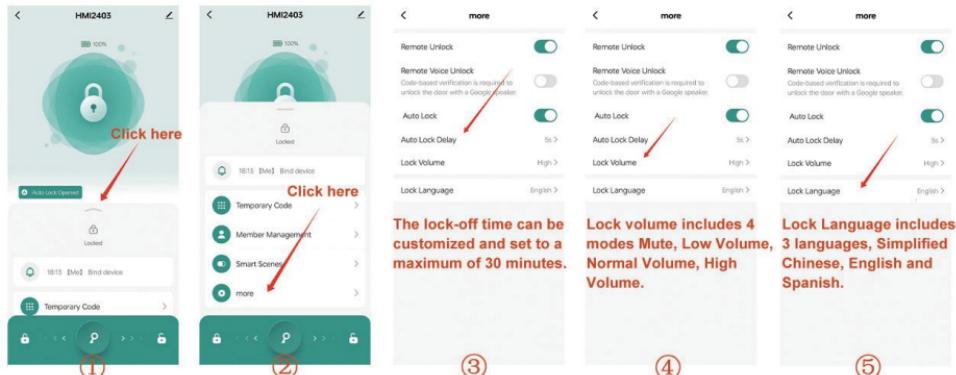

X. Add Bluetooth Gateway (Not Included) for Remote Control


With IRONZON Tuya Bluetooth Gateway, you can control the door lock via Internet.

Warning: Gateways from other band may possibly no work with it!

⚠ Note: 1. Before you bind the lock with the Bluetooth Gateway, make sure at least one password or fingerprint has already recorded in the lock.

2. Please check if "Remote Unlocking" in "Settings" Page is turned on.



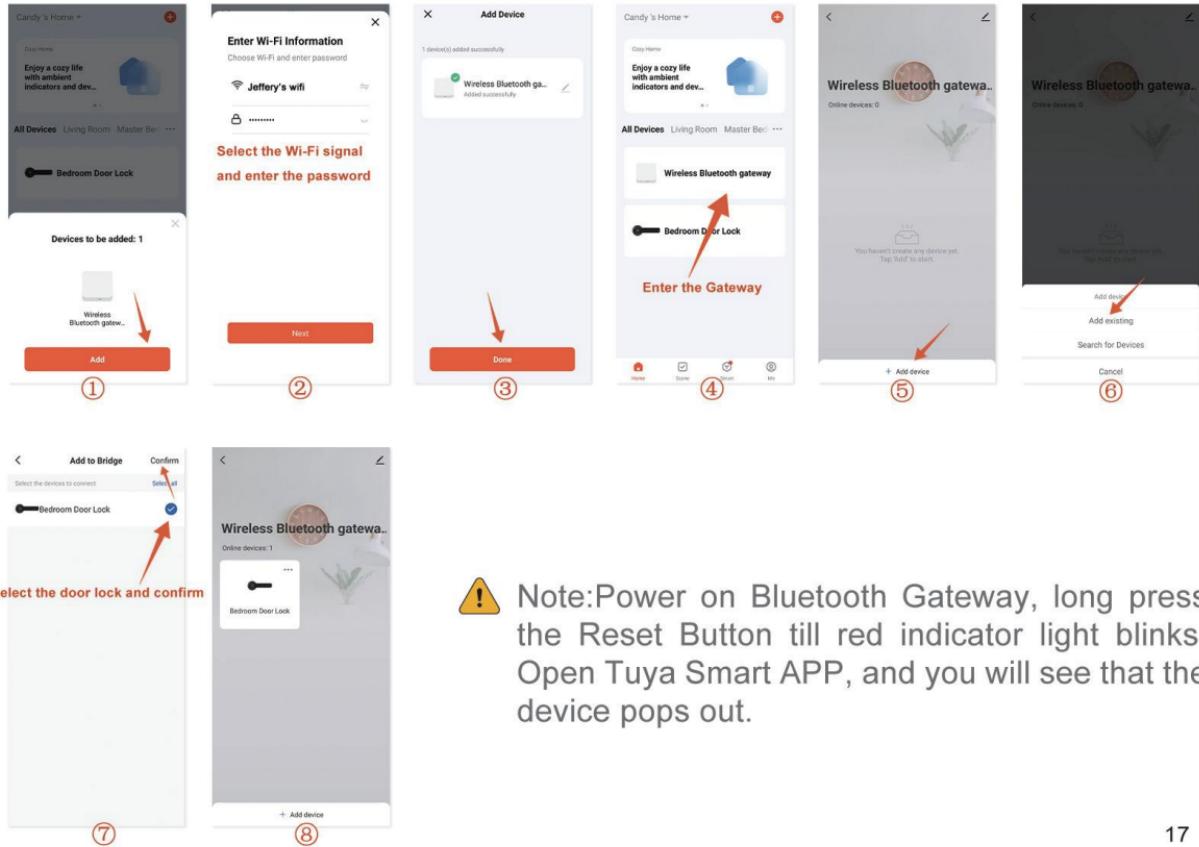

⚠ Note: Power on Bluetooth Gateway, long press the Reset Button till red indicator light blinks. Open Tuya Smart APP, and you will see that the device pops out.

Normally-Open Mode

STEP 1:



Long press the button on the rear handle for 1 second.

STEP 2:



Release the button, if the indicator light turns green, Normally-Open Mode is turned on.

Cancel Normally-Open Mode

STEP 1:



Long press the button on the inside handle for 1 second.

STEP 2:



Release the button, if the indicator light turns blue, Normally-Open Mode is turned off.

Emergency Unlock

⚠ Note: **This interface does not support charging** and is limited to emergency unlocking when the battery is powered off.

STEP 1:



Plug the Type-C power cord into the connector.

STEP 2:



Press the registered administrator's fingerprint.

STEP 3:



Unlocking is successful.

IC Caution

RSS-Gen Issue 5 "&" RSS-Gen numéro 5

- English:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF exposure statement:

The equipment complies with IC Radiation exposure limit set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

- French:

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes:

- (1) Cet appareil ne doit pas causer d'interférences.
- (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

Tout changement ou modification non expressément approuvé par la partie responsable de la conformité pourrait annuler l'autorité de l'utilisateur à utiliser l'équipement.

Déclaration d'exposition RF:

L'équipement est conforme à la limite d'exposition aux radiations de la IC établie pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation configurations of the transmitter and its antenna(s).

Useful Tips

- 1. Keep at least one key out of the door for emergency.**
2. When the battery is low, the indicator will blink red light. The rest power could only be used for about 50 times.

After-Sales Service

If you have any problem during installation or operation, please contact us.

Our E-mail is support@ironzon.com

