

EMC TEST REPORT

No. 180601087SHA-001

Applicant : Ningbo Qiangya Industry & Trade Co., Ltd.
Houjiangqiao Industry Park, Huilong Village, Huangjiabu
Town, Yuyao City 315466, Zhejiang Pr, China

Manufacturer : Ningbo Qiangya Industry & Trade Co.,Ltd.
Houjiangqiao Industry Park, Huilong Village, Huangjiabu
Town, Yuyao City 315466, Zhejiang Pr, China

Equipment : Remote control transmitter

Type/Model : 7040-960511

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2017): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices

Date of issue: Jul 4, 2018

Prepared by:



Teddy Yin (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)

Description of Test Facility

Name: Intertek Testing Services Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing
Tel: +86 21 61278271
Fax: +86 21 54262353

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION.....	4
1.1 Applicant Information.....	4
1.2 Identification of the EUT	4
1.3 Technical specification	5
1.4 Mode of operation during the test / Test peripherals used.....	5
2. TEST SPECIFICATION	6
2.1 Instrument list	6
2.2 Test Standard	6
3. FUNDAMENTAL & SPURIOUS EMISSION & RESTRICT BAND RADIATED EMISSION	8
3.1 Test limit	8
3.2 Test Configuration	9
3.3 Test procedure and test setup	9
3.4 Test protocol	10
4. DEACTIVATING TIME	12
4.1 Test limit	12
4.2 Test Configuration	13
4.3 Test procedure and test setup	13
4.4 Test protocol	13
5. POWER LINE CONDUCTED EMISSION	14
5.1 Limit.....	14
5.2 Test configuration	14
5.3 Test procedure and test set up.....	15
5.4 Test protocol	16
6. EMISSION BANDWIDTH	17
6.1 Test limit	17
6.2 Test Configuration	17
6.3 Test procedure and test setup	17
6.4 Test protocol	18
7. OCCUPIED BANDWIDTH	19
7.1 Test limit	19
7.2 Test Configuration	19
7.3 Test procedure and test setup	19
7.4 Test protocol	20

1. General Information

1.1 Applicant Information

Applicant: Ningbo Qiangya Industry & Trade Co.,Ltd.
Houjiangqiao Industry Park, Huilong Village, Huangjiabu
Town, Yuyao City 315466, Zhejiang Pr, China

Name of contact: WANGDEWNGYUN

Tel: 0574-62008127

Fax: 0574-62008130

Manufacturer: Ningbo Qiangya Industry & Trade Co.,Ltd.
Houjiangqiao Industry Park, Huilong Village, Huangjiabu
Town, Yuyao City 315466, Zhejiang Pr, China

Sample received date : Jun 25, 2018

Date of test : Jun 26~Jul 2, 2018

1.2 Identification of the EUT

Equipment: Remote control transmitter

Type/model: 7040-960511

FCC ID: 2ALUXQY02

1.3 Technical specification

Operation Frequency Band:	433.92MHz
Modulation:	ASK
Antenna Designation:	Integral antenna, non-user removable.
Gain of Antenna:	0dBi
Rating:	Battery: DC 3V Working frequency: 433.92MHz
Description of EUT:	There is one model only. The EUT is a transmitter to control the working condition of the corresponding receiver.
Channel Description:	There is one channel only, namely 433.92MHz.

1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

All 3 keys were tested and the worst data is listed in the report.

The EUT is a handheld device, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

2. Test Specification

2.1 Instrument list

Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2018-09-12
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2019-05-30
<input checked="" type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2018-09-23
<input checked="" type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2018-07-09
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	Pre-amp 18	EC5881	2019-06-19
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2018-09-15
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2018-09-12
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 2323	2019-06-14
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3325	2019-03-28

2.2 Test Standard

47CFR Part 15 (2017)
ANSI C63.10: 2013

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai.

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Fundamental & spurious emission	15.231(b)	-	Pass
Restrict band radiated emission	15.205	-	Pass
Power line conducted emission	15.207	-	NA
Emission bandwidth	15.231(c)	-	Pass
Deactivating time	15.231(a)(1)	-	Pass
Occupied bandwidth	-	-	NA

Test result: PASS

3.1.1 The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. It must comply with the limits below:


The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(Frequency) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(Frequency) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

Fundamental limit = $41.6667 * 433.92 - 7083.3333 = 10996.68 \text{ uV/m} = 80.80 \text{ dBuV/m}$
 Spurious limit = $81 - 20 = 60.80 \text{ dBuV/m}$

////////////////////////////////////

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

3.2 Test Configuration

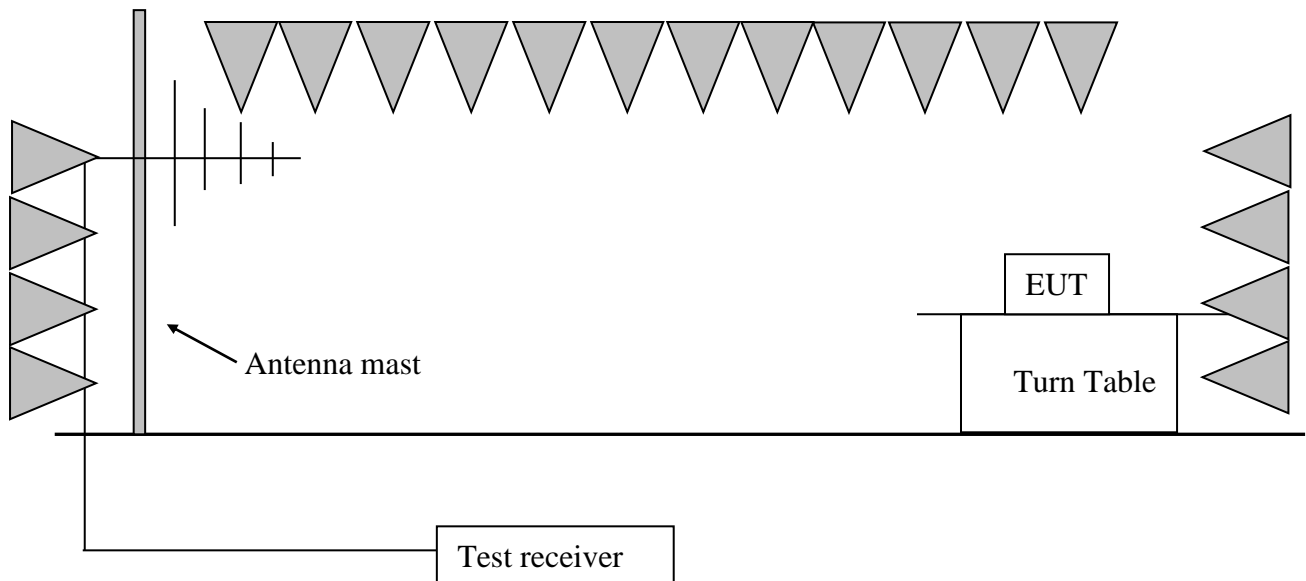

3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW=300 Hz, VBW=1 kHz (9 kHz~150 kHz);
 RBW=10kHz, VBW=30kHz (150kHz~30MHz);
 RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)
 RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

3.4 Test protocol

Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Emission Type	Limit (dBuV/m)	Margin	Detector
H	433.92	18.00	68.10	Fundamental	100.80	32.70	PK
H	867.81	22.80	42.90	Harmonics	80.80	37.90	PK
H	1296.59	-12.20	42.00	Harmonics	80.80	38.80	PK
H	1300.60	-11.10	40.80	Harmonics	80.80	40.00	PK
H	2162.32	-9.40	39.80	Harmonics	80.80	41.00	PK
H	3474.95	-2.30	40.40	Harmonics	80.80	40.40	PK
H	3905.81	-1.20	43.70	Harmonics	80.80	37.10	PK
V	433.92	18.00	59.50	Fundamental	100.80	41.30	PK
V	867.81	22.80	44.60	Harmonics	80.80	36.20	PK
H	609.27	20.60	26.90	Restrict	46.00	19.10	PK
H	2753.50	-6.00	35.80	Restrict	74.00	38.20	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = limit - Corrected Reading

4. If PK reading is less than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.

Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m; Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

Calculating the AV value according to the duty cycle

Antenna	Frequency (MHz)	PK Reading (dBuV/m)	Correct Factor (dB)	AV Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	433.92	68.10	-8.87	59.23	80.80	21.57

Remark: 1. Correct Factor = $20\lg(\text{duty cycle}) = 20\lg(0.36) = -8.87$

2. AV Reading = PK Reading + Correct Factor

3. Margin = limit - AV Reading


4. Deactivating time

Test result: **PASS**

4.1 Test limit

- ☒ (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- ☐ (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- ☐ (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- ☐ (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- ☐ (5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

4.2 Test Configuration

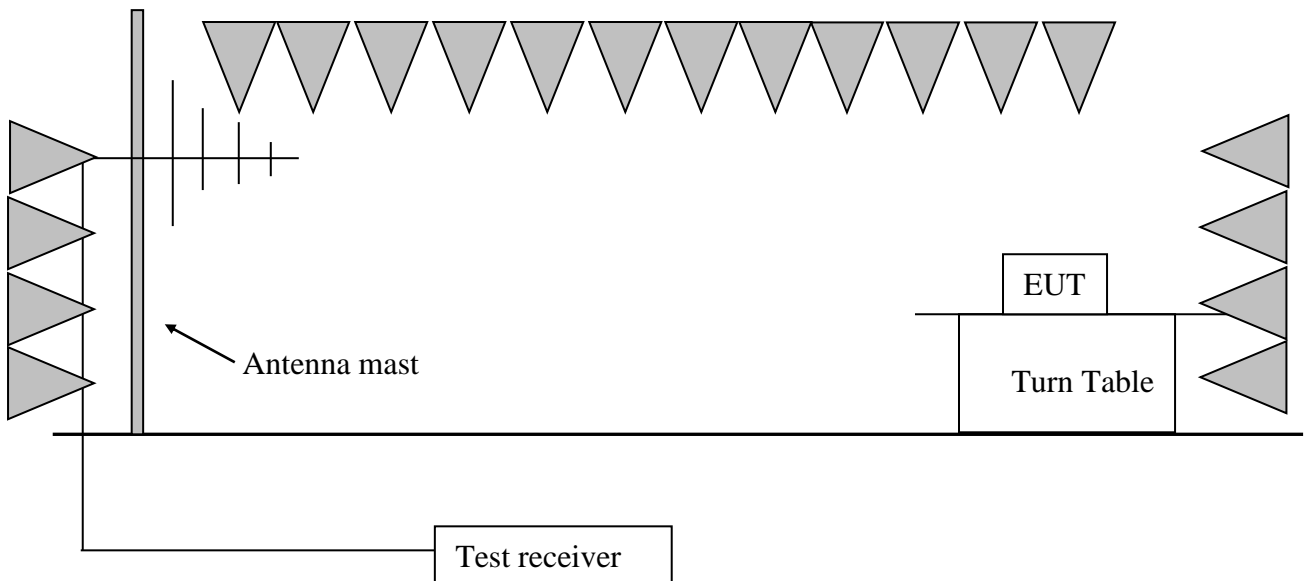

4.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber.

The central frequency of test receiver was set as the operating frequency of EUT and the Span was set as 0.

The EUT was switched once. The test receiver recorded the whole time from the triggered moment to the time of stopping radiating. For manual switching, to avoid uncertainty, the operating above would be repeated five times and the worst data is recorded.

4.4 Test protocol

Whole time from the triggered moment to the time of stopping radiating: 0.11s.

As a result, the EUT complies with the limit of 5s' deactivating time.


5. Power line conducted emission

Test result: NA

5.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

5.2 Test configuration

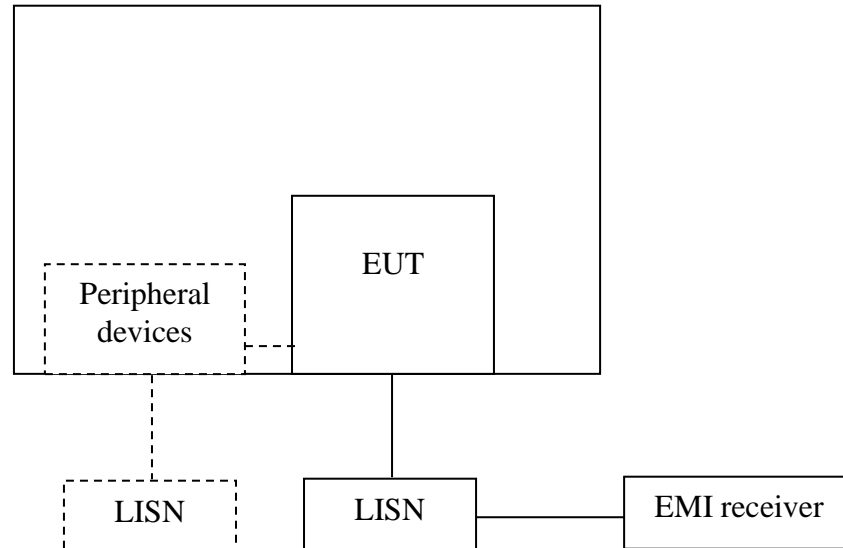

- ☐ For table top equipment, wooden support is 0.8m height table
- ☐ For floor standing equipment, wooden support is 0.1m height rack.

5.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

5.4 Test protocol

Power line: L

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading. 3. If the margin higher than 20dB, it would be marked as *.							

Power line: N

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading. 3. If the margin higher than 20dB, it would be marked as *.							

6. Emission Bandwidth


Test Status: Pass

6.1 Test limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = $0.25\% * 433.92\text{MHz} = 1085\text{kHz}$

6.2 Test Configuration

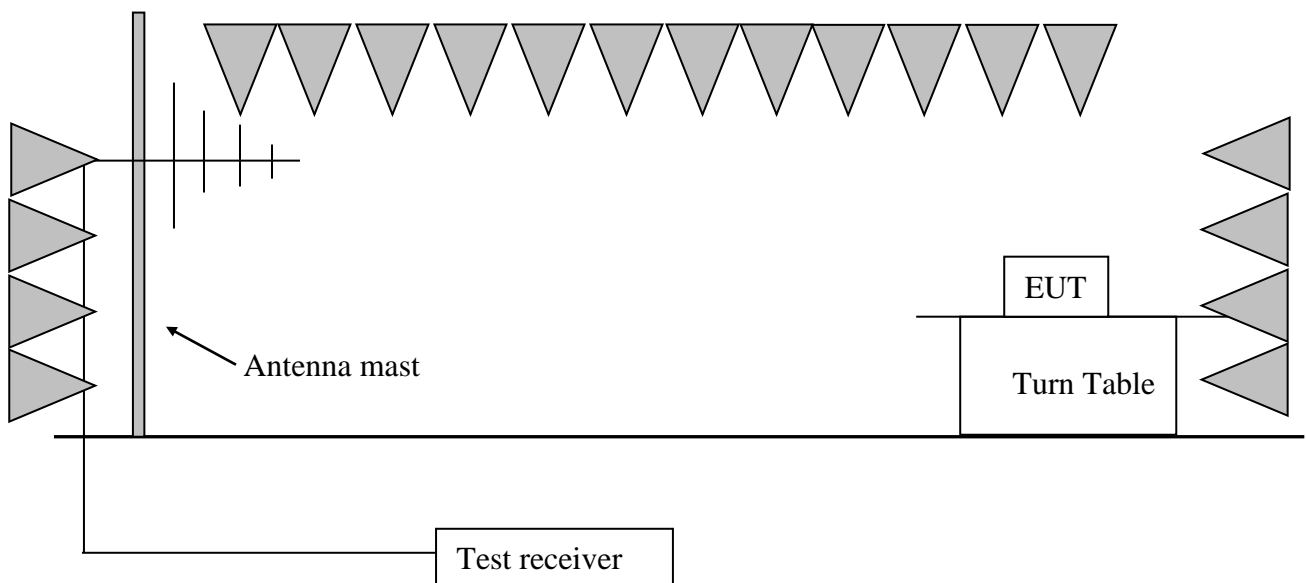

6.3 Test procedure and test setup

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The central frequency of test receiver was set near the operating frequency of EUT.

The test was conducted using the Spectrum Analyzer with the resolutions bandwidth set at 30kHz, the video bandwidth set at 100kHz.

6.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

Channel	Emission Bandwidth (kHz)	Limit (kHz)
1	156	1085


7. Occupied Bandwidth

Test Status: NA

7.1 Test limit

None

7.2 Test Configuration

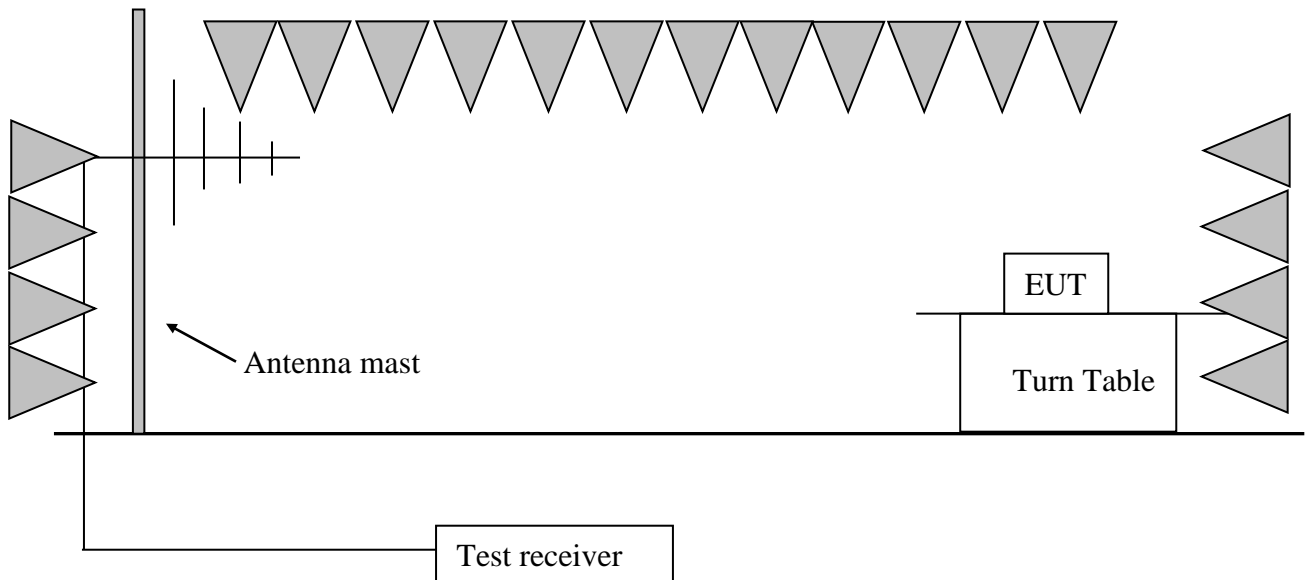

7.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 30kHz.

7.4 Test protocol

Temperature : °C
Relative Humidity : %

Channel	Occupied Bandwidth (MHz)	Max. Value MHz)

Remark: “Max. Value” is the maximum test result of all the measured occupied bandwidth.