



## TEST REPORT OF PART15B FOR FCC

On Behalf of

**Semptian Co., Ltd.**

**FCC ID:** 2AMLM-FC7000

**Product Description:** Flowscreen

**Test Model:** FC7000-A148

**Supplement Model:** FC7000-AL010

**Trade Mark:** semptian

**Applicant:** **Semptian Co., Ltd.**

8F, Block 5D, Software Industry Park, No.14, Haitian 2nd Road,  
Nanshan, Shenzhen, China

**Manufacturer:** **Semptian Co., Ltd.**

8F, Block 5D, Software Industry Park, No.14, Haitian 2nd Road,  
Nanshan, Shenzhen, China

**Prepared by:** **Shenzhen Laker Testing Technology Co.,Ltd**

4D, Block 1, Sunshine Huayi Building, Nanhai West Road,  
Nanshan, Shenzhen, China

Tel: 86-755-86307736

Fax: 86-755-86307356

**Report No.:** LK17FR-0582E

**Issue Date:** June 10, 2017

**Test Date:** May 02~June 09, 2017

**Test by:** **Reviewed By:**

Owen Li

Owen Li

Edmund Zou

Edmund Zou



## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
1.2 TEST FACILITY .....	4
1.3 MEASUREMENT UNCERTAINTY .....	4
<b>2. SYSTEM TEST CONFIGURATION</b> .....	<b>5</b>
2.1 EUT CONFIGURATION .....	5
2.2 EUT EXERCISE .....	5
2.3 GENERAL TEST PROCEDURES .....	5
2.4 LIST OF MEASURING EQUIPMENTS.....	6
<b>3. SUMMARY OF TEST RESULTS</b> .....	<b>9</b>
<b>4. CONDUCTED EMISSION</b> .....	<b>10</b>
4.1 APPLICABLE STANDARD .....	10
4.2 LIMITS.....	10
4.3 EUT TEST SETUP .....	10
4.4 PROCEDURE OF CONDUCTED EMISSION TEST .....	11
4.5 TEST RESULT.....	11
<b>5. SPURIOUS RADIATED EMISSION</b> .....	<b>14</b>
5.1 APPLICABLE STANDARD .....	14
5.2 RADIATED MEASUREMENT SETUP .....	14
5.3 TEST EQUIPMENT LIST AND DETAILS .....	15
5.4 RADIATED MEASUREMENT TEST PROCEDURE .....	15
5.5 TEST RESULT.....	16





## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: **Semptian Co., Ltd.**  
Address of applicant: 8F, Block 5D, Software Industry Park, No.14, Haitian 2nd Road, Nanshan, Shenzhen, China  
Manufacturer: **Semptian Co., Ltd.**  
Address of manufacturer: 8F, Block 5D, Software Industry Park, No.14, Haitian 2nd Road, Nanshan, Shenzhen, China

#### General Description of E.U.T

Items	Description
EUT Description:	Flowscreen
Test Model:	FC7000-A148
Supplement Model:	FC7000-AL010
Trade mark:	semprian
<b>Rated Voltage:</b>	
AC Power Supply:	100-240 ACV 8A 50/60 Hz ( Just test 120ACV)
DC Power Supply:	36-72DCV max 23A ( Just test 36DCV)

#### Note:

\* The test data gathered are from the production sample provided by the manufacturer,  
All above models in the table are the same just different with the feature and colour.



## 1.2 Test Facility

All measurement required was performed at laboratory of Centre Testing International (ShenZhen) Corporation ,Location at Building C, Sienific Innovation Park,Tiegang Reservoir, Xixiang, Baoan District, Shenzhen, Guangdong, The site and apparatus are constructed in conformance with the requirements of ANSI C63.10, CISPR 16-1-1 and other equivalent standards.

The test facility is recognized, certified, or accredited by the following organizations:

### FCC – Registration No.: 565659

Centre Testing International (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659, expiration date is 01/27/2017.

### IC Registration No.: 7408B

The 3m alternate test site of CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7408B on December 29, 2009.

### CNAS - Registration No.: L1910

CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION, to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.The acceptance letter from the CNAS is maintained in our files: Registration:L1910,January 12,2010.

## 1.3 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted Emission Expanded Uncertainty	2.23
Radiated emission expanded uncertainty(9kHz-30MHz)	3.08
Radiated emission expanded uncertainty(30MHz-1000MHz)	4.42
Radiated emission expanded uncertainty(Above 1GHz)	4.06



## 2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.10-2013 and FCC CFR 47 Part 15 Subpart B.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

### 2.3 General Test Procedures

**Conducted Emissions** The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in ANSI C63.10-2013 and FCC CFR 47 Part 15 Subpart B  
Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions** The EUT is placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m/10m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10-2013 and FCC CFR 47 Part 15 Subpart B.

LAKER



## 2.4 List of Measuring Equipments

Test equipments list of CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION.

Shielding Room No. 1 - Conducted disturbance Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
Receiver	R&S	ESCI	100009	08/19/2017
LISN	ETS-LINDGREN	3850/2	00051952	08/19/2017
LISN	R&S	ENV216	100098	08/19/2017
Voltage Probe	R&S	ESH2-Z3	100042	08/19/2017
Current Probe	R&S	EZ17	100106	08/19/2017
ISN	TESEQ GmbH	ISN T800	30297	09/04/2017

Control Room - Conducted disturbance Test (10m part)				
Equipment	Manufacturer	Model	Serial No.	Due Date
Receiver	R&S	ESCI	100435	08/19/2017
LISN	schwarzbeck	NNLK8121	8121-529	08/19/2017
Transient Limiter	ELECTRO-METRICS	EM-7600	806	08/19/2017
Voltage Probe	R&S	ESH2-Z3	100042	08/19/2017
Current Probe	R&S	EZ17	100106	08/19/2017
ISN	TESEQ GmbH	ISN T800	30297	09/04/2017
Horn Antenna	ETS-LINGREN	3117	00057407	08/19/2017

3M Semi-anechoic Chamber - Radiated disturbance Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	09/09/2017
Spectrum Analyzer	Agilent	E4440A	MY46185649	09/07/2017
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	401	08/21/2017
Multi device Controller	ETS-LINGREN	2090	00057230	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	08/19/2017
Microwave Preamplifier	Agilent	8449B	3008A02425	08/29/2017

10M Semi-anechoic Chamber - Radiated disturbance Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
10M Chamber & Accessory Equipment	Rainford	--	--	09/06/2017
Receiver	R&S	ESCI	100435	08/19/2017
Spectrum Analyzer	R&S	FSP40	100416	09/06/2017
EMI test receiver	R&S	ESIB40	2023282915	08/24/2017



TRILOG Broadband Antenna	schwarzbeck	VULB 9163	484	08/21/2017
Horn Antenna	ETS-LINGREN	3117	00044562	09/07/2017
Microwave Preamplifier	Agilent	11909A	186871	09/06/2017
Microwave Preamplifier	HP	HP 8447F	2805A03379	09/06/2017
Microwave Preamplifier	CD	PAP-1G18G	2001	08/29/2017

Shielding Room No. 2 - Harmonic / Flicker Test (EN 61000-3-2) / (EN 61000-3-3)				
Equipment	Manufacturer	Model	Serial No.	Due Date
5KVA AC POWER SOURCE	California instruments	5001iX-400-413	57344	08/29/2017
Flicker & Harmonic Tester	California instruments	PACS-1	72492	08/29/2017

Shielding Room No. 3 - ESD Test (IEC 61000-4-2)				
Equipment	Manufacturer	Model	Serial No.	Due Date
ESD Simulator	EM TEST	ESD30C	V0603101091	08/30/2017
ESD Simulator	TESEQ	NSG437	478	08/22/2017

3M Full-anechoic Chamber - Radio-frequency electromagnetic field Immunity Test (IEC 61000-4-3)				
Equipment	Manufacturer	Model	Serial No.	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	09/09/2017
ESG Vector signal generators	Agilent	E4438C	MY45095744	09/07/2017
Power Amplifier	AR	150W1000	0322288	08/29/2017
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	401	08/29/2017
Temperature & Humidity Chamber	ESPEC	DSW0540	ER-009	08/29/2017

Shielding Room No. 3 - EFT / Surges Test (IEC 61000-4-4) (IEC 61000-4-5)				
Equipment	Manufacturer	Model	Serial No.	Due Date
Compact Generator	EM-Test	UCS500M/6B	V0603101093	09/19/2017
Capacitive Clamp	EM-Test	C Clamp HFK	0306-43	08/29/2017
CDN for Telecom Port	EM-Test	CNV504S1	V0603101094	08/29/2017
EFT Generator	SCHAFFNER	NSG 2025	19878	08/19/2017
SURGE Generator	SCHAFFNER	NSG 2050	200313-135AR	08/19/2017
CDN	SCHAFFNER	CDN-131/133	34397	08/29/2017

Shielding Room No. 2 - Radio-frequency continuous conducted Immunity Test (IEC 61000-4-6)				
Equipment	Manufacturer	Model	Serial No.	Due Date



Signal Generator	IFR	2023B	202307/883	09/07/2017
Power Amplifier	AR	75A 250A	320297	08/19/2017
Attenuator	EM-Test	ATT6/75	0320837	08/19/2017
CDN	EM-Test	CDN M2/M3	0204-01	08/19/2017
EM-Clamp	EM-Test	EM101	35770	08/19/2017

**Shielding Room No. 2 - Power-frequency magnetic fields Immunity Test (IEC 61000-4-8)**

Compact Generator	EM-Test	UCS500M/6B	V0603101093	08/19/2017
Induction Coil	EM-Test	MS100	0106-47	08/19/2017
Current Transformer	EM-Test	MC2630	0106-02	08/19/2017

**Shielding Room No. 2 –Voltage dips and interruptions Test (IEC 61000-4-11)**

Equipment	Manufacturer	Model	Serial No.	Due Date
5KVA AC POWER SOURCE	California instruments	5001iX-400-413	57344	08/19/2017
Electronic output switch	California instruments	EOS-1	72616	08/19/2017





### 3. SUMMARY OF TEST RESULTS

Test Rules	Description of Test	Result
FCC Part 15.107	Condculated Emission	Pass
FCC Part 15.109	Radiation Emission	Pass



## 4. Conducted Emission

### 4.1 Applicable Standard

for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### 4.2 Limits

**Limits for Class A digital devices**

Frequency range (MHz)	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	79	66
0.50 to 30	73	60



NOTE: The lower limit shall apply at the transition frequency.

**Limits for Class B digital devices**

Frequency range (MHz)	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

### 4.3 EUT Test Setup

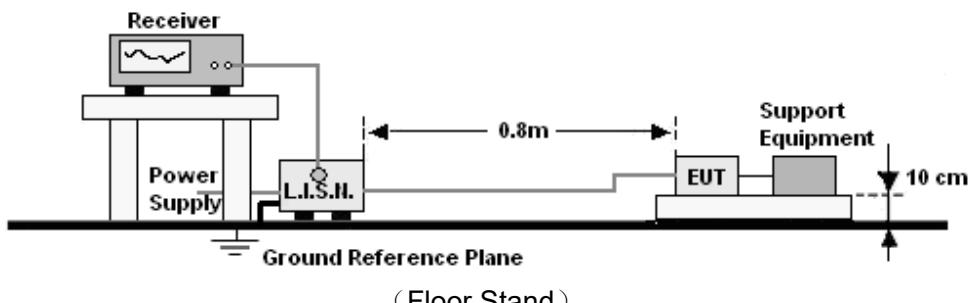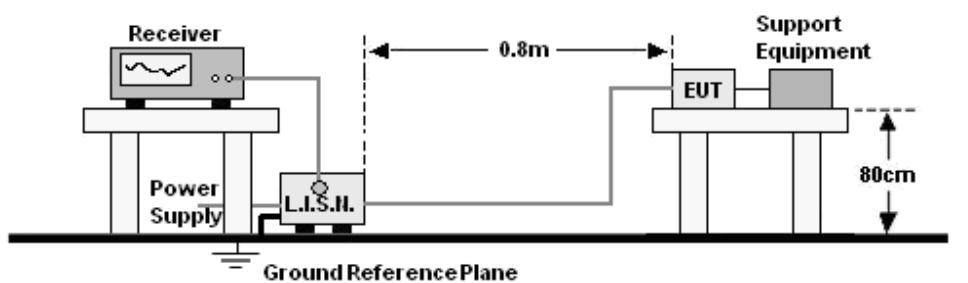

(Floor Stand)



#### 4.4 Procedure Of Conducted Emission Test

- a. The Product was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

#### 4.5 Test Result

Temperature ( °C ) : 22~23	EUT: Flowscreen
Humidity (%RH ): 50~54	M/N: FC7000-A148
Barometric Pressure ( mbar ): 950~1000	Operation Condition: AC power and full load

**Note:**

The AC power supply and full load test mode is the worst test data, just provided the worst test data as below.






### The Test Data Of Conducted Emission

EUT: Flowscreen  
M/N: FC7000-A148  
Operating Condition: AC power and full load  
Test Site: CHAMBER  
Operator: Owen Li  
Comment: Line:L  
Tem:23°C Hum:50%

**SCAN TABLE: "Voltage (150K-30M) FIN"**  
Short Description: 150K-30M Voltage

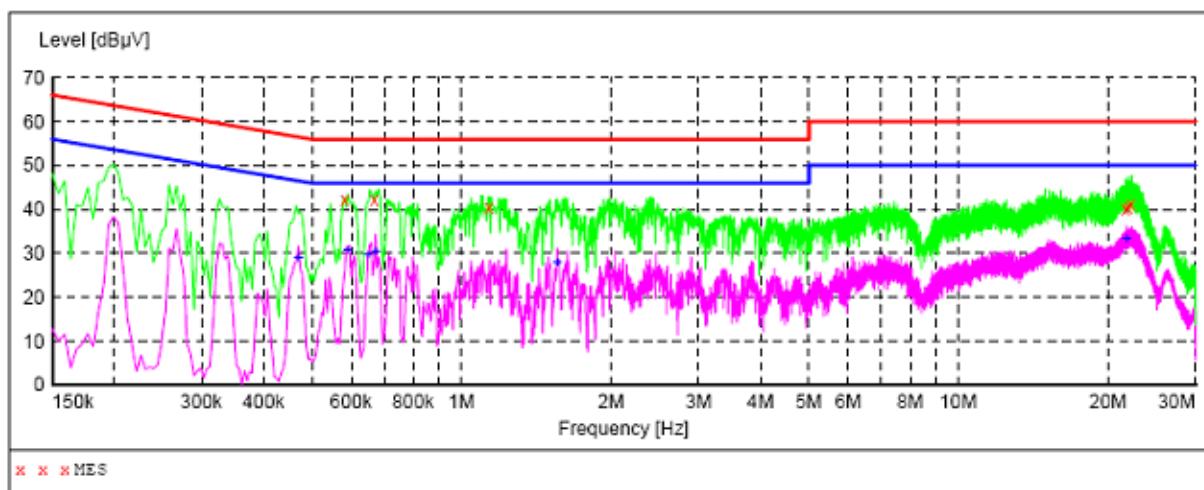

#### MEASUREMENT RESULT:

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.582000	42.20	9.9	56	13.8	QP	L1	GND
0.667500	42.30	9.9	56	13.7	QP	L1	GND
1.135500	40.30	9.9	56	15.7	QP	L1	GND
21.700500	40.10	9.7	60	19.9	QP	L1	GND
21.979500	40.50	9.7	60	19.5	QP	L1	GND
22.245000	41.00	9.7	60	19.0	QP	L1	GND

#### MEASUREMENT RESULT:


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.469500	28.80	9.9	47	17.7	AV	L1	GND
0.591000	30.80	9.9	46	15.2	AV	L1	GND
0.649500	29.80	9.9	46	16.2	AV	L1	GND
0.672000	30.20	9.9	46	15.8	AV	L1	GND
1.558500	27.80	9.9	46	18.2	AV	L1	GND
21.835500	33.30	9.7	50	16.7	AV	L1	GND



### The Test Data Of Conducted Emission

EUT: Flowscreen  
M/N: FC7000-A148  
Operating Condition: AC power and full load  
Test Site: CHAMBER  
Operator: Owen Li  
Comment: Line:N

**SCAN TABLE: "Voltage (150K-30M) FIN"**  
Short Description: 150K-30M Voltage

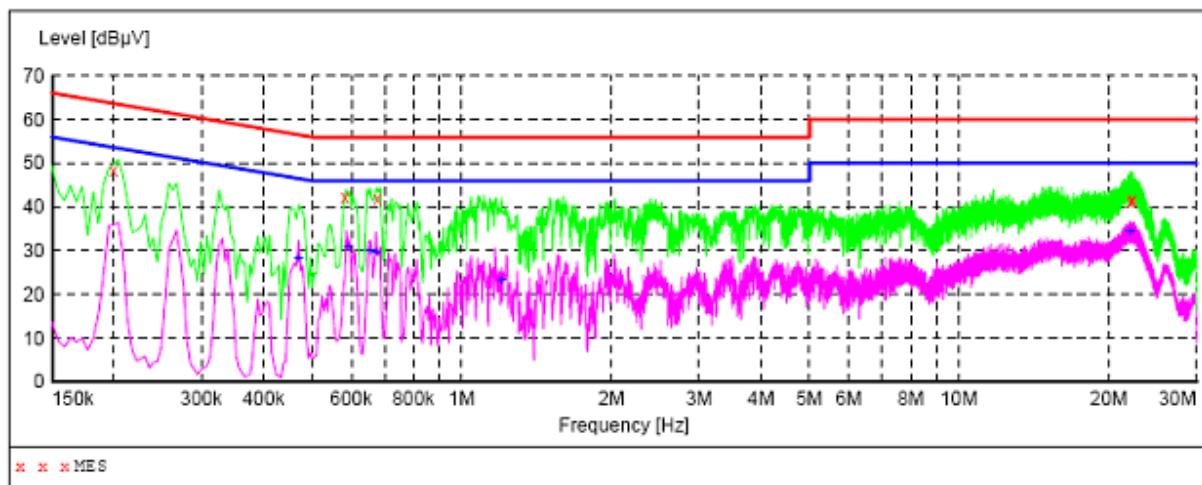

#### MEASUREMENT RESULT:

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.199500	48.30	9.9	64	15.3	QP	N	GND
0.582000	42.30	9.9	56	13.7	QP	N	GND
0.676500	41.90	9.9	56	14.1	QP	N	GND
22.119000	41.30	9.7	60	18.7	QP	N	GND
22.222500	41.50	9.7	60	18.5	QP	N	GND
22.276500	41.40	9.7	60	18.6	QP	N	GND

#### MEASUREMENT RESULT:

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.469500	28.10	9.9	47	18.4	AV	N	GND
0.591000	30.80	9.9	46	15.2	AV	N	GND
0.654000	30.10	9.9	46	15.9	AV	N	GND
0.672000	29.60	9.9	46	16.4	AV	N	GND
1.203000	23.20	9.9	46	22.8	AV	N	GND
22.087500	34.40	9.7	50	15.6	AV	N	GND



## 5. Spurious Radiated Emission

### 5.1 Applicable Standard

For intentional device, according to 15.109(a), the general requirement of field strength of radiated emission from intentional radiators shall not exceed the following tables.

**Limits for Class B digital devices**

Frequency (MHz)	limits at 3m	dB( $\mu$ V/m)
30-88		40.0
88-216		43.5
216-960		46.0
Above 960		54.0

**NOTE:**

1. The lower limit shall apply at the transition frequency.
2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.
3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.

**Limits for Class B digital devices**


Frequency (MHz)	limits at 10m	dB( $\mu$ V/m)
30-88		30.0
88-216		33.5
216-960		56.0
Above 960		64.0


**NOTE:**

1. The lower limit shall apply at the transition frequency.
2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.
3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.


### 5.2 Radiated Measurement Setup

30MHz ~ 1GHz:

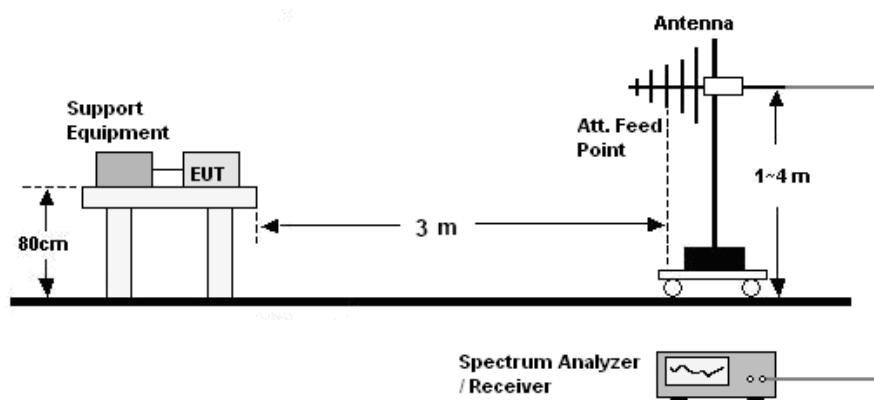

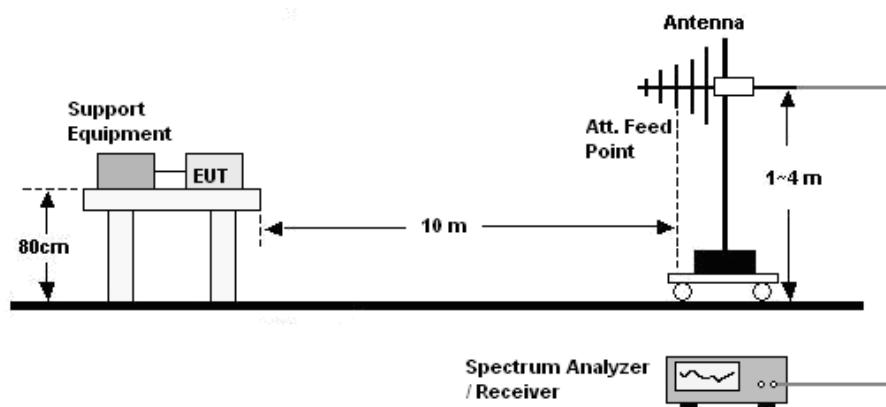

**Above 1GHz:**

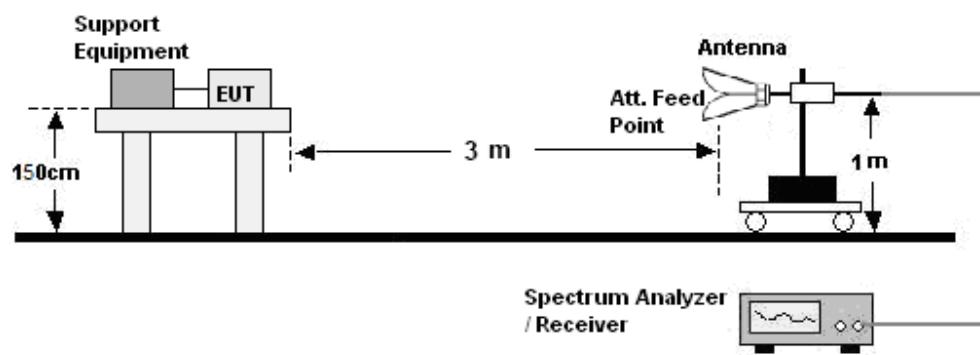

### 5.3 Test Equipment List and Details

See section 2.4.

### 5.4 Radiated Measurement Test Procedure

**30MHz ~ 1GHz:**

- a. The Product was placed on the non-conductive turntable 0.8/0.1 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.



c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

**Above 1GHz:**

- a. The Product was placed on the non-conductive turntable 1.5/0.1 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

## 5.5 Test Result

Temperature ( °C ) : 22~23	EUT: Flowscreen
Humidity (%RH ) : 50~54	M/N: FC7000-A148
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Full Load
Test Site: 3m Chamber	

**Note:**

The test data(above 1GHz) is lower than limit much, so not record in the report, just provided the worest test data as below.




Radiated Emission Test Data:

EUT: Flowscreen  
M/N: FC7000-A148  
Operating Condition: AC Power Supply Full Load  
Test Site: 3m CHAMBER  
Operator: Owen Li  
Comment: Polarization: Horizontal

***SWEET TABLE: "test (30M-1G) 8447F"***

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
				Transducer
				VBLU9163-484

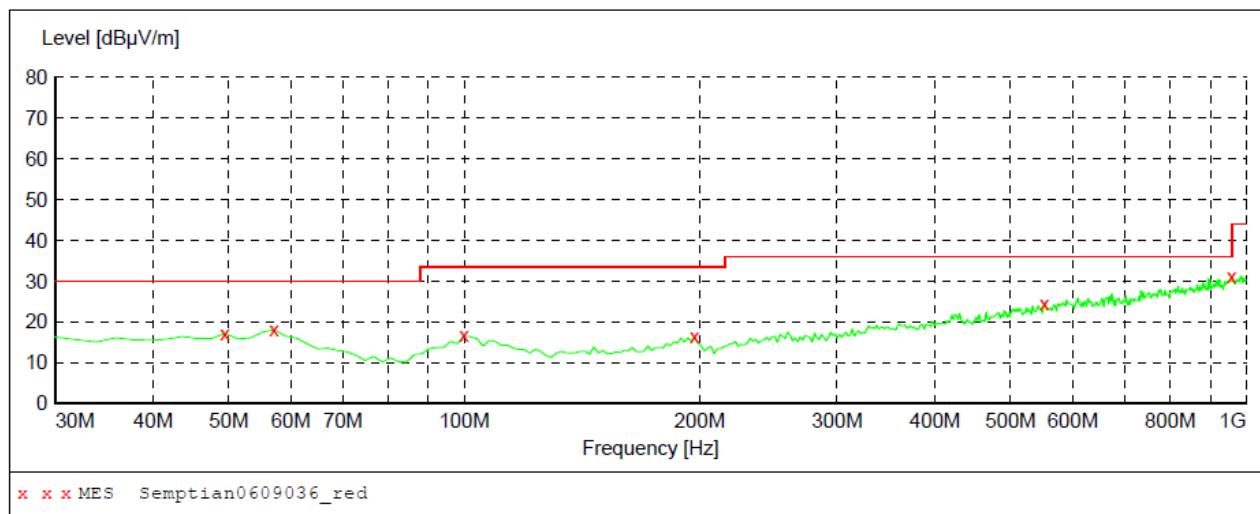

***MEASUREMENT RESULT: "Semptian0609036\_red"***

6/9/2017 1:42PM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB		cm	deg	
	49.438878	17.10	-11.1	30.0	12.9	---	100.0	98.00	HORIZONTAL
	57.214429	18.00	-10.9	30.0	12.0	---	100.0	191.00	HORIZONTAL
	99.979960	16.60	-12.4	33.5	16.9	---	100.0	362.00	HORIZONTAL
	197.174349	16.30	-12.9	33.5	17.2	---	100.0	252.00	HORIZONTAL
	552.905812	24.60	-5.4	36.0	11.4	---	100.0	313.00	HORIZONTAL
	959.178357	31.10	0.3	36.0	4.9	---	100.0	37.00	HORIZONTAL




Radiated Emission Test Data:

EUT: Flowscreen  
M/N: FC7000-A148  
Operating Condition: AC Power Supply Full Load  
Test Site: 3m CHAMBER  
Operator: Owen Li  
Comment: Polarization: Vertical

***SWEEP TABLE: "test (30M-1G) 8447F"***

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
				Transducer
				VBLU9163-484

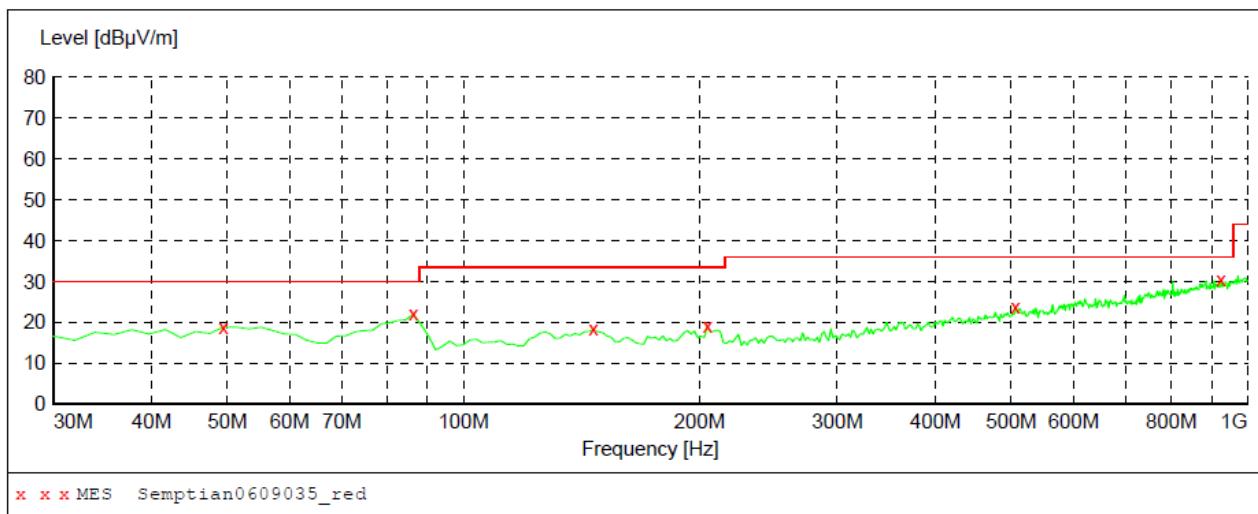

***MEASUREMENT RESULT: "Semptian0609035\_red"***

6/9/2017 1:37PM

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.438878	18.80	-11.1	30.0	11.2	---	100.0	94.00	VERTICAL
86.372745	22.00	-15.7	30.0	8.0	---	100.0	10.00	VERTICAL
146.633267	18.30	-16.1	33.5	15.2	---	100.0	34.00	VERTICAL
204.949900	19.00	-12.9	33.5	14.5	---	100.0	339.00	VERTICAL
506.252505	23.80	-5.8	36.0	12.2	---	100.0	10.00	VERTICAL
926.132265	30.50	0.3	36.0	5.5	---	100.0	360.00	VERTICAL




Radiated Emission Test Data:

EUT: Flowscreen  
M/N: FC7000-A148  
Operating Condition: DC Power Supply Full Load  
Test Site: 3m CHAMBER  
Operator: Owen Li  
Comment: Polarization: Horizontal

***SWEEP TABLE: "test (30M-1G) 8447F"***

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
				VBLU9163-484

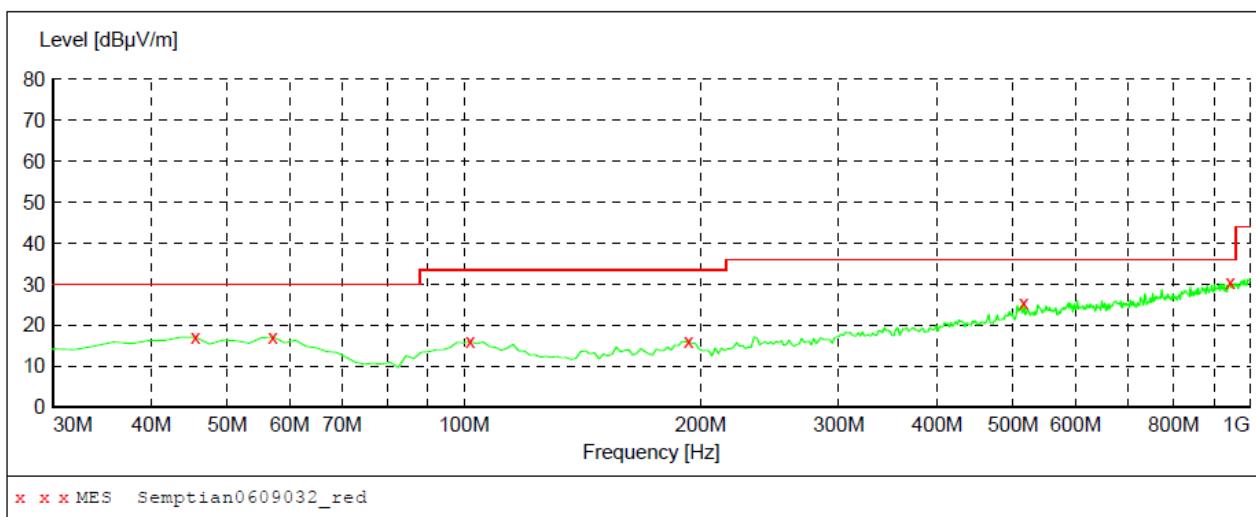

***MEASUREMENT RESULT: "Semptian0609032\_red"***

6/9/2017 12:00PM

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.551102	17.10	-11.1	30.0	12.9	---	100.0	369.00	HORIZONTAL
57.214429	17.10	-10.9	30.0	12.9	---	100.0	253.00	HORIZONTAL
101.923848	16.00	-12.3	33.5	17.5	---	100.0	284.00	HORIZONTAL
193.286573	16.10	-12.4	33.5	17.4	---	100.0	284.00	HORIZONTAL
515.971944	25.60	-5.6	36.0	10.4	---	100.0	223.00	HORIZONTAL
945.571142	30.40	0.1	36.0	5.6	---	100.0	362.00	HORIZONTAL




Radiated Emission Test Data:

EUT: Flowscreen  
M/N: FC7000-A148  
Operating Condition: DC Power Supply Full Load  
Test Site: 3m CHAMBER  
Operator: Owen Li  
Comment: Polarization: Vertical

***SWEEP TABLE: "test (30M-1G) 8447F"***

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VBLU9163-484

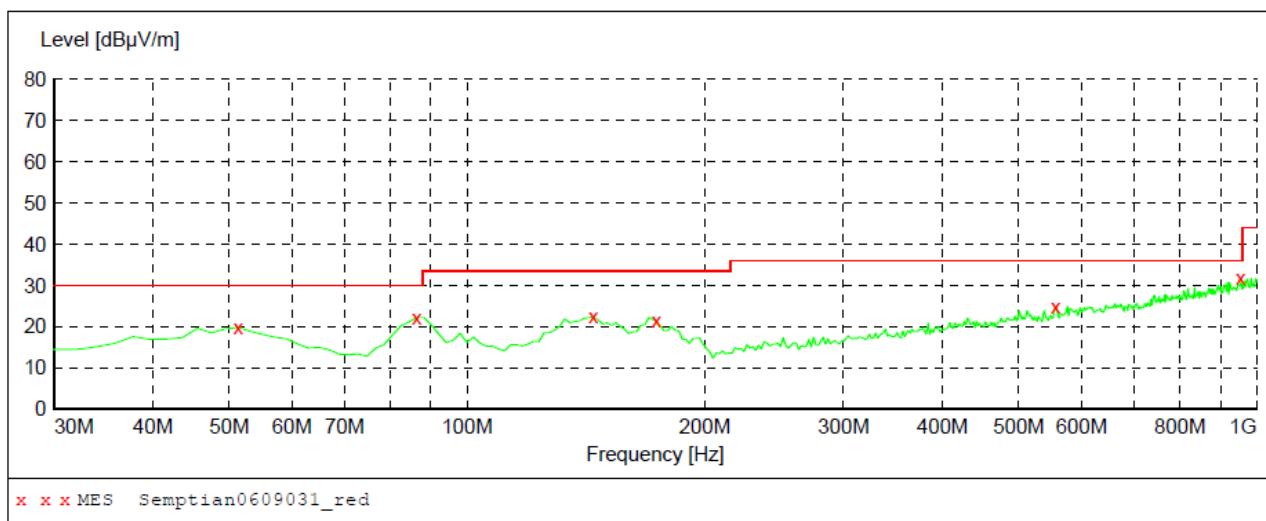

***MEASUREMENT RESULT: "Semptian0609031\_red"***

6/9/2017 11:54AM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB		cm	deg	
	51.382766	19.80	-11.3	30.0	10.2	---	100.0	283.00	VERTICAL
	86.372745	22.20	-15.7	30.0	7.8	---	100.0	283.00	VERTICAL
	144.689379	22.30	-16.1	33.5	11.2	---	100.0	370.00	VERTICAL
	173.847695	21.40	-14.6	33.5	12.1	---	100.0	36.00	VERTICAL
	556.793587	24.90	-5.3	36.0	11.1	---	100.0	252.00	VERTICAL
	955.290581	31.70	0.3	36.0	4.3	---	100.0	160.00	VERTICAL