

EXHIBIT E- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →
LTE-B2-20-LCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_18.08.01

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

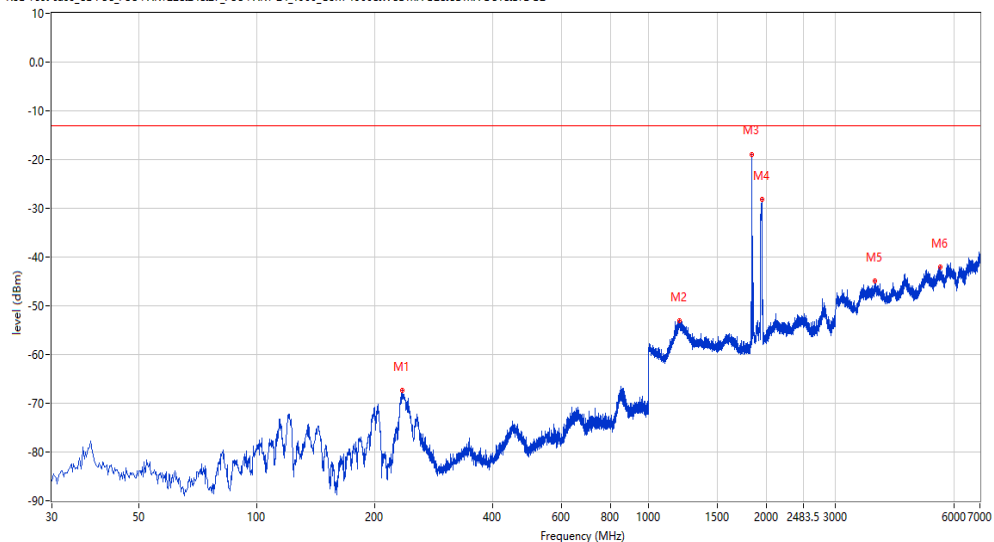

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
234.619	-67.35	-4.53	-13.0	-54.35	183.20	Horizontal	Vertical	Pass
1197.951	-53.06	2.16	-13.0	-40.06	87.90	Horizontal	Vertical	Pass
1832.792	-18.95	-3.03	-13.0	-5.95	85.30	Horizontal	Vertical	Pass
1942.264	-28.26	-1.15	-13.0	-15.26	233.70	Horizontal	Vertical	Pass
3784.804	-44.94	9.66	-13.0	-31.94	0.00	Horizontal	Vertical	Pass
5536.366	-42.08	11.63	-13.0	-29.08	28.80	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_14.59.08

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8176.706	-57.41	18.55	-13.0	-44.41	134.30	Horizontal	Vertical	Pass
9405.649	-55.26	19.91	-13.0	-42.26	250.10	Horizontal	Vertical	Pass
10114.971	-49.79	24.23	-13.0	-36.79	355.40	Horizontal	Vertical	Pass
11822.294	-48.40	24.45	-13.0	-35.40	9.30	Horizontal	Vertical	Pass
14183.954	-44.73	28.69	-13.0	-31.73	31.30	Horizontal	Vertical	Pass
16993.752	-50.07	23.00	-13.0	-37.07	174.10	Horizontal	Vertical	Pass

LTE-B2-20-MCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_17:55:01

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

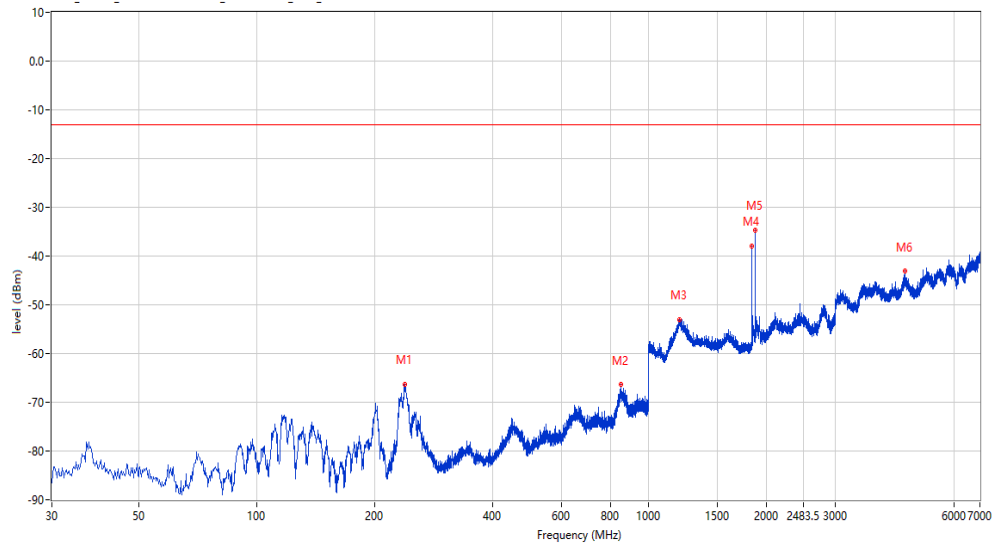

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
238.740	-66.31	-2.83	-13.0	-53.31	168.30	Horizontal	Vertical	Pass
848.718	-66.39	5.70	-13.0	-53.39	287.70	Horizontal	Vertical	Pass
1199.450	-52.97	2.27	-13.0	-39.97	249.40	Horizontal	Vertical	Pass
1835.291	-37.89	-2.87	-13.0	-24.89	90.70	Horizontal	Vertical	Pass
1870.782	-34.67	1.09	-13.0	-21.67	98.90	Horizontal	Vertical	Pass
4510.622	-43.06	11.32	-13.0	-30.06	222.00	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_15.01.13

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8198.700	-57.04	19.18	-13.0	-44.04	195.80	Horizontal	Vertical	Pass
9416.646	-54.86	19.73	-13.0	-41.86	57.70	Horizontal	Vertical	Pass
10098.475	-50.40	24.27	-13.0	-37.40	80.50	Horizontal	Vertical	Pass
11140.465	-50.23	23.15	-13.0	-37.23	215.20	Horizontal	Vertical	Pass
12465.634	-47.95	25.47	-13.0	-34.95	215.20	Horizontal	Vertical	Pass
14142.714	-45.08	28.92	-13.0	-32.08	29.80	Horizontal	Vertical	Pass

LTE-B2-20-HCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_18.19.52

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
122.369	-75.08	-13.11	-13.0	-62.08	58.80	Horizontal	Vertical	Pass
234.376	-67.34	-4.63	-13.0	-54.34	186.50	Horizontal	Vertical	Pass
1222.944	-53.00	1.23	-13.0	-40.00	103.30	Horizontal	Vertical	Pass
1890.777	-37.66	1.45	-13.0	-24.66	78.70	Horizontal	Vertical	Pass
1978.255	-33.05	-1.38	-13.0	-20.05	248.80	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_14:57:39

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8193.202	-57.03	19.02	-13.0	-44.03	96.40	Horizontal	Vertical	Pass
9419.395	-53.57	19.68	-13.0	-40.57	259.80	Horizontal	Vertical	Pass
10123.219	-50.73	24.08	-13.0	-37.73	352.80	Horizontal	Vertical	Pass
11154.211	-50.22	23.13	-13.0	-37.22	208.80	Horizontal	Vertical	Pass
11827.793	-48.85	24.57	-13.0	-35.85	76.70	Horizontal	Vertical	Pass
13823.794	-45.63	26.11	-13.0	-32.63	256.90	Horizontal	Vertical	Pass

LTE-B2-20-LCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_14.30.27

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

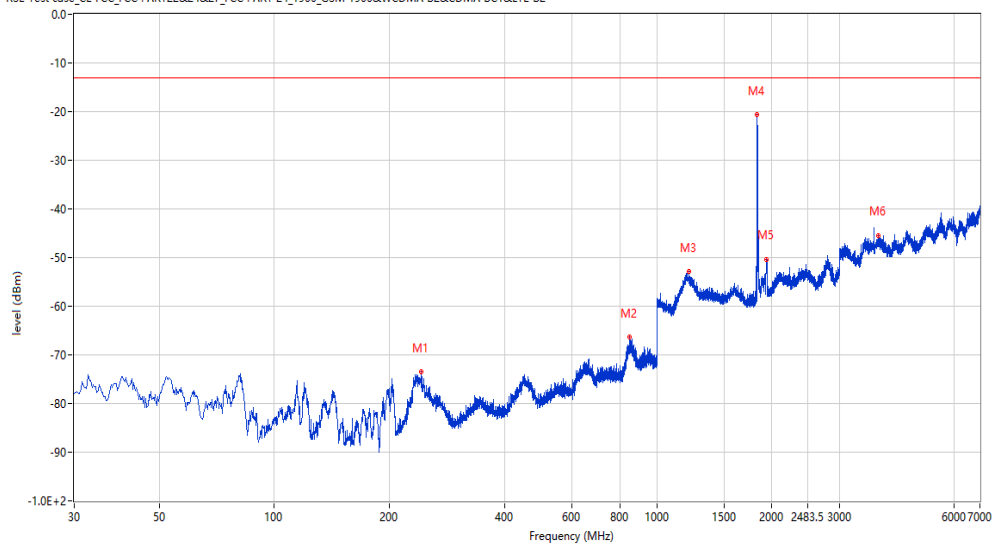

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
242.619	-73.53	-3.02	-13.0	-60.53	202.40	Vertical	Vertical	Pass
848.718	-66.39	5.70	-13.0	-53.39	341.20	Vertical	Vertical	Pass
1216.446	-52.91	1.55	-13.0	-39.91	31.80	Vertical	Vertical	Pass
1832.792	-20.59	-3.03	-13.0	-7.59	50.40	Vertical	Vertical	Pass
1932.767	-50.36	-1.48	-13.0	-37.36	126.30	Vertical	Vertical	Pass
3788.803	-45.49	9.63	-13.0	-32.49	315.40	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_14.40.31

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

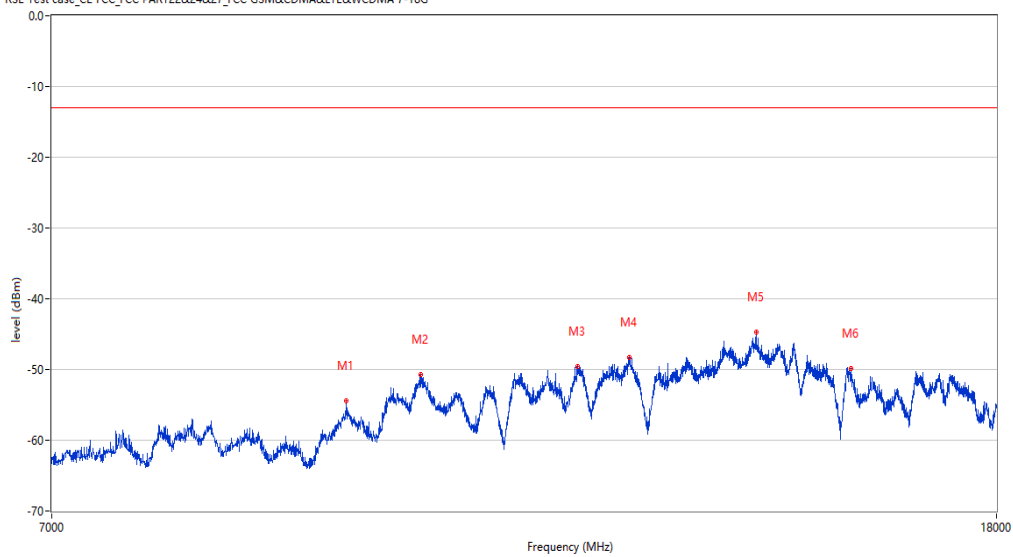

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9400.150	-54.42	20.00	-13.0	-41.42	333.50	Vertical	Vertical	Pass
10125.969	-50.70	24.03	-13.0	-37.70	164.60	Vertical	Vertical	Pass
11838.790	-49.52	24.83	-13.0	-36.52	210.00	Vertical	Vertical	Pass
12473.882	-48.24	25.45	-13.0	-35.24	130.70	Vertical	Vertical	Pass
14153.712	-44.70	28.86	-13.0	-31.70	110.60	Vertical	Vertical	Pass
15561.360	-49.92	22.53	-13.0	-36.92	175.40	Vertical	Vertical	Pass

LTE-B2-20-MCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_13.29.54

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

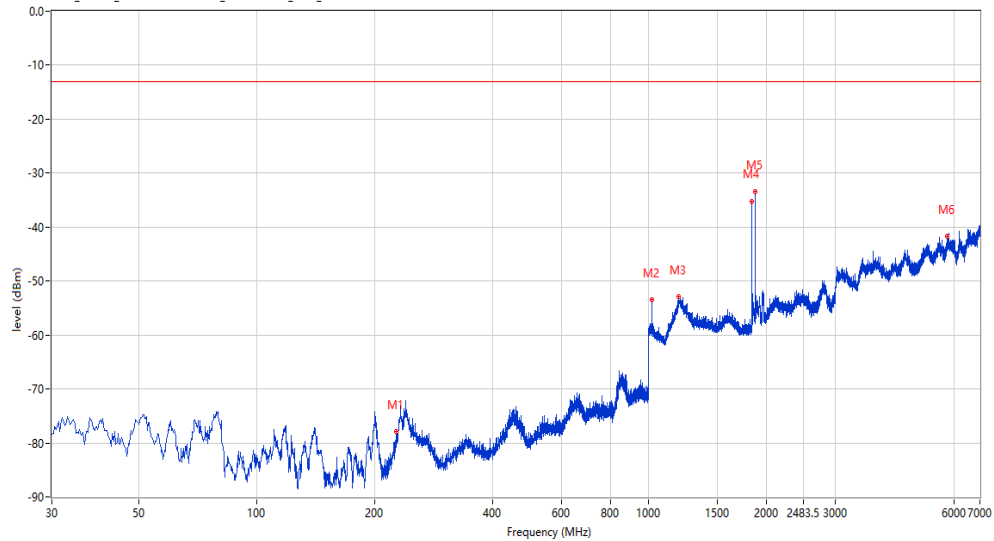

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
226.376	-77.93	-8.01	-13.0	-64.93	263.40	Vertical	Vertical	Pass
1017.996	-53.50	-2.61	-13.0	-40.50	42.30	Vertical	Vertical	Pass
1193.952	-52.94	1.88	-13.0	-39.94	64.20	Vertical	Vertical	Pass
1835.291	-35.18	-2.87	-13.0	-22.18	39.30	Vertical	Vertical	Pass
1870.782	-33.40	1.09	-13.0	-20.40	47.80	Vertical	Vertical	Pass
5777.306	-41.67	12.34	-13.0	-28.67	168.30	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_14.39.05

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

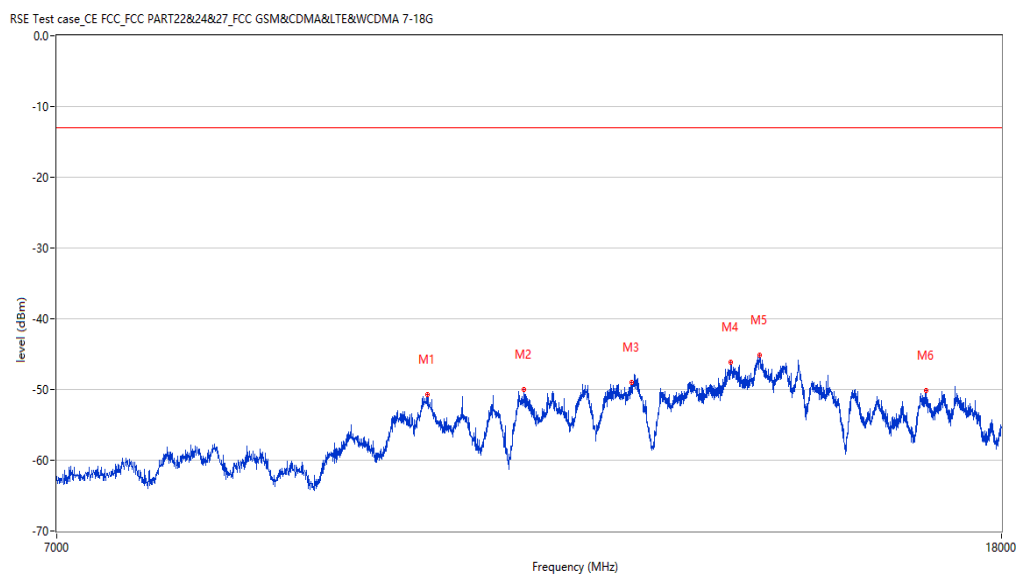

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
10136.966	-50.78	23.82	-13.0	-37.78	360.00	Vertical	Vertical	Pass
11170.707	-50.06	23.09	-13.0	-37.06	181.20	Vertical	Vertical	Pass
12432.642	-49.01	24.67	-13.0	-36.01	293.20	Vertical	Vertical	Pass
13735.816	-46.18	27.37	-13.0	-33.18	152.60	Vertical	Vertical	Pass
14134.466	-45.18	28.97	-13.0	-32.18	66.30	Vertical	Vertical	Pass
16696.826	-50.08	22.45	-13.0	-37.08	89.30	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_14.34.01

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

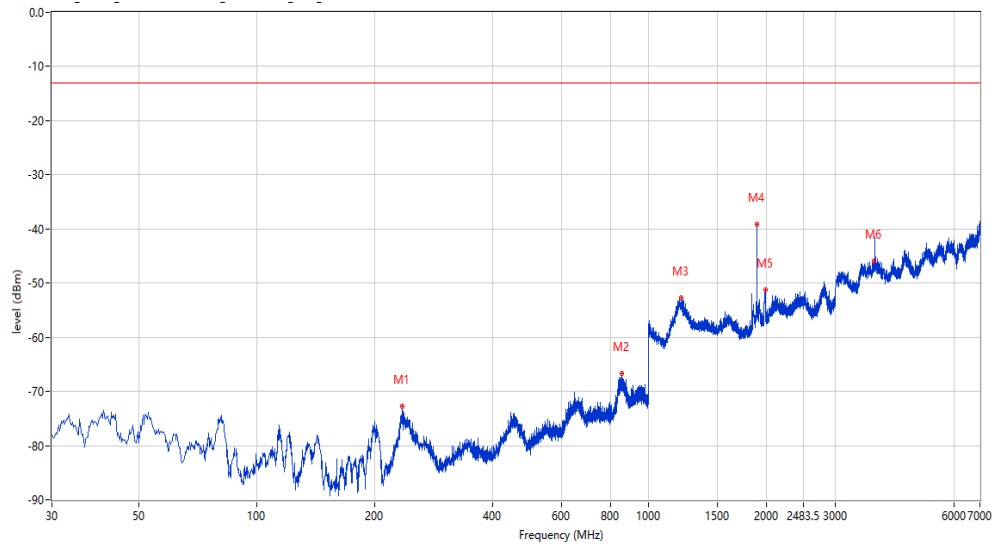

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
235.589	-72.82	-4.13	-13.0	-59.82	48.90	Vertical	Vertical	Pass
851.627	-66.62	5.77	-13.0	-53.62	198.50	Vertical	Vertical	Pass
1207.448	-52.75	2.00	-13.0	-39.75	153.90	Vertical	Vertical	Pass
1890.777	-39.16	1.45	-13.0	-26.16	49.00	Vertical	Vertical	Pass
1987.753	-51.18	-1.31	-13.0	-38.18	324.00	Vertical	Vertical	Pass
3756.811	-45.98	9.52	-13.0	-32.98	318.80	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_14.43.09

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8600.100	-57.36	16.90	-13.0	-44.36	270.60	Vertical	Vertical	Pass
10095.726	-50.69	24.18	-13.0	-37.69	358.40	Vertical	Vertical	Pass
11107.473	-49.88	23.22	-13.0	-36.88	359.10	Vertical	Vertical	Pass
12462.884	-47.41	25.40	-13.0	-34.41	267.60	Vertical	Vertical	Pass
14137.216	-44.52	28.95	-13.0	-31.52	115.10	Vertical	Vertical	Pass
16592.352	-49.94	22.58	-13.0	-36.94	338.30	Vertical	Vertical	Pass

LTE-B4-20-LCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_18.31.02

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%


Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

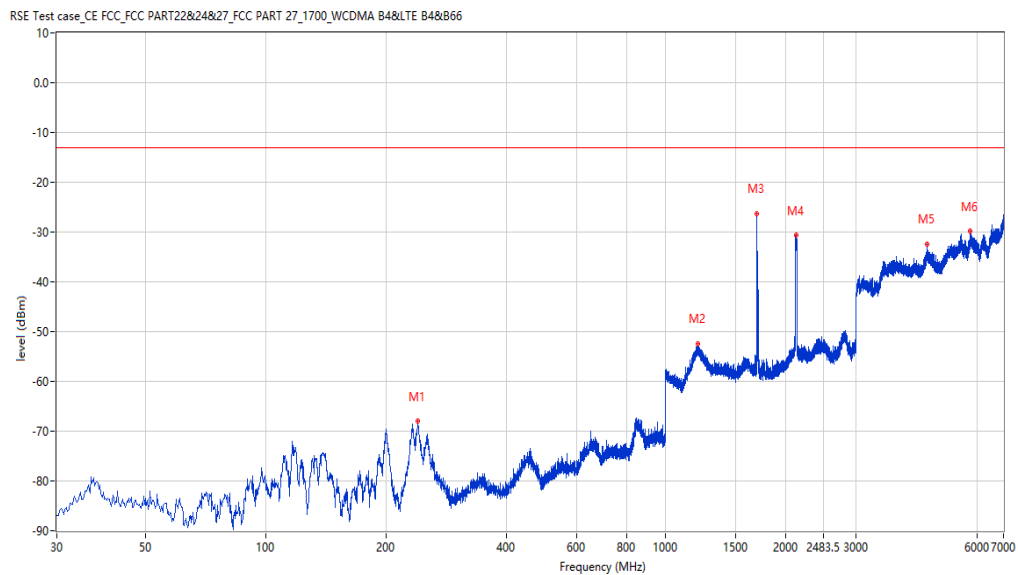

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
239.953	-68.02	-2.59	-13.0	-55.02	173.10	Horizontal	Vertical	Pass
1201.225	-52.41	2.24	-13.0	-39.41	215.00	Horizontal	Vertical	Pass
1692.913	-26.25	-2.70	-13.0	-13.25	102.20	Horizontal	Vertical	Pass
2122.360	-30.70	1.92	-13.0	-17.70	251.50	Horizontal	Vertical	Pass
4506.312	-32.49	11.27	-13.0	-19.49	153.10	Horizontal	Vertical	Pass
5780.652	-29.79	12.44	-13.0	-16.79	21.80	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_17.12.48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8201.450	-56.07	19.20	-13.0	-43.07	358.30	Horizontal	Vertical	Pass
9411.147	-54.71	19.82	-13.0	-41.71	66.70	Horizontal	Vertical	Pass
10123.219	-50.64	24.08	-13.0	-37.64	0.00	Horizontal	Vertical	Pass
11866.283	-47.97	25.37	-13.0	-34.97	358.30	Horizontal	Vertical	Pass
12462.884	-47.17	25.40	-13.0	-34.17	66.70	Horizontal	Vertical	Pass
14145.464	-45.13	28.91	-13.0	-32.13	97.60	Horizontal	Vertical	Pass

LTE-B4-20-MCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_18.27.27

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 27_1700_WCDMA B4<E B4&B66

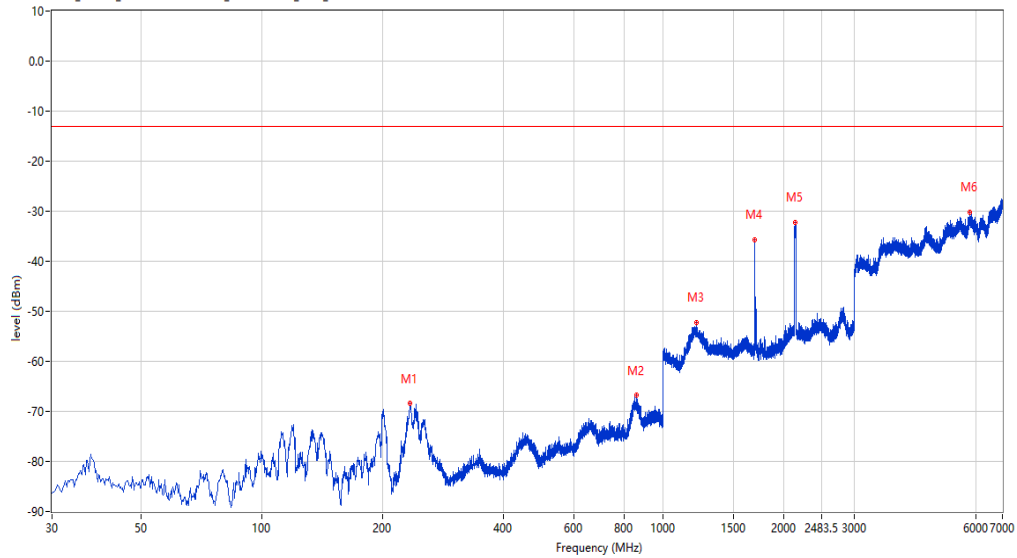

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
234.376	-68.40	-4.83	-13.0	-55.40	161.90	Horizontal	Vertical	Pass
857.931	-66.82	5.20	-13.0	-53.82	1.90	Horizontal	Vertical	Pass
1208.724	-52.34	1.99	-13.0	-39.34	14.00	Horizontal	Vertical	Pass
1687.914	-35.79	-2.97	-13.0	-22.79	102.20	Horizontal	Vertical	Pass
2127.859	-32.19	1.83	-13.0	-19.19	359.40	Horizontal	Vertical	Pass
5811.649	-30.27	12.65	-13.0	-17.27	293.90	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_17.11.19

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

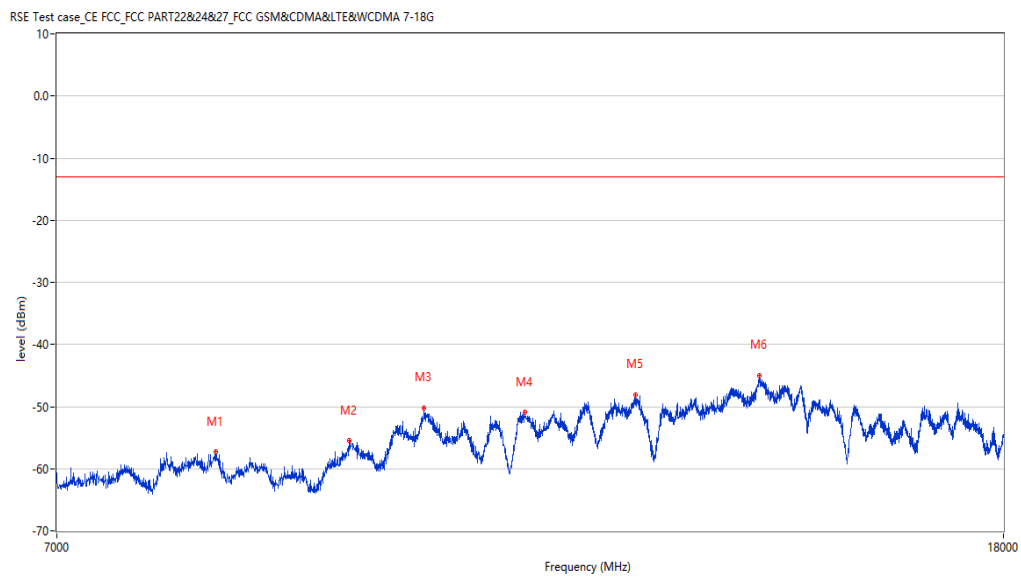

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8204.199	-57.33	19.17	-13.0	-44.33	158.90	Horizontal	Vertical	Pass
9369.908	-55.49	19.37	-13.0	-42.49	290.60	Horizontal	Vertical	Pass
10098.475	-50.26	24.27	-13.0	-37.26	229.20	Horizontal	Vertical	Pass
11162.459	-50.96	23.11	-13.0	-37.96	170.40	Horizontal	Vertical	Pass
12468.383	-48.08	25.47	-13.0	-35.08	260.50	Horizontal	Vertical	Pass
14112.472	-45.01	29.10	-13.0	-32.01	125.80	Horizontal	Vertical	Pass

LTE-B4-20-HCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_18.24.20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

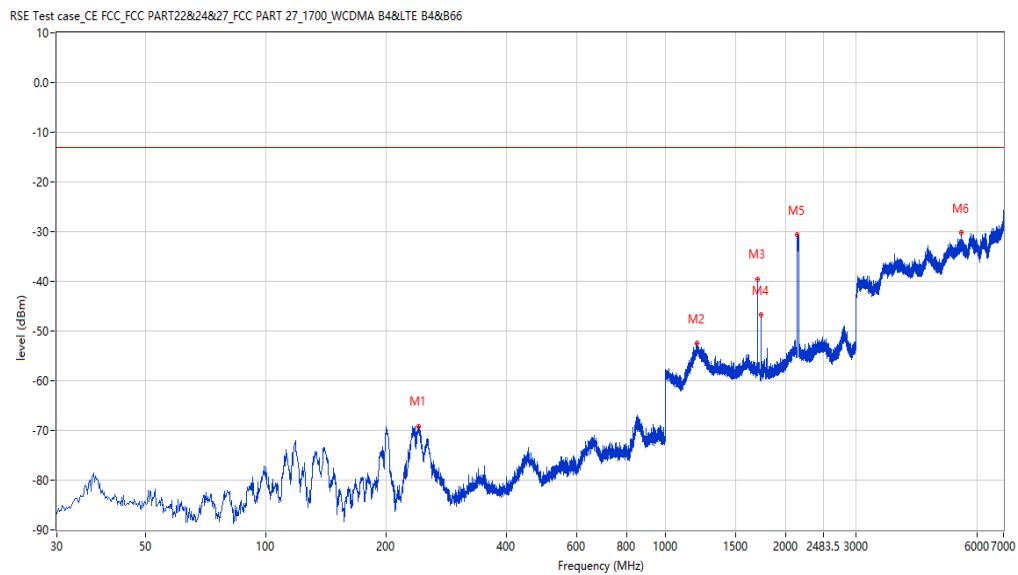

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
241.650	-69.16	-3.02	-13.0	-56.16	341.70	Horizontal	Vertical	Pass
1198.975	-52.51	2.20	-13.0	-39.51	80.60	Horizontal	Vertical	Pass
1700.162	-39.65	-1.55	-13.0	-26.65	102.90	Horizontal	Vertical	Pass
1735.908	-46.78	-1.04	-13.0	-33.78	97.40	Horizontal	Vertical	Pass
2137.358	-30.57	1.57	-13.0	-17.57	241.30	Horizontal	Vertical	Pass
5487.689	-30.24	11.76	-13.0	-17.24	150.20	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_17.13.58

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9358.910	-55.58	19.14	-13.0	-42.58	339.30	Horizontal	Vertical	Pass
10120.470	-50.06	24.14	-13.0	-37.06	65.50	Horizontal	Vertical	Pass
11173.457	-50.17	23.09	-13.0	-37.17	80.00	Horizontal	Vertical	Pass
12479.380	-48.27	25.43	-13.0	-35.27	182.70	Horizontal	Vertical	Pass
14117.971	-43.98	29.06	-13.0	-30.98	247.40	Horizontal	Vertical	Pass
16977.256	-49.88	22.80	-13.0	-36.88	4.90	Horizontal	Vertical	Pass

LTE-B4-20-LCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_15.19.04

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

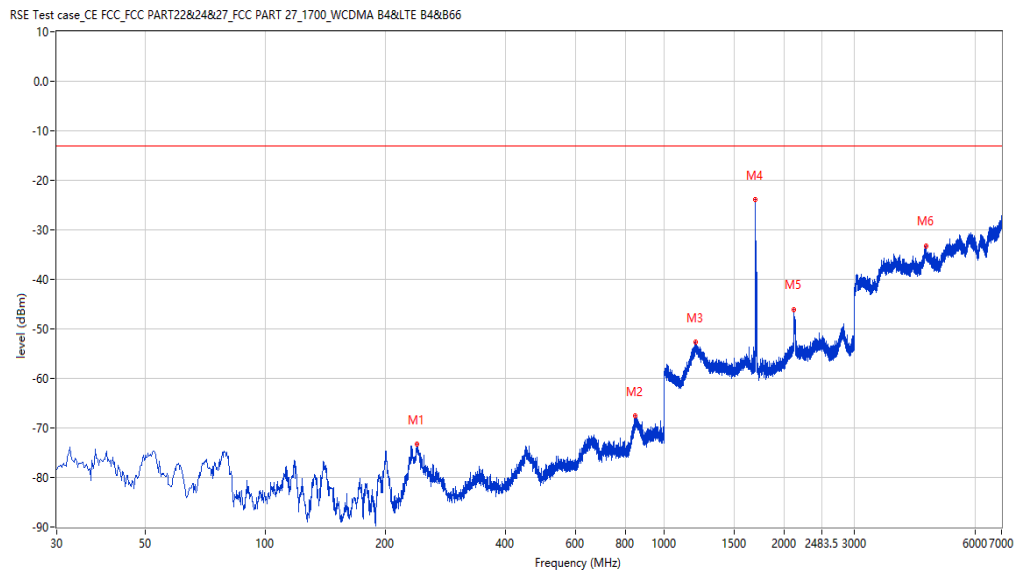

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
239.468	-73.31	-2.78	-13.0	-60.31	48.40	Vertical	Vertical	Pass
847.021	-67.57	5.21	-13.0	-54.57	187.60	Vertical	Vertical	Pass
1198.975	-52.67	2.20	-13.0	-39.67	53.60	Vertical	Vertical	Pass
1693.163	-23.91	-2.67	-13.0	-10.91	221.80	Vertical	Vertical	Pass
2113.611	-46.08	2.06	-13.0	-33.08	323.80	Vertical	Vertical	Pass
4528.809	-33.22	10.83	-13.0	-20.22	303.10	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_16.42.48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8509.373	-57.70	16.62	-13.0	-44.70	359.10	Vertical	Vertical	Pass
9400.150	-55.26	20.00	-13.0	-42.26	242.30	Vertical	Vertical	Pass
10103.974	-50.28	24.30	-13.0	-37.28	359.10	Vertical	Vertical	Pass
11836.041	-49.62	24.77	-13.0	-36.62	256.50	Vertical	Vertical	Pass
12495.876	-47.24	25.37	-13.0	-34.24	104.30	Vertical	Vertical	Pass
14115.221	-45.10	29.08	-13.0	-32.10	123.60	Vertical	Vertical	Pass

LTE-B4-20-MCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_15.15.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC PART 27_1700_WCDMA B4<E B4&B66

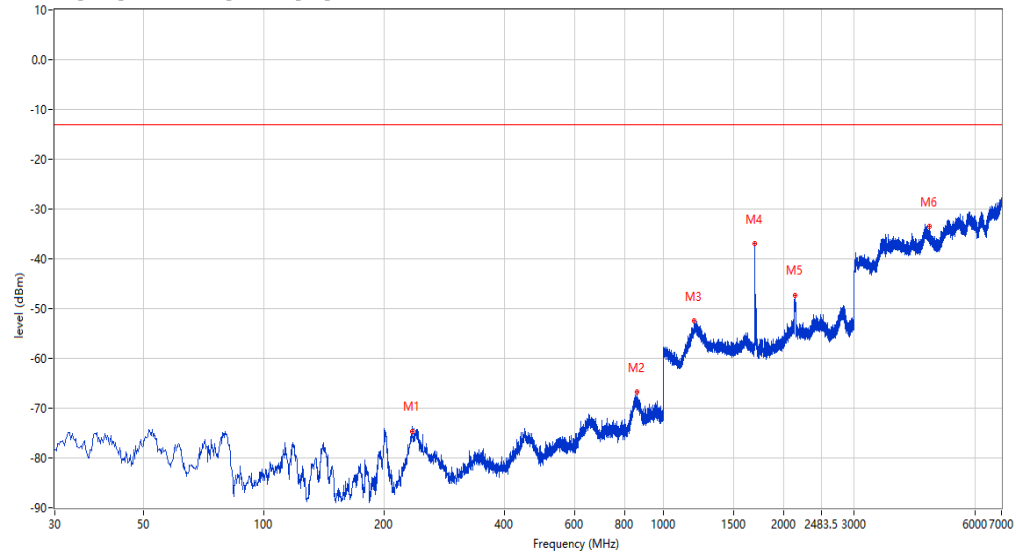

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
234.619	-74.63	-4.74	-13.0	-61.63	51.80	Vertical	Vertical	Pass
858.173	-66.83	5.19	-13.0	-53.83	347.30	Vertical	Vertical	Pass
1189.976	-52.47	1.55	-13.0	-39.47	102.60	Vertical	Vertical	Pass
1687.664	-36.88	-2.97	-13.0	-23.88	233.90	Vertical	Vertical	Pass
2134.358	-47.29	1.66	-13.0	-34.29	321.40	Vertical	Vertical	Pass
4613.298	-33.50	9.52	-13.0	-20.50	21.40	Vertical	Vertical	Pass

LTE-B4-20-HCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_15.22.45

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC PART 27_1700_WCDMA B4<E B4&B66

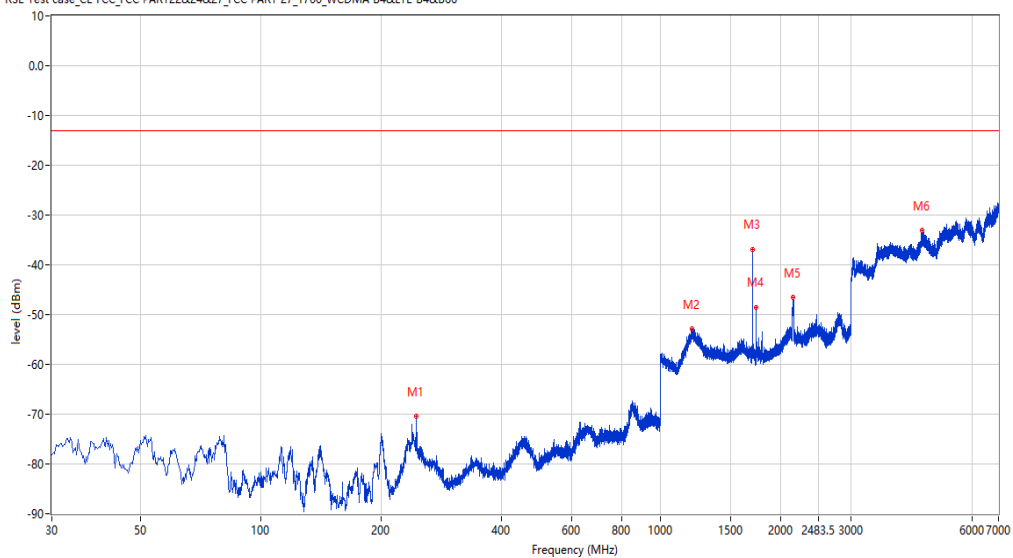

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
245.286	-70.42	-4.02	-13.0	-57.42	184.00	Vertical	Vertical	Pass
1197.725	-52.78	2.10	-13.0	-39.78	1.20	Vertical	Vertical	Pass
1700.662	-36.93	-1.29	-13.0	-23.93	229.10	Vertical	Vertical	Pass
1735.908	-48.57	-1.04	-13.0	-35.57	245.50	Vertical	Vertical	Pass
2144.357	-46.52	1.35	-13.0	-33.52	354.10	Vertical	Vertical	Pass
4512.311	-32.99	11.28	-13.0	-19.99	15.90	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_16.40.33

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8190.452	-57.84	18.94	-13.0	-44.84	286.10	Vertical	Vertical	Pass
10145.214	-50.55	23.67	-13.0	-37.55	185.30	Vertical	Vertical	Pass
11869.033	-49.64	25.38	-13.0	-36.64	92.70	Vertical	Vertical	Pass
12482.129	-48.20	25.42	-13.0	-35.20	360.00	Vertical	Vertical	Pass
14131.717	-45.29	28.99	-13.0	-32.29	331.10	Vertical	Vertical	Pass
16969.008	-50.35	22.68	-13.0	-37.35	182.30	Vertical	Vertical	Pass

LTE-B5-10-LCH-H-TX

Test result

Project Number: Test

Test Time: 2021-01-04_14.55.17

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC LTE B5&12&13&26

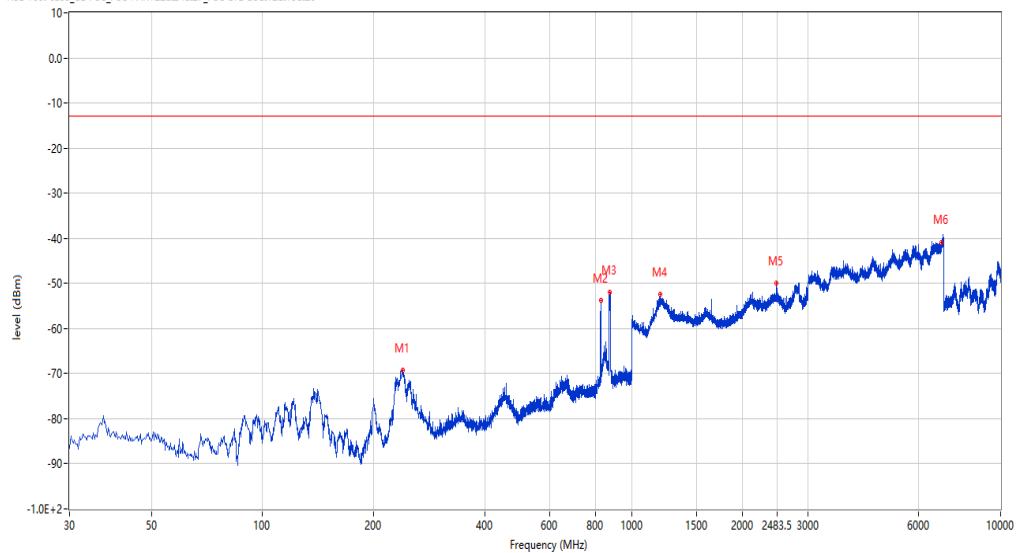

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
240.195	-69.21	-2.26	-13.0	-56.21	322.00	Horizontal	Vertical	Pass
824.474	-53.72	4.86	-13.0	-40.72	284.80	Horizontal	Vertical	Pass
871.992	-52.05	4.71	-13.0	-39.05	355.80	Horizontal	Vertical	Pass
1197.951	-52.50	2.19	-13.0	-39.50	285.60	Horizontal	Vertical	Pass
2473.632	-49.89	3.06	-13.0	-36.89	153.90	Horizontal	Vertical	Pass
6906.023	-40.86	13.02	-13.0	-27.86	66.80	Horizontal	Vertical	Pass

LTE-B5-10-MCH-H-TX

Test result

Project Number: Test

Test Time: 2021-01-04_14.59.09

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC PART22&24&27_FCC LTE B5&12&13&26

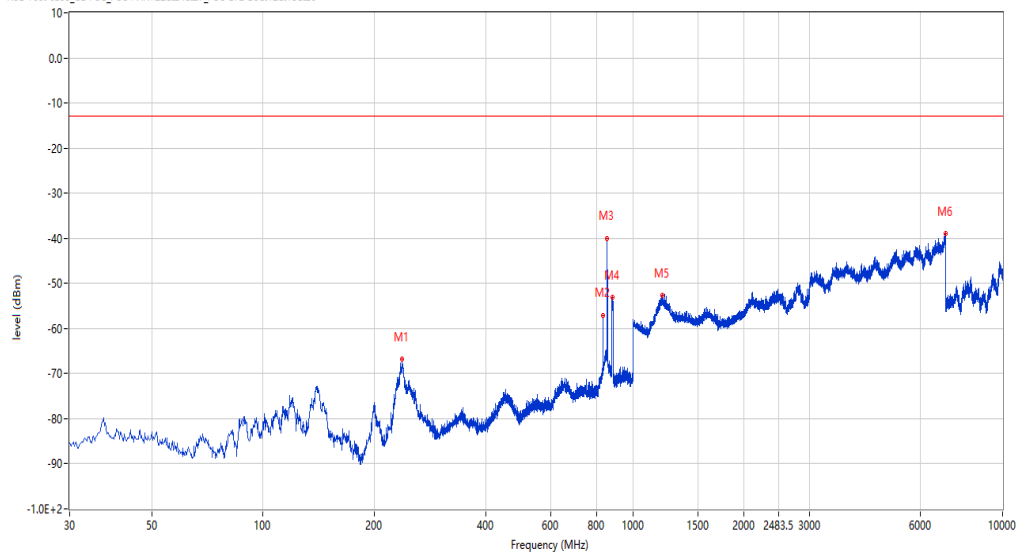

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
237.771	-66.83	-3.12	-13.0	-53.83	310.80	Horizontal	Vertical	Pass
831.990	-57.04	6.44	-13.0	-44.04	278.10	Horizontal	Vertical	Pass
851.870	-40.00	9.76	-13.0	-27.00	165.70	Horizontal	Vertical	Pass
879.023	-53.18	3.59	-13.0	-40.18	141.50	Horizontal	Vertical	Pass
1201.950	-52.55	2.24	-13.0	-39.55	237.70	Horizontal	Vertical	Pass
6998.000	-38.99	14.52	-13.0	-25.99	340.70	Horizontal	Vertical	Pass

LTE-B5-10-HCH-H-TX

Test result

Project Number: Test

Test Time: 2021-01-04_15.03.33

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CFE FCC PART22&24&27_FCC LTE B5&12&13&26

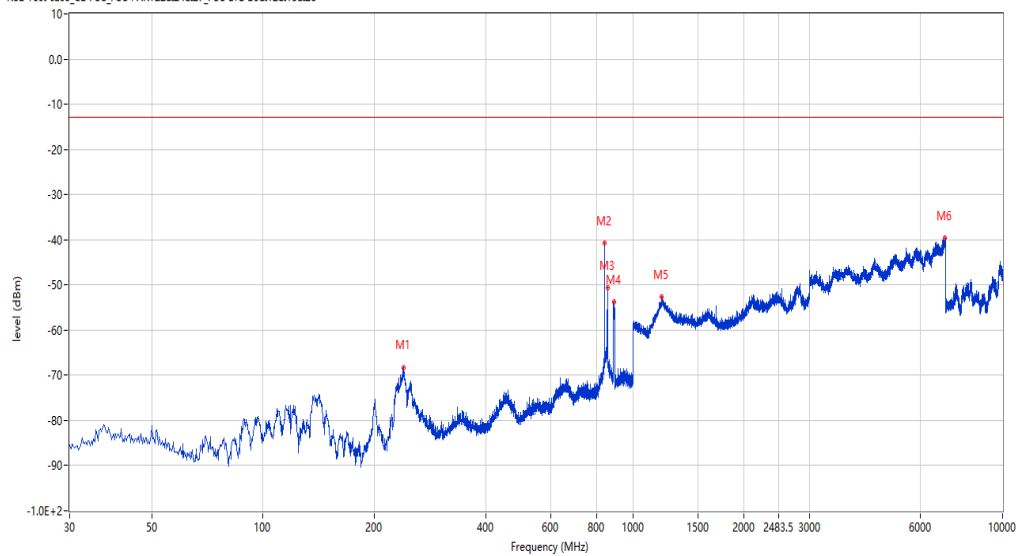

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
239.468	-68.28	-2.43	-13.0	-55.28	306.00	Horizontal	Vertical	Pass
839.505	-40.72	8.36	-13.0	-27.72	284.40	Horizontal	Vertical	Pass
856.961	-50.56	6.42	-13.0	-37.56	289.60	Horizontal	Vertical	Pass
891.145	-53.70	2.39	-13.0	-40.70	147.10	Horizontal	Vertical	Pass
1196.951	-52.66	2.12	-13.0	-39.66	66.50	Horizontal	Vertical	Pass
6992.002	-39.69	14.34	-13.0	-26.69	273.00	Horizontal	Vertical	Pass

LTE-B5-10-LCH-V-TX

Test result

Project Number: Test

Test Time: 2021-01-04_14.48.13

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_PART22&24&27_FCC LTE_B5&12&13&26

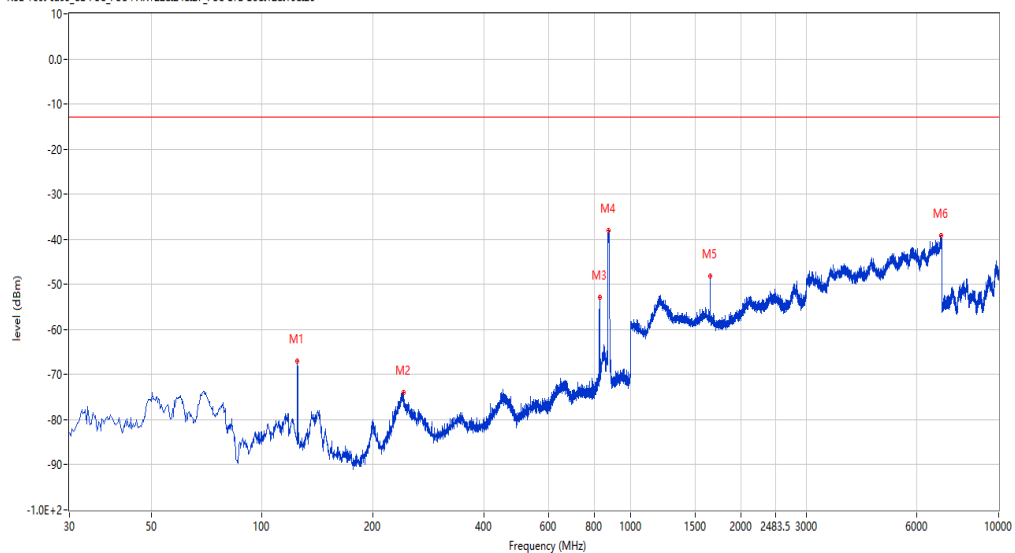

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.794	-66.97	-14.25	-13.0	-53.97	17.20	Vertical	Vertical	Pass
242.134	-73.94	-2.81	-13.0	-60.94	60.30	Vertical	Vertical	Pass
824.474	-52.91	4.86	-13.0	-39.91	260.20	Vertical	Vertical	Pass
871.507	-38.00	4.79	-13.0	-25.00	14.60	Vertical	Vertical	Pass
1649.338	-48.14	-2.18	-13.0	-35.14	194.10	Vertical	Vertical	Pass
6970.007	-39.14	13.95	-13.0	-26.14	98.10	Vertical	Vertical	Pass

LTE-B5-10-MCH-V-TX

Test result

Project Number: Test

Test Time: 2021-01-04_14.44.15

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_PART22&24&27_FCC LTE B5&12&13&26

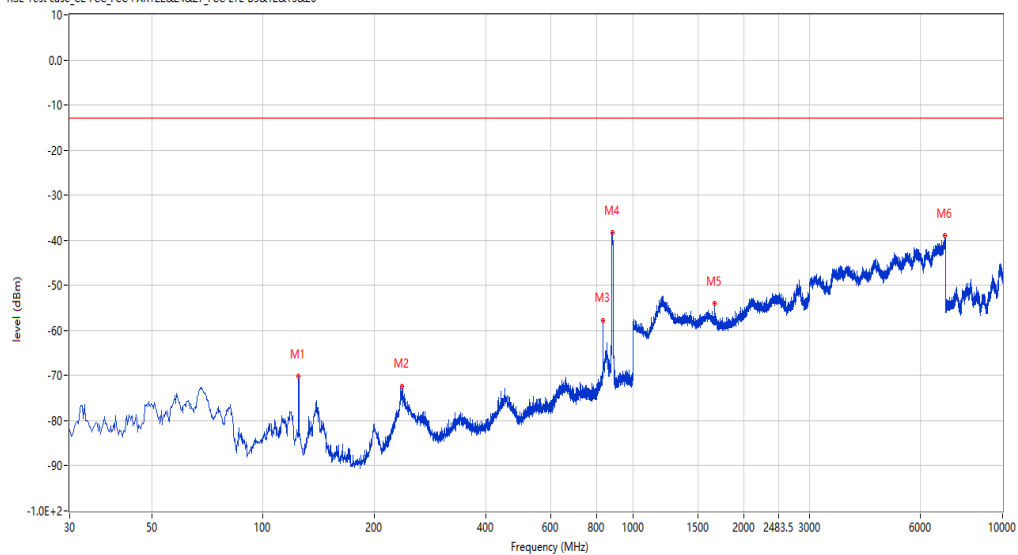

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.794	-70.24	-14.25	-13.0	-57.24	44.40	Vertical	Vertical	Pass
237.043	-72.34	-3.42	-13.0	-59.34	287.00	Vertical	Vertical	Pass
831.990	-57.72	6.44	-13.0	-44.72	241.20	Vertical	Vertical	Pass
879.750	-38.37	3.47	-13.0	-25.37	54.80	Vertical	Vertical	Pass
1663.834	-53.95	-2.66	-13.0	-40.95	188.90	Vertical	Vertical	Pass
6996.001	-38.99	14.46	-13.0	-25.99	326.60	Vertical	Vertical	Pass

LTE-B5-10-HCH-V-TX

Test result

Project Number: Test

Test Time: 2021-01-04_14.39.49

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC FCC PART22&24&27 FCC LTE B5&12&13&26

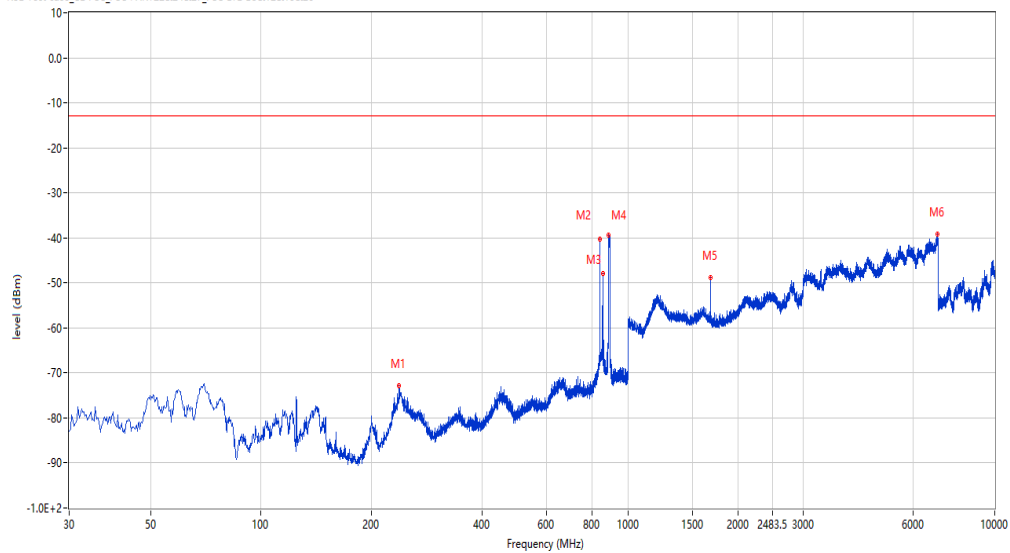

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
237.771	-72.88	-3.12	-13.0	-59.88	72.30	Vertical	Vertical	Pass
839.505	-40.36	8.36	-13.0	-27.36	225.60	Vertical	Vertical	Pass
856.961	-47.83	6.42	-13.0	-34.83	239.00	Vertical	Vertical	Pass
884.841	-39.32	2.90	-13.0	-26.32	176.90	Vertical	Vertical	Pass
1678.830	-48.91	-2.98	-13.0	-35.91	187.40	Vertical	Vertical	Pass
6977.006	-39.25	14.06	-13.0	-26.25	48.20	Vertical	Vertical	Pass

LTE-B7-20-LCH-H-TX

Test result

Project Number: Test

Test Time: 2021-01-13_17.17.28

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC PART 27_2535 LTE B7



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
128.430	-73.35	-14.45	-25.0	-48.35	210.80	Horizontal	Vertical	Pass
140.310	-73.98	-14.12	-25.0	-48.98	210.80	Horizontal	Vertical	Pass
244.801	-72.96	-2.75	-25.0	-47.96	67.70	Horizontal	Vertical	Pass
1021.995	-53.63	-3.08	-25.0	-28.63	114.70	Horizontal	Vertical	Pass
2506.623	-14.02	2.47	-25.0	10.98	277.10	Horizontal	Vertical	N.A
2620.595	-44.08	1.09	-25.0	-19.08	120.80	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.08.17

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G

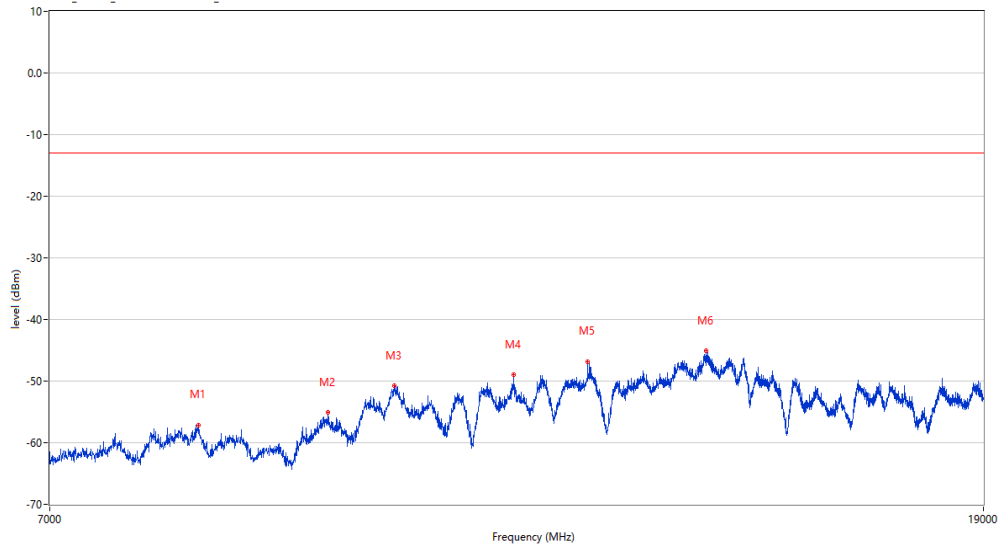

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8208.698	-57.23	19.09	-13.0	-44.23	268.30	Horizontal	Vertical	Pass
9426.393	-55.13	19.56	-13.0	-42.13	198.70	Horizontal	Vertical	Pass
10119.220	-50.77	24.16	-13.0	-37.77	359.40	Horizontal	Vertical	Pass
11498.875	-48.99	24.65	-13.0	-35.99	20.90	Horizontal	Vertical	Pass
12443.639	-46.84	24.94	-13.0	-33.84	262.30	Horizontal	Vertical	Pass
14120.220	-45.10	29.05	-13.0	-32.10	202.50	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.29.01

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

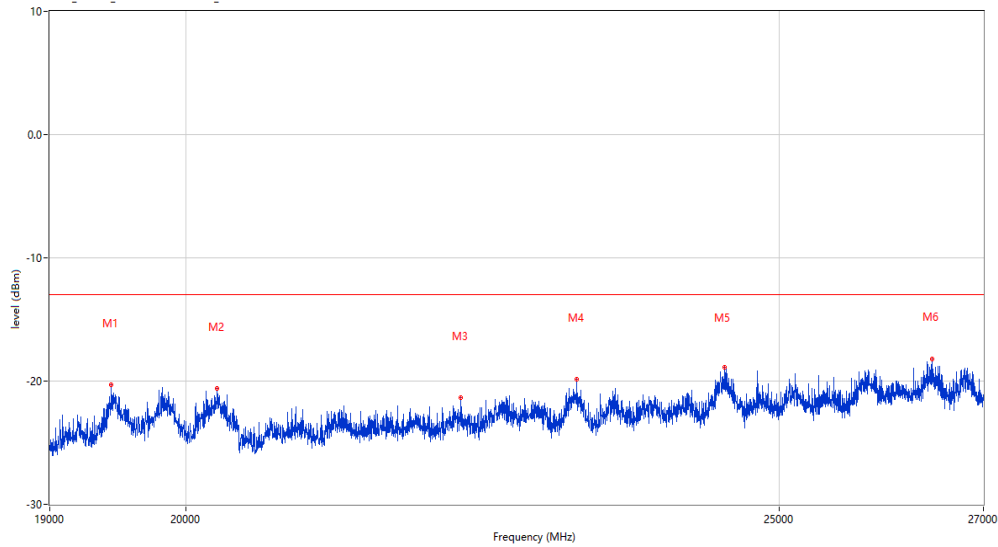

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19445.889	-20.33	22.17	-13.0	-7.33	7.90	Horizontal	Vertical	Pass
20235.691	-20.63	22.63	-13.0	-7.63	85.70	Horizontal	Vertical	Pass
22181.205	-21.37	23.76	-13.0	-8.37	46.80	Horizontal	Vertical	Pass
23166.958	-19.82	24.34	-13.0	-6.82	332.60	Horizontal	Vertical	Pass
24496.626	-18.84	25.11	-13.0	-5.84	19.90	Horizontal	Vertical	Pass
26488.128	-18.22	26.27	-13.0	-5.22	326.60	Horizontal	Vertical	Pass

LTE-B7-20-MCH-H-TX

Test result

Project Number: Test

Test Time: 2021-01-13_16.25.33

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC PART 27_2535_LTE B7

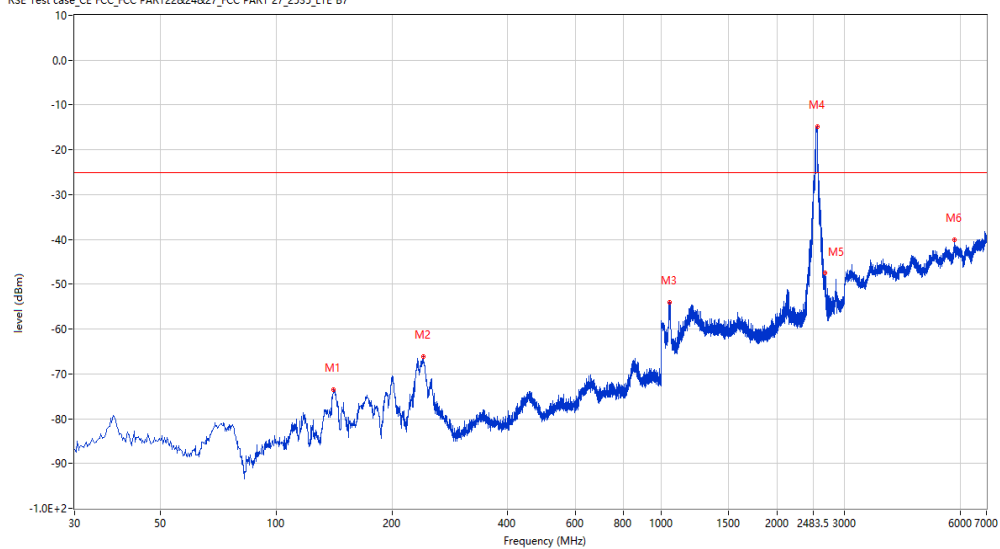

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
141.280	-73.60	-14.22	-25.0	-48.60	355.10	Horizontal	Vertical	Pass
240.922	-66.16	-1.76	-25.0	-41.16	278.20	Horizontal	Vertical	Pass
1052.987	-54.02	-4.20	-25.0	-29.02	210.10	Horizontal	Vertical	Pass
2543.114	-14.92	1.58	-25.0	10.08	12.90	Horizontal	Vertical	N.A
2662.584	-47.46	1.28	-25.0	-22.46	141.10	Horizontal	Vertical	Pass
5793.302	-40.10	12.67	-25.0	-15.10	189.80	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.11.12

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8220.695	-56.71	18.60	-13.0	-43.71	79.70	Horizontal	Vertical	Pass
9396.401	-54.50	19.93	-13.0	-41.50	255.80	Horizontal	Vertical	Pass
10113.222	-50.31	24.24	-13.0	-37.31	206.80	Horizontal	Vertical	Pass
12461.635	-47.73	25.37	-13.0	-34.73	158.10	Horizontal	Vertical	Pass
14138.215	-45.10	28.95	-13.0	-32.10	13.50	Horizontal	Vertical	Pass
14693.077	-45.83	27.84	-13.0	-32.83	194.60	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.20.40

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

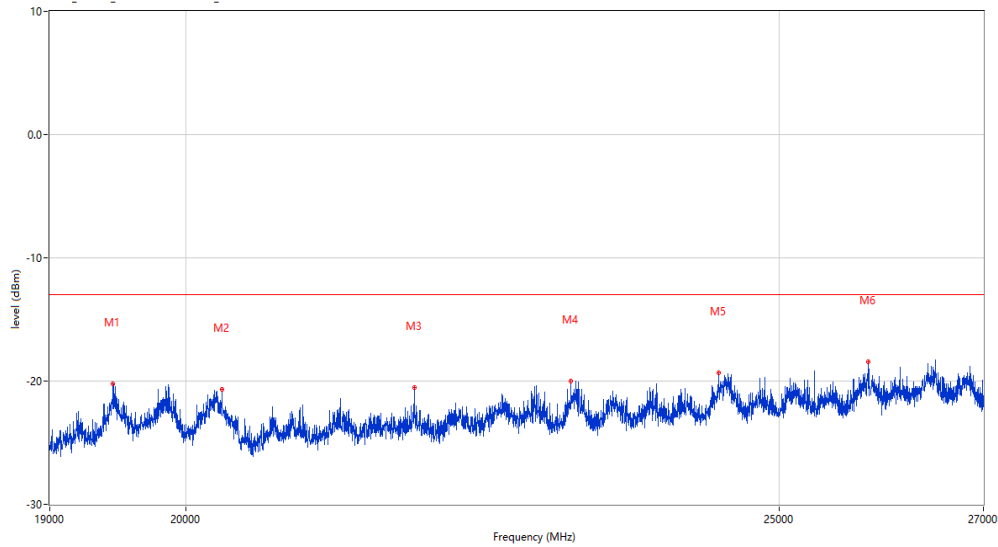

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19457.886	-20.20	22.18	-13.0	-7.20	295.40	Horizontal	Vertical	Pass
20269.683	-20.65	22.65	-13.0	-7.65	166.70	Horizontal	Vertical	Pass
21793.302	-20.49	23.54	-13.0	-7.49	169.60	Horizontal	Vertical	Pass
23114.971	-19.98	24.31	-13.0	-6.98	75.00	Horizontal	Vertical	Pass
24438.640	-19.32	25.08	-13.0	-6.32	0.80	Horizontal	Vertical	Pass
25858.285	-18.42	25.90	-13.0	-5.42	301.40	Horizontal	Vertical	Pass

LTE-B7-20-HCH-H-TX

Test result

Project Number: Test

Test Time: 2021-01-13_16.31.31

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC PART 27_2535_LTE B7



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
141.522	-73.69	-14.25	-25.0	-48.69	359.50	Horizontal	Vertical	Pass
232.194	-67.21	-4.63	-25.0	-42.21	257.60	Horizontal	Vertical	Pass
1076.481	-52.27	-4.47	-25.0	-27.27	150.10	Horizontal	Vertical	Pass
2182.704	-47.97	0.48	-25.0	-22.97	137.80	Horizontal	Vertical	Pass
2559.610	-15.45	1.27	-25.0	9.55	87.00	Horizontal	Vertical	N.A
2687.078	-48.50	1.17	-25.0	-23.50	150.10	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.09.26

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G

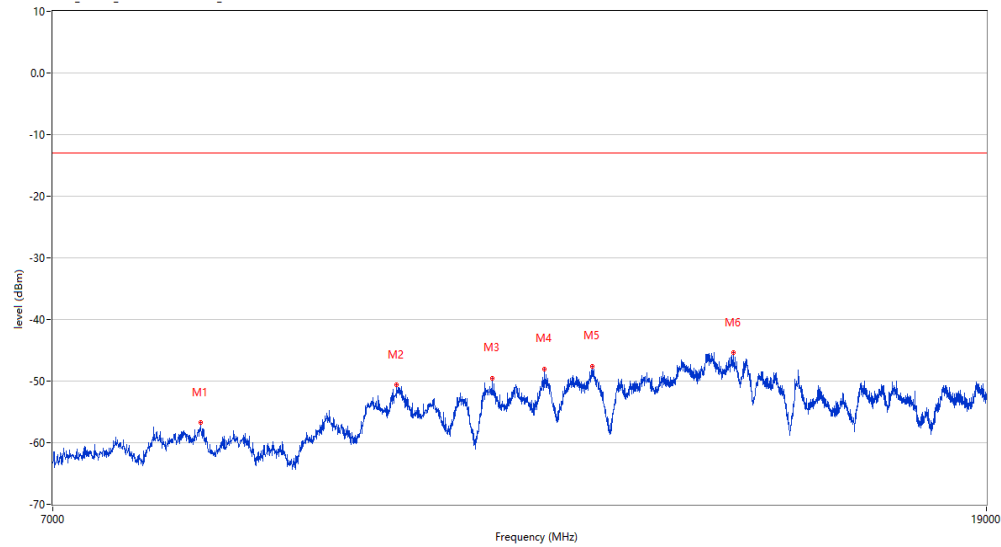

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8199.700	-56.73	19.21	-13.0	-43.73	319.70	Horizontal	Vertical	Pass
10110.222	-50.60	24.26	-13.0	-37.60	82.90	Horizontal	Vertical	Pass
11201.950	-49.55	23.03	-13.0	-36.55	337.90	Horizontal	Vertical	Pass
11843.789	-48.04	24.95	-13.0	-35.04	220.20	Horizontal	Vertical	Pass
12464.634	-47.57	25.44	-13.0	-34.57	136.70	Horizontal	Vertical	Pass
14492.127	-45.39	26.92	-13.0	-32.39	98.10	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.12.51

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

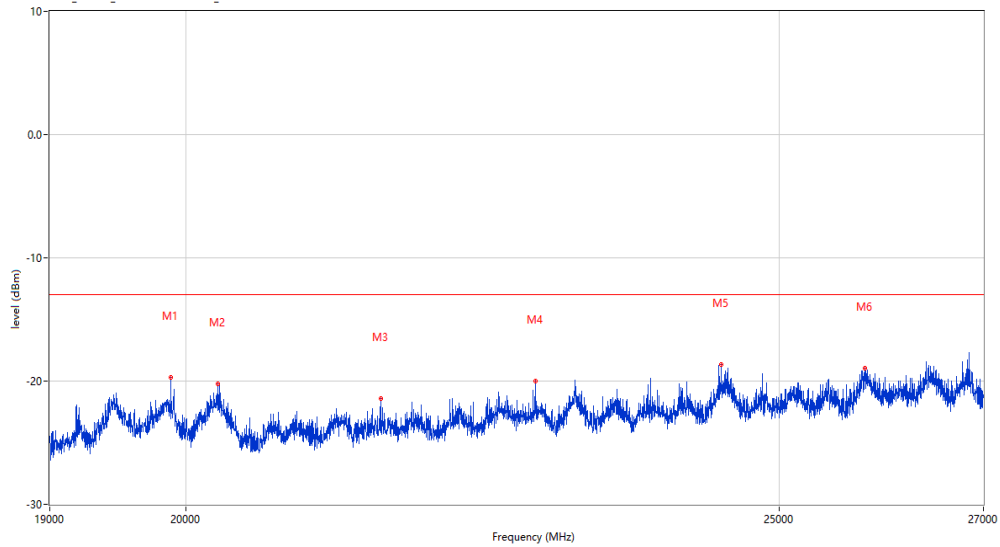

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19885.779	-19.71	22.43	-13.0	-6.71	120.40	Horizontal	Vertical	Pass
20239.690	-20.25	22.63	-13.0	-7.25	287.70	Horizontal	Vertical	Pass
21521.370	-21.45	23.38	-13.0	-8.45	101.30	Horizontal	Vertical	Pass
22809.048	-20.03	24.13	-13.0	-7.03	86.00	Horizontal	Vertical	Pass
24462.634	-18.66	25.09	-13.0	-5.66	229.20	Horizontal	Vertical	Pass
25818.295	-18.94	25.88	-13.0	-5.94	0.00	Horizontal	Vertical	Pass

LTE-B7-20-LCH-V-TX

Test result

Project Number: Test

Test Time: 2021-01-13_16.51.00

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_FCC_FCC PART22&24&27_FCC PART 27_2535_LTE B7



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.794	-72.18	-13.81	-25.0	-47.18	157.20	Vertical	Vertical	Pass
140.552	-72.42	-14.15	-25.0	-47.42	219.70	Vertical	Vertical	Pass
243.832	-73.04	-2.50	-25.0	-48.04	64.30	Vertical	Vertical	Pass
1021.495	-52.86	-3.06	-25.0	-27.86	185.90	Vertical	Vertical	Pass
2502.124	-13.90	2.58	-25.0	11.10	155.30	Vertical	Vertical	N.A
2636.591	-47.21	1.25	-25.0	-22.21	211.80	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.03.07

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8199.700	-56.89	19.21	-13.0	-43.89	167.50	Vertical	Vertical	Pass
9417.396	-54.74	19.71	-13.0	-41.74	56.00	Vertical	Vertical	Pass
10146.213	-50.49	23.65	-13.0	-37.49	242.90	Vertical	Vertical	Pass
11180.955	-49.66	23.08	-13.0	-36.66	200.00	Vertical	Vertical	Pass
12446.638	-47.67	25.01	-13.0	-34.67	83.30	Vertical	Vertical	Pass
14129.218	-45.29	29.00	-13.0	-32.29	269.70	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.23.33

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

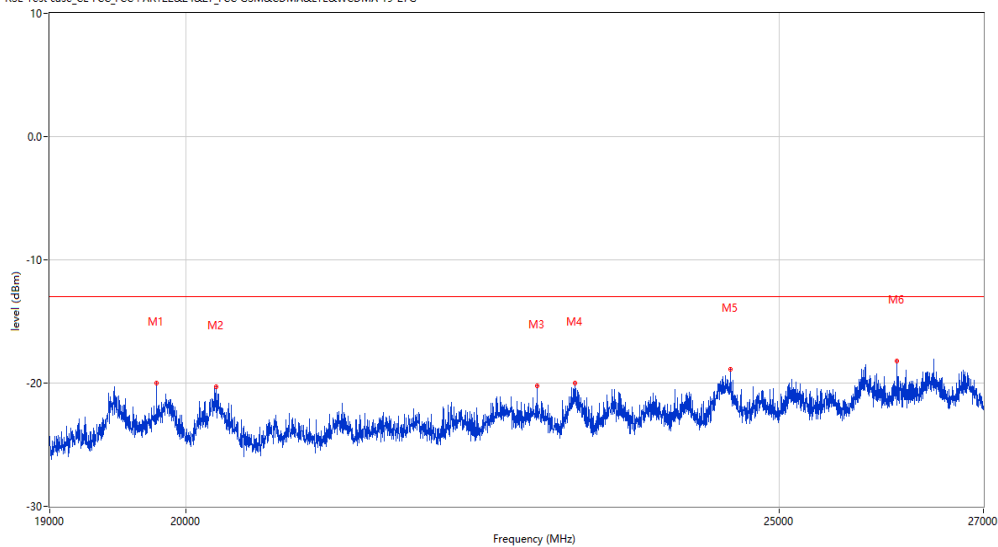

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19779.805	-20.02	22.36	-13.0	-7.02	299.10	Vertical	Vertical	Pass
20227.693	-20.29	22.62	-13.0	-7.29	180.10	Vertical	Vertical	Pass
22823.044	-20.20	24.14	-13.0	-7.20	331.90	Vertical	Vertical	Pass
23150.962	-20.02	24.33	-13.0	-7.02	81.20	Vertical	Vertical	Pass
24548.613	-18.91	25.14	-13.0	-5.91	54.00	Vertical	Vertical	Pass
26134.216	-18.24	26.07	-13.0	-5.24	317.40	Vertical	Vertical	Pass

LTE-B7-20-MCH-V-TX

Test result

Project Number: Test

Test Time: 2021-01-13_16.42.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC PART 27_2535_LTE B7



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
72.669	-72.53	-17.62	-25.0	-47.53	38.80	Vertical	Vertical	Pass
141.765	-72.42	-14.27	-25.0	-47.42	213.90	Vertical	Vertical	Pass
239.468	-72.39	-1.73	-25.0	-47.39	95.00	Vertical	Vertical	Pass
1053.987	-52.78	-4.20	-25.0	-27.78	162.90	Vertical	Vertical	Pass
2543.114	-14.83	1.58	-25.0	10.17	92.00	Vertical	Vertical	N.A
2647.588	-49.54	1.36	-25.0	-24.54	214.00	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.04.52

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8205.699	-56.58	19.15	-13.0	-43.58	12.70	Vertical	Vertical	Pass
10119.220	-49.91	24.16	-13.0	-36.91	175.70	Vertical	Vertical	Pass
11870.782	-48.94	25.39	-13.0	-35.94	286.20	Vertical	Vertical	Pass
13208.448	-48.34	25.02	-13.0	-35.34	325.00	Vertical	Vertical	Pass
14126.218	-45.23	29.02	-13.0	-32.23	181.60	Vertical	Vertical	Pass
16669.583	-49.76	22.70	-13.0	-36.76	33.50	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.25.04

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

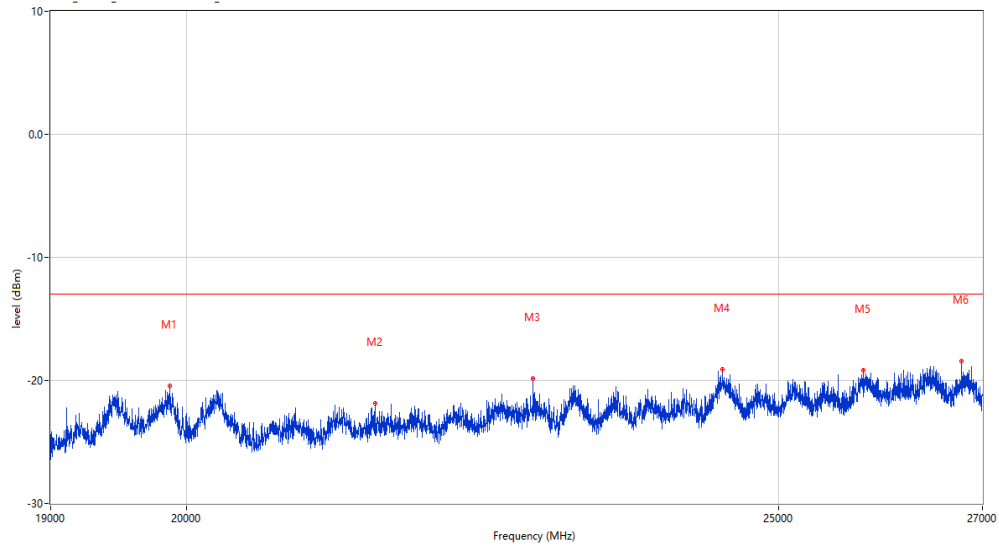

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19869.783	-20.42	22.42	-13.0	-7.42	346.60	Vertical	Vertical	Pass
21471.382	-21.86	23.35	-13.0	-8.86	62.40	Vertical	Vertical	Pass
22791.052	-19.82	24.12	-13.0	-6.82	220.40	Vertical	Vertical	Pass
24476.631	-19.11	25.10	-13.0	-6.11	340.60	Vertical	Vertical	Pass
25812.297	-19.19	25.88	-13.0	-6.19	286.30	Vertical	Vertical	Pass
26788.053	-18.45	26.45	-13.0	-5.45	340.60	Vertical	Vertical	Pass

LTE-B7-20-HCH-V-TX

Test result

Project Number: Test

Test Time: 2021-01-13_16.38.53

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC PART 27_2535_LTE B7

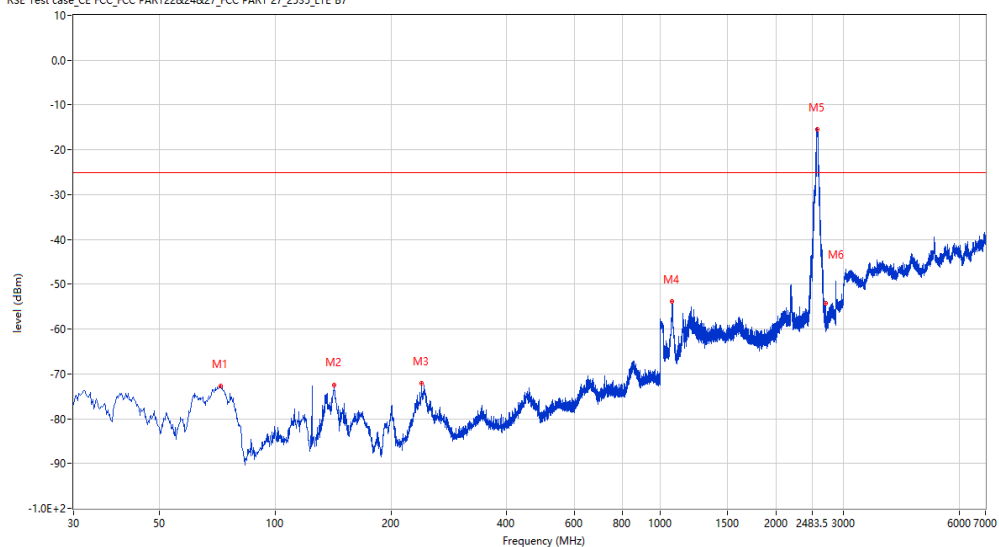

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
72.184	-72.78	-17.43	-25.0	-47.78	74.50	Vertical	Vertical	Pass
142.492	-72.49	-14.34	-25.0	-47.49	211.90	Vertical	Vertical	Pass
239.953	-72.15	-1.54	-25.0	-47.15	248.00	Vertical	Vertical	Pass
1075.981	-53.92	-4.46	-25.0	-28.92	232.60	Vertical	Vertical	Pass
2556.111	-15.42	1.33	-25.0	9.58	184.90	Vertical	Vertical	N.A
2688.078	-54.33	1.18	-25.0	-29.33	283.00	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_16.59.47

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8220.695	-57.33	18.60	-13.0	-44.33	239.70	Vertical	Vertical	Pass
9438.390	-55.67	19.38	-13.0	-42.67	239.70	Vertical	Vertical	Pass
10128.218	-49.57	23.99	-13.0	-36.57	155.30	Vertical	Vertical	Pass
11489.878	-49.22	24.48	-13.0	-36.22	179.50	Vertical	Vertical	Pass
12506.623	-47.86	25.19	-13.0	-34.86	233.70	Vertical	Vertical	Pass
14096.226	-44.94	29.04	-13.0	-31.94	170.20	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-13_17.30.51

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

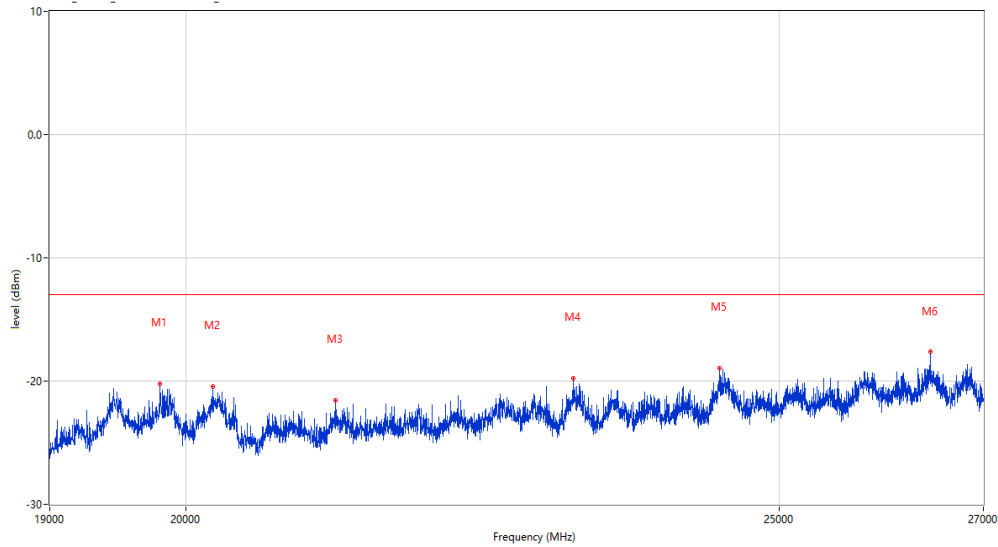

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19805.799	-20.25	22.38	-13.0	-7.25	177.70	Vertical	Vertical	Pass
20201.700	-20.48	22.61	-13.0	-7.48	67.60	Vertical	Vertical	Pass
21159.460	-21.53	23.17	-13.0	-8.53	165.60	Vertical	Vertical	Pass
23136.966	-19.76	24.32	-13.0	-6.76	7.60	Vertical	Vertical	Pass
24446.638	-18.96	25.08	-13.0	-5.96	177.70	Vertical	Vertical	Pass
26464.134	-17.61	26.26	-13.0	-4.61	246.80	Vertical	Vertical	Pass

LTE-B41-20-LCH-H-TX

Test result

Project Number: Test

Test Time: 202012-30_17.49.55

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC LTE B41



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
240.680	-65.58	-1.69	-25.0	-40.58	175.70	Horizontal	Vertical	Pass
452.572	-71.82	-0.92	-25.0	-46.82	232.30	Horizontal	Vertical	Pass
852.839	-64.32	7.40	-25.0	-39.32	226.70	Horizontal	Vertical	Pass
1201.450	-51.19	3.83	-25.0	-26.19	112.90	Horizontal	Vertical	Pass
2488.628	-18.30	7.35	-25.0	6.70	134.50	Horizontal	Vertical	N.A
5532.367	-41.46	11.68	-25.0	-16.46	157.30	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_17.16.57

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

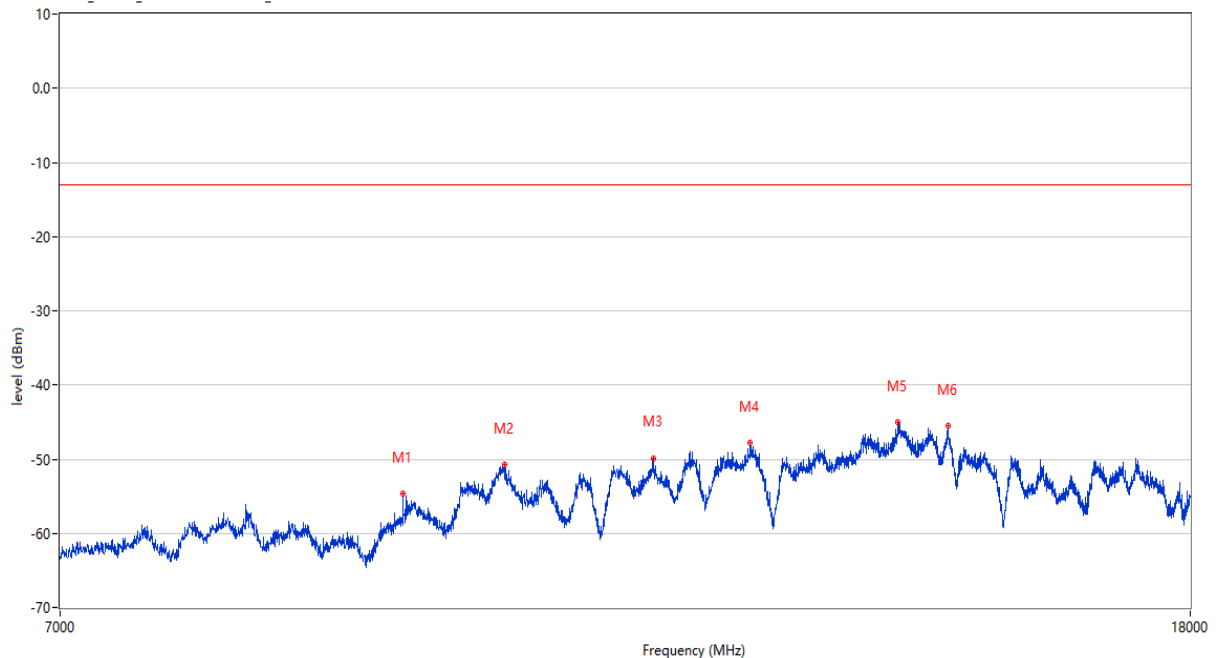

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9323.169	-54.68	18.23	-13.0	-41.68	191.70	Horizontal	Vertical	Pass
10145.214	-50.78	23.67	-13.0	-37.78	89.80	Horizontal	Vertical	Pass
11489.628	-49.90	24.48	-13.0	-36.90	47.70	Horizontal	Vertical	Pass
12457.386	-47.86	25.27	-13.0	-34.86	95.00	Horizontal	Vertical	Pass
14101.475	-45.04	29.16	-13.0	-32.04	47.70	Horizontal	Vertical	Pass
14700.825	-45.59	28.09	-13.0	-32.59	52.90	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-12_19.58.47

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

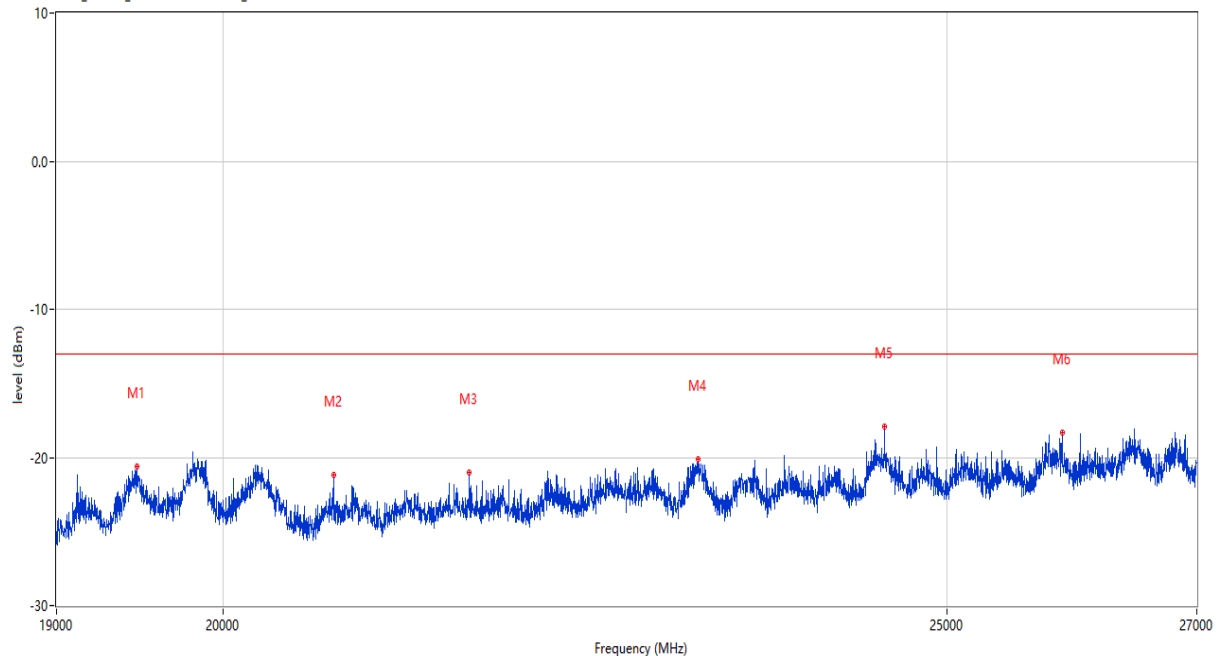

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19477.881	-20.63	22.19	-13.0	-7.63	53.90	Horizontal	Vertical	Pass
20693.577	-21.20	22.90	-13.0	-8.20	326.60	Horizontal	Vertical	Pass
21577.356	-21.02	23.41	-13.0	-8.02	133.40	Horizontal	Vertical	Pass
23156.961	-20.12	24.33	-13.0	-7.12	287.10	Horizontal	Vertical	Pass
24522.619	-17.90	25.13	-13.0	-4.90	219.70	Horizontal	Vertical	Pass
25902.274	-18.36	25.93	-13.0	-5.36	210.30	Horizontal	Vertical	Pass

LTE-B41-20-MCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_17.46.23

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC LTE B41

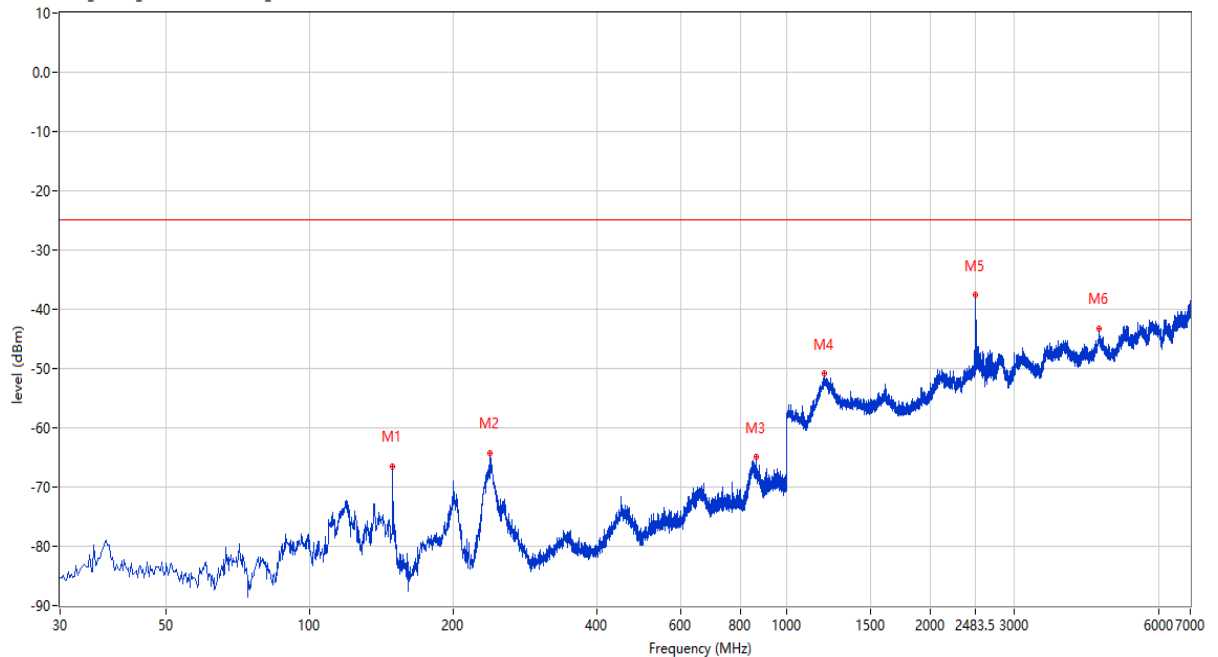

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
149.280	-66.43	-14.61	-25.0	-41.43	288.10	Horizontal	Vertical	Pass
239.225	-64.24	-1.83	-25.0	-39.24	175.00	Horizontal	Vertical	Pass
860.597	-64.91	7.07	-25.0	-39.91	142.60	Horizontal	Vertical	Pass
1196.951	-50.84	3.64	-25.0	-25.84	360.00	Horizontal	Vertical	Pass
2480.630	-37.65	6.22	-25.0	-12.65	134.60	Horizontal	Vertical	Pass
4508.623	-43.25	11.30	-25.0	-18.25	267.80	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_17.19.58

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8195.951	-57.20	19.10	-13.0	-44.20	175.70	Horizontal	Vertical	Pass
10128.718	-50.33	23.98	-13.0	-37.33	254.60	Horizontal	Vertical	Pass
10527.368	-52.35	21.82	-13.0	-39.35	48.80	Horizontal	Vertical	Pass
11209.198	-50.11	22.94	-13.0	-37.11	15.70	Horizontal	Vertical	Pass
11888.278	-48.33	25.46	-13.0	-35.33	57.40	Horizontal	Vertical	Pass
14128.968	-44.86	29.00	-13.0	-31.86	204.00	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-12_19.56.05

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

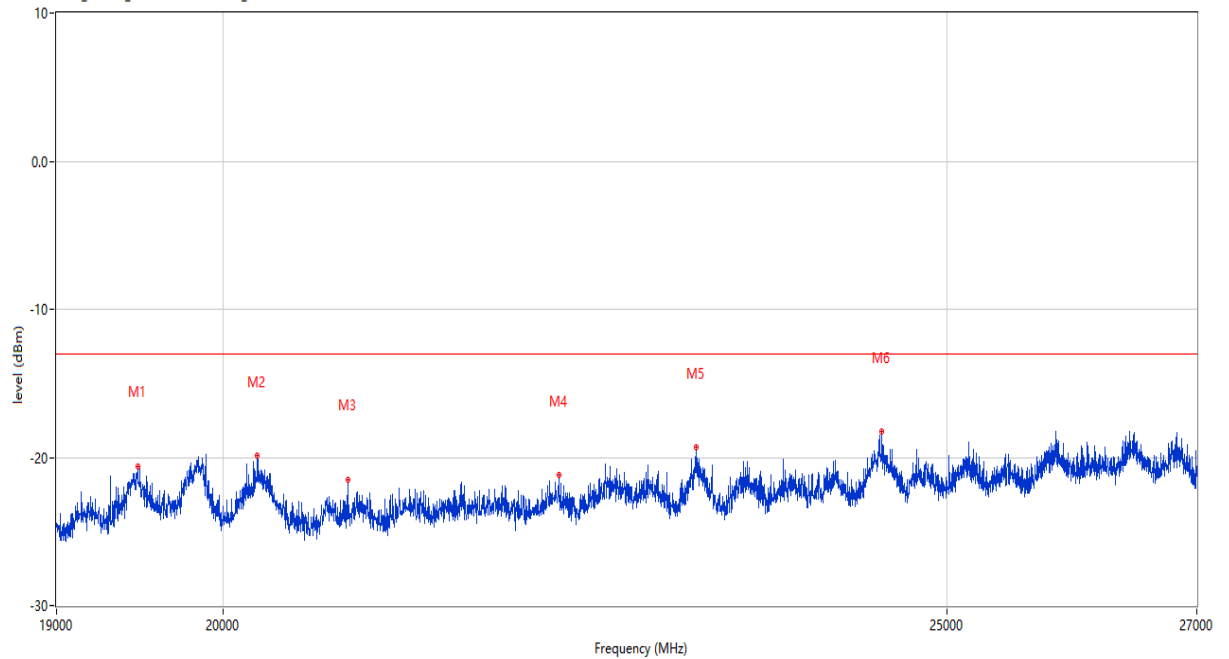

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19481.880	-20.58	22.19	-13.0	-7.58	251.50	Horizontal	Vertical	Pass
20213.697	-19.90	22.62	-13.0	-6.90	316.50	Horizontal	Vertical	Pass
20783.554	-21.48	22.95	-13.0	-8.48	188.20	Horizontal	Vertical	Pass
22179.205	-21.17	23.76	-13.0	-8.17	333.10	Horizontal	Vertical	Pass
23136.966	-19.32	24.32	-13.0	-6.32	303.40	Horizontal	Vertical	Pass
24500.625	-18.25	25.11	-13.0	-5.25	342.70	Horizontal	Vertical	Pass

LTE-B41-20-HCH-H-TX

Test result

Project Number: Test

Test Time: 2020-12-30_17.42.57

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC LTE B41

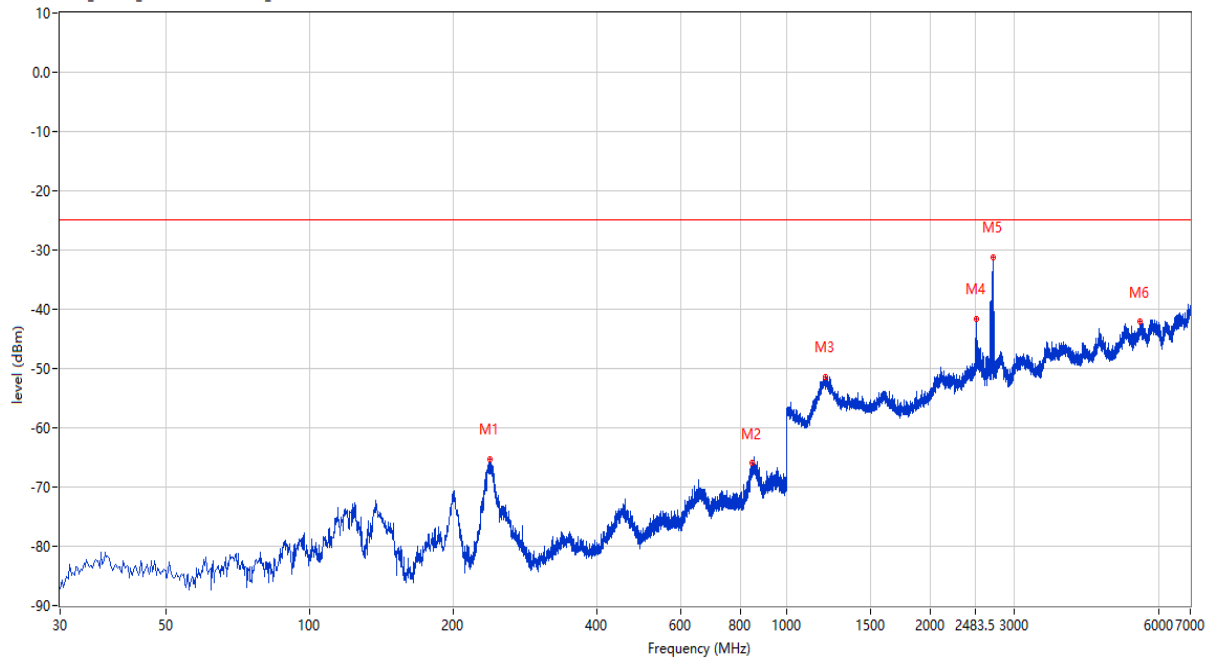

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
239.225	-65.41	-1.83	-25.0	-40.41	173.80	Horizontal	Vertical	Pass
845.081	-66.00	6.94	-25.0	-41.00	30.20	Horizontal	Vertical	Pass
1202.949	-51.50	3.77	-25.0	-26.50	319.90	Horizontal	Vertical	Pass
2488.628	-41.54	7.35	-25.0	-16.54	131.60	Horizontal	Vertical	Pass
2707.073	-31.20	5.72	-25.0	-6.20	96.20	Horizontal	Vertical	Pass
5487.378	-42.07	11.75	-25.0	-17.07	93.30	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_17.18.15

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

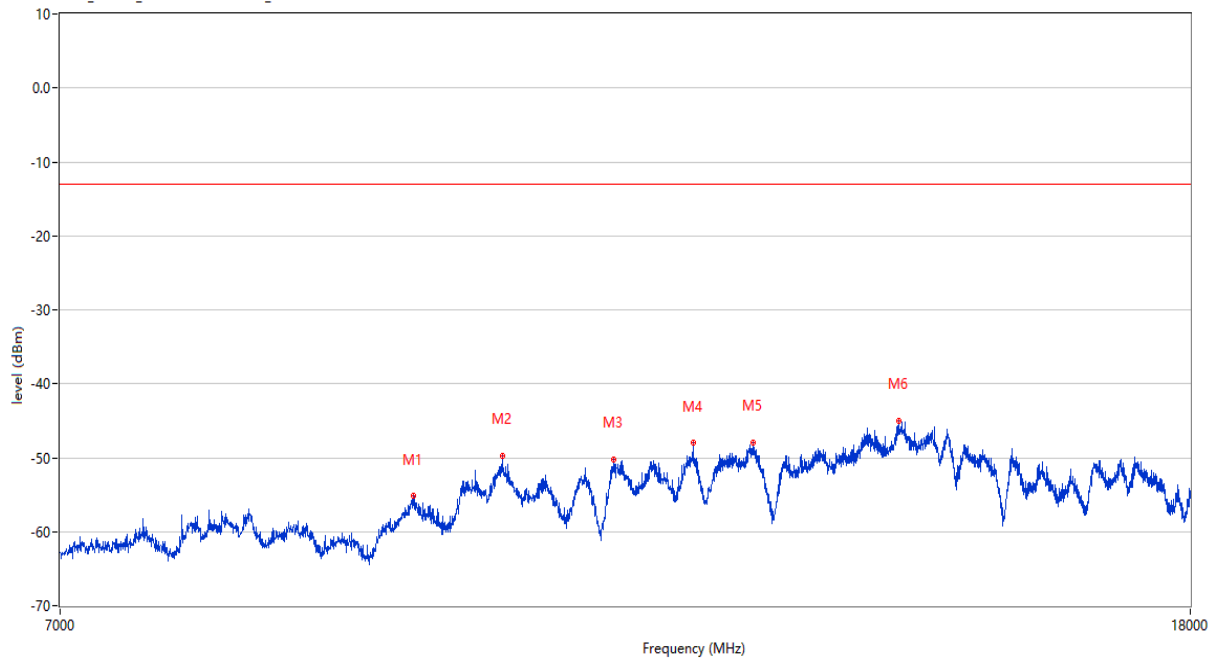

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9402.899	-55.19	19.96	-13.0	-42.19	42.50	Horizontal	Vertical	Pass
10131.467	-49.72	23.93	-13.0	-36.72	79.30	Horizontal	Vertical	Pass
11112.972	-50.21	23.21	-13.0	-37.21	194.30	Horizontal	Vertical	Pass
11880.030	-48.03	25.43	-13.0	-35.03	239.30	Horizontal	Vertical	Pass
12495.876	-47.95	25.37	-13.0	-34.95	359.20	Horizontal	Vertical	Pass
14104.224	-44.98	29.14	-13.0	-31.98	208.40	Horizontal	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-12_19.52.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

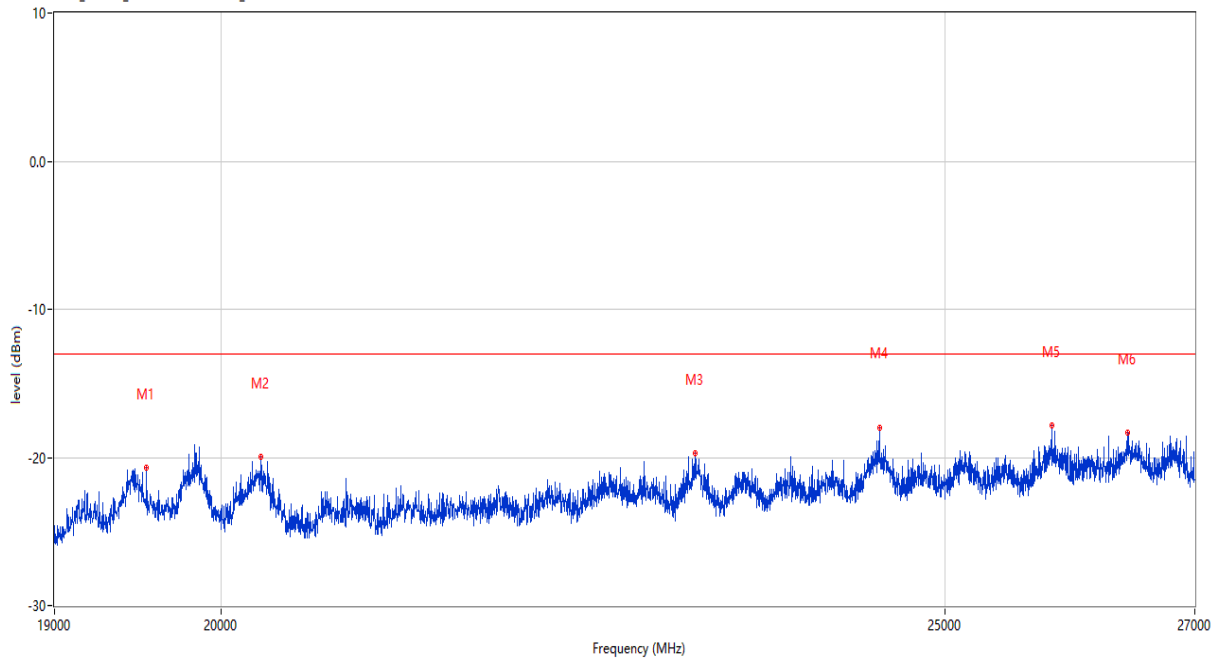

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19545.864	-20.71	22.23	-13.0	-7.71	232.90	Horizontal	Vertical	Pass
20245.689	-20.00	22.64	-13.0	-7.00	345.30	Horizontal	Vertical	Pass
23146.963	-19.75	24.33	-13.0	-6.75	165.20	Horizontal	Vertical	Pass
24498.625	-17.98	25.11	-13.0	-4.98	12.30	Horizontal	Vertical	Pass
25834.291	-17.83	25.89	-13.0	-4.83	357.40	Horizontal	Vertical	Pass
26444.139	-18.31	26.25	-13.0	-5.31	23.40	Horizontal	Vertical	Pass

LTE-B41-20-LCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_17.33.30

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC LTE B41



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
235.346	-72.84	-3.37	-25.0	-47.84	20.10	Vertical	Vertical	Pass
846.536	-64.19	7.11	-25.0	-39.19	295.90	Vertical	Vertical	Pass
1201.450	-50.59	3.83	-25.0	-25.59	80.60	Vertical	Vertical	Pass
2490.127	-18.40	9.05	-25.0	6.60	347.00	Vertical	Vertical	N.A
3121.970	-46.22	7.12	-25.0	-21.22	124.60	Vertical	Vertical	Pass
4993.502	-41.52	10.25	-25.0	-16.52	34.20	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_16.55.09

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G

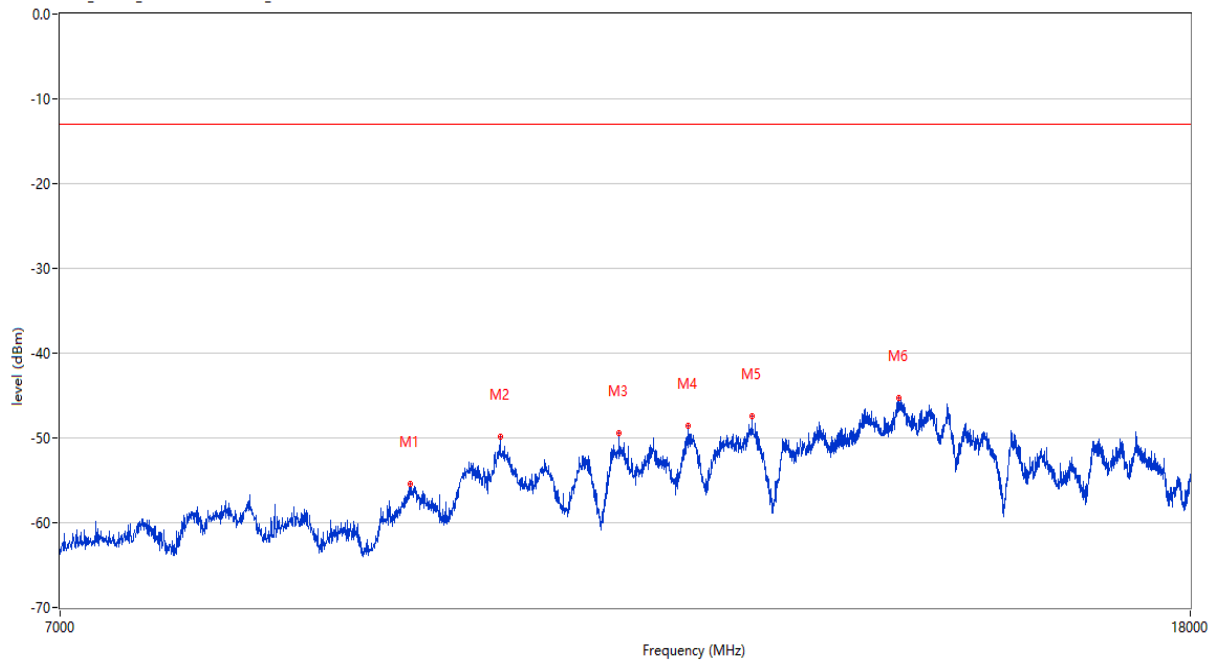

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9383.654	-55.48	19.66	-13.0	-42.48	69.60	Vertical	Vertical	Pass
10109.473	-49.90	24.26	-13.0	-36.90	164.80	Vertical	Vertical	Pass
11167.958	-49.44	23.10	-13.0	-36.44	156.30	Vertical	Vertical	Pass
11833.292	-48.59	24.70	-13.0	-35.59	133.90	Vertical	Vertical	Pass
12482.129	-47.36	25.42	-13.0	-34.36	309.50	Vertical	Vertical	Pass
14109.723	-45.28	29.11	-13.0	-32.28	209.80	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-12_20.03.40

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

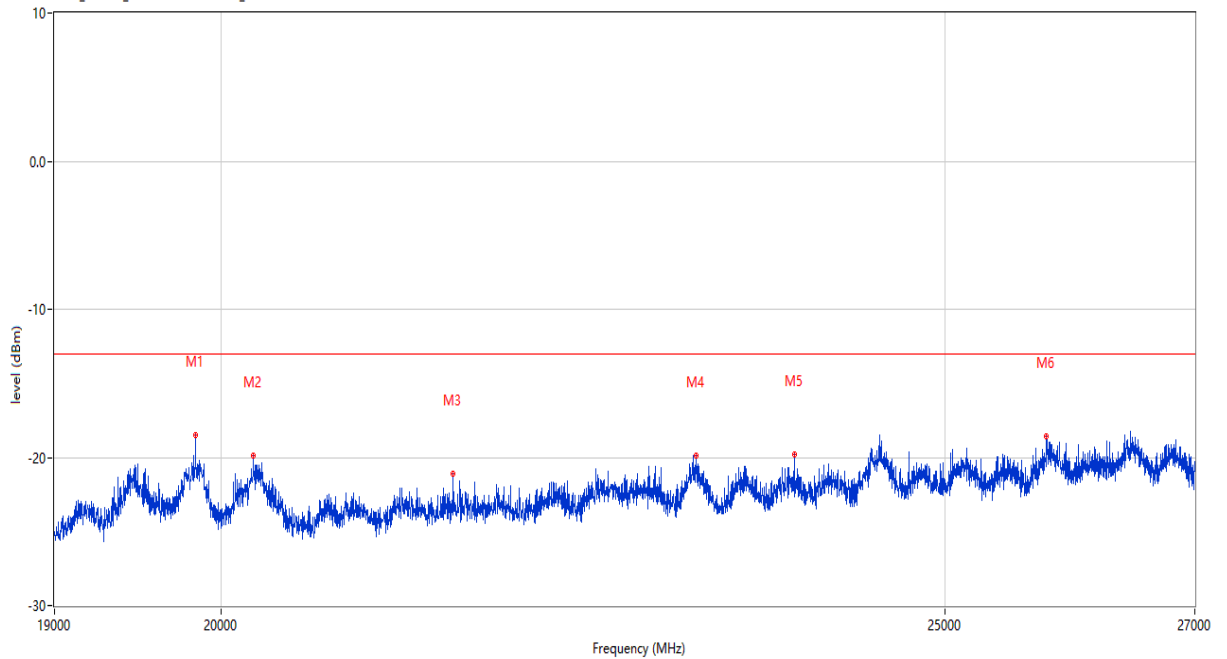

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19843.789	-18.51	22.40	-13.0	-5.51	122.20	Vertical	Vertical	Pass
20199.700	-19.86	22.61	-13.0	-6.86	184.30	Vertical	Vertical	Pass
21483.379	-21.08	23.36	-13.0	-8.08	357.60	Vertical	Vertical	Pass
23156.961	-19.88	24.33	-13.0	-6.88	235.40	Vertical	Vertical	Pass
23864.784	-19.81	24.74	-13.0	-6.81	197.60	Vertical	Vertical	Pass
25790.302	-18.57	25.86	-13.0	-5.57	273.50	Vertical	Vertical	Pass

LTE-B41-20-MCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_17.26.23

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC LTE B41



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
241.892	-71.54	-2.00	-25.0	-46.54	20.90	Vertical	Vertical	Pass
447.238	-72.09	-1.24	-25.0	-47.09	85.60	Vertical	Vertical	Pass
848.718	-65.30	7.36	-25.0	-40.30	55.90	Vertical	Vertical	Pass
1199.450	-50.50	3.84	-25.0	-25.50	97.00	Vertical	Vertical	Pass
2059.235	-50.44	3.53	-25.0	-25.44	27.10	Vertical	Vertical	Pass
2487.628	-40.01	7.00	-25.0	-15.01	27.10	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-12_19.45.04

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8034.741	-57.82	18.14	-13.0	-44.82	213.60	Vertical	Vertical	Pass
9405.399	-55.48	19.91	-13.0	-42.48	64.80	Vertical	Vertical	Pass
10119.220	-50.26	24.16	-13.0	-37.26	0.00	Vertical	Vertical	Pass
11813.797	-48.57	24.25	-13.0	-35.57	326.30	Vertical	Vertical	Pass
14153.212	-44.18	28.86	-13.0	-31.18	61.10	Vertical	Vertical	Pass
14696.076	-45.34	27.97	-13.0	-32.34	68.70	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-12_20.01.11

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

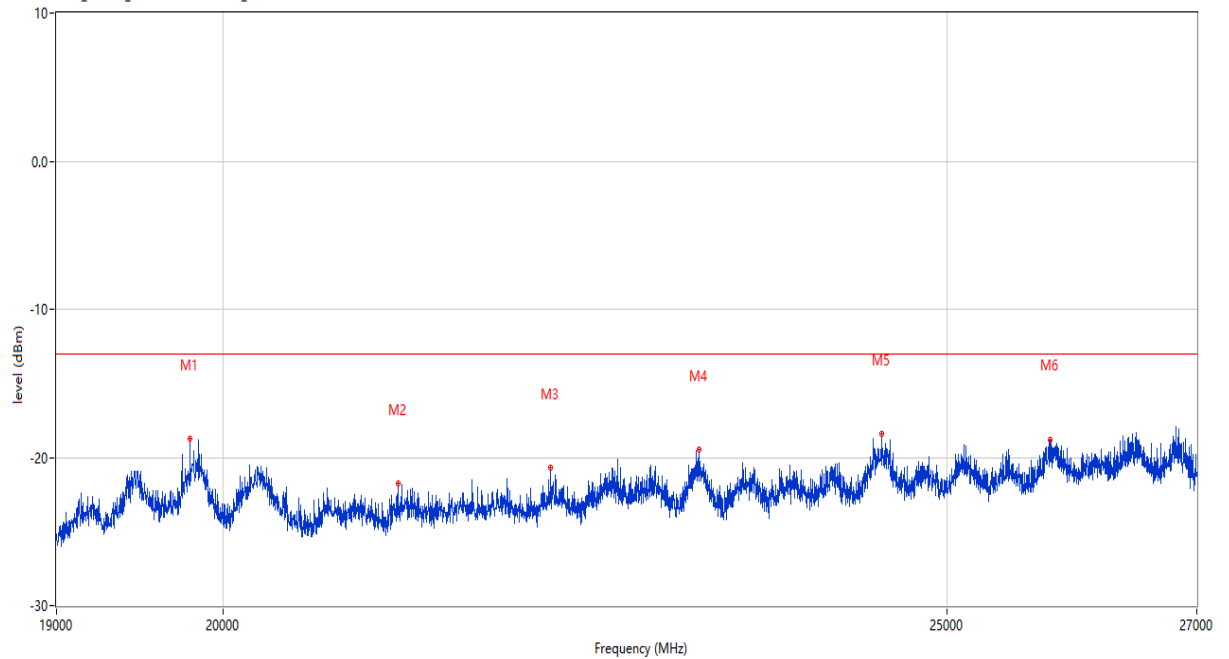

LTE-B41-20-HCH-V-TX

Test result

Project Number: Test

Test Time: 2020-12-30_17.37.22

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC LTE B41



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
239.710	-70.69	-1.64	-25.0	-45.69	131.40	Vertical	Vertical	Pass
456.693	-71.26	-1.11	-25.0	-46.26	204.30	Vertical	Vertical	Pass
1201.450	-51.00	3.83	-25.0	-26.00	179.60	Vertical	Vertical	Pass
2489.128	-42.31	7.72	-25.0	-17.31	0.10	Vertical	Vertical	Pass
2707.573	-25.60	5.81	-25.0	-0.60	313.60	Vertical	Vertical	Pass
4547.613	-43.51	10.32	-25.0	-18.51	225.00	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2020-12-30_16.57.18

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RSE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9397.401	-55.61	19.95	-13.0	-42.61	131.40	Vertical	Vertical	Pass
10101.225	-51.05	24.32	-13.0	-38.05	61.80	Vertical	Vertical	Pass
11126.718	-50.64	23.18	-13.0	-37.64	193.20	Vertical	Vertical	Pass
11882.779	-48.59	25.44	-13.0	-35.59	36.50	Vertical	Vertical	Pass
12479.380	-47.18	25.43	-13.0	-34.18	272.50	Vertical	Vertical	Pass
14150.962	-45.14	28.88	-13.0	-32.14	351.40	Vertical	Vertical	Pass

Test result

Project Number: Test

Test Time: 2021-01-12_20.06.01

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E20120008-01#01

RSE Test case_CE FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 19-27G

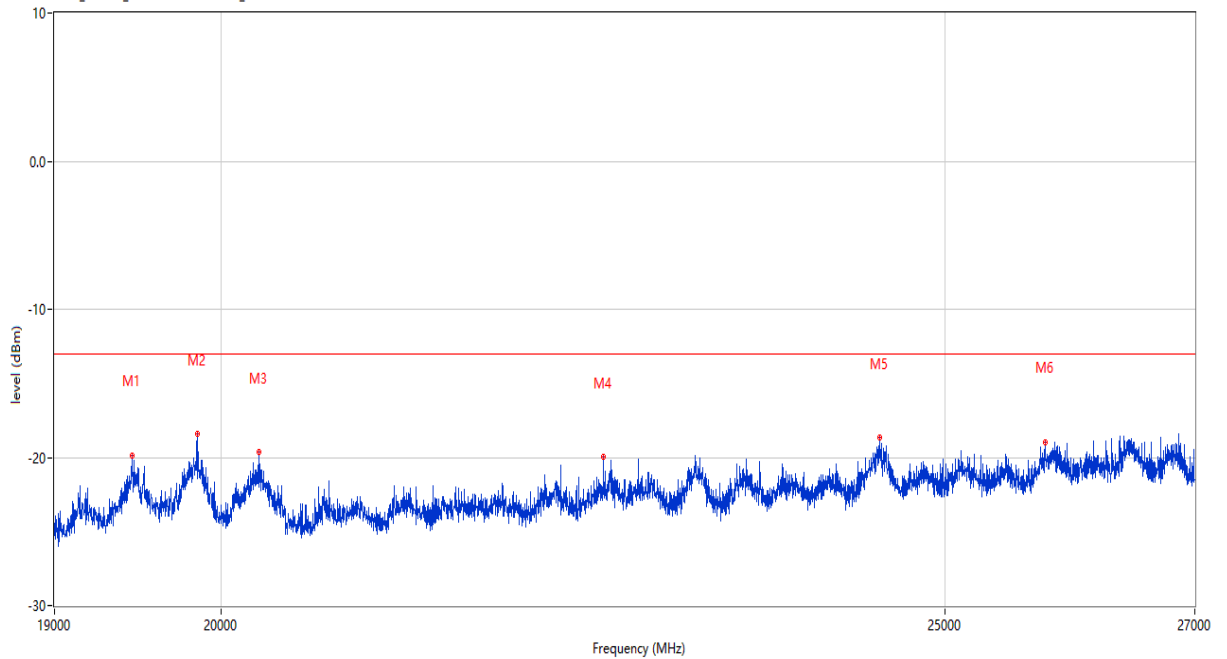

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
19461.885	-19.85	22.18	-13.0	-6.85	16.30	Vertical	Vertical	Pass
19857.786	-18.42	22.41	-13.0	-5.42	106.20	Vertical	Vertical	Pass
20233.692	-19.64	22.63	-13.0	-6.64	109.90	Vertical	Vertical	Pass
22501.125	-19.99	23.95	-13.0	-6.99	23.70	Vertical	Vertical	Pass
24498.625	-18.65	25.11	-13.0	-5.65	303.10	Vertical	Vertical	Pass
25784.304	-18.95	25.86	-13.0	-5.95	293.50	Vertical	Vertical	Pass