

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

WIFI2.4G- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-11-01_11.21.53

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

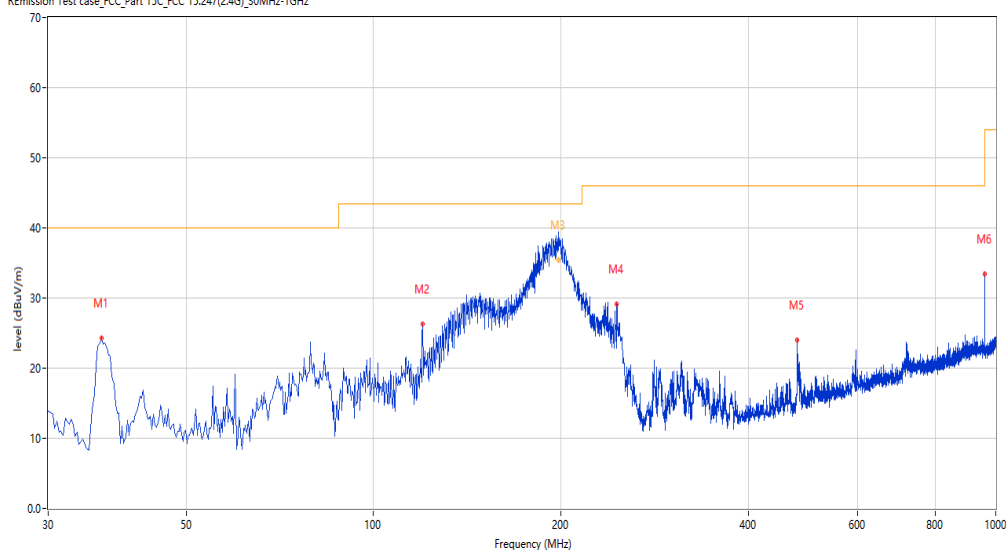

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.546	24.33	-27.53	40.0	-15.67	Peak	25.40	100	Horizontal	Pass
2	119.945	26.25	-28.31	43.5	-17.25	Peak	199.30	100	Horizontal	Pass
3	198.143	41.85	-26.08	43.5	-1.65	Peak	53.40	101	Horizontal	Pass
3*	198.143	35.40	-26.08	43.5	-8.10	QP	53.40	101	Horizontal	Pass
4	246.013	29.18	-24.81	46.0	-16.82	Peak	152.20	200	Horizontal	Pass
5	479.968	23.93	-19.26	46.0	-22.07	Peak	67.50	100	Horizontal	Pass
6	959.513	33.48	-9.31	46.0	-12.52	Peak	212.70	100	Horizontal	Pass

1-18G

WIFI2.4G-B-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-11-01_11.03.29

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

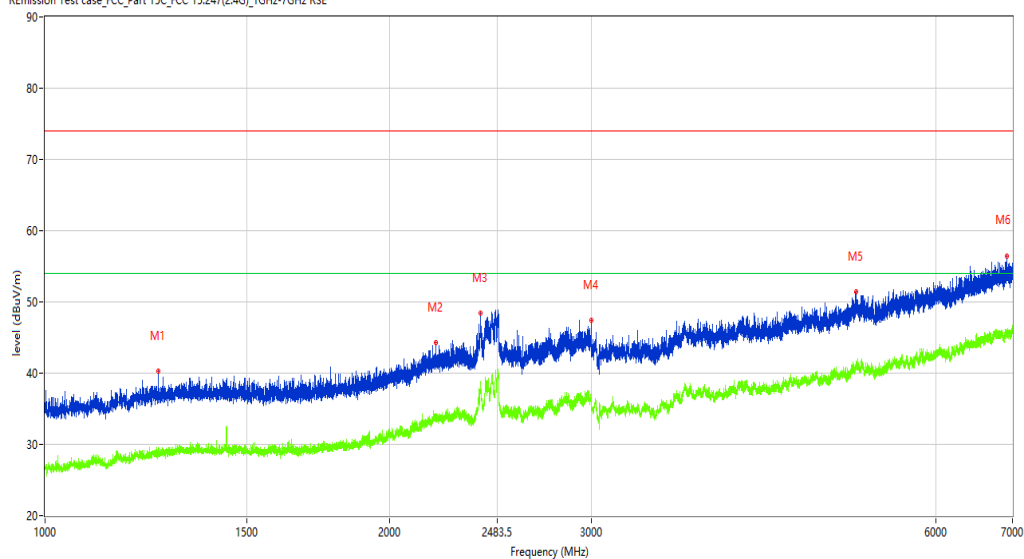

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1255.750	40.27	-13.23	74.0	-33.73	Peak	2.50	100	Horizontal	Pass
1**	1255.750	29.23	-13.23	54.0	-24.77	AV	2.50	100	Horizontal	Pass
2	2195.250	44.24	-7.87	74.0	-29.76	Peak	110.80	100	Horizontal	Pass
2**	2195.250	34.12	-7.87	54.0	-19.88	AV	110.80	100	Horizontal	Pass
3	2400.500	48.43	-4.05	74.0	-25.57	Peak	169.30	100	Horizontal	Pass
3**	2400.500	37.73	-4.05	54.0	-16.27	AV	169.30	100	Horizontal	Pass
4	2999.750	47.38	-3.04	74.0	-26.62	Peak	295.00	100	Horizontal	Pass
4**	2999.750	37.17	-3.04	54.0	-16.83	AV	295.00	100	Horizontal	Pass
5	5112.000	51.40	1.31	74.0	-22.60	Peak	57.50	100	Horizontal	Pass
5**	5112.000	40.92	1.31	54.0	-13.08	AV	57.50	100	Horizontal	Pass
6	6916.500	56.40	5.07	74.0	-17.60	Peak	102.50	100	Horizontal	Pass
6**	6916.500	45.76	5.07	54.0	-8.24	AV	102.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-11-01_11.05.28

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24

Hum.: 58%

Test Engineer: LS


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-E22090034-01#01

REmission Test case_FCC_Part 15C_FCC 15.249_7GHz-18GHz

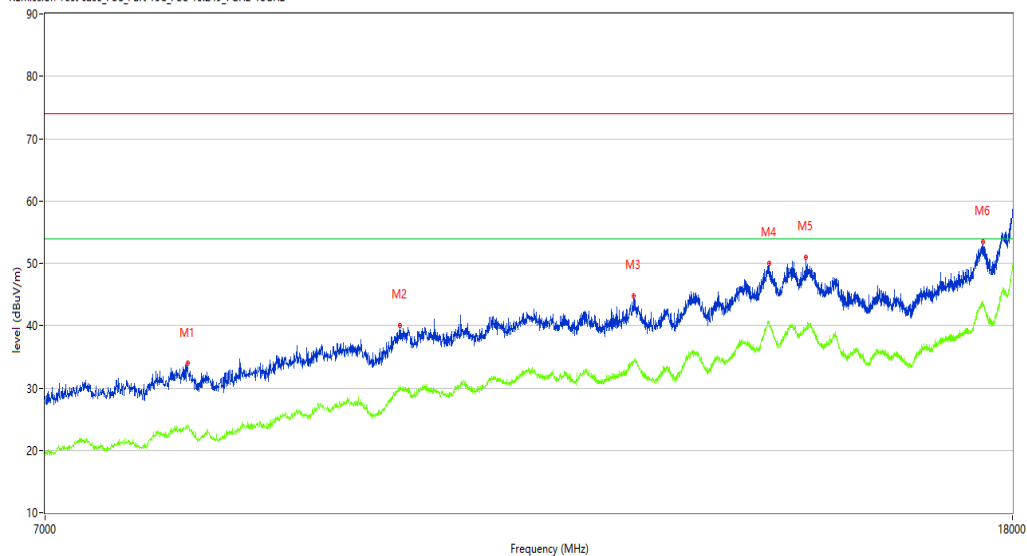

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8045.000	33.92	4.57	74.0	-40.08	Peak	106.90	100	Horizontal	Pass
1**	8045.000	23.78	4.57	54.0	-30.22	AV	106.90	100	Horizontal	Pass
2	9901.250	40.03	9.72	74.0	-33.97	Peak	0.00	100	Horizontal	Pass
2**	9901.250	30.40	9.72	54.0	-23.60	AV	0.00	100	Horizontal	Pass
3	12434.000	44.79	12.42	74.0	-29.21	Peak	166.80	100	Horizontal	Pass
3**	12434.000	34.10	12.42	54.0	-19.90	AV	166.80	100	Horizontal	Pass
4	14196.750	49.92	19.57	74.0	-24.08	Peak	94.60	100	Horizontal	Pass
4**	14196.750	40.36	19.57	54.0	-13.64	AV	94.60	100	Horizontal	Pass
5	14716.500	51.02	18.31	74.0	-22.98	Peak	82.30	100	Horizontal	Pass
5**	14716.500	39.53	18.31	54.0	-14.47	AV	82.30	100	Horizontal	Pass
6	17483.000	53.49	21.50	74.0	-20.51	Peak	243.10	100	Horizontal	Pass
6**	17483.000	43.98	21.50	54.0	-10.02	AV	243.10	100	Horizontal	Pass

WIFI2.4G-Bandedge -B-High channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2022-11-01_11.27.33

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#01

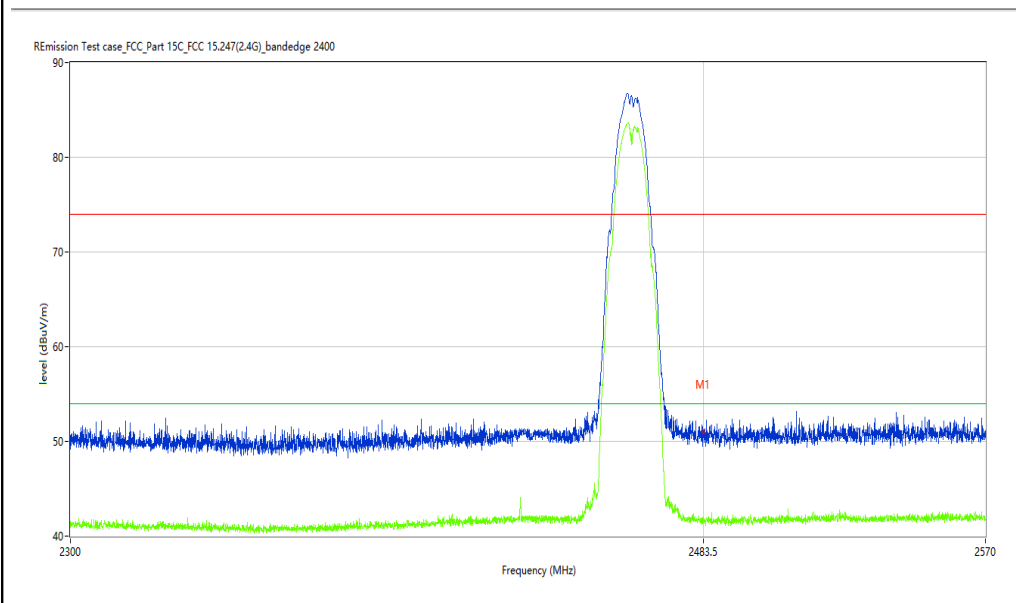

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.03	-9.51	74.0	-22.97	Peak	186.80	100	Horizontal	Pass
1**	2483.500	41.86	-9.51	54.0	-12.14	AV	186.80	100	Horizontal	Pass