

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →  
30M-1G  
BT-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2020-07-24\_10.31.30

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.0

Hum.: 58


Test Engineer: XCJ

Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RSE01-E20070010-01#05

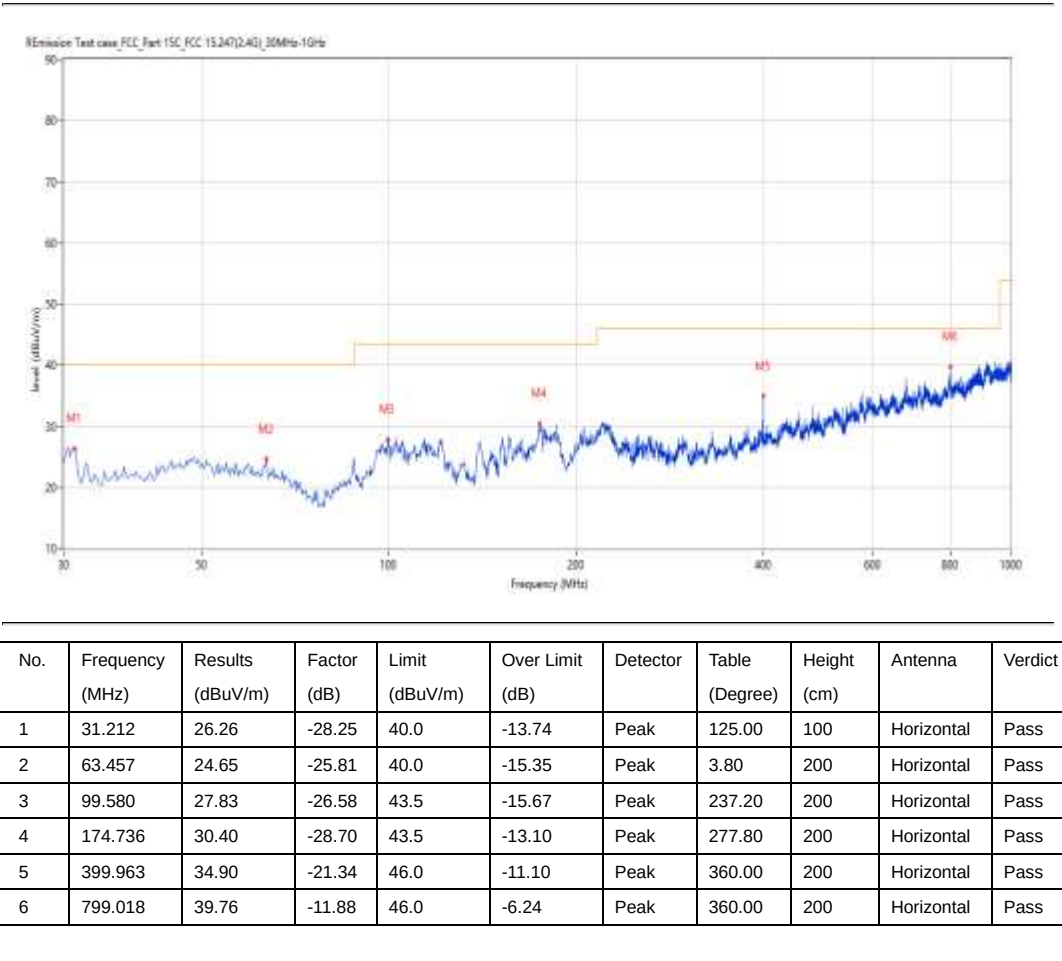

# Test result

Project Number: Certification

Test Time: 2020-07-24\_10.26.45

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

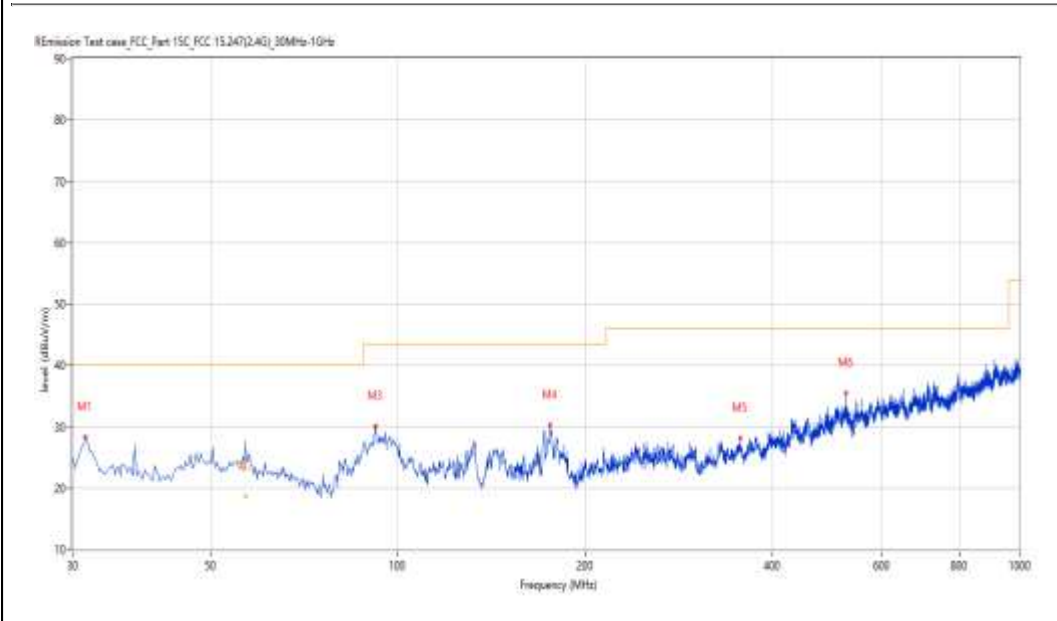

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 31.212          | 26.94            | -28.25      | 40.0           | -13.06          | Peak     | 98.60          | 100         | Vertical | Pass    |
| 2   | 56.935          | 27.36            | -25.56      | 40.0           | -12.64          | Peak     | 121.00         | 100         | Vertical | Pass    |
| 2*  | 56.935          | 18.68            | -25.56      | 40.0           | -21.32          | QP       | 121.00         | 100         | Vertical | Pass    |
| 3   | 92.064          | 30.08            | -27.53      | 43.5           | -13.42          | Peak     | 0.00           | 200         | Vertical | Pass    |
| 4   | 175.949         | 30.27            | -28.56      | 43.5           | -13.23          | Peak     | 209.90         | 100         | Vertical | Pass    |
| 5   | 355.596         | 28.18            | -22.27      | 46.0           | -17.82          | Peak     | 2.60           | 100         | Vertical | Pass    |
| 6   | 524.819         | 35.54            | -18.01      | 46.0           | -10.46          | Peak     | 129.90         | 100         | Vertical | Pass    |

1-18G

BT-Low channel-Horizontal-DH5-TX

## Test result

Project Number: Certification

Test Time: 2020-07-24\_11.01.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

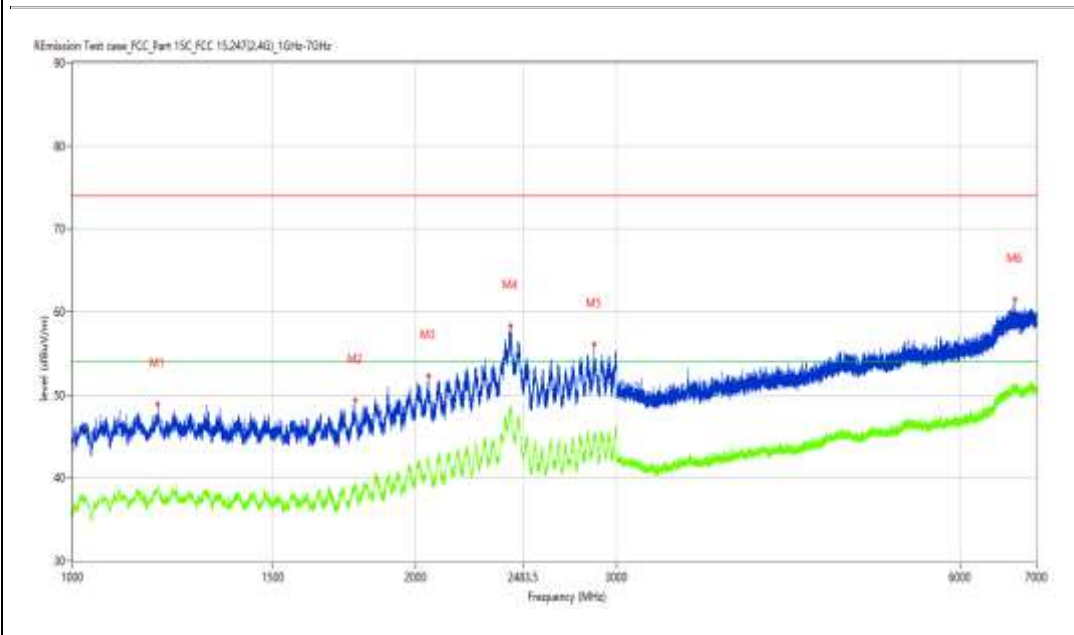

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1186.977        | 48.85            | -3.98       | 74.0           | -25.15          | Peak     | 172.00         | 100         | Horizontal | Pass    |
| 1** | 1186.977        | 39.38            | -3.98       | 54.0           | -14.62          | AV       | 172.00         | 100         | Horizontal | Pass    |
| 2   | 1769.404        | 49.38            | -4.71       | 74.0           | -24.62          | Peak     | 101.70         | 100         | Horizontal | Pass    |
| 2** | 1769.404        | 38.50            | -4.71       | 54.0           | -15.50          | AV       | 101.70         | 100         | Horizontal | Pass    |
| 3   | 2052.618        | 52.26            | -1.99       | 74.0           | -21.74          | Peak     | 332.00         | 100         | Horizontal | Pass    |
| 3** | 2052.618        | 41.96            | -1.99       | 54.0           | -12.04          | AV       | 332.00         | 100         | Horizontal | Pass    |
| 4   | 2422.572        | 58.30            | 4.49        | 74.0           | -15.70          | Peak     | 195.10         | 100         | Horizontal | Pass    |
| 4** | 2422.572        | 47.76            | 4.49        | 54.0           | -6.24           | AV       | 195.10         | 100         | Horizontal | Pass    |
| 5   | 2867.267        | 56.12            | 2.68        | 74.0           | -17.88          | Peak     | 345.40         | 100         | Horizontal | Pass    |
| 5** | 2867.267        | 45.02            | 2.68        | 54.0           | -8.98           | AV       | 345.40         | 100         | Horizontal | Pass    |
| 6   | 6700.037        | 61.50            | 5.97        | 74.0           | -12.50          | Peak     | 82.20          | 100         | Horizontal | Pass    |
| 6** | 6700.037        | 51.00            | 5.97        | 54.0           | -3.00           | AV       | 82.20          | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.53.32

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7211.697        | 31.44            | 2.85        | 74.0           | -42.56          | Peak     | 145.90         | 100         | Horizontal | Pass    |
| 1** | 7211.697        | 23.04            | 2.85        | 54.0           | -30.96          | AV       | 145.90         | 100         | Horizontal | Pass    |
| 2   | 9306.673        | 40.14            | 9.20        | 74.0           | -33.86          | Peak     | 187.20         | 100         | Horizontal | Pass    |
| 2** | 9306.673        | 29.45            | 9.20        | 54.0           | -24.55          | AV       | 187.20         | 100         | Horizontal | Pass    |
| 3   | 10527.368       | 41.66            | 9.91        | 74.0           | -32.34          | Peak     | 307.10         | 100         | Horizontal | Pass    |
| 3** | 10527.368       | 31.31            | 9.91        | 54.0           | -22.69          | AV       | 307.10         | 100         | Horizontal | Pass    |
| 4   | 13196.951       | 44.75            | 12.35       | 74.0           | -29.25          | Peak     | 0.80           | 100         | Horizontal | Pass    |
| 4** | 13196.951       | 34.70            | 12.35       | 54.0           | -19.30          | AV       | 0.80           | 100         | Horizontal | Pass    |
| 5   | 16482.379       | 53.98            | 20.46       | 74.0           | -20.02          | Peak     | 22.00          | 100         | Horizontal | Pass    |
| 5** | 16482.379       | 43.96            | 20.46       | 54.0           | -10.04          | AV       | 22.00          | 100         | Horizontal | Pass    |
| 6   | 17802.049       | 55.00            | 21.02       | 74.0           | -19.00          | Peak     | 228.90         | 100         | Horizontal | Pass    |
| 6** | 17802.049       | 45.31            | 21.02       | 54.0           | -8.69           | AV       | 228.90         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_10.53.47

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

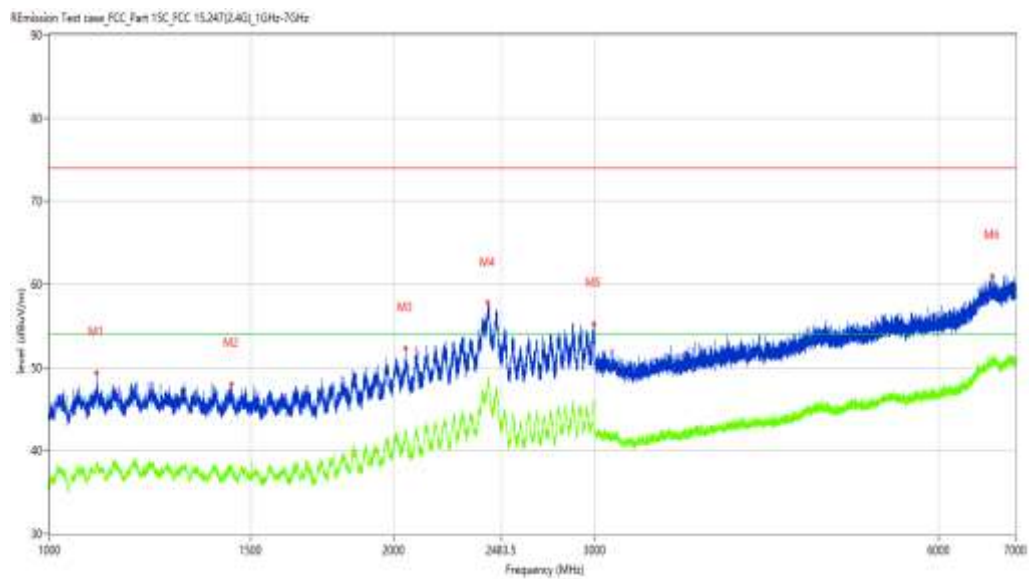

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1099.488        | 49.33            | -3.76       | 74.0           | -24.67          | Peak     | 192.80         | 100         | Vertical | Pass    |
| 1** | 1099.488        | 38.53            | -3.76       | 54.0           | -15.47          | AV       | 192.80         | 100         | Vertical | Pass    |
| 2   | 1443.445        | 48.05            | -4.89       | 74.0           | -25.95          | Peak     | 0.10           | 100         | Vertical | Pass    |
| 2** | 1443.445        | 37.73            | -4.89       | 54.0           | -16.27          | AV       | 0.10           | 100         | Vertical | Pass    |
| 3   | 2049.369        | 52.32            | -1.76       | 74.0           | -21.68          | Peak     | 78.90          | 100         | Vertical | Pass    |
| 3** | 2049.369        | 42.49            | -1.76       | 54.0           | -11.51          | AV       | 78.90          | 100         | Vertical | Pass    |
| 4   | 2416.823        | 57.75            | 4.72        | 74.0           | -16.25          | Peak     | 358.50         | 100         | Vertical | Pass    |
| 4** | 2416.823        | 47.90            | 4.72        | 54.0           | -6.10           | AV       | 358.50         | 100         | Vertical | Pass    |
| 5   | 2994.001        | 55.26            | 2.85        | 74.0           | -18.74          | Peak     | 0.00           | 100         | Vertical | Pass    |
| 5** | 2994.001        | 45.71            | 2.85        | 54.0           | -8.29           | AV       | 0.00           | 100         | Vertical | Pass    |
| 6   | 6681.040        | 60.99            | 5.75        | 74.0           | -13.01          | Peak     | 10.40          | 100         | Vertical | Pass    |
| 6** | 6681.040        | 51.10            | 5.75        | 54.0           | -2.90           | AV       | 10.40          | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.49.03

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7318.920        | 33.20            | 3.05        | 74.0           | -40.80          | Peak     | 47.50          | 100         | Vertical | Pass    |
| 1** | 7318.920        | 22.60            | 3.05        | 54.0           | -31.40          | AV       | 47.50          | 100         | Vertical | Pass    |
| 2   | 9141.715        | 38.61            | 7.72        | 74.0           | -35.39          | Peak     | 107.70         | 100         | Vertical | Pass    |
| 2** | 9141.715        | 28.09            | 7.72        | 54.0           | -25.91          | AV       | 107.70         | 100         | Vertical | Pass    |
| 3   | 10508.123       | 42.54            | 9.94        | 74.0           | -31.46          | Peak     | 246.10         | 100         | Vertical | Pass    |
| 3** | 10508.123       | 31.49            | 9.94        | 54.0           | -22.51          | AV       | 246.10         | 100         | Vertical | Pass    |
| 4   | 13238.190       | 44.73            | 12.34       | 74.0           | -29.27          | Peak     | 360.00         | 100         | Vertical | Pass    |
| 4** | 13238.190       | 34.22            | 12.34       | 54.0           | -19.78          | AV       | 360.00         | 100         | Vertical | Pass    |
| 5   | 15165.459       | 49.81            | 15.30       | 74.0           | -24.19          | Peak     | 172.80         | 100         | Vertical | Pass    |
| 5** | 15165.459       | 39.74            | 15.30       | 54.0           | -14.26          | AV       | 172.80         | 100         | Vertical | Pass    |
| 6   | 16479.630       | 53.83            | 20.40       | 74.0           | -20.17          | Peak     | 182.10         | 100         | Vertical | Pass    |
| 6** | 16479.630       | 43.59            | 20.40       | 54.0           | -10.41          | AV       | 182.10         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_13.14.49

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

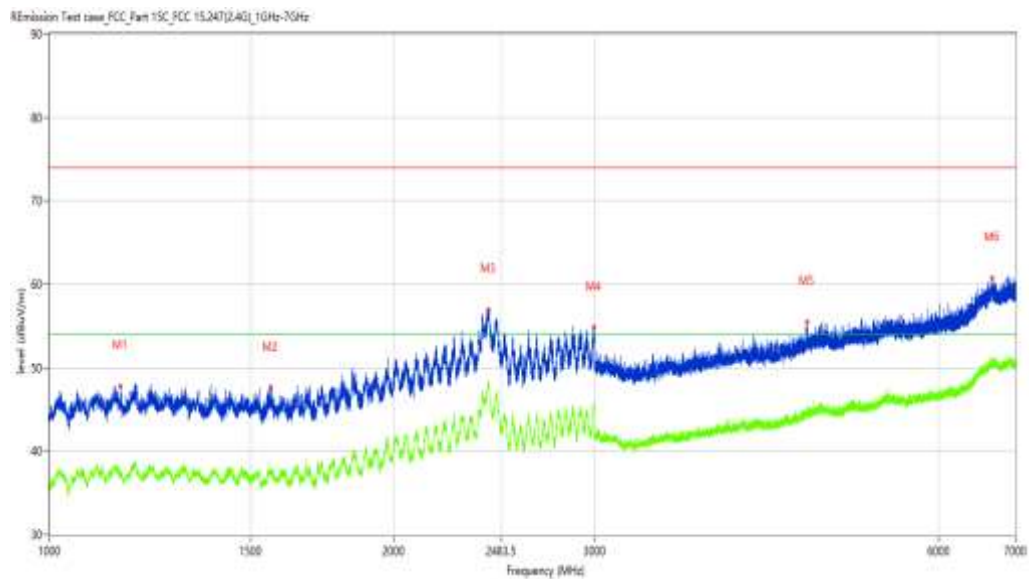

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1154.731        | 47.76            | -4.07       | 74.0           | -26.24          | Peak     | 16.80          | 100         | Horizontal | Pass    |
| 1** | 1154.731        | 37.35            | -4.07       | 54.0           | -16.65          | AV       | 16.80          | 100         | Horizontal | Pass    |
| 2   | 1561.180        | 47.59            | -5.36       | 74.0           | -26.41          | Peak     | 3.90           | 100         | Horizontal | Pass    |
| 2** | 1561.180        | 37.70            | -5.36       | 54.0           | -16.30          | AV       | 3.90           | 100         | Horizontal | Pass    |
| 3   | 2422.572        | 56.99            | 4.49        | 74.0           | -17.01          | Peak     | 226.70         | 100         | Horizontal | Pass    |
| 3** | 2422.572        | 47.73            | 4.49        | 54.0           | -6.27           | AV       | 226.70         | 100         | Horizontal | Pass    |
| 4   | 2994.001        | 54.80            | 2.85        | 74.0           | -19.20          | Peak     | 136.30         | 100         | Horizontal | Pass    |
| 4** | 2994.001        | 45.20            | 2.85        | 54.0           | -8.80           | AV       | 136.30         | 100         | Horizontal | Pass    |
| 5   | 4599.800        | 55.48            | 0.86        | 74.0           | -18.52          | Peak     | 221.30         | 100         | Horizontal | Pass    |
| 5** | 4599.800        | 44.74            | 0.86        | 54.0           | -9.26           | AV       | 221.30         | 100         | Horizontal | Pass    |
| 6   | 6680.540        | 60.70            | 5.75        | 74.0           | -13.30          | Peak     | 334.80         | 100         | Horizontal | Pass    |
| 6** | 6680.540        | 50.58            | 5.75        | 54.0           | -3.42           | AV       | 334.80         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11:55:01

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7164.959        | 30.79            | 2.57        | 74.0           | -43.21          | Peak     | 324.80         | 100         | Horizontal | Pass    |
| 1** | 7164.959        | 22.20            | 2.57        | 54.0           | -31.80          | AV       | 324.80         | 100         | Horizontal | Pass    |
| 2   | 8858.535        | 38.25            | 7.38        | 74.0           | -35.75          | Peak     | 320.40         | 100         | Horizontal | Pass    |
| 2** | 8858.535        | 27.99            | 7.38        | 54.0           | -26.01          | AV       | 320.40         | 100         | Horizontal | Pass    |
| 3   | 11071.732       | 43.41            | 10.80       | 74.0           | -30.59          | Peak     | 329.30         | 100         | Horizontal | Pass    |
| 3** | 11071.732       | 31.58            | 10.80       | 54.0           | -22.42          | AV       | 329.30         | 100         | Horizontal | Pass    |
| 4   | 13216.196       | 44.97            | 12.36       | 74.0           | -29.03          | Peak     | 169.00         | 100         | Horizontal | Pass    |
| 4** | 13216.196       | 34.55            | 12.36       | 54.0           | -19.45          | AV       | 169.00         | 100         | Horizontal | Pass    |
| 5   | 14524.869       | 51.03            | 17.01       | 74.0           | -22.97          | Peak     | 283.50         | 100         | Horizontal | Pass    |
| 5** | 14524.869       | 39.99            | 17.01       | 54.0           | -14.01          | AV       | 283.50         | 100         | Horizontal | Pass    |
| 6   | 16504.374       | 54.32            | 20.64       | 74.0           | -19.68          | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 6** | 16504.374       | 43.31            | 20.64       | 54.0           | -10.69          | AV       | 0.00           | 100         | Horizontal | Pass    |



# Test result

Project Number: Certification

Test Time: 2020-07-24\_13.12.42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

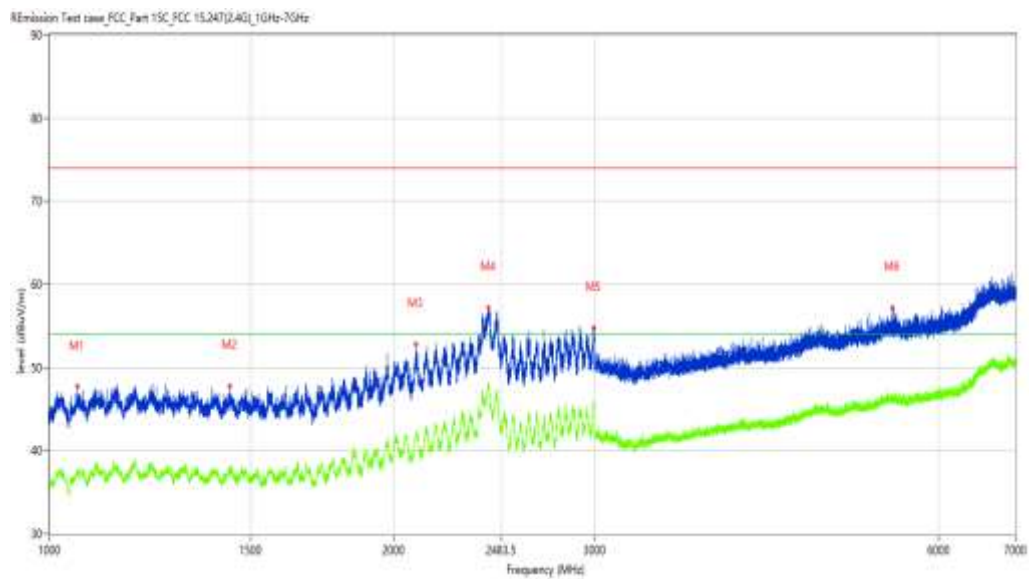

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1058.493        | 47.71            | -4.46       | 74.0           | -26.29          | Peak     | 84.50          | 100         | Vertical | Pass    |
| 1** | 1058.493        | 37.63            | -4.46       | 54.0           | -16.37          | AV       | 84.50          | 100         | Vertical | Pass    |
| 2   | 1437.945        | 47.79            | -5.22       | 74.0           | -26.21          | Peak     | 1.40           | 100         | Vertical | Pass    |
| 2** | 1437.945        | 37.84            | -5.22       | 54.0           | -16.16          | AV       | 1.40           | 100         | Vertical | Pass    |
| 3   | 2091.614        | 52.80            | -1.73       | 74.0           | -21.20          | Peak     | 292.20         | 100         | Vertical | Pass    |
| 3** | 2091.614        | 41.83            | -1.73       | 54.0           | -12.17          | AV       | 292.20         | 100         | Vertical | Pass    |
| 4   | 2420.822        | 57.20            | 4.56        | 74.0           | -16.80          | Peak     | 221.50         | 100         | Vertical | Pass    |
| 4** | 2420.822        | 48.00            | 4.56        | 54.0           | -6.00           | AV       | 221.50         | 100         | Vertical | Pass    |
| 5   | 2994.501        | 54.70            | 2.76        | 74.0           | -19.30          | Peak     | 4.90           | 100         | Vertical | Pass    |
| 5** | 2994.501        | 45.41            | 2.76        | 54.0           | -8.59           | AV       | 4.90           | 100         | Vertical | Pass    |
| 6   | 5467.192        | 57.17            | 1.66        | 74.0           | -16.83          | Peak     | 141.60         | 100         | Vertical | Pass    |
| 6** | 5467.192        | 46.31            | 1.66        | 54.0           | -7.69           | AV       | 141.60         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.50.30

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7580.105        | 33.82            | 3.42        | 74.0           | -40.18          | Peak     | 55.20          | 100         | Vertical | Pass    |
| 1** | 7580.105        | 23.82            | 3.42        | 54.0           | -30.18          | AV       | 55.20          | 100         | Vertical | Pass    |
| 2   | 9290.177        | 40.32            | 9.01        | 74.0           | -33.68          | Peak     | 0.30           | 100         | Vertical | Pass    |
| 2** | 9290.177        | 29.59            | 9.01        | 54.0           | -24.41          | AV       | 0.30           | 100         | Vertical | Pass    |
| 3   | 11159.710       | 43.19            | 10.81       | 74.0           | -30.81          | Peak     | 261.70         | 100         | Vertical | Pass    |
| 3** | 11159.710       | 32.70            | 10.81       | 54.0           | -21.30          | AV       | 261.70         | 100         | Vertical | Pass    |
| 4   | 13086.978       | 45.28            | 12.36       | 74.0           | -28.72          | Peak     | 169.80         | 100         | Vertical | Pass    |
| 4** | 13086.978       | 34.23            | 12.36       | 54.0           | -19.77          | AV       | 169.80         | 100         | Vertical | Pass    |
| 5   | 14508.373       | 50.65            | 17.07       | 74.0           | -23.35          | Peak     | 165.30         | 100         | Vertical | Pass    |
| 5** | 14508.373       | 40.26            | 17.07       | 54.0           | -13.74          | AV       | 165.30         | 100         | Vertical | Pass    |
| 6   | 16487.878       | 54.12            | 20.57       | 74.0           | -19.88          | Peak     | 22.40          | 100         | Vertical | Pass    |
| 6** | 16487.878       | 43.75            | 20.57       | 54.0           | -10.25          | AV       | 22.40          | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.04.20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

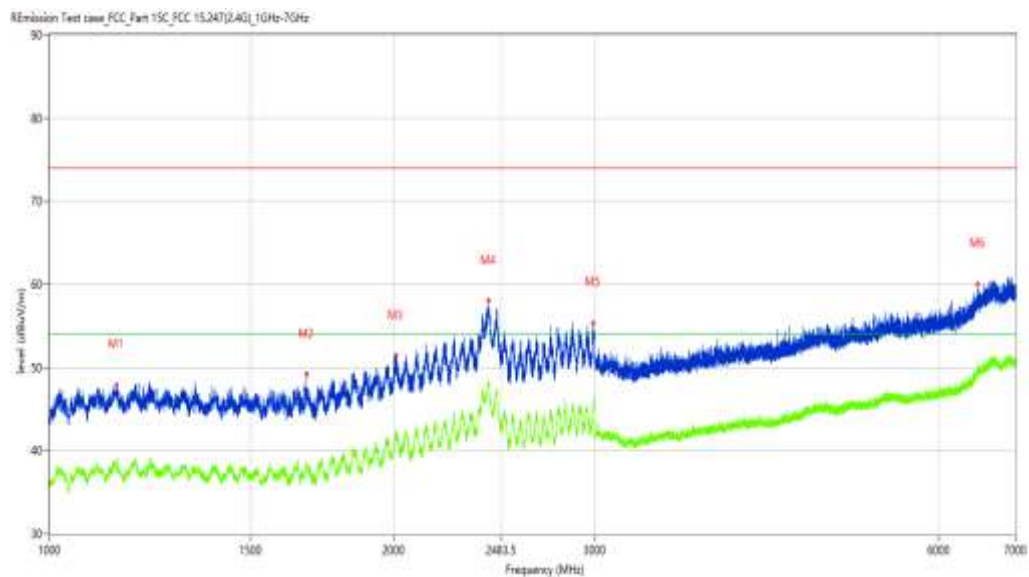

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1144.732        | 47.86            | -4.23       | 74.0           | -26.14          | Peak     | 288.80         | 100         | Horizontal | Pass    |
| 1** | 1144.732        | 37.88            | -4.23       | 54.0           | -16.12          | AV       | 288.80         | 100         | Horizontal | Pass    |
| 2   | 1678.665        | 49.18            | -4.66       | 74.0           | -24.82          | Peak     | 274.70         | 100         | Horizontal | Pass    |
| 2** | 1678.665        | 38.62            | -4.66       | 54.0           | -15.38          | AV       | 274.70         | 100         | Horizontal | Pass    |
| 3   | 2009.624        | 51.38            | -2.25       | 74.0           | -22.62          | Peak     | 81.80          | 100         | Horizontal | Pass    |
| 3** | 2009.624        | 41.74            | -2.25       | 54.0           | -12.26          | AV       | 81.80          | 100         | Horizontal | Pass    |
| 4   | 2422.322        | 57.99            | 4.50        | 74.0           | -16.01          | Peak     | 124.30         | 100         | Horizontal | Pass    |
| 4** | 2422.322        | 48.45            | 4.50        | 54.0           | -5.55           | AV       | 124.30         | 100         | Horizontal | Pass    |
| 5   | 2990.001        | 55.38            | 3.08        | 74.0           | -18.62          | Peak     | 265.70         | 100         | Horizontal | Pass    |
| 5** | 2990.001        | 45.80            | 3.08        | 54.0           | -8.20           | AV       | 265.70         | 100         | Horizontal | Pass    |
| 6   | 6488.564        | 59.98            | 4.75        | 74.0           | -14.02          | Peak     | 186.50         | 100         | Horizontal | Pass    |
| 6** | 6488.564        | 49.20            | 4.75        | 54.0           | -4.80           | AV       | 186.50         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.56.25

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7285.929        | 33.76            | 2.92        | 74.0           | -40.24          | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 1** | 7285.929        | 23.07            | 2.92        | 54.0           | -30.93          | AV       | 0.00           | 100         | Horizontal | Pass    |
| 2   | 9380.905        | 39.74            | 9.90        | 74.0           | -34.26          | Peak     | 238.20         | 100         | Horizontal | Pass    |
| 2** | 9380.905        | 29.37            | 9.90        | 54.0           | -24.63          | AV       | 238.20         | 100         | Horizontal | Pass    |
| 3   | 10849.038       | 41.99            | 11.22       | 74.0           | -32.01          | Peak     | 312.30         | 100         | Horizontal | Pass    |
| 3** | 10849.038       | 31.25            | 11.22       | 54.0           | -22.75          | AV       | 312.30         | 100         | Horizontal | Pass    |
| 4   | 13194.201       | 45.27            | 12.34       | 74.0           | -28.73          | Peak     | 289.60         | 100         | Horizontal | Pass    |
| 4** | 13194.201       | 34.92            | 12.34       | 54.0           | -19.08          | AV       | 289.60         | 100         | Horizontal | Pass    |
| 5   | 16509.873       | 53.87            | 20.42       | 74.0           | -20.13          | Peak     | 322.00         | 100         | Horizontal | Pass    |
| 5** | 16509.873       | 44.20            | 20.42       | 54.0           | -9.80           | AV       | 322.00         | 100         | Horizontal | Pass    |
| 6   | 17848.788       | 54.75            | 19.26       | 74.0           | -19.25          | Peak     | 358.10         | 100         | Horizontal | Pass    |
| 6** | 17848.788       | 43.33            | 19.26       | 54.0           | -10.67          | AV       | 358.10         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.06.31

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

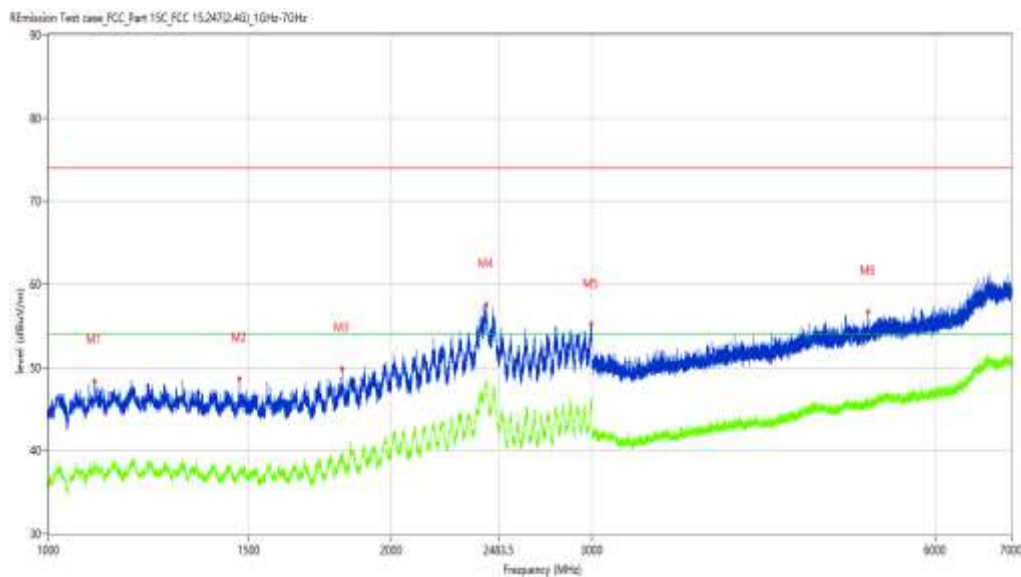

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1098.238        | 48.43            | -3.80       | 74.0           | -25.57          | Peak     | 233.40         | 100         | Vertical | Pass    |
| 1** | 1098.238        | 38.31            | -3.80       | 54.0           | -15.69          | AV       | 233.40         | 100         | Vertical | Pass    |
| 2   | 1470.691        | 48.64            | -5.02       | 74.0           | -25.36          | Peak     | 54.40          | 100         | Vertical | Pass    |
| 2** | 1470.691        | 37.09            | -5.02       | 54.0           | -16.91          | AV       | 54.40          | 100         | Vertical | Pass    |
| 3   | 1809.399        | 49.89            | -4.49       | 74.0           | -24.11          | Peak     | 68.90          | 100         | Vertical | Pass    |
| 3** | 1809.399        | 39.21            | -4.49       | 54.0           | -14.79          | AV       | 68.90          | 100         | Vertical | Pass    |
| 4   | 2422.572        | 57.53            | 4.49        | 74.0           | -16.47          | Peak     | 64.10          | 100         | Vertical | Pass    |
| 4** | 2422.572        | 47.96            | 4.49        | 54.0           | -6.04           | AV       | 64.10          | 100         | Vertical | Pass    |
| 5   | 2994.251        | 55.18            | 2.80        | 74.0           | -18.82          | Peak     | 96.80          | 100         | Vertical | Pass    |
| 5** | 2994.251        | 45.47            | 2.80        | 54.0           | -8.53           | AV       | 96.80          | 100         | Vertical | Pass    |
| 6   | 5237.220        | 56.67            | 1.59        | 74.0           | -17.33          | Peak     | 359.40         | 100         | Vertical | Pass    |
| 6** | 5237.220        | 45.44            | 1.59        | 54.0           | -8.56           | AV       | 359.40         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.52.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7255.686        | 33.64            | 2.82        | 74.0           | -40.36          | Peak     | 10.10          | 100         | Vertical | Pass    |
| 1** | 7255.686        | 23.36            | 2.82        | 54.0           | -30.64          | AV       | 10.10          | 100         | Vertical | Pass    |
| 2   | 9317.671        | 40.01            | 9.36        | 74.0           | -33.99          | Peak     | 173.40         | 100         | Vertical | Pass    |
| 2** | 9317.671        | 29.60            | 9.36        | 54.0           | -24.40          | AV       | 173.40         | 100         | Vertical | Pass    |
| 3   | 11118.470       | 42.92            | 10.68       | 74.0           | -31.08          | Peak     | 323.00         | 100         | Vertical | Pass    |
| 3** | 11118.470       | 32.18            | 10.68       | 54.0           | -21.82          | AV       | 323.00         | 100         | Vertical | Pass    |
| 4   | 13081.480       | 45.06            | 12.23       | 74.0           | -28.94          | Peak     | 126.90         | 100         | Vertical | Pass    |
| 4** | 13081.480       | 33.96            | 12.23       | 54.0           | -20.04          | AV       | 126.90         | 100         | Vertical | Pass    |
| 5   | 14546.863       | 50.25            | 16.93       | 74.0           | -23.75          | Peak     | 202.10         | 100         | Vertical | Pass    |
| 5** | 14546.863       | 39.75            | 16.93       | 54.0           | -14.25          | AV       | 202.10         | 100         | Vertical | Pass    |
| 6   | 16490.627       | 54.40            | 20.63       | 74.0           | -19.60          | Peak     | 14.60          | 100         | Vertical | Pass    |
| 6** | 16490.627       | 43.79            | 20.63       | 54.0           | -10.21          | AV       | 14.60          | 100         | Vertical | Pass    |

# BT-Bandedge -Low channel- Horizontal-DH5 –TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_11.47.16

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

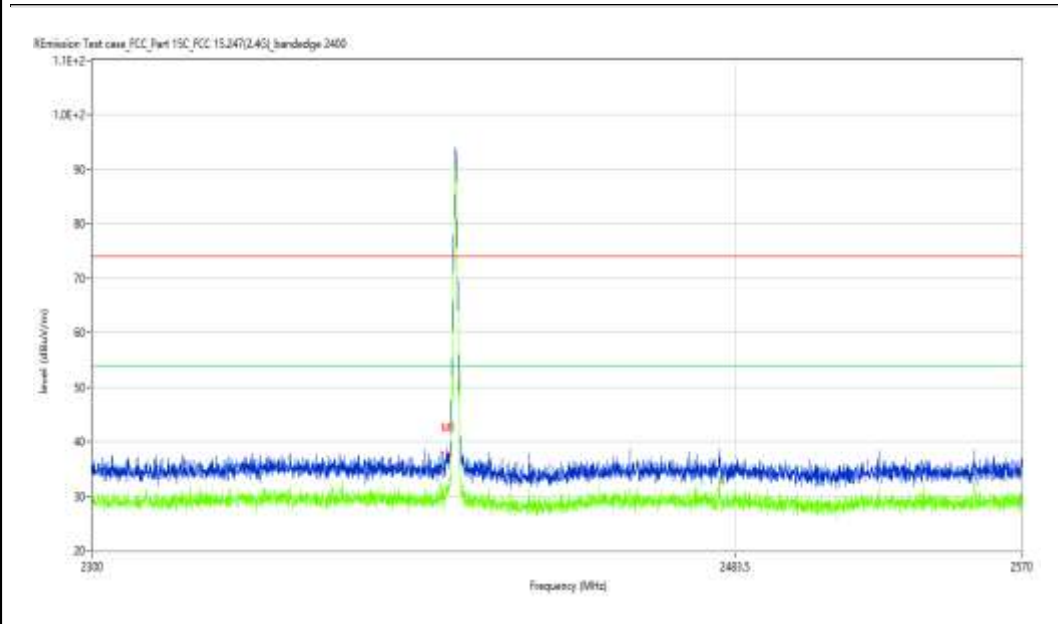

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2400.000        | 37.68            | -4.18       | 74.0           | -36.32          | Peak     | 1.27           | 100         | H       | Pass    |
| 1** | 2400.000        | 31.84            | -4.18       | 54.0           | -22.16          | AV       | 1.27           | 100         | H       | Pass    |

# BT-Bandedge -Low channel- Vertical-DH5 -TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_11:58:42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

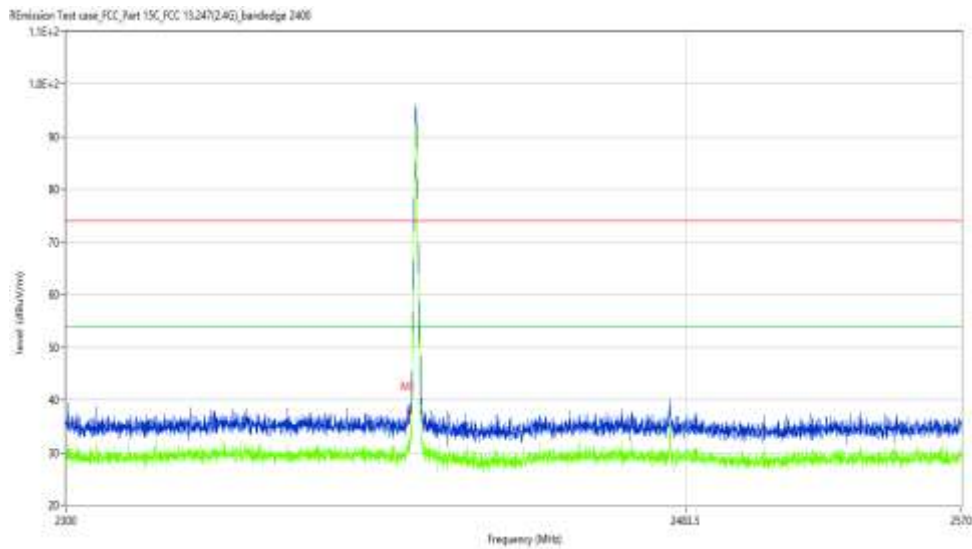

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2400.000        | 37.85            | -4.18       | 74.0           | -36.15          | Peak     | 17.50          | 100         | V       | Pass    |
| 1** | 2400.000        | 31.76            | -4.18       | 54.0           | -22.24          | AV       | 17.50          | 100         | V       | Pass    |



# BT-Bandedge -High channel- Horizontal-DH5-TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_11.50.17

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case: FCC Part 15C FCC 15.247(2.4G) bandedge 2400

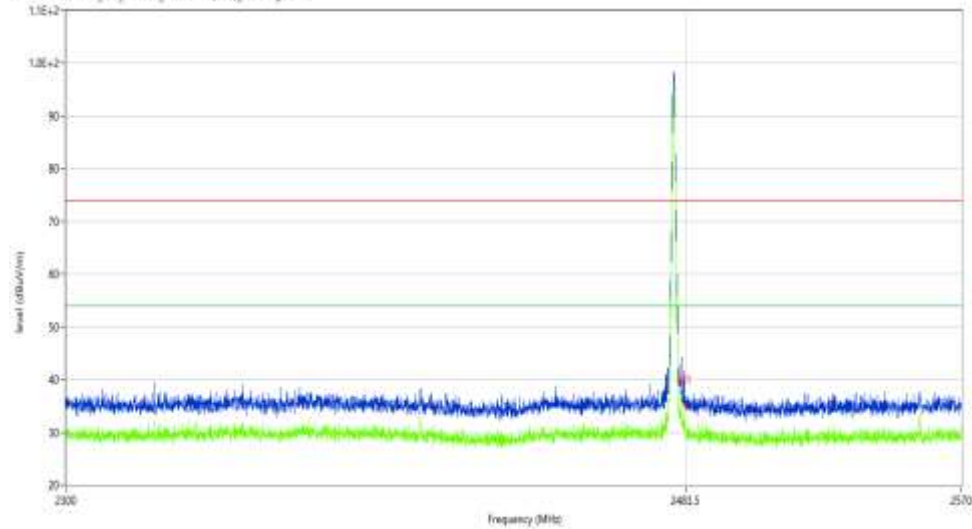

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 35.22            | -3.87       | 74.0           | -38.78          | Peak     | 6.80           | 100         | H       | Pass    |
| 1** | 2483.500        | 30.08            | -3.87       | 54.0           | -23.92          | AV       | 6.80           | 100         | H       | Pass    |

# BT-Bandedge -High channel- Vertical-DH5-TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_12.00.14

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case: FCC Part 15C FCC 15.247(a)(2) Bandedge 2483

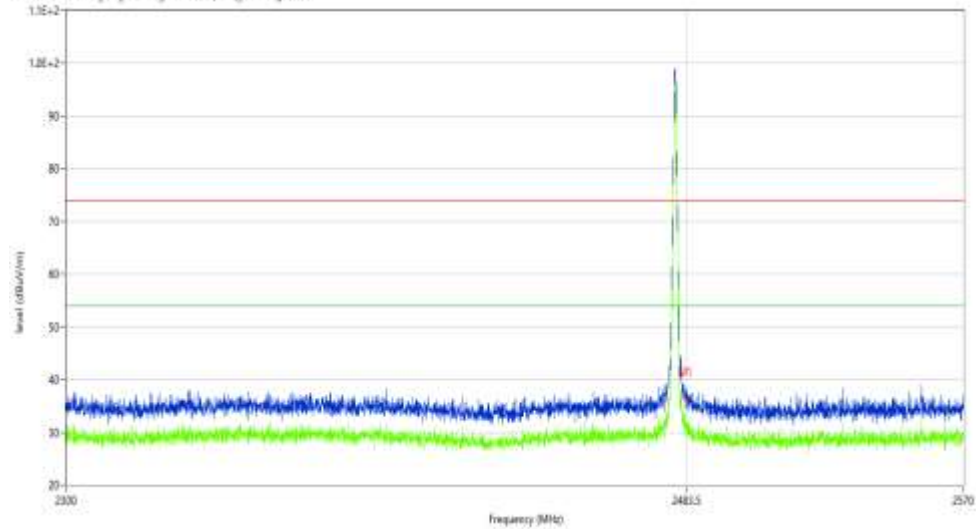

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 36.27            | -3.87       | 74.0           | -37.73          | Peak     | 358.03         | 100         | V       | Pass    |
| 1** | 2483.500        | 31.26            | -3.87       | 54.0           | -22.74          | AV       | 358.03         | 100         | V       | Pass    |

30M-1G

BT-Hopping-Horizontal-TX

## Test result

Project Number: Certification

Test Time: 2020-07-24\_10.38.13

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.0

Hum.: 58


Test Engineer: XCJ

Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RSE01-E20070010-01#05

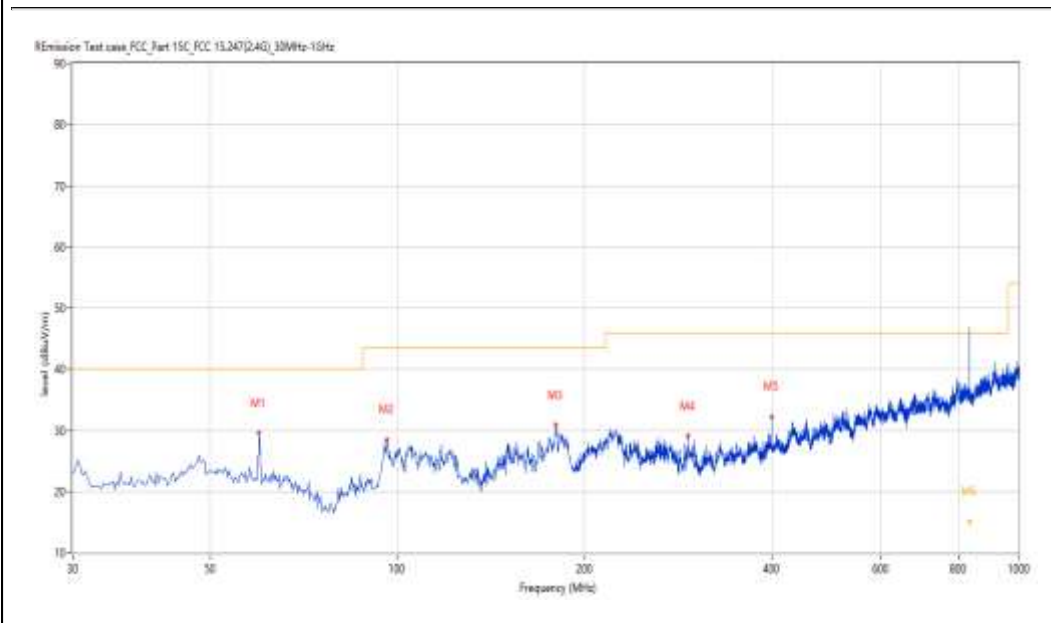

| No. | Frequency<br>(MHz) | Results<br>(dBuV/m) | Factor<br>(dB) | Limit<br>(dBuV/m) | Over Limit<br>(dB) | Detector | Table<br>(Degree) | Height<br>(cm) | Antenna    | Verdict |
|-----|--------------------|---------------------|----------------|-------------------|--------------------|----------|-------------------|----------------|------------|---------|
| 1   | 59.820             | 29.53               | -25.55         | 40.0              | -10.47             | Peak     | 297.10            | 200            | Horizontal | Pass    |
| 2   | 96.186             | 28.49               | -26.82         | 43.5              | -15.01             | Peak     | 26.90             | 200            | Horizontal | Pass    |
| 3   | 180.070            | 30.86               | -28.09         | 43.5              | -12.64             | Peak     | 111.00            | 200            | Horizontal | Pass    |
| 4   | 293.532            | 29.03               | -23.73         | 46.0              | -16.97             | Peak     | 116.50            | 100            | Horizontal | Pass    |
| 5   | 399.963            | 32.27               | -21.34         | 46.0              | -13.73             | Peak     | 360.30            | 200            | Horizontal | Pass    |
| 6   | 833.313            | 21.09               | -13.28         | 46.0              | -24.91             | Peak     | 18.40             | 400            | Horizontal | Pass    |
| 6*  | 833.313            | 15.06               | -13.28         | 46.0              | -30.94             | QP       | 18.40             | 400            | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_10.43.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

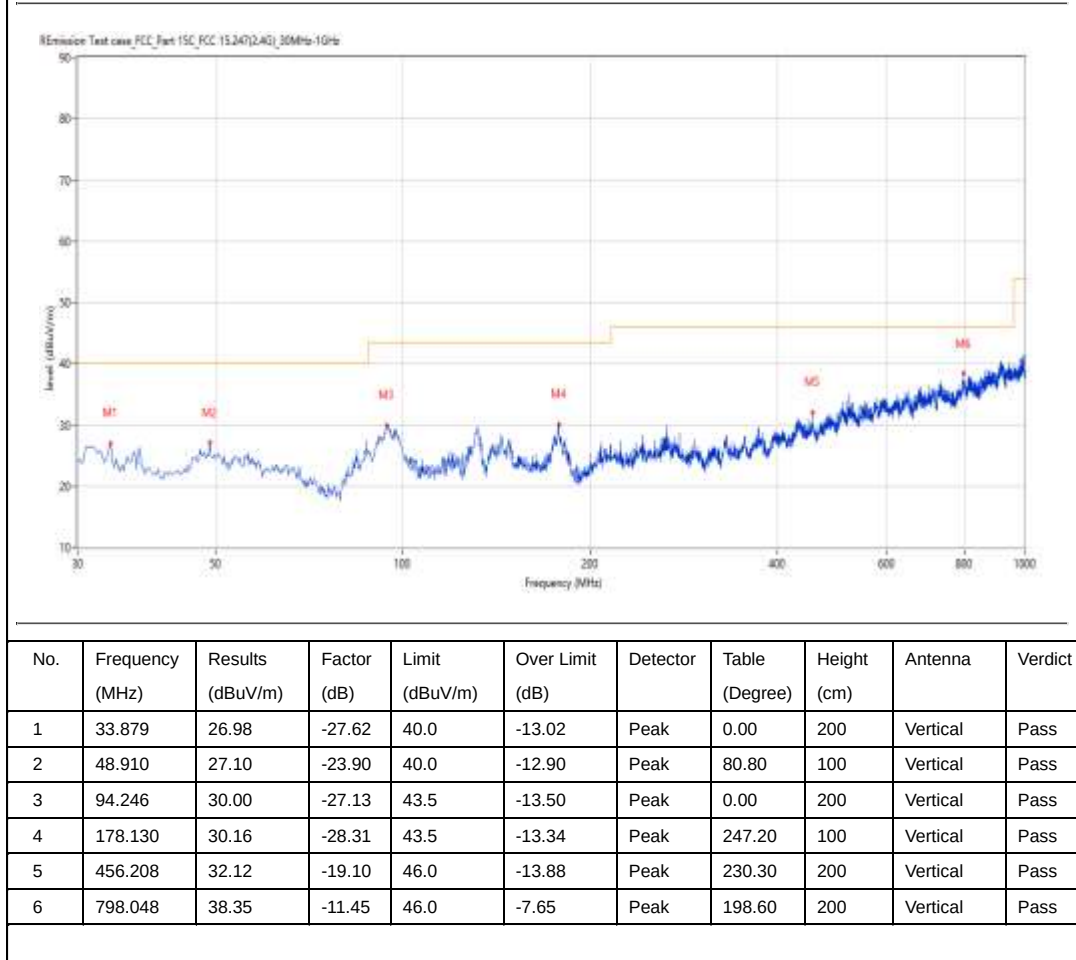

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.11.18

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case FCC Part 15C FCC 15.247(2)(a)(1)GHz-70Hz

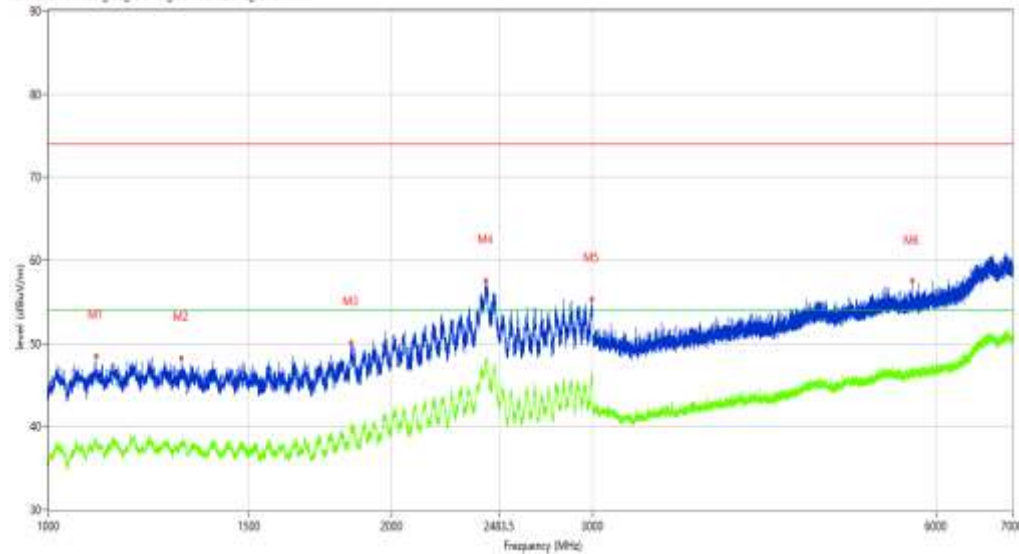

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1101.737        | 48.49            | -4.15       | 74.0           | -25.51          | Peak     | 184.30         | 100         | Horizontal | Pass    |
| 1** | 1101.737        | 37.56            | -4.15       | 54.0           | -16.44          | AV       | 184.30         | 100         | Horizontal | Pass    |
| 2   | 1308.961        | 48.21            | -4.59       | 74.0           | -25.79          | Peak     | 256.50         | 100         | Horizontal | Pass    |
| 2** | 1308.961        | 38.09            | -4.59       | 54.0           | -15.91          | AV       | 256.50         | 100         | Horizontal | Pass    |
| 3   | 1842.395        | 50.12            | -3.44       | 74.0           | -23.88          | Peak     | 332.00         | 100         | Horizontal | Pass    |
| 3** | 1842.395        | 39.78            | -3.44       | 54.0           | -14.22          | AV       | 332.00         | 100         | Horizontal | Pass    |
| 4   | 2419.573        | 57.55            | 4.61        | 74.0           | -16.45          | Peak     | 74.50          | 100         | Horizontal | Pass    |
| 4** | 2419.573        | 48.04            | 4.61        | 54.0           | -5.96           | AV       | 74.50          | 100         | Horizontal | Pass    |
| 5   | 2993.251        | 55.40            | 2.98        | 74.0           | -18.60          | Peak     | 251.60         | 100         | Horizontal | Pass    |
| 5** | 2993.251        | 45.78            | 2.98        | 54.0           | -8.22           | AV       | 251.60         | 100         | Horizontal | Pass    |
| 6   | 5711.661        | 57.49            | 2.16        | 74.0           | -16.51          | Peak     | 63.70          | 100         | Horizontal | Pass    |
| 6** | 5711.661        | 46.77            | 2.16        | 54.0           | -7.23           | AV       | 63.70          | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11:57:41

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

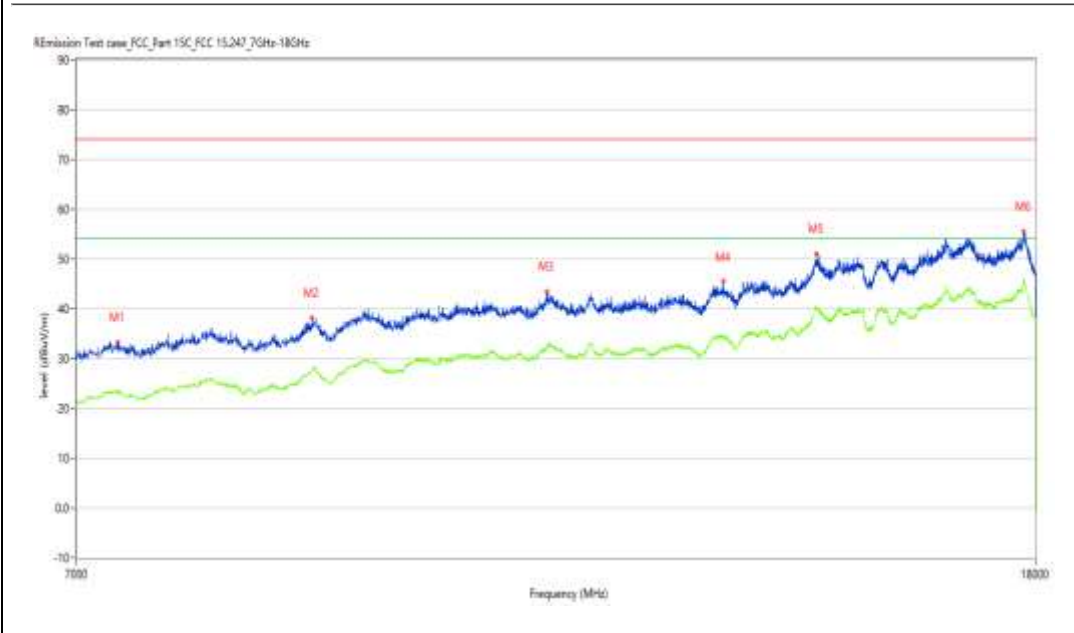

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7277.681        | 32.05            | 2.89        | 74.0           | -41.95          | Peak     | 195.80         | 100         | Horizontal | Pass    |
| 1** | 7277.681        | 23.02            | 2.89        | 54.0           | -30.98          | AV       | 195.80         | 100         | Horizontal | Pass    |
| 2   | 8831.042        | 38.21            | 7.26        | 74.0           | -35.79          | Peak     | 278.40         | 100         | Horizontal | Pass    |
| 2** | 8831.042        | 27.55            | 7.26        | 54.0           | -26.45          | AV       | 278.40         | 100         | Horizontal | Pass    |
| 3   | 11123.969       | 43.49            | 10.71       | 74.0           | -30.51          | Peak     | 337.90         | 100         | Horizontal | Pass    |
| 3** | 11123.969       | 32.18            | 10.71       | 54.0           | -21.82          | AV       | 337.90         | 100         | Horizontal | Pass    |
| 4   | 13235.441       | 45.45            | 12.34       | 74.0           | -28.55          | Peak     | 172.70         | 100         | Horizontal | Pass    |
| 4** | 13235.441       | 34.15            | 12.34       | 54.0           | -19.85          | AV       | 172.70         | 100         | Horizontal | Pass    |
| 5   | 14511.122       | 51.04            | 17.06       | 74.0           | -22.96          | Peak     | 122.80         | 100         | Horizontal | Pass    |
| 5** | 14511.122       | 40.20            | 17.06       | 54.0           | -13.80          | AV       | 122.80         | 100         | Horizontal | Pass    |
| 6   | 17791.052       | 55.53            | 21.14       | 74.0           | -18.47          | Peak     | 355.60         | 100         | Horizontal | Pass    |
| 6** | 17791.052       | 45.06            | 21.14       | 54.0           | -8.94           | AV       | 355.60         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.08.45

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

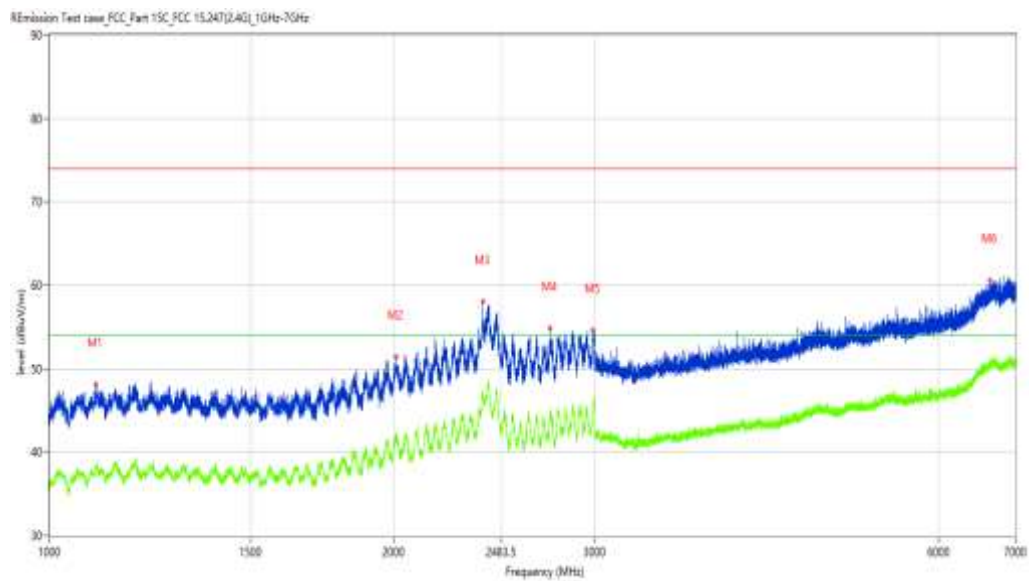

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1098.488        | 48.09            | -3.75       | 74.0           | -25.91          | Peak     | 24.30          | 100         | Vertical | Pass    |
| 1** | 1098.488        | 38.36            | -3.75       | 54.0           | -15.64          | AV       | 24.30          | 100         | Vertical | Pass    |
| 2   | 2009.624        | 51.40            | -2.25       | 74.0           | -22.60          | Peak     | 118.40         | 100         | Vertical | Pass    |
| 2** | 2009.624        | 41.50            | -2.25       | 54.0           | -12.50          | AV       | 118.40         | 100         | Vertical | Pass    |
| 3   | 2393.326        | 58.01            | 5.63        | 74.0           | -15.99          | Peak     | 359.30         | 100         | Vertical | Pass    |
| 3** | 2393.326        | 47.23            | 5.63        | 54.0           | -6.77           | AV       | 359.30         | 100         | Vertical | Pass    |
| 4   | 2742.282        | 54.89            | 1.68        | 74.0           | -19.11          | Peak     | 227.80         | 100         | Vertical | Pass    |
| 4** | 2742.282        | 44.32            | 1.68        | 54.0           | -9.68           | AV       | 227.80         | 100         | Vertical | Pass    |
| 5   | 2991.751        | 54.66            | 3.18        | 74.0           | -19.34          | Peak     | 351.00         | 100         | Vertical | Pass    |
| 5** | 2991.751        | 46.26            | 3.18        | 54.0           | -7.74           | AV       | 351.00         | 100         | Vertical | Pass    |
| 6   | 6643.545        | 60.61            | 5.33        | 74.0           | -13.39          | Peak     | 311.60         | 100         | Vertical | Pass    |
| 6** | 6643.545        | 50.39            | 5.33        | 54.0           | -3.61           | AV       | 311.60         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_11.59.13

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7307.923        | 34.10            | 3.00        | 74.0           | -39.90          | Peak     | 243.80         | 100         | Vertical | Pass    |
| 1** | 7307.923        | 22.88            | 3.00        | 54.0           | -31.12          | AV       | 243.80         | 100         | Vertical | Pass    |
| 2   | 9075.731        | 37.98            | 6.75        | 74.0           | -36.02          | Peak     | 73.00          | 100         | Vertical | Pass    |
| 2** | 9075.731        | 27.14            | 6.75        | 54.0           | -26.86          | AV       | 73.00          | 100         | Vertical | Pass    |
| 3   | 11137.716       | 42.59            | 10.77       | 74.0           | -31.41          | Peak     | 330.90         | 100         | Vertical | Pass    |
| 3** | 11137.716       | 32.60            | 10.77       | 54.0           | -21.40          | AV       | 330.90         | 100         | Vertical | Pass    |
| 4   | 13191.452       | 45.34            | 12.33       | 74.0           | -28.66          | Peak     | 49.90          | 100         | Vertical | Pass    |
| 4** | 13191.452       | 34.28            | 12.33       | 54.0           | -19.72          | AV       | 49.90          | 100         | Vertical | Pass    |
| 5   | 14494.626       | 50.08            | 16.95       | 74.0           | -23.92          | Peak     | 156.40         | 100         | Vertical | Pass    |
| 5** | 14494.626       | 40.14            | 16.95       | 54.0           | -13.86          | AV       | 156.40         | 100         | Vertical | Pass    |
| 6   | 16501.625       | 53.68            | 20.75       | 74.0           | -20.32          | Peak     | 340.60         | 100         | Vertical | Pass    |
| 6** | 16501.625       | 43.89            | 20.75       | 54.0           | -10.11          | AV       | 340.60         | 100         | Vertical | Pass    |



# BT-Bandedge-Hopping- Horizontal-DH5 –TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_11.53.38

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

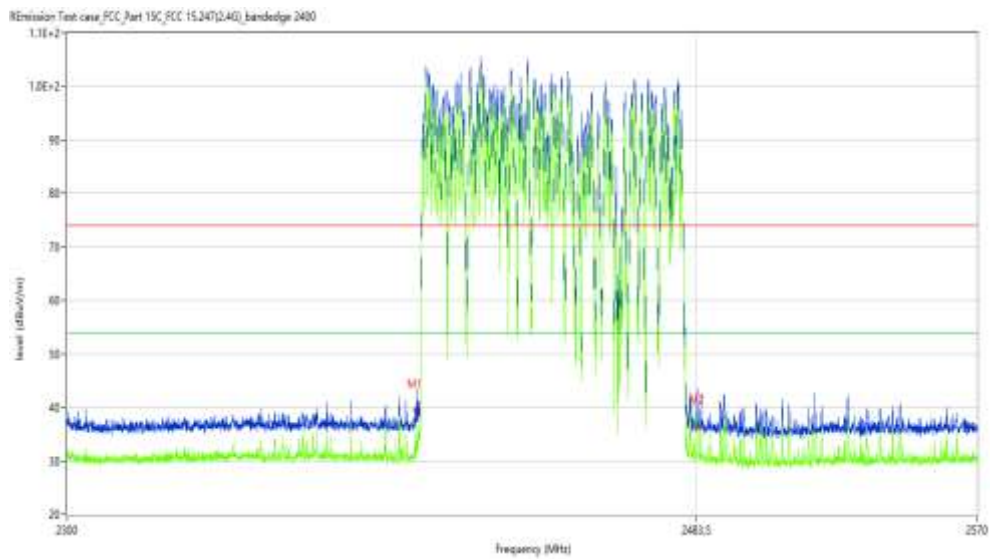

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2400.000        | 39.33            | -4.18       | 74.0           | -34.67          | Peak     | 176.02         | 100         | H       | Pass    |
| 1** | 2400.000        | 33.33            | -4.18       | 54.0           | -20.67          | AV       | 176.02         | 100         | H       | Pass    |
| 2   | 2483.500        | 36.58            | -3.87       | 74.0           | -37.42          | Peak     | 183.04         | 100         | H       | Pass    |
| 2** | 2483.500        | 31.37            | -3.87       | 54.0           | -22.63          | AV       | 183.04         | 100         | H       | Pass    |

# BT-Bandedge-Hopping-Vertical-DH5 -TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_11.56.10

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

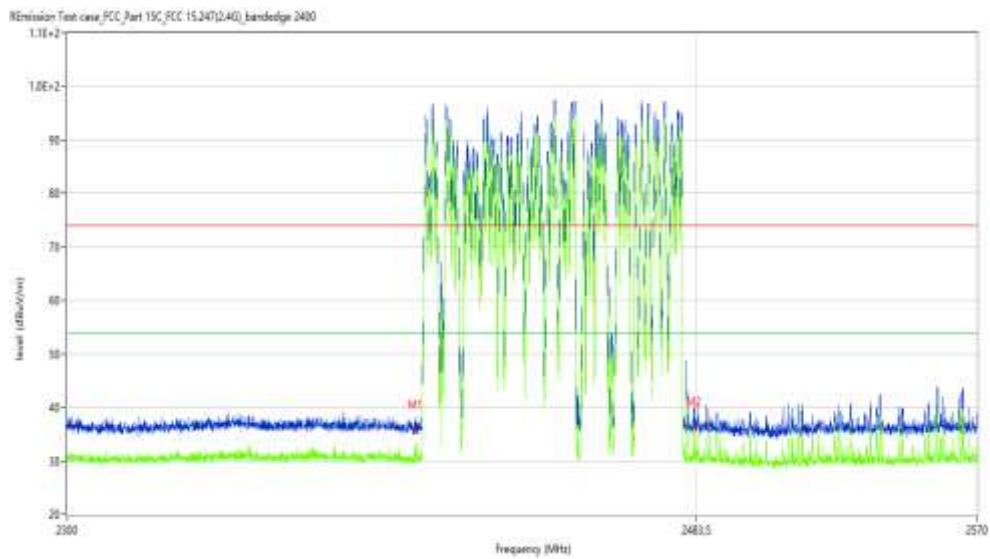

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2400.000        | 35.50            | -4.18       | 74.0           | -38.50          | Peak     | 120.30         | 100         | V       | Pass    |
| 1** | 2400.000        | 30.33            | -4.18       | 54.0           | -23.67          | AV       | 120.30         | 100         | V       | Pass    |
| 2   | 2483.500        | 35.98            | -3.87       | 74.0           | -38.02          | Peak     | 108.25         | 100         | V       | Pass    |
| 2** | 2483.500        | 30.08            | -3.87       | 54.0           | -23.92          | AV       | 108.25         | 100         | V       | Pass    |

30M-1G

BT 3M-Horizontal-DH5-TX

## Test result

Project Number: Certification

Test Time: 2020-07-24\_14.17.49

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

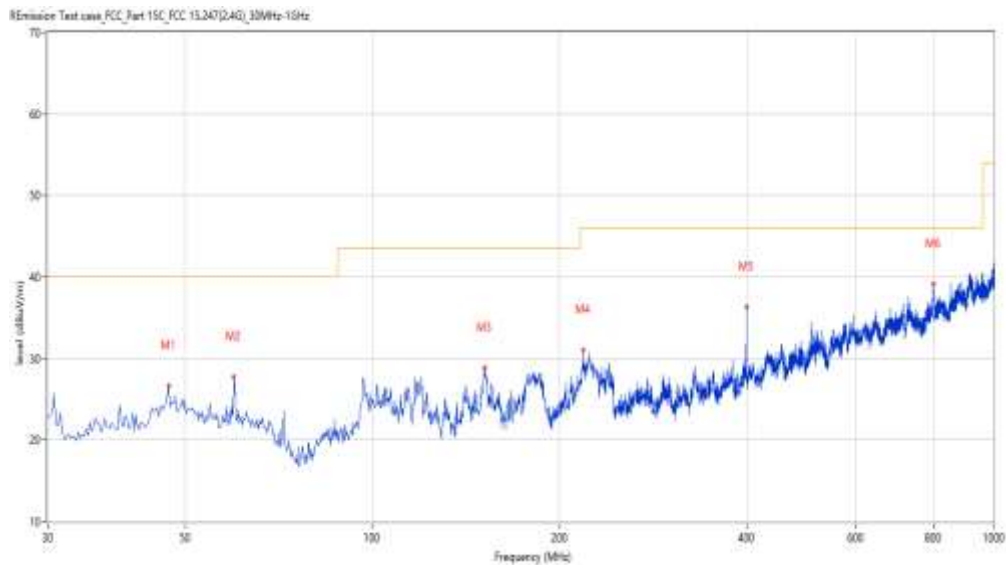

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 46.971          | 26.67            | -24.08      | 40.0           | -13.33          | Peak     | 49.90          | 200         | Horizontal | Pass    |
| 2   | 59.820          | 27.76            | -25.55      | 40.0           | -12.24          | Peak     | 347.90         | 100         | Horizontal | Pass    |
| 3   | 151.462         | 28.90            | -28.33      | 43.5           | -14.60          | Peak     | 83.80          | 200         | Horizontal | Pass    |
| 4   | 218.375         | 31.03            | -26.43      | 46.0           | -14.97          | Peak     | 360.00         | 200         | Horizontal | Pass    |
| 5   | 399.963         | 36.29            | -21.34      | 46.0           | -9.71           | Peak     | 356.10         | 100         | Horizontal | Pass    |
| 6   | 799.745         | 39.16            | -12.21      | 46.0           | -6.84           | Peak     | 299.20         | 100         | Horizontal | Pass    |

BT 3M -Vertical-DH5-TX

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14:23.11

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

R Emission Test case FCC Part 15C FCC 15.247(2.4G) 30MHz-1GHz

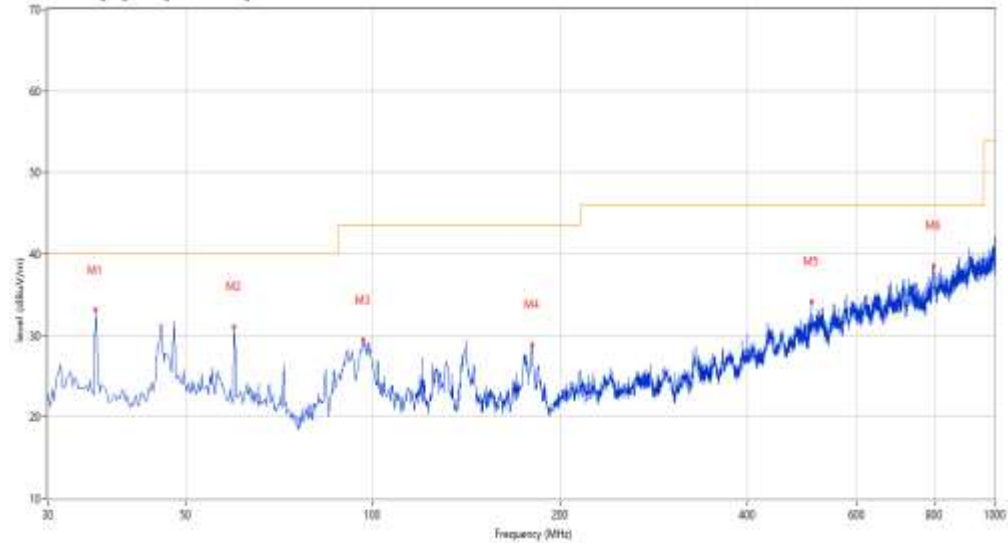

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 35.819          | 33.09            | -26.74      | 40.0           | -6.91           | Peak     | 355.70         | 100         | Vertical | Pass    |
| 2   | 59.820          | 31.09            | -25.55      | 40.0           | -8.91           | Peak     | 355.70         | 100         | Vertical | Pass    |
| 3   | 96.428          | 29.42            | -26.80      | 43.5           | -14.08          | Peak     | 360.00         | 200         | Vertical | Pass    |
| 4   | 180.312         | 28.82            | -28.07      | 43.5           | -14.68          | Peak     | 231.90         | 100         | Vertical | Pass    |
| 5   | 507.121         | 34.11            | -18.58      | 46.0           | -11.89          | Peak     | 360.00         | 200         | Vertical | Pass    |
| 6   | 798.533         | 38.50            | -11.67      | 46.0           | -7.50           | Peak     | 2.00           | 200         | Vertical | Pass    |

1-18G

BT 3M -Low channel-Horizontal-DH5-TX

# Test result

Project Number: Certification

Test Time: 2020-07-24\_13.58.54

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.0

Hum.: 58


Test Engineer: XCJ

Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RSE01-E20070010-01#05

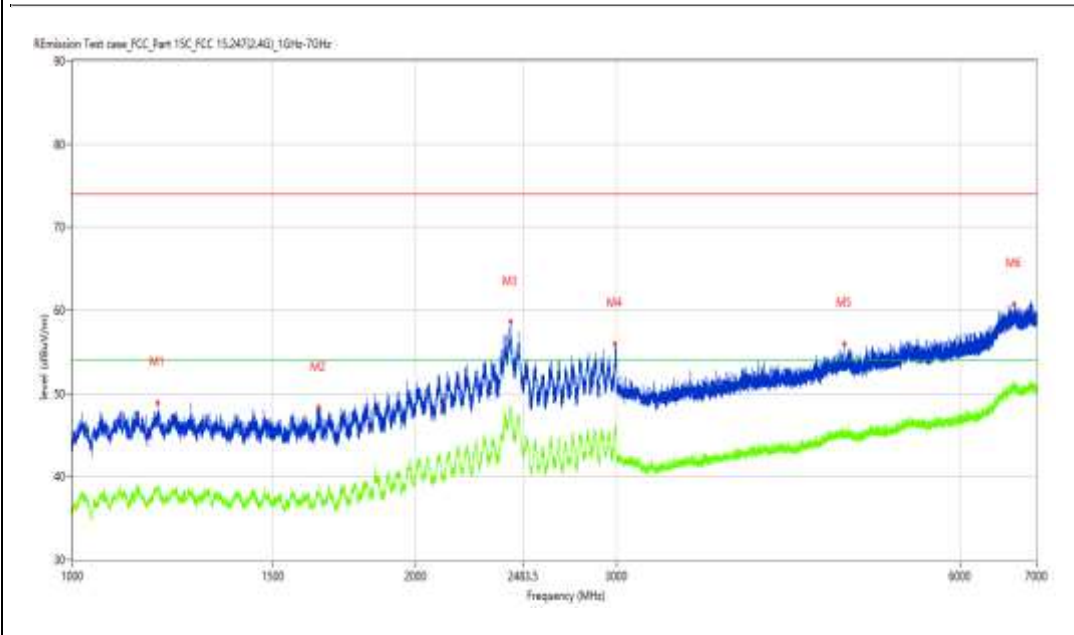

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1187.977        | 48.83            | -3.88       | 74.0           | -25.17          | Peak     | 192.30         | 100         | Horizontal | Pass    |
| 1** | 1187.977        | 38.76            | -3.88       | 54.0           | -15.24          | AV       | 192.30         | 100         | Horizontal | Pass    |
| 2   | 1644.919        | 48.31            | -5.21       | 74.0           | -25.69          | Peak     | 0.40           | 100         | Horizontal | Pass    |
| 2** | 1644.919        | 37.98            | -5.21       | 54.0           | -16.02          | AV       | 0.40           | 100         | Horizontal | Pass    |
| 3   | 2421.572        | 58.60            | 4.53        | 74.0           | -15.40          | Peak     | 355.80         | 100         | Horizontal | Pass    |
| 3** | 2421.572        | 48.25            | 4.53        | 54.0           | -5.75           | AV       | 355.80         | 100         | Horizontal | Pass    |
| 4   | 2991.501        | 55.94            | 3.17        | 74.0           | -18.06          | Peak     | 202.00         | 100         | Horizontal | Pass    |
| 4** | 2991.501        | 45.83            | 3.17        | 54.0           | -8.17           | AV       | 202.00         | 100         | Horizontal | Pass    |
| 5   | 4749.281        | 55.96            | 1.01        | 74.0           | -18.04          | Peak     | 289.00         | 100         | Horizontal | Pass    |
| 5** | 4749.281        | 45.89            | 1.01        | 54.0           | -8.11           | AV       | 289.00         | 100         | Horizontal | Pass    |
| 6   | 6689.039        | 60.79            | 5.85        | 74.0           | -13.21          | Peak     | 182.20         | 100         | Horizontal | Pass    |
| 6** | 6689.039        | 50.60            | 5.85        | 54.0           | -3.40           | AV       | 182.20         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.11.40

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8000.750        | 36.52            | 5.72        | 74.0           | -37.48          | Peak     | 288.80         | 100         | Horizontal | Pass    |
| 1** | 8000.750        | 25.79            | 5.72        | 54.0           | -28.21          | AV       | 288.80         | 100         | Horizontal | Pass    |
| 2   | 9347.913        | 39.42            | 9.79        | 74.0           | -34.58          | Peak     | 188.70         | 100         | Horizontal | Pass    |
| 2** | 9347.913        | 29.58            | 9.79        | 54.0           | -24.42          | AV       | 188.70         | 100         | Horizontal | Pass    |
| 3   | 10736.316       | 41.68            | 10.42       | 74.0           | -32.32          | Peak     | 166.40         | 100         | Horizontal | Pass    |
| 3** | 10736.316       | 30.22            | 10.42       | 54.0           | -23.78          | AV       | 166.40         | 100         | Horizontal | Pass    |
| 4   | 13188.703       | 44.97            | 12.31       | 74.0           | -29.03          | Peak     | 359.60         | 100         | Horizontal | Pass    |
| 4** | 13188.703       | 34.70            | 12.31       | 54.0           | -19.30          | AV       | 359.60         | 100         | Horizontal | Pass    |
| 5   | 14535.866       | 50.51            | 16.97       | 74.0           | -23.49          | Peak     | 166.40         | 100         | Horizontal | Pass    |
| 5** | 14535.866       | 39.88            | 16.97       | 54.0           | -14.12          | AV       | 166.40         | 100         | Horizontal | Pass    |
| 6   | 16504.374       | 53.49            | 20.64       | 74.0           | -20.51          | Peak     | 124.70         | 100         | Horizontal | Pass    |
| 6** | 16504.374       | 43.91            | 20.64       | 54.0           | -10.09          | AV       | 124.70         | 100         | Horizontal | Pass    |

BT 3M -Low channel-Vertical-DH5-TX

Document number : SHE20070010-02HE

# Test result

Project Number: Certification

Test Time: 2020-07-24\_13:54:49

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

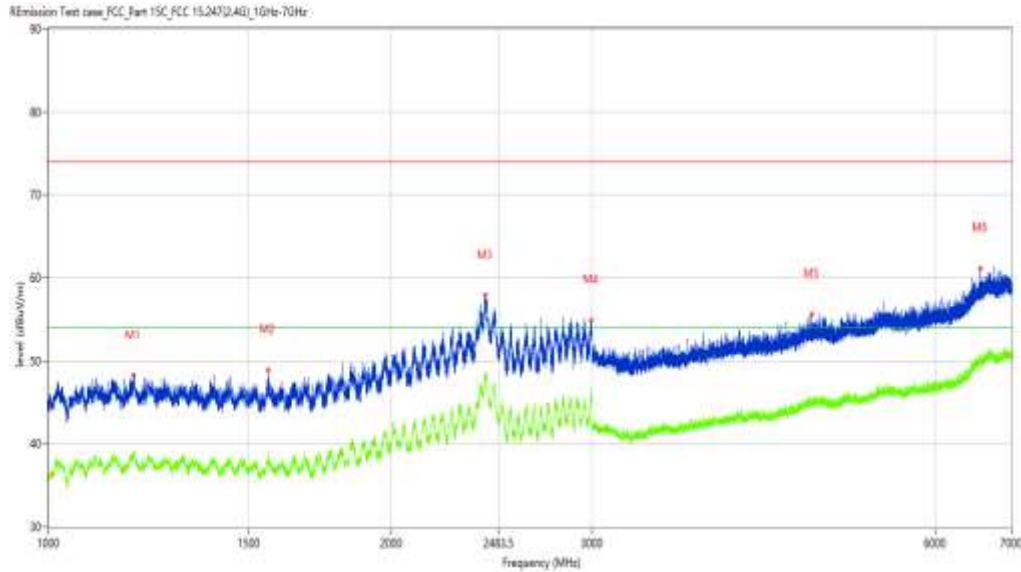

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1186.977        | 48.20            | -3.98       | 74.0           | -25.80          | Peak     | 337.10         | 100         | Vertical | Pass    |
| 1** | 1186.977        | 38.91            | -3.98       | 54.0           | -15.09          | AV       | 337.10         | 100         | Vertical | Pass    |
| 2   | 1559.430        | 48.87            | -5.41       | 74.0           | -25.13          | Peak     | 201.70         | 100         | Vertical | Pass    |
| 2** | 1559.430        | 38.14            | -5.41       | 54.0           | -15.86          | AV       | 201.70         | 100         | Vertical | Pass    |
| 3   | 2417.073        | 57.88            | 4.71        | 74.0           | -16.12          | Peak     | 304.00         | 100         | Vertical | Pass    |
| 3** | 2417.073        | 47.90            | 4.71        | 54.0           | -6.10           | AV       | 304.00         | 100         | Vertical | Pass    |
| 4   | 2992.251        | 54.91            | 3.16        | 74.0           | -19.09          | Peak     | 201.70         | 100         | Vertical | Pass    |
| 4** | 2992.251        | 45.22            | 3.16        | 54.0           | -8.78           | AV       | 201.70         | 100         | Vertical | Pass    |
| 5   | 4677.790        | 55.59            | 0.94        | 74.0           | -18.41          | Peak     | 271.50         | 100         | Vertical | Pass    |
| 5** | 4677.790        | 45.10            | 0.94        | 54.0           | -8.90           | AV       | 271.50         | 100         | Vertical | Pass    |
| 6   | 6573.553        | 61.07            | 4.84        | 74.0           | -12.93          | Peak     | 342.60         | 100         | Vertical | Pass    |
| 6** | 6573.553        | 50.15            | 4.84        | 54.0           | -3.85           | AV       | 342.60         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.05.05

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7904.524        | 35.57            | 4.97        | 74.0           | -38.43          | Peak     | 73.70          | 100         | Vertical | Pass    |
| 1** | 7904.524        | 24.85            | 4.97        | 54.0           | -29.15          | AV       | 73.70          | 100         | Vertical | Pass    |
| 2   | 8850.287        | 38.36            | 7.55        | 74.0           | -35.64          | Peak     | 64.40          | 100         | Vertical | Pass    |
| 2** | 8850.287        | 28.54            | 7.55        | 54.0           | -25.46          | AV       | 64.40          | 100         | Vertical | Pass    |
| 3   | 10554.861       | 41.89            | 9.91        | 74.0           | -32.11          | Peak     | 320.30         | 100         | Vertical | Pass    |
| 3** | 10554.861       | 31.57            | 9.91        | 54.0           | -22.43          | AV       | 320.30         | 100         | Vertical | Pass    |
| 4   | 12693.827       | 44.06            | 11.35       | 74.0           | -29.94          | Peak     | 42.10          | 100         | Vertical | Pass    |
| 4** | 12693.827       | 32.77            | 11.35       | 54.0           | -21.23          | AV       | 42.10          | 100         | Vertical | Pass    |
| 5   | 14505.624       | 50.73            | 17.08       | 74.0           | -23.27          | Peak     | 174.40         | 100         | Vertical | Pass    |
| 5** | 14505.624       | 39.89            | 17.08       | 54.0           | -14.11          | AV       | 174.40         | 100         | Vertical | Pass    |
| 6   | 16856.286       | 55.24            | 20.43       | 74.0           | -18.76          | Peak     | 55.50          | 100         | Vertical | Pass    |
| 6** | 16856.286       | 43.91            | 20.43       | 54.0           | -10.09          | AV       | 55.50          | 100         | Vertical | Pass    |



# Test result

Project Number: Certification

Test Time: 2020-07-24\_13.52.45

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

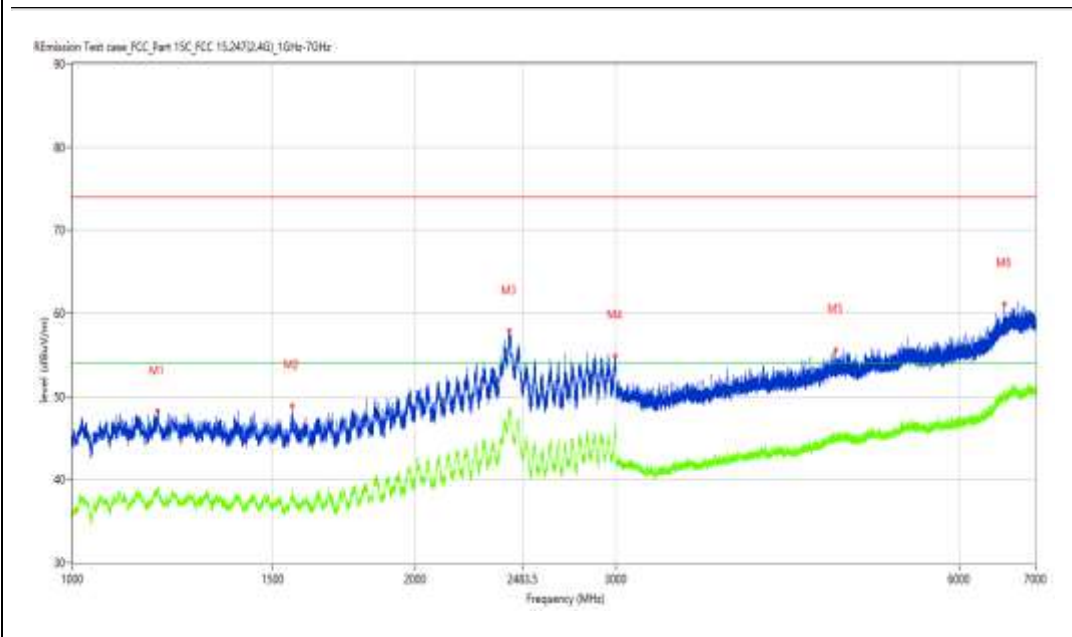

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1186.977        | 48.20            | -3.98       | 74.0           | -25.80          | Peak     | 337.10         | 100         | Horizontal | Pass    |
| 1** | 1186.977        | 38.91            | -3.98       | 54.0           | -15.09          | AV       | 337.10         | 100         | Horizontal | Pass    |
| 2   | 1559.430        | 48.87            | -5.41       | 74.0           | -25.13          | Peak     | 201.70         | 100         | Horizontal | Pass    |
| 2** | 1559.430        | 38.14            | -5.41       | 54.0           | -15.86          | AV       | 201.70         | 100         | Horizontal | Pass    |
| 3   | 2417.073        | 57.88            | 4.71        | 74.0           | -16.12          | Peak     | 304.00         | 100         | Horizontal | Pass    |
| 3** | 2417.073        | 47.90            | 4.71        | 54.0           | -6.10           | AV       | 304.00         | 100         | Horizontal | Pass    |
| 4   | 2992.251        | 54.91            | 3.16        | 74.0           | -19.09          | Peak     | 201.70         | 100         | Horizontal | Pass    |
| 4** | 2992.251        | 45.22            | 3.16        | 54.0           | -8.78           | AV       | 201.70         | 100         | Horizontal | Pass    |
| 5   | 4677.790        | 55.59            | 0.94        | 74.0           | -18.41          | Peak     | 271.50         | 100         | Horizontal | Pass    |
| 5** | 4677.790        | 45.10            | 0.94        | 54.0           | -8.90           | AV       | 271.50         | 100         | Horizontal | Pass    |
| 6   | 6573.553        | 61.07            | 4.84        | 74.0           | -12.93          | Peak     | 342.60         | 100         | Horizontal | Pass    |
| 6** | 6573.553        | 50.15            | 4.84        | 54.0           | -3.85           | AV       | 342.60         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.12.56

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7970.507        | 36.71            | 5.10        | 74.0           | -37.29          | Peak     | 305.10         | 100         | Horizontal | Pass    |
| 1** | 7970.507        | 26.36            | 5.10        | 54.0           | -27.64          | AV       | 305.10         | 100         | Horizontal | Pass    |
| 2   | 9342.414        | 39.85            | 9.71        | 74.0           | -34.15          | Peak     | 267.90         | 100         | Horizontal | Pass    |
| 2** | 9342.414        | 29.03            | 9.71        | 54.0           | -24.97          | AV       | 267.90         | 100         | Horizontal | Pass    |
| 3   | 11247.688       | 43.63            | 10.63       | 74.0           | -30.37          | Peak     | 1.00           | 100         | Horizontal | Pass    |
| 3** | 11247.688       | 31.84            | 10.63       | 54.0           | -22.16          | AV       | 1.00           | 100         | Horizontal | Pass    |
| 4   | 13166.708       | 44.93            | 12.20       | 74.0           | -29.07          | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 4** | 13166.708       | 34.40            | 12.20       | 54.0           | -19.60          | AV       | 0.00           | 100         | Horizontal | Pass    |
| 5   | 14535.866       | 50.18            | 16.97       | 74.0           | -23.82          | Peak     | 56.70          | 100         | Horizontal | Pass    |
| 5** | 14535.866       | 39.67            | 16.97       | 54.0           | -14.33          | AV       | 56.70          | 100         | Horizontal | Pass    |
| 6   | 16457.636       | 54.52            | 19.96       | 74.0           | -19.48          | Peak     | 52.20          | 100         | Horizontal | Pass    |
| 6** | 16457.636       | 42.64            | 19.96       | 54.0           | -11.36          | AV       | 52.20          | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_13.48.23

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

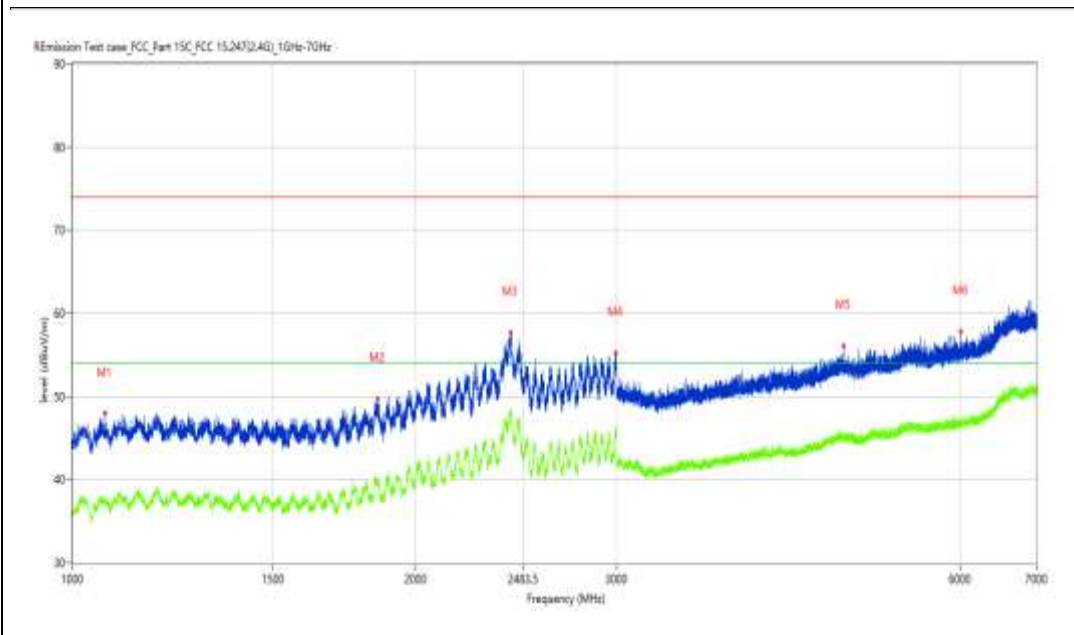

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1068.241        | 47.94            | -4.41       | 74.0           | -26.06          | Peak     | 151.00         | 100         | Vertical | Pass    |
| 1** | 1068.241        | 37.24            | -4.41       | 54.0           | -16.76          | AV       | 151.00         | 100         | Vertical | Pass    |
| 2   | 1850.894        | 49.77            | -3.98       | 74.0           | -24.23          | Peak     | 271.10         | 100         | Vertical | Pass    |
| 2** | 1850.894        | 39.42            | -3.98       | 54.0           | -14.58          | AV       | 271.10         | 100         | Vertical | Pass    |
| 3   | 2422.572        | 57.70            | 4.49        | 74.0           | -16.30          | Peak     | 335.10         | 100         | Vertical | Pass    |
| 3** | 2422.572        | 48.06            | 4.49        | 54.0           | -5.94           | AV       | 335.10         | 100         | Vertical | Pass    |
| 4   | 2992.501        | 55.22            | 3.11        | 74.0           | -18.78          | Peak     | 202.30         | 100         | Vertical | Pass    |
| 4** | 2992.501        | 45.53            | 3.11        | 54.0           | -8.47           | AV       | 202.30         | 100         | Vertical | Pass    |
| 5   | 4741.782        | 56.09            | 1.00        | 74.0           | -17.91          | Peak     | 105.50         | 100         | Vertical | Pass    |
| 5** | 4741.782        | 44.88            | 1.00        | 54.0           | -9.12           | AV       | 105.50         | 100         | Vertical | Pass    |
| 6   | 6011.124        | 57.81            | 2.58        | 74.0           | -16.19          | Peak     | 348.90         | 100         | Vertical | Pass    |
| 6** | 6011.124        | 46.95            | 2.58        | 54.0           | -7.05           | AV       | 348.90         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.06.27

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7208.948        | 32.29            | 2.85        | 74.0           | -41.71          | Peak     | 322.00         | 100         | Vertical | Pass    |
| 1** | 7208.948        | 23.11            | 2.85        | 54.0           | -30.89          | AV       | 322.00         | 100         | Vertical | Pass    |
| 2   | 8853.037        | 38.17            | 7.50        | 74.0           | -35.83          | Peak     | 15.30          | 100         | Vertical | Pass    |
| 2** | 8853.037        | 28.61            | 7.50        | 54.0           | -25.39          | AV       | 15.30          | 100         | Vertical | Pass    |
| 3   | 11173.457       | 43.03            | 10.77       | 74.0           | -30.97          | Peak     | 51.40          | 100         | Vertical | Pass    |
| 3** | 11173.457       | 32.46            | 10.77       | 54.0           | -21.54          | AV       | 51.40          | 100         | Vertical | Pass    |
| 4   | 13183.204       | 45.28            | 12.28       | 74.0           | -28.72          | Peak     | 55.90          | 100         | Vertical | Pass    |
| 4** | 13183.204       | 34.77            | 12.28       | 54.0           | -19.23          | AV       | 55.90          | 100         | Vertical | Pass    |
| 5   | 14513.872       | 50.06            | 17.05       | 74.0           | -23.94          | Peak     | 65.20          | 100         | Vertical | Pass    |
| 5** | 14513.872       | 40.17            | 17.05       | 54.0           | -13.83          | AV       | 65.20          | 100         | Vertical | Pass    |
| 6   | 16507.123       | 54.12            | 20.53       | 74.0           | -19.88          | Peak     | 240.80         | 100         | Vertical | Pass    |
| 6** | 16507.123       | 44.18            | 20.53       | 54.0           | -9.82           | AV       | 240.80         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_13.52.45

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

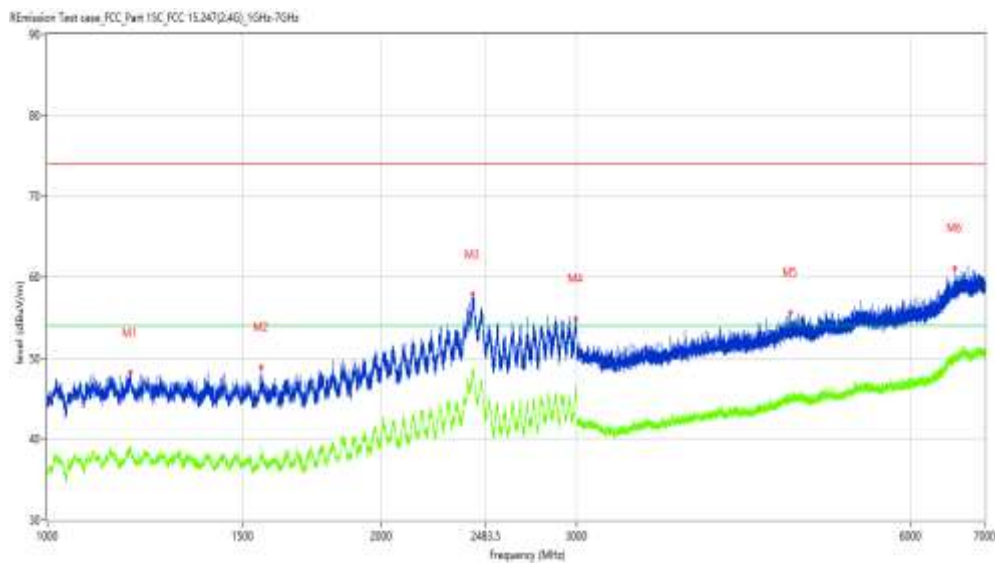

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1186.977        | 48.20            | -3.98       | 74.0           | -25.80          | Peak     | 337.10         | 100         | Horizontal | Pass    |
| 1** | 1186.977        | 38.91            | -3.98       | 54.0           | -15.09          | AV       | 337.10         | 100         | Horizontal | Pass    |
| 2   | 1559.430        | 48.87            | -5.41       | 74.0           | -25.13          | Peak     | 201.70         | 100         | Horizontal | Pass    |
| 2** | 1559.430        | 38.14            | -5.41       | 54.0           | -15.86          | AV       | 201.70         | 100         | Horizontal | Pass    |
| 3   | 2417.073        | 57.88            | 4.71        | 74.0           | -16.12          | Peak     | 304.00         | 100         | Horizontal | Pass    |
| 3** | 2417.073        | 47.90            | 4.71        | 54.0           | -6.10           | AV       | 304.00         | 100         | Horizontal | Pass    |
| 4   | 2992.251        | 54.91            | 3.16        | 74.0           | -19.09          | Peak     | 201.70         | 100         | Horizontal | Pass    |
| 4** | 2992.251        | 45.22            | 3.16        | 54.0           | -8.78           | AV       | 201.70         | 100         | Horizontal | Pass    |
| 5   | 4677.790        | 55.59            | 0.94        | 74.0           | -18.41          | Peak     | 271.50         | 100         | Horizontal | Pass    |
| 5** | 4677.790        | 45.10            | 0.94        | 54.0           | -8.90           | AV       | 271.50         | 100         | Horizontal | Pass    |
| 6   | 6573.553        | 61.07            | 4.84        | 74.0           | -12.93          | Peak     | 342.60         | 100         | Horizontal | Pass    |
| 6** | 6573.553        | 50.15            | 4.84        | 54.0           | -3.85           | AV       | 342.60         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.14.13

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7885.279        | 34.85            | 4.91        | 74.0           | -39.15          | Peak     | 141.40         | 100         | Horizontal | Pass    |
| 1** | 7885.279        | 24.57            | 4.91        | 54.0           | -29.43          | AV       | 141.40         | 100         | Horizontal | Pass    |
| 2   | 8817.296        | 37.95            | 7.04        | 74.0           | -36.05          | Peak     | 247.10         | 100         | Horizontal | Pass    |
| 2** | 8817.296        | 27.51            | 7.04        | 54.0           | -26.49          | AV       | 247.10         | 100         | Horizontal | Pass    |
| 3   | 10563.109       | 41.67            | 9.96        | 74.0           | -32.33          | Peak     | 316.30         | 100         | Horizontal | Pass    |
| 3** | 10563.109       | 30.76            | 9.96        | 54.0           | -23.24          | AV       | 316.30         | 100         | Horizontal | Pass    |
| 4   | 13095.226       | 44.60            | 12.56       | 74.0           | -29.40          | Peak     | 118.70         | 100         | Horizontal | Pass    |
| 4** | 13095.226       | 34.68            | 12.56       | 54.0           | -19.32          | AV       | 118.70         | 100         | Horizontal | Pass    |
| 5   | 14535.866       | 50.41            | 16.97       | 74.0           | -23.59          | Peak     | 26.40          | 100         | Horizontal | Pass    |
| 5** | 14535.866       | 39.77            | 16.97       | 54.0           | -14.23          | AV       | 26.40          | 100         | Horizontal | Pass    |
| 6   | 16482.379       | 54.85            | 20.46       | 74.0           | -19.15          | Peak     | 21.60          | 100         | Horizontal | Pass    |
| 6** | 16482.379       | 44.26            | 20.46       | 54.0           | -9.74           | AV       | 21.60          | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_13.54.49

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

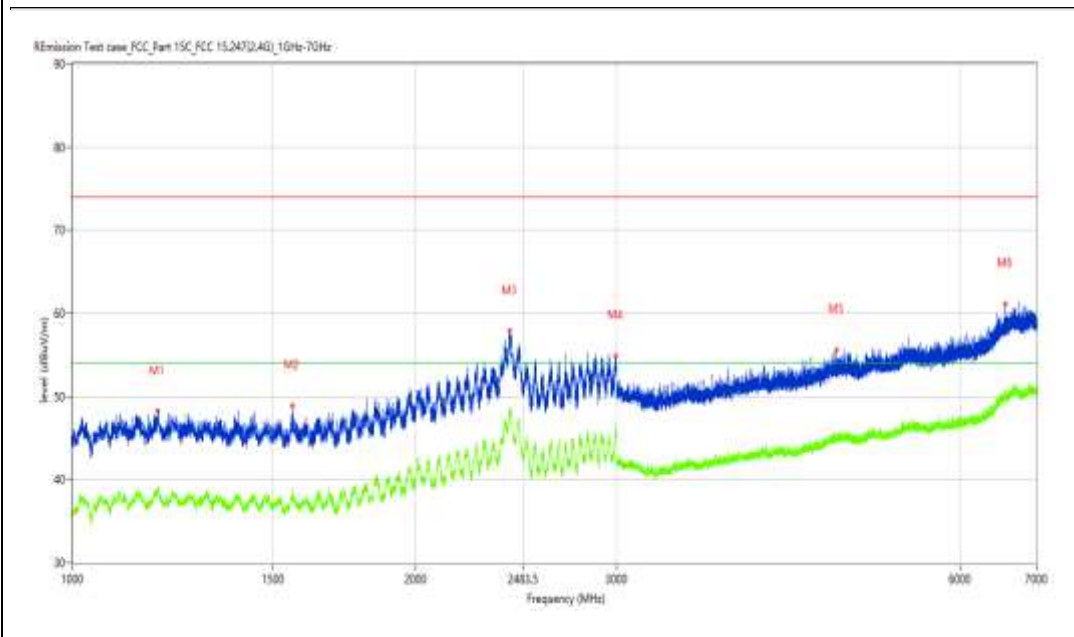

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1186.977        | 48.20            | -3.98       | 74.0           | -25.80          | Peak     | 337.10         | 100         | Vertical | Pass    |
| 1** | 1186.977        | 38.91            | -3.98       | 54.0           | -15.09          | AV       | 337.10         | 100         | Vertical | Pass    |
| 2   | 1559.430        | 48.87            | -5.41       | 74.0           | -25.13          | Peak     | 201.70         | 100         | Vertical | Pass    |
| 2** | 1559.430        | 38.14            | -5.41       | 54.0           | -15.86          | AV       | 201.70         | 100         | Vertical | Pass    |
| 3   | 2417.073        | 57.88            | 4.71        | 74.0           | -16.12          | Peak     | 304.00         | 100         | Vertical | Pass    |
| 3** | 2417.073        | 47.90            | 4.71        | 54.0           | -6.10           | AV       | 304.00         | 100         | Vertical | Pass    |
| 4   | 2992.251        | 54.91            | 3.16        | 74.0           | -19.09          | Peak     | 201.70         | 100         | Vertical | Pass    |
| 4** | 2992.251        | 45.22            | 3.16        | 54.0           | -8.78           | AV       | 201.70         | 100         | Vertical | Pass    |
| 5   | 4677.790        | 55.59            | 0.94        | 74.0           | -18.41          | Peak     | 271.50         | 100         | Vertical | Pass    |
| 5** | 4677.790        | 45.10            | 0.94        | 54.0           | -8.90           | AV       | 271.50         | 100         | Vertical | Pass    |
| 6   | 6573.553        | 61.07            | 4.84        | 74.0           | -12.93          | Peak     | 342.60         | 100         | Vertical | Pass    |
| 6** | 6573.553        | 50.15            | 4.84        | 54.0           | -3.85           | AV       | 342.60         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.07.46

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7835.791        | 35.26            | 4.72        | 74.0           | -38.74          | Peak     | 342.00         | 100         | Vertical | Pass    |
| 1** | 7835.791        | 24.65            | 4.72        | 54.0           | -29.35          | AV       | 342.00         | 100         | Vertical | Pass    |
| 2   | 9166.458        | 39.11            | 8.09        | 74.0           | -34.89          | Peak     | 158.20         | 100         | Vertical | Pass    |
| 2** | 9166.458        | 28.68            | 8.09        | 54.0           | -25.32          | AV       | 158.20         | 100         | Vertical | Pass    |
| 3   | 11220.195       | 43.52            | 10.68       | 74.0           | -30.48          | Peak     | 10.90          | 100         | Vertical | Pass    |
| 3** | 11220.195       | 32.07            | 10.68       | 54.0           | -21.93          | AV       | 10.90          | 100         | Vertical | Pass    |
| 4   | 13235.441       | 44.61            | 12.34       | 74.0           | -29.39          | Peak     | 0.90           | 100         | Vertical | Pass    |
| 4** | 13235.441       | 34.26            | 12.34       | 54.0           | -19.74          | AV       | 0.90           | 100         | Vertical | Pass    |
| 5   | 14524.869       | 50.82            | 17.01       | 74.0           | -23.18          | Peak     | 291.10         | 100         | Vertical | Pass    |
| 5** | 14524.869       | 40.14            | 17.01       | 54.0           | -13.86          | AV       | 291.10         | 100         | Vertical | Pass    |
| 6   | 16501.625       | 54.83            | 20.75       | 74.0           | -19.17          | Peak     | 237.10         | 100         | Vertical | Pass    |
| 6** | 16501.625       | 44.21            | 20.75       | 54.0           | -9.79           | AV       | 237.10         | 100         | Vertical | Pass    |



## Test result

Project Number: Certification

Test Time: 2020-07-25\_12.20.26

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

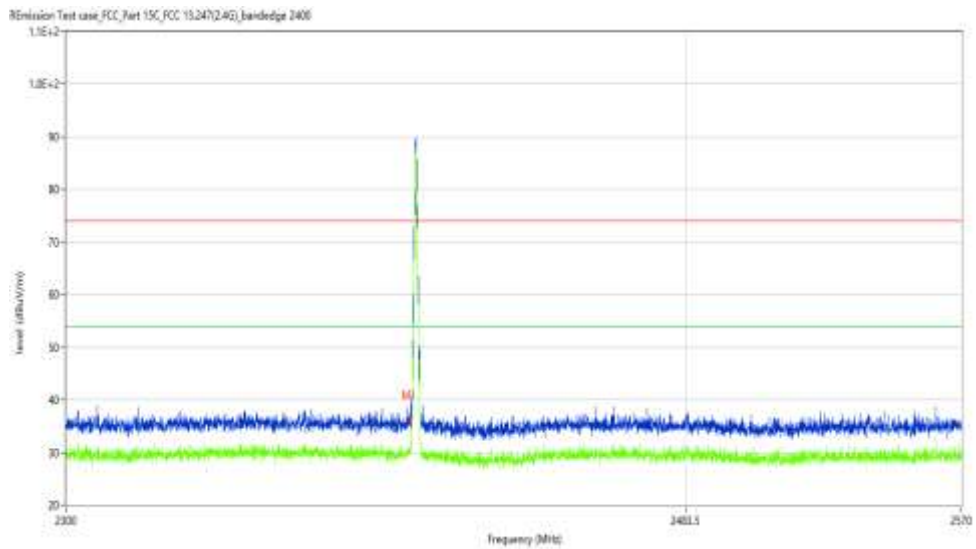

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2400.000        | 36.04            | -4.18       | 74.0           | -37.96          | Peak     | 22.93          | 100         | H       | Pass    |
| 1** | 2400.000        | 29.89            | -4.18       | 54.0           | -24.11          | AV       | 22.93          | 100         | H       | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-25\_12.07.45

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

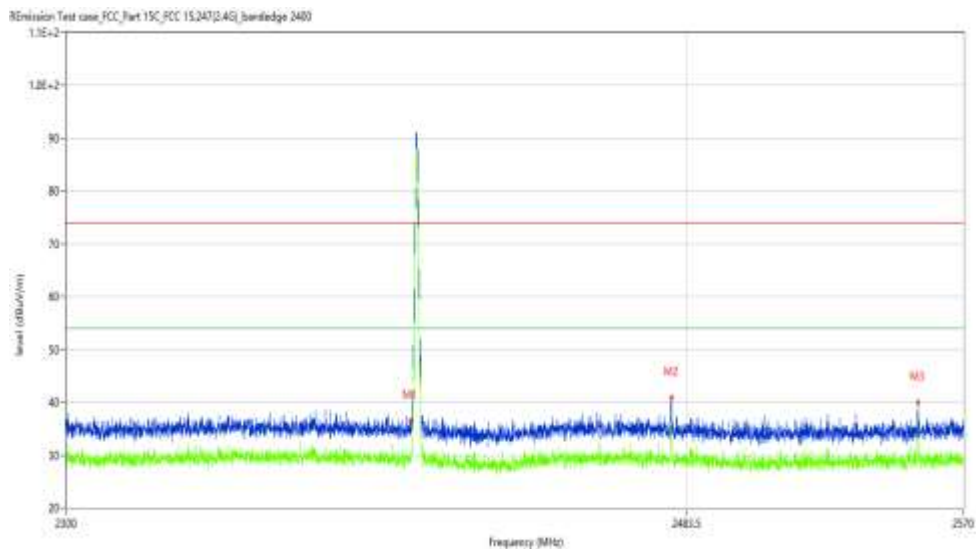

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 2400.000        | 36.34            | -4.18       | 74.0           | -37.66          | Peak     | 358.97         | 100         | V        | Pass    |
| 1** | 2400.000        | 29.25            | -4.18       | 54.0           | -24.75          | AV       | 358.97         | 100         | V        | Pass    |
| 2   | 2478.898        | 40.91            | -3.74       | 74.0           | -33.09          | Peak     | 353.10         | 100         | Vertical | Pass    |
| 2** | 2478.898        | 35.18            | -3.74       | 54.0           | -18.82          | AV       | 353.10         | 100         | Vertical | Pass    |
| 3   | 2555.559        | 39.99            | -4.15       | 74.0           | -34.01          | Peak     | 344.70         | 100         | Vertical | Pass    |
| 3** | 2555.559        | 36.69            | -4.15       | 54.0           | -17.31          | AV       | 344.70         | 100         | Vertical | Pass    |

# BT 3M -Bandedge -High channel- Horizontal-DH5-TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_12.23.26

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_bandedge 2400

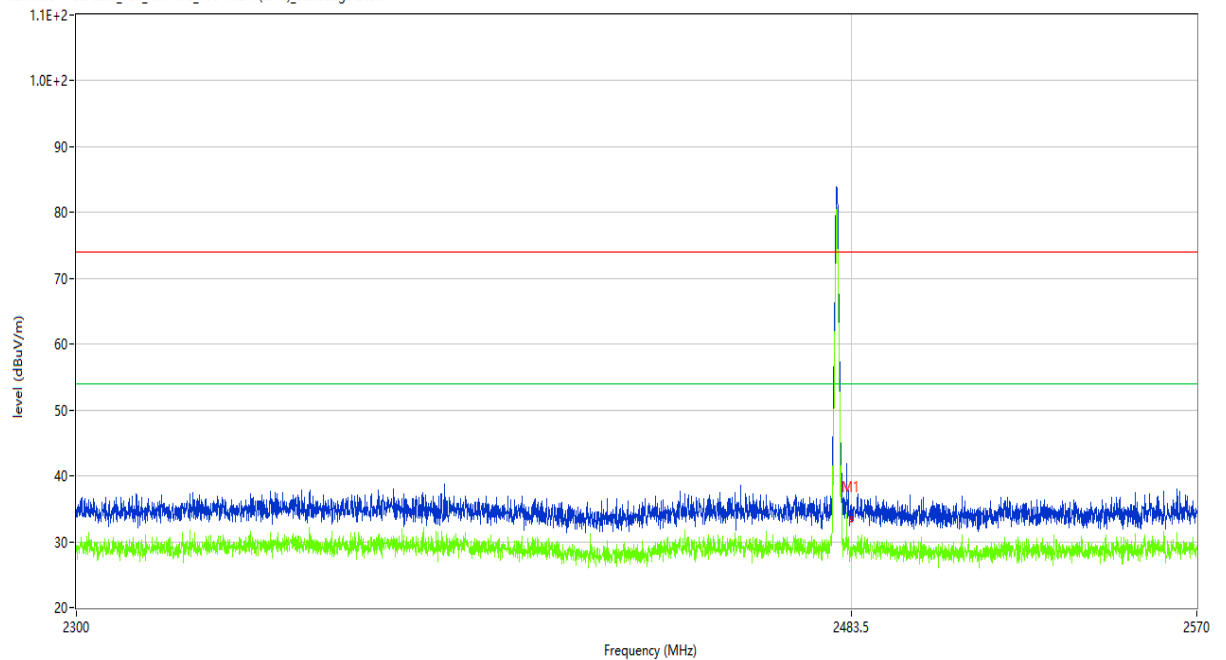

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 33.77            | -3.87       | 74.0           | -40.23          | Peak     | 358.80         | 100         | H       | Pass    |
| 1** | 2483.500        | 27.53            | -3.87       | 54.0           | -26.47          | AV       | 358.80         | 100         | H       | Pass    |

# BT 3M -Bandedge -High channel- Vertical-DH5-TX

## Test result

Project Number: Certification

Test Time: 2020-07-25\_12.02.49

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

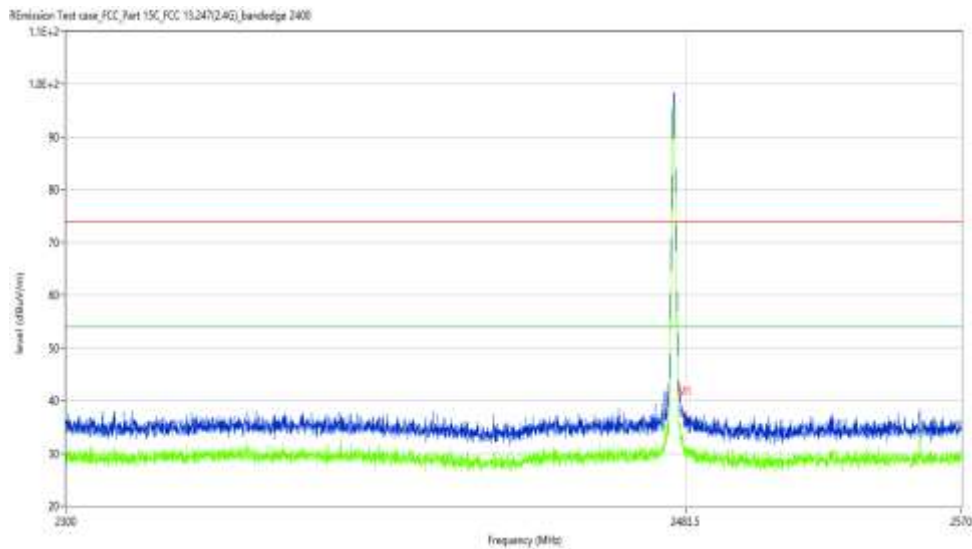

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 36.80            | -3.87       | 74.0           | -37.20          | Peak     | 347.30         | 100         | V       | Pass    |
| 1** | 2483.500        | 31.14            | -3.87       | 54.0           | -22.86          | AV       | 347.30         | 100         | V       | Pass    |

30M-1G

BT 3M-Hopping-Horizontal-TX

## Test result

Project Number: Certification

Test Time: 2020-07-24\_14.20.33

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

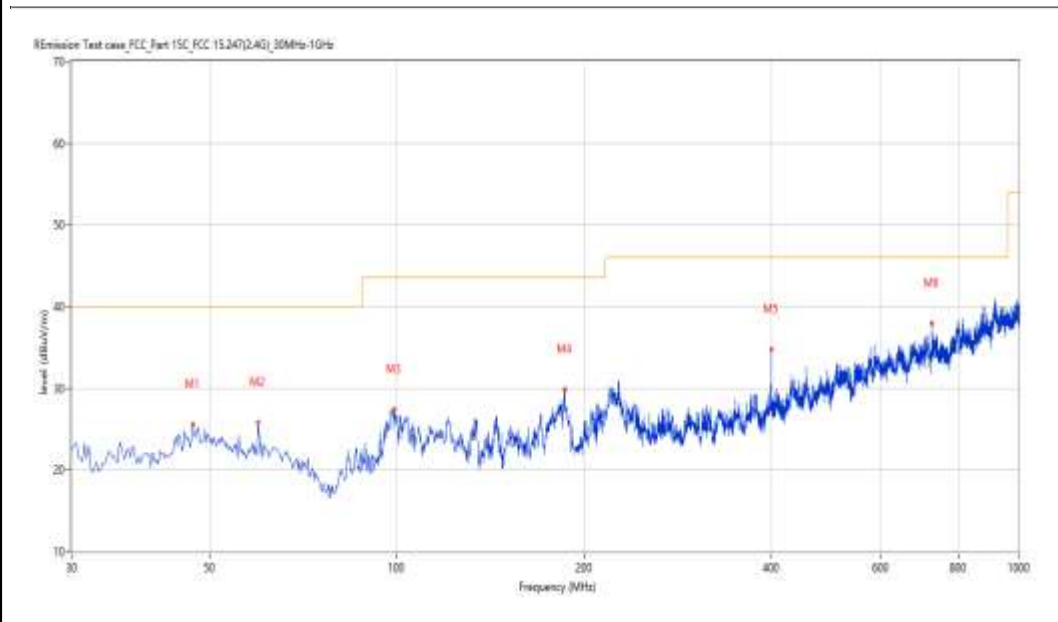

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 46.971          | 25.57            | -24.08      | 40.0           | -14.43          | Peak     | 360.00         | 200         | Horizontal | Pass    |
| 2   | 59.820          | 25.77            | -25.55      | 40.0           | -14.23          | Peak     | 334.20         | 100         | Horizontal | Pass    |
| 3   | 99.095          | 27.44            | -26.61      | 43.5           | -16.06          | Peak     | 25.10          | 200         | Horizontal | Pass    |
| 4   | 186.131         | 29.87            | -27.55      | 43.5           | -13.63          | Peak     | 360.00         | 200         | Horizontal | Pass    |
| 5   | 399.963         | 34.75            | -21.34      | 46.0           | -11.25          | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 6   | 725.801         | 37.95            | -14.88      | 46.0           | -8.05           | Peak     | 99.00          | 100         | Horizontal | Pass    |

## BT 3M-Hopping -Vertical-TX

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.25.38

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

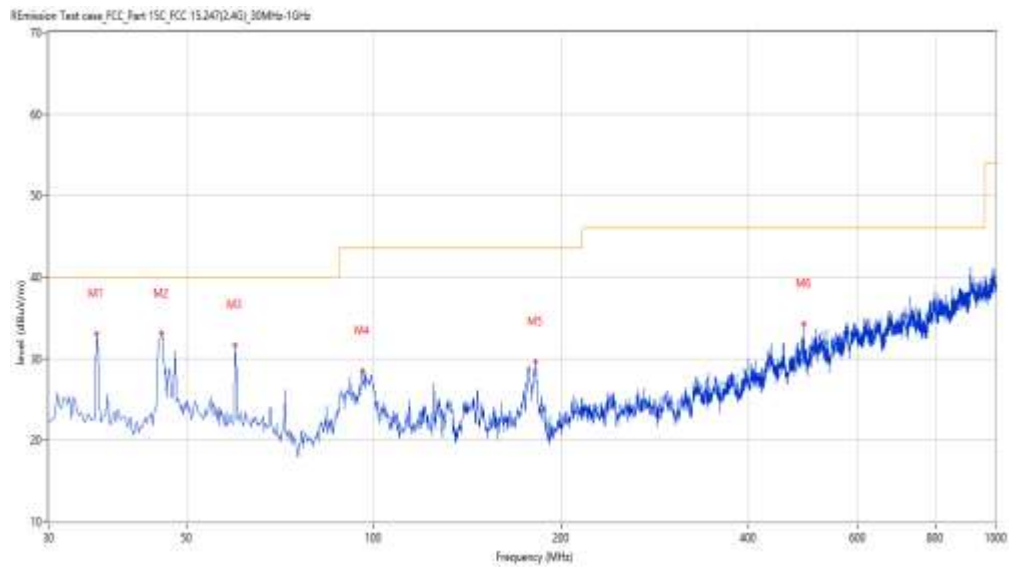

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 35.819          | 33.04            | -26.74      | 40.0           | -6.96           | Peak     | 1.00           | 100         | Vertical | Pass    |
| 2   | 45.516          | 33.10            | -24.72      | 40.0           | -6.90           | Peak     | 64.10          | 100         | Vertical | Pass    |
| 3   | 59.820          | 31.65            | -25.55      | 40.0           | -8.35           | Peak     | 348.00         | 100         | Vertical | Pass    |
| 4   | 95.944          | 28.47            | -26.85      | 43.5           | -15.03          | Peak     | 289.90         | 100         | Vertical | Pass    |
| 5   | 181.767         | 29.61            | -27.93      | 43.5           | -13.89          | Peak     | 255.00         | 100         | Vertical | Pass    |
| 6   | 491.605         | 34.28            | -19.47      | 46.0           | -11.72          | Peak     | 201.40         | 100         | Vertical | Pass    |

1-18G

Document number : SHE20070010-02HE

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.00.53

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

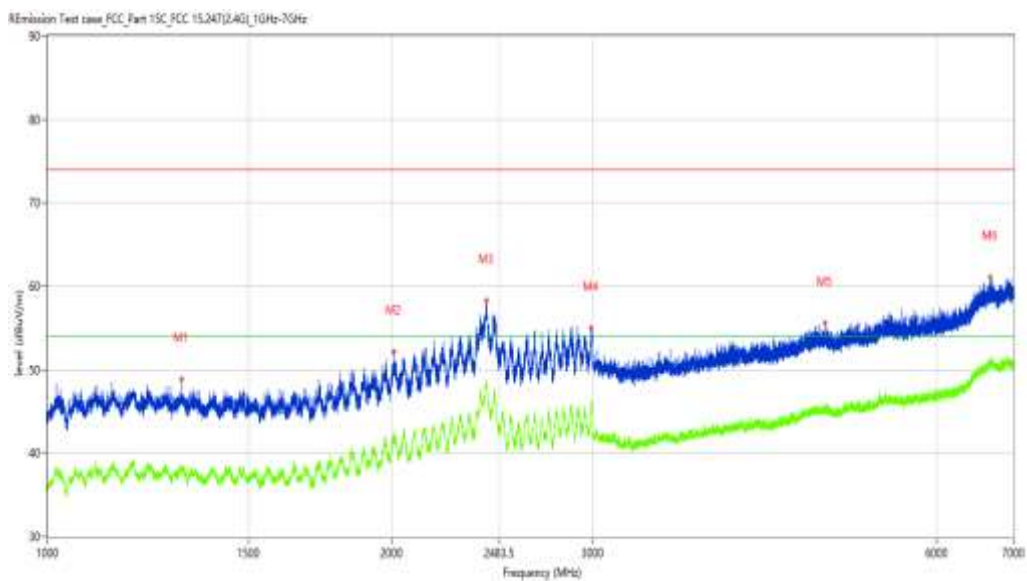

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1310.961        | 48.84            | -4.66       | 74.0           | -25.16          | Peak     | 302.20         | 100         | Horizontal | Pass    |
| 1** | 1310.961        | 37.77            | -4.66       | 54.0           | -16.23          | AV       | 302.20         | 100         | Horizontal | Pass    |
| 2   | 2010.374        | 52.22            | -2.32       | 74.0           | -21.78          | Peak     | 159.30         | 100         | Horizontal | Pass    |
| 2** | 2010.374        | 41.70            | -2.32       | 54.0           | -12.30          | AV       | 159.30         | 100         | Horizontal | Pass    |
| 3   | 2421.572        | 58.27            | 4.53        | 74.0           | -15.73          | Peak     | 154.90         | 100         | Horizontal | Pass    |
| 3** | 2421.572        | 48.06            | 4.53        | 54.0           | -5.94           | AV       | 154.90         | 100         | Horizontal | Pass    |
| 4   | 2991.251        | 54.97            | 3.15        | 74.0           | -19.03          | Peak     | 22.00          | 100         | Horizontal | Pass    |
| 4** | 2991.251        | 45.50            | 3.15        | 54.0           | -8.50           | AV       | 22.00          | 100         | Horizontal | Pass    |
| 5   | 4787.777        | 55.64            | 1.05        | 74.0           | -18.36          | Peak     | 52.30          | 100         | Horizontal | Pass    |
| 5** | 4787.777        | 45.27            | 1.05        | 54.0           | -8.73           | AV       | 52.30          | 100         | Horizontal | Pass    |
| 6   | 6677.540        | 61.12            | 5.71        | 74.0           | -12.88          | Peak     | 75.40          | 100         | Horizontal | Pass    |
| 6** | 6677.540        | 50.61            | 5.71        | 54.0           | -3.39           | AV       | 75.40          | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.10.22

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7786.303        | 35.38            | 4.80        | 74.0           | -38.62          | Peak     | 202.80         | 100         | Horizontal | Pass    |
| 1** | 7786.303        | 24.54            | 4.80        | 54.0           | -29.46          | AV       | 202.80         | 100         | Horizontal | Pass    |
| 2   | 8858.535        | 37.84            | 7.38        | 74.0           | -36.16          | Peak     | 202.80         | 100         | Horizontal | Pass    |
| 2** | 8858.535        | 28.06            | 7.38        | 54.0           | -25.94          | AV       | 202.80         | 100         | Horizontal | Pass    |
| 3   | 9886.778        | 40.72            | 9.80        | 74.0           | -33.28          | Peak     | 344.60         | 100         | Horizontal | Pass    |
| 3** | 9886.778        | 29.79            | 9.80        | 54.0           | -24.21          | AV       | 344.60         | 100         | Horizontal | Pass    |
| 4   | 11123.969       | 43.48            | 10.71       | 74.0           | -30.52          | Peak     | 62.20          | 100         | Horizontal | Pass    |
| 4** | 11123.969       | 32.56            | 10.71       | 54.0           | -21.44          | AV       | 62.20          | 100         | Horizontal | Pass    |
| 5   | 13606.598       | 46.48            | 14.55       | 74.0           | -27.52          | Peak     | 349.40         | 100         | Horizontal | Pass    |
| 5** | 13606.598       | 35.35            | 14.55       | 54.0           | -18.65          | AV       | 349.40         | 100         | Horizontal | Pass    |
| 6   | 16465.884       | 53.91            | 20.12       | 74.0           | -20.09          | Peak     | 90.80          | 100         | Horizontal | Pass    |
| 6** | 16465.884       | 43.15            | 20.12       | 54.0           | -10.85          | AV       | 90.80          | 100         | Horizontal | Pass    |



# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.03.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

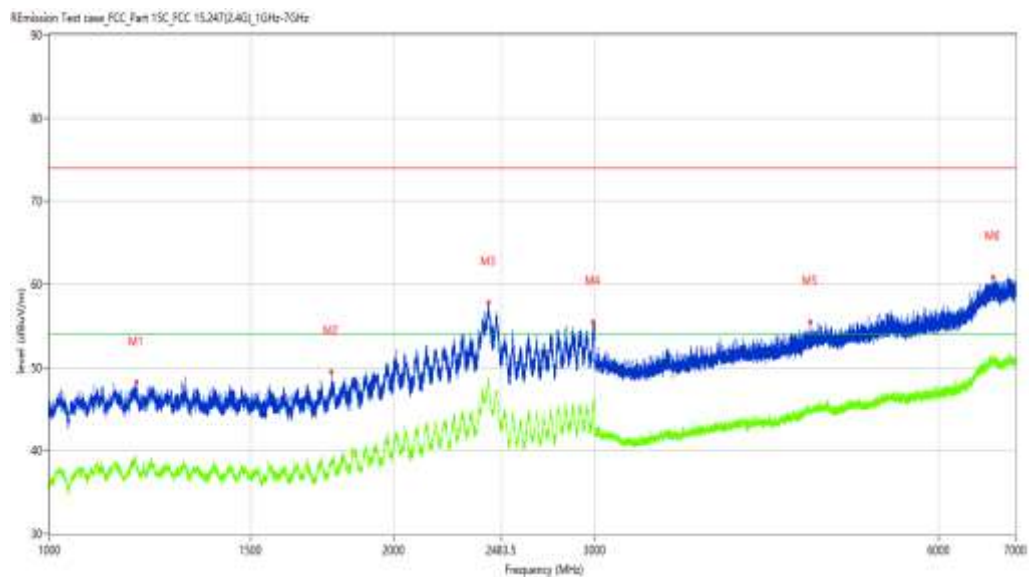

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1190.976        | 48.19            | -4.05       | 74.0           | -25.81          | Peak     | 310.70         | 100         | Vertical | Pass    |
| 1** | 1190.976        | 38.26            | -4.05       | 54.0           | -15.74          | AV       | 310.70         | 100         | Vertical | Pass    |
| 2   | 1763.155        | 49.50            | -5.14       | 74.0           | -24.50          | Peak     | 125.50         | 100         | Vertical | Pass    |
| 2** | 1763.155        | 38.48            | -5.14       | 54.0           | -15.52          | AV       | 125.50         | 100         | Vertical | Pass    |
| 3   | 2421.322        | 57.78            | 4.54        | 74.0           | -16.22          | Peak     | 218.80         | 100         | Vertical | Pass    |
| 3** | 2421.322        | 48.27            | 4.54        | 54.0           | -5.73           | AV       | 218.80         | 100         | Vertical | Pass    |
| 4   | 2991.751        | 55.53            | 3.18        | 74.0           | -18.47          | Peak     | 246.00         | 100         | Vertical | Pass    |
| 4** | 2991.751        | 45.69            | 3.18        | 54.0           | -8.31           | AV       | 246.00         | 100         | Vertical | Pass    |
| 5   | 4630.796        | 55.50            | 0.89        | 74.0           | -18.50          | Peak     | 115.90         | 100         | Vertical | Pass    |
| 5** | 4630.796        | 44.63            | 0.89        | 54.0           | -9.37           | AV       | 115.90         | 100         | Vertical | Pass    |
| 6   | 6693.038        | 60.88            | 5.89        | 74.0           | -13.12          | Peak     | 359.40         | 100         | Vertical | Pass    |
| 6** | 6693.038        | 50.93            | 5.89        | 54.0           | -3.07           | AV       | 359.40         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2020-07-24\_14.09.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

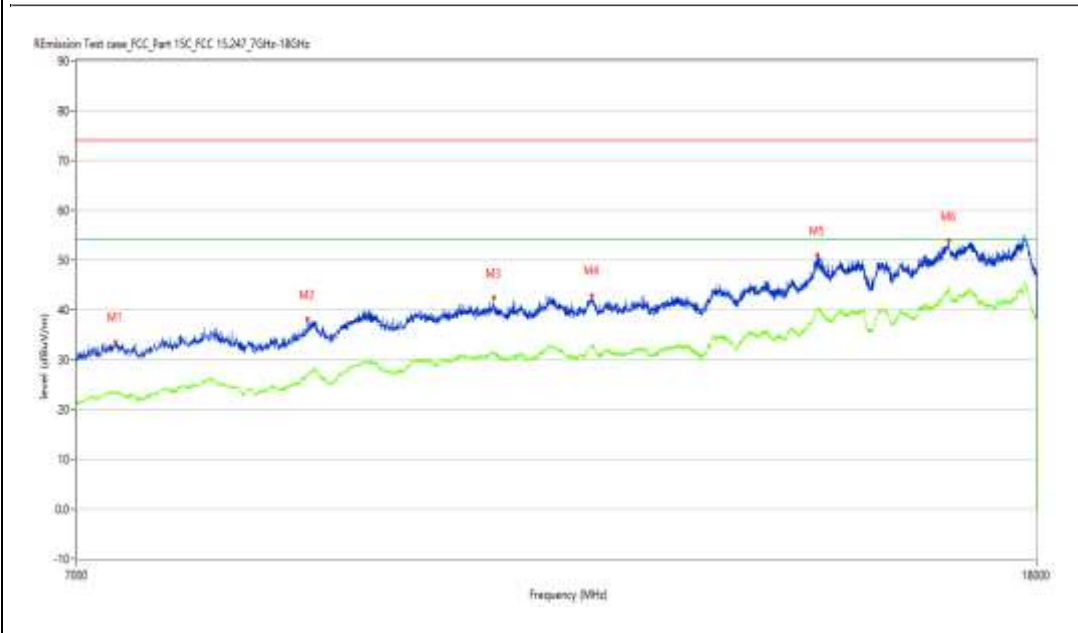

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7272.182        | 33.51            | 2.87        | 74.0           | -40.49          | Peak     | 234.10         | 100         | Vertical | Pass    |
| 1** | 7272.182        | 23.15            | 2.87        | 54.0           | -30.85          | AV       | 234.10         | 100         | Vertical | Pass    |
| 2   | 8787.053        | 38.09            | 6.71        | 74.0           | -35.91          | Peak     | 340.20         | 100         | Vertical | Pass    |
| 2** | 8787.053        | 26.74            | 6.71        | 54.0           | -27.26          | AV       | 340.20         | 100         | Vertical | Pass    |
| 3   | 10552.112       | 42.43            | 9.90        | 74.0           | -31.57          | Peak     | 330.90         | 100         | Vertical | Pass    |
| 3** | 10552.112       | 31.05            | 9.90        | 54.0           | -22.95          | AV       | 330.90         | 100         | Vertical | Pass    |
| 4   | 11618.845       | 42.94            | 11.29       | 74.0           | -31.06          | Peak     | 256.10         | 100         | Vertical | Pass    |
| 4** | 11618.845       | 32.89            | 11.29       | 54.0           | -21.11          | AV       | 256.10         | 100         | Vertical | Pass    |
| 5   | 14511.122       | 50.97            | 17.06       | 74.0           | -23.03          | Peak     | 106.40         | 100         | Vertical | Pass    |
| 5** | 14511.122       | 40.46            | 17.06       | 54.0           | -13.54          | AV       | 106.40         | 100         | Vertical | Pass    |
| 6   | 16515.371       | 53.79            | 20.19       | 74.0           | -20.21          | Peak     | 330.90         | 100         | Vertical | Pass    |
| 6** | 16515.371       | 43.79            | 20.19       | 54.0           | -10.21          | AV       | 330.90         | 100         | Vertical | Pass    |

## BT 3M-Bandedge-Hopping- Horizontal-DH5 –TX

# Test result

Project Number: Certification

Test Time: 2020-07-25\_12.14.58

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

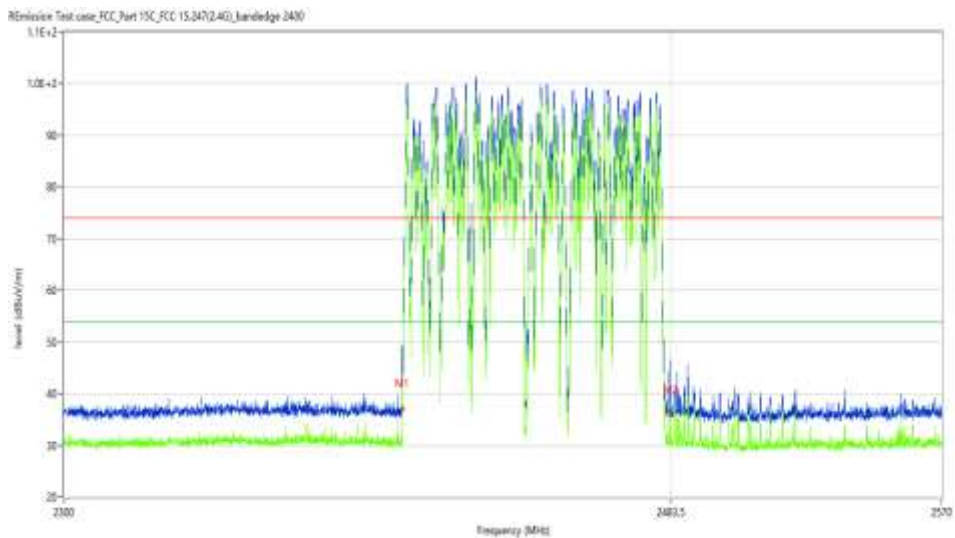

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2400.000        | 37.22            | -4.18       | 74.0           | -36.78          | Peak     | 58.21          | 100         | H       | Pass    |
| 1** | 2400.000        | 31.24            | -4.18       | 54.0           | -22.76          | AV       | 58.21          | 100         | H       | Pass    |
| 2   | 2483.500        | 35.83            | -3.87       | 74.0           | -38.17          | Peak     | 57.92          | 100         | H       | Pass    |
| 2** | 2483.500        | 30.00            | -3.87       | 54.0           | -24.00          | AV       | 57.92          | 100         | H       | Pass    |

## BT 3M-Bandedge-Hopping-Vertical-DH5 -TX

Document number : SHE20070010-02HE

# Test result

Project Number: Certification

Test Time: 2020-07-25\_12.11.23

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

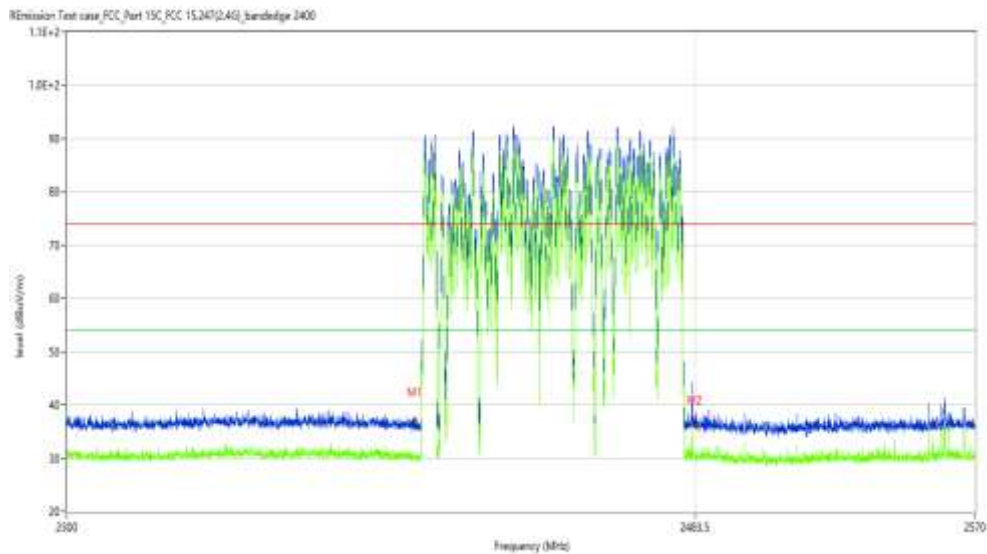

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2400.000        | 37.16            | -4.18       | 74.0           | -36.84          | Peak     | 35.40          | 100         | V       | Pass    |
| 1** | 2400.000        | 30.86            | -4.18       | 54.0           | -23.14          | AV       | 35.40          | 100         | V       | Pass    |
| 2   | 2483.500        | 35.89            | -3.87       | 74.0           | -38.11          | Peak     | 83.88          | 100         | V       | Pass    |
| 2** | 2483.500        | 30.00            | -3.87       | 54.0           | -24.00          | AV       | 83.88          | 100         | V       | Pass    |