

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2020-07-28_16.02.16

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

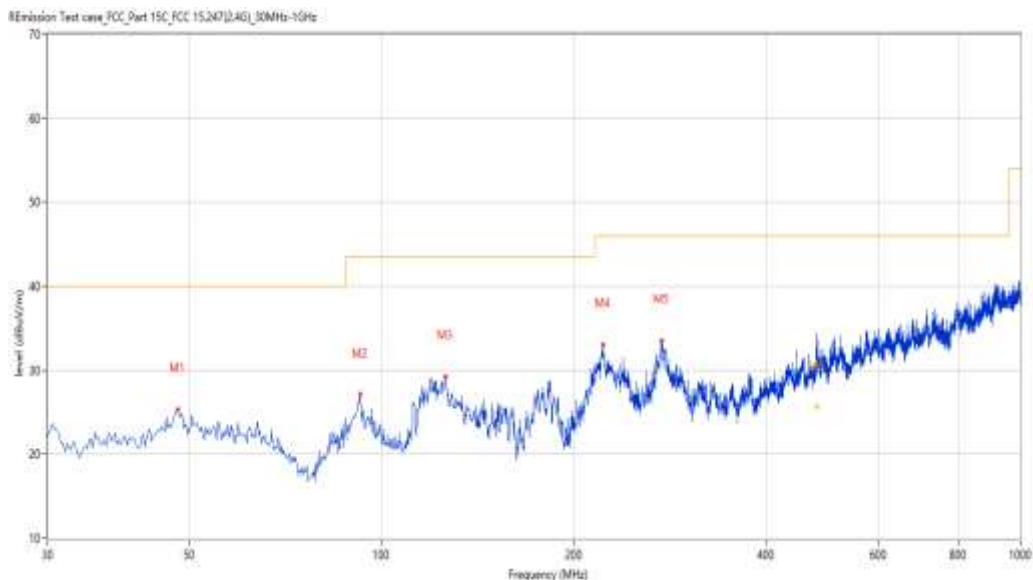

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.941	25.28	-23.67	40.0	-14.72	Peak	67.80	100	Horizontal	Pass
2	92.549	27.10	-27.44	43.5	-16.40	Peak	63.80	200	Horizontal	Pass
3	125.764	29.26	-29.10	43.5	-14.24	Peak	86.10	200	Horizontal	Pass
4	222.254	33.06	-26.39	46.0	-12.94	Peak	36.90	100	Horizontal	Pass
5	274.864	33.52	-24.48	46.0	-12.48	Peak	80.80	100	Horizontal	Pass
6	480.786	32.53	-19.30	46.0	-13.47	Peak	360.00	178	Horizontal	Pass
6*	480.786	25.65	-19.30	46.0	-20.35	QP	360.00	178	Horizontal	Pass

BLE-Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-07-28_16.05.10

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.0

Hum.: 58


Test Engineer: XCJ

Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RSE01-E20070010-01#05

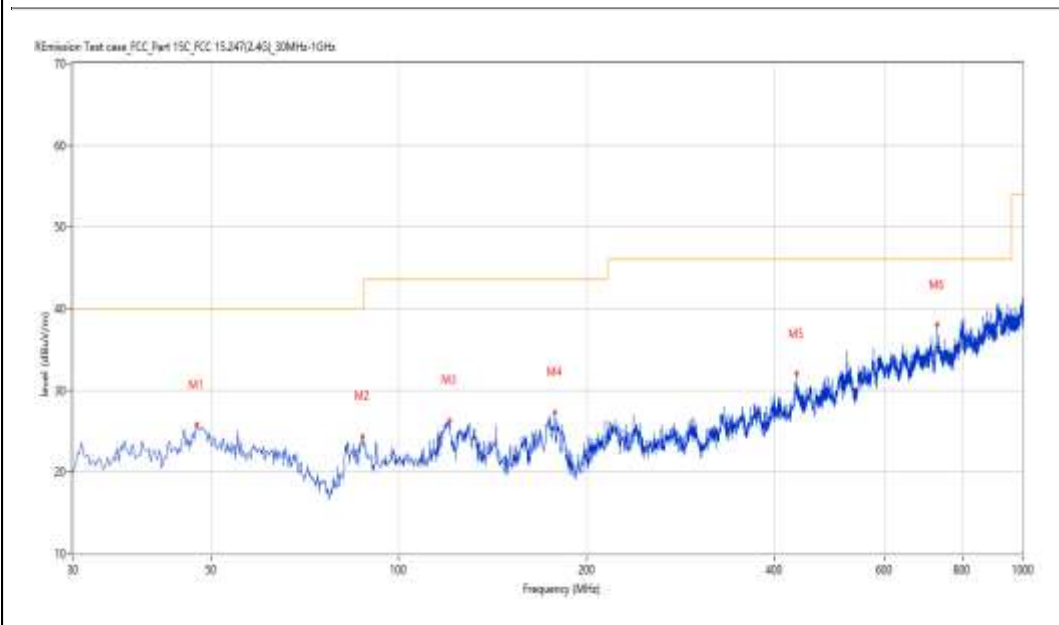

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.456	25.75	-23.88	40.0	-14.25	Peak	18.00	100	Vertical	Pass
2	87.458	24.29	-27.99	40.0	-15.71	Peak	0.00	200	Vertical	Pass
3	120.430	26.30	-27.25	43.5	-17.20	Peak	145.70	100	Vertical	Pass
4	177.888	27.32	-28.34	43.5	-16.18	Peak	330.30	100	Vertical	Pass
5	434.389	32.00	-19.52	46.0	-14.00	Peak	0.00	200	Vertical	Pass
6	729.438	37.99	-14.32	46.0	-8.01	Peak	0.00	200	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2020-07-28_16.08.29

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.0

Hum.: 58


Test Engineer: XCJ

Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RSE01-E20070010-01#05

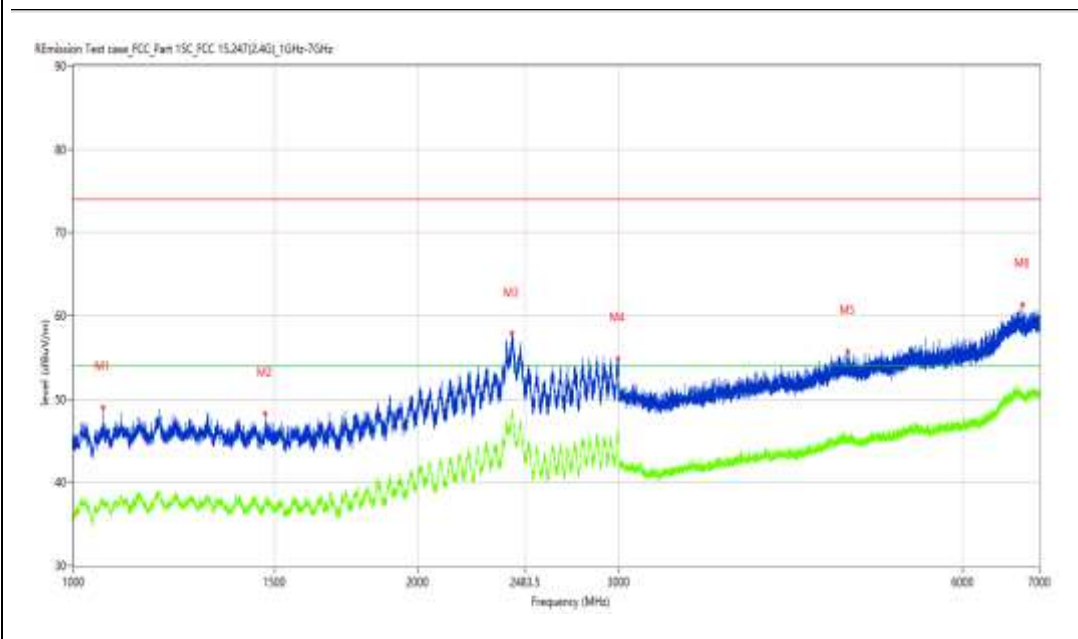

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1061.992	48.98	-4.93	74.0	-25.02	Peak	94.60	100	Horizontal	Pass
1**	1061.992	37.50	-4.93	54.0	-16.50	AV	94.60	100	Horizontal	Pass
2	1472.191	48.23	-4.92	74.0	-25.77	Peak	215.90	100	Horizontal	Pass
2**	1472.191	37.50	-4.92	54.0	-16.50	AV	215.90	100	Horizontal	Pass
3	2417.823	57.87	4.68	74.0	-16.13	Peak	173.90	100	Horizontal	Pass
3**	2417.823	47.77	4.68	54.0	-6.23	AV	173.90	100	Horizontal	Pass
4	2992.751	54.89	3.07	74.0	-19.11	Peak	300.40	100	Horizontal	Pass
4**	2992.751	45.43	3.07	54.0	-8.57	AV	300.40	100	Horizontal	Pass
5	4759.780	55.74	1.02	74.0	-18.26	Peak	70.80	100	Horizontal	Pass
5**	4759.780	44.98	1.02	54.0	-9.02	AV	70.80	100	Horizontal	Pass
6	6767.029	61.31	5.57	74.0	-12.69	Peak	292.60	100	Horizontal	Pass
6**	6767.029	50.05	5.57	54.0	-3.95	AV	292.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16:38.19

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7211.697	31.34	2.85	74.0	-42.66	Peak	0.00	100	Horizontal	Pass
1**	7211.697	23.19	2.85	54.0	-30.81	AV	0.00	100	Horizontal	Pass
2	7943.014	36.93	4.72	74.0	-37.07	Peak	208.80	100	Horizontal	Pass
2**	7943.014	25.64	4.72	54.0	-28.36	AV	208.80	100	Horizontal	Pass
3	10838.040	41.25	11.01	74.0	-32.75	Peak	2.40	100	Horizontal	Pass
3**	10838.040	30.83	11.01	54.0	-23.17	AV	2.40	100	Horizontal	Pass
4	12520.620	43.49	10.72	74.0	-30.51	Peak	241.90	100	Horizontal	Pass
4**	12520.620	32.32	10.72	54.0	-21.68	AV	241.90	100	Horizontal	Pass
5	14505.624	50.21	17.08	74.0	-23.79	Peak	339.40	100	Horizontal	Pass
5**	14505.624	40.24	17.08	54.0	-13.76	AV	339.40	100	Horizontal	Pass
6	17815.796	55.58	20.50	74.0	-18.42	Peak	302.90	100	Horizontal	Pass
6**	17815.796	45.14	20.50	54.0	-8.86	AV	302.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.22.41

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case_FCC_Part15C_FCC_15.247(2.4G)_1GHz-7GHz:

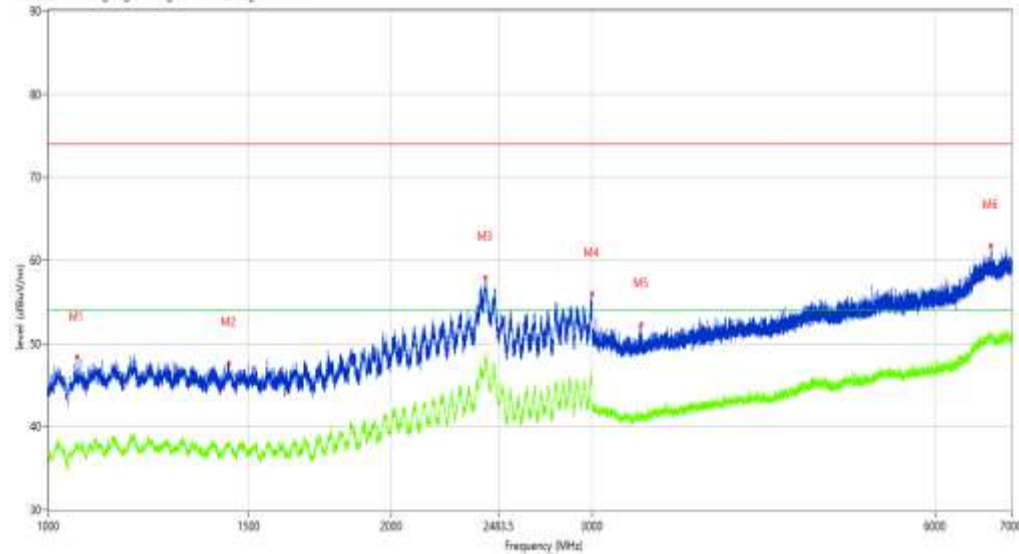

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1059.493	48.32	-4.52	74.0	-25.68	Peak	91.60	100	Vertical	Pass
1**	1059.493	37.34	-4.52	54.0	-16.66	AV	91.60	100	Vertical	Pass
2	1440.195	47.65	-5.11	74.0	-26.35	Peak	96.50	100	Vertical	Pass
2**	1440.195	37.81	-5.11	54.0	-16.19	AV	96.50	100	Vertical	Pass
3	2419.323	57.92	4.62	74.0	-16.08	Peak	44.00	100	Vertical	Pass
3**	2419.323	48.44	4.62	54.0	-5.56	AV	44.00	100	Vertical	Pass
4	2997.750	55.96	2.30	74.0	-18.04	Peak	124.40	100	Vertical	Pass
4**	2997.750	45.93	2.30	54.0	-8.07	AV	124.40	100	Vertical	Pass
5	3316.460	52.33	-1.69	74.0	-21.67	Peak	324.40	100	Vertical	Pass
5**	3316.460	40.72	-1.69	54.0	-13.28	AV	324.40	100	Vertical	Pass
6	6710.036	61.72	5.91	74.0	-12.28	Peak	315.40	100	Vertical	Pass
6**	6710.036	50.55	5.91	54.0	-3.45	AV	315.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.28.37

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7937.516	36.84	4.75	74.0	-37.16	Peak	69.10	100	Vertical	Pass
1**	7937.516	25.67	4.75	54.0	-28.33	AV	69.10	100	Vertical	Pass
2	9284.679	40.33	8.96	74.0	-33.67	Peak	274.30	100	Vertical	Pass
2**	9284.679	29.45	8.96	54.0	-24.55	AV	274.30	100	Vertical	Pass
3	10563.109	41.93	9.96	74.0	-32.07	Peak	27.80	100	Vertical	Pass
3**	10563.109	31.15	9.96	54.0	-22.85	AV	27.80	100	Vertical	Pass
4	13229.943	44.58	12.34	74.0	-29.42	Peak	5.30	100	Vertical	Pass
4**	13229.943	34.34	12.34	54.0	-19.66	AV	5.30	100	Vertical	Pass
5	14475.381	49.50	16.39	74.0	-24.50	Peak	32.30	100	Vertical	Pass
5**	14475.381	39.47	16.39	54.0	-14.53	AV	32.30	100	Vertical	Pass
6	17804.799	55.77	20.92	74.0	-18.23	Peak	144.00	100	Vertical	Pass
6**	17804.799	45.38	20.92	54.0	-8.62	AV	144.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.11.13

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

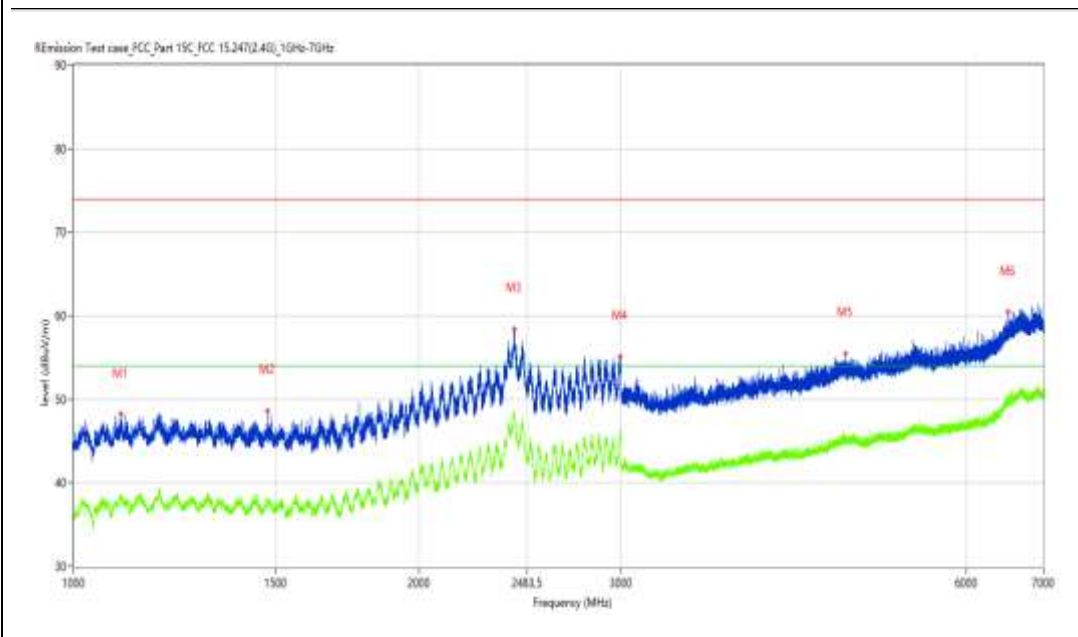

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1099.238	48.19	-3.72	74.0	-25.81	Peak	1.30	100	Horizontal	Pass
1**	1099.238	38.12	-3.72	54.0	-15.88	AV	1.30	100	Horizontal	Pass
2	1474.941	48.67	-5.06	74.0	-25.33	Peak	203.50	100	Horizontal	Pass
2**	1474.941	37.39	-5.06	54.0	-16.61	AV	203.50	100	Horizontal	Pass
3	2420.572	58.46	4.57	74.0	-15.54	Peak	48.70	100	Horizontal	Pass
3**	2420.572	48.41	4.57	54.0	-5.59	AV	48.70	100	Horizontal	Pass
4	2994.251	55.10	2.80	74.0	-18.90	Peak	0.00	100	Horizontal	Pass
4**	2994.251	46.51	2.80	54.0	-7.49	AV	0.00	100	Horizontal	Pass
5	4701.787	55.45	0.96	74.0	-18.55	Peak	5.00	100	Horizontal	Pass
5**	4701.787	45.04	0.96	54.0	-8.96	AV	5.00	100	Horizontal	Pass
6	6523.560	60.44	4.85	74.0	-13.56	Peak	173.30	100	Horizontal	Pass
6**	6523.560	50.04	4.85	54.0	-3.96	AV	173.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.36.22

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

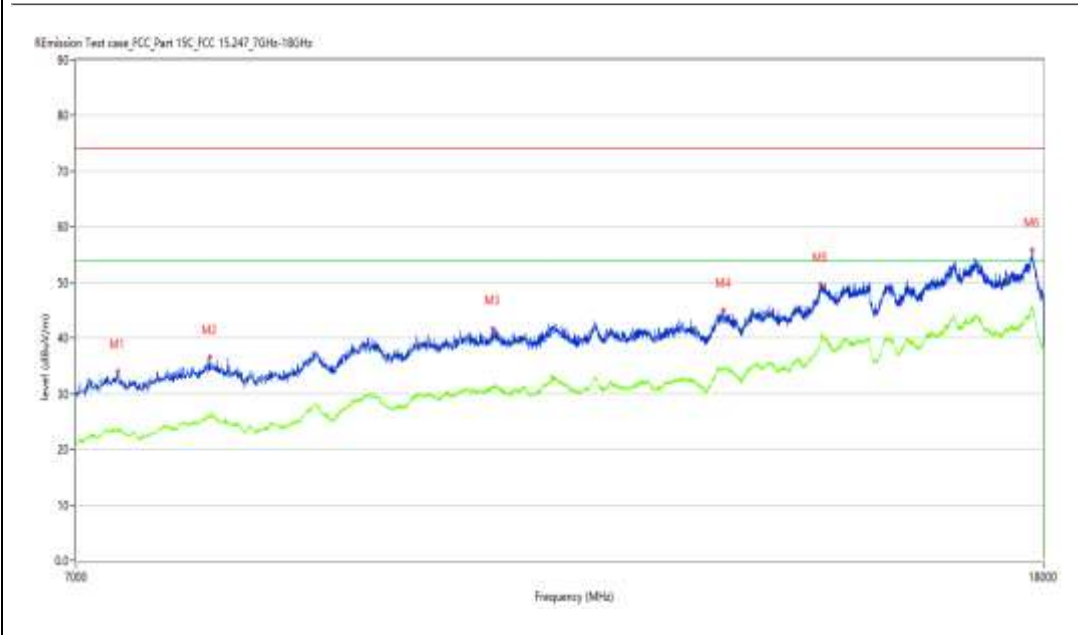

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7291.427	33.95	2.93	74.0	-40.05	Peak	235.60	100	Horizontal	Pass
1**	7291.427	23.39	2.93	54.0	-30.61	AV	235.60	100	Horizontal	Pass
2	7976.006	36.50	5.22	74.0	-37.50	Peak	122.10	100	Horizontal	Pass
2**	7976.006	26.18	5.22	54.0	-27.82	AV	122.10	100	Horizontal	Pass
3	10513.622	41.76	9.93	74.0	-32.24	Peak	301.10	100	Horizontal	Pass
3**	10513.622	31.48	9.93	54.0	-22.52	AV	301.10	100	Horizontal	Pass
4	13177.706	44.91	12.25	74.0	-29.09	Peak	10.10	100	Horizontal	Pass
4**	13177.706	34.60	12.25	54.0	-19.40	AV	10.10	100	Horizontal	Pass
5	14475.381	49.57	16.39	74.0	-24.43	Peak	89.80	100	Horizontal	Pass
5**	14475.381	39.21	16.39	54.0	-14.79	AV	89.80	100	Horizontal	Pass
6	17804.799	55.76	20.92	74.0	-18.24	Peak	352.50	100	Horizontal	Pass
6**	17804.799	45.26	20.92	54.0	-8.74	AV	352.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.30.42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7646.088	34.53	4.64	74.0	-39.47	Peak	290.60	100	Vertical	Pass
1**	7646.088	24.21	4.64	54.0	-29.79	AV	290.60	100	Vertical	Pass
2	9119.720	38.43	7.22	74.0	-35.57	Peak	109.80	100	Vertical	Pass
2**	9119.720	27.77	7.22	54.0	-26.23	AV	109.80	100	Vertical	Pass
3	11126.718	42.80	10.72	74.0	-31.20	Peak	295.10	100	Vertical	Pass
3**	11126.718	32.09	10.72	54.0	-21.91	AV	295.10	100	Vertical	Pass
4	12537.116	44.08	10.76	74.0	-29.92	Peak	151.80	100	Vertical	Pass
4**	12537.116	32.30	10.76	54.0	-21.70	AV	151.80	100	Vertical	Pass
5	14519.370	50.07	17.03	74.0	-23.93	Peak	239.60	100	Vertical	Pass
5**	14519.370	40.42	17.03	54.0	-13.58	AV	239.60	100	Vertical	Pass
6	17804.799	55.33	20.92	74.0	-18.67	Peak	350.10	100	Vertical	Pass
6**	17804.799	45.30	20.92	54.0	-8.70	AV	350.10	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.15.04

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

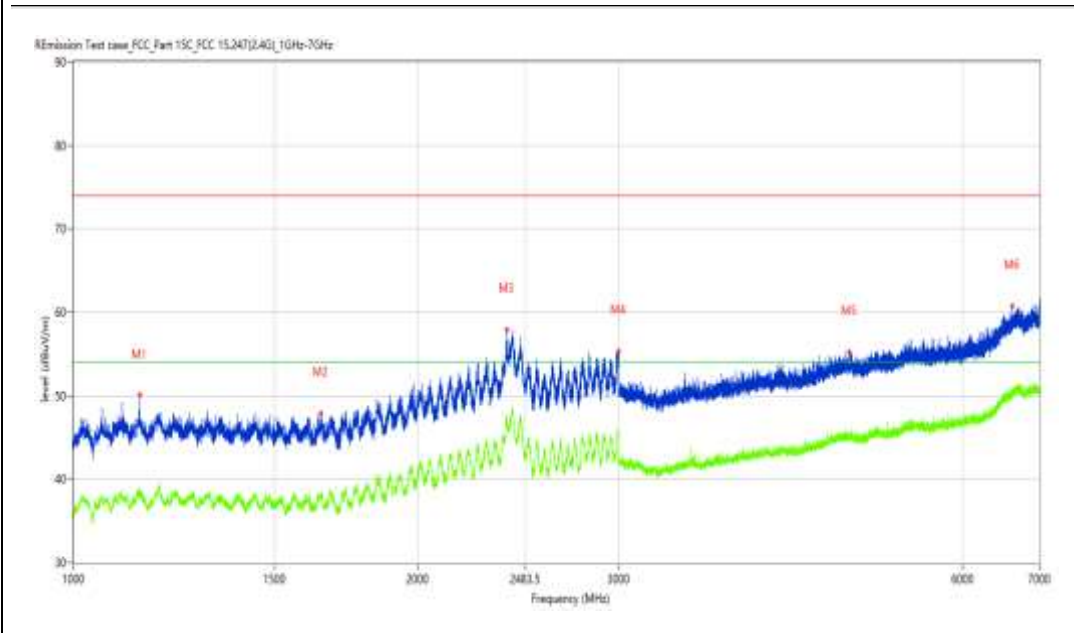

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1141.982	50.03	-4.10	74.0	-23.97	Peak	213.60	100	Horizontal	Pass
1**	1141.982	38.59	-4.10	54.0	-15.41	AV	213.60	100	Horizontal	Pass
2	1647.169	47.84	-4.82	74.0	-26.16	Peak	356.90	100	Horizontal	Pass
2**	1647.169	38.70	-4.82	54.0	-15.30	AV	356.90	100	Horizontal	Pass
3	2393.576	57.91	5.62	74.0	-16.09	Peak	180.80	100	Horizontal	Pass
3**	2393.576	46.82	5.62	54.0	-7.18	AV	180.80	100	Horizontal	Pass
4	2997.750	55.32	2.30	74.0	-18.68	Peak	302.50	100	Horizontal	Pass
4**	2997.750	45.28	2.30	54.0	-8.72	AV	302.50	100	Horizontal	Pass
5	4774.778	55.21	1.03	74.0	-18.79	Peak	357.30	100	Horizontal	Pass
5**	4774.778	45.37	1.03	54.0	-8.63	AV	357.30	100	Horizontal	Pass
6	6622.547	60.74	5.09	74.0	-13.26	Peak	201.90	100	Horizontal	Pass
6**	6622.547	50.60	5.09	54.0	-3.40	AV	201.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.34.27

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7316.171	34.15	3.04	74.0	-39.85	Peak	228.90	100	Horizontal	Pass
1**	7316.171	22.86	3.04	54.0	-31.14	AV	228.90	100	Horizontal	Pass
2	8201.450	35.62	5.03	74.0	-38.38	Peak	350.20	100	Horizontal	Pass
2**	8201.450	24.23	5.03	54.0	-29.77	AV	350.20	100	Horizontal	Pass
3	10846.288	41.60	11.17	74.0	-32.40	Peak	92.80	100	Horizontal	Pass
3**	10846.288	30.88	11.17	54.0	-23.12	AV	92.80	100	Horizontal	Pass
4	12501.375	43.71	10.67	74.0	-30.29	Peak	72.30	100	Horizontal	Pass
4**	12501.375	32.74	10.67	54.0	-21.26	AV	72.30	100	Horizontal	Pass
5	14527.618	50.00	17.00	74.0	-24.00	Peak	126.70	100	Horizontal	Pass
5**	14527.618	40.51	17.00	54.0	-13.49	AV	126.70	100	Horizontal	Pass
6	16498.875	53.83	20.80	74.0	-20.17	Peak	257.90	100	Horizontal	Pass
6**	16498.875	44.09	20.80	54.0	-9.91	AV	257.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16.18.43

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case FCC Part 15C FCC 15.247(2)(a)(i) 1GHz-7GHz:

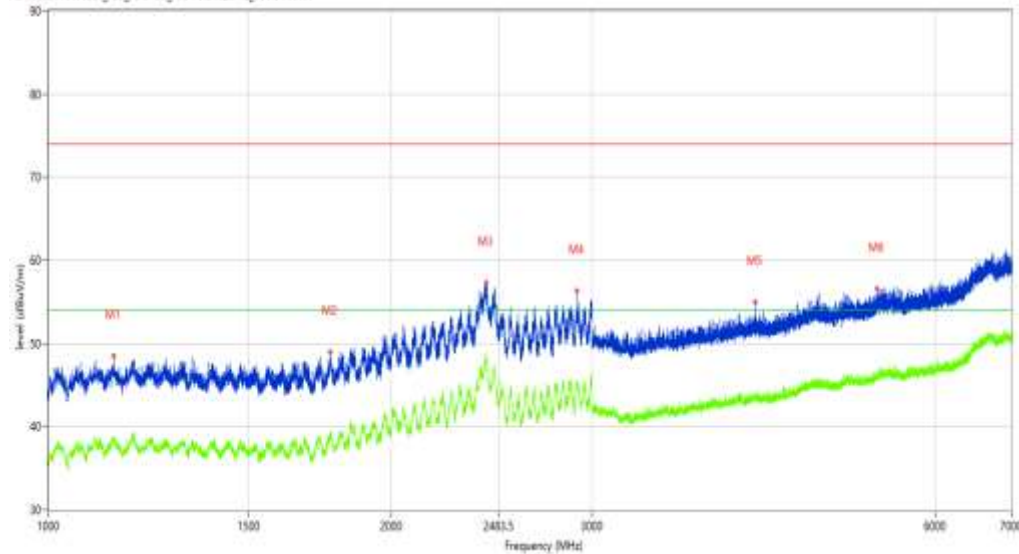

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.982	48.50	-4.03	74.0	-25.50	Peak	336.80	100	Vertical	Pass
1**	1140.982	38.45	-4.03	54.0	-15.55	AV	336.80	100	Vertical	Pass
2	1768.154	49.03	-4.88	74.0	-24.97	Peak	60.70	100	Vertical	Pass
2**	1768.154	39.48	-4.88	54.0	-14.52	AV	60.70	100	Vertical	Pass
3	2421.572	57.31	4.53	74.0	-16.69	Peak	360.00	100	Vertical	Pass
3**	2421.572	48.90	4.53	54.0	-5.10	AV	360.00	100	Vertical	Pass
4	2909.011	56.29	2.25	74.0	-17.71	Peak	284.00	100	Vertical	Pass
4**	2909.011	45.40	2.25	54.0	-8.60	AV	284.00	100	Vertical	Pass
5	4173.353	55.03	-0.04	74.0	-18.97	Peak	21.80	100	Vertical	Pass
5**	4173.353	43.20	-0.04	54.0	-10.80	AV	21.80	100	Vertical	Pass
6	5334.208	56.56	1.46	74.0	-17.44	Peak	148.30	100	Vertical	Pass
6**	5334.208	46.25	1.46	54.0	-7.75	AV	148.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-07-28_16:32.37

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7197.951	31.31	2.84	74.0	-42.69	Peak	38.00	100	Vertical	Pass
1**	7197.951	22.79	2.84	54.0	-31.21	AV	38.00	100	Vertical	Pass
2	8836.541	38.53	7.35	74.0	-35.47	Peak	186.80	100	Vertical	Pass
2**	8836.541	27.91	7.35	54.0	-26.09	AV	186.80	100	Vertical	Pass
3	10153.462	41.63	9.97	74.0	-32.37	Peak	172.70	100	Vertical	Pass
3**	10153.462	30.31	9.97	54.0	-23.69	AV	172.70	100	Vertical	Pass
4	11624.344	43.23	11.20	74.0	-30.77	Peak	29.00	100	Vertical	Pass
4**	11624.344	32.94	11.20	54.0	-21.06	AV	29.00	100	Vertical	Pass
5	14538.615	49.82	16.96	74.0	-24.18	Peak	70.70	100	Vertical	Pass
5**	14538.615	39.65	16.96	54.0	-14.35	AV	70.70	100	Vertical	Pass
6	16493.377	54.12	20.68	74.0	-19.88	Peak	205.10	100	Vertical	Pass
6**	16493.377	44.08	20.68	54.0	-9.92	AV	205.10	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2020-07-25_12.27.30

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case: FCC Part 15C FCC 15.247(2.4G) Bandedge 2400

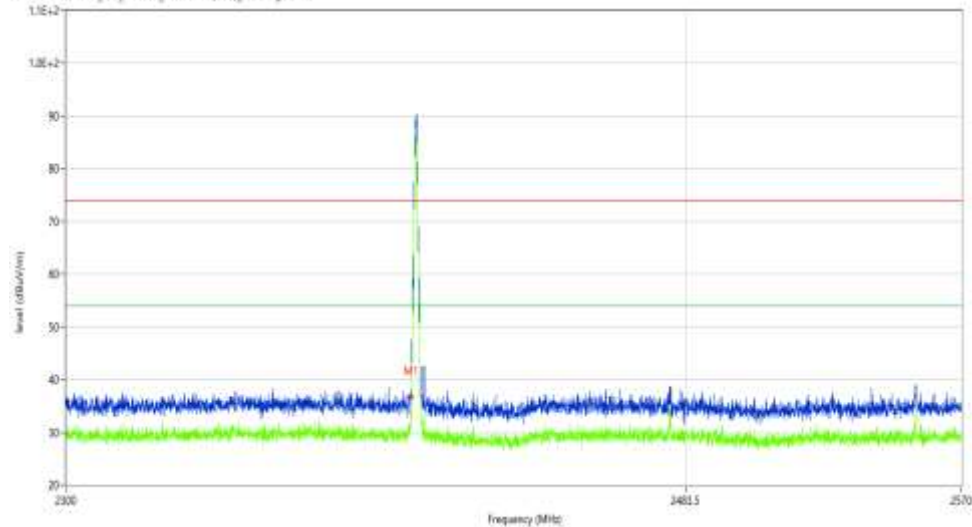

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	36.55	-4.18	74.0	-37.45	Peak	360.00	100	H	Pass
1**	2400.000	30.17	-4.18	54.0	-23.83	AV	360.00	100	H	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2020-07-25_12.37.02

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

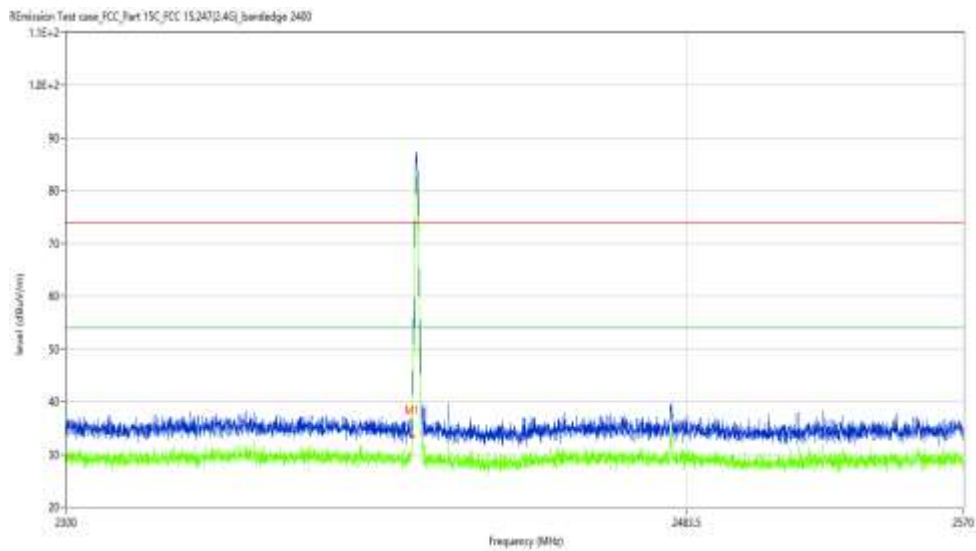

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	33.39	-4.18	74.0	-40.61	Peak	350.10	100	V	Pass
1**	2400.000	28.35	-4.18	54.0	-25.65	AV	350.10	100	V	Pass

BLE-Bandedge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2020-07-25_12.30.43

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

REmission Test case: FCC Part 15C, FCC 15.247(2.4G), bandedge 2400

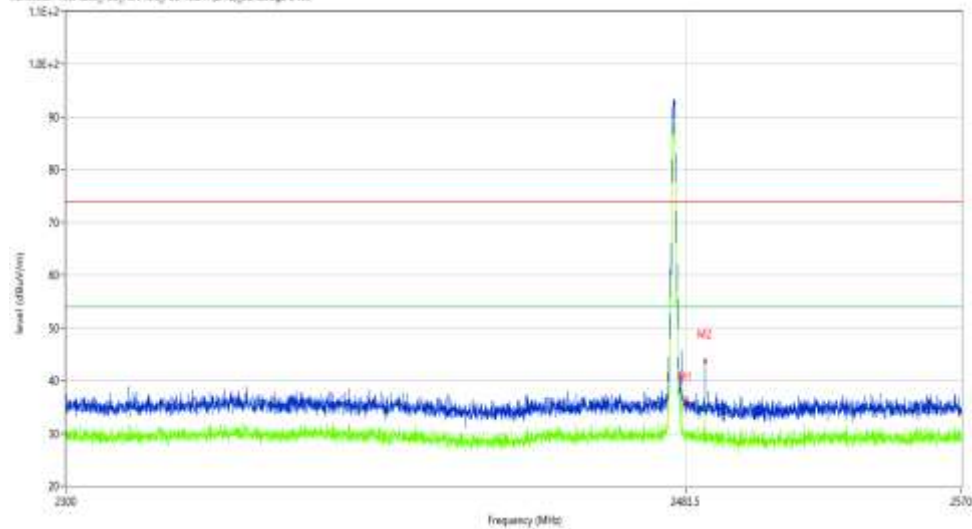

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	35.92	-3.87	74.0	-38.08	Peak	2.40	100	H	Pass
1**	2483.500	29.24	-3.87	54.0	-24.76	AV	2.40	100	H	Pass
2	2489.628	43.77	-4.07	74.0	-30.23	Peak	0.60	100	Horizontal	Pass
2**	2489.628	36.57	-4.07	54.0	-17.43	AV	0.60	100	Horizontal	Pass

BLE-Bandedge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2020-07-25_12.34.52

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20070010-01#05

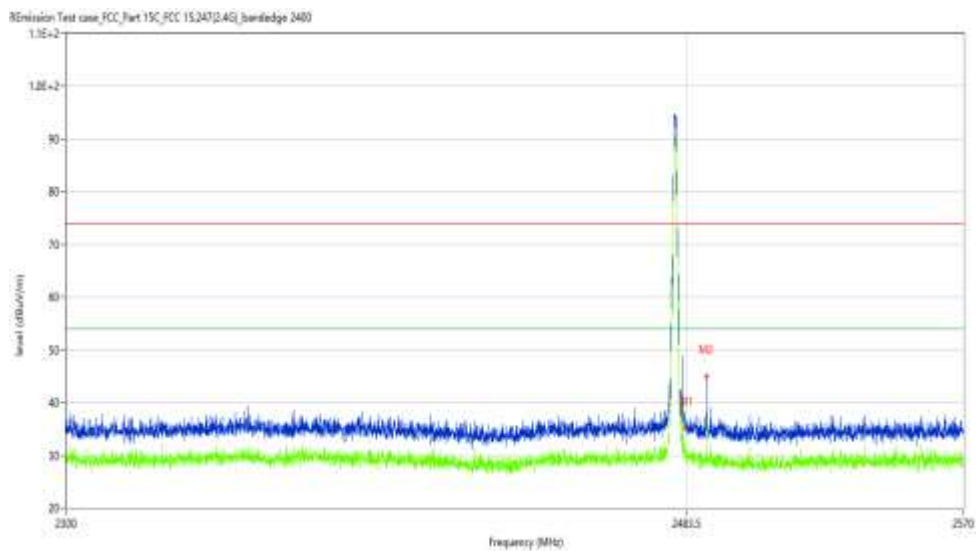

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	35.15	-3.87	74.0	-38.85	Peak	356.57	100	V	Pass
1**	2483.500	29.09	-3.87	54.0	-24.91	AV	356.57	100	V	Pass
2	2489.628	45.04	-4.07	74.0	-28.96	Peak	351.80	100	Vertical	Pass
2**	2489.628	37.67	-4.07	54.0	-16.33	AV	351.80	100	Vertical	Pass