

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BT-Horizontal-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.00.28

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_30MHz-1GHz

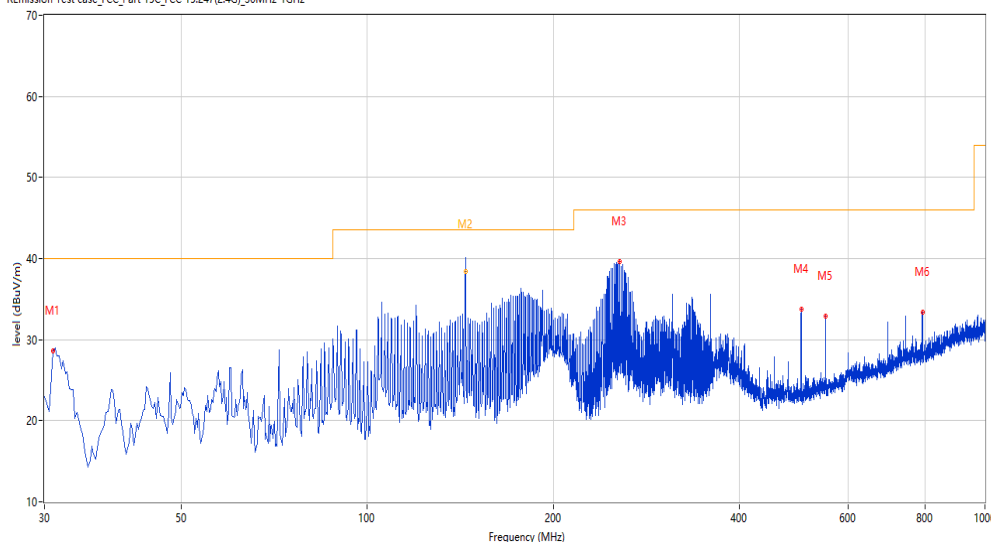

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	22.93	-23.75	40.0	-17.07	Peak	127.90	100	Horizontal	Pass
2	144.328	39.95	-24.28	43.5	-3.55	Peak	125.60	138	Horizontal	Pass
2*	144.328	38.40	-24.28	43.5	-5.10	QP	125.60	138	Horizontal	Pass
3	256.438	39.63	-18.49	46.0	-6.37	Peak	300.00	100	Horizontal	Pass
4	503.969	33.78	-12.47	46.0	-12.22	Peak	0.00	200	Horizontal	Pass
5	551.972	32.87	-11.31	46.0	-13.13	Peak	13.40	200	Horizontal	Pass
6	791.987	33.42	-6.57	46.0	-12.58	Peak	323.10	100	Horizontal	Pass

BT-Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.51.53

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_30MHz-1GHz

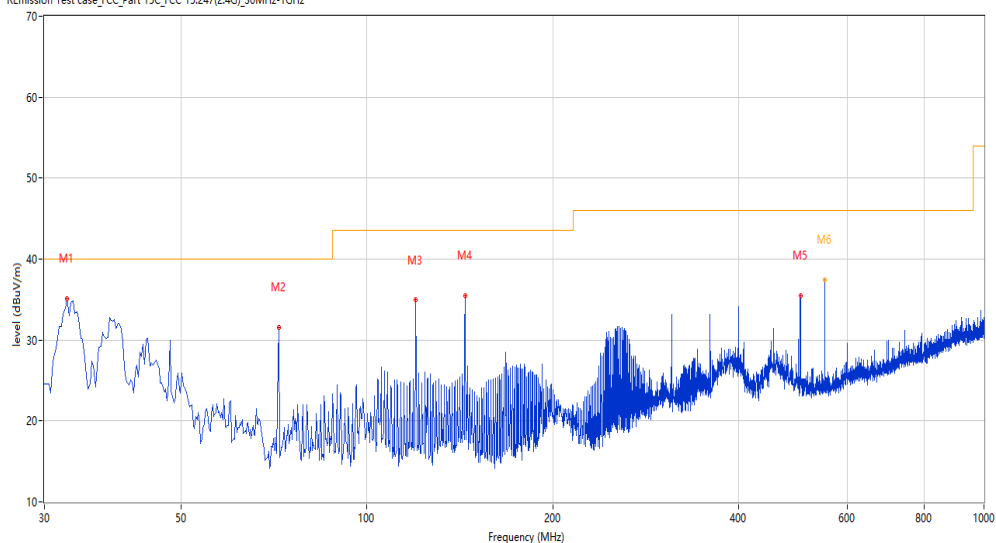

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.667	35.15	-23.78	40.0	-4.85	Peak	103.90	100	Vertical	Pass
2	71.942	31.54	-24.25	40.0	-8.46	Peak	360.00	200	Vertical	Pass
3	119.945	34.92	-22.71	43.5	-8.58	Peak	271.70	100	Vertical	Pass
4	144.189	35.46	-24.28	43.5	-8.04	Peak	85.70	100	Vertical	Pass
5	503.969	35.48	-12.47	46.0	-10.52	Peak	360.00	200	Vertical	Pass
6	551.999	38.53	-11.31	46.0	-7.47	Peak	243.40	100	Vertical	Pass
6*	551.999	37.39	-11.31	46.0	-8.61	QP	243.40	100	Vertical	Pass

1-18G

BT-Low channel-Horizontal-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.26.45

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz

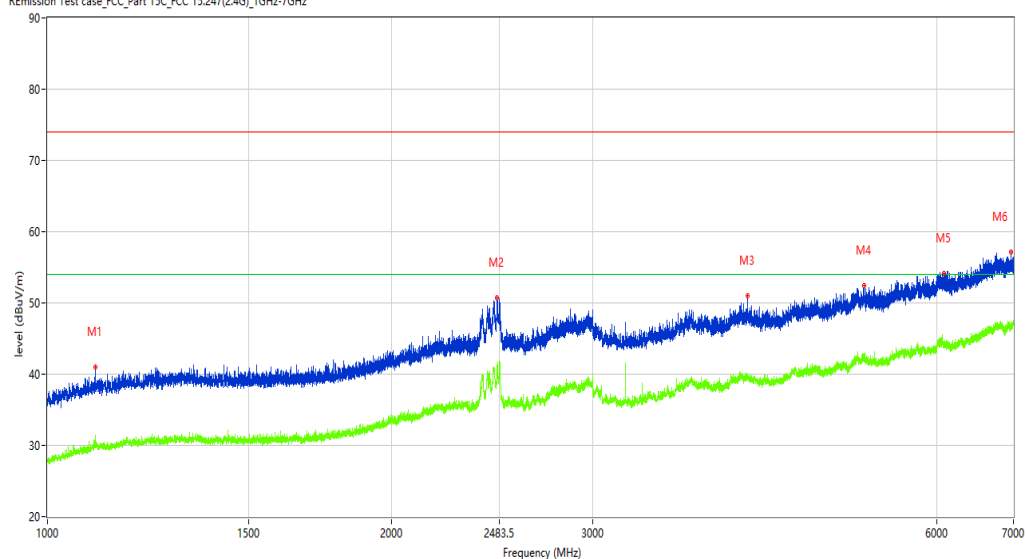

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1100.487	40.98	-13.61	74.0	-33.02	Peak	335.40	100	Horizontal	Pass
1**	1100.487	31.12	-13.61	54.0	-22.88	AV	335.40	100	Horizontal	Pass
2	2474.316	50.66	-2.71	74.0	-23.34	Peak	126.20	100	Horizontal	Pass
2**	2474.316	41.34	-2.71	54.0	-12.66	AV	126.20	100	Horizontal	Pass
3	4097.863	50.97	-1.42	74.0	-23.03	Peak	217.00	100	Horizontal	Pass
3**	4097.863	39.98	-1.42	54.0	-14.02	AV	217.00	100	Horizontal	Pass
4	5180.227	52.39	0.26	74.0	-21.61	Peak	107.10	100	Horizontal	Pass
4**	5180.227	42.54	0.26	54.0	-11.46	AV	107.10	100	Horizontal	Pass
5	6085.614	54.19	2.01	74.0	-19.81	Peak	230.60	100	Horizontal	Pass
5**	6085.614	44.20	2.01	54.0	-9.80	AV	230.60	100	Horizontal	Pass
6	6963.005	57.09	3.87	74.0	-16.91	Peak	13.70	100	Horizontal	Pass
6**	6963.005	46.55	3.87	54.0	-7.45	AV	13.70	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10:37:54

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8484.629	36.94	7.27	74.0	-37.06	Peak	98.30	100	Horizontal	Pass
1**	8484.629	28.90	7.27	54.0	-25.10	AV	98.30	100	Horizontal	Pass
2	12484.879	47.64	16.76	74.0	-26.36	Peak	356.10	100	Horizontal	Pass
2**	12484.879	38.44	16.76	54.0	-15.56	AV	356.10	100	Horizontal	Pass
3	14192.202	52.65	22.26	74.0	-21.35	Peak	89.00	100	Horizontal	Pass
3**	14192.202	43.87	22.26	54.0	-10.13	AV	89.00	100	Horizontal	Pass
4	16056.236	52.68	20.52	74.0	-21.32	Peak	223.70	100	Horizontal	Pass
4**	16056.236	45.23	20.52	54.0	-8.77	AV	223.70	100	Horizontal	Pass
5	17397.901	56.72	24.31	74.0	-17.28	Peak	98.30	100	Horizontal	Pass
5**	17397.901	46.76	24.31	54.0	-7.24	AV	98.30	100	Horizontal	Pass
6	17810.297	57.57	24.75	74.0	-16.43	Peak	46.60	100	Horizontal	Pass
6**	17810.297	49.66	24.75	54.0	-4.34	AV	46.60	100	Horizontal	Pass

BT-Low channel-Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.37.58

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

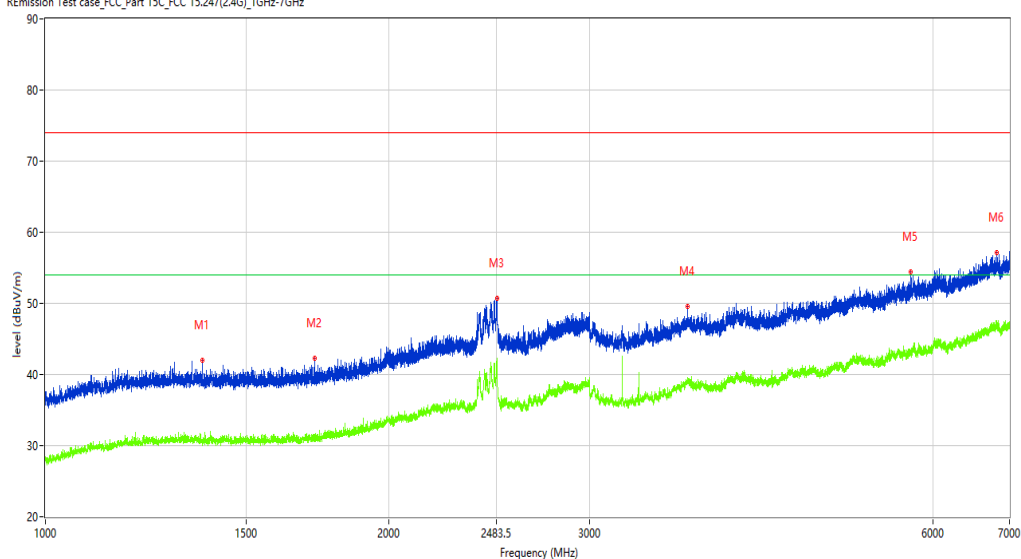

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1372.453	41.94	-13.05	74.0	-32.06	Peak	43.20	100	Vertical	Pass
1**	1372.453	30.92	-13.05	54.0	-23.08	AV	43.20	100	Vertical	Pass
2	1722.660	42.26	-12.71	74.0	-31.74	Peak	165.70	100	Vertical	Pass
2**	1722.660	30.68	-12.71	54.0	-23.32	AV	165.70	100	Vertical	Pass
3	2487.064	50.70	-2.44	74.0	-23.30	Peak	188.00	100	Vertical	Pass
3**	2487.064	42.29	-2.44	54.0	-11.71	AV	188.00	100	Vertical	Pass
4	3654.918	49.58	-2.28	74.0	-24.42	Peak	204.60	100	Vertical	Pass
4**	3654.918	38.90	-2.28	54.0	-15.10	AV	204.60	100	Vertical	Pass
5	5736.158	54.43	1.00	74.0	-19.57	Peak	275.30	100	Vertical	Pass
5**	5736.158	43.07	1.00	54.0	-10.93	AV	275.30	100	Vertical	Pass
6	6823.022	57.15	3.91	74.0	-16.85	Peak	293.50	100	Vertical	Pass
6**	6823.022	46.76	3.91	54.0	-7.24	AV	293.50	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.29.35

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8985.004	38.59	11.43	74.0	-35.41	Peak	229.70	100	Vertical	Pass
1**	8985.004	29.32	11.43	54.0	-24.68	AV	229.70	100	Vertical	Pass
2	10838.040	44.42	14.55	74.0	-29.58	Peak	146.70	100	Vertical	Pass
2**	10838.040	35.44	14.55	54.0	-18.56	AV	146.70	100	Vertical	Pass
3	14189.453	52.32	22.33	74.0	-21.68	Peak	160.10	100	Vertical	Pass
3**	14189.453	43.43	22.33	54.0	-10.57	AV	160.10	100	Vertical	Pass
4	15063.734	51.50	18.50	74.0	-22.50	Peak	283.60	100	Vertical	Pass
4**	15063.734	42.22	18.50	54.0	-11.78	AV	283.60	100	Vertical	Pass
5	17483.129	55.83	25.16	74.0	-18.17	Peak	132.50	100	Vertical	Pass
5**	17483.129	47.91	25.16	54.0	-6.09	AV	132.50	100	Vertical	Pass
6	17793.802	57.31	25.08	74.0	-16.69	Peak	17.60	100	Vertical	Pass
6**	17793.802	49.23	25.08	54.0	-4.77	AV	17.60	100	Vertical	Pass

BT-Middle channel-Horizontal-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.32.00

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

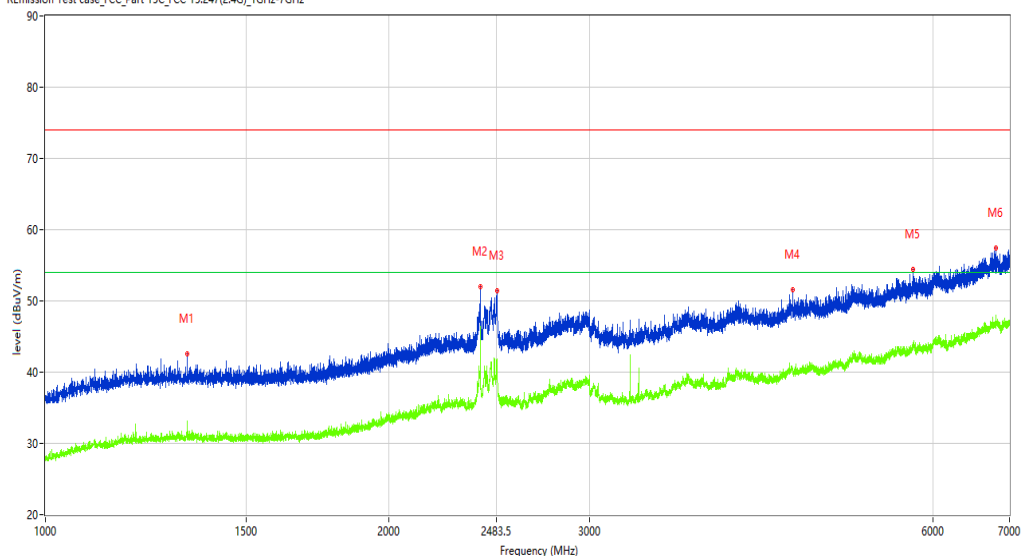

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.959	42.55	-13.07	74.0	-31.45	Peak	67.40	100	Horizontal	Pass
1**	1331.959	32.93	-13.07	54.0	-21.07	AV	67.40	100	Horizontal	Pass
2	2407.574	51.99	-4.28	74.0	-22.01	Peak	48.80	100	Horizontal	Pass
2**	2407.574	46.40	-4.28	54.0	-7.60	AV	48.80	100	Horizontal	Pass
3	2487.314	51.40	-2.44	74.0	-22.60	Peak	227.10	100	Horizontal	Pass
3**	2487.314	41.67	-2.44	54.0	-12.33	AV	227.10	100	Horizontal	Pass
4	4517.310	51.51	-0.82	74.0	-22.49	Peak	111.20	100	Horizontal	Pass
4**	4517.310	40.09	-0.82	54.0	-13.91	AV	111.20	100	Horizontal	Pass
5	5763.155	54.42	1.36	74.0	-19.58	Peak	360.00	100	Horizontal	Pass
5**	5763.155	43.43	1.36	54.0	-10.57	AV	360.00	100	Horizontal	Pass
6	6811.524	57.41	3.95	74.0	-16.59	Peak	129.50	100	Horizontal	Pass
6**	6811.524	47.15	3.95	54.0	-6.85	AV	129.50	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.36.31

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9862.034	42.90	12.62	74.0	-31.10	Peak	135.10	100	Horizontal	Pass
1**	9862.034	33.67	12.62	54.0	-20.33	AV	135.10	100	Horizontal	Pass
2	12451.887	48.88	17.14	74.0	-25.12	Peak	250.50	100	Horizontal	Pass
2**	12451.887	40.11	17.14	54.0	-13.89	AV	250.50	100	Horizontal	Pass
3	14189.453	52.24	22.33	74.0	-21.76	Peak	0.40	100	Horizontal	Pass
3**	14189.453	43.63	22.33	54.0	-10.37	AV	0.40	100	Horizontal	Pass
4	16053.487	52.68	20.53	74.0	-21.32	Peak	357.00	100	Horizontal	Pass
4**	16053.487	43.73	20.53	54.0	-10.27	AV	357.00	100	Horizontal	Pass
5	17422.644	55.77	24.57	74.0	-18.23	Peak	126.20	100	Horizontal	Pass
5**	17422.644	47.62	24.57	54.0	-6.38	AV	126.20	100	Horizontal	Pass
6	17804.799	57.18	24.91	74.0	-16.82	Peak	153.00	100	Horizontal	Pass
6**	17804.799	49.20	24.91	54.0	-4.80	AV	153.00	100	Horizontal	Pass

BT-Middle channel-Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.35.02

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

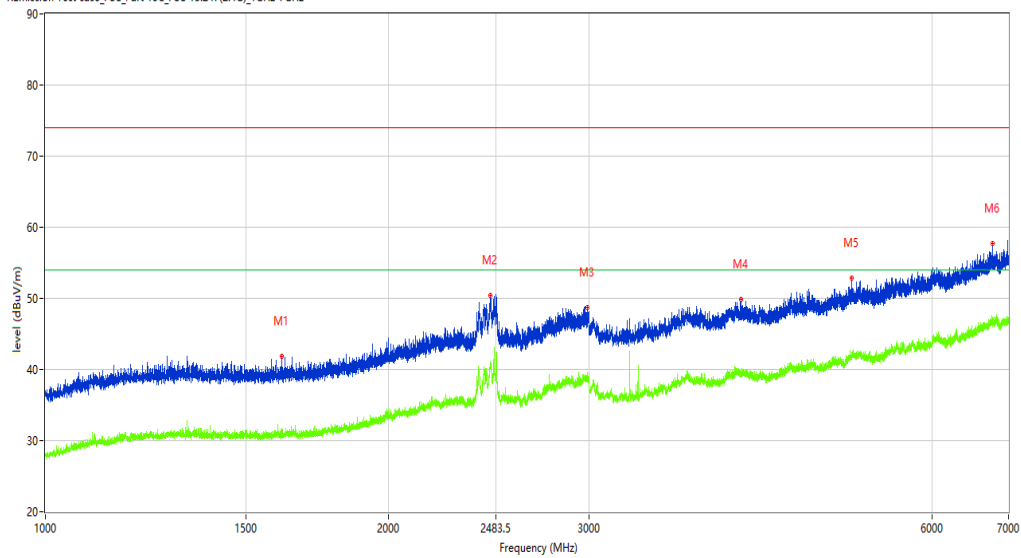

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1613.423	41.84	-13.14	74.0	-32.16	Peak	106.00	100	Vertical	Pass
1**	1613.423	30.86	-13.14	54.0	-23.14	AV	106.00	100	Vertical	Pass
2	2458.068	50.45	-3.11	74.0	-23.55	Peak	293.30	100	Vertical	Pass
2**	2458.068	40.68	-3.11	54.0	-13.32	AV	293.30	100	Vertical	Pass
3	2987.502	48.74	-3.17	74.0	-25.26	Peak	344.30	100	Vertical	Pass
3**	2987.502	38.33	-3.17	54.0	-15.67	AV	344.30	100	Vertical	Pass
4	4076.365	49.79	-1.16	74.0	-24.21	Peak	198.50	100	Vertical	Pass
4**	4076.365	39.29	-1.16	54.0	-14.71	AV	198.50	100	Vertical	Pass
5	5097.238	52.82	0.31	74.0	-21.18	Peak	23.00	100	Vertical	Pass
5**	5097.238	41.59	0.31	54.0	-12.41	AV	23.00	100	Vertical	Pass
6	6775.028	57.70	4.00	74.0	-16.30	Peak	307.20	100	Vertical	Pass
6**	6775.028	47.34	4.00	54.0	-6.66	AV	307.20	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.33.11

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7162.209	31.49	4.65	74.0	-42.51	Peak	7.50	100	Vertical	Pass
1**	7162.209	24.54	4.65	54.0	-29.46	AV	7.50	100	Vertical	Pass
2	11165.209	45.26	14.24	74.0	-28.74	Peak	7.50	100	Vertical	Pass
2**	11165.209	35.46	14.24	54.0	-18.54	AV	7.50	100	Vertical	Pass
3	14137.216	52.37	20.84	74.0	-21.63	Peak	0.40	100	Vertical	Pass
3**	14137.216	42.24	20.84	54.0	-11.76	AV	0.40	100	Vertical	Pass
4	16094.726	52.84	20.44	74.0	-21.16	Peak	48.80	100	Vertical	Pass
4**	16094.726	43.77	20.44	54.0	-10.23	AV	48.80	100	Vertical	Pass
5	17461.135	55.90	24.94	74.0	-18.10	Peak	268.40	100	Vertical	Pass
5**	17461.135	47.36	24.94	54.0	-6.64	AV	268.40	100	Vertical	Pass
6	17802.049	58.09	25.00	74.0	-15.91	Peak	62.20	100	Vertical	Pass
6**	17802.049	49.54	25.00	54.0	-4.46	AV	62.20	100	Vertical	Pass

BT-High channel-Horizontal-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.23.41

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

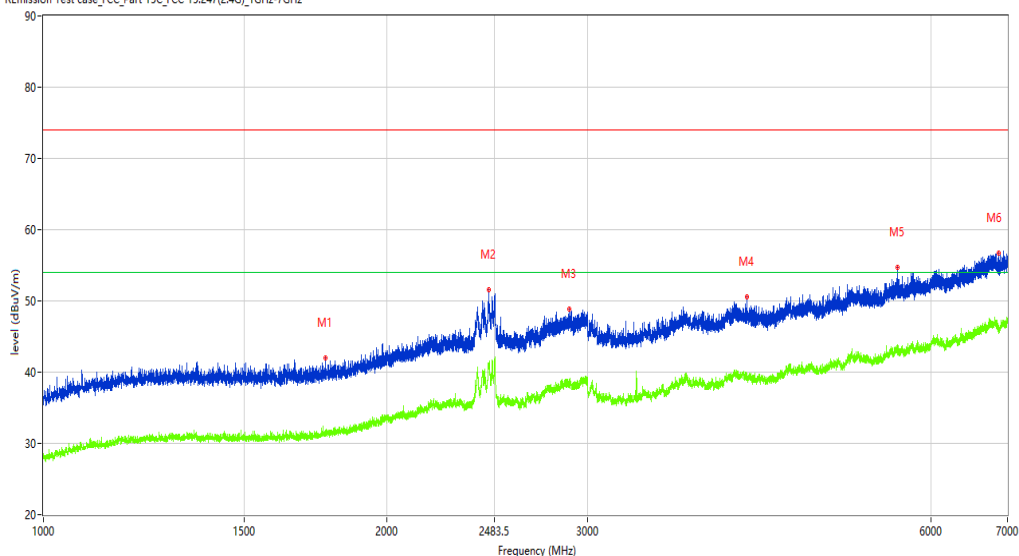

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1767.404	41.94	-12.38	74.0	-32.06	Peak	318.60	100	Horizontal	Pass
1**	1767.404	31.17	-12.38	54.0	-22.83	AV	318.60	100	Horizontal	Pass
2	2458.068	51.54	-3.11	74.0	-22.46	Peak	300.00	100	Horizontal	Pass
2**	2458.068	41.20	-3.11	54.0	-12.80	AV	300.00	100	Horizontal	Pass
3	2890.514	48.93	-4.02	74.0	-25.07	Peak	157.80	100	Horizontal	Pass
3**	2890.514	38.56	-4.02	54.0	-15.44	AV	157.80	100	Horizontal	Pass
4	4138.858	50.62	-2.01	74.0	-23.38	Peak	337.80	100	Horizontal	Pass
4**	4138.858	39.81	-2.01	54.0	-14.19	AV	337.80	100	Horizontal	Pass
5	5604.174	54.65	1.05	74.0	-19.35	Peak	282.80	100	Horizontal	Pass
5**	5604.174	43.84	1.05	54.0	-10.16	AV	282.80	100	Horizontal	Pass
6	6872.016	56.70	3.81	74.0	-17.30	Peak	158.10	100	Horizontal	Pass
6**	6872.016	46.37	3.81	54.0	-7.63	AV	158.10	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.35.02

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7948.513	36.42	7.11	74.0	-37.58	Peak	3.20	100	Horizontal	Pass
1**	7948.513	28.05	7.11	54.0	-25.95	AV	3.20	100	Horizontal	Pass
2	10134.216	42.53	13.19	74.0	-31.47	Peak	10.50	100	Horizontal	Pass
2**	10134.216	33.54	13.19	54.0	-20.46	AV	10.50	100	Horizontal	Pass
3	12476.631	47.99	16.95	74.0	-26.01	Peak	57.80	100	Horizontal	Pass
3**	12476.631	39.64	16.95	54.0	-14.36	AV	57.80	100	Horizontal	Pass
4	14150.962	52.37	21.25	74.0	-21.63	Peak	284.40	100	Horizontal	Pass
4**	14150.962	42.44	21.25	54.0	-11.56	AV	284.40	100	Horizontal	Pass
5	17477.631	56.30	25.10	74.0	-17.70	Peak	100.20	100	Horizontal	Pass
5**	17477.631	47.21	25.10	54.0	-6.79	AV	100.20	100	Horizontal	Pass
6	17821.295	57.12	24.42	74.0	-16.88	Peak	198.40	100	Horizontal	Pass
6**	17821.295	49.51	24.42	54.0	-4.49	AV	198.40	100	Horizontal	Pass

BT-High channel-Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.42.36

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

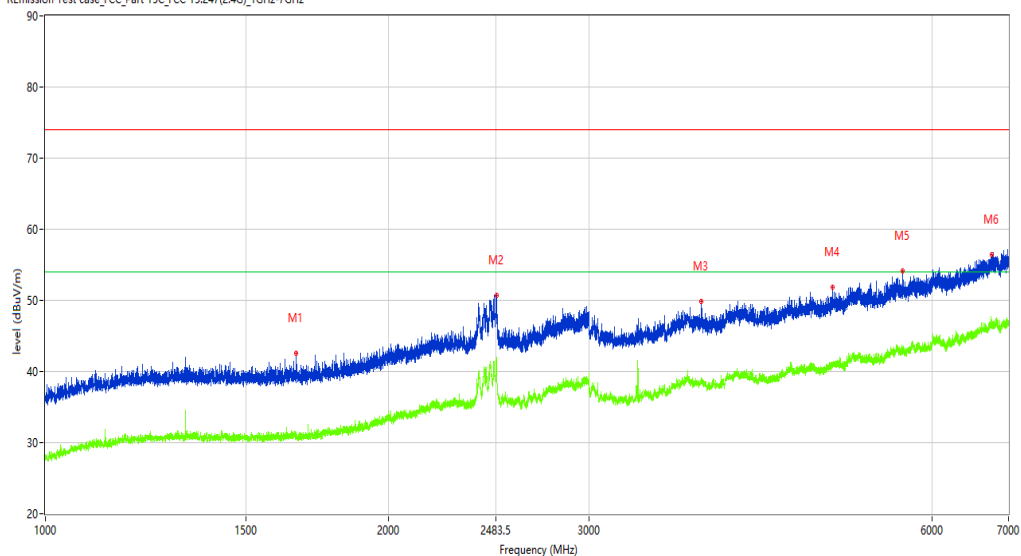

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1660.917	42.63	-13.01	74.0	-31.37	Peak	344.30	100	Vertical	Pass
1**	1660.917	30.89	-13.01	54.0	-23.11	AV	344.30	100	Vertical	Pass
2	2487.314	50.73	-2.44	74.0	-23.27	Peak	316.80	100	Vertical	Pass
2**	2487.314	41.53	-2.44	54.0	-12.47	AV	316.80	100	Vertical	Pass
3	3763.905	49.86	-2.63	74.0	-24.14	Peak	86.60	100	Vertical	Pass
3**	3763.905	38.80	-2.63	54.0	-15.20	AV	86.60	100	Vertical	Pass
4	4905.762	51.90	-0.79	74.0	-22.10	Peak	164.40	100	Vertical	Pass
4**	4905.762	40.99	-0.79	54.0	-13.01	AV	164.40	100	Vertical	Pass
5	5648.169	54.16	1.02	74.0	-19.84	Peak	155.10	100	Vertical	Pass
5**	5648.169	43.17	1.02	54.0	-10.83	AV	155.10	100	Vertical	Pass
6	6769.029	56.47	3.95	74.0	-17.53	Peak	331.50	100	Vertical	Pass
6**	6769.029	46.19	3.95	54.0	-7.81	AV	331.50	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.31.12

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

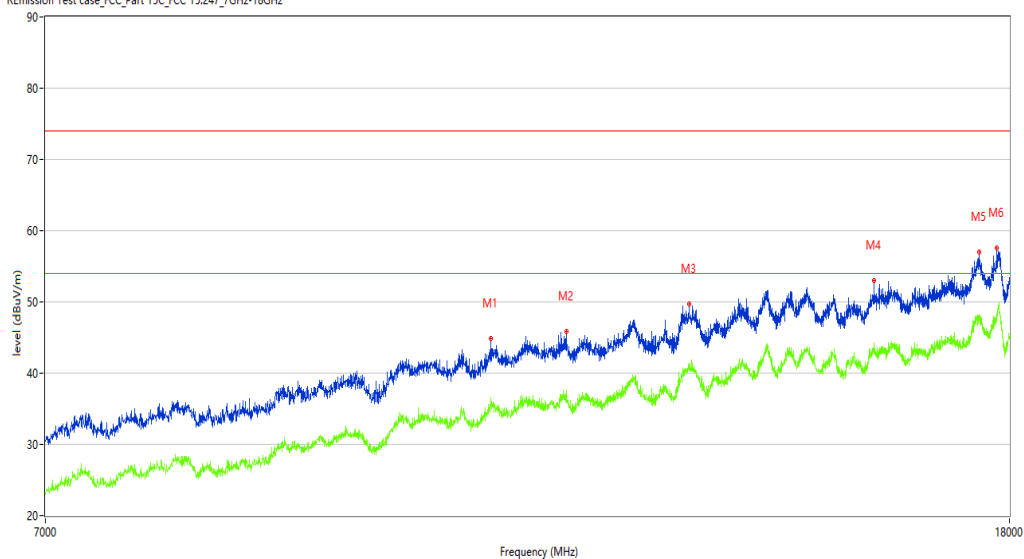

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10827.043	44.91	14.40	74.0	-29.09	Peak	261.10	100	Vertical	Pass
1**	10827.043	36.55	14.40	54.0	-17.45	AV	261.10	100	Vertical	Pass
2	11660.085	45.84	14.85	74.0	-28.16	Peak	293.10	100	Vertical	Pass
2**	11660.085	37.56	14.85	54.0	-16.44	AV	293.10	100	Vertical	Pass
3	13147.463	49.65	18.53	74.0	-24.35	Peak	71.90	100	Vertical	Pass
3**	13147.463	41.09	18.53	54.0	-12.91	AV	71.90	100	Vertical	Pass
4	15762.059	53.05	18.10	74.0	-20.95	Peak	29.90	100	Vertical	Pass
4**	15762.059	43.41	18.10	54.0	-10.59	AV	29.90	100	Vertical	Pass
5	17469.383	57.00	25.02	74.0	-17.00	Peak	330.70	100	Vertical	Pass
5**	17469.383	48.20	25.02	54.0	-5.80	AV	330.70	100	Vertical	Pass
6	17780.055	57.55	25.12	74.0	-16.45	Peak	67.40	100	Vertical	Pass
6**	17780.055	48.45	25.12	54.0	-5.55	AV	67.40	100	Vertical	Pass

BT-Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.18.36

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

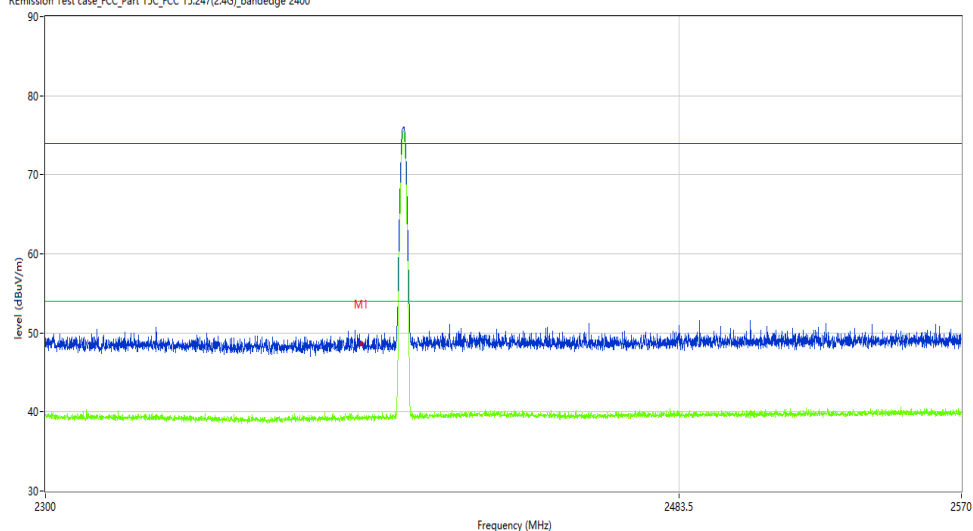

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.79	-10.41	74.0	-25.21	Peak	342.90	100	H	Pass
1**	2390.000	39.32	-10.41	54.0	-14.68	AV	342.90	100	H	Pass

BT-Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.10.33

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

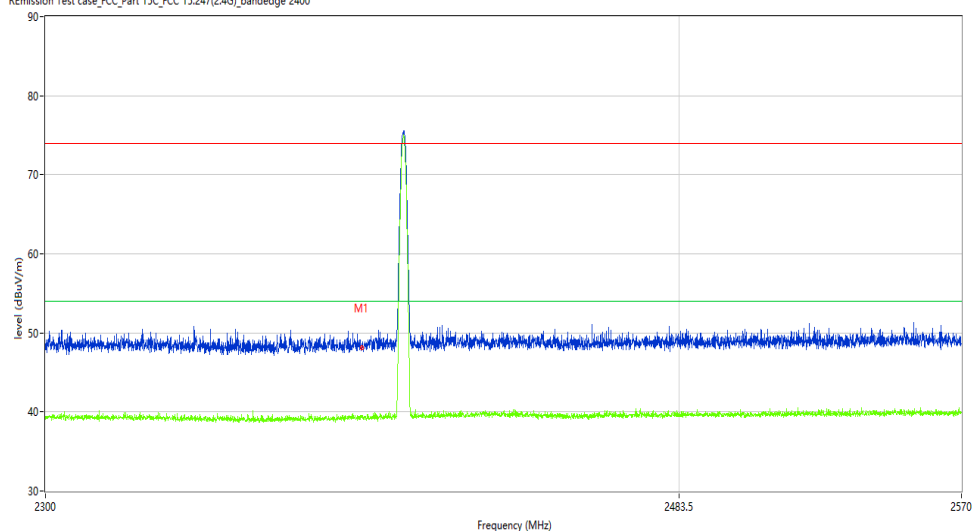

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.16	-10.41	74.0	-25.84	Peak	325.21	100	V	Pass
1**	2390.000	39.47	-10.41	54.0	-14.53	AV	325.21	100	V	Pass

BT-Bandedge -High channel- Horizontal-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.20.21

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

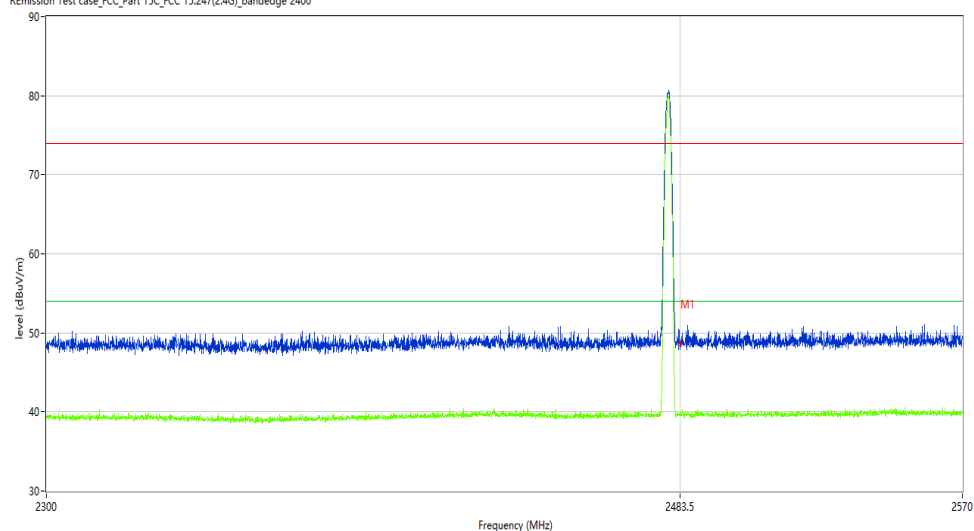

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.64	-10.08	74.0	-25.36	Peak	240.56	100	H	Pass
1**	2483.500	39.43	-10.08	54.0	-14.57	AV	240.56	100	H	Pass

BT-Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_13.14.58

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

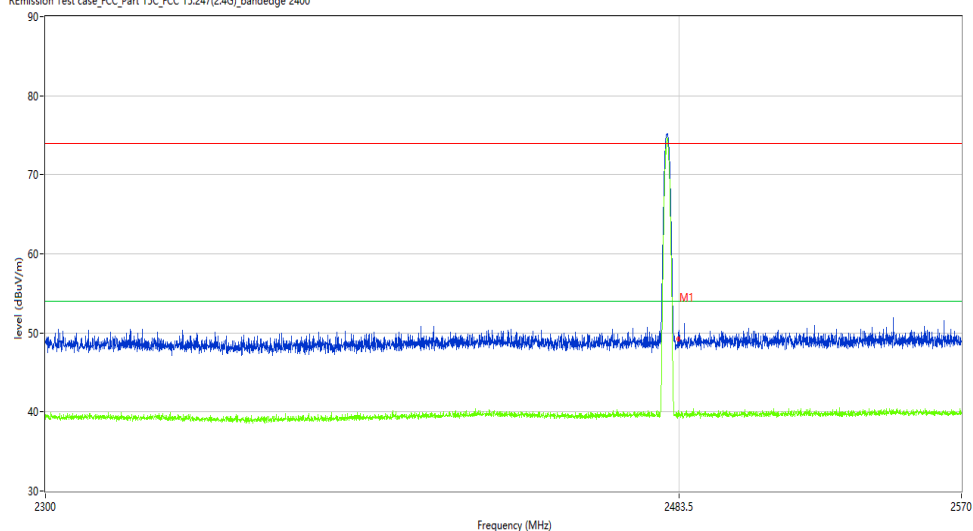

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.13	-10.08	74.0	-24.87	Peak	121.01	100	V	Pass
1**	2483.500	39.79	-10.08	54.0	-14.21	AV	121.01	100	V	Pass

30M-1G

BT-Hopping-Horizontal-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.32.02

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

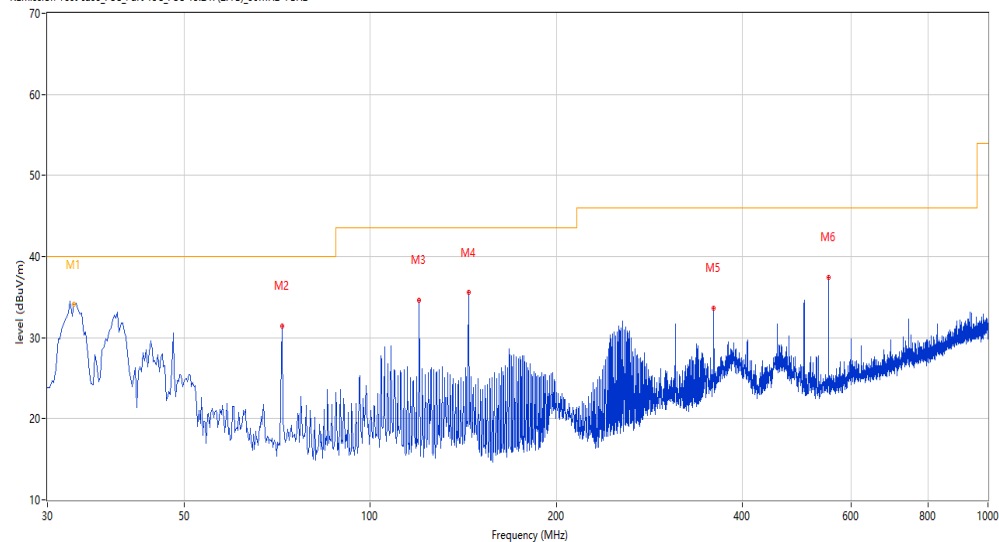

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.152	34.36	-23.64	40.0	-5.64	Peak	201.40	100	Horizontal	Pass
1*	33.152	34.14	-23.64	40.0	-5.86	QP	201.40	100	Horizontal	Pass
2	71.942	31.44	-24.25	40.0	-8.56	Peak	359.00	200	Horizontal	Pass
3	119.945	34.59	-22.71	43.5	-8.91	Peak	271.40	100	Horizontal	Pass
4	144.189	35.55	-24.28	43.5	-7.95	Peak	109.80	100	Horizontal	Pass
5	359.960	33.64	-16.37	46.0	-12.36	Peak	316.80	100	Horizontal	Pass
6	551.972	37.44	-11.31	46.0	-8.56	Peak	224.40	100	Horizontal	Pass

BT-Hopping -Vertical-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.28.42

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

No. N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_30MHz-1GHz

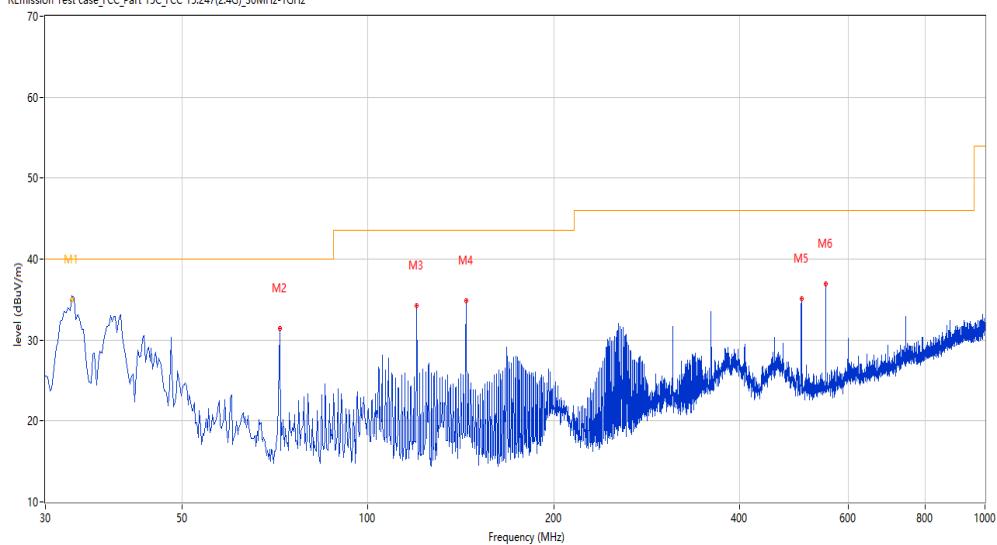

	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.152	35.49	-23.64	40.0	-4.51	Peak	0.00	200	Vertical	Pass
1*	33.152	34.92	-23.64	40.0	-5.08	QP	0.00	200	Vertical	Pass
2	71.942	31.43	-24.25	40.0	-8.57	Peak	306.60	100	Vertical	Pass
3	119.945	34.22	-22.71	43.5	-9.28	Peak	360.00	100	Vertical	Pass
4	144.189	34.82	-24.28	43.5	-8.68	Peak	153.60	100	Vertical	Pass
5	503.969	35.15	-12.47	46.0	-10.85	Peak	0.00	100	Vertical	Pass
6	551.972	36.96	-11.31	46.0	-9.04	Peak	223.20	100	Vertical	Pass

1-18G

BT-Hopping -Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_14.16.26

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

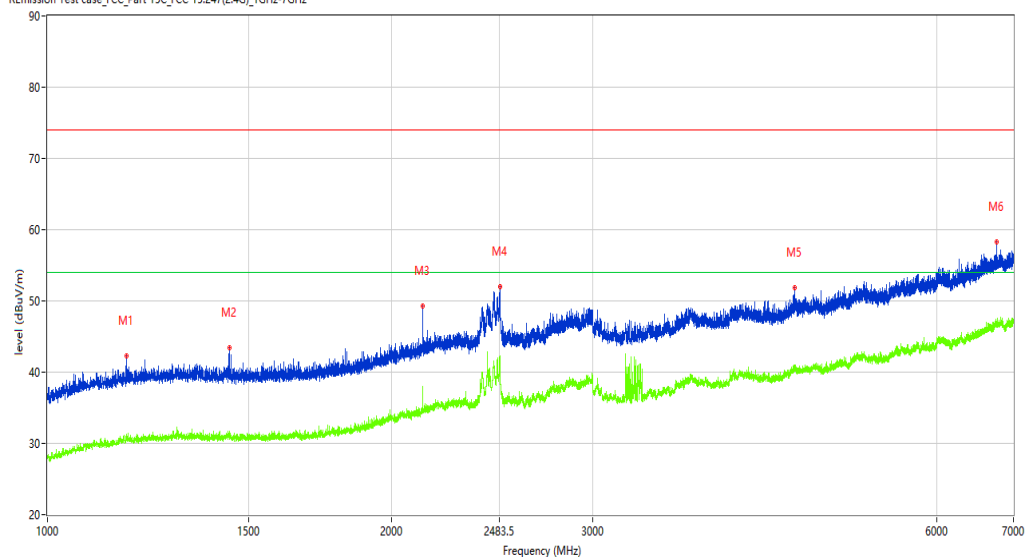

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1172.728	42.35	-12.85	74.0	-31.65	Peak	334.80	100	Horizontal	Pass
1**	1172.728	30.63	-12.85	54.0	-23.37	AV	334.80	100	Horizontal	Pass
2	1442.945	43.49	-13.07	74.0	-30.51	Peak	330.30	100	Horizontal	Pass
2**	1442.945	31.74	-13.07	54.0	-22.26	AV	330.30	100	Horizontal	Pass
3	2128.609	49.30	-9.32	74.0	-24.70	Peak	358.70	100	Horizontal	Pass
3**	2128.609	37.94	-9.32	54.0	-16.06	AV	358.70	100	Horizontal	Pass
4	2487.064	51.94	-2.44	74.0	-22.06	Peak	129.20	100	Horizontal	Pass
4**	2487.064	42.23	-2.44	54.0	-11.77	AV	129.20	100	Horizontal	Pass
5	4506.312	51.87	-0.81	74.0	-22.13	Peak	143.30	100	Horizontal	Pass
5**	4506.312	40.45	-0.81	54.0	-13.55	AV	143.30	100	Horizontal	Pass
6	6770.029	58.32	3.96	74.0	-15.68	Peak	236.70	100	Horizontal	Pass
6**	6770.029	46.53	3.96	54.0	-7.47	AV	236.70	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.41.00

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8949.263	39.36	10.73	74.0	-34.64	Peak	199.50	100	Horizontal	Pass
1**	8949.263	30.97	10.73	54.0	-23.03	AV	199.50	100	Horizontal	Pass
2	12413.397	47.33	16.99	74.0	-26.67	Peak	278.40	100	Horizontal	Pass
2**	12413.397	38.66	16.99	54.0	-15.34	AV	278.40	100	Horizontal	Pass
3	14194.951	52.12	22.20	74.0	-21.88	Peak	180.50	100	Horizontal	Pass
3**	14194.951	43.48	22.20	54.0	-10.52	AV	180.50	100	Horizontal	Pass
4	16086.478	52.45	20.46	74.0	-21.55	Peak	65.60	100	Horizontal	Pass
4**	16086.478	43.77	20.46	54.0	-10.23	AV	65.60	100	Horizontal	Pass
5	17436.391	56.73	24.70	74.0	-17.27	Peak	124.70	100	Horizontal	Pass
5**	17436.391	47.38	24.70	54.0	-6.62	AV	124.70	100	Horizontal	Pass
6	17802.049	57.67	25.00	74.0	-16.33	Peak	138.90	100	Horizontal	Pass
6**	17802.049	49.04	25.00	54.0	-4.96	AV	138.90	100	Horizontal	Pass

BT-Hopping -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_14.21.10

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

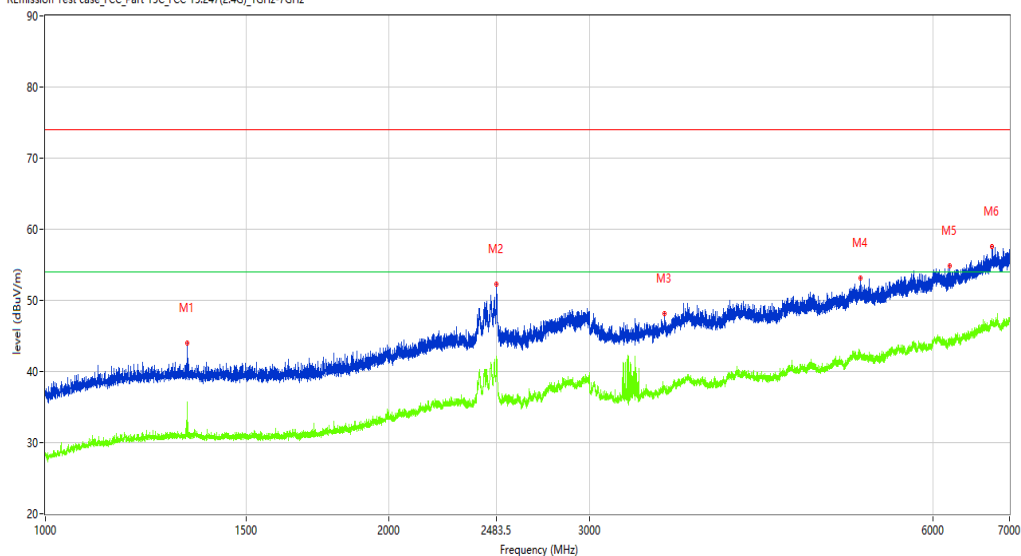

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.209	43.97	-13.07	74.0	-30.03	Peak	3.50	100	Vertical	Pass
1**	1331.209	35.67	-13.07	54.0	-18.33	AV	3.50	100	Vertical	Pass
2	2486.814	52.21	-2.45	74.0	-21.79	Peak	359.60	100	Vertical	Pass
2**	2486.814	42.08	-2.45	54.0	-11.92	AV	359.60	100	Vertical	Pass
3	3489.439	48.12	-4.41	74.0	-25.88	Peak	64.20	100	Vertical	Pass
3**	3489.439	37.75	-4.41	54.0	-16.25	AV	64.20	100	Vertical	Pass
4	5178.228	53.12	0.26	74.0	-20.88	Peak	239.90	100	Vertical	Pass
4**	5178.228	42.20	0.26	54.0	-11.80	AV	239.90	100	Vertical	Pass
5	6209.099	54.80	1.63	74.0	-19.20	Peak	183.00	100	Vertical	Pass
5**	6209.099	44.10	1.63	54.0	-9.90	AV	183.00	100	Vertical	Pass
6	6758.030	57.64	3.86	74.0	-16.36	Peak	309.40	100	Vertical	Pass
6**	6758.030	46.98	3.86	54.0	-7.02	AV	309.40	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.42.37

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

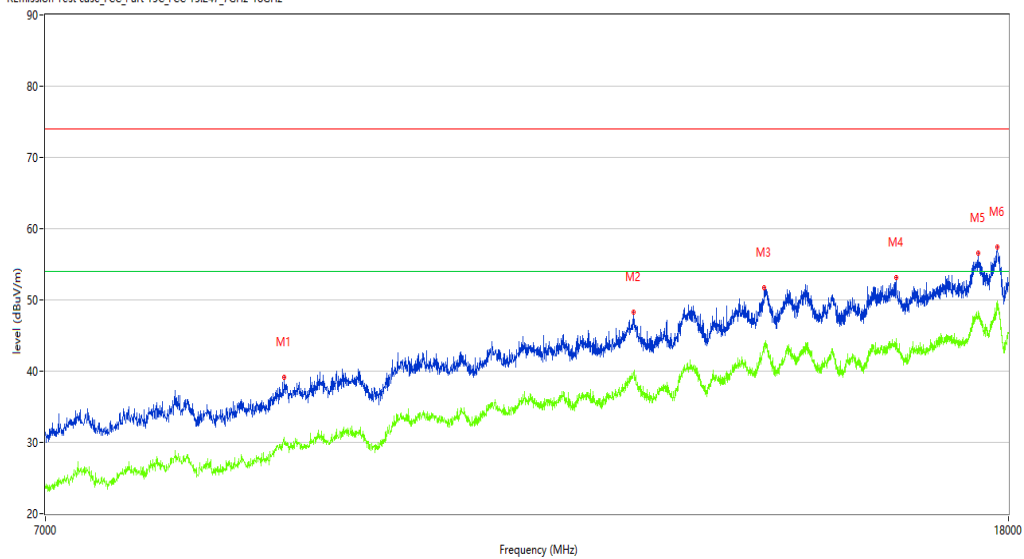

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8850.287	39.16	9.10	74.0	-34.84	Peak	358.00	100	Vertical	Pass
1**	8850.287	30.62	9.10	54.0	-23.38	AV	358.00	100	Vertical	Pass
2	12465.634	48.31	17.20	74.0	-25.69	Peak	115.70	100	Vertical	Pass
2**	12465.634	39.62	17.20	54.0	-14.38	AV	115.70	100	Vertical	Pass
3	14164.709	51.66	21.66	74.0	-22.34	Peak	356.30	100	Vertical	Pass
3**	14164.709	43.85	21.66	54.0	-10.15	AV	356.30	100	Vertical	Pass
4	16119.470	53.21	20.34	74.0	-20.79	Peak	241.30	100	Vertical	Pass
4**	16119.470	44.54	20.34	54.0	-9.46	AV	241.30	100	Vertical	Pass
5	17474.881	56.60	25.08	74.0	-17.40	Peak	120.20	100	Vertical	Pass
5**	17474.881	48.38	25.08	54.0	-5.62	AV	120.20	100	Vertical	Pass
6	17799.300	57.49	25.06	74.0	-16.51	Peak	64.40	100	Vertical	Pass
6**	17799.300	49.87	25.06	54.0	-4.13	AV	64.40	100	Vertical	Pass

BT-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2021-05-08_14.11.21

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

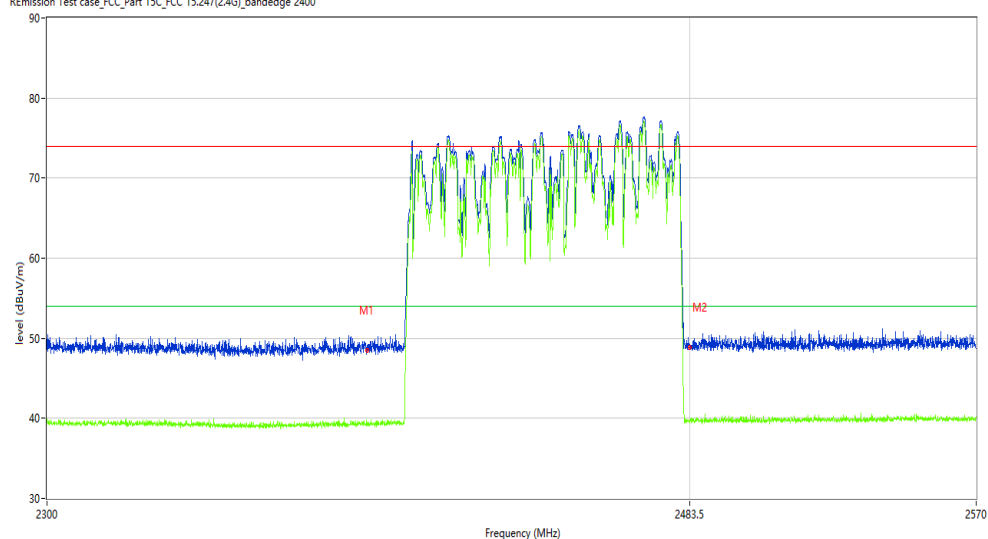

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.50	-10.41	74.0	-25.50	Peak	95.54	100	H	Pass
1**	2390.000	39.48	-10.41	54.0	-14.52	AV	95.54	100	H	Pass
2	2483.500	48.91	-10.08	74.0	-25.09	Peak	184.79	100	H	Pass
2**	2483.500	39.71	-10.08	54.0	-14.29	AV	184.79	100	H	Pass

BT-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2021-05-08_14.08.21

EUT Name:

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

N.A

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.00	-10.41	74.0	-25.00	Peak	178.93	100	V	Pass
1**	2390.000	39.21	-10.41	54.0	-14.79	AV	178.93	100	V	Pass
2	2483.500	48.95	-10.08	74.0	-25.05	Peak	119.44	100	V	Pass
2**	2483.500	39.60	-10.08	54.0	-14.40	AV	119.44	100	V	Pass

30M-1G

BT 3M-Horizontal-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_15.55.22

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(24G)_30MHz-1GHz

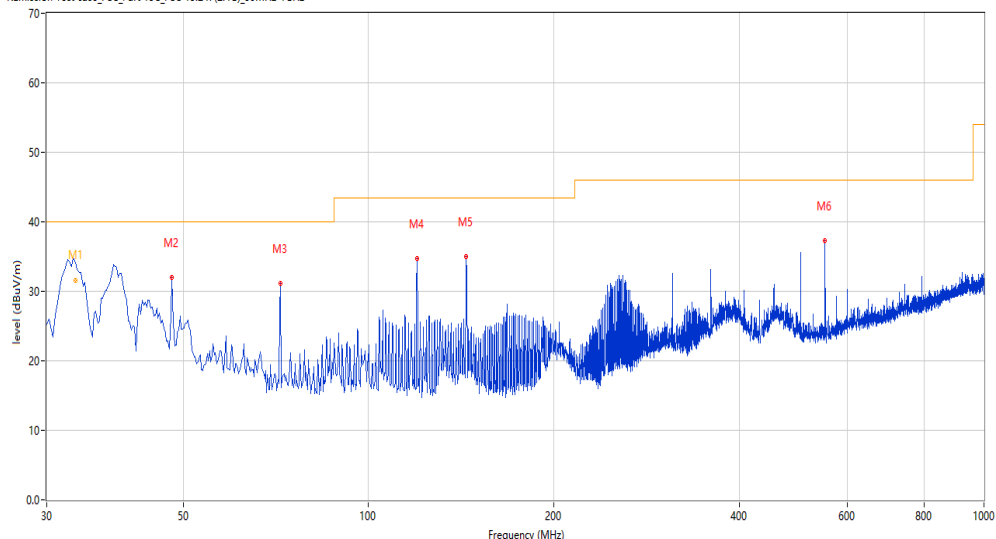

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.388	35.33	-23.64	40.0	-4.67	Peak	296.60	101	Horizontal	Pass
1*	33.388	31.58	-23.64	40.0	-8.42	QP	296.60	101	Horizontal	Pass
2	47.941	32.06	-19.41	40.0	-7.94	Peak	111.50	100	Horizontal	Pass
3	71.942	31.10	-24.25	40.0	-8.90	Peak	360.00	200	Horizontal	Pass
4	119.945	34.78	-22.71	43.5	-8.72	Peak	259.40	100	Horizontal	Pass
5	144.189	34.93	-24.28	43.5	-8.57	Peak	125.00	100	Horizontal	Pass
6	551.972	37.31	-11.31	46.0	-8.69	Peak	254.90	100	Horizontal	Pass

BT 3M -Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_15.49.08

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

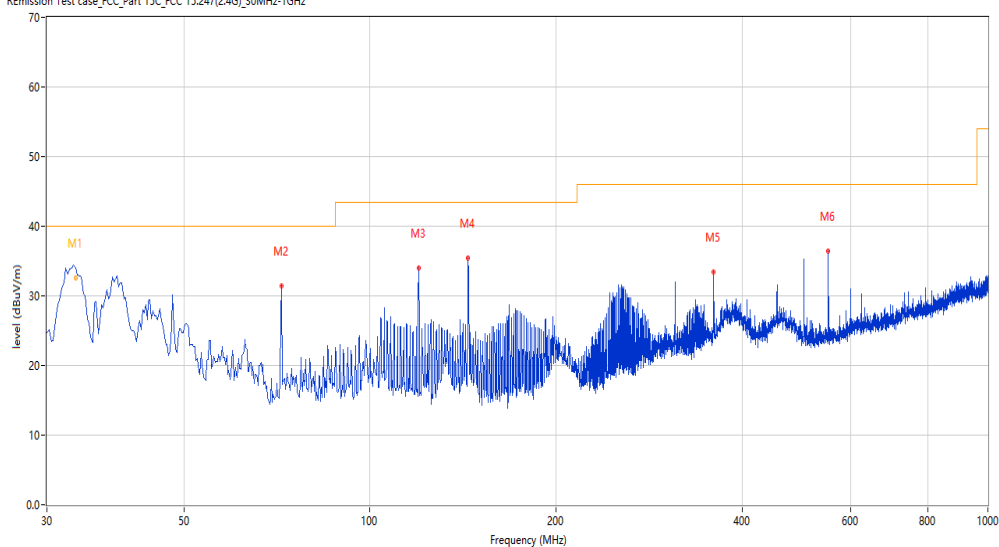

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.391	36.31	-23.64	40.0	-3.69	Peak	1.90	101	Vertical	Pass
1*	33.391	32.62	-23.64	40.0	-7.38	QP	1.90	101	Vertical	Pass
2	71.942	31.41	-24.25	40.0	-8.59	Peak	321.20	100	Vertical	Pass
3	119.945	34.02	-22.71	43.5	-9.48	Peak	357.90	100	Vertical	Pass
4	144.189	35.43	-24.28	43.5	-8.07	Peak	53.40	100	Vertical	Pass
5	359.960	33.43	-16.37	46.0	-12.57	Peak	311.90	100	Vertical	Pass
6	551.972	36.44	-11.31	46.0	-9.56	Peak	252.20	100	Vertical	Pass

1-18G

BT 3M -Low channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15.34.33

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

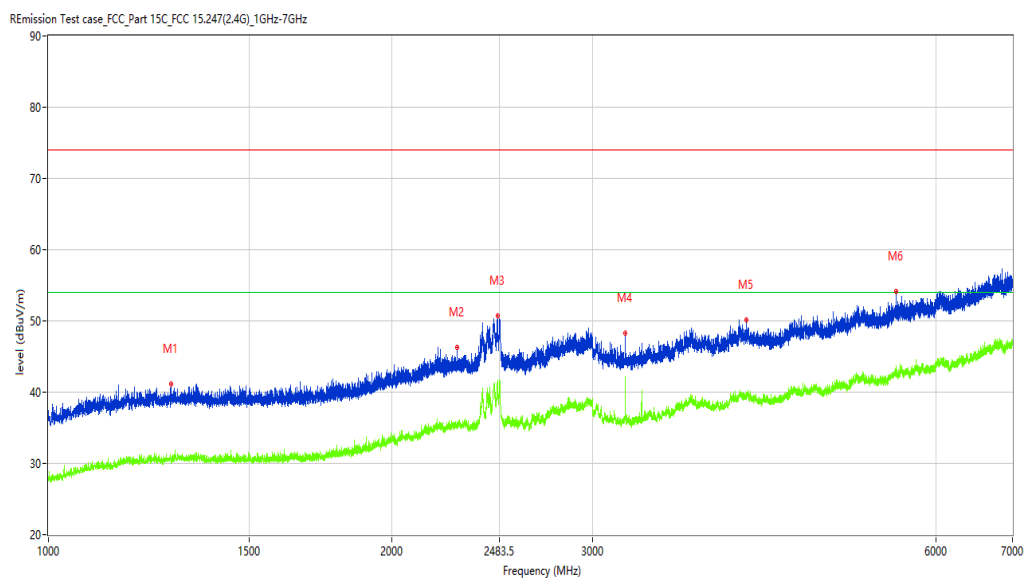

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1280.715	41.08	-12.85	74.0	-32.92	Peak	79.70	100	Horizontal	Pass
1**	1280.715	30.50	-12.85	54.0	-23.50	AV	79.70	100	Horizontal	Pass
2	2280.590	46.30	-7.95	74.0	-27.70	Peak	75.30	100	Horizontal	Pass
2**	2280.590	35.87	-7.95	54.0	-18.13	AV	75.30	100	Horizontal	Pass
3	2475.566	50.65	-2.68	74.0	-23.35	Peak	271.00	100	Horizontal	Pass
3**	2475.566	41.29	-2.68	54.0	-12.71	AV	271.00	100	Horizontal	Pass
4	3202.475	48.24	-5.56	74.0	-25.76	Peak	25.30	100	Horizontal	Pass
4**	3202.475	42.11	-5.56	54.0	-11.89	AV	25.30	100	Horizontal	Pass
5	4091.864	50.13	-1.29	74.0	-23.87	Peak	252.70	100	Horizontal	Pass
5**	4091.864	39.81	-1.29	54.0	-14.19	AV	252.70	100	Horizontal	Pass
6	5534.683	54.09	0.51	74.0	-19.91	Peak	224.70	100	Horizontal	Pass
6**	5534.683	42.58	0.51	54.0	-11.42	AV	224.70	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10:58:29

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

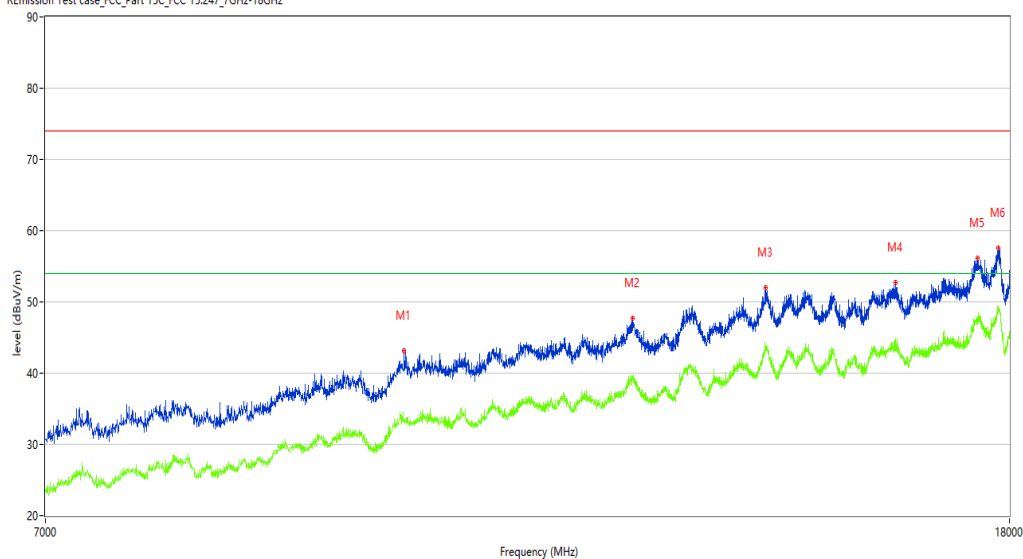

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9947.263	43.18	13.37	74.0	-30.82	Peak	94.70	100	Horizontal	Pass
1**	9947.263	33.15	13.37	54.0	-20.85	AV	94.70	100	Horizontal	Pass
2	12440.890	47.70	17.10	74.0	-26.30	Peak	16.30	100	Horizontal	Pass
2**	12440.890	39.30	17.10	54.0	-14.70	AV	16.30	100	Horizontal	Pass
3	14175.706	52.02	21.99	74.0	-21.98	Peak	191.90	100	Horizontal	Pass
3**	14175.706	43.74	21.99	54.0	-10.26	AV	191.90	100	Horizontal	Pass
4	16094.726	52.73	20.44	74.0	-21.27	Peak	57.90	100	Horizontal	Pass
4**	16094.726	44.89	20.44	54.0	-9.11	AV	57.90	100	Horizontal	Pass
5	17444.639	56.11	24.78	74.0	-17.89	Peak	224.20	100	Horizontal	Pass
5**	17444.639	47.76	24.78	54.0	-6.24	AV	224.20	100	Horizontal	Pass
6	17799.300	57.56	25.06	74.0	-16.44	Peak	298.30	100	Horizontal	Pass
6**	17799.300	48.85	25.06	54.0	-5.15	AV	298.30	100	Horizontal	Pass

BT 3M -Low channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15.32.30

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

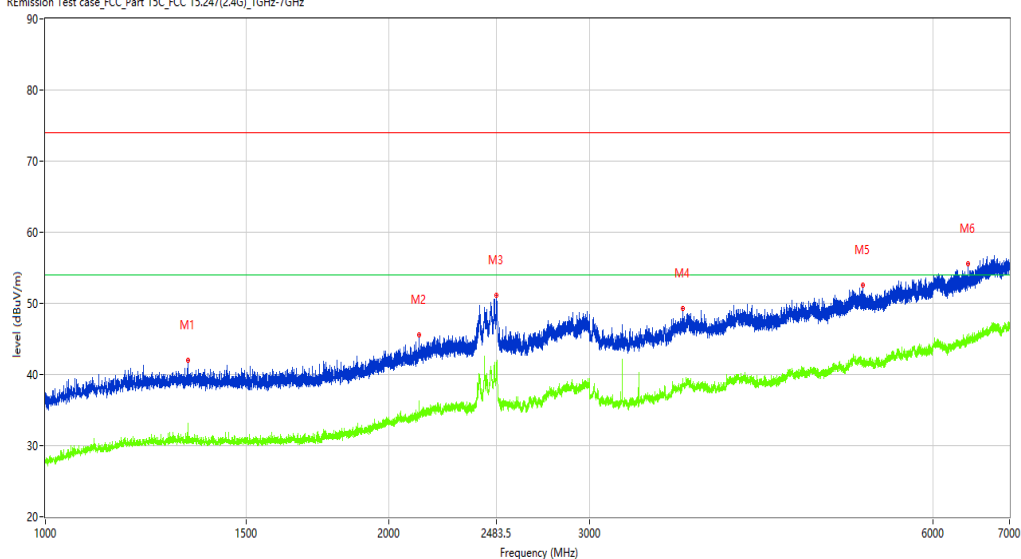

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.708	41.97	-13.07	74.0	-32.03	Peak	74.90	100	Vertical	Pass
1**	1332.708	33.20	-13.07	54.0	-20.80	AV	74.90	100	Vertical	Pass
2	2124.859	45.52	-9.31	74.0	-28.48	Peak	360.00	100	Vertical	Pass
2**	2124.859	36.24	-9.31	54.0	-17.76	AV	360.00	100	Vertical	Pass
3	2486.814	51.11	-2.45	74.0	-22.89	Peak	111.70	100	Vertical	Pass
3**	2486.814	41.39	-2.45	54.0	-12.61	AV	111.70	100	Vertical	Pass
4	3617.423	49.24	-2.49	74.0	-24.76	Peak	284.90	100	Vertical	Pass
4**	3617.423	38.64	-2.49	54.0	-15.36	AV	284.90	100	Vertical	Pass
5	5207.224	52.56	-0.00	74.0	-21.44	Peak	42.70	100	Vertical	Pass
5**	5207.224	41.79	-0.00	54.0	-12.21	AV	42.70	100	Vertical	Pass
6	6443.070	55.54	2.43	74.0	-18.46	Peak	219.80	100	Vertical	Pass
6**	6443.070	44.70	2.43	54.0	-9.30	AV	219.80	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.45.10

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8844.789	40.20	9.10	74.0	-33.80	Peak	150.80	100	Vertical	Pass
1**	8844.789	31.28	9.10	54.0	-22.72	AV	150.80	100	Vertical	Pass
2	10084.729	42.99	13.19	74.0	-31.01	Peak	281.00	100	Vertical	Pass
2**	10084.729	34.05	13.19	54.0	-19.95	AV	281.00	100	Vertical	Pass
3	11313.672	45.56	15.54	74.0	-28.44	Peak	137.00	100	Vertical	Pass
3**	11313.672	35.94	15.54	54.0	-18.06	AV	137.00	100	Vertical	Pass
4	14186.703	51.99	22.33	74.0	-22.01	Peak	271.70	100	Vertical	Pass
4**	14186.703	43.92	22.33	54.0	-10.08	AV	271.70	100	Vertical	Pass
5	17441.890	56.16	24.75	74.0	-17.84	Peak	76.70	100	Vertical	Pass
5**	17441.890	47.88	24.75	54.0	-6.12	AV	76.70	100	Vertical	Pass
6	17810.297	57.61	24.75	74.0	-16.39	Peak	201.70	100	Vertical	Pass
6**	17810.297	49.22	24.75	54.0	-4.78	AV	201.70	100	Vertical	Pass

BT 3M -Middle channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15.38.13

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

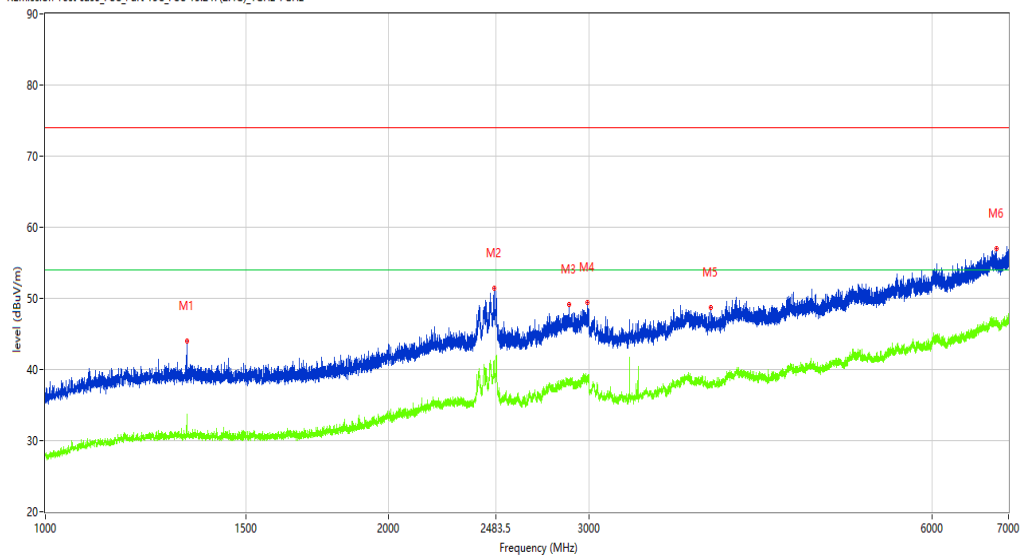

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.459	44.06	-13.07	74.0	-29.94	Peak	3.80	100	Horizontal	Pass
1**	1330.459	33.77	-13.07	54.0	-20.23	AV	3.80	100	Horizontal	Pass
2	2476.065	51.43	-2.67	74.0	-22.57	Peak	212.10	100	Horizontal	Pass
2**	2476.065	41.15	-2.67	54.0	-12.85	AV	212.10	100	Horizontal	Pass
3	2880.515	49.07	-4.00	74.0	-24.93	Peak	11.20	100	Horizontal	Pass
3**	2880.515	38.26	-4.00	54.0	-15.74	AV	11.20	100	Horizontal	Pass
4	2988.501	49.37	-3.16	74.0	-24.63	Peak	244.20	100	Horizontal	Pass
4**	2988.501	38.62	-3.16	54.0	-15.38	AV	244.20	100	Horizontal	Pass
5	3837.895	48.66	-3.40	74.0	-25.34	Peak	357.20	100	Horizontal	Pass
5**	3837.895	38.33	-3.40	54.0	-15.67	AV	357.20	100	Horizontal	Pass
6	6837.020	57.04	3.87	74.0	-16.96	Peak	308.30	100	Horizontal	Pass
6**	6837.020	46.89	3.87	54.0	-7.11	AV	308.30	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10:56:37

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9394.651	40.76	11.51	74.0	-33.24	Peak	320.10	100	Horizontal	Pass
1**	9394.651	31.25	11.51	54.0	-22.75	AV	320.10	100	Horizontal	Pass
2	12424.394	47.34	17.03	74.0	-26.66	Peak	301.50	100	Horizontal	Pass
2**	12424.394	39.06	17.03	54.0	-14.94	AV	301.50	100	Horizontal	Pass
3	14186.703	52.24	22.33	74.0	-21.76	Peak	245.70	100	Horizontal	Pass
3**	14186.703	43.92	22.33	54.0	-10.08	AV	245.70	100	Horizontal	Pass
4	15110.472	51.68	18.72	74.0	-22.32	Peak	310.80	100	Horizontal	Pass
4**	15110.472	42.43	18.72	54.0	-11.57	AV	310.80	100	Horizontal	Pass
5	17488.628	56.34	25.06	74.0	-17.66	Peak	2.10	100	Horizontal	Pass
5**	17488.628	47.74	25.06	54.0	-6.26	AV	2.10	100	Horizontal	Pass
6	17826.793	57.56	24.25	74.0	-16.44	Peak	96.70	100	Horizontal	Pass
6**	17826.793	49.08	24.25	54.0	-4.92	AV	96.70	100	Horizontal	Pass

BT 3M -Middle channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15.40.29

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

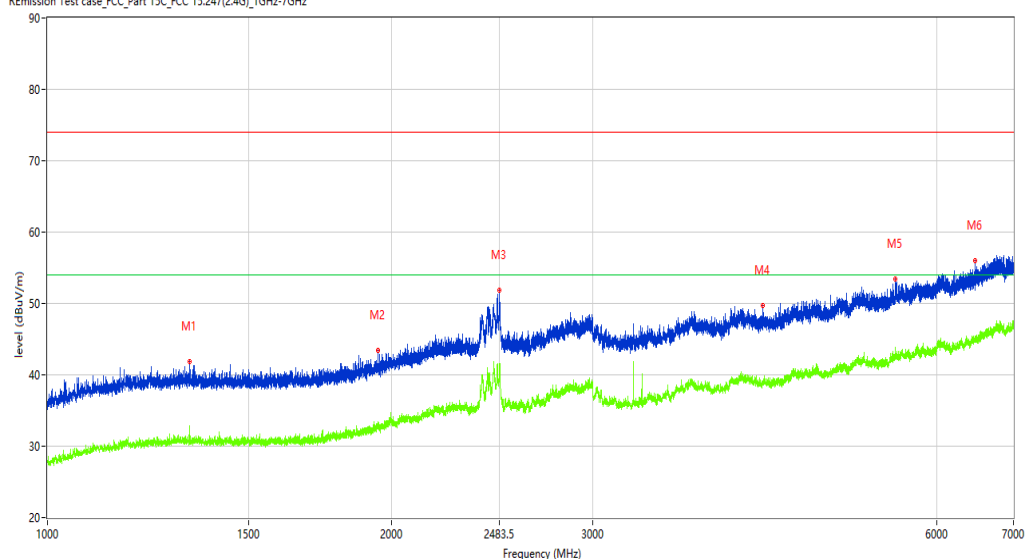

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.459	41.81	-13.07	74.0	-32.19	Peak	216.80	100	Vertical	Pass
1**	1330.459	32.92	-13.07	54.0	-21.08	AV	216.80	100	Vertical	Pass
2	1946.132	43.45	-11.04	74.0	-30.55	Peak	162.80	100	Vertical	Pass
2**	1946.132	33.36	-11.04	54.0	-20.64	AV	162.80	100	Vertical	Pass
3	2486.314	51.88	-2.46	74.0	-22.12	Peak	171.70	100	Vertical	Pass
3**	2486.314	41.14	-2.46	54.0	-12.86	AV	171.70	100	Vertical	Pass
4	4224.847	49.76	-2.35	74.0	-24.24	Peak	336.60	100	Vertical	Pass
4**	4224.847	39.05	-2.35	54.0	-14.95	AV	336.60	100	Vertical	Pass
5	5519.185	53.39	0.55	74.0	-20.61	Peak	154.90	100	Vertical	Pass
5**	5519.185	42.70	0.55	54.0	-11.30	AV	154.90	100	Vertical	Pass
6	6479.565	56.04	2.50	74.0	-17.96	Peak	39.10	100	Vertical	Pass
6**	6479.565	44.94	2.50	54.0	-9.06	AV	39.10	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.48.11

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

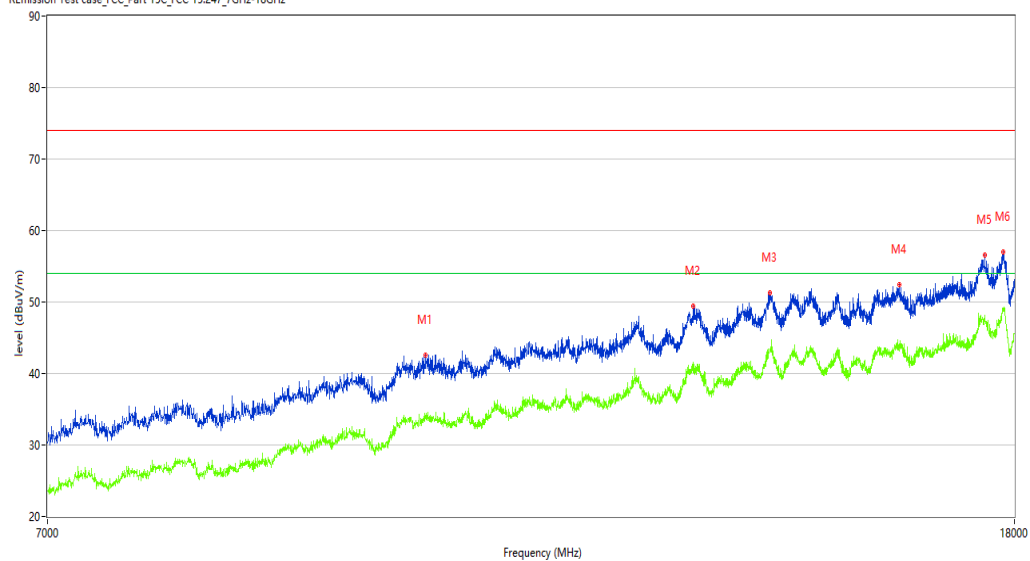

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10125.969	42.61	13.25	74.0	-31.39	Peak	340.60	100	Vertical	Pass
1**	10125.969	33.70	13.25	54.0	-20.30	AV	340.60	100	Vertical	Pass
2	13152.962	49.43	18.53	74.0	-24.57	Peak	112.80	100	Vertical	Pass
2**	13152.962	41.44	18.53	54.0	-12.56	AV	112.80	100	Vertical	Pass
3	14175.706	51.22	21.99	74.0	-22.78	Peak	340.60	100	Vertical	Pass
3**	14175.706	43.34	21.99	54.0	-10.66	AV	340.60	100	Vertical	Pass
4	16080.980	52.47	20.47	74.0	-21.53	Peak	281.80	100	Vertical	Pass
4**	16080.980	43.93	20.47	54.0	-10.07	AV	281.80	100	Vertical	Pass
5	17485.879	56.56	25.15	74.0	-17.44	Peak	335.70	100	Vertical	Pass
5**	17485.879	47.70	25.15	54.0	-6.30	AV	335.70	100	Vertical	Pass
6	17810.297	56.99	24.75	74.0	-17.01	Peak	25.70	100	Vertical	Pass
6**	17810.297	48.70	24.75	54.0	-5.30	AV	25.70	100	Vertical	Pass

BT 3M -High channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15.26.26

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

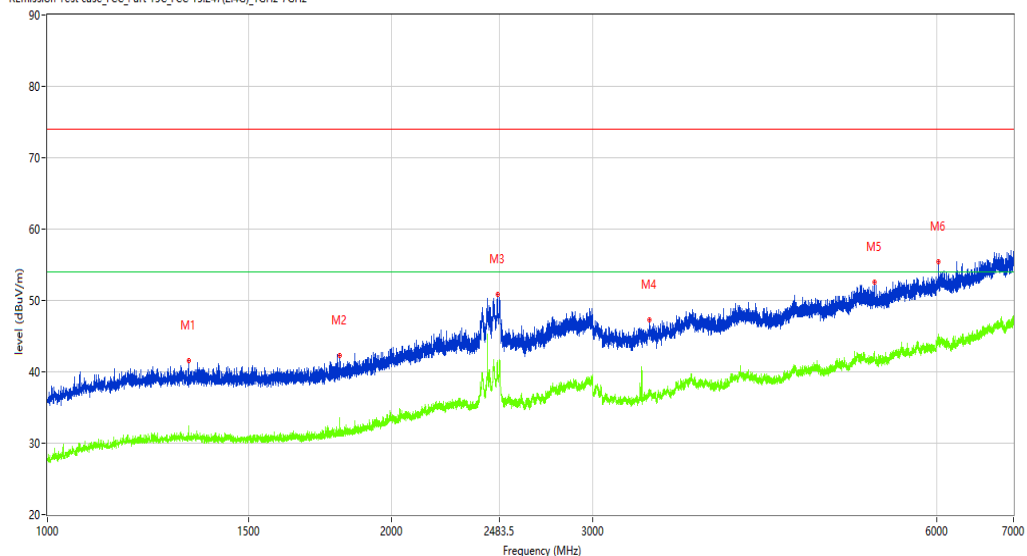

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.959	41.59	-13.07	74.0	-32.41	Peak	134.80	100	Horizontal	Pass
1**	1329.959	32.16	-13.07	54.0	-21.84	AV	134.80	100	Horizontal	Pass
2	1800.650	42.24	-12.61	74.0	-31.76	Peak	267.60	100	Horizontal	Pass
2**	1800.650	33.54	-12.61	54.0	-20.46	AV	267.60	100	Horizontal	Pass
3	2475.066	50.88	-2.69	74.0	-23.12	Peak	38.80	100	Horizontal	Pass
3**	2475.066	41.59	-2.69	54.0	-12.41	AV	38.80	100	Horizontal	Pass
4	3359.955	47.24	-4.60	74.0	-26.76	Peak	286.00	100	Horizontal	Pass
4**	3359.955	37.10	-4.60	54.0	-16.90	AV	286.00	100	Horizontal	Pass
5	5293.713	52.61	-0.12	74.0	-21.39	Peak	128.20	100	Horizontal	Pass
5**	5293.713	41.60	-0.12	54.0	-12.40	AV	128.20	100	Horizontal	Pass
6	6019.123	55.39	2.02	74.0	-18.61	Peak	286.00	100	Horizontal	Pass
6**	6019.123	44.56	2.02	54.0	-9.44	AV	286.00	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10:54:53

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9380.905	40.05	11.47	74.0	-33.95	Peak	313.40	100	Horizontal	Pass
1**	9380.905	31.88	11.47	54.0	-22.12	AV	313.40	100	Horizontal	Pass
2	10882.029	44.42	14.74	74.0	-29.58	Peak	168.30	100	Horizontal	Pass
2**	10882.029	34.86	14.74	54.0	-19.14	AV	168.30	100	Horizontal	Pass
3	12385.904	48.45	16.83	74.0	-25.55	Peak	285.50	100	Horizontal	Pass
3**	12385.904	38.70	16.83	54.0	-15.30	AV	285.50	100	Horizontal	Pass
4	14186.703	52.35	22.33	74.0	-21.65	Peak	295.20	100	Horizontal	Pass
4**	14186.703	44.30	22.33	54.0	-9.70	AV	295.20	100	Horizontal	Pass
5	17494.126	56.17	24.88	74.0	-17.83	Peak	218.90	100	Horizontal	Pass
5**	17494.126	46.87	24.88	54.0	-7.13	AV	218.90	100	Horizontal	Pass
6	17818.545	57.82	24.50	74.0	-16.18	Peak	20.90	100	Horizontal	Pass
6**	17818.545	48.81	24.50	54.0	-5.19	AV	20.90	100	Horizontal	Pass

BT 3M -High channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15.28.50

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

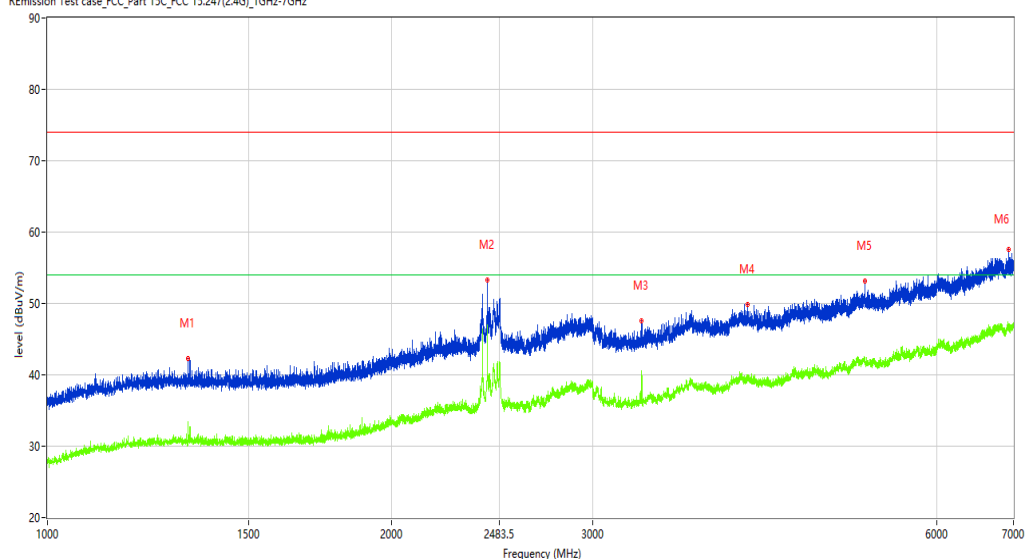

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.709	42.23	-13.07	74.0	-31.77	Peak	358.20	100	Vertical	Pass
1**	1327.709	33.46	-13.07	54.0	-20.54	AV	358.20	100	Vertical	Pass
2	2426.072	53.23	-3.85	74.0	-20.77	Peak	184.30	100	Vertical	Pass
2**	2426.072	43.63	-3.85	54.0	-10.37	AV	184.30	100	Vertical	Pass
3	3306.462	47.53	-5.57	74.0	-26.47	Peak	235.40	100	Vertical	Pass
3**	3306.462	40.55	-5.57	54.0	-13.45	AV	235.40	100	Vertical	Pass
4	4100.362	49.92	-1.47	74.0	-24.08	Peak	354.70	100	Vertical	Pass
4**	4100.362	39.77	-1.47	54.0	-14.23	AV	354.70	100	Vertical	Pass
5	5186.727	53.12	0.26	74.0	-20.88	Peak	124.10	100	Vertical	Pass
5**	5186.727	42.28	0.26	54.0	-11.72	AV	124.10	100	Vertical	Pass
6	6928.509	57.60	3.75	74.0	-16.40	Peak	221.20	100	Vertical	Pass
6**	6928.509	46.93	3.75	54.0	-7.07	AV	221.20	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.46.41

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7769.808	36.53	6.01	74.0	-37.47	Peak	23.80	100	Vertical	Pass
1**	7769.808	27.25	6.01	54.0	-26.75	AV	23.80	100	Vertical	Pass
2	11613.347	45.46	14.91	74.0	-28.54	Peak	23.80	100	Vertical	Pass
2**	11613.347	36.56	14.91	54.0	-17.44	AV	23.80	100	Vertical	Pass
3	14175.706	52.24	21.99	74.0	-21.76	Peak	265.40	100	Vertical	Pass
3**	14175.706	43.31	21.99	54.0	-10.69	AV	265.40	100	Vertical	Pass
4	15140.715	51.78	18.70	74.0	-22.22	Peak	320.90	100	Vertical	Pass
4**	15140.715	43.36	18.70	54.0	-10.64	AV	320.90	100	Vertical	Pass
5	17450.137	55.98	24.83	74.0	-18.02	Peak	149.60	100	Vertical	Pass
5**	17450.137	47.37	24.83	54.0	-6.63	AV	149.60	100	Vertical	Pass
6	17824.044	57.28	24.34	74.0	-16.72	Peak	38.00	100	Vertical	Pass
6**	17824.044	48.97	24.34	54.0	-5.03	AV	38.00	100	Vertical	Pass

BT 3M -Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15:18:27

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

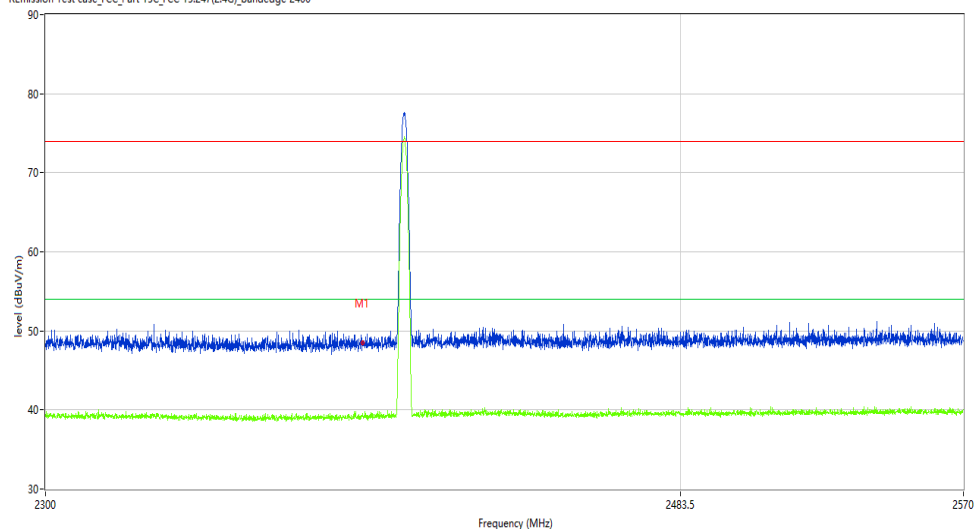

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.47	-10.41	74.0	-25.53	Peak	85.31	100	H	Pass
1**	2390.000	39.15	-10.41	54.0	-14.85	AV	85.31	100	H	Pass

BT 3M -Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15.13.14

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

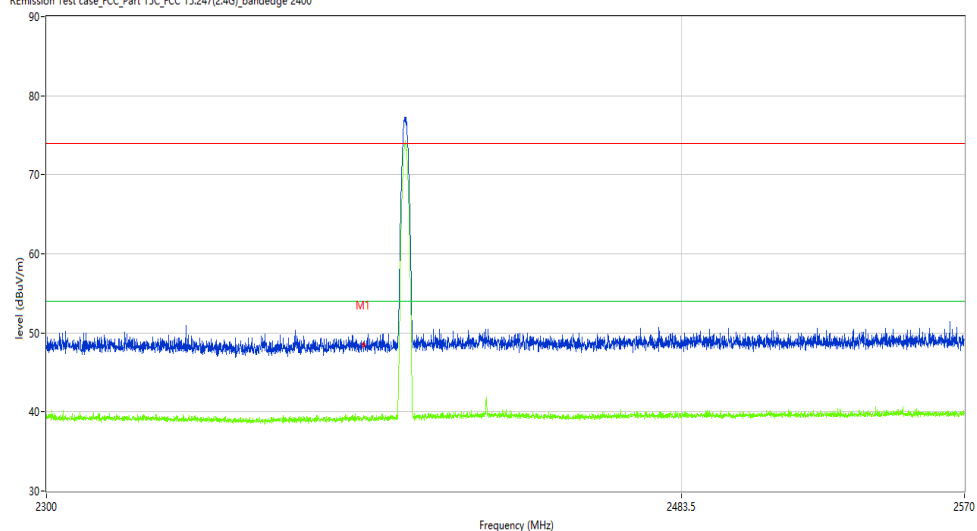

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.41	-10.41	74.0	-25.59	Peak	2.35	100	V	Pass
1**	2390.000	39.32	-10.41	54.0	-14.68	AV	2.35	100	V	Pass

BT 3M -Bandedge -High channel- Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-05-08_15:20:26

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

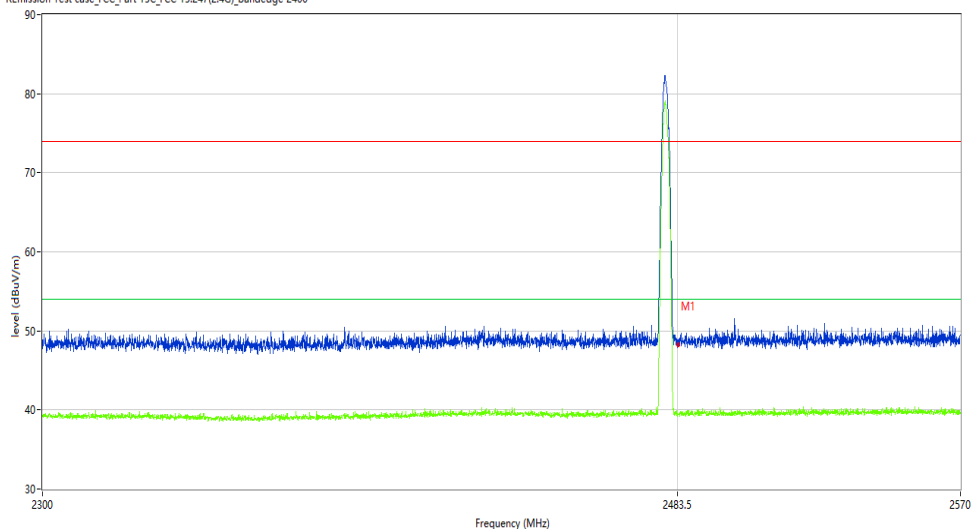

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.18	-10.08	74.0	-25.82	Peak	195.95	100	H	Pass
1**	2483.500	39.24	-10.08	54.0	-14.76	AV	195.95	100	H	Pass

BT 3M -Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_15:08:37

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 23.2

Load: Full Load

Hum.: 52%

Remark: DR-RSE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

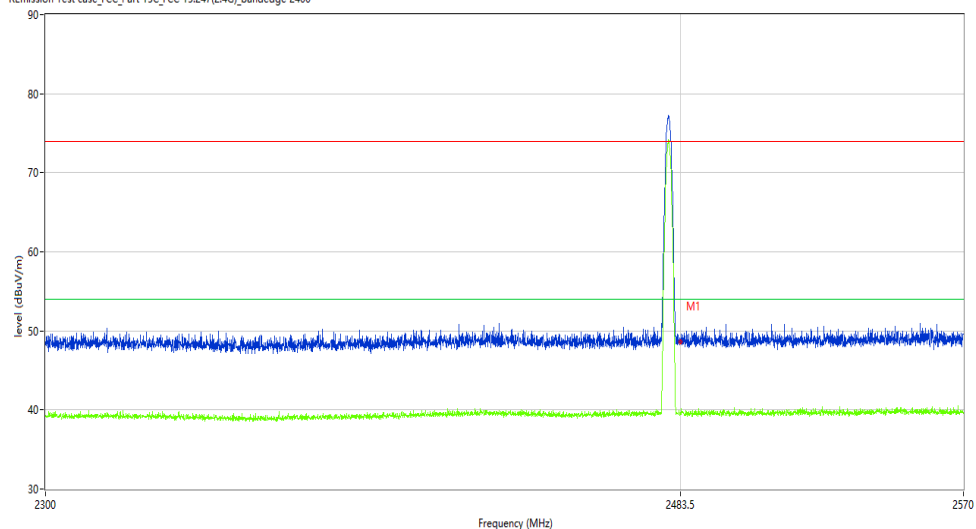

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.53	-10.08	74.0	-25.47	Peak	145.67	100	V	Pass
1**	2483.500	39.42	-10.08	54.0	-14.58	AV	145.67	100	V	Pass

30M-1G

BT 3M-Hopping-Horizontal-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.58.58

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54 %

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_30MHz-1GHz

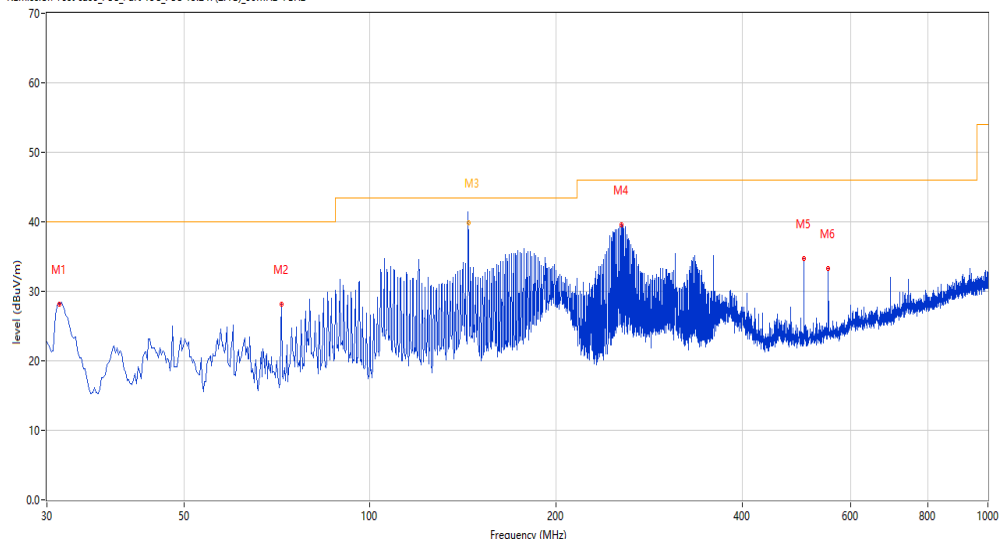

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.455	28.17	-24.06	40.0	-11.83	Peak	189.70	200	Horizontal	Pass
2	71.942	28.20	-24.25	40.0	-11.80	Peak	310.00	300	Horizontal	Pass
3	144.322	41.09	-24.28	43.5	-2.41	Peak	143.90	125	Horizontal	Pass
3*	144.322	39.83	-24.28	43.5	-3.67	QP	143.90	125	Horizontal	Pass
4	254.984	39.56	-18.55	46.0	-6.44	Peak	287.00	100	Horizontal	Pass
5	503.969	34.78	-12.47	46.0	-11.22	Peak	360.00	300	Horizontal	Pass
6	551.972	33.31	-11.31	46.0	-12.69	Peak	13.10	200	Horizontal	Pass

BT 3M-Hopping -Vertical-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.53.14

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

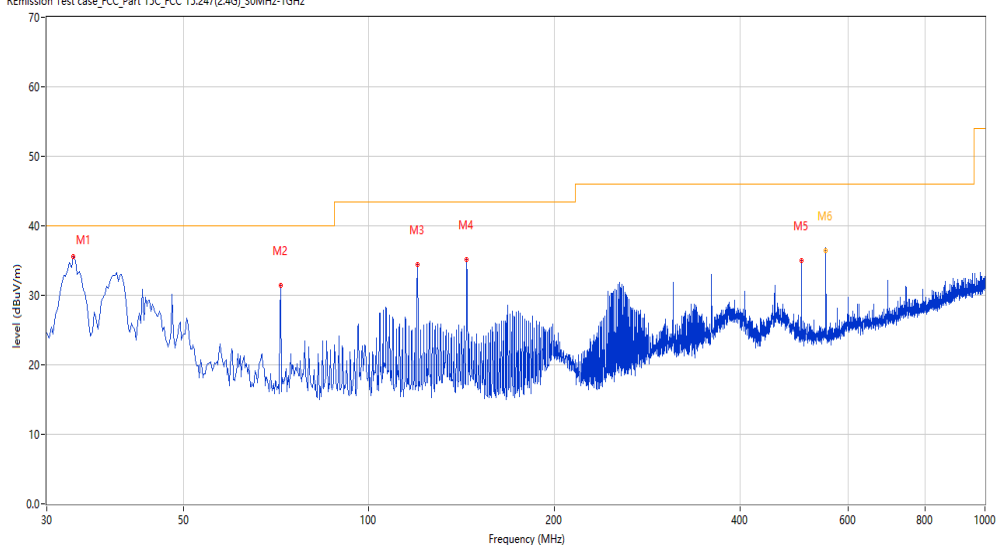

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.152	35.62	-23.64	40.0	-4.38	Peak	0.00	200	Vertical	Pass
2	71.942	31.46	-24.25	40.0	-8.54	Peak	337.70	200	Vertical	Pass
3	119.945	34.39	-22.71	43.5	-9.11	Peak	343.60	100	Vertical	Pass
4	144.189	35.12	-24.28	43.5	-8.38	Peak	234.50	200	Vertical	Pass
5	503.969	34.94	-12.47	46.0	-11.06	Peak	359.00	100	Vertical	Pass
6	551.999	37.76	-11.31	46.0	-8.24	Peak	243.50	102	Vertical	Pass
6*	551.999	36.49	-11.31	46.0	-9.51	QP	243.50	102	Vertical	Pass

1-18G

BT 3M-Hopping -Horizontal-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.44.54

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

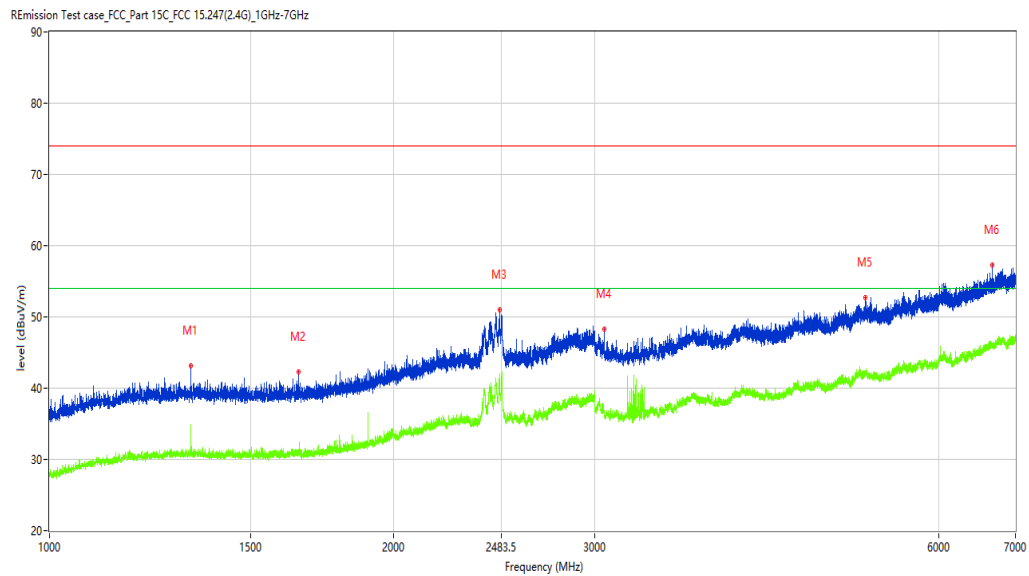

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.959	43.10	-13.07	74.0	-30.90	Peak	197.60	100	Horizontal	Pass
1**	1328.959	34.80	-13.07	54.0	-19.20	AV	197.60	100	Horizontal	Pass
2	1651.419	42.22	-13.01	74.0	-31.78	Peak	324.20	100	Horizontal	Pass
2**	1651.419	31.37	-13.01	54.0	-22.63	AV	324.20	100	Horizontal	Pass
3	2475.816	50.95	-2.68	74.0	-23.05	Peak	142.50	100	Horizontal	Pass
3**	2475.816	41.51	-2.68	54.0	-12.49	AV	142.50	100	Horizontal	Pass
4	3055.993	48.29	-5.41	74.0	-25.71	Peak	302.80	100	Horizontal	Pass
4**	3055.993	36.52	-5.41	54.0	-17.48	AV	302.80	100	Horizontal	Pass
5	5173.228	52.76	0.25	74.0	-21.24	Peak	14.10	100	Horizontal	Pass
5**	5173.228	42.18	0.25	54.0	-11.82	AV	14.10	100	Horizontal	Pass
6	6684.539	57.35	3.60	74.0	-16.65	Peak	353.40	100	Horizontal	Pass
6**	6684.539	46.11	3.60	54.0	-7.89	AV	353.40	100	Horizontal	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10:53:00

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9361.660	40.74	11.33	74.0	-33.26	Peak	122.00	100	Horizontal	Pass
1**	9361.660	31.86	11.33	54.0	-22.14	AV	122.00	100	Horizontal	Pass
2	11288.928	45.60	15.67	74.0	-28.40	Peak	353.40	100	Horizontal	Pass
2**	11288.928	36.45	15.67	54.0	-17.55	AV	353.40	100	Horizontal	Pass
3	13218.945	49.95	18.53	74.0	-24.05	Peak	103.50	100	Horizontal	Pass
3**	13218.945	41.16	18.53	54.0	-12.84	AV	103.50	100	Horizontal	Pass
4	14189.453	52.10	22.33	74.0	-21.90	Peak	348.30	100	Horizontal	Pass
4**	14189.453	43.55	22.33	54.0	-10.45	AV	348.30	100	Horizontal	Pass
5	17414.396	56.86	24.49	74.0	-17.14	Peak	176.80	100	Horizontal	Pass
5**	17414.396	47.90	24.49	54.0	-6.10	AV	176.80	100	Horizontal	Pass
6	17807.548	56.94	24.83	74.0	-17.06	Peak	126.90	100	Horizontal	Pass
6**	17807.548	48.68	24.83	54.0	-5.32	AV	126.90	100	Horizontal	Pass

BT 3M-Hopping -Vertical-DH5-TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.47.07

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

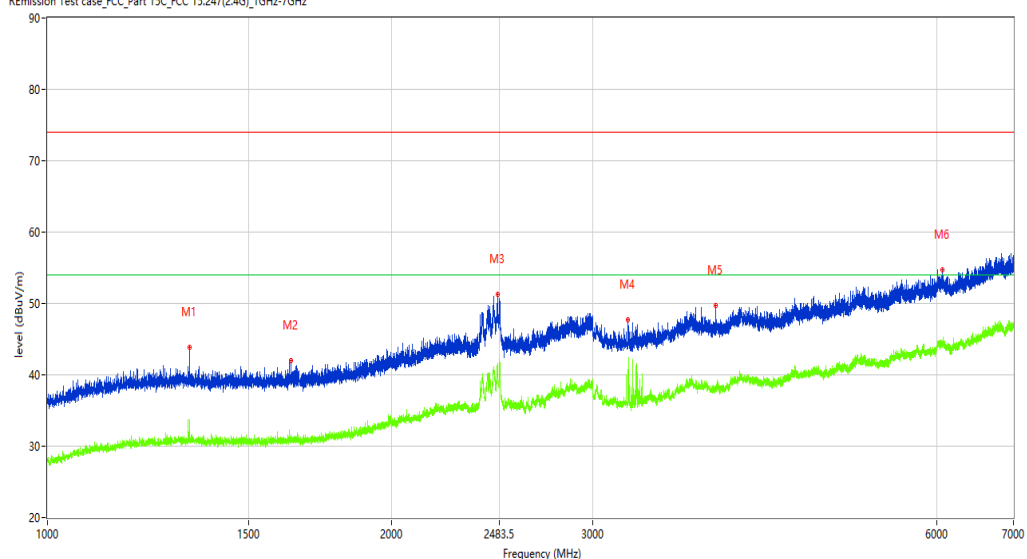

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.959	43.88	-13.07	74.0	-30.12	Peak	122.60	100	Vertical	Pass
1**	1330.959	33.73	-13.07	54.0	-20.27	AV	122.60	100	Vertical	Pass
2	1633.921	42.04	-13.03	74.0	-31.96	Peak	339.80	100	Vertical	Pass
2**	1633.921	31.10	-13.03	54.0	-22.90	AV	339.80	100	Vertical	Pass
3	2475.566	51.31	-2.68	74.0	-22.69	Peak	244.70	100	Vertical	Pass
3**	2475.566	41.30	-2.68	54.0	-12.70	AV	244.70	100	Vertical	Pass
4	3220.972	47.67	-5.70	74.0	-26.33	Peak	36.80	100	Vertical	Pass
4**	3220.972	40.77	-5.70	54.0	-13.23	AV	36.80	100	Vertical	Pass
5	3841.895	49.65	-3.39	74.0	-24.35	Peak	267.80	100	Vertical	Pass
5**	3841.895	37.72	-3.39	54.0	-16.28	AV	267.80	100	Vertical	Pass
6	6062.617	54.78	2.06	74.0	-19.22	Peak	161.80	100	Vertical	Pass
6**	6062.617	44.21	2.06	54.0	-9.79	AV	161.80	100	Vertical	Pass

Test result

Project Number: 验证测试

Test Time: 2021-05-08_10.49.52

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: N.A

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7987.003	37.31	7.50	74.0	-36.69	Peak	7.20	100	Vertical	Pass
1**	7987.003	27.71	7.50	54.0	-26.29	AV	7.20	100	Vertical	Pass
2	9460.635	41.26	11.57	74.0	-32.74	Peak	68.70	100	Vertical	Pass
2**	9460.635	31.77	11.57	54.0	-22.23	AV	68.70	100	Vertical	Pass
3	14502.874	52.21	20.01	74.0	-21.79	Peak	209.20	100	Vertical	Pass
3**	14502.874	42.86	20.01	54.0	-11.14	AV	209.20	100	Vertical	Pass
4	14742.064	53.38	21.25	74.0	-20.62	Peak	63.80	100	Vertical	Pass
4**	14742.064	43.55	21.25	54.0	-10.45	AV	63.80	100	Vertical	Pass
5	17403.399	56.97	24.38	74.0	-17.03	Peak	0.70	100	Vertical	Pass
5**	17403.399	47.52	24.38	54.0	-6.48	AV	0.70	100	Vertical	Pass
6	17813.047	57.63	24.67	74.0	-16.37	Peak	333.90	100	Vertical	Pass
6**	17813.047	49.05	24.67	54.0	-4.95	AV	333.90	100	Vertical	Pass

BT 3M-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.42.03

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.68	-10.41	74.0	-25.32	Peak	302.62	100	H	Pass
1**	2390.000	39.33	-10.41	54.0	-14.67	AV	302.62	100	H	Pass
2	2483.500	49.33	-10.08	74.0	-24.67	Peak	217.78	100	H	Pass
2**	2483.500	39.58	-10.08	54.0	-14.42	AV	217.78	100	H	Pass

BT 3M-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: 验证测试

Test Time: 2021-05-08_14.39.21

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RE01-E21040017-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.61	-10.41	74.0	-25.39	Peak	80.73	100	V	Pass
1**	2390.000	39.46	-10.41	54.0	-14.54	AV	80.73	100	V	Pass
2	2483.500	48.93	-10.08	74.0	-25.07	Peak	182.51	100	V	Pass
2**	2483.500	39.82	-10.08	54.0	-14.18	AV	182.51	100	V	Pass