

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BT-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_13.34.01

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

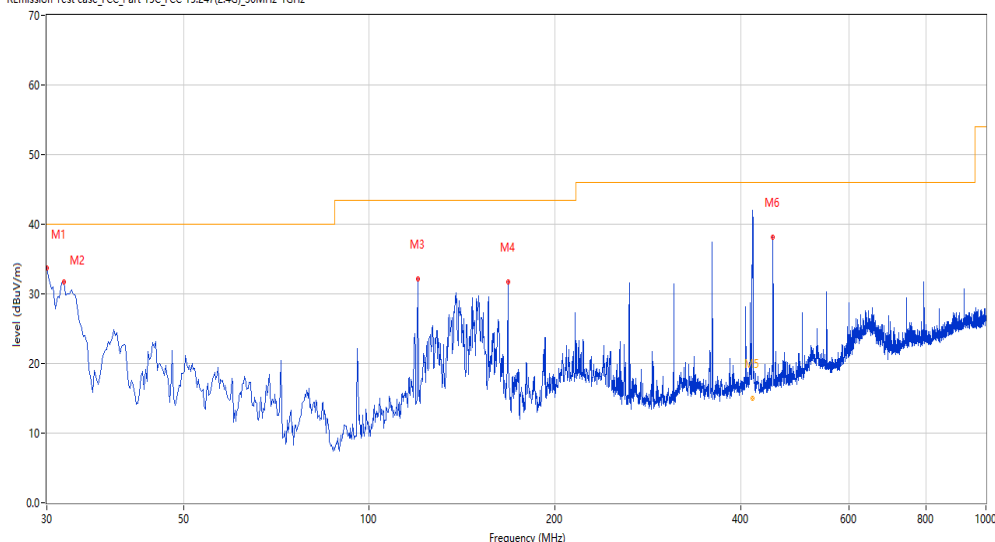

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	33.64	-29.74	40.0	-6.36	Peak	323.70	200	Horizontal	Pass
2	31.940	31.65	-29.08	40.0	-8.35	Peak	303.90	200	Horizontal	Pass
3	119.945	32.13	-28.21	43.5	-11.37	Peak	360.00	300	Horizontal	Pass
4	167.948	31.65	-29.03	43.5	-11.85	Peak	291.90	200	Horizontal	Pass
5	418.674	19.40	-20.40	46.0	-26.60	Peak	92.30	264	Horizontal	Pass
5*	418.674	14.96	-20.40	46.0	-31.04	QP	92.30	264	Horizontal	Pass
6	451.360	38.13	-19.77	46.0	-7.87	Peak	92.30	200	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_13.27.56

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

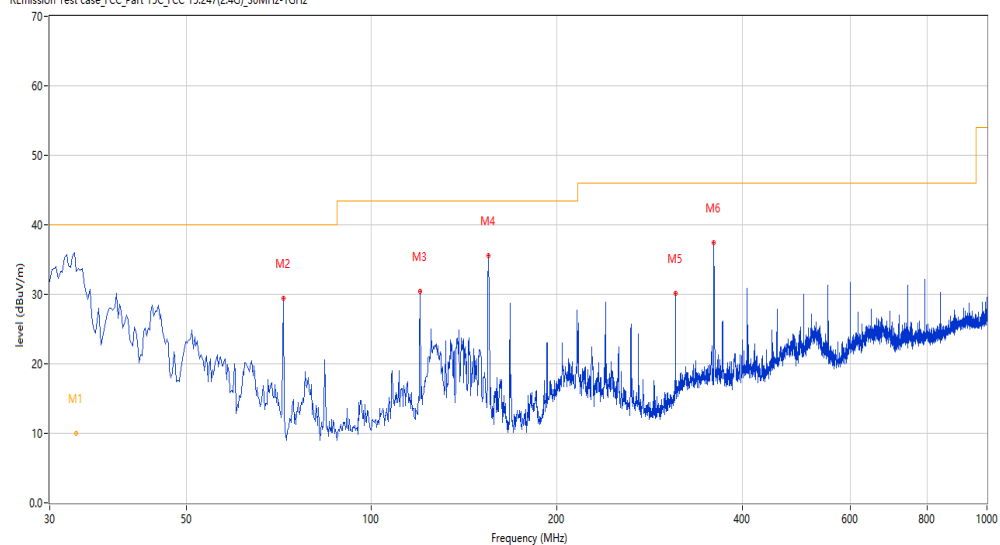

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.093	11.18	-28.72	40.0	-28.82	Peak	230.80	180	Vertical	Pass
1*	33.093	9.94	-28.72	40.0	-30.06	QP	230.80	180	Vertical	Pass
2	71.942	29.47	-29.98	40.0	-10.53	Peak	343.10	200	Vertical	Pass
3	119.945	30.45	-28.21	43.5	-13.05	Peak	273.80	100	Vertical	Pass
4	154.856	35.52	-29.64	43.5	-7.98	Peak	101.10	100	Vertical	Pass
5	311.957	30.19	-23.40	46.0	-15.81	Peak	93.40	100	Vertical	Pass
6	359.960	37.39	-22.27	46.0	-8.61	Peak	136.60	100	Vertical	Pass

1-18G

BT-Low channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.54.41

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

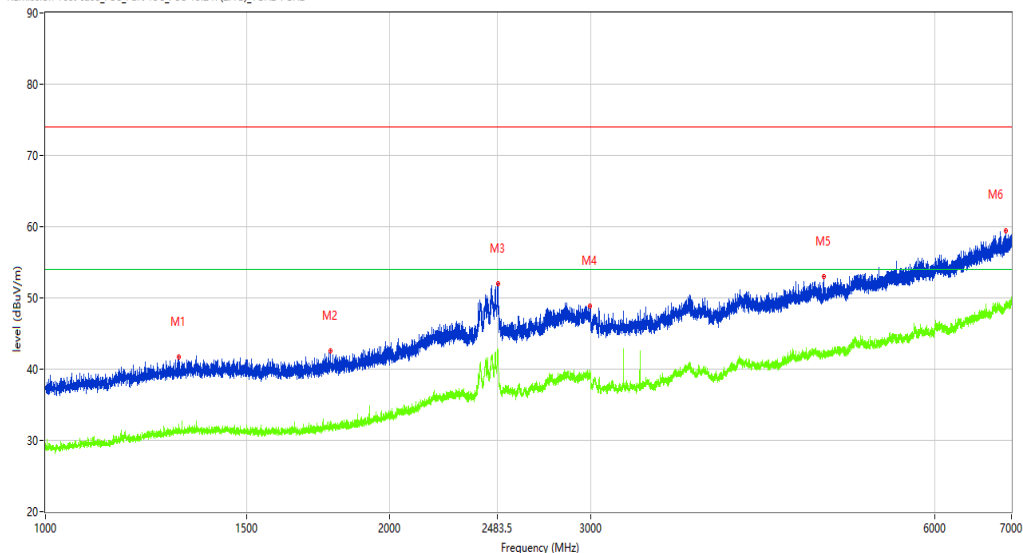

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1307.712	41.65	-12.60	74.0	-32.35	Peak	39.70	100	Horizontal	Pass
1**	1307.712	31.76	-12.60	54.0	-22.24	AV	39.70	100	Horizontal	Pass
2	1775.403	42.54	-12.32	74.0	-31.46	Peak	13.70	100	Horizontal	Pass
2**	1775.403	32.08	-12.32	54.0	-21.92	AV	13.70	100	Horizontal	Pass
3	2488.314	51.96	-1.88	74.0	-22.04	Peak	26.40	100	Horizontal	Pass
3**	2488.314	41.69	-1.88	54.0	-12.31	AV	26.40	100	Horizontal	Pass
4	2994.001	48.80	-3.07	74.0	-25.20	Peak	52.60	100	Horizontal	Pass
4**	2994.001	39.20	-3.07	54.0	-14.80	AV	52.60	100	Horizontal	Pass
5	4797.275	53.04	-0.62	74.0	-20.96	Peak	210.60	100	Horizontal	Pass
5**	4797.275	42.78	-0.62	54.0	-11.22	AV	210.60	100	Horizontal	Pass
6	6916.510	59.40	5.07	74.0	-14.60	Peak	302.60	100	Horizontal	Pass
6**	6916.510	48.75	5.07	54.0	-5.25	AV	302.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_11.07.21

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8041.990	30.34	-0.48	74.0	-43.66	Peak	7.80	100	Horizontal	Pass
1**	8041.990	21.99	-0.48	54.0	-32.01	AV	7.80	100	Horizontal	Pass
2	9147.213	34.71	2.28	74.0	-39.29	Peak	208.50	100	Horizontal	Pass
2**	9147.213	25.30	2.28	54.0	-28.70	AV	208.50	100	Horizontal	Pass
3	9884.029	37.02	4.44	74.0	-36.98	Peak	224.00	100	Horizontal	Pass
3**	9884.029	29.14	4.44	54.0	-24.86	AV	224.00	100	Horizontal	Pass
4	11250.437	39.83	6.90	74.0	-34.17	Peak	168.10	100	Horizontal	Pass
4**	11250.437	30.64	6.90	54.0	-23.36	AV	168.10	100	Horizontal	Pass
5	14541.365	47.33	12.40	74.0	-26.67	Peak	68.90	100	Horizontal	Pass
5**	14541.365	37.91	12.40	54.0	-16.09	AV	68.90	100	Horizontal	Pass
6	17986.253	55.34	22.07	74.0	-18.66	Peak	160.40	100	Horizontal	Pass
6**	17986.253	47.18	22.07	54.0	-6.82	AV	160.40	100	Horizontal	Pass

BT-Low channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.05.16

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

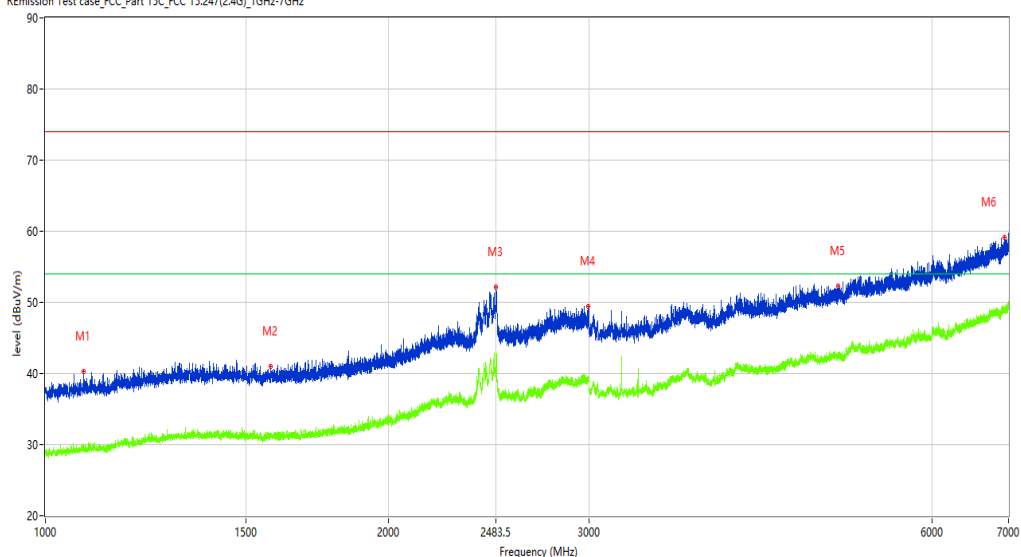

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1080.990	40.25	-14.23	74.0	-33.75	Peak	259.50	100	Vertical	Pass
1**	1080.990	29.44	-14.23	54.0	-24.56	AV	259.50	100	Vertical	Pass
2	1577.428	41.03	-13.03	74.0	-32.97	Peak	345.70	100	Vertical	Pass
2**	1577.428	31.27	-13.03	54.0	-22.73	AV	345.70	100	Vertical	Pass
3	2486.814	52.08	-1.90	74.0	-21.92	Peak	182.30	100	Vertical	Pass
3**	2486.814	43.10	-1.90	54.0	-10.90	AV	182.30	100	Vertical	Pass
4	2995.251	49.45	-3.07	74.0	-24.55	Peak	114.00	100	Vertical	Pass
4**	2995.251	39.07	-3.07	54.0	-14.93	AV	114.00	100	Vertical	Pass
5	4963.755	52.23	0.22	74.0	-21.77	Peak	310.40	100	Vertical	Pass
5**	4963.755	42.75	0.22	54.0	-11.25	AV	310.40	100	Vertical	Pass
6	6946.507	59.12	5.17	74.0	-14.88	Peak	8.00	100	Vertical	Pass
6**	6946.507	48.93	5.17	54.0	-5.07	AV	8.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.16.13

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

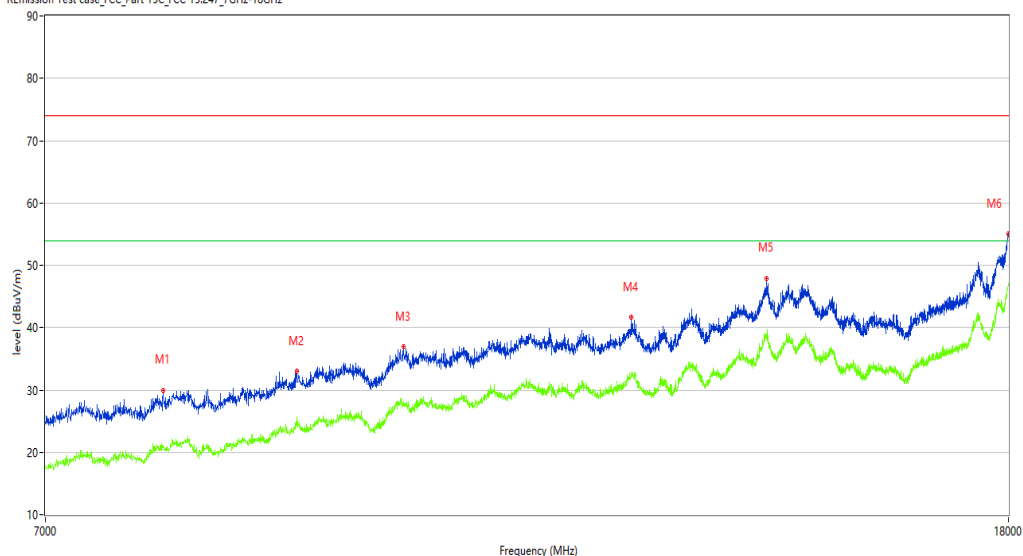

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7855.036	29.93	-2.42	74.0	-44.07	Peak	314.10	100	Vertical	Pass
1**	7855.036	21.16	-2.42	54.0	-32.84	AV	314.10	100	Vertical	Pass
2	8954.761	32.96	2.30	74.0	-41.04	Peak	79.10	100	Vertical	Pass
2**	8954.761	25.66	2.30	54.0	-28.34	AV	79.10	100	Vertical	Pass
3	9944.514	36.88	4.73	74.0	-37.12	Peak	15.80	100	Vertical	Pass
3**	9944.514	28.11	4.73	54.0	-25.89	AV	15.80	100	Vertical	Pass
4	12435.391	41.60	7.43	74.0	-32.40	Peak	294.10	100	Vertical	Pass
4**	12435.391	32.82	7.43	54.0	-21.18	AV	294.10	100	Vertical	Pass
5	14200.450	47.87	14.49	74.0	-26.13	Peak	353.70	100	Vertical	Pass
5**	14200.450	38.97	14.49	54.0	-15.03	AV	353.70	100	Vertical	Pass
6	18000.000	55.04	22.92	74.0	-18.96	Peak	79.10	100	Vertical	Pass
6**	18000.000	47.13	22.92	54.0	-6.87	AV	79.10	100	Vertical	Pass

BT-Middle channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.59.40

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

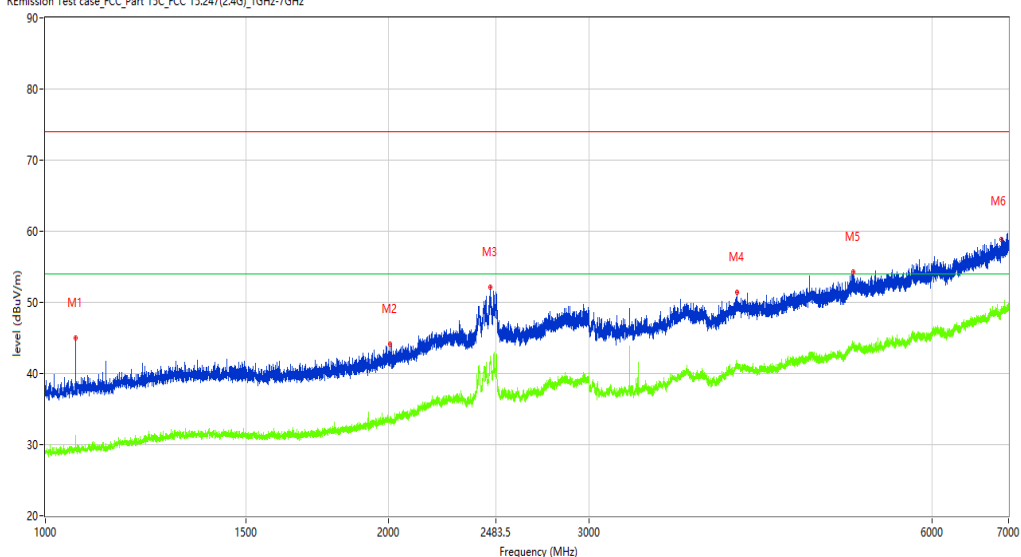

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1062.992	44.97	-14.36	74.0	-29.03	Peak	135.90	100	Horizontal	Pass
1**	1062.992	31.32	-14.36	54.0	-22.68	AV	135.90	100	Horizontal	Pass
2	2005.374	44.13	-10.83	74.0	-29.87	Peak	267.20	100	Horizontal	Pass
2**	2005.374	33.39	-10.83	54.0	-20.61	AV	267.20	100	Horizontal	Pass
3	2457.568	52.21	-2.61	74.0	-21.79	Peak	359.30	100	Horizontal	Pass
3**	2457.568	41.83	-2.61	54.0	-12.17	AV	359.30	100	Horizontal	Pass
4	4044.369	51.43	-0.89	74.0	-22.57	Peak	287.20	100	Horizontal	Pass
4**	4044.369	41.11	-0.89	54.0	-12.89	AV	287.20	100	Horizontal	Pass
5	5112.736	54.22	1.31	74.0	-19.78	Peak	299.50	100	Horizontal	Pass
5**	5112.736	43.58	1.31	54.0	-10.42	AV	299.50	100	Horizontal	Pass
6	6898.013	58.87	5.09	74.0	-15.13	Peak	20.60	100	Horizontal	Pass
6**	6898.013	48.50	5.09	54.0	-5.50	AV	20.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_11.05.32

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54


Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

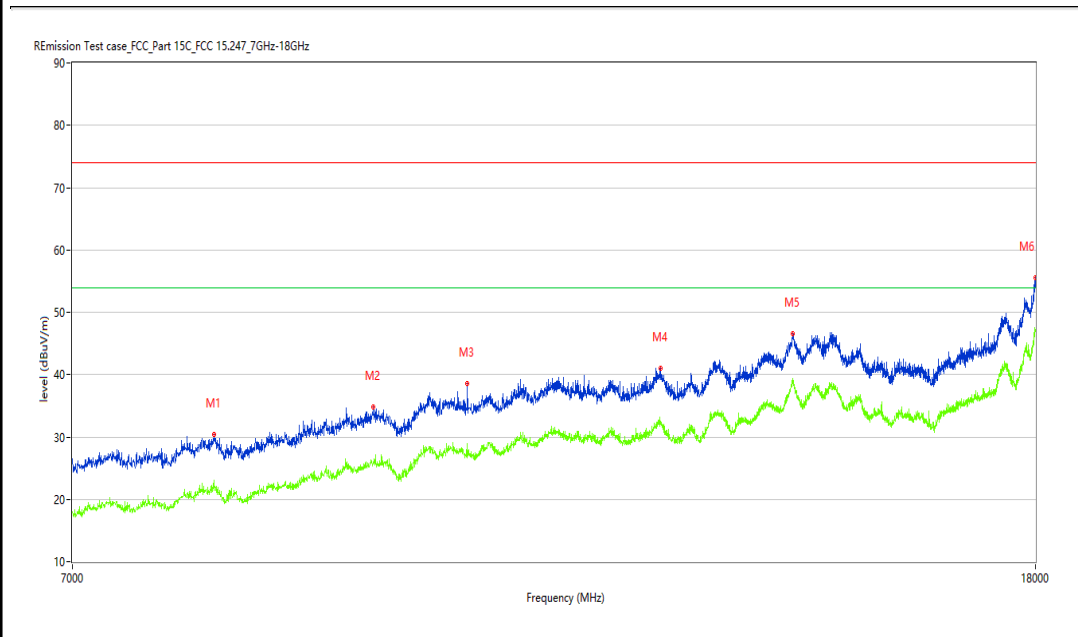

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8041.990	30.43	-0.48	74.0	-43.57	Peak	46.80	100	Horizontal	Pass
1**	8041.990	23.05	-0.48	54.0	-30.95	AV	46.80	100	Horizontal	Pass
2	9405.649	34.88	2.65	74.0	-39.12	Peak	349.20	100	Horizontal	Pass
2**	9405.649	25.65	2.65	54.0	-28.35	AV	349.20	100	Horizontal	Pass
3	10312.922	38.64	4.11	74.0	-35.36	Peak	192.50	100	Horizontal	Pass
3**	10312.922	29.01	4.11	54.0	-24.99	AV	192.50	100	Horizontal	Pass
4	12462.884	41.01	7.55	74.0	-32.99	Peak	140.70	100	Horizontal	Pass
4**	12462.884	32.38	7.55	54.0	-21.62	AV	140.70	100	Horizontal	Pass
5	14192.202	46.65	14.67	74.0	-27.35	Peak	269.50	100	Horizontal	Pass
5**	14192.202	39.37	14.67	54.0	-14.63	AV	269.50	100	Horizontal	Pass
6	17994.501	55.62	22.58	74.0	-18.38	Peak	196.60	100	Horizontal	Pass
6**	17994.501	47.27	22.58	54.0	-6.73	AV	196.60	100	Horizontal	Pass

BT-Middle channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.08.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

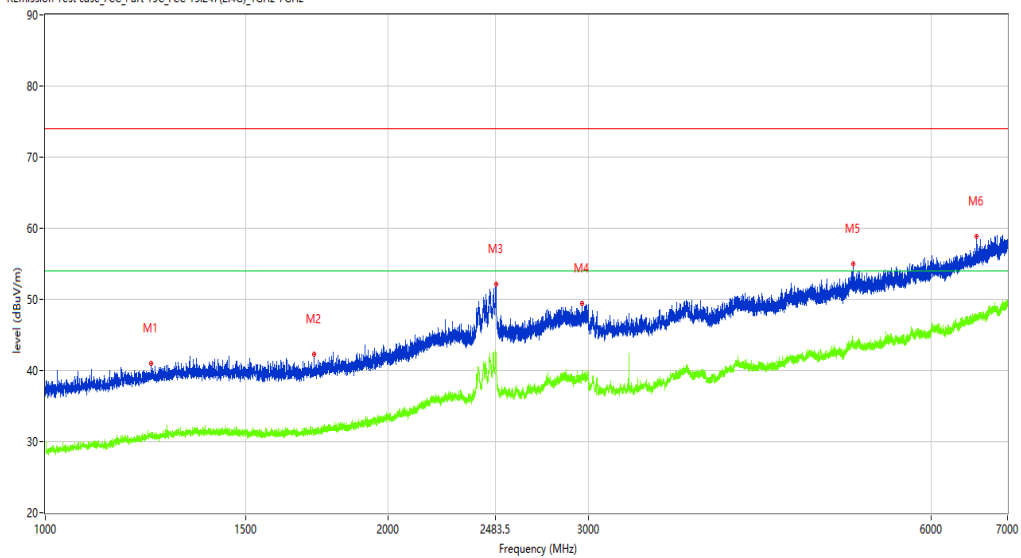

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1238.970	40.99	-13.19	74.0	-33.01	Peak	212.50	100	Vertical	Pass
1**	1238.970	30.92	-13.19	54.0	-23.08	AV	212.50	100	Vertical	Pass
2	1721.910	42.24	-12.57	74.0	-31.76	Peak	117.70	100	Vertical	Pass
2**	1721.910	31.74	-12.57	54.0	-22.26	AV	117.70	100	Vertical	Pass
3	2487.064	52.19	-1.89	74.0	-21.81	Peak	66.80	100	Vertical	Pass
3**	2487.064	42.19	-1.89	54.0	-11.81	AV	66.80	100	Vertical	Pass
4	2962.005	49.43	-3.40	74.0	-24.57	Peak	291.30	100	Vertical	Pass
4**	2962.005	39.42	-3.40	54.0	-14.58	AV	291.30	100	Vertical	Pass
5	5120.235	54.98	1.27	74.0	-19.02	Peak	17.60	100	Vertical	Pass
5**	5120.235	43.57	1.27	54.0	-10.43	AV	17.60	100	Vertical	Pass
6	6571.054	58.87	4.22	74.0	-15.13	Peak	0.40	100	Vertical	Pass
6**	6571.054	47.62	4.22	54.0	-6.38	AV	0.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.14.30

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7835.791	29.63	-2.33	74.0	-44.37	Peak	268.90	100	Vertical	Pass
1**	7835.791	20.85	-2.33	54.0	-33.15	AV	268.90	100	Vertical	Pass
2	9889.528	37.71	4.53	74.0	-36.29	Peak	40.90	100	Vertical	Pass
2**	9889.528	27.76	4.53	54.0	-26.24	AV	40.90	100	Vertical	Pass
3	11209.198	39.21	6.37	74.0	-34.79	Peak	240.70	100	Vertical	Pass
3**	11209.198	31.33	6.37	54.0	-22.67	AV	240.70	100	Vertical	Pass
4	13139.215	42.30	8.92	74.0	-31.70	Peak	352.50	100	Vertical	Pass
4**	13139.215	33.63	8.92	54.0	-20.37	AV	352.50	100	Vertical	Pass
5	14186.703	47.44	14.72	74.0	-26.56	Peak	280.90	100	Vertical	Pass
5**	14186.703	40.20	14.72	54.0	-13.80	AV	280.90	100	Vertical	Pass
6	17986.253	54.66	22.07	74.0	-19.34	Peak	140.40	100	Vertical	Pass
6**	17986.253	47.08	22.07	54.0	-6.92	AV	140.40	100	Vertical	Pass

BT-High channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_11.02.17

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

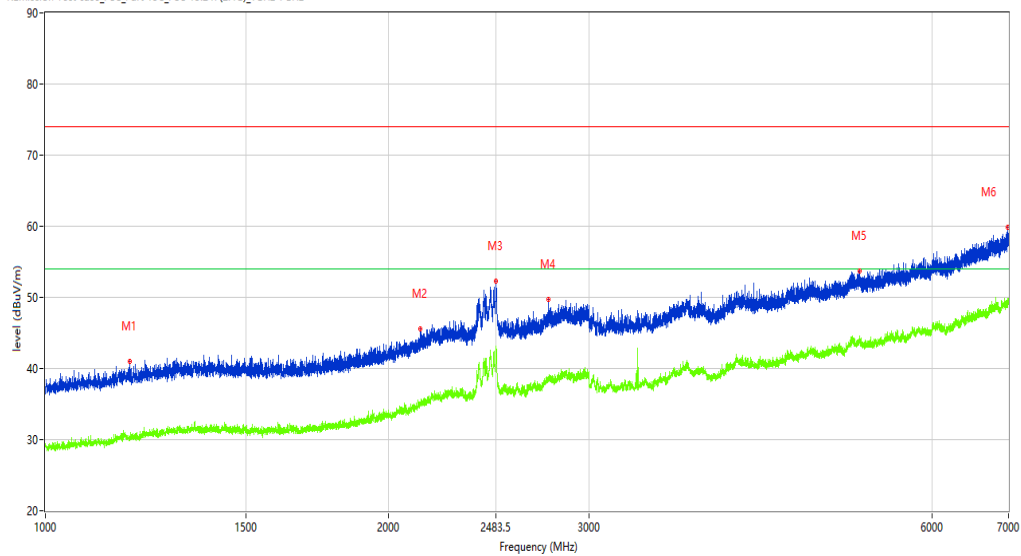

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1184.977	41.00	-13.65	74.0	-33.00	Peak	150.10	100	Horizontal	Pass
1**	1184.977	30.01	-13.65	54.0	-23.99	AV	150.10	100	Horizontal	Pass
2	2131.609	45.52	-9.22	74.0	-28.48	Peak	169.90	100	Horizontal	Pass
2**	2131.609	34.93	-9.22	54.0	-19.07	AV	169.90	100	Horizontal	Pass
3	2486.814	52.23	-1.90	74.0	-21.77	Peak	185.30	100	Horizontal	Pass
3**	2486.814	42.63	-1.90	54.0	-11.37	AV	185.30	100	Horizontal	Pass
4	2762.530	49.66	-4.74	74.0	-24.34	Peak	323.40	100	Horizontal	Pass
4**	2762.530	38.67	-4.74	54.0	-15.33	AV	323.40	100	Horizontal	Pass
5	5178.228	53.77	1.13	74.0	-20.23	Peak	174.10	100	Horizontal	Pass
5**	5178.228	44.22	1.13	54.0	-9.78	AV	174.10	100	Horizontal	Pass
6	6993.501	59.87	5.61	74.0	-14.13	Peak	235.00	100	Horizontal	Pass
6**	6993.501	49.44	5.61	54.0	-4.56	AV	235.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_11.03.58

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case FCC_Part 15C_FCC 15.247_7GHz-18GHz

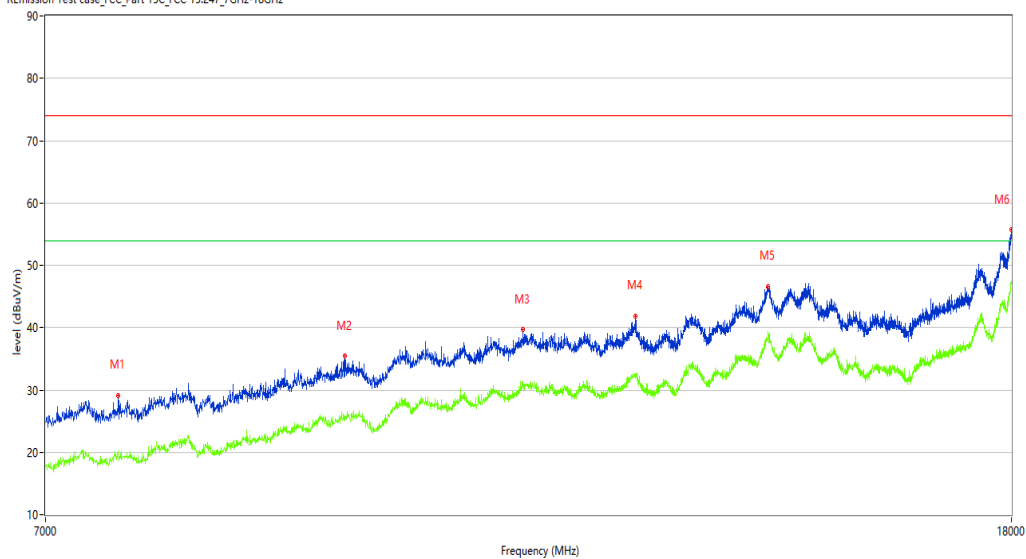

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7516.871	29.10	-2.68	74.0	-44.90	Peak	210.40	100	Horizontal	Pass
1**	7516.871	19.84	-2.68	54.0	-34.16	AV	210.40	100	Horizontal	Pass
2	9383.654	35.43	2.66	74.0	-38.57	Peak	235.40	100	Horizontal	Pass
2**	9383.654	25.76	2.66	54.0	-28.24	AV	235.40	100	Horizontal	Pass
3	11165.209	39.67	5.98	74.0	-34.33	Peak	231.40	100	Horizontal	Pass
3**	11165.209	31.38	5.98	54.0	-22.62	AV	231.40	100	Horizontal	Pass
4	12465.634	41.85	7.56	74.0	-32.15	Peak	106.90	100	Horizontal	Pass
4**	12465.634	32.56	7.56	54.0	-21.44	AV	106.90	100	Horizontal	Pass
5	14181.205	46.57	14.55	74.0	-27.43	Peak	357.80	100	Horizontal	Pass
5**	14181.205	38.50	14.55	54.0	-15.50	AV	357.80	100	Horizontal	Pass
6	18000.000	55.67	22.92	74.0	-18.33	Peak	347.20	100	Horizontal	Pass
6**	18000.000	47.32	22.92	54.0	-6.68	AV	347.20	100	Horizontal	Pass

BT-High channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.10.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

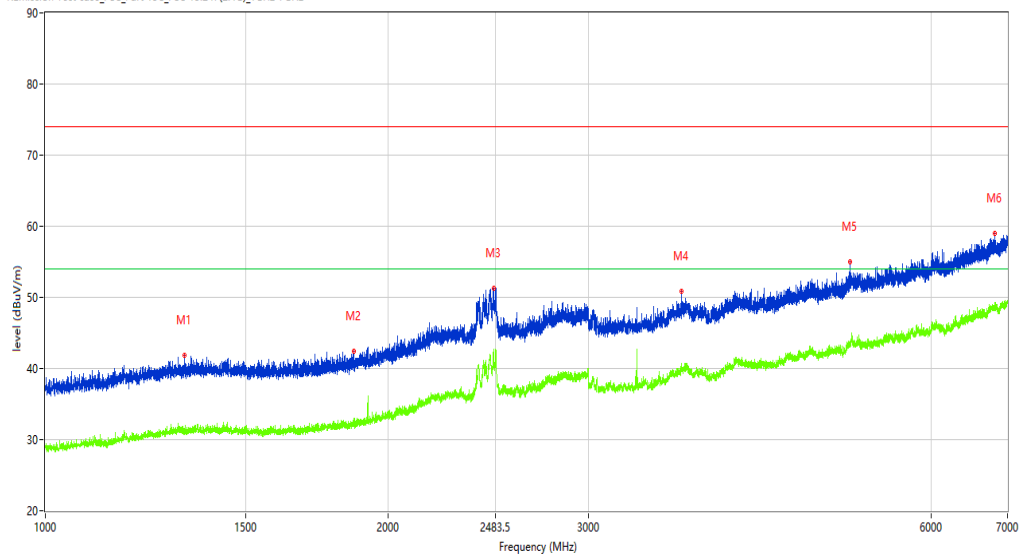

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1324.459	41.86	-12.94	74.0	-32.14	Peak	271.80	100	Vertical	Pass
1**	1324.459	31.16	-12.94	54.0	-22.84	AV	271.80	100	Vertical	Pass
2	1866.892	42.49	-12.09	74.0	-31.51	Peak	232.60	100	Vertical	Pass
2**	1866.892	32.73	-12.09	54.0	-21.27	AV	232.60	100	Vertical	Pass
3	2475.066	51.31	-2.14	74.0	-22.69	Peak	323.10	100	Vertical	Pass
3**	2475.066	42.64	-2.14	54.0	-11.36	AV	323.10	100	Vertical	Pass
4	3620.422	50.93	-1.69	74.0	-23.07	Peak	338.20	100	Vertical	Pass
4**	3620.422	39.73	-1.69	54.0	-14.27	AV	338.20	100	Vertical	Pass
5	5089.239	55.01	1.22	74.0	-18.99	Peak	9.80	100	Vertical	Pass
5**	5089.239	43.57	1.22	54.0	-10.43	AV	9.80	100	Vertical	Pass
6	6819.523	58.98	5.11	74.0	-15.02	Peak	96.00	100	Vertical	Pass
6**	6819.523	48.92	5.11	54.0	-5.08	AV	96.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.12.28

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7195.201	26.07	-3.87	74.0	-47.93	Peak	196.50	100	Vertical	Pass
1**	7195.201	18.60	-3.87	54.0	-35.40	AV	196.50	100	Vertical	Pass
2	9422.144	34.76	2.62	74.0	-39.24	Peak	332.40	100	Vertical	Pass
2**	9422.144	25.90	2.62	54.0	-28.10	AV	332.40	100	Vertical	Pass
3	11253.187	39.23	6.94	74.0	-34.77	Peak	353.10	100	Vertical	Pass
3**	11253.187	31.32	6.94	54.0	-22.68	AV	353.10	100	Vertical	Pass
4	13150.212	42.02	8.97	74.0	-31.98	Peak	256.40	100	Vertical	Pass
4**	13150.212	34.12	8.97	54.0	-19.88	AV	256.40	100	Vertical	Pass
5	14178.455	47.34	14.46	74.0	-26.66	Peak	216.60	100	Vertical	Pass
5**	14178.455	38.65	14.46	54.0	-15.35	AV	216.60	100	Vertical	Pass
6	18000.000	54.98	22.92	74.0	-19.02	Peak	180.10	100	Vertical	Pass
6**	18000.000	47.87	22.92	54.0	-6.13	AV	180.10	100	Vertical	Pass

BT-Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.12.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

Remission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

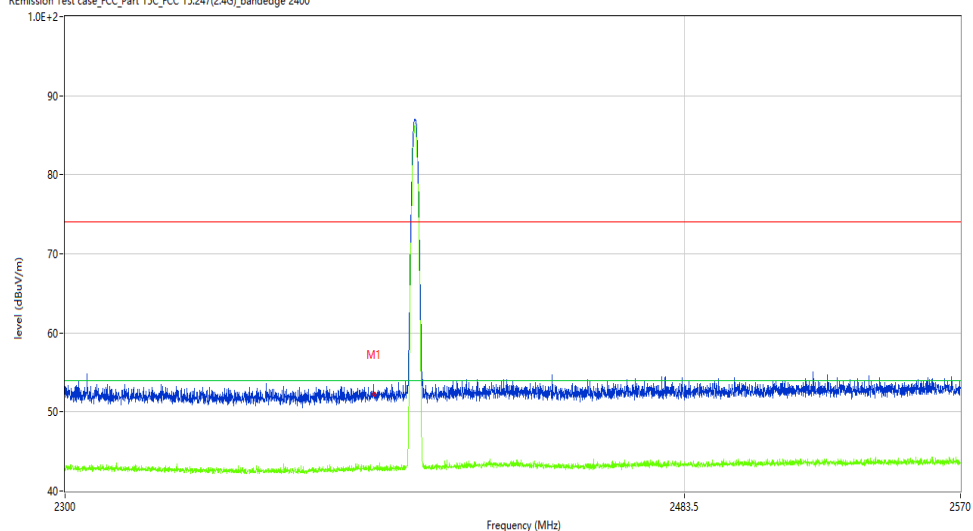

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.13	-9.96	74.0	-21.87	Peak	235.45	100	H	Pass
1**	2390.000	42.79	-9.96	54.0	-11.21	AV	235.45	100	H	Pass

BT-Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.41.49

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:

Test Standard: RSE


Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

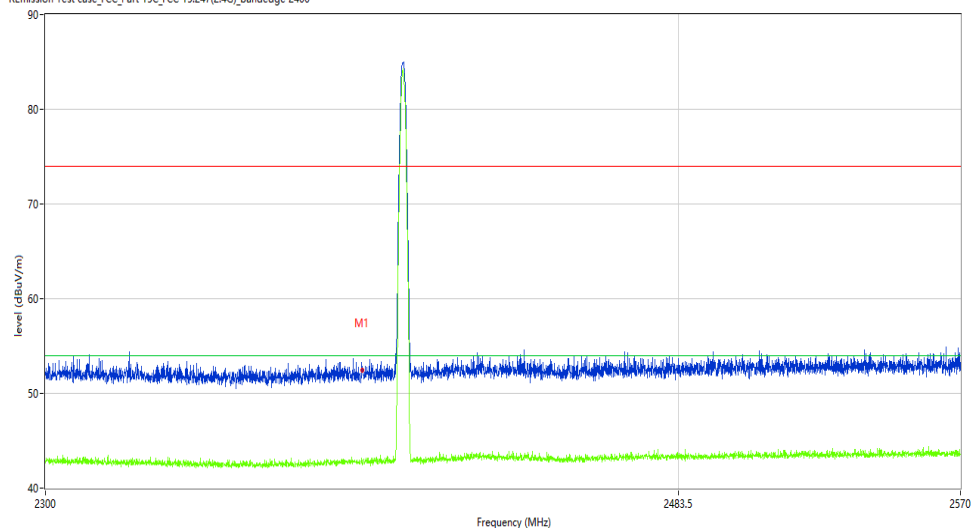

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.49	-9.96	74.0	-21.51	Peak	143.39	100	V	Pass
1**	2390.000	42.64	-9.96	54.0	-11.36	AV	143.39	100	V	Pass

BT-Bandedge -High channel- Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.15.08

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

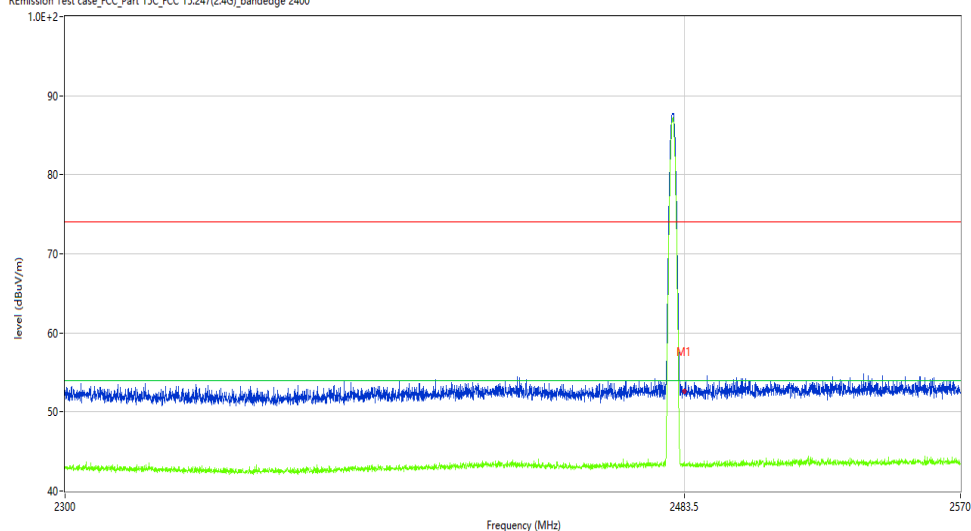

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.72	-9.51	74.0	-21.28	Peak	170.73	100	H	Pass
1**	2483.500	43.55	-9.51	54.0	-10.45	AV	170.73	100	H	Pass

BT-Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.38.20

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:

Test Standard: RSE


Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

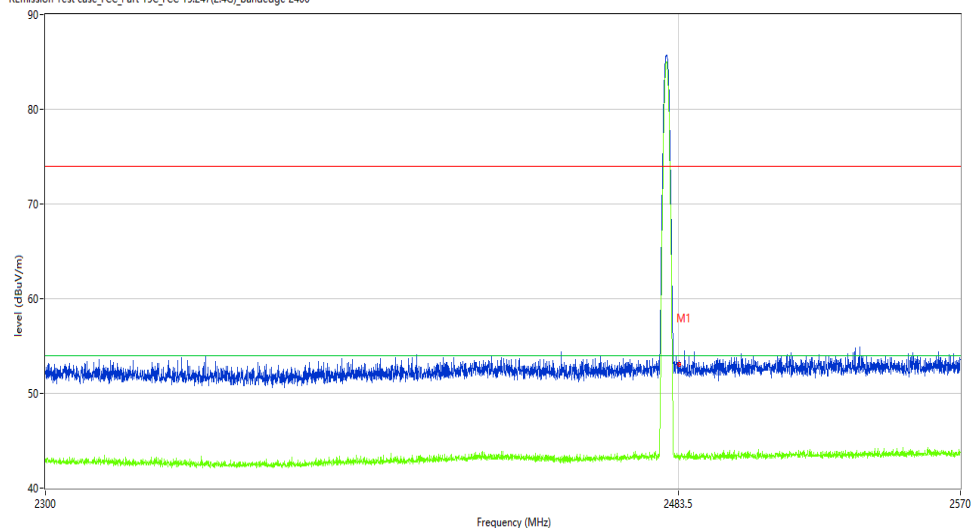

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.03	-9.51	74.0	-20.97	Peak	170.59	100	V	Pass
1**	2483.500	43.44	-9.51	54.0	-10.56	AV	170.59	100	V	Pass

30M-1G

BT-Hopping-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_15.11.48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RE

Model: N.A


Work Addition: normal

Temp.(oC): 18.1

Load: full load

Hum.: 54

Remark: DR-RE01-E21100025-01#01

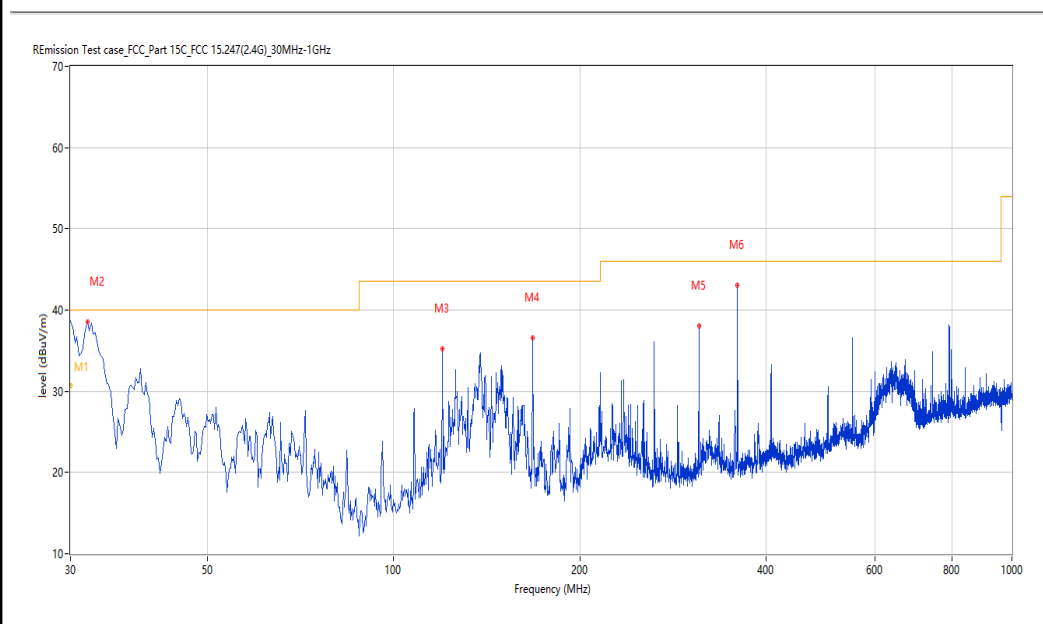

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.035	38.57	-23.91	40.0	-1.43	Peak	324.90	168	Horizontal	Pass
1*	30.035	30.75	-23.91	40.0	-9.25	QP	324.90	168	Horizontal	Pass
2	31.940	38.50	-23.27	40.0	-1.50	Peak	324.90	200	Horizontal	Pass
3	119.945	35.25	-22.48	43.5	-8.25	Peak	290.00	300	Horizontal	Pass
4	167.948	36.61	-23.21	43.5	-6.89	Peak	279.50	200	Horizontal	Pass
5	311.957	38.06	-17.57	46.0	-7.94	Peak	82.70	100	Horizontal	Pass
6	359.960	43.03	-16.33	46.0	-2.97	Peak	105.60	100	Horizontal	Pass

BT-Hopping -Vertical-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_16.16.50

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RE

Model: N.A

Work Addition: normal


Temp.(oC): 18.1

Load: full load

Hum.: 54

Remark: DR-RE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

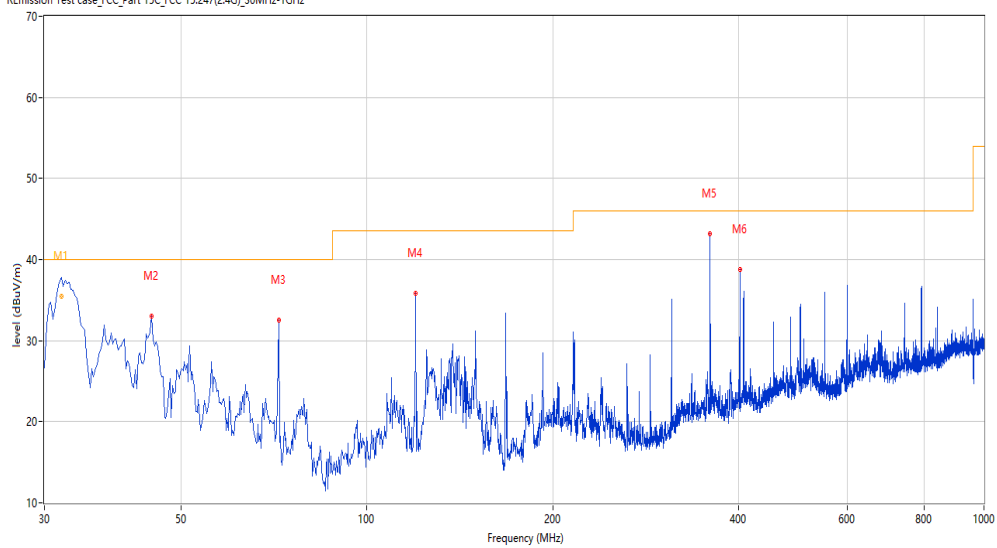

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.960	39.64	-23.27	40.0	-0.36	Peak	226.50	100	Vertical	Pass
1*	31.960	35.47	-23.27	40.0	-4.53	QP	226.50	100	Vertical	Pass
2	44.789	32.99	-19.47	40.0	-7.01	Peak	215.10	100	Vertical	Pass
3	71.942	32.54	-24.20	40.0	-7.46	Peak	266.50	200	Vertical	Pass
4	119.945	35.83	-22.48	43.5	-7.67	Peak	265.40	100	Vertical	Pass
5	359.960	43.20	-16.33	46.0	-2.80	Peak	130.10	100	Vertical	Pass
6	402.144	38.82	-14.84	46.0	-7.18	Peak	199.00	300	Vertical	Pass

1-18G

BT-Hopping -Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-10-28_13.20.41

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

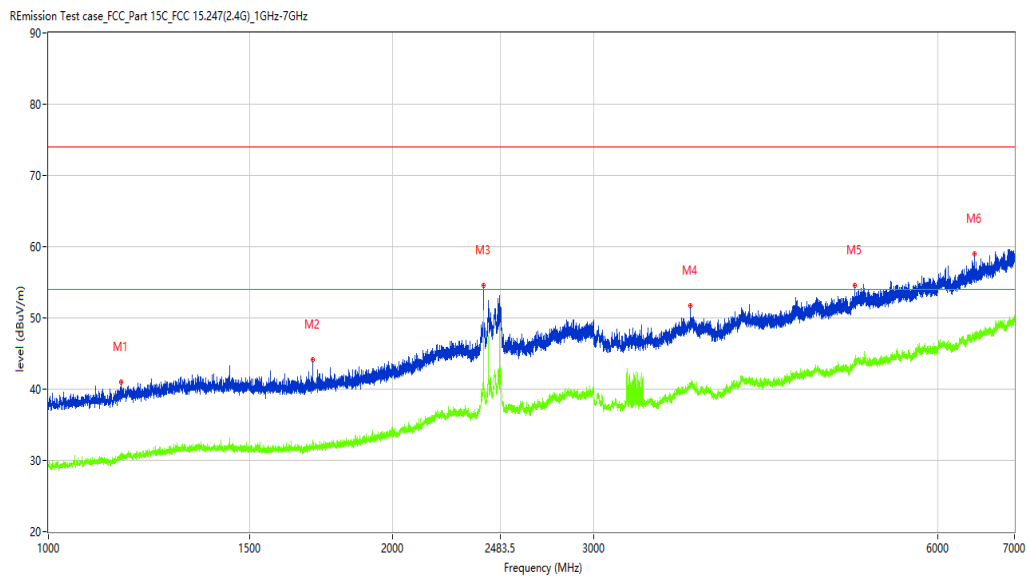

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1157.980	40.96	-13.78	74.0	-33.04	Peak	85.40	100	Horizontal	Pass
1**	1157.980	31.21	-13.78	54.0	-22.79	AV	85.40	100	Horizontal	Pass
2	1703.412	44.13	-12.85	74.0	-29.87	Peak	279.50	100	Horizontal	Pass
2**	1703.412	32.87	-12.85	54.0	-21.13	AV	279.50	100	Horizontal	Pass
3	2402.575	54.63	-4.00	74.0	-19.37	Peak	115.30	100	Horizontal	Pass
3**	2402.575	48.06	-4.00	54.0	-5.94	AV	115.30	100	Horizontal	Pass
4	3642.420	51.65	-1.55	74.0	-22.35	Peak	196.30	100	Horizontal	Pass
4**	3642.420	40.38	-1.55	54.0	-13.62	AV	196.30	100	Horizontal	Pass
5	5075.741	54.58	1.01	74.0	-19.42	Peak	304.70	100	Horizontal	Pass
5**	5075.741	44.28	1.01	54.0	-9.72	AV	304.70	100	Horizontal	Pass
6	6454.568	59.00	3.82	74.0	-15.00	Peak	261.00	100	Horizontal	Pass
6**	6454.568	47.63	3.82	54.0	-6.37	AV	261.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.32.08

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7571.857	28.32	-3.11	74.0	-45.68	Peak	276.50	100	Vertical	Pass
1**	7571.857	19.30	-3.11	54.0	-34.70	AV	276.50	100	Vertical	Pass
2	8061.235	30.24	-0.72	74.0	-43.76	Peak	350.60	100	Vertical	Pass
2**	8061.235	21.19	-0.72	54.0	-32.81	AV	350.60	100	Vertical	Pass
3	10461.385	38.14	4.58	74.0	-35.86	Peak	228.00	100	Vertical	Pass
3**	10461.385	28.09	4.58	54.0	-25.91	AV	228.00	100	Vertical	Pass
4	14148.213	47.15	13.49	74.0	-26.85	Peak	173.90	100	Vertical	Pass
4**	14148.213	38.12	13.49	54.0	-15.88	AV	173.90	100	Vertical	Pass
5	17436.391	50.03	15.61	74.0	-23.97	Peak	161.90	100	Vertical	Pass
5**	17436.391	40.63	15.61	54.0	-13.37	AV	161.90	100	Vertical	Pass
6	18000.000	54.66	22.92	74.0	-19.34	Peak	165.90	100	Vertical	Pass
6**	18000.000	47.28	22.92	54.0	-6.72	AV	165.90	100	Vertical	Pass

BT-Hopping -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-10-28_13.15.01

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

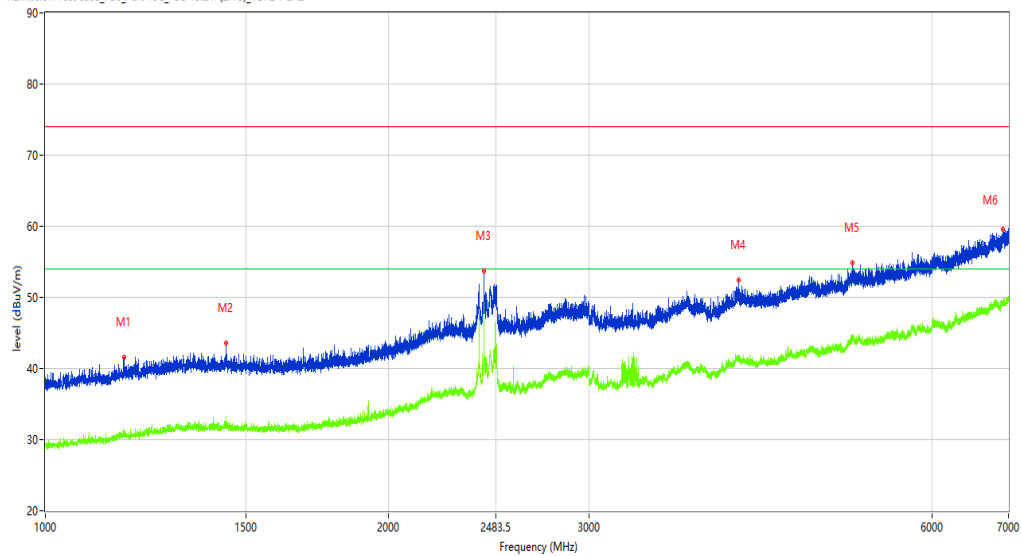

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1172.228	41.60	-13.30	74.0	-32.40	Peak	309.00	100	Vertical	Pass
1**	1172.228	30.55	-13.30	54.0	-23.45	AV	309.00	100	Vertical	Pass
2	1439.945	43.59	-12.72	74.0	-30.41	Peak	47.50	100	Vertical	Pass
2**	1439.945	32.57	-12.72	54.0	-21.43	AV	47.50	100	Vertical	Pass
3	2425.572	53.70	-3.41	74.0	-20.30	Peak	53.80	100	Vertical	Pass
3**	2425.572	49.29	-3.41	54.0	-4.71	AV	53.80	100	Vertical	Pass
4	4061.367	52.46	-0.68	74.0	-21.54	Peak	195.10	100	Vertical	Pass
4**	4061.367	40.93	-0.68	54.0	-13.07	AV	195.10	100	Vertical	Pass
5	5110.236	54.90	1.31	74.0	-19.10	Peak	221.10	100	Vertical	Pass
5**	5110.236	43.92	1.31	54.0	-10.08	AV	221.10	100	Vertical	Pass
6	6918.510	59.53	5.06	74.0	-14.47	Peak	0.60	100	Vertical	Pass
6**	6918.510	49.00	5.06	54.0	-5.00	AV	0.60	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-10-28_13.05.40

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7805.549	30.48	-2.23	74.0	-43.52	Peak	279.50	100	Vertical	Pass
1**	7805.549	21.39	-2.23	54.0	-32.61	AV	279.50	100	Vertical	Pass
2	9158.210	34.65	2.43	74.0	-39.35	Peak	220.90	100	Vertical	Pass
2**	9158.210	25.95	2.43	54.0	-28.05	AV	220.90	100	Vertical	Pass
3	9897.776	37.14	4.66	74.0	-36.86	Peak	214.50	100	Vertical	Pass
3**	9897.776	28.69	4.66	54.0	-25.31	AV	214.50	100	Vertical	Pass
4	12438.140	41.64	7.45	74.0	-32.36	Peak	228.70	100	Vertical	Pass
4**	12438.140	33.52	7.45	54.0	-20.48	AV	228.70	100	Vertical	Pass
5	14183.954	46.94	14.63	74.0	-27.06	Peak	172.10	100	Vertical	Pass
5**	14183.954	38.80	14.63	54.0	-15.20	AV	172.10	100	Vertical	Pass
6	18000.000	55.52	22.92	74.0	-18.48	Peak	261.60	100	Vertical	Pass
6**	18000.000	47.75	22.92	54.0	-6.25	AV	261.60	100	Vertical	Pass

BT-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.08.38

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

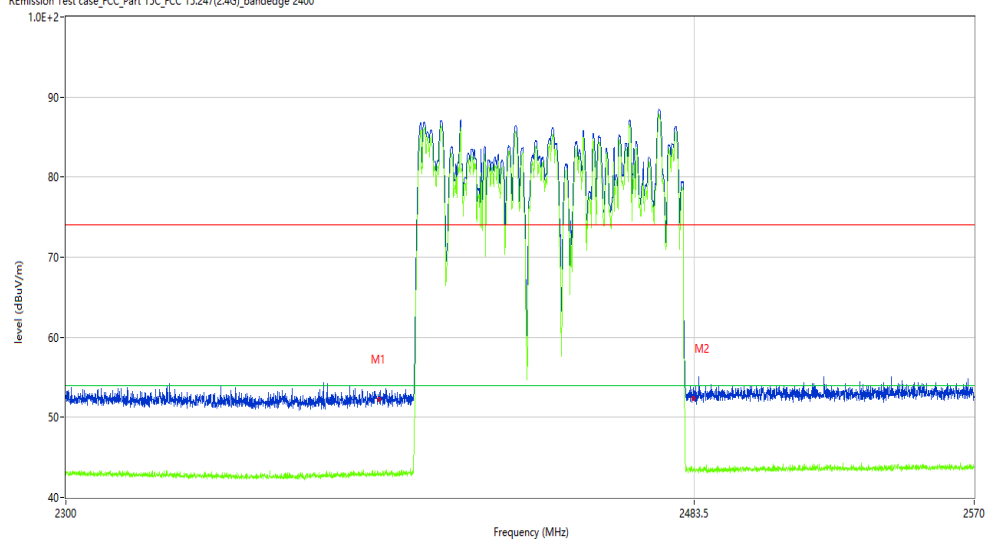

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.40	-9.96	74.0	-21.60	Peak	298.30	100	H	Pass
1**	2390.000	43.02	-9.96	54.0	-10.98	AV	298.30	100	H	Pass
2	2483.500	52.40	-9.51	74.0	-21.60	Peak	258.46	100	H	Pass
2**	2483.500	43.68	-9.51	54.0	-10.32	AV	258.46	100	H	Pass

BT-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2021-11-01_09:59:48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

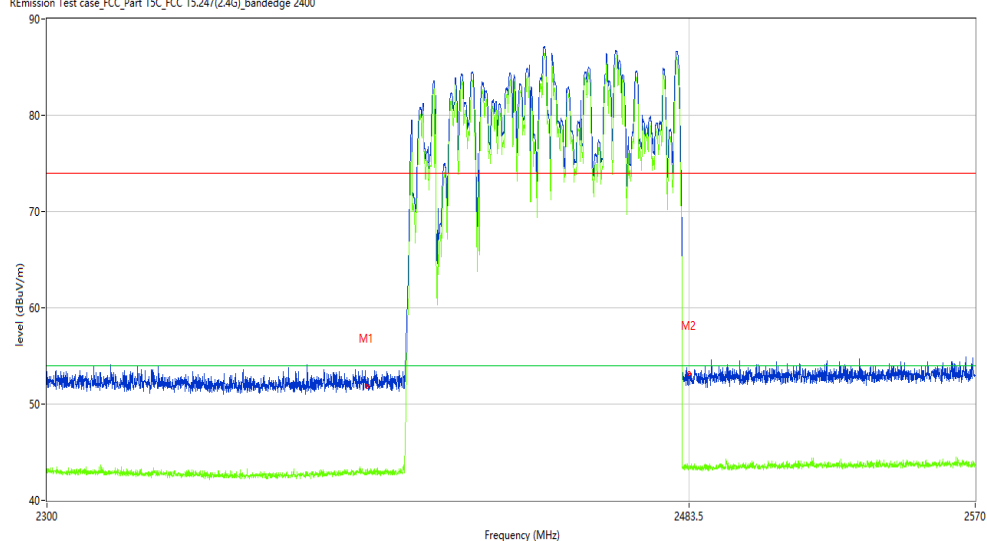

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.76	-9.96	74.0	-22.24	Peak	59.85	100	V	Pass
1**	2390.000	42.86	-9.96	54.0	-11.14	AV	59.85	100	V	Pass
2	2483.500	53.20	-9.51	74.0	-20.80	Peak	58.61	100	V	Pass
2**	2483.500	43.31	-9.51	54.0	-10.69	AV	58.61	100	V	Pass

30M-1G

BT 3M-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_15.41.37

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RE

Model: N.A

Work Addition: normal


Temp.(oC): 18.1

Load: full load

Hum.: 54

Remark: DR-RE01-E21100025-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

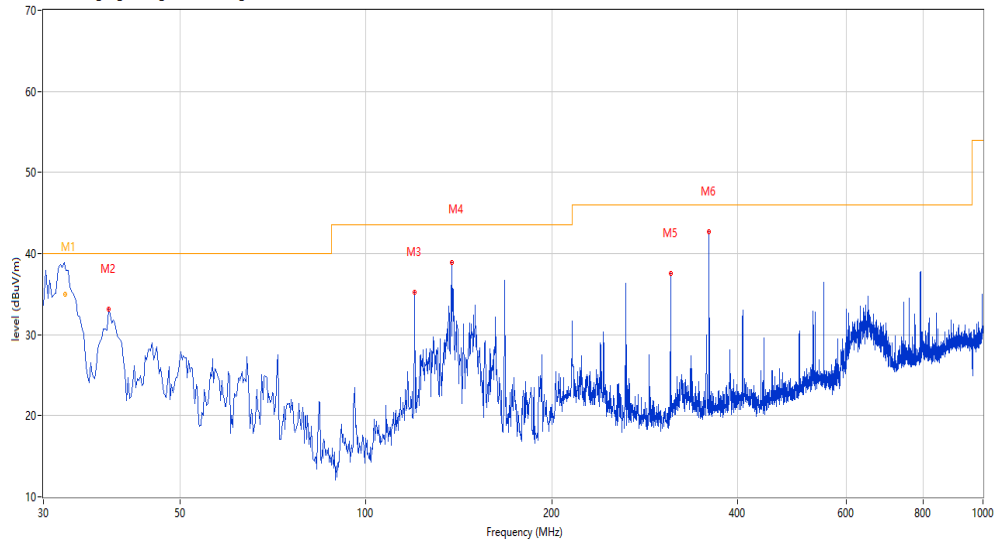

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.522	39.60	-23.10	40.0	-0.40	Peak	356.20	168	Horizontal	Pass
1*	32.522	34.95	-23.10	40.0	-5.05	QP	356.20	168	Horizontal	Pass
2	38.243	33.10	-21.08	40.0	-6.90	Peak	109.90	300	Horizontal	Pass
3	119.945	35.24	-22.48	43.5	-8.26	Peak	296.80	300	Horizontal	Pass
4	137.643	38.84	-24.00	43.5	-4.66	Peak	360.00	300	Horizontal	Pass
5	311.957	37.53	-17.57	46.0	-8.47	Peak	75.30	100	Horizontal	Pass
6	359.960	42.73	-16.33	46.0	-3.27	Peak	109.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_16.32.17

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RE

Model: N.A

Work Addition: normal


Temp.(oC): 18.1

Load: full load

Hum.: 54

Remark: DR-RE01-E21100025-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_30MHz-1GHz

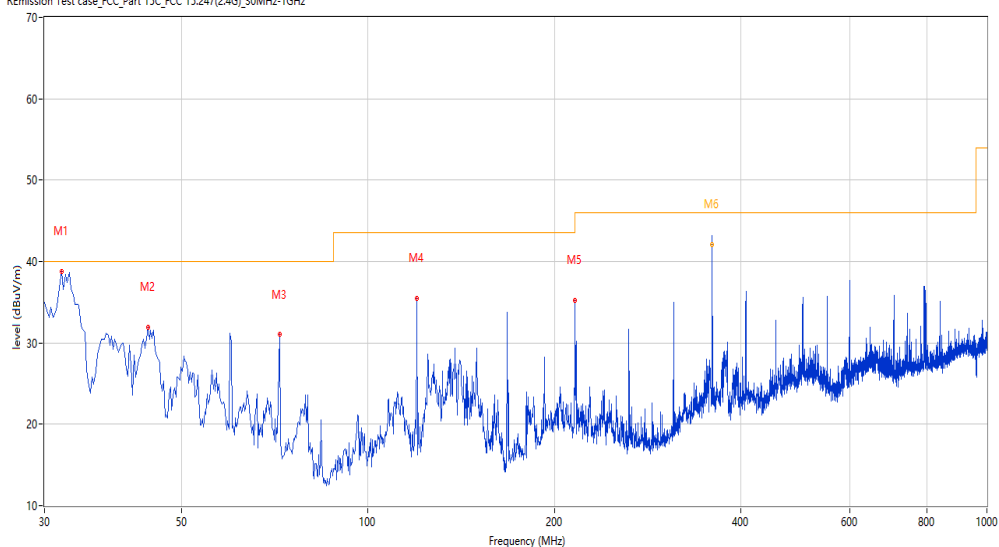

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.697	36.88	-23.36	40.0	-3.12	Peak	304.20	100	Vertical	Pass
2	44.061	31.94	-19.52	40.0	-8.06	Peak	360.00	200	Vertical	Pass
3	71.942	31.02	-24.20	40.0	-8.98	Peak	0.00	300	Vertical	Pass
4	119.945	35.49	-22.48	43.5	-8.01	Peak	262.20	100	Vertical	Pass
5	215.951	35.23	-20.69	43.5	-8.27	Peak	321.40	200	Vertical	Pass
6	359.960	43.20	-16.33	46.0	-2.80	Peak	128.00	100	Vertical	Pass
6*	359.960	42.03	-16.33	46.0	-3.97	QP	128.00	100	Vertical	Pass

1-18G

BT 3M -Low channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.32.51

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

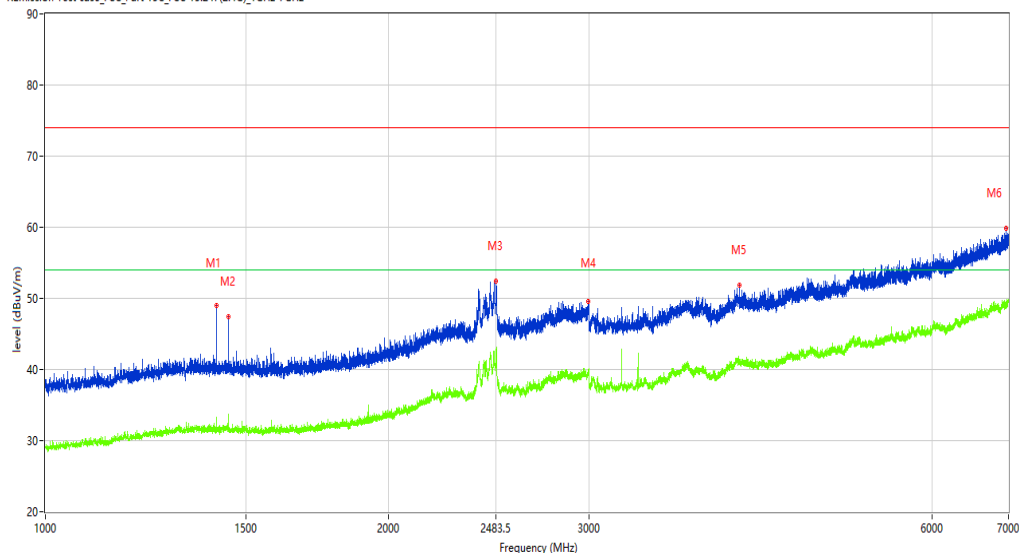

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1412.698	48.95	-12.69	74.0	-25.05	Peak	195.50	100	Horizontal	Pass
1**	1412.698	33.23	-12.69	54.0	-20.77	AV	195.50	100	Horizontal	Pass
2	1448.194	47.49	-12.83	74.0	-26.51	Peak	195.50	100	Horizontal	Pass
2**	1448.194	33.50	-12.83	54.0	-20.50	AV	195.50	100	Horizontal	Pass
3	2485.814	52.41	-1.91	74.0	-21.59	Peak	162.50	100	Horizontal	Pass
3**	2485.814	42.46	-1.91	54.0	-11.54	AV	162.50	100	Horizontal	Pass
4	2995.001	49.52	-3.07	74.0	-24.48	Peak	202.20	100	Horizontal	Pass
4**	2995.001	39.15	-3.07	54.0	-14.85	AV	202.20	100	Horizontal	Pass
5	4066.867	51.92	-0.61	74.0	-22.08	Peak	258.10	100	Horizontal	Pass
5**	4066.867	41.37	-0.61	54.0	-12.63	AV	258.10	100	Horizontal	Pass
6	6965.504	59.81	5.29	74.0	-14.19	Peak	49.60	100	Horizontal	Pass
6**	6965.504	49.01	5.29	54.0	-4.99	AV	49.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_10.46.33

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7291.427	28.89	-3.25	74.0	-45.11	Peak	188.80	100	Horizontal	Pass
1**	7291.427	19.33	-3.25	54.0	-34.67	AV	188.80	100	Horizontal	Pass
2	9166.458	33.94	2.33	74.0	-40.06	Peak	133.50	100	Horizontal	Pass
2**	9166.458	25.84	2.33	54.0	-28.16	AV	133.50	100	Horizontal	Pass
3	10813.297	39.05	5.66	74.0	-34.95	Peak	40.50	100	Horizontal	Pass
3**	10813.297	29.68	5.66	54.0	-24.32	AV	40.50	100	Horizontal	Pass
4	12432.642	41.79	7.42	74.0	-32.21	Peak	95.50	100	Horizontal	Pass
4**	12432.642	32.92	7.42	54.0	-21.08	AV	95.50	100	Horizontal	Pass
5	14183.954	47.01	14.63	74.0	-26.99	Peak	145.20	100	Horizontal	Pass
5**	14183.954	39.01	14.63	54.0	-14.99	AV	145.20	100	Horizontal	Pass
6	17994.501	55.12	22.58	74.0	-18.88	Peak	28.80	100	Horizontal	Pass
6**	17994.501	46.92	22.58	54.0	-7.08	AV	28.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.29.14

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

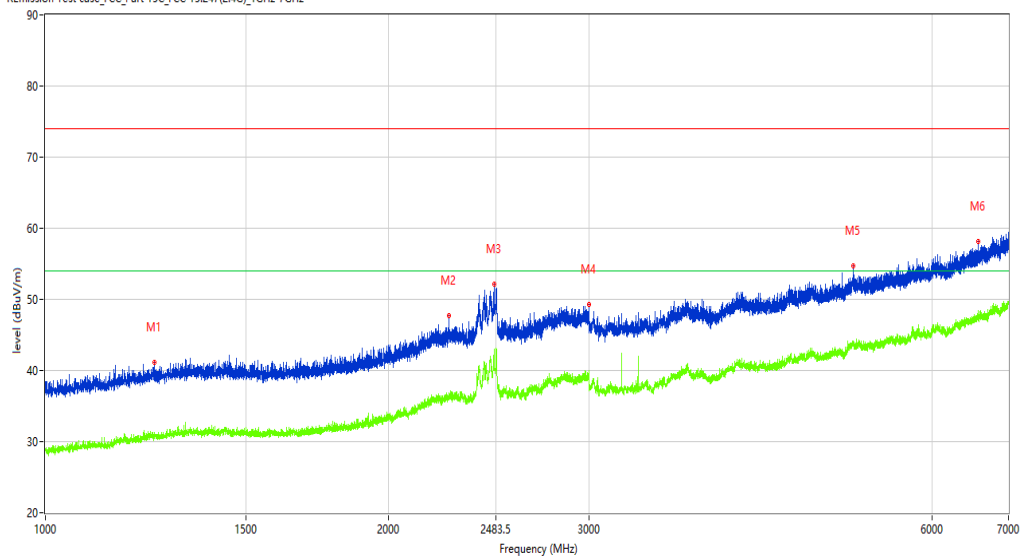

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1245.969	41.10	-13.19	74.0	-32.90	Peak	154.80	100	Vertical	Pass
1**	1245.969	30.58	-13.19	54.0	-23.42	AV	154.80	100	Vertical	Pass
2	2260.842	47.66	-7.07	74.0	-26.34	Peak	115.00	100	Vertical	Pass
2**	2260.842	36.20	-7.07	54.0	-17.80	AV	115.00	100	Vertical	Pass
3	2475.566	52.21	-2.12	74.0	-21.79	Peak	27.60	100	Vertical	Pass
3**	2475.566	41.80	-2.12	54.0	-12.20	AV	27.60	100	Vertical	Pass
4	2999.250	49.26	-3.05	74.0	-24.74	Peak	79.20	100	Vertical	Pass
4**	2999.250	39.25	-3.05	54.0	-14.75	AV	79.20	100	Vertical	Pass
5	5116.735	54.75	1.29	74.0	-19.25	Peak	272.10	100	Vertical	Pass
5**	5116.735	43.98	1.29	54.0	-10.02	AV	272.10	100	Vertical	Pass
6	6586.052	58.21	4.24	74.0	-15.79	Peak	230.40	100	Vertical	Pass
6**	6586.052	47.48	4.24	54.0	-6.52	AV	230.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.18.19

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8014.496	31.20	-0.92	74.0	-42.80	Peak	74.30	100	Vertical	Pass
1**	8014.496	21.34	-0.92	54.0	-32.66	AV	74.30	100	Vertical	Pass
2	9922.519	37.43	4.89	74.0	-36.57	Peak	42.40	100	Vertical	Pass
2**	9922.519	28.14	4.89	54.0	-25.86	AV	42.40	100	Vertical	Pass
3	11200.950	40.53	6.27	74.0	-33.47	Peak	167.50	100	Vertical	Pass
3**	11200.950	31.84	6.27	54.0	-22.16	AV	167.50	100	Vertical	Pass
4	14192.202	48.09	14.67	74.0	-25.91	Peak	218.50	100	Vertical	Pass
4**	14192.202	39.01	14.67	54.0	-14.99	AV	218.50	100	Vertical	Pass
5	17507.873	50.32	16.01	74.0	-23.68	Peak	308.40	100	Vertical	Pass
5**	17507.873	41.12	16.01	54.0	-12.88	AV	308.40	100	Vertical	Pass
6	17986.253	54.41	22.07	74.0	-19.59	Peak	98.00	100	Vertical	Pass
6**	17986.253	47.11	22.07	54.0	-6.89	AV	98.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_10.38.11

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

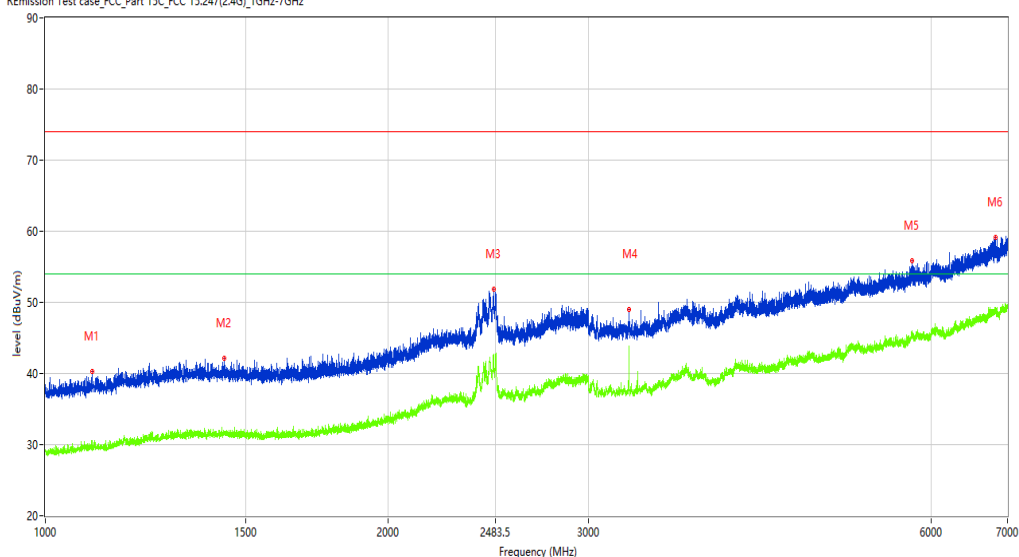

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1099.488	40.30	-14.21	74.0	-33.70	Peak	95.60	100	Horizontal	Pass
1**	1099.488	29.71	-14.21	54.0	-24.29	AV	95.60	100	Horizontal	Pass
2	1435.446	42.12	-12.66	74.0	-31.88	Peak	36.30	100	Horizontal	Pass
2**	1435.446	31.47	-12.66	54.0	-22.53	AV	36.30	100	Horizontal	Pass
3	2475.316	51.88	-2.13	74.0	-22.12	Peak	2.40	100	Horizontal	Pass
3**	2475.316	42.64	-2.13	54.0	-11.36	AV	2.40	100	Horizontal	Pass
4	3253.968	48.93	-4.28	74.0	-25.07	Peak	103.10	100	Horizontal	Pass
4**	3253.968	42.39	-4.28	54.0	-11.61	AV	103.10	100	Horizontal	Pass
5	5772.653	55.84	2.31	74.0	-18.16	Peak	58.60	100	Horizontal	Pass
5**	5772.653	45.68	2.31	54.0	-8.32	AV	58.60	100	Horizontal	Pass
6	6828.521	59.13	5.09	74.0	-14.87	Peak	253.50	100	Horizontal	Pass
6**	6828.521	49.03	5.09	54.0	-4.97	AV	253.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_10.50.43

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8050.237	30.44	-0.50	74.0	-43.56	Peak	75.70	100	Horizontal	Pass
1**	8050.237	21.52	-0.50	54.0	-32.48	AV	75.70	100	Horizontal	Pass
2	9906.023	36.60	4.79	74.0	-37.40	Peak	341.30	100	Horizontal	Pass
2**	9906.023	27.80	4.79	54.0	-26.20	AV	341.30	100	Horizontal	Pass
3	11308.173	39.98	7.20	74.0	-34.02	Peak	357.80	100	Horizontal	Pass
3**	11308.173	30.71	7.20	54.0	-23.29	AV	357.80	100	Horizontal	Pass
4	12435.391	41.53	7.43	74.0	-32.47	Peak	312.30	100	Horizontal	Pass
4**	12435.391	32.95	7.43	54.0	-21.05	AV	312.30	100	Horizontal	Pass
5	14183.954	47.40	14.63	74.0	-26.60	Peak	203.30	100	Horizontal	Pass
5**	14183.954	38.95	14.63	54.0	-15.05	AV	203.30	100	Horizontal	Pass
6	17980.755	55.29	21.73	74.0	-18.71	Peak	131.00	100	Horizontal	Pass
6**	17980.755	45.91	21.73	54.0	-8.09	AV	131.00	100	Horizontal	Pass

BT 3M -Middle channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.26.39

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

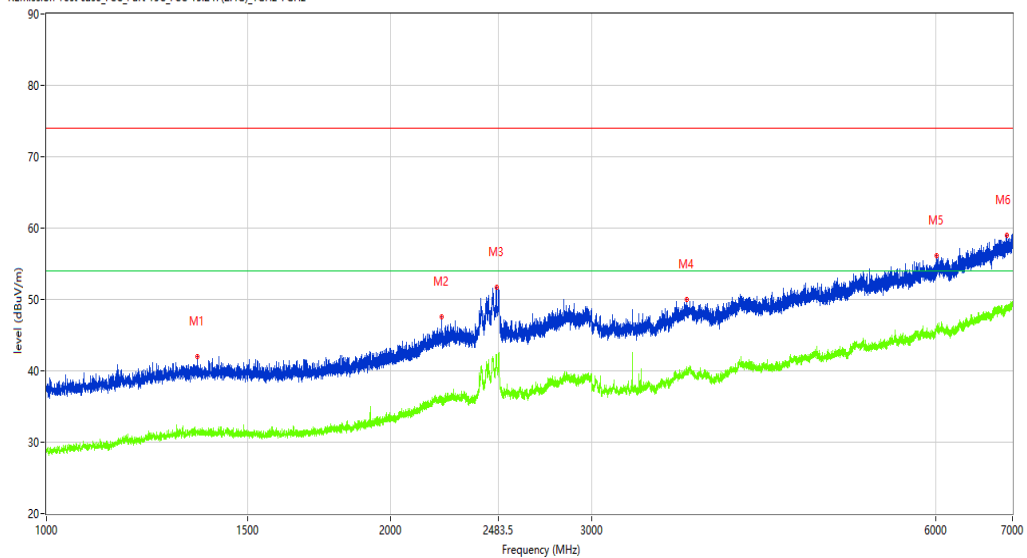

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1355.206	41.98	-12.69	74.0	-32.02	Peak	331.70	100	Vertical	Pass
1**	1355.206	31.78	-12.69	54.0	-22.22	AV	331.70	100	Vertical	Pass
2	2216.348	47.56	-8.17	74.0	-26.44	Peak	59.30	100	Vertical	Pass
2**	2216.348	36.48	-8.17	54.0	-17.52	AV	59.30	100	Vertical	Pass
3	2475.816	51.74	-2.12	74.0	-22.26	Peak	257.30	100	Vertical	Pass
3**	2475.816	42.23	-2.12	54.0	-11.77	AV	257.30	100	Vertical	Pass
4	3629.921	49.96	-1.58	74.0	-24.04	Peak	57.70	100	Vertical	Pass
4**	3629.921	39.86	-1.58	54.0	-14.14	AV	57.70	100	Vertical	Pass
5	6004.124	56.16	2.65	74.0	-17.84	Peak	160.30	100	Vertical	Pass
5**	6004.124	45.79	2.65	54.0	-8.21	AV	160.30	100	Vertical	Pass
6	6923.010	58.97	5.07	74.0	-15.03	Peak	99.70	100	Vertical	Pass
6**	6923.010	49.23	5.07	54.0	-4.77	AV	99.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.20.03

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8058.485	30.56	-0.67	74.0	-43.44	Peak	72.00	100	Vertical	Pass
1**	8058.485	22.11	-0.67	54.0	-31.89	AV	72.00	100	Vertical	Pass
2	9342.414	34.22	2.45	74.0	-39.78	Peak	231.10	100	Vertical	Pass
2**	9342.414	25.77	2.45	54.0	-28.23	AV	231.10	100	Vertical	Pass
3	11255.936	39.41	6.97	74.0	-34.59	Peak	98.90	100	Vertical	Pass
3**	11255.936	31.31	6.97	54.0	-22.69	AV	98.90	100	Vertical	Pass
4	14183.954	47.34	14.63	74.0	-26.66	Peak	72.00	100	Vertical	Pass
4**	14183.954	38.31	14.63	54.0	-15.69	AV	72.00	100	Vertical	Pass
5	17480.380	50.96	16.45	74.0	-23.04	Peak	6.80	100	Vertical	Pass
5**	17480.380	41.90	16.45	54.0	-12.10	AV	6.80	100	Vertical	Pass
6	17994.501	54.29	22.58	74.0	-19.71	Peak	43.60	100	Vertical	Pass
6**	17994.501	47.36	22.58	54.0	-6.64	AV	43.60	100	Vertical	Pass

BT 3M -High channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.40.36

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

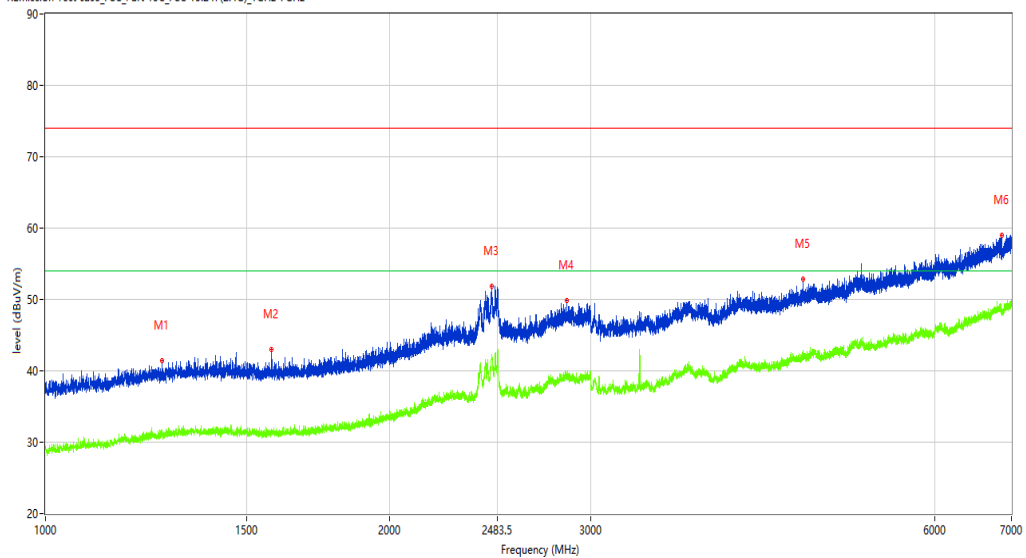

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1265.467	41.36	-13.11	74.0	-32.64	Peak	345.10	100	Horizontal	Pass
1**	1265.467	31.05	-13.11	54.0	-22.95	AV	345.10	100	Horizontal	Pass
2	1577.428	42.96	-13.03	74.0	-31.04	Peak	271.00	100	Horizontal	Pass
2**	1577.428	31.83	-13.03	54.0	-22.17	AV	271.00	100	Horizontal	Pass
3	2456.818	51.80	-2.63	74.0	-22.20	Peak	170.30	100	Horizontal	Pass
3**	2456.818	41.88	-2.63	54.0	-12.12	AV	170.30	100	Horizontal	Pass
4	2858.518	49.79	-3.82	74.0	-24.21	Peak	11.60	100	Horizontal	Pass
4**	2858.518	39.28	-3.82	54.0	-14.72	AV	11.60	100	Horizontal	Pass
5	4601.300	52.91	-0.59	74.0	-21.09	Peak	298.90	100	Horizontal	Pass
5**	4601.300	41.87	-0.59	54.0	-12.13	AV	298.90	100	Horizontal	Pass
6	6865.017	59.01	5.06	74.0	-14.99	Peak	78.00	100	Horizontal	Pass
6**	6865.017	48.71	5.06	54.0	-5.29	AV	78.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_10.48.25

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7178.705	25.69	-4.10	74.0	-48.31	Peak	331.50	100	Horizontal	Pass
1**	7178.705	18.74	-4.10	54.0	-35.26	AV	331.50	100	Horizontal	Pass
2	9353.412	34.63	2.52	74.0	-39.37	Peak	0.20	100	Horizontal	Pass
2**	9353.412	25.84	2.52	54.0	-28.16	AV	0.20	100	Horizontal	Pass
3	10541.115	37.69	5.27	74.0	-36.31	Peak	40.00	100	Horizontal	Pass
3**	10541.115	28.90	5.27	54.0	-25.10	AV	40.00	100	Horizontal	Pass
4	12416.146	41.11	7.33	74.0	-32.89	Peak	124.60	100	Horizontal	Pass
4**	12416.146	32.07	7.33	54.0	-21.93	AV	124.60	100	Horizontal	Pass
5	14192.202	46.72	14.67	74.0	-27.28	Peak	292.90	100	Horizontal	Pass
5**	14192.202	39.10	14.67	54.0	-14.90	AV	292.90	100	Horizontal	Pass
6	18000.000	54.53	22.92	74.0	-19.47	Peak	245.10	100	Horizontal	Pass
6**	18000.000	47.54	22.92	54.0	-6.46	AV	245.10	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.24.00

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

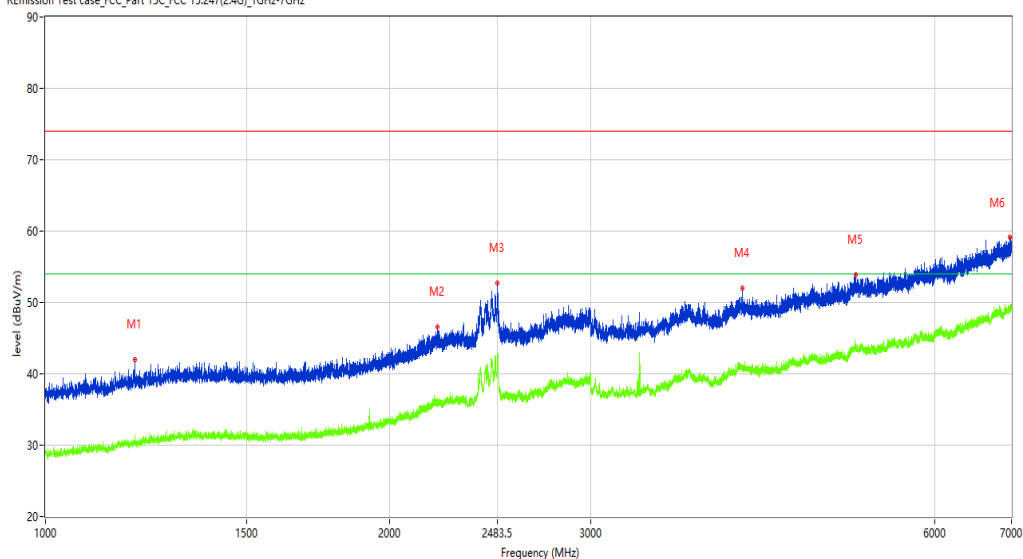

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.725	41.97	-13.47	74.0	-32.03	Peak	299.70	100	Vertical	Pass
1**	1196.725	30.25	-13.47	54.0	-23.75	AV	299.70	100	Vertical	Pass
2	2202.100	46.55	-7.97	74.0	-27.45	Peak	146.50	100	Vertical	Pass
2**	2202.100	36.26	-7.97	54.0	-17.74	AV	146.50	100	Vertical	Pass
3	2486.314	52.67	-1.91	74.0	-21.33	Peak	304.00	100	Vertical	Pass
3**	2486.314	42.66	-1.91	54.0	-11.34	AV	304.00	100	Vertical	Pass
4	4071.366	51.96	-0.58	74.0	-22.04	Peak	337.50	100	Vertical	Pass
4**	4071.366	41.24	-0.58	54.0	-12.76	AV	337.50	100	Vertical	Pass
5	5113.236	53.92	1.31	74.0	-20.08	Peak	332.90	100	Vertical	Pass
5**	5113.236	43.55	1.31	54.0	-10.45	AV	332.90	100	Vertical	Pass
6	6980.502	59.08	5.43	74.0	-14.92	Peak	151.00	100	Vertical	Pass
6**	6980.502	48.85	5.43	54.0	-5.15	AV	151.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_14.21.43

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8022.744	32.01	-0.79	74.0	-41.99	Peak	289.20	100	Vertical	Pass
1**	8022.744	22.23	-0.79	54.0	-31.77	AV	289.20	100	Vertical	Pass
2	9449.638	34.78	2.66	74.0	-39.22	Peak	242.90	100	Vertical	Pass
2**	9449.638	25.97	2.66	54.0	-28.03	AV	242.90	100	Vertical	Pass
3	11286.178	39.93	7.36	74.0	-34.07	Peak	118.70	100	Vertical	Pass
3**	11286.178	31.01	7.36	54.0	-22.99	AV	118.70	100	Vertical	Pass
4	14167.458	47.37	14.11	74.0	-26.63	Peak	242.90	100	Vertical	Pass
4**	14167.458	38.42	14.11	54.0	-15.58	AV	242.90	100	Vertical	Pass
5	17441.890	49.92	15.72	74.0	-24.08	Peak	31.00	100	Vertical	Pass
5**	17441.890	41.39	15.72	54.0	-12.61	AV	31.00	100	Vertical	Pass
6	18000.000	55.41	22.92	74.0	-18.59	Peak	254.30	100	Vertical	Pass
6**	18000.000	47.81	22.92	54.0	-6.19	AV	254.30	100	Vertical	Pass

BT 3M -Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.18.40

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

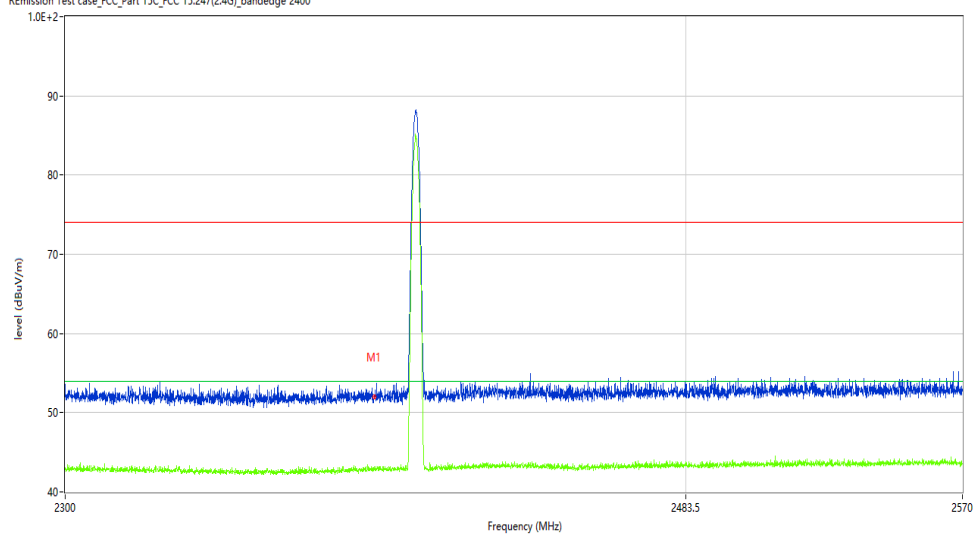

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.86	-9.96	74.0	-22.14	Peak	90.79	100	H	Pass
1**	2390.000	42.73	-9.96	54.0	-11.27	AV	90.79	100	H	Pass

BT 3M -Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.35.10

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:

Test Standard: RSE


Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

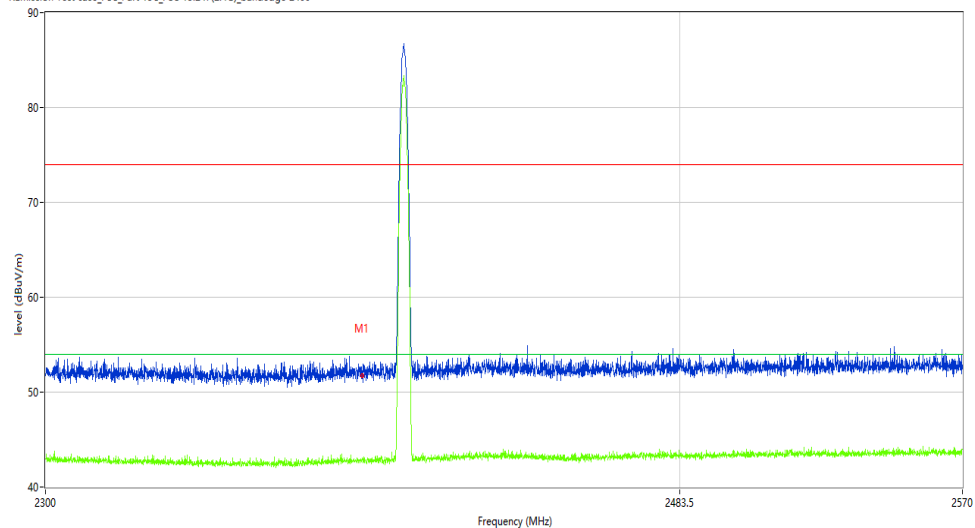

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.71	-9.96	74.0	-22.29	Peak	196.93	100	V	Pass
1**	2390.000	43.01	-9.96	54.0	-10.99	AV	196.93	100	V	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_10.16.56

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

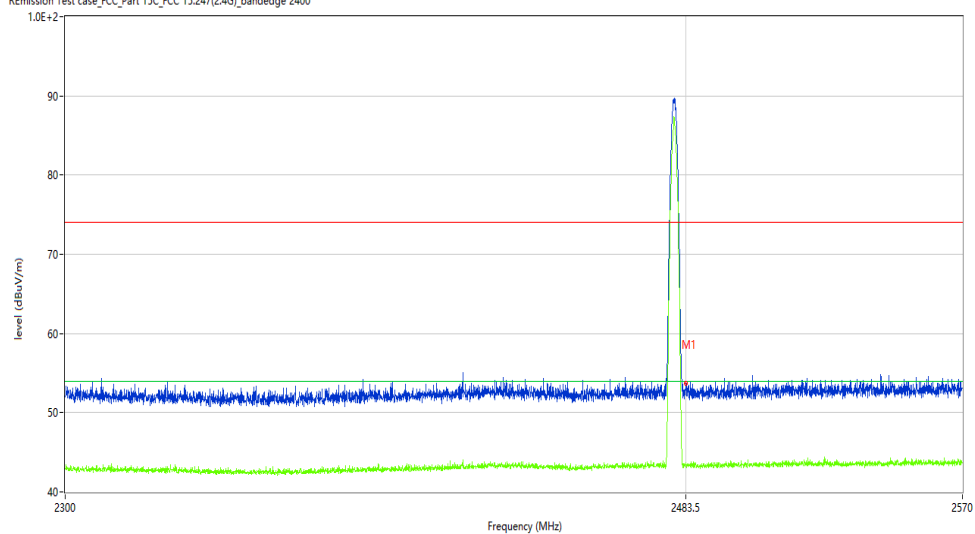

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.57	-9.51	74.0	-20.43	Peak	93.21	100	H	Pass
1**	2483.500	43.48	-9.51	54.0	-10.52	AV	93.21	100	H	Pass

BT 3M -Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_14.36.44

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:

Test Standard: RSE


Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

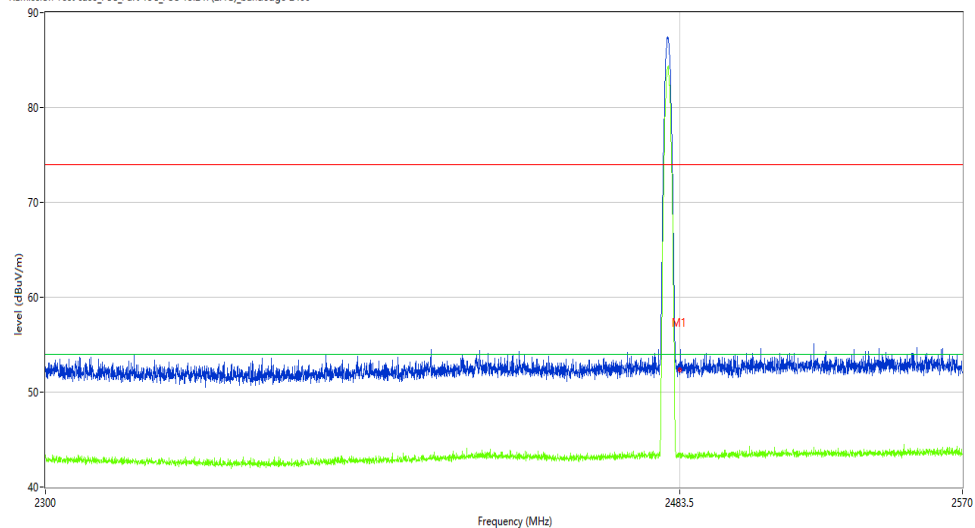

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.27	-9.51	74.0	-21.73	Peak	156.68	100	V	Pass
1**	2483.500	43.39	-9.51	54.0	-10.61	AV	156.68	100	V	Pass

30M-1G

BT 3M-Hopping-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_15.20.19

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 18.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RE

Work Addition: normal

Load: full load

Remark: DR-RE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_30MHz-1GHz

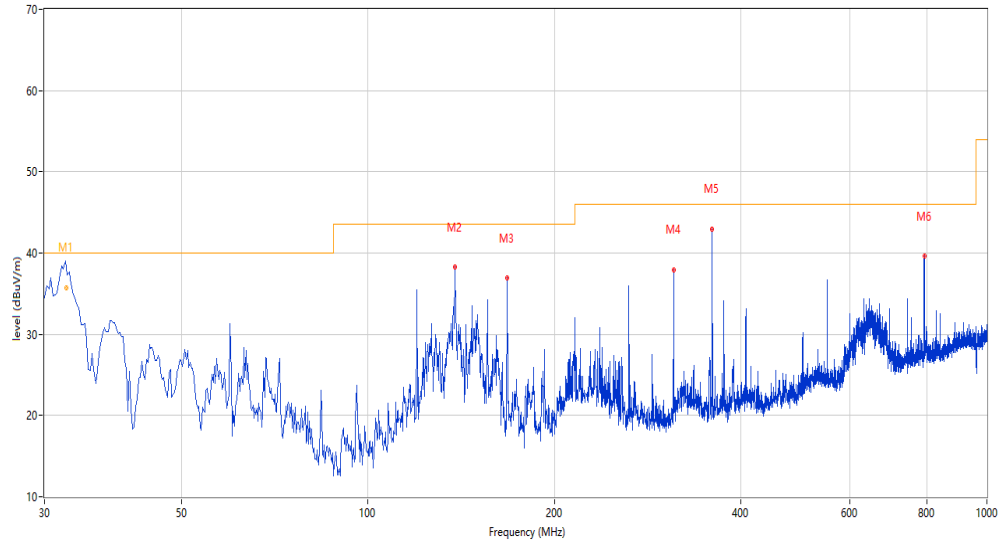

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.534	40.10	-23.10	40.0	0.10	Peak	341.30	161	Horizontal	N/A
1*	32.534	35.67	-23.10	40.0	-4.33	QP	341.30	161	Horizontal	Pass
2	138.128	38.23	-23.99	43.5	-5.27	Peak	0.00	200	Horizontal	Pass
3	167.948	36.88	-23.21	43.5	-6.62	Peak	288.20	200	Horizontal	Pass
4	311.957	37.93	-17.57	46.0	-8.07	Peak	84.50	100	Horizontal	Pass
5	359.960	42.95	-16.33	46.0	-3.05	Peak	107.40	100	Horizontal	Pass
6	791.987	39.58	-6.31	46.0	-6.42	Peak	111.40	100	Horizontal	Pass

BT 3M-Hopping -Vertical-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_16.24.42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RE

Model: N.A

Work Addition: normal


Temp.(oC): 18.1

Load: full load

Hum.: 54

Remark: DR-RE01-E21100025-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

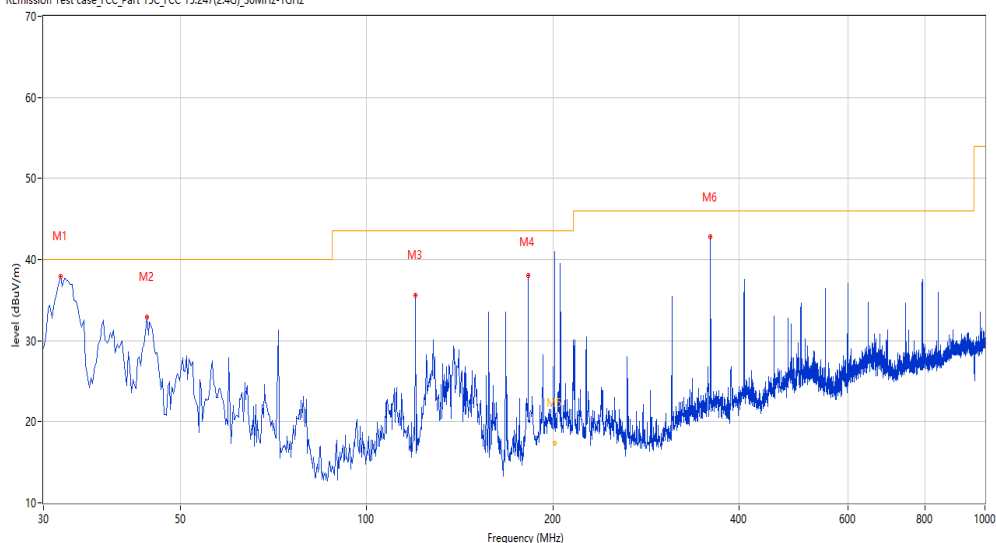

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.455	35.42	-23.45	40.0	-4.58	Peak	209.90	100	Vertical	Pass
2	44.061	32.94	-19.52	40.0	-7.06	Peak	229.00	100	Vertical	Pass
3	119.945	35.63	-22.48	43.5	-7.87	Peak	247.90	100	Vertical	Pass
4	182.494	37.99	-22.05	43.5	-5.51	Peak	23.90	100	Vertical	Pass
5	201.280	22.33	-20.46	43.5	-21.17	Peak	23.90	218	Vertical	Pass
5*	201.280	17.34	-20.46	43.5	-26.16	QP	23.90	218	Vertical	Pass
6	359.960	42.77	-16.33	46.0	-3.23	Peak	141.50	100	Vertical	Pass

1-18G

BT 3M-Hopping -Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.24.47

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

20.1 N.A


Work Addition: normal

Temp.(oC):

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

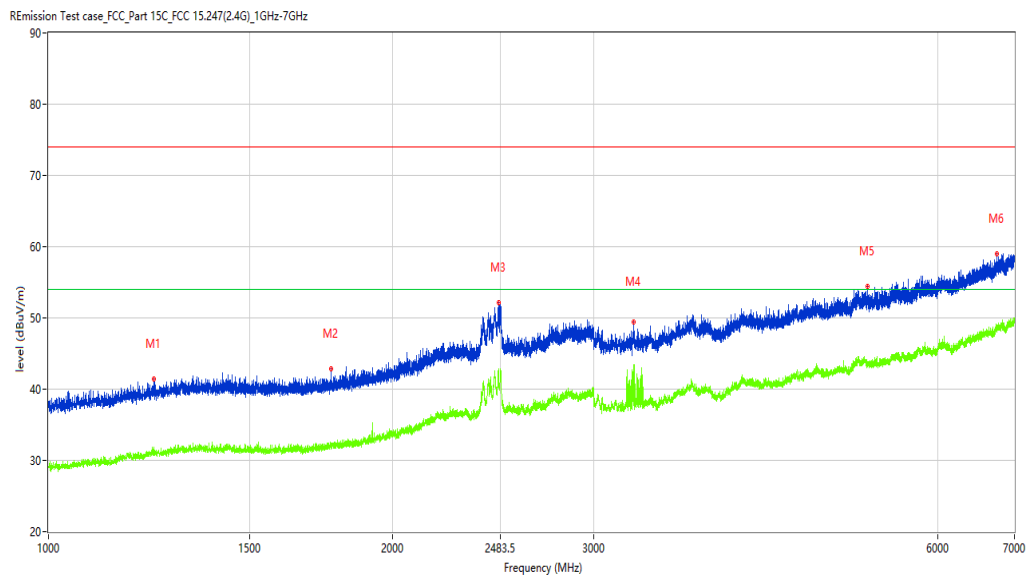

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1235.971	41.41	-13.22	74.0	-32.59	Peak	289.40	100	Horizontal	Pass
1**	1235.971	30.95	-13.22	54.0	-23.05	AV	289.40	100	Horizontal	Pass
2	1766.654	42.86	-12.28	74.0	-31.14	Peak	218.60	100	Horizontal	Pass
2**	1766.654	32.09	-12.28	54.0	-21.91	AV	218.60	100	Horizontal	Pass
3	2476.315	52.20	-2.10	74.0	-21.80	Peak	275.00	100	Horizontal	Pass
3**	2476.315	42.57	-2.10	54.0	-11.43	AV	275.00	100	Horizontal	Pass
4	3248.969	49.38	-4.21	74.0	-24.62	Peak	103.40	100	Horizontal	Pass
4**	3248.969	43.45	-4.21	54.0	-10.55	AV	103.40	100	Horizontal	Pass
5	5210.724	54.47	0.78	74.0	-19.53	Peak	231.60	100	Horizontal	Pass
5**	5210.724	43.22	0.78	54.0	-10.78	AV	231.60	100	Horizontal	Pass
6	6758.530	58.98	4.94	74.0	-15.02	Peak	241.60	100	Horizontal	Pass
6**	6758.530	48.62	4.94	54.0	-5.38	AV	241.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2021-11-01_10.43.24

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

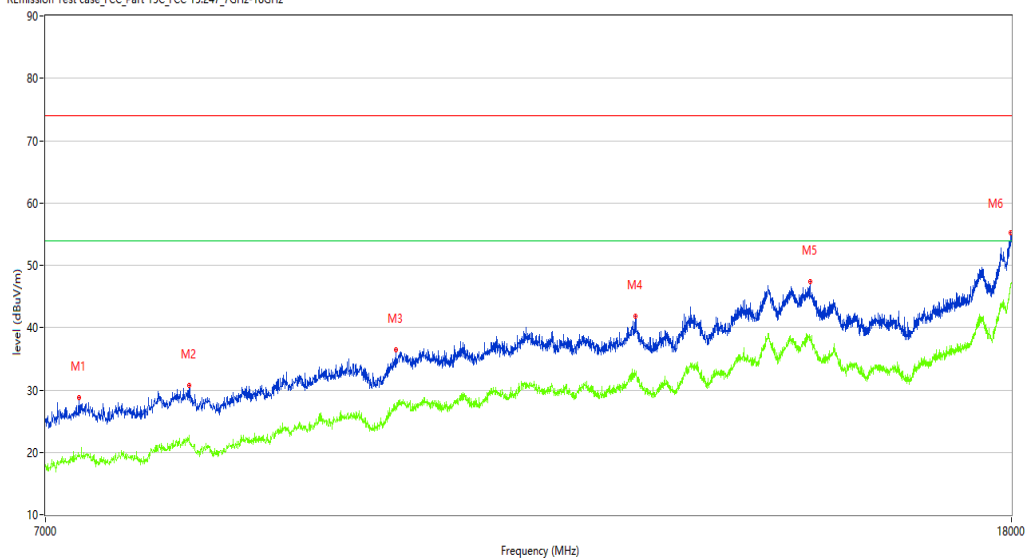

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7170.457	25.92	-4.19	74.0	-48.08	Peak	174.60	100	Horizontal	Pass
1**	7170.457	18.40	-4.19	54.0	-35.60	AV	174.60	100	Horizontal	Pass
2	8052.987	30.80	-0.56	74.0	-43.20	Peak	281.20	100	Horizontal	Pass
2**	8052.987	22.74	-0.56	54.0	-31.26	AV	281.20	100	Horizontal	Pass
3	9859.285	36.45	4.03	74.0	-37.55	Peak	203.10	100	Horizontal	Pass
3**	9859.285	26.98	4.03	54.0	-27.02	AV	203.10	100	Horizontal	Pass
4	12462.884	41.87	7.55	74.0	-32.13	Peak	71.20	100	Horizontal	Pass
4**	12462.884	32.47	7.55	54.0	-21.53	AV	71.20	100	Horizontal	Pass
5	14786.053	47.42	13.53	74.0	-26.58	Peak	203.10	100	Horizontal	Pass
5**	14786.053	38.21	13.53	54.0	-15.79	AV	203.10	100	Horizontal	Pass
6	17991.752	55.14	22.41	74.0	-18.86	Peak	183.00	100	Horizontal	Pass
6**	17991.752	46.77	22.41	54.0	-7.23	AV	183.00	100	Horizontal	Pass

BT 3M-Hopping -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2021-10-28_11.22.40

EUT Name: N.A

full load: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RSE

Work Addition: normal

Load:

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

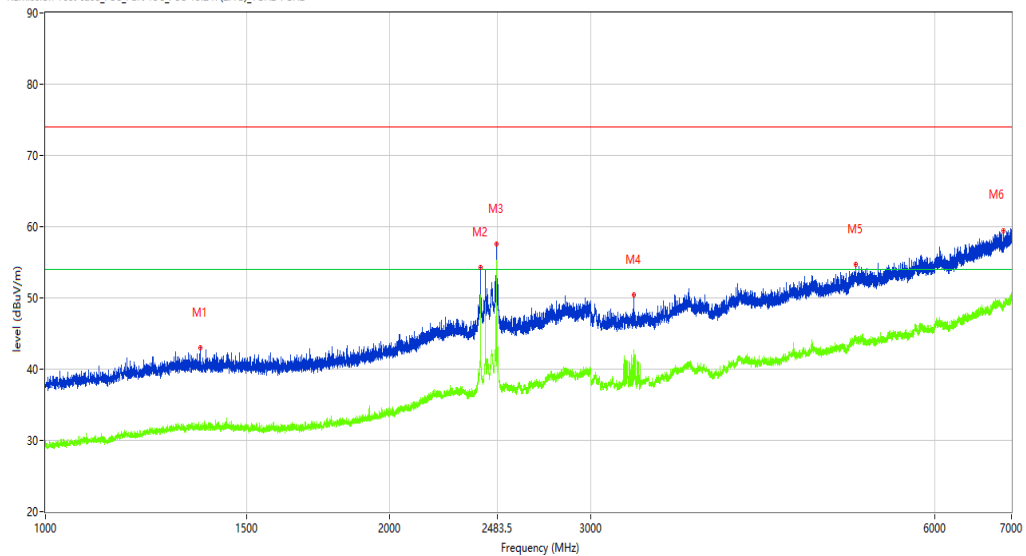

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1366.954	42.97	-12.69	74.0	-31.03	Peak	204.90	100	Vertical	Pass
1**	1366.954	32.15	-12.69	54.0	-21.85	AV	204.90	100	Vertical	Pass
2	2401.825	54.27	-4.02	74.0	-19.73	Peak	198.60	100	Vertical	Pass
2**	2401.825	50.41	-4.02	54.0	-3.59	AV	198.60	100	Vertical	Pass
3	2479.565	57.53	-2.01	74.0	-16.47	Peak	244.30	100	Vertical	Pass
3**	2479.565	54.59	-2.01	54.0	0.59	AV	244.30	100	Vertical	Fail
4	3268.966	50.40	-4.51	74.0	-23.60	Peak	231.80	100	Vertical	Pass
4**	3268.966	41.16	-4.51	54.0	-12.84	AV	231.80	100	Vertical	Pass
5	5115.736	54.73	1.29	74.0	-19.27	Peak	27.70	100	Vertical	Pass
5**	5115.736	44.43	1.29	54.0	-9.57	AV	27.70	100	Vertical	Pass
6	6891.514	59.38	5.10	74.0	-14.62	Peak	166.30	100	Vertical	Pass
6**	6891.514	48.89	5.10	54.0	-5.11	AV	166.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2021-10-28_11.26.15

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

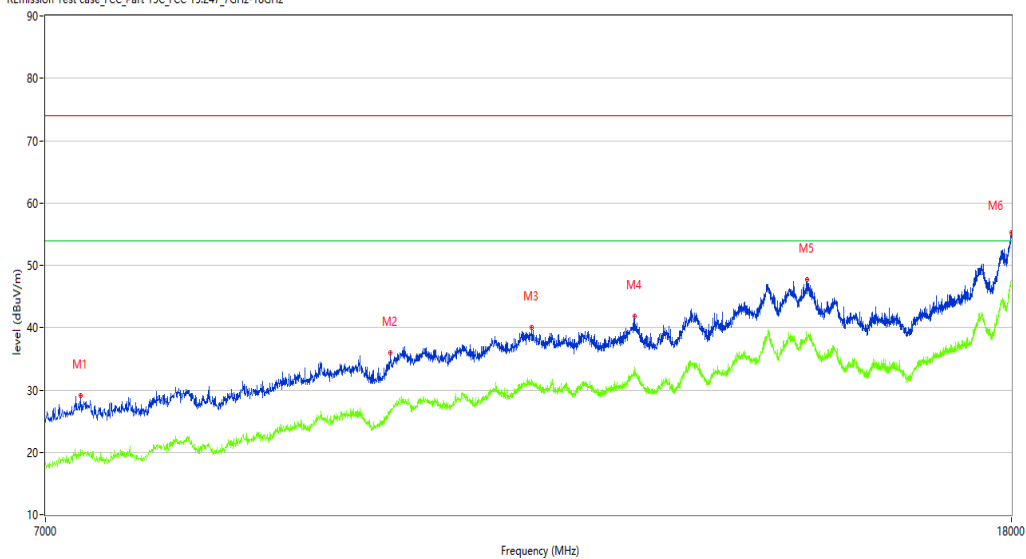

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7225.444	27.23	-3.50	74.0	-46.77	Peak	87.40	100	Vertical	Pass
1**	7225.444	19.89	-3.50	54.0	-34.11	AV	87.40	100	Vertical	Pass
2	9809.798	35.96	3.35	74.0	-38.04	Peak	252.10	100	Vertical	Pass
2**	9809.798	26.68	3.35	54.0	-27.32	AV	252.10	100	Vertical	Pass
3	11258.685	40.03	7.01	74.0	-33.97	Peak	173.60	100	Vertical	Pass
3**	11258.685	30.69	7.01	54.0	-23.31	AV	173.60	100	Vertical	Pass
4	12457.386	41.84	7.53	74.0	-32.16	Peak	260.10	100	Vertical	Pass
4**	12457.386	32.55	7.53	54.0	-21.45	AV	260.10	100	Vertical	Pass
5	14736.566	47.71	13.55	74.0	-26.29	Peak	295.30	100	Vertical	Pass
5**	14736.566	38.20	13.55	54.0	-15.80	AV	295.30	100	Vertical	Pass
6	18000.000	55.30	22.92	74.0	-18.70	Peak	92.20	100	Vertical	Pass
6**	18000.000	47.55	22.92	54.0	-6.45	AV	92.20	100	Vertical	Pass

BT 3M-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.06.11

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

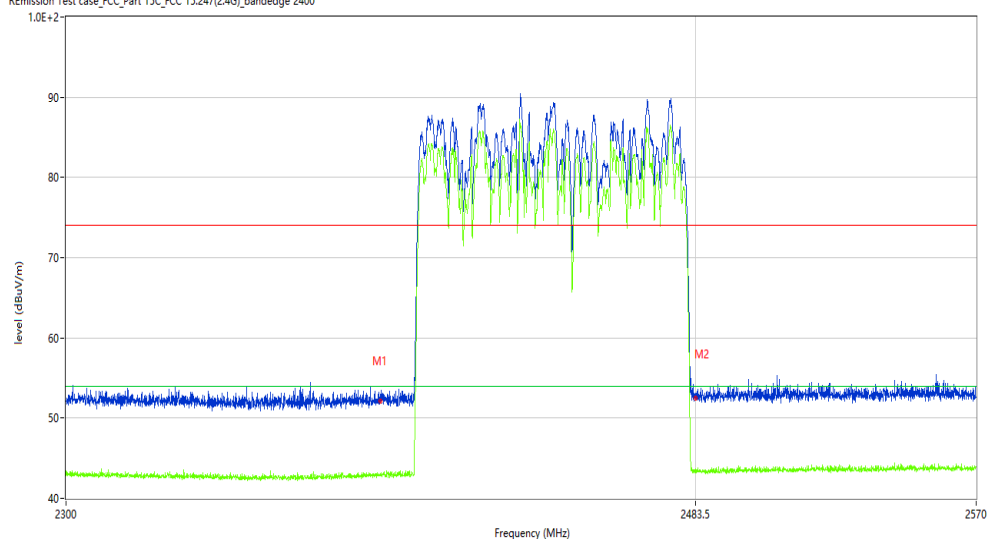

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.25	-9.96	74.0	-21.75	Peak	172.67	100	H	Pass
1**	2390.000	43.11	-9.96	54.0	-10.89	AV	172.67	100	H	Pass
2	2483.500	52.53	-9.51	74.0	-21.47	Peak	303.19	100	H	Pass
2**	2483.500	43.28	-9.51	54.0	-10.72	AV	303.19	100	H	Pass

BT 3M-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2021-11-01_10.02.35

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

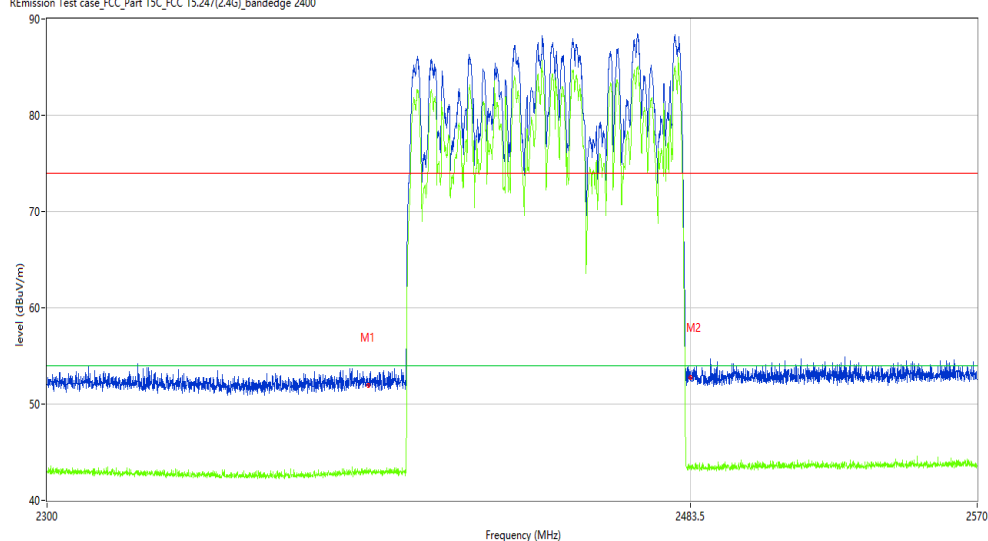

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.87	-9.96	74.0	-22.13	Peak	144.09	100	V	Pass
1**	2390.000	43.11	-9.96	54.0	-10.89	AV	144.09	100	V	Pass
2	2483.500	52.88	-9.51	74.0	-21.12	Peak	291.81	100	V	Pass
2**	2483.500	43.52	-9.51	54.0	-10.48	AV	291.81	100	V	Pass