

ROMOSS

Portable Power Station



The copyright belongs to Shenzhen ROMOSS Technology Co., Ltd.

The information provided above is for reference only and does not constitute any form of commitment. For details about the product, including but not limited to color, size, and screen display, please refer to the actual product.

**S1200**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Warning:** Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Portable Power Station .....	01
Alimentation portable en .....	15
énergie par stockage	
Estación de energía portátil .....	31
Портативный источник .....	47
питания с накопителем энергии	
ポータブル電源 .....	63
Tragbare Energiespeicher .....	79
-Stromversorgung	
Armazenamento de .....	95
Energia Portátil	
محطة طاقة متنقلة .....	111
휴대용 배전기 .....	127

# CONTENTS

## Specifications

ROMOSS (RM1200) Specifications	01
--------------------------------	----

---

## Safety Instructions

Usage	03
Disposal	04

---

## Beginner's Guide

Product Overview	05
Introduction to Screen Icons	06
Product Usage	07
How to Charge the Product	08
R-UPS Function	09

---

## FAQ

Troubleshooting and Solution	10
------------------------------	----

## Precautions

Package List	11
--------------	----

## After-sales Service

Warranty Card	12
---------------	----

## DISCLAIMER

Before using the product, thoroughly and carefully read the User Manual to ensure correct usage. Keep the User Manual for future reference. Improper operation of the product may result in serious harm to you, others, or cause product damage and property loss. By using the product, you indicate that you have understood, recognized, and accepted all the terms and conditions outlined here. Users agree to take full responsibility for their actions and the consequences that arise. ROMOSS assumes no responsibility for losses caused by user failure to follow the instructions in the User Manual.

While adhering to laws and regulations, ROMOSS reserves the final right of interpretation for this document and all documents related to the product. The User Manual is subject to updates, revisions, or termination without prior notice. For the latest product information, please visit the official ROMOSS website.

## Specifications

### ROMOSS (RM1200) Specifications

#### General Specifications

Model	RM1200
Battery type	LiFePO4 Battery
Rated energy of lithium battery	1024Wh 51.2V 20Ah (320000mAh 3.2V)
Net weight	Approx. 13kg
Dimensions	373*216*274mm
Charge ambient temperature	0°C~40°C
Discharge ambient temperature	-10°C~40°C
Storage ambient temperature	-20°C to 45°C (optimal: 20°C to 30°C)

#### Output Specifications

AC output (x4)	120W~60Hz, 10A (Total: 1,200W)
USB-A output (x2)	5V=3A, 9V=2A, 12V=1.5A (18WMax)
Type-C output (x2)	5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A (100W Max)
DC5525 output (x2)	12V=10A (120W Max)
Car charger output (x1)	12V=10A (120W Max)
Wireless charging output (x1)	15W
Total output	1,500W

#### Input Specifications

AC input (x1)	90-130V~60Hz, 15A Max
DC input (XT60)	12-60V=18A (400W Max)

#### Battery Specifications

Cell material	LiFePO4 (lithium iron phosphate battery)
Battery life cycle	80%+ capacity is remained after 3,000 cycles
Protection type	High temperature protection, low temperature protection, over-discharge protection, over-charge protection, overload protection, short circuit protection, and over-current protection

#### Operation Temperature

Optimal operating temperature	68°F to 86°F/20°C to 30°C
Discharge ambient temperature	14°F-104°F/-10°C to 40°C
Charge ambient temperature	32°F-104°F/ 0°C-40°C
Storage ambient temperature	14°F-104°F/-10°C to 40°C (optimal: 68°F to 86°F/20°C to 30°C)

## Safety Instructions

### Usage

1. Do not use the product near heat sources, such as fires or heating furnaces.
2. Avoid contact with liquids. Do not immerse the product in water or expose it to moisture, and try to avoid using it in rainy or humid environments.
3. Avoid using the product in environments with strong static electricity or magnetic fields.
4. Do not disassemble the product in any way or puncture it with sharp objects.
5. Avoid using wires or other metal objects that may cause a short circuit.
6. Use only official components and accessories. If you need to replace any parts, please visit official ROMOSS channels to find relevant information.
7. Adhere to the specified operating environment temperature mentioned in this User Manual when using the product. Excessive heat may lead to fire or explosion, while extremely low temperatures can significantly reduce product performance or even cause it to stop working.
8. Do not stack heavy objects on the product.
9. Do not forcibly lock the fan during product use and avoid placing the product in unventilated or dusty areas.



Note

To ensure safety, the product is only applicable for usage in places with an elevation under 2,000 m climate conditions.





10. Ensure that the product is not subjected to impacts, falls, or severe vibrations during use. Securely fasten the product during transportation to prevent damage. If the product is severely damaged, immediately power it off and discontinue use.
11. If the product accidentally falls into water while in use, place it in a safe, open area and keep a distance until it is completely dry. Do not use the product again after it has dried, and follow the "disposal" method outlined in this document. In case of a fire, it is recommended to use fire extinguishers in the following order: water or water mist, sand, fire blanket, dry powder, and carbon dioxide fire extinguisher.
12. Clean the ports of the product using a clean cloth or tissue.
13. Place the product carefully to prevent damage from tipping over. If the product is overturned and severely damaged, immediately power it off, place the battery in an open area away from flammable materials and people, and dispose of it in accordance with local laws and regulations.
14. Keep the product out of the reach of children and pets.

### Disposal

1. If conditions permit, ensure that the battery is fully discharged before disposing of it in a designated battery recycling bin. The product contains batteries with hazardous chemicals; therefore, it is strictly prohibited to dispose of it in ordinary trash cans. For more details, follow to local laws and regulations regarding battery recycling and disposal.
2. If the battery fails to be fully discharged due to a product failure, do not dispose of the battery directly in a battery recycling bin. Contact a professional battery recycling company for further processing.
3. Dispose of over-discharged batteries as they cannot be recharged.

## Beginner's Guide


### Product Overview

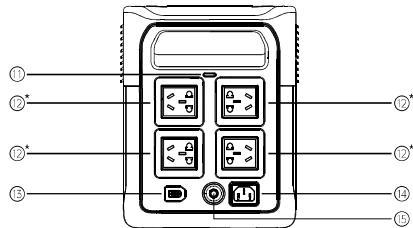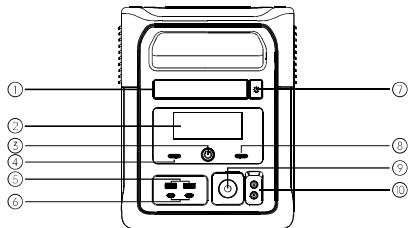

1. LED lamp	7. Lighting switch	13. DC input port
2. LCD screen	8 DC output switch	14. AC charging input port
3. Main power switch	9. Cigar lighter output port	15. AC input overload protector
4. ECO mode switch	10. DC5525 output port	
5. USB-A output port	11 AC output switch	
6. Type-C output port	12* AC output port	



### Introduction to Screen Icons

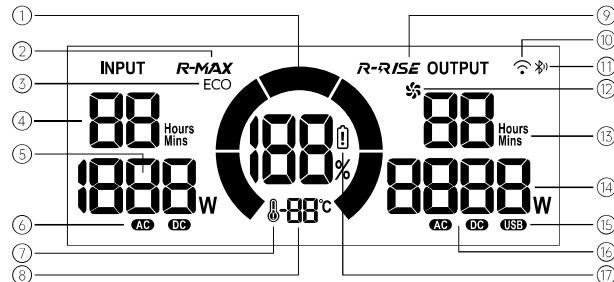

1. Battery level percentage	10. Bluetooth connection status (reserved)
2. R-MAX power mode	11. Wi-Fi connection status (reserved)
3. ECO energy-saving mode	12. Fan operation status
4. Remaining charging time	13. Remaining usage time
5. Input power	14. Output power
6. AC/DC input status	15. USB output status
7. High/low temperature alarm	16. AC/DC output status
8. Battery temperature status	17. Low voltage warning
9. R-RISE parallel mode	

## Product Usage

---

### 1. Turning on

When the product is turned off, press the main power switch once to turn the product on. At the same time, the LCD screen lights up. In sleep status, press the main power switch once to light up the LCD screen.

### 2. Turning off

Press and hold the main power switch to turn off the product. When there is charging input source, the product will not turn off.

### 3. Using USB output

After ensuring that main power supply is turned on, press the DC button once to activate the blue lamp. Then, you can use the USB output port (USB-A/Type-C/wireless charge output). Press the DC button once again to turn off the product, and the blue lamp will light off.

### 4. Using 12V DC output

After ensuring that main power supply is turned on, press the DC button to light up the blue lamp. Then, you can use the 12V DC output port (Cigar lighter/DC5525). Press the DC button once again to turn off the product, and the blue lamp will light off.

### 5. Using AC output

After ensuring that main power supply is turned on, press the AC button to light up the blue lamp. Then, you can use the AC output port. Press the AC button once again to turn off the output.

### 6. Using lamp

Press the lighting button to light up the lamp. Press the button again, and the lamp enters the semi-lighting status. Press the button a third time to enter SOS mode.

Press the button a fourth time to disable the mode. Press and hold the button to turn off the lamp or to deactivate the SOS mode.




Note

The battery may be in Sleep mode after long-term transportation and storage. Please charge the product, and the battery will be activated after 10 minutes.  
For optimal performance, fully charge the product before initial use to prevent inconvenience caused by insufficient battery levels.

## How to charge the product

---


### Method 1. AC charging

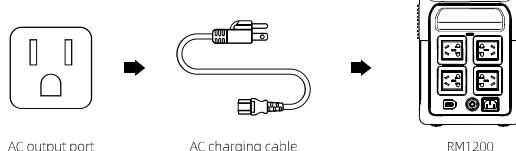

### Method 2. Solar panel charging




### Method 3. Car charger charging (12V)

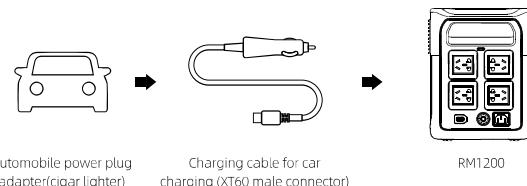

## R-UPS Function

---

The product supports UPS function. In the event of outage, the product will switch to be supplied by a power supply within 10ms. However, the function is not a professional UPS function, and therefore does not support 0ms switch. Do not connect the product to any device with UPS requirements, such as: data server and working station. During use, do not use several devices at the same to avoid overload protection. The Company bears no responsibility for operational failures or data loss resulting from failure to adhere to these instructions.

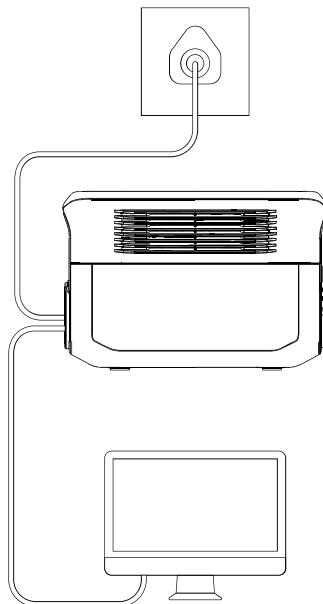

## FAQ

---

### 1. What type of battery does the product use?

The product uses lithium iron phosphate battery.

### 2. What devices can the product's AC output port power?

The product's AC output port offers 1,200W rated power and 2,400W peak power, and the product has the R-MAX function, which can power some heating appliances with power  $\leq$  2,400W. Before use, we recommend that you confirm the power of the appliances first and ensure the power sum of all loaded appliances is lower than the rated power.

### 3. How long can the product charge a device?

The power supply time is shown on the product's LCD screen, which can be used to estimate the charging time of appliances with stable power usage.

### 4. Why does the fan start up sometimes?

When using an outdoor power supply for charging, the product may heat up due to high power, and the built-in fan helps heat dissipation of the product. When the temperature reaches a certain level, the fan will start up automatically with light noise.

### 5. How to store the product?

Before storing, please turn off the product first, and then store it in a dry and ventilated place at room temperature. Do not place it near water sources. For long-term storage, it is recommended to discharge the battery to 30% and recharge it to 60% every three months to extend its battery life.

### 6. Can I bring the product on a plane?

No. According to airline regulations, passengers are not allowed to carry a Lithium battery with capacity greater than 100Wh on a plane.

### 7. Is the product's actual output capacity the same as that stated in the User Manual?

The capacity indicated in the User Manual represents the rated capacity of the product's power pack. However, due to efficiency losses during charging and discharging, the actual output capacity of the product is lower than the figure specified in the User Manual.

## Troubleshooting and Solution

Code	Meaning	Explanation
E02	AC output off	Please charge/supply the device within the rated power range. Then, press the AC button to restart the product. If a product with greater power is needed, please contact the customer service staff.
E07	Output overload protection	Please charge/supply the device within the rated power range of DC power supply, and then press On/Off button to restore the function.




If a warning message is displayed while using the product, and the warning persists even after restarting the device, please discontinue its use immediately. Do not attempt to charge or discharge the device. If the problem continues after attempting the steps mentioned above, please get in touch with our customer service team for further assistance and consultation.


## Precautions

1. Make sure to read all instructions before using the product.
2. Fully charge the product when you use it for the first time.
3. To reduce risks, close supervision is required when you use the product with children nearby.
4. Before using the product, light up the digital product's screen, and make sure that all charging connection icons are correctly displayed to ensure that the product is functioning.
5. Use the charging cable provided in the product's package to charge the product.
6. When charging a digital product with the product, please select an appropriate connection cable on your own.
7. When charging a digital product, if the product's LCD screen displays that the battery level is insufficient, please charge it as soon as possible. When connecting a digital product to the product, the digital product will use the product's battery level at priority.
8. When the digital product is fully charged, remove the connection cable in time to avoid loss.
9. When the product is not in use, please remove the power plug from the product's socket.
10. Do not expose the product in too hot, too cold, or damp environments.
11. To ensure safety, the product can only be used in places with an elevation under 2,000m.


## Package List



RM1200



AC charging cable



Charging cable for car charging



User Manual

## After-sales Service

---

### Warranty description (The warranty scope only covers the product, excluding accessories and gifts.)

1. After purchasing this product, the user can enjoy 2-year free repair service.
2. In the following cases the warranty is invalid, and fees will be charged for maintenance.
  - ① Damage caused by human factors, including use under abnormal operating environment or not in accordance with the instruction manual, etc.
  - ② The user disassembles, repairs or refits the panel without permission, or has it repaired by a non-Romoss maintenance department or an unauthorized organization.
  - ③ Damage due to force majeure.
  - ④ Absence of the product warranty card, valid purchase certificate (invoice), and verifiable user information.
  - ⑤ The product barcode and label bearing the production date are torn (outer packaging).
  - ⑥ The product barcode (on the product) has been torn up.
  - ⑦ The warranty expires.

## Warranty Card

---

### Service Type

Exchange       Return       Repair

### Customer Information

Name \_\_\_\_\_

Phone Number \_\_\_\_\_

Address \_\_\_\_\_

The Name and Address of the Seller \_\_\_\_\_

### Product Information

Product Name and Model \_\_\_\_\_

Exchange and Repair Records \_\_\_\_\_