



Appendix E

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: VIDEO PROJECTOR

Test Model: T800

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.327	≥ 0.5	Pass
NVNT	a	5785	Ant1	16.33	≥ 0.5	Pass
NVNT	a	5825	Ant1	16.329	≥ 0.5	Pass
NVNT	n20	5745	Ant1	17.506	≥ 0.5	Pass
NVNT	n20	5785	Ant1	17.401	≥ 0.5	Pass
NVNT	n20	5825	Ant1	17.288	≥ 0.5	Pass
NVNT	ac20	5745	Ant1	17.317	≥ 0.5	Pass
NVNT	ac20	5785	Ant1	17.382	≥ 0.5	Pass
NVNT	ac20	5825	Ant1	17.27	≥ 0.5	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

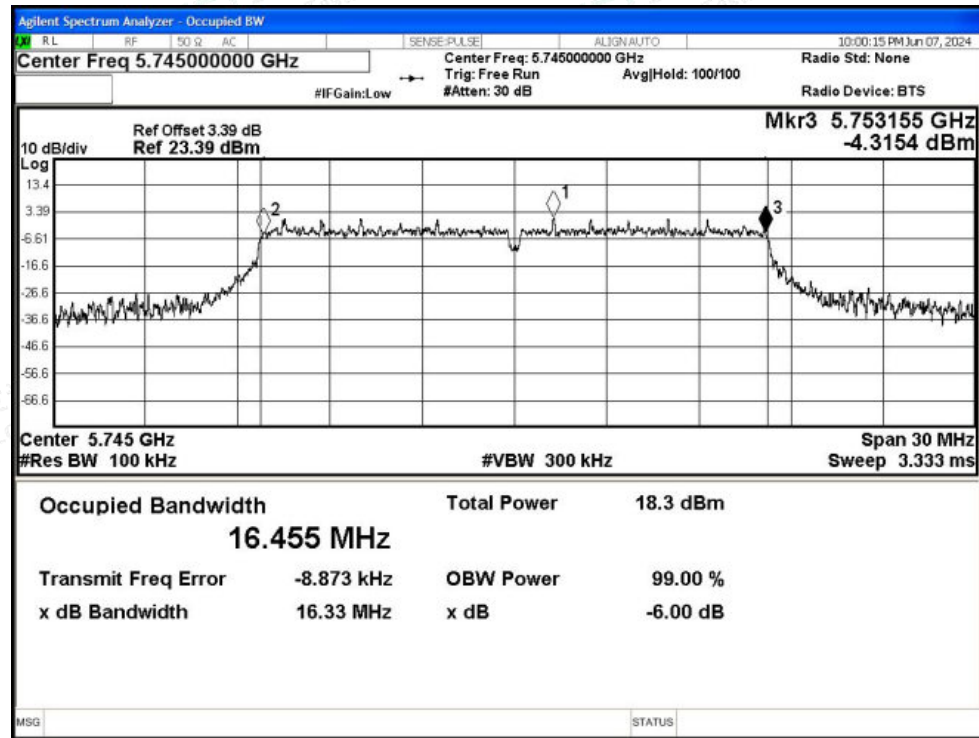

-6dB Bandwidth NVNT a 5785MHz Ant1

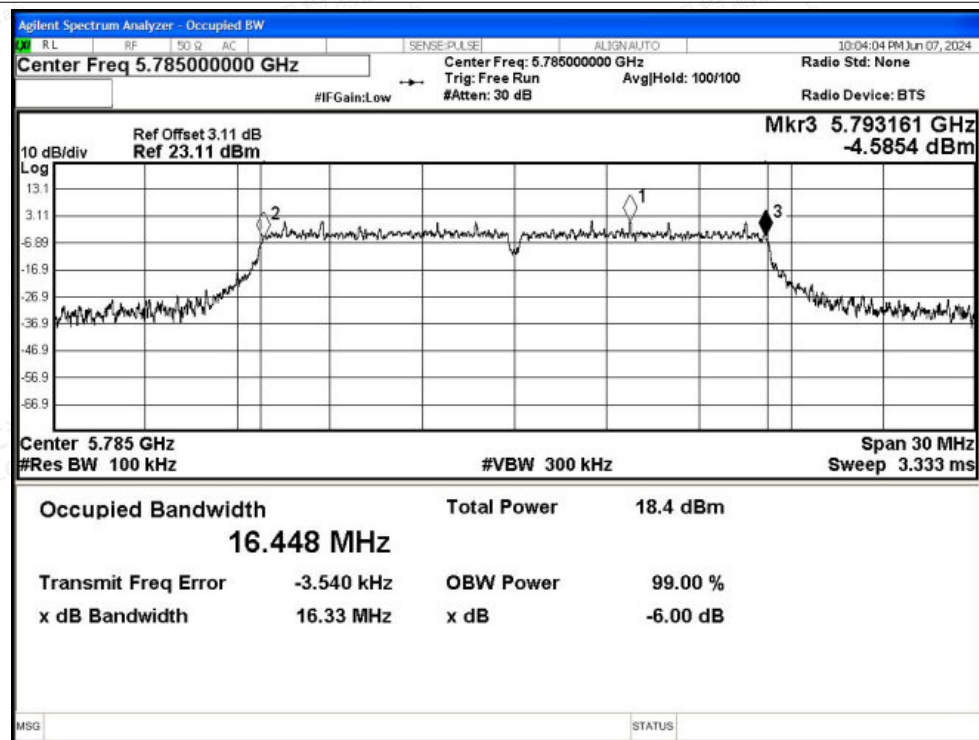

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT a 5825MHz Ant1

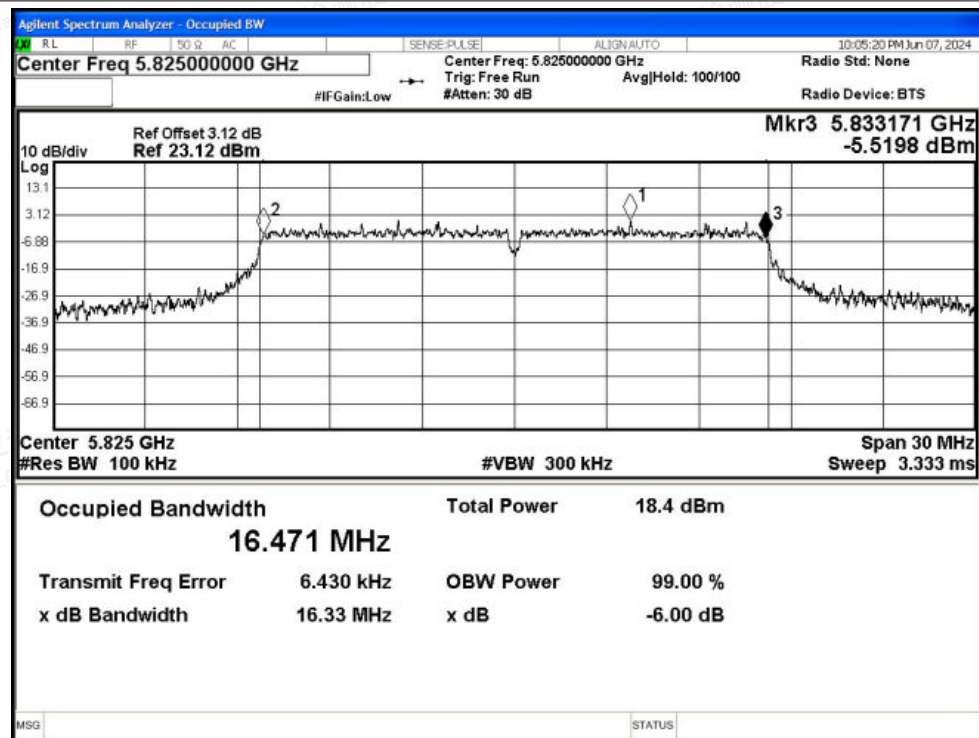

-6dB Bandwidth NVNT n20 5745MHz Ant1

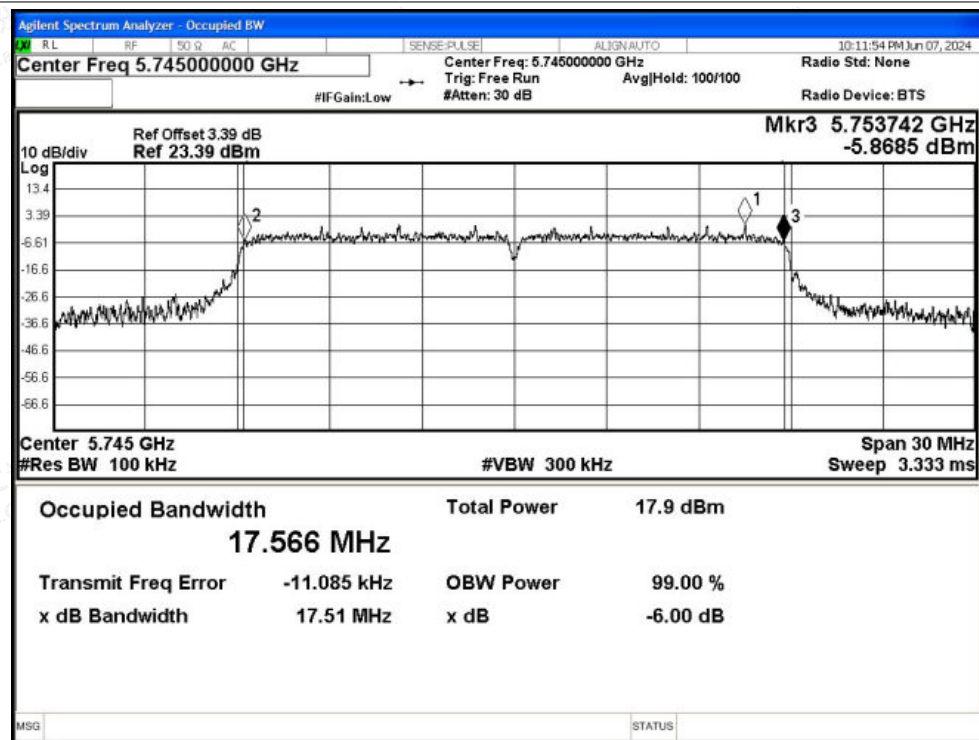

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT n20 5785MHz Ant1

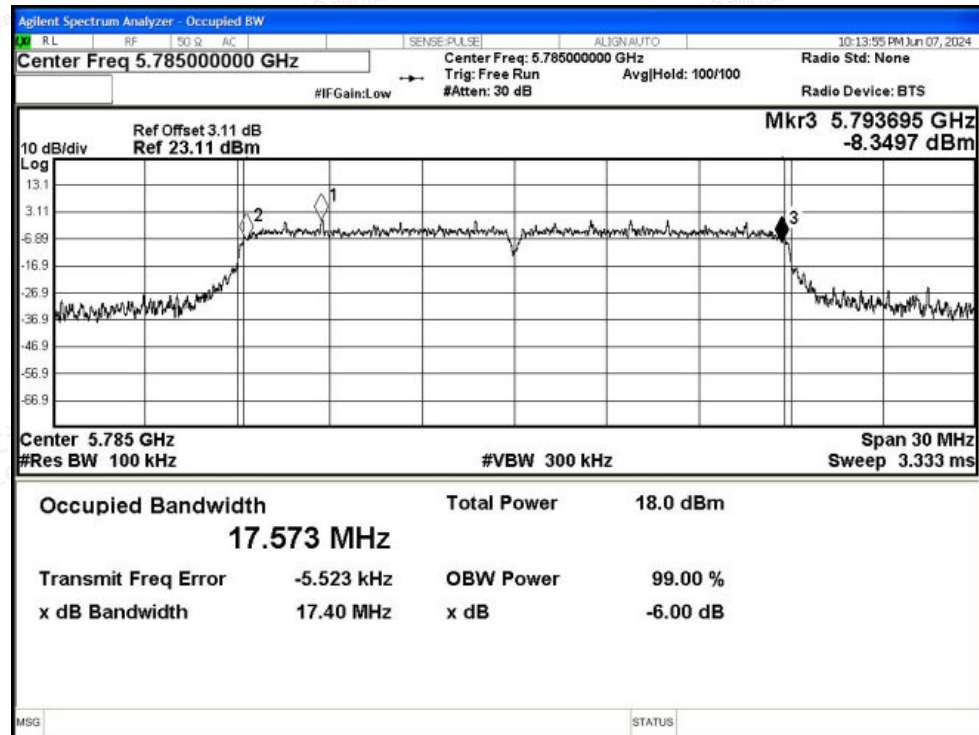


-6dB Bandwidth NVNT n20 5825MHz Ant1

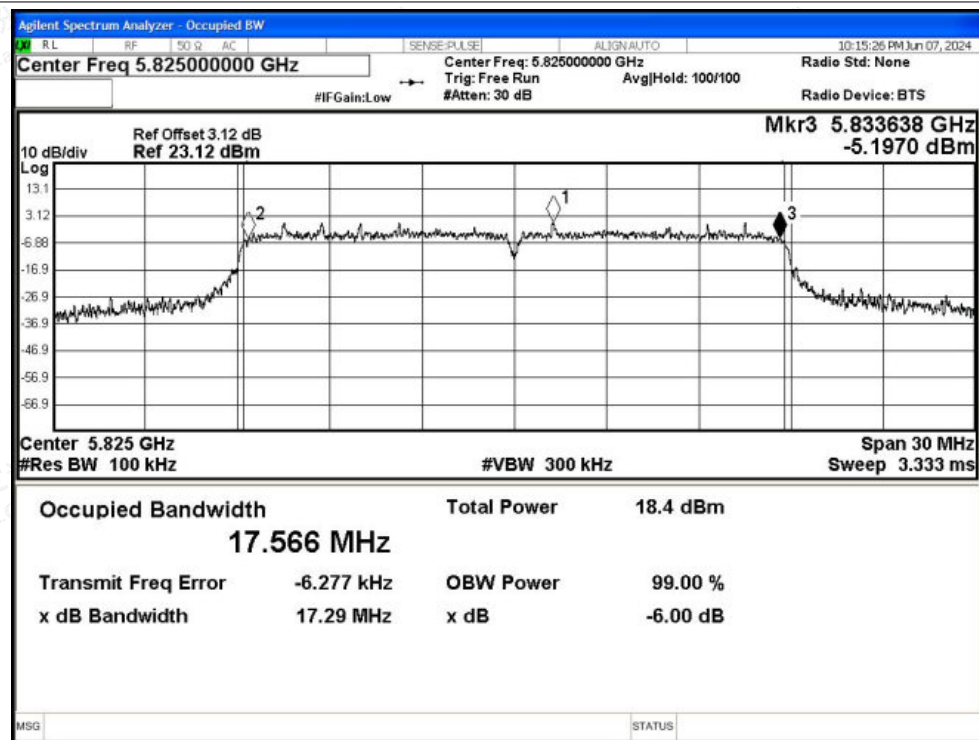





-6dB Bandwidth NVNT ac20 5745MHz Ant1

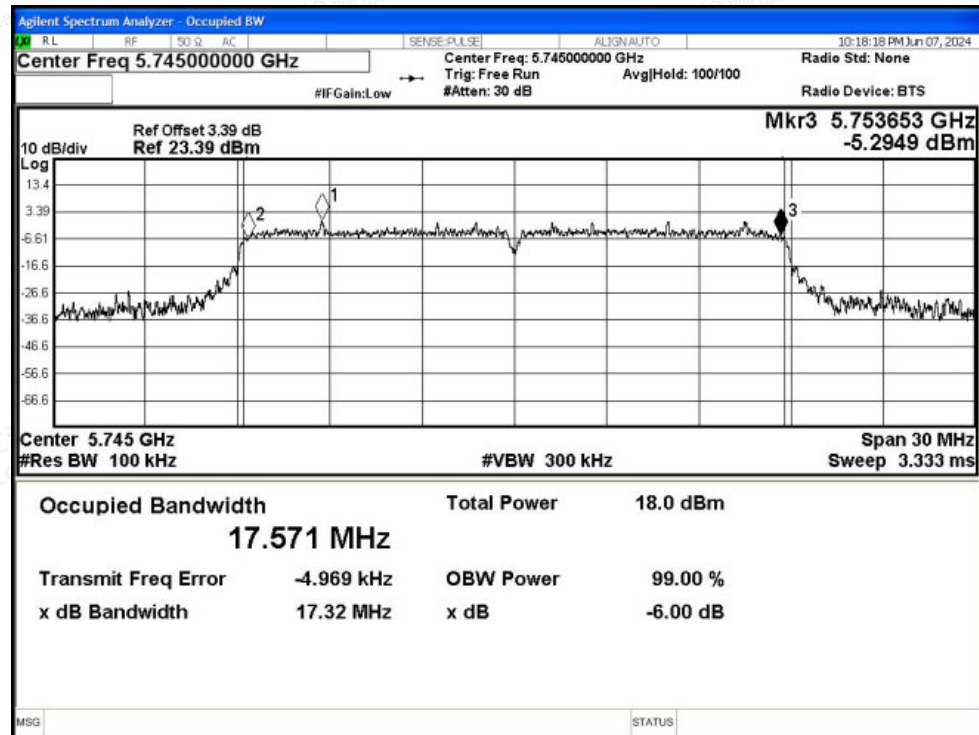

-6dB Bandwidth NVNT ac20 5785MHz Ant1

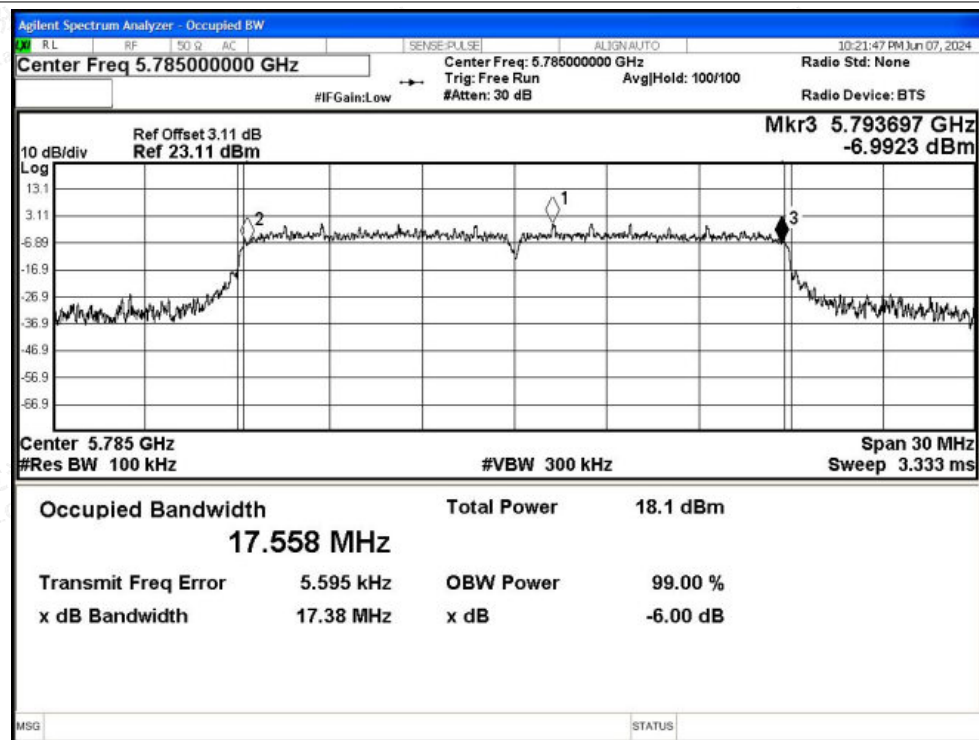

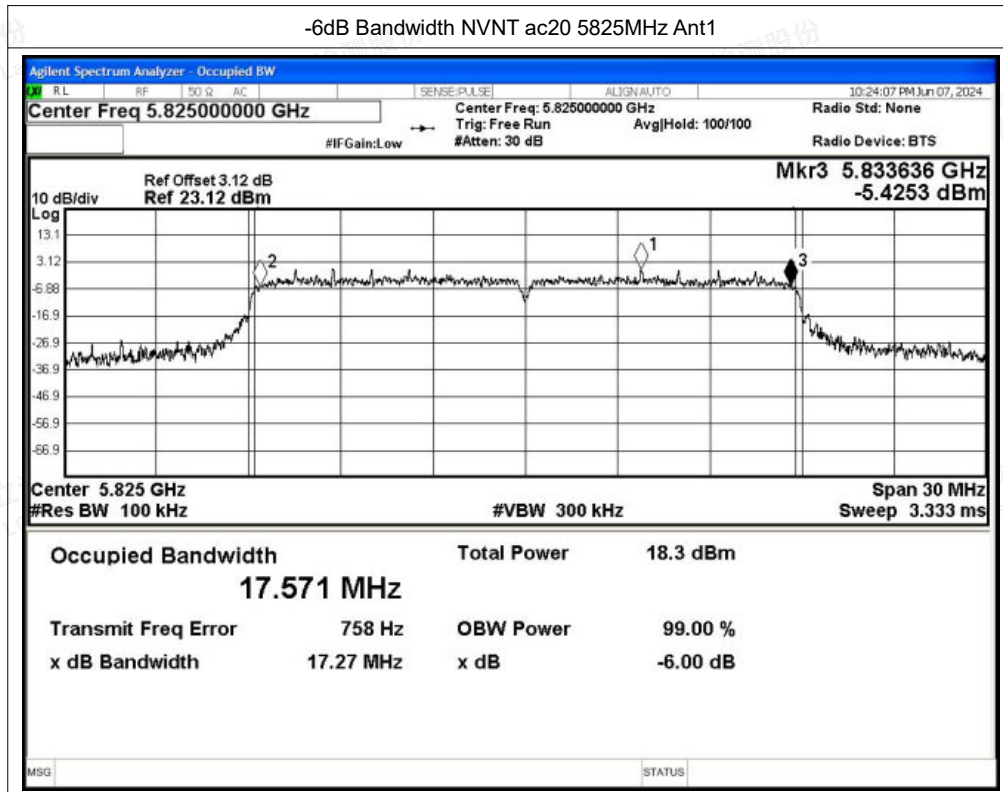

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.19	0.24	12.43	30	Pass
NVNT	a	5785	Ant1	12.32	0.24	12.56	30	Pass
NVNT	a	5825	Ant1	12.41	0.24	12.65	30	Pass
NVNT	n20	5745	Ant1	11.15	0.28	11.43	30	Pass
NVNT	n20	5785	Ant1	11.6	0.28	11.88	30	Pass
NVNT	n20	5825	Ant1	11.9	0.28	12.18	30	Pass
NVNT	ac20	5745	Ant1	11.67	0.28	11.95	30	Pass
NVNT	ac20	5785	Ant1	11.63	0.28	11.91	30	Pass
NVNT	ac20	5825	Ant1	11.81	0.28	12.09	30	Pass





E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	Ant1	-1.29	0.24	-1.05	30	Pass
NVNT	a	5785	Ant1	-1.35	0.24	-1.11	30	Pass
NVNT	a	5825	Ant1	-1.21	0.24	-0.97	30	Pass
NVNT	n20	5745	Ant1	-2.25	0.28	-1.97	30	Pass
NVNT	n20	5785	Ant1	-2.13	0.28	-1.85	30	Pass
NVNT	n20	5825	Ant1	-1.97	0.28	-1.69	30	Pass
NVNT	ac20	5745	Ant1	-2.11	0.28	-1.83	30	Pass
NVNT	ac20	5785	Ant1	-1.99	0.28	-1.71	30	Pass
NVNT	ac20	5825	Ant1	-1.84	0.28	-1.56	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

PSD NVNT a 5745MHz Ant1

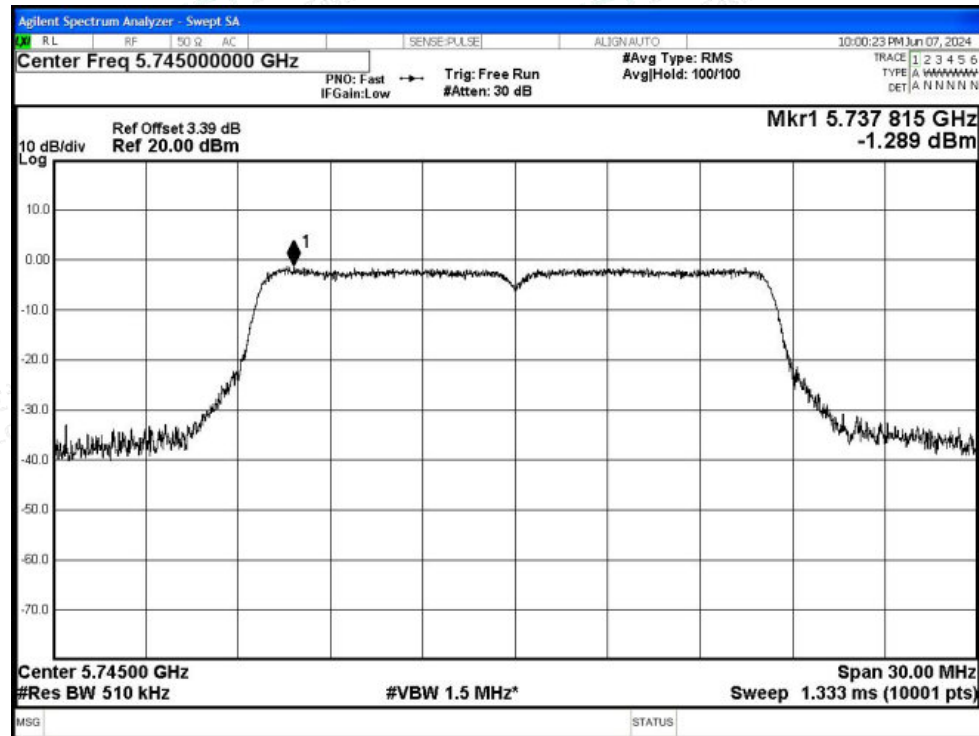

PSD NVNT a 5785MHz Ant1

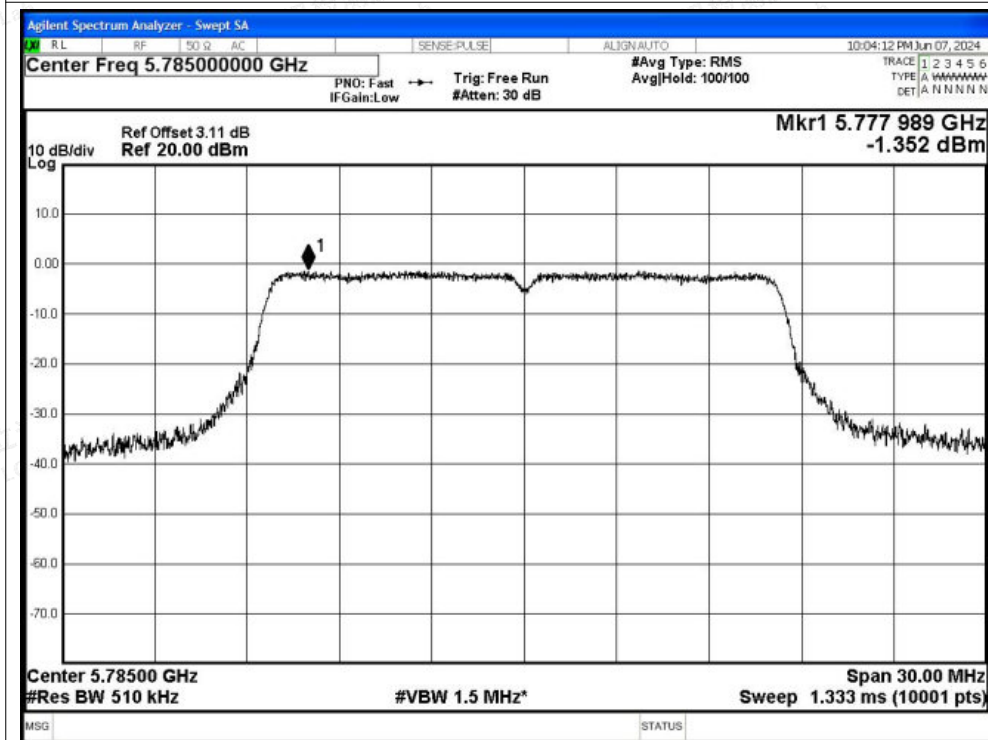

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity





PSD NVNT a 5825MHz Ant1

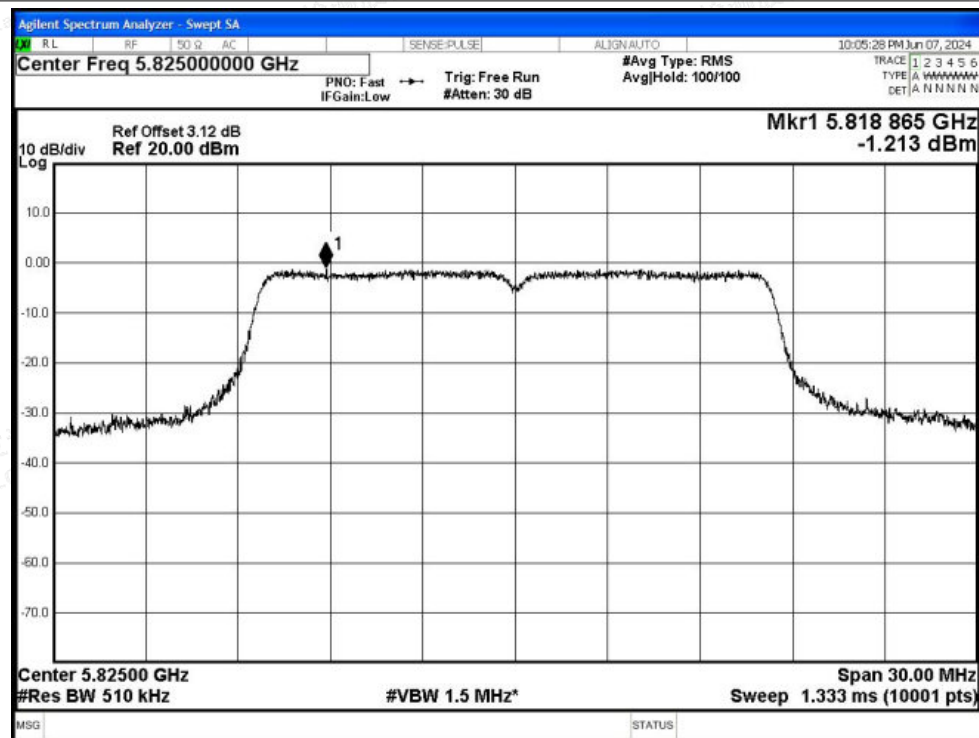


PSD NVNT n20 5745MHz Ant1

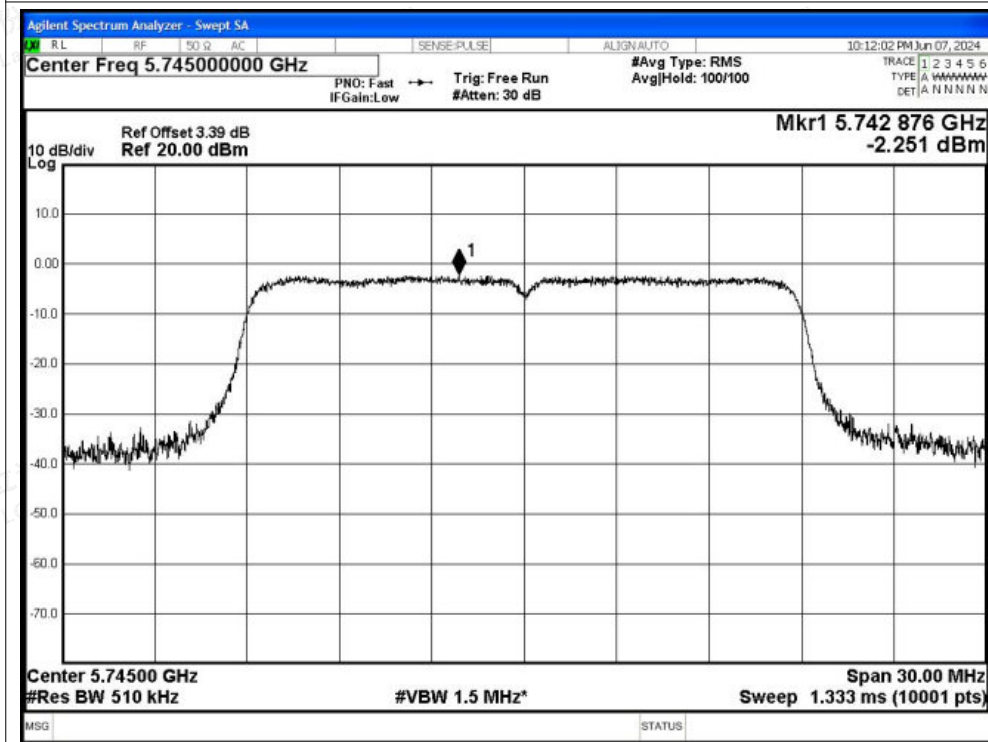

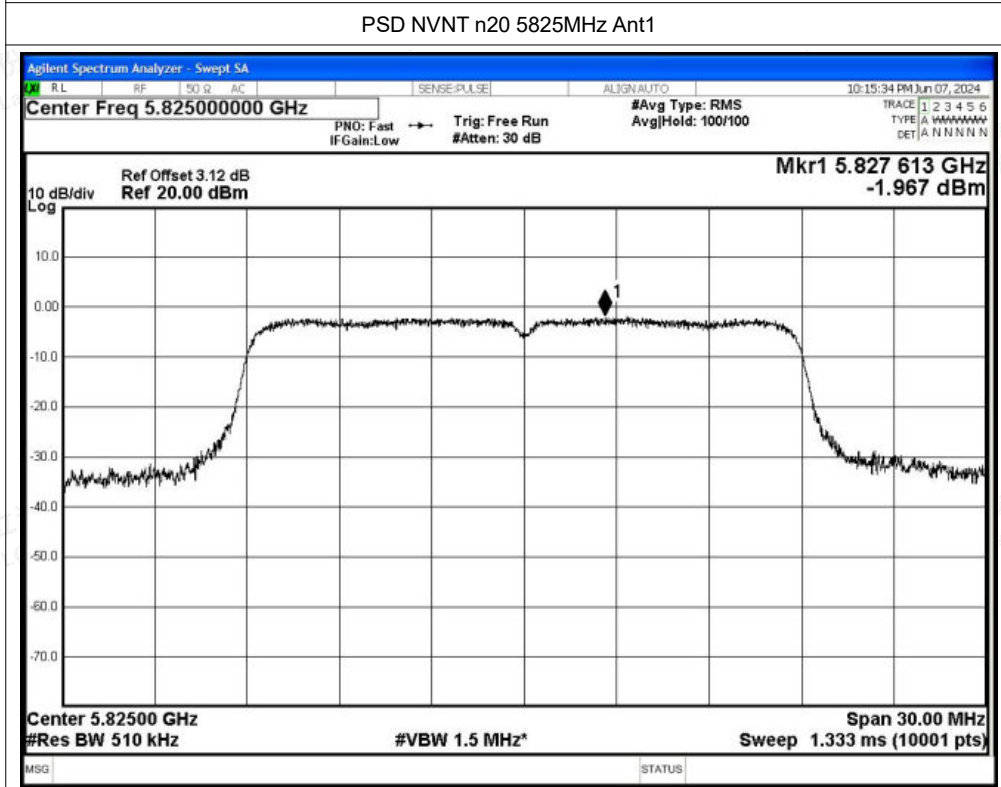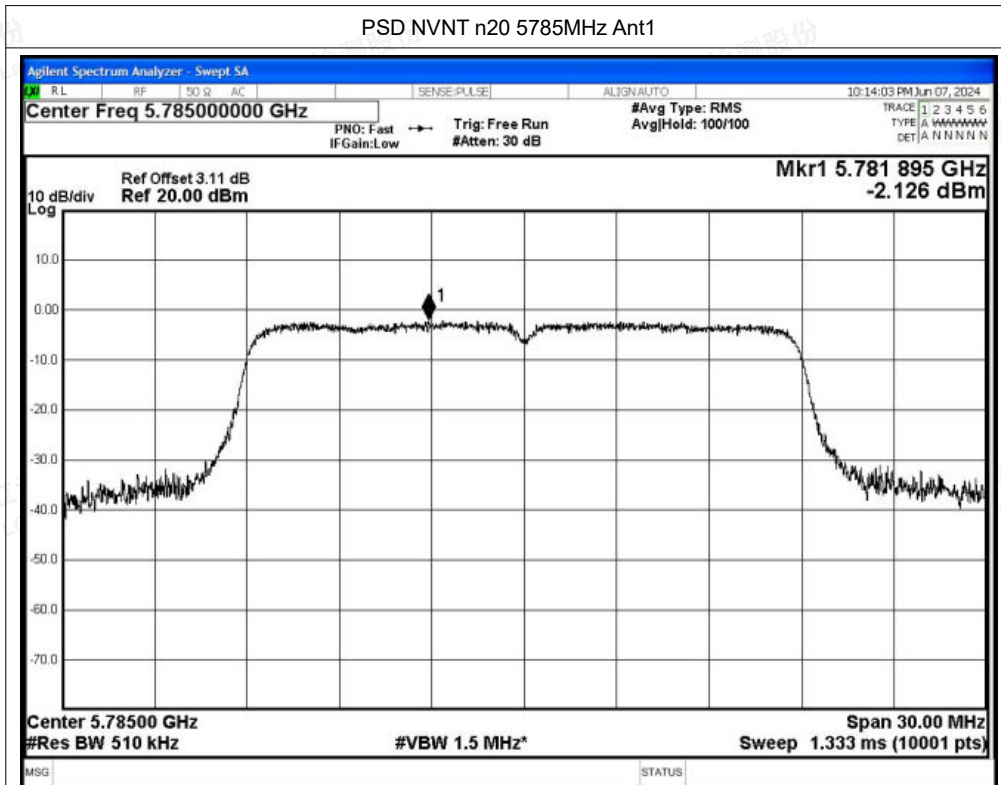





PSD NVNT ac20 5745MHz Ant1

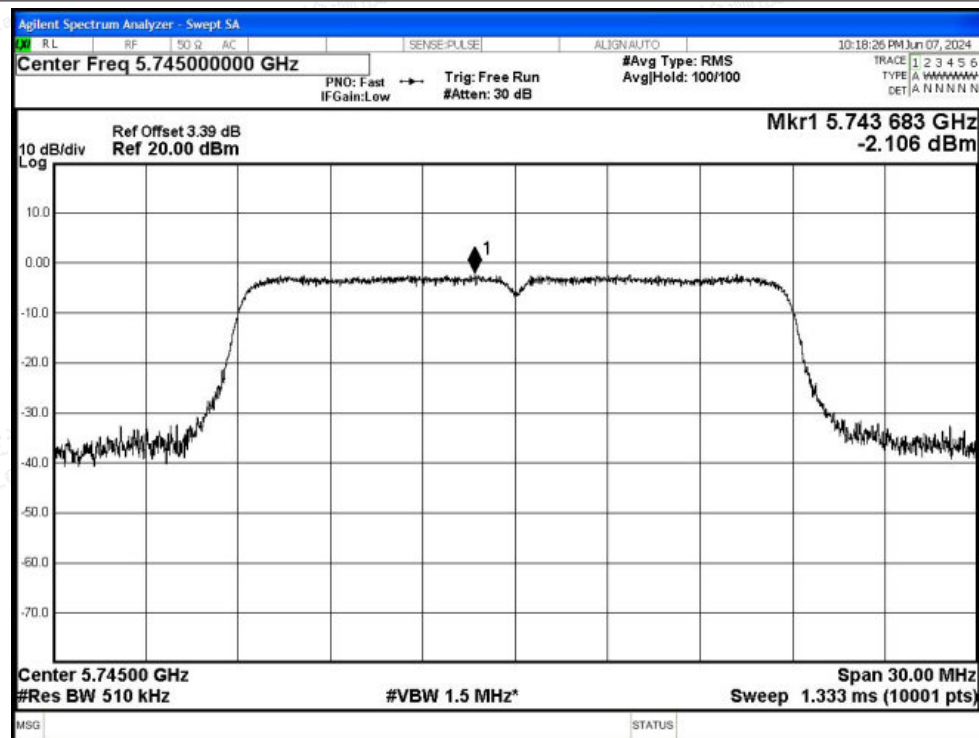

PSD NVNT ac20 5785MHz Ant1

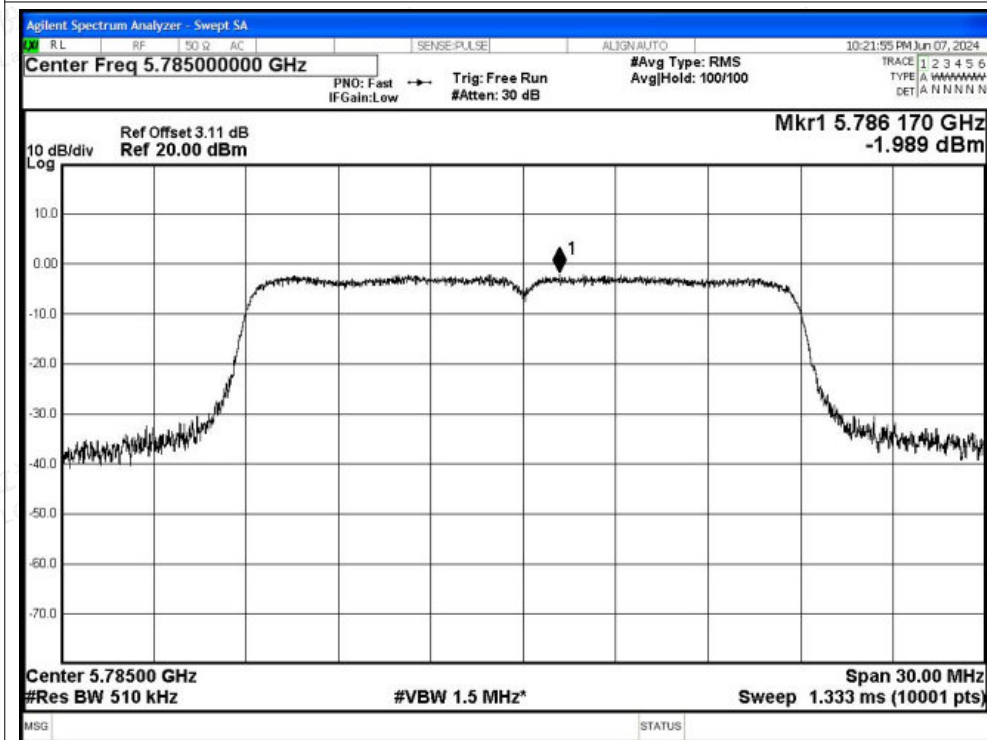

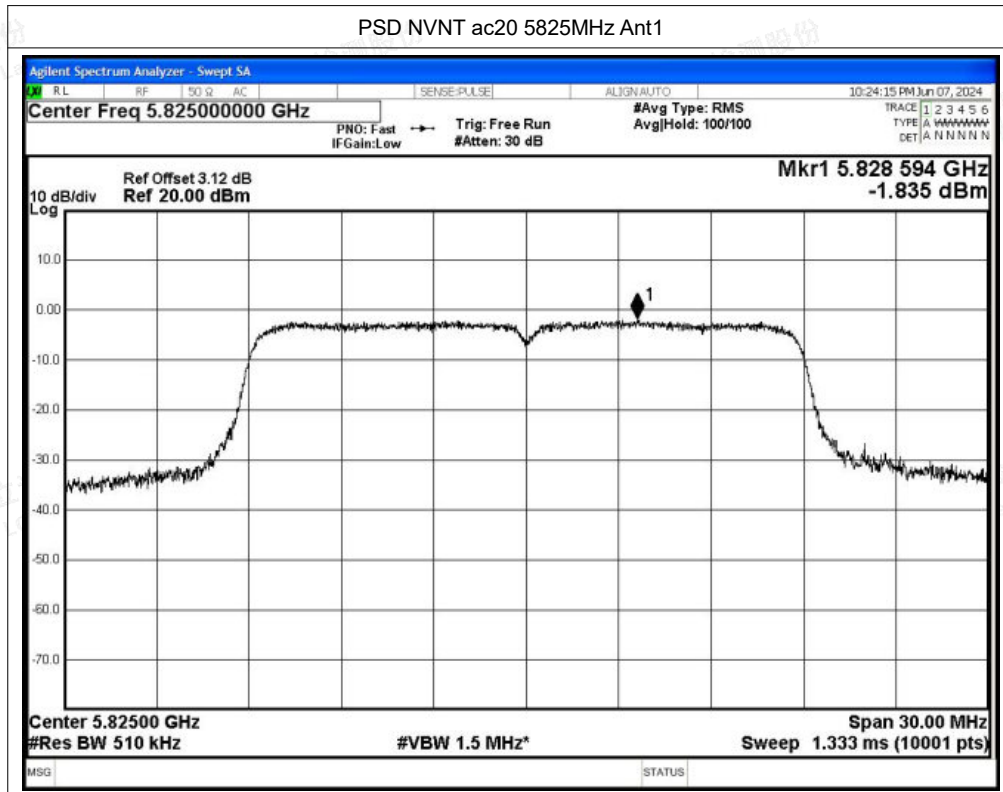



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	5650	-49.09	2.95	-	-46.14	Peak	-27	Pass
NVNT	a	5745	Ant1	5650	-57.77	2.95	0.24	-54.58	Average	-27	Pass
NVNT	a	5745	Ant1	5700	-49.28	2.95	-	-46.33	Peak	10	Pass
NVNT	a	5745	Ant1	5700	-57.67	2.95	0.24	-54.48	Average	10	Pass
NVNT	a	5745	Ant1	5720	-44.37	2.95	-	-41.42	Peak	15.6	Pass
NVNT	a	5745	Ant1	5720	-55.99	2.95	0.24	-52.80	Average	15.6	Pass
NVNT	a	5745	Ant1	5725	-38.51	2.95	-	-35.56	Peak	27	Pass
NVNT	a	5745	Ant1	5725	-51.38	2.95	0.24	-48.19	Average	27	Pass
NVNT	a	5825	Ant1	5850	-44.74	2.95	-	-41.79	Peak	27	Pass
NVNT	a	5825	Ant1	5850	-56.11	2.95	0.24	-52.92	Average	27	Pass
NVNT	a	5825	Ant1	5855	-49.91	2.95	-	-46.96	Peak	15.6	Pass
NVNT	a	5825	Ant1	5855	-58.12	2.95	0.24	-54.93	Average	15.6	Pass
NVNT	a	5825	Ant1	5875	-49.97	2.95	-	-47.02	Peak	10	Pass
NVNT	a	5825	Ant1	5875	-58.59	2.95	0.24	-55.40	Average	10	Pass
NVNT	a	5825	Ant1	5925	-50.02	2.95	-	-47.07	Peak	-27	Pass
NVNT	a	5825	Ant1	5925	-57.98	2.95	0.24	-54.79	Average	-27	Pass
NVNT	n20	5745	Ant1	5650	-49.58	2.95	-	-46.63	Peak	-27	Pass
NVNT	n20	5745	Ant1	5650	-57.97	2.95	0.28	-54.74	Average	-27	Pass
NVNT	n20	5745	Ant1	5700	-51.48	2.95	-	-48.53	Peak	10	Pass
NVNT	n20	5745	Ant1	5700	-57.55	2.95	0.28	-54.32	Average	10	Pass
NVNT	n20	5745	Ant1	5720	-40.91	2.95	-	-37.96	Peak	15.6	Pass
NVNT	n20	5745	Ant1	5720	-54.88	2.95	0.28	-51.65	Average	15.6	Pass
NVNT	n20	5745	Ant1	5725	-32.4	2.95	-	-29.45	Peak	27	Pass
NVNT	n20	5745	Ant1	5725	-51.32	2.95	0.28	-48.09	Average	27	Pass
NVNT	n20	5825	Ant1	5850	-41.69	2.95	-	-38.74	Peak	27	Pass
NVNT	n20	5825	Ant1	5850	-56.53	2.95	0.28	-53.30	Average	27	Pass
NVNT	n20	5825	Ant1	5855	-44.84	2.95	-	-41.89	Peak	15.6	Pass
NVNT	n20	5825	Ant1	5855	-57.44	2.95	0.28	-54.21	Average	15.6	Pass
NVNT	n20	5825	Ant1	5875	-50.29	2.95	-	-47.34	Peak	10	Pass
NVNT	n20	5825	Ant1	5875	-57.67	2.95	0.28	-54.44	Average	10	Pass
NVNT	n20	5825	Ant1	5925	-49.96	2.95	-	-47.01	Peak	-27	Pass
NVNT	n20	5825	Ant1	5925	-58.06	2.95	0.28	-54.83	Average	-27	Pass
NVNT	ac20	5745	Ant1	5650	-50.79	2.95	-	-47.84	Peak	-27	Pass
NVNT	ac20	5745	Ant1	5650	-58.06	2.95	0.28	-54.83	Average	-27	Pass
NVNT	ac20	5745	Ant1	5700	-49.38	2.95	-	-46.43	Peak	10	Pass
NVNT	ac20	5745	Ant1	5700	-57.9	2.95	0.28	-54.67	Average	10	Pass
NVNT	ac20	5745	Ant1	5720	-42.79	2.95	-	-39.84	Peak	15.6	Pass






NVNT	ac20	5745	Ant1	5720	-55.22	2.95	0.28	-51.99	Average	15.6	Pass
NVNT	ac20	5745	Ant1	5725	-34.5	2.95	-	-31.55	Peak	27	Pass
NVNT	ac20	5745	Ant1	5725	-49.75	2.95	0.28	-46.52	Average	27	Pass
NVNT	ac20	5825	Ant1	5850	-44.19	2.95	-	-41.24	Peak	27	Pass
NVNT	ac20	5825	Ant1	5850	-55.3	2.95	0.28	-52.07	Average	27	Pass
NVNT	ac20	5825	Ant1	5855	-45.93	2.95	-	-42.98	Peak	15.6	Pass
NVNT	ac20	5825	Ant1	5855	-57.42	2.95	0.28	-54.19	Average	15.6	Pass
NVNT	ac20	5825	Ant1	5875	-48.83	2.95	-	-45.88	Peak	10	Pass
NVNT	ac20	5825	Ant1	5875	-57.96	2.95	0.28	-54.73	Average	10	Pass
NVNT	ac20	5825	Ant1	5925	-48.79	2.95	-	-45.84	Peak	-27	Pass
NVNT	ac20	5825	Ant1	5925	-57.78	2.95	0.28	-54.55	Average	-27	Pass





Test Graphs

Restrict Band NVNT a 5745MHz Ant1 Peak

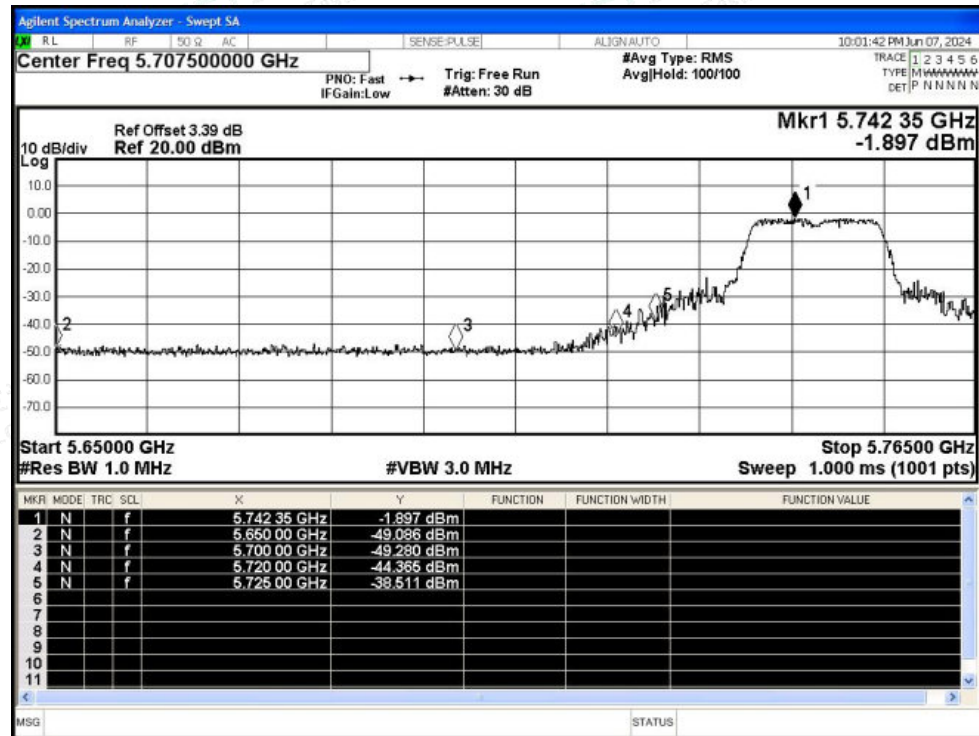

Restrict Band NVNT a 5745MHz Ant1 Average



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT a 5825MHz Ant1 Peak

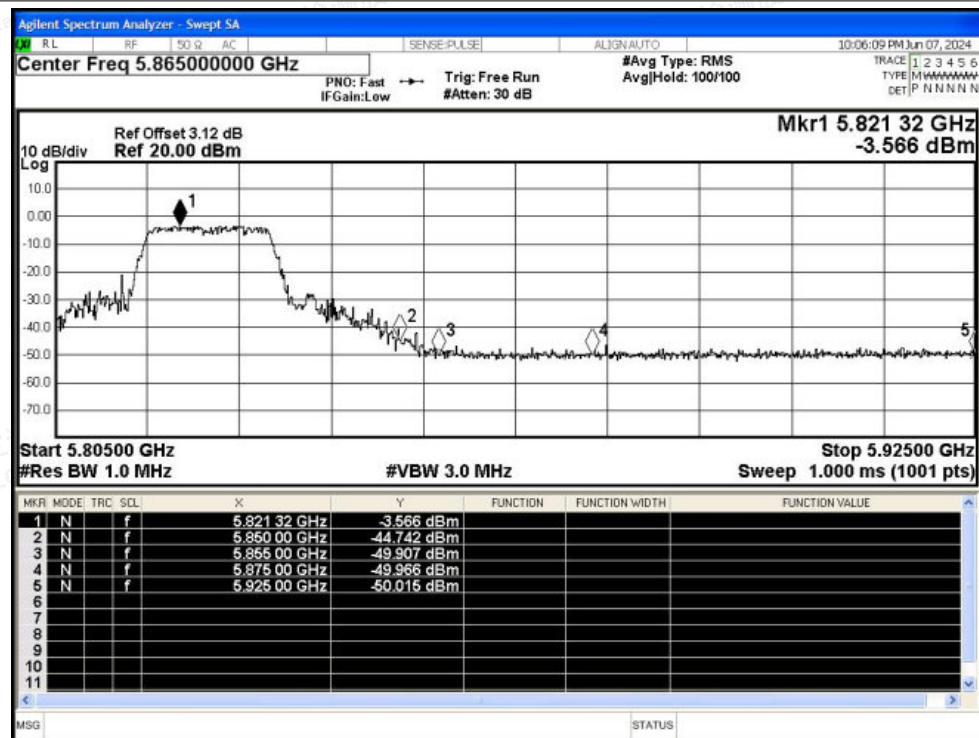

Restrict Band NVNT a 5825MHz Ant1 Average

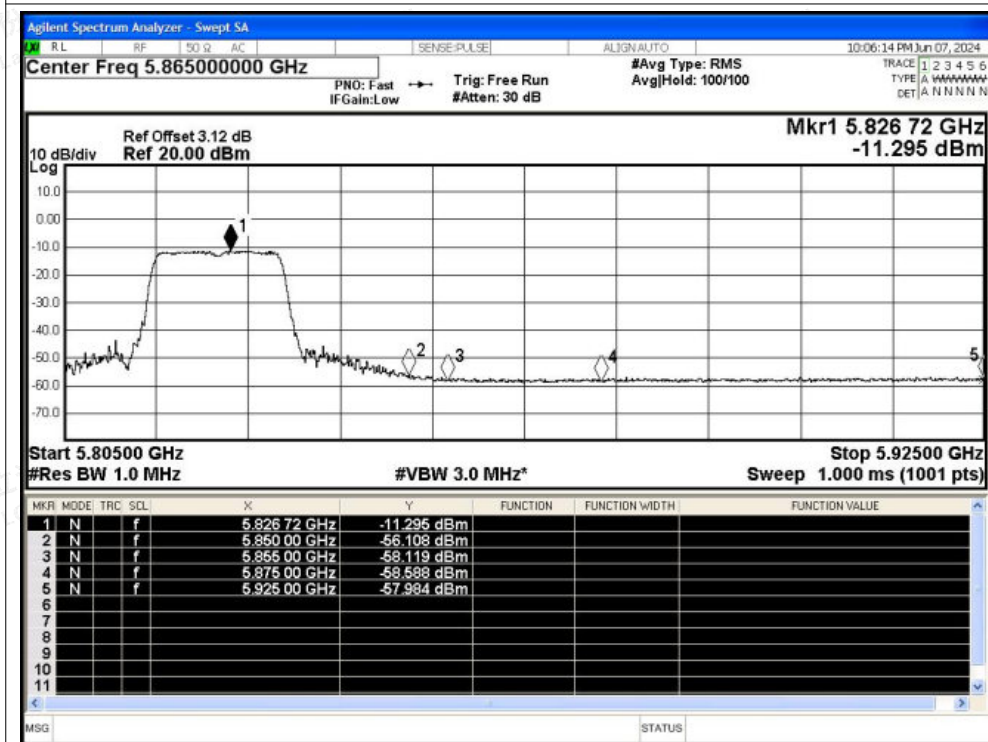

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n20 5745MHz Ant1 Peak



Restrict Band NVNT n20 5745MHz Ant1 Average

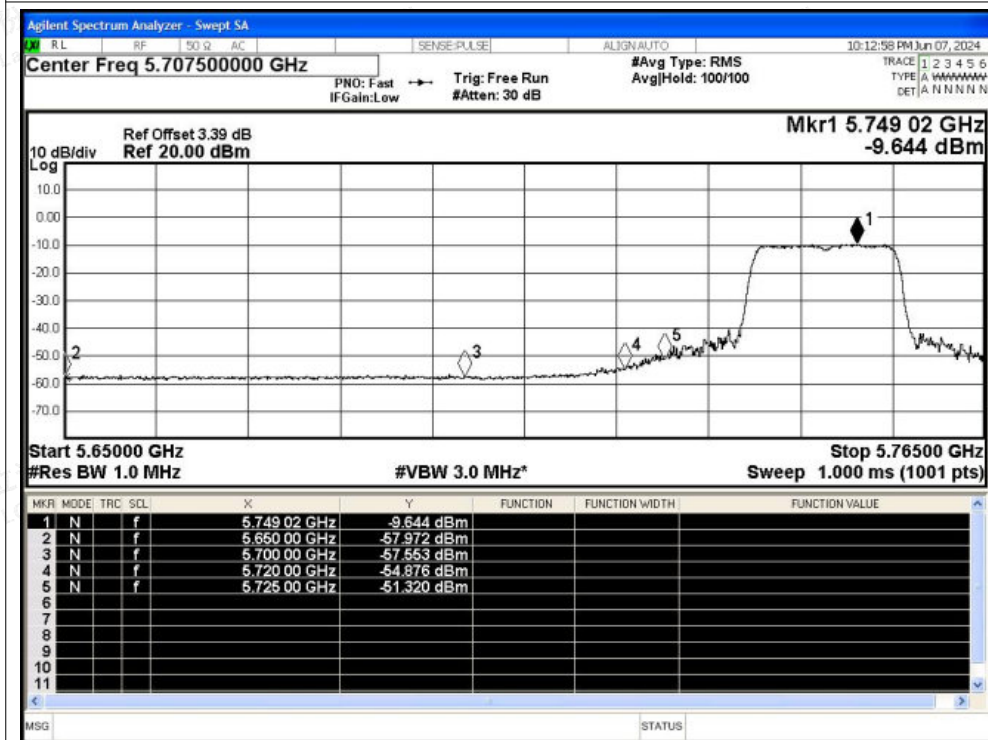

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n20 5825MHz Ant1 Peak



Restrict Band NVNT n20 5825MHz Ant1 Average

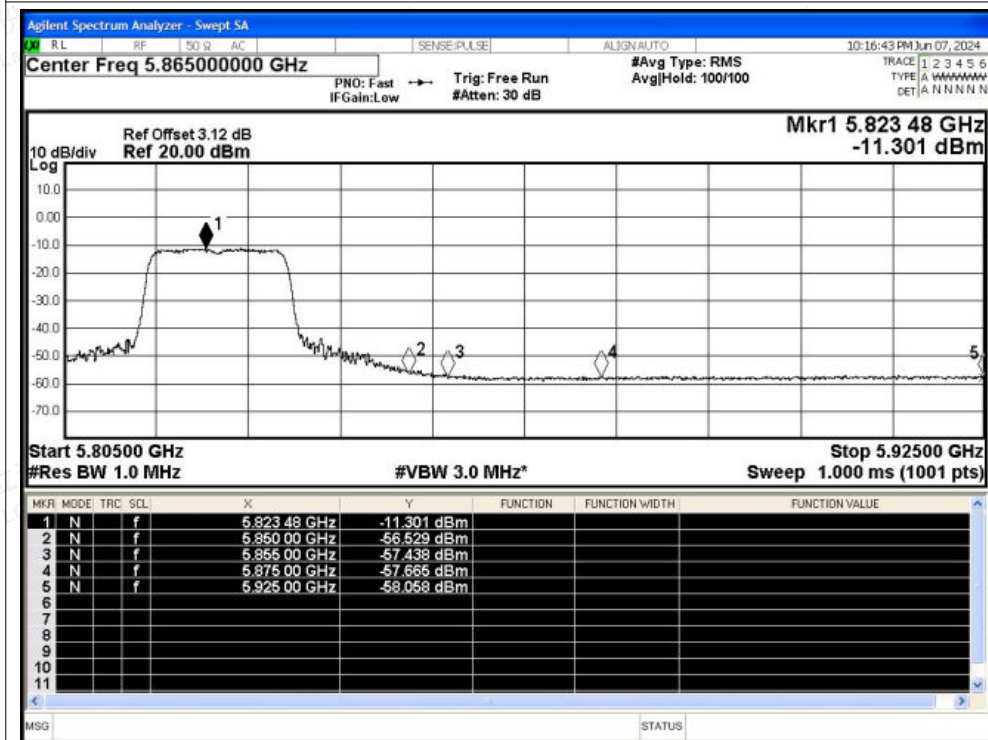

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac20 5745MHz Ant1 Peak

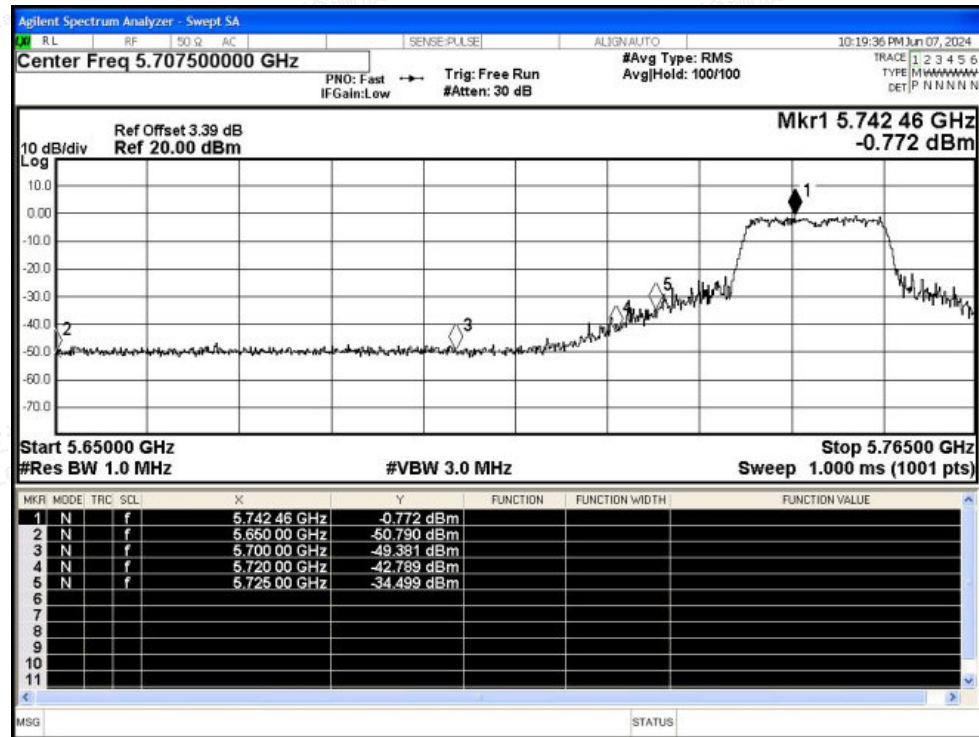

Restrict Band NVNT ac20 5745MHz Ant1 Average

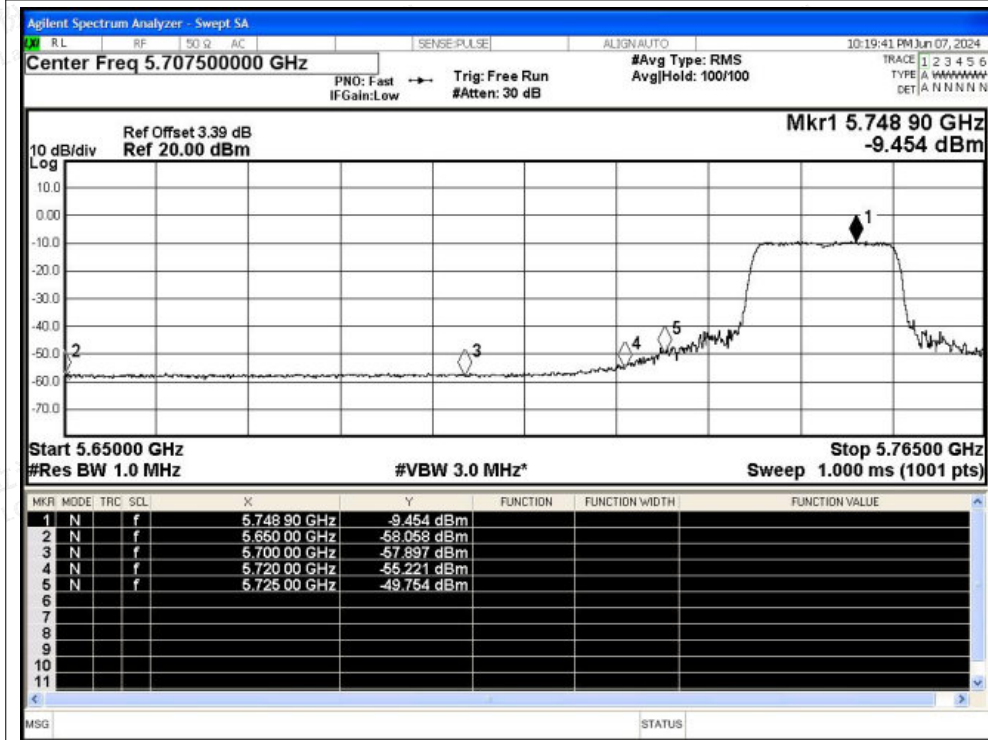

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac20 5825MHz Ant1 Peak

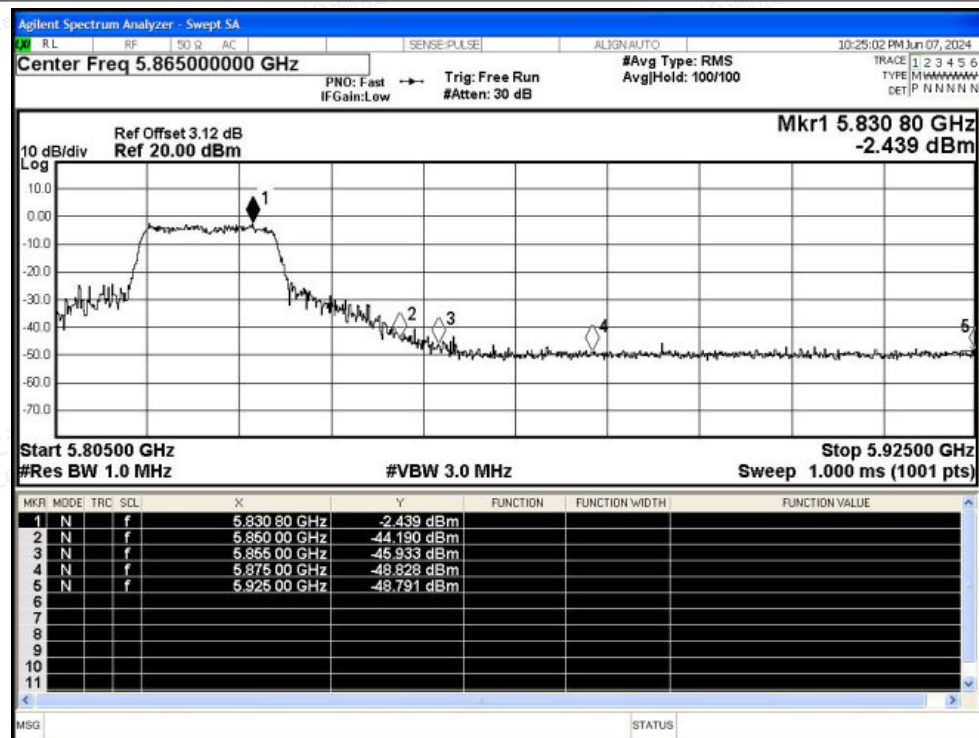

Restrict Band NVNT ac20 5825MHz Ant1 Average

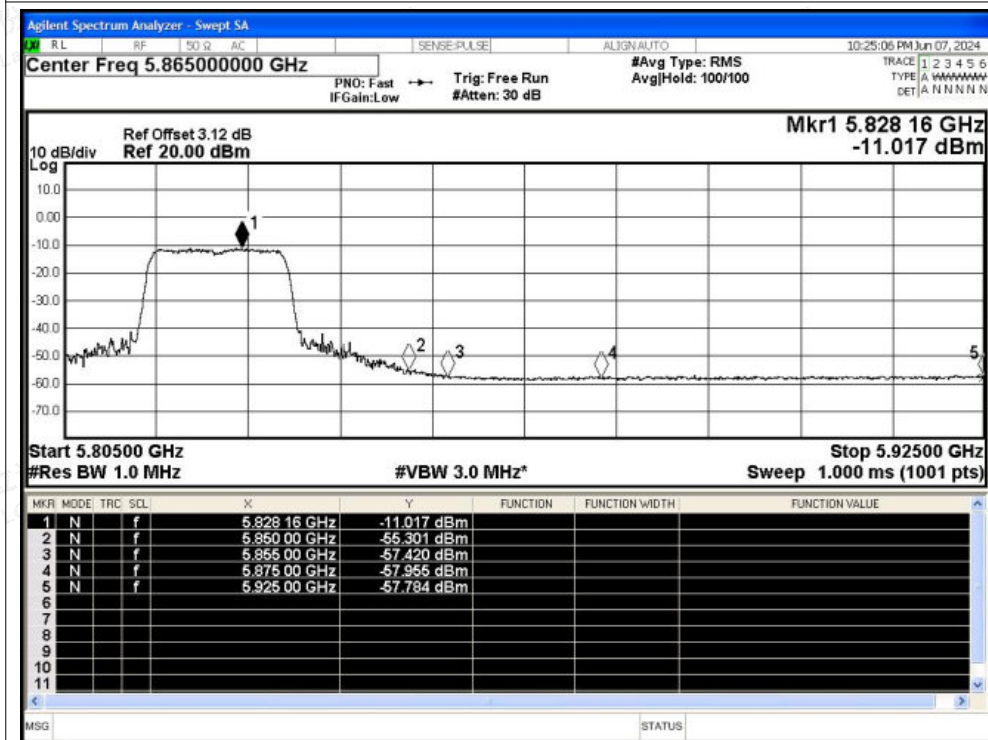

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5745	Ant1	5744.98	-20000	-3.48	25	Pass
NVNT	ac20	5785	Ant1	5785	0	0	25	Pass
NVNT	ac20	5825	Ant1	5824.98	-20000	-3.43	25	Pass






Test Graphs

Freq. Stability NVNT ac20 5745MHz Ant1

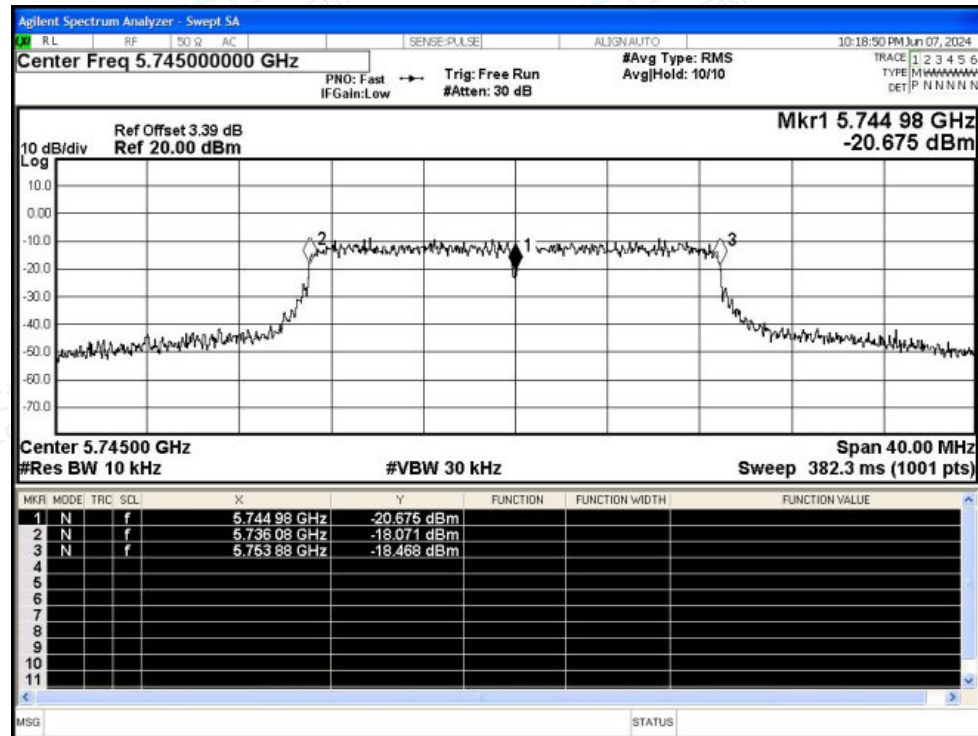

Freq. Stability NVNT ac20 5785MHz Ant1

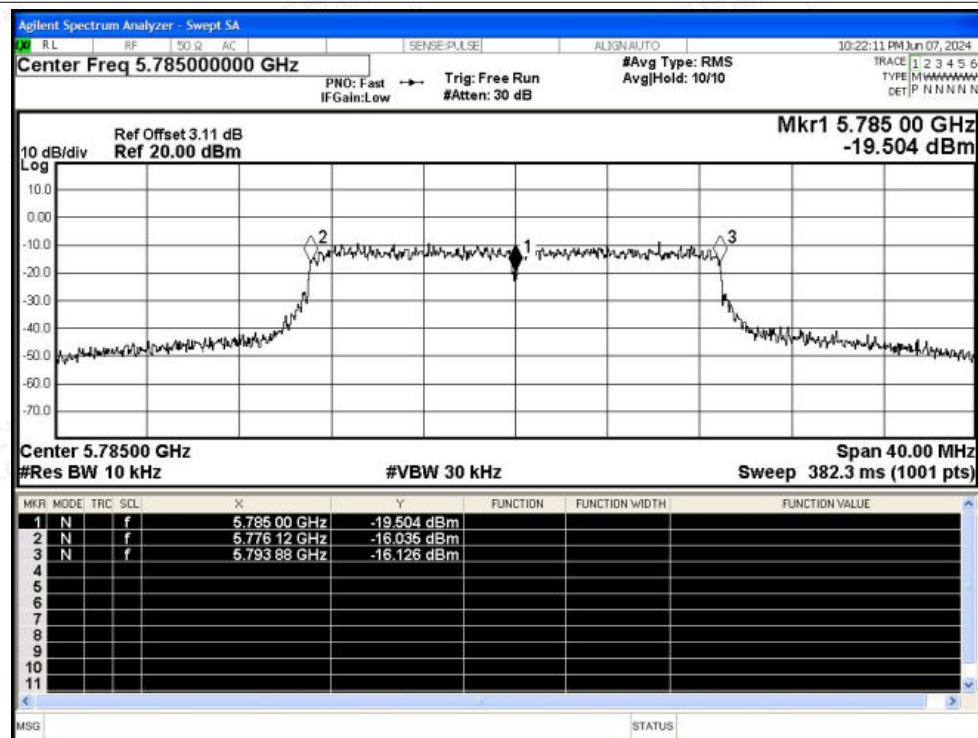


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

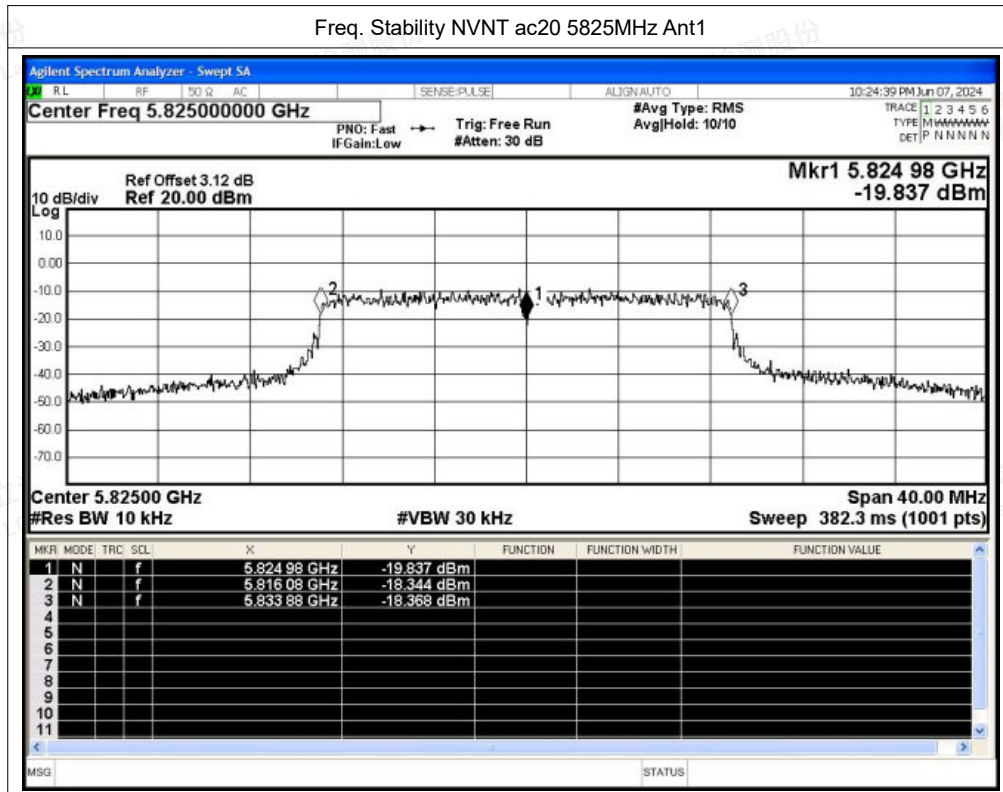

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	94.65	0.24	0.91
NVNT	a	5785	Ant1	94.56	0.24	0.91
NVNT	a	5825	Ant1	94.56	0.24	0.91
NVNT	n20	5745	Ant1	93.67	0.28	1.07
NVNT	n20	5785	Ant1	93.77	0.28	1.07
NVNT	n20	5825	Ant1	93.67	0.28	1.07
NVNT	ac20	5745	Ant1	93.82	0.28	1.06
NVNT	ac20	5785	Ant1	93.82	0.28	1.06
NVNT	ac20	5825	Ant1	93.72	0.28	1.06



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5745MHz Ant1

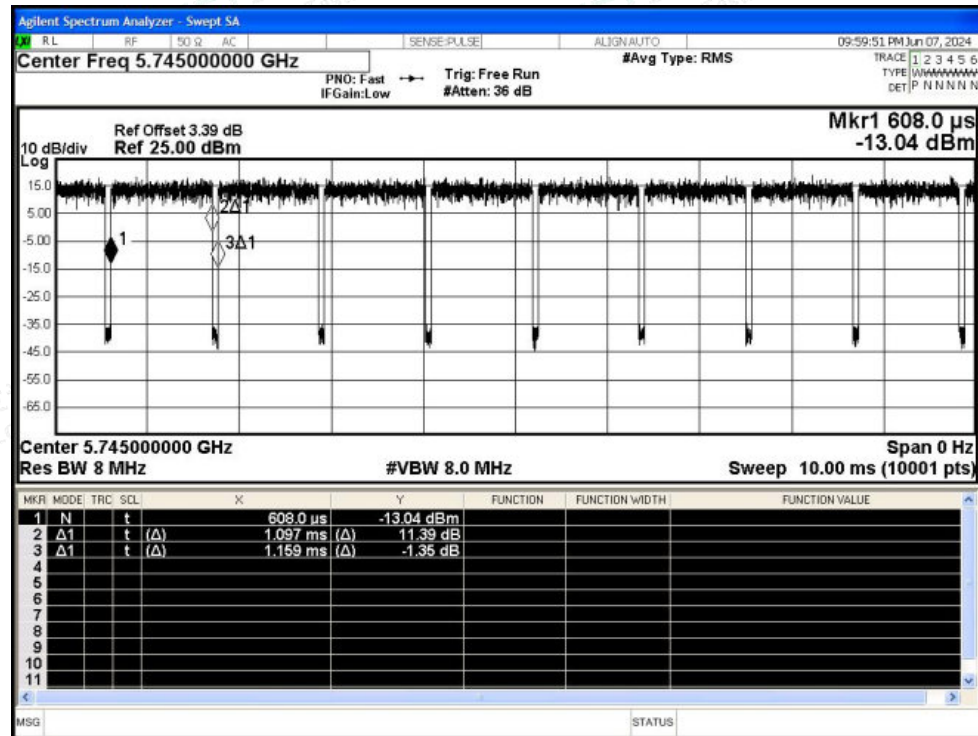

Duty Cycle NVNT a 5785MHz Ant1

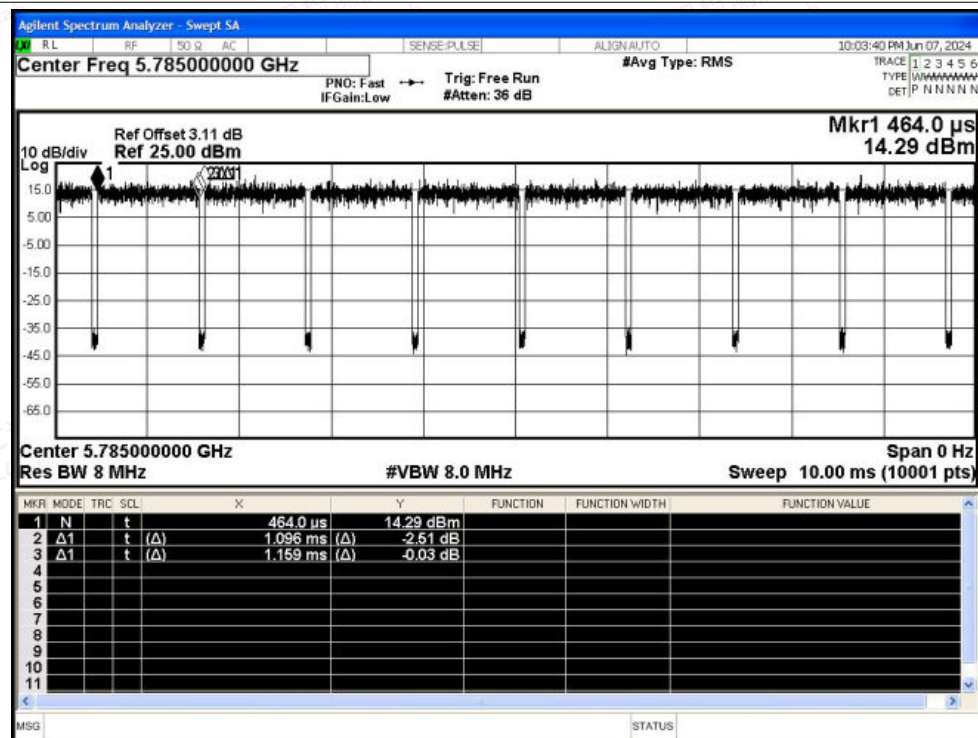

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT a 5825MHz Ant1

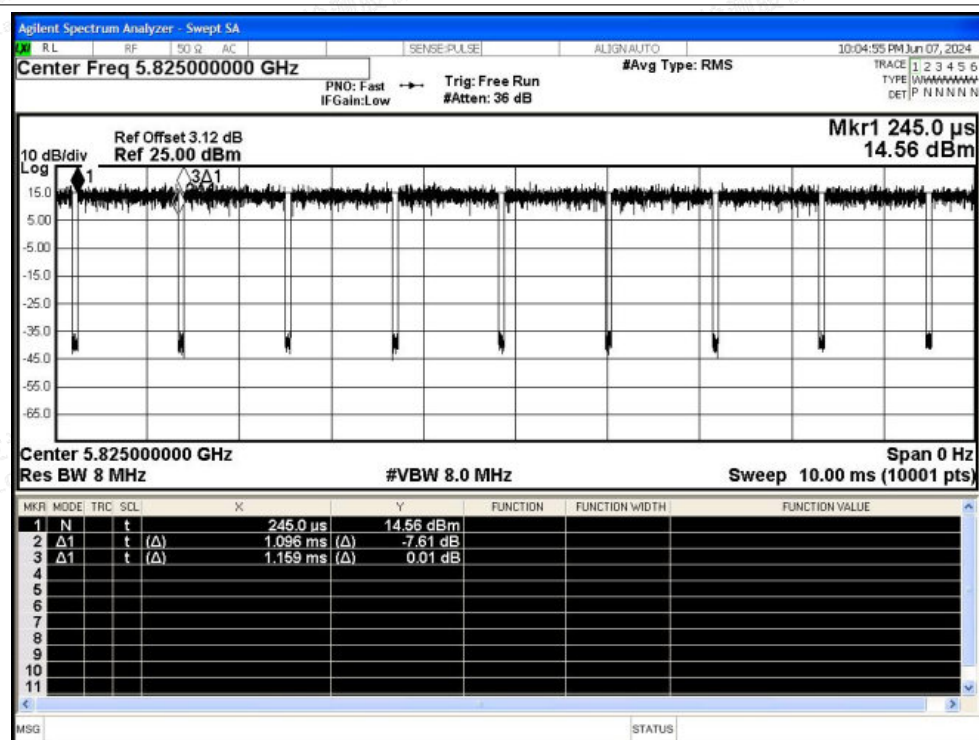

Duty Cycle NVNT n20 5745MHz Ant1

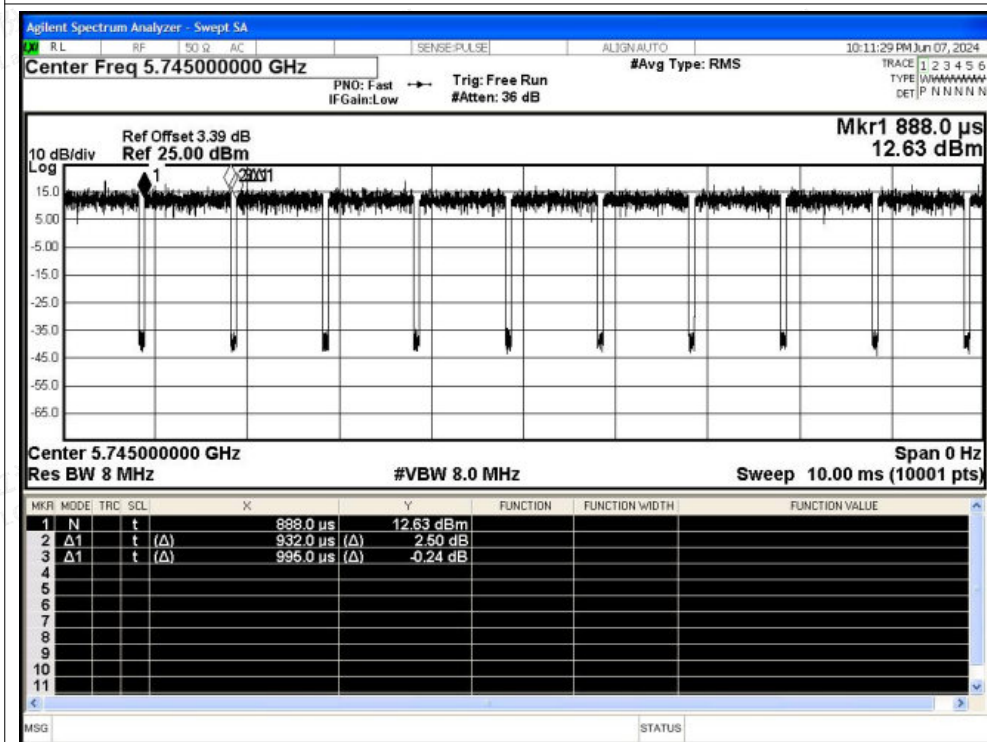

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT n20 5785MHz Ant1

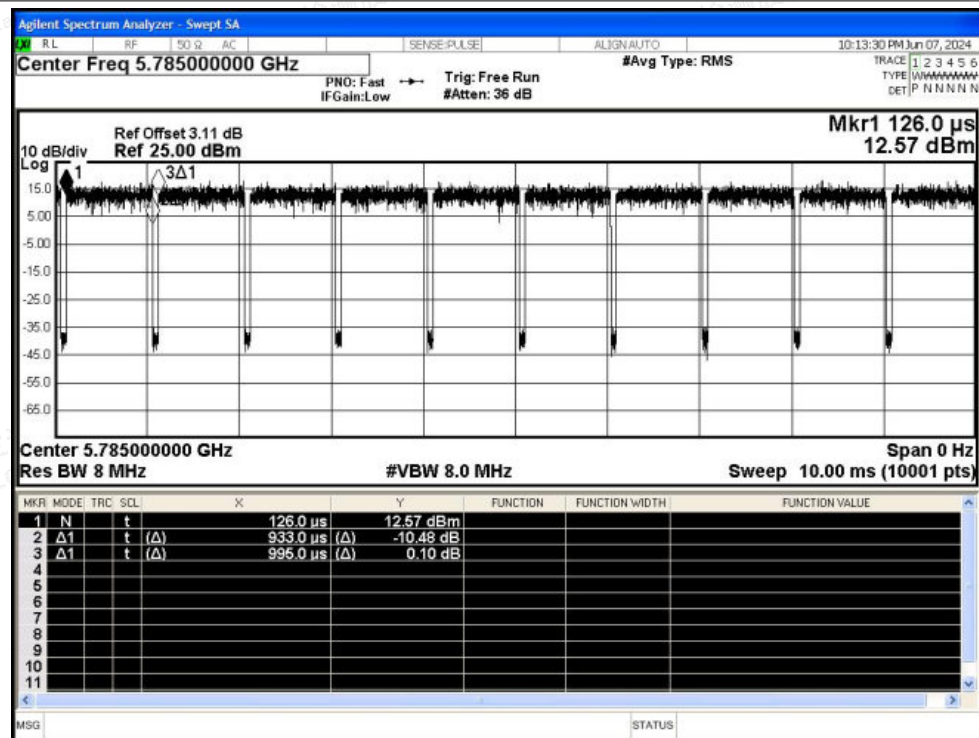

Duty Cycle NVNT n20 5825MHz Ant1

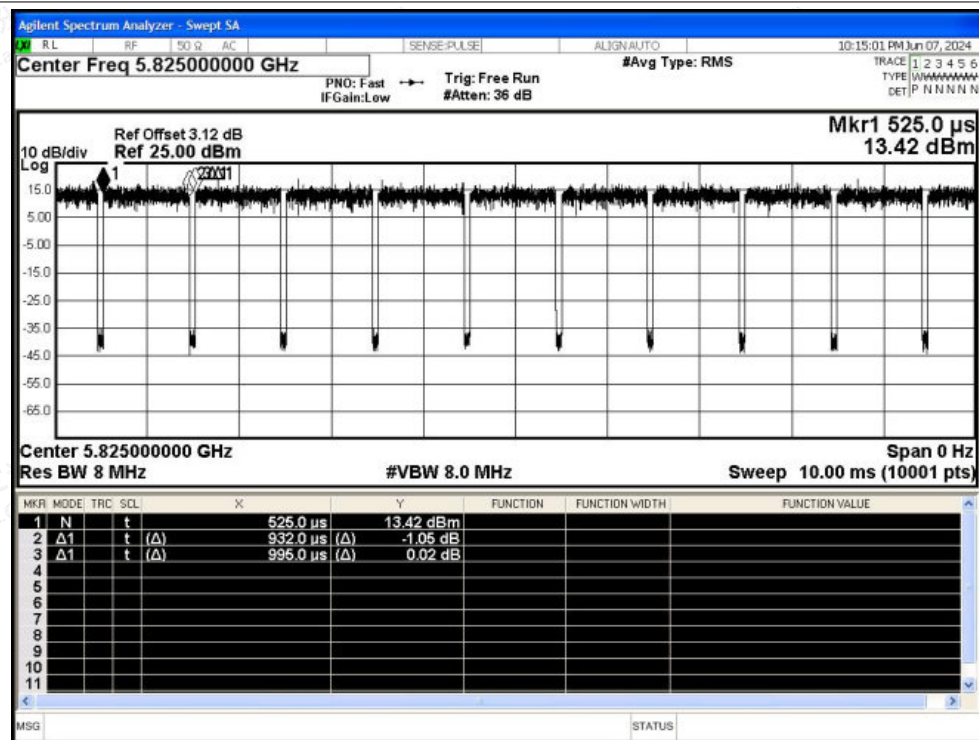

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac20 5745MHz Ant1

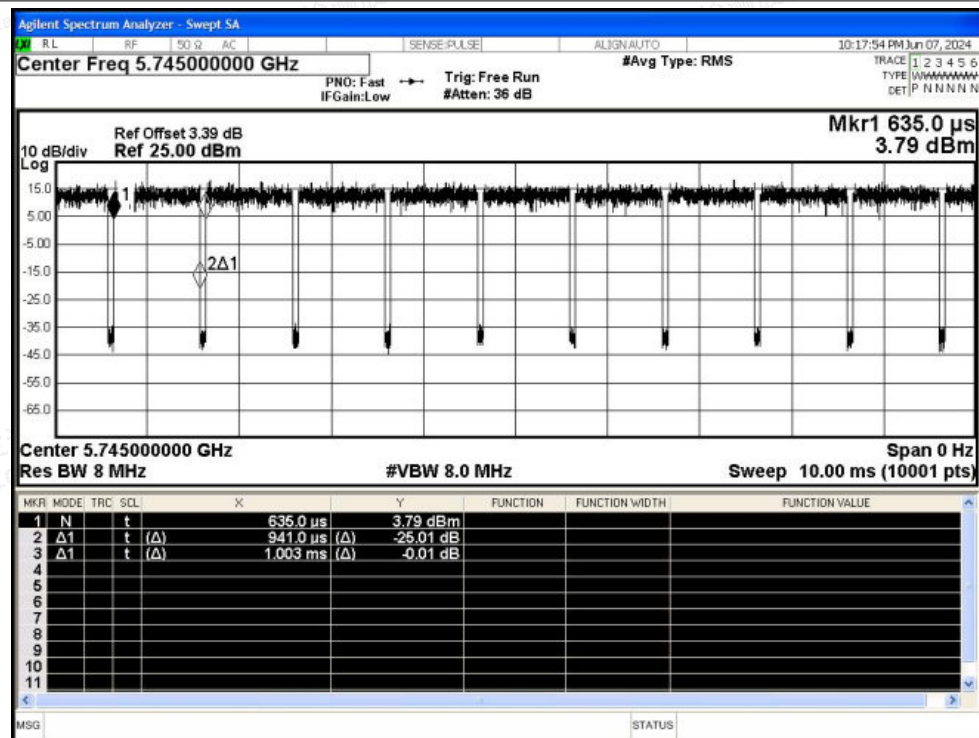

Duty Cycle NVNT ac20 5785MHz Ant1

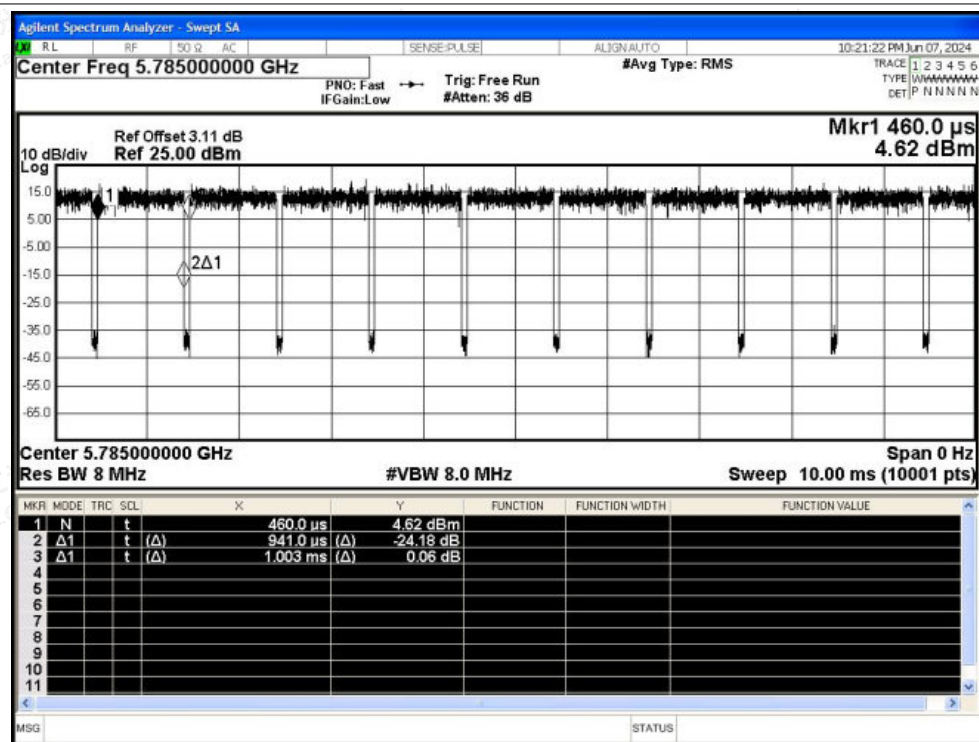

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

