



EUT	Wireless Bluetooth Audio Receiver	Model Name	MB10 HD
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
54.23	0.22	54.45	74	-19.55	peak
47.51	0.22	47.73	54	-6.27	AVG
42.82	2.64	45.46	74	-28.54	peak
36.36	2.64	39	54	-15	AVG
		104		8	0
	(dBµV) 54.23 47.51 42.82	(dBµV) (dB) 54.23 0.22 47.51 0.22 42.82 2.64	(dBμV) (dB) (dBμV/m) 54.23 0.22 54.45 47.51 0.22 47.73 42.82 2.64 45.46	(dBμV) (dB) (dBμV/m) (dBμV/m) 54.23 0.22 54.45 74 47.51 0.22 47.73 54 42.82 2.64 45.46 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 54.23 0.22 54.45 74 -19.55 47.51 0.22 47.73 54 -6.27 42.82 2.64 45.46 74 -28.54

EUT	Wireless Bluetooth Audio Receiver	Model Name	MB10 HD
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	52.16	0.22	52.38	74	-21.62	peak
4960.000	45.32	0.22	45.54	54	-8.46	AVG
7440.000	40.29	2.64	42.93	74	-31.07	peak
7440.000	33.56	2.64	36.2	54	-17.8	AVG
J			100	\mathcal{C}	8	
temark:				10	<i>-</i> C	
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

RESULT: PASS

Note:

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report. Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,




TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

EUT	Wireless Bluetooth Audio Receiver	Model Name	MB10 HD
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

PK



ΑV

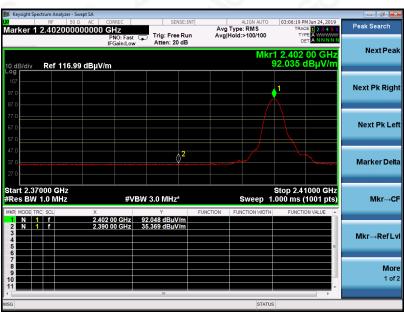


RESULT: PASS



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






EUT	Wireless Bluetooth Audio Receiver	Model Name	MB10 HD
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

PK



ΑV

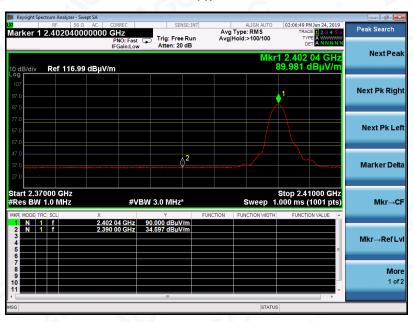


RESULT: PASS



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





EUT	Wireless Bluetooth Audio Receiver	Model Name	MB10 HD
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

PK



ΑV




RESULT: PASS



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





EUT	Wireless Bluetooth Audio Receiver	Model Name	MB10 HD
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

PK



ΑV



RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F. All test modes had been pre-tested. The GFSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com

E-mail:agc@agc-cert.com Service Hotline: 400 089 2118



11. NUMBER OF HOPPING FREQUENCY

11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3. VBW ≥ RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
- 4. Allow the trace to stabilize.

11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

11.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS



Note: The GFSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC00139190602FE03

Page 52 of 69

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Zero span, centered on a hopping channel.
- 2. RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- 4. Detector function: Peak. Trace: Max hold.
- 5. Use the marker-delta function to determine the transmit time per hop.
- 6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) \times (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

12.4. LIMITS AND MEASUREMENT RESULT

Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)
Low	2.878	27*4	310.82	400
Middle	2.877	27*4	310.72	400
High	2.879	26*4	299.42	400

Note: The 8-DPSK modulation is the worst case and recorded in the report.




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF LOW CHANNEL

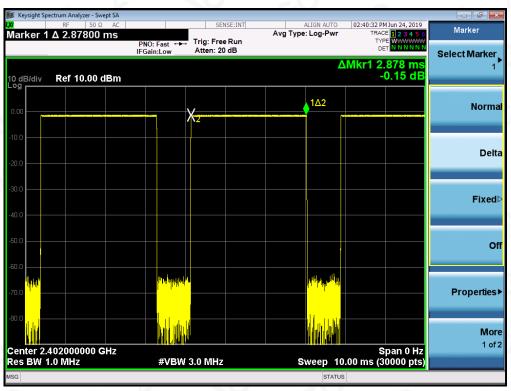

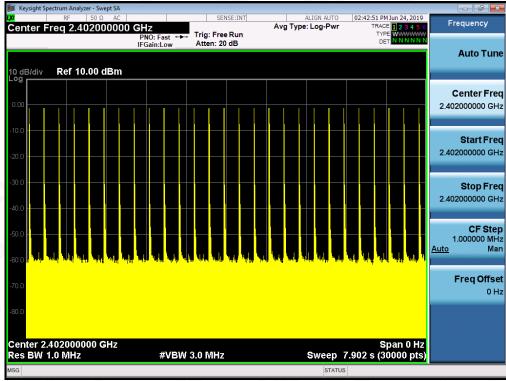





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



TEST PLOT OF MIDDLE CHANNEL

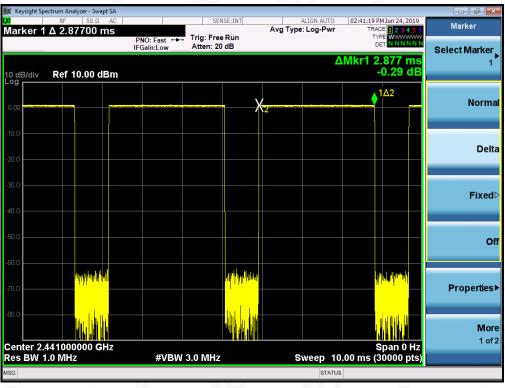

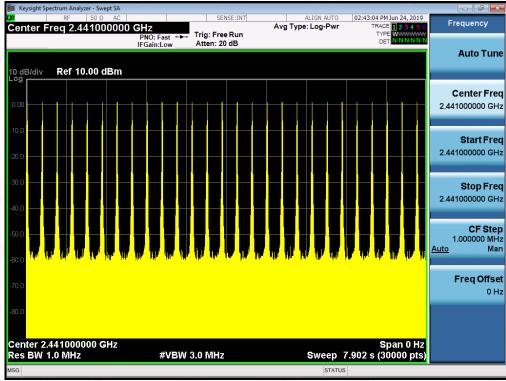





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



TEST PLOT OF HIGH CHANNEL

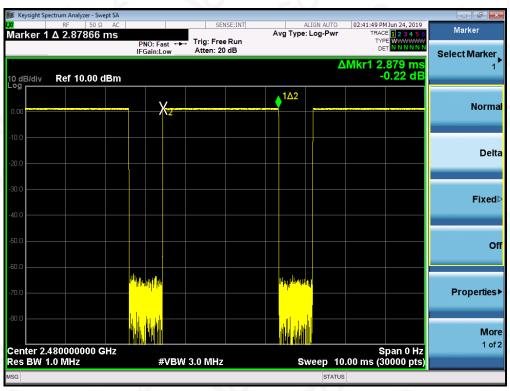

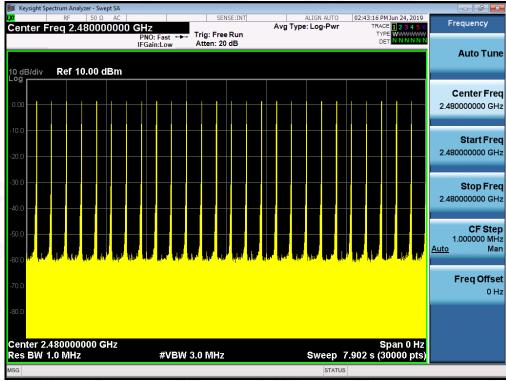



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



13. FREQUENCY SEPARATION

13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) ≥ RBW.
- 4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

13.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	Dana
CH01-CH02	1001	>=25 KHz or 2/3 20 dB BW	Pass

TEST PLOT FOR FREQUENCY SEPARATION




Note: The 8-DPSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

 $Add:\ 2/F., Building\ 2, No.1-4, Chaxi\ Sanwei\ Technial\ Industrial\ Park, Gushu,$

Xixiang, Bao'an District, Shenzhen, Guangdong, China





14. FCC LINE CONDUCTED EMISSION TEST


14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum R	F Line Voltage
Frequency	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

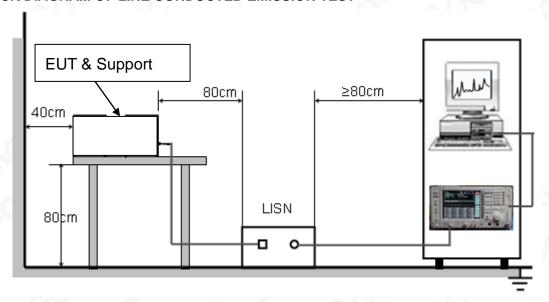





Report No.: AGC00139190602FE03

Page 58 of 69

14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,


Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118



14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

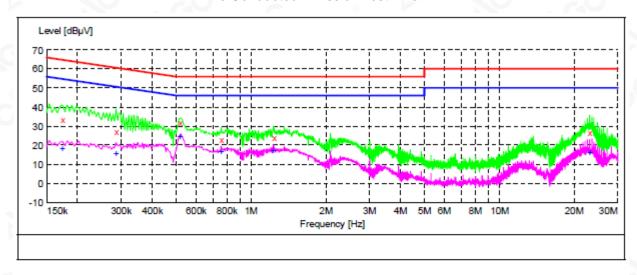

MEASUREMENT RESULT: "TEST fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.174000	33.80	10.9	65	31.0	QP	L1	FLO
0.286000	27.00	10.9	61	33.6	QP	L1	FLO
0.518000	31.90	11.1	56	24.1	QP	L1	FLO
0.758000	23.30	10.6	56	32.7	QP	L1	FLO
1.234000	24.10	11.5	56	31.9	QP	L1	FLO
23.138000	26.40	12.6	60	33.6	QP	L1	FLO

MEASUREMENT RESULT: "TEST fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.174000	18.10	10.9	55	36.7	AV	L1	FLO
0.286000	15.90	10.9	51	34.7	AV	L1	FLO
0.518000	24.80	11.1	46	21.2	AV	L1	FLO
0.758000	16.60	10.6	46	29.4	AV	L1	FLO
1.230000	17.00	11.5	46	29.0	AV	L1	FLO
23.138000	16.10	12.6	50	33.9	AV	L1	FLO




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Line Conducted Emission Test Line 2-N

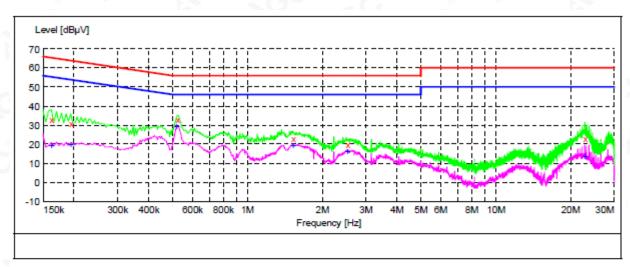

MEASUREMENT RESULT: "TEST fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.162000	33.10	10.8	65	32.3	QP	N	FLO
0.194000	31.10	10.9	64	32.8	QP	N	FLO
0.522000	33.10	11.1	56	22.9	QP	N	FLO
1.526000	23.00	11.5	56	33.0	QP	N	FLO
2.518000	19.70	11.5	56	36.3	QP	N	FLO
22.810000	23.00	12.6	60	37.0	QP	N	FLO

MEASUREMENT RESULT: "TEST fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.162000	19.40	10.8	55	36.0	AV	N	FLO
0.194000	19.90	10.9	54	34.0	AV	N	FLO
0.518000	29.20	11.1	46	16.8	AV	N	FLO
1.526000	19.10	11.5	46	26.9	AV	N	FLO
2.518000	16.30	11.5	46	29.7	AV	N	FLO
22.810000	13.70	12.6	50	36.3	AV	N	FLO

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHZ

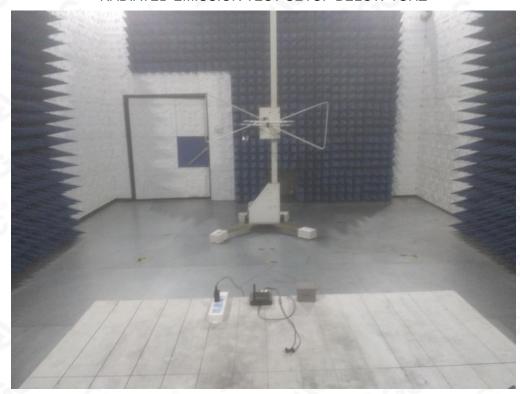


RADIATED EMISSION TEST SETUP ABOVE 1GHZ

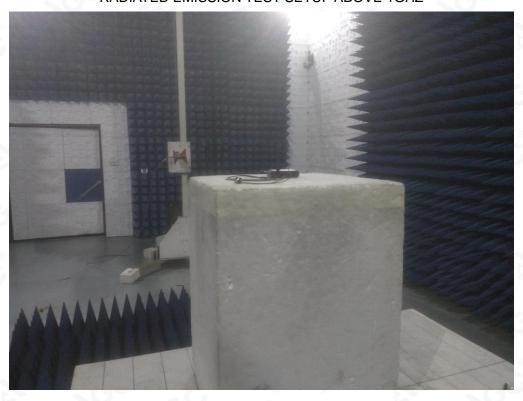



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






CONDUCTED EMISSION TEST SETUP





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$





APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



FRONT VIEW OF EUT



BACK VIEW OF EUT

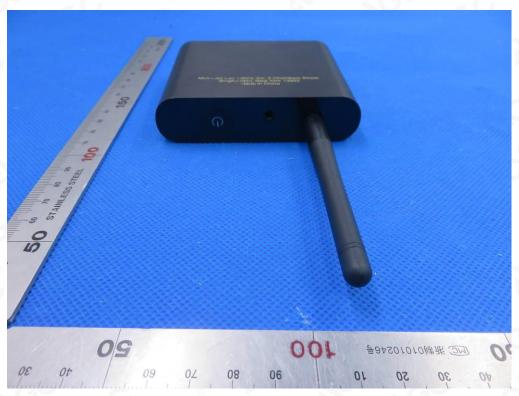





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



LEFT VIEW OF EUT

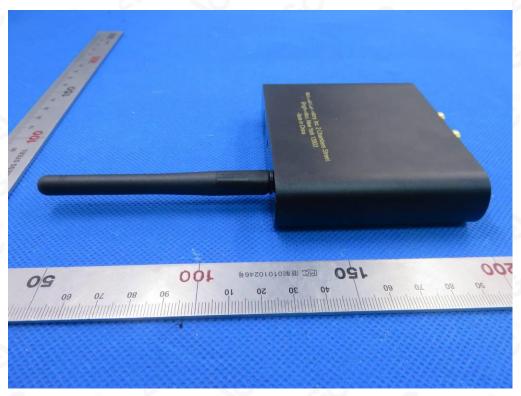


RIGHT VIEW OF EUT

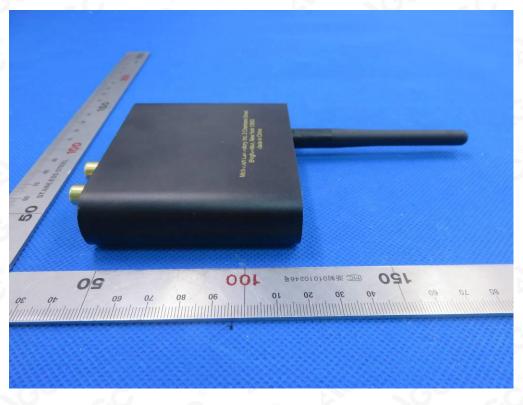



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





VIEW OF EUT-1(PORT)



VIEW OF EUT-2(PORT)







 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



OPEN VIEW OF EUT-1

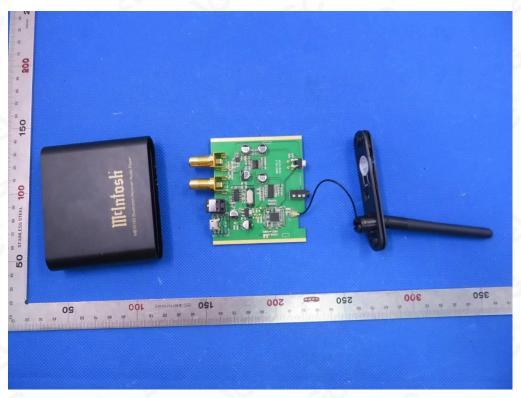

OPEN VIEW OF EUT-2

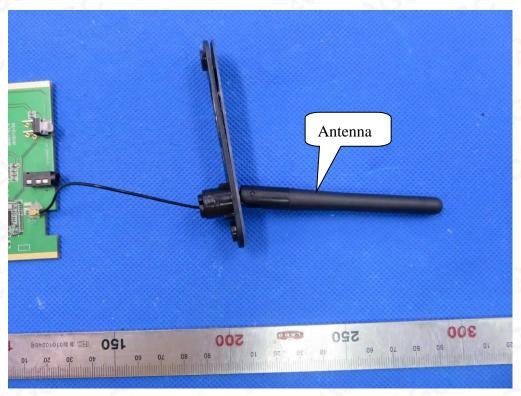





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



INTERNAL VIEW OF EUT-1

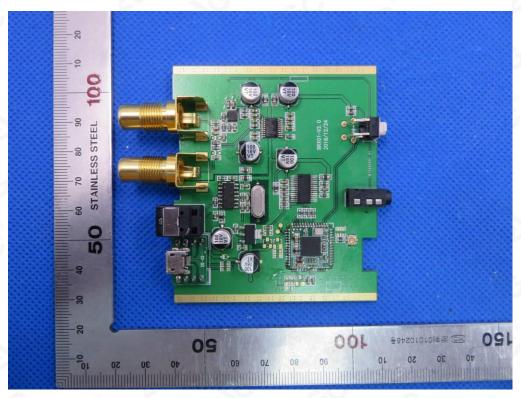

INTERNAL VIEW OF EUT-2

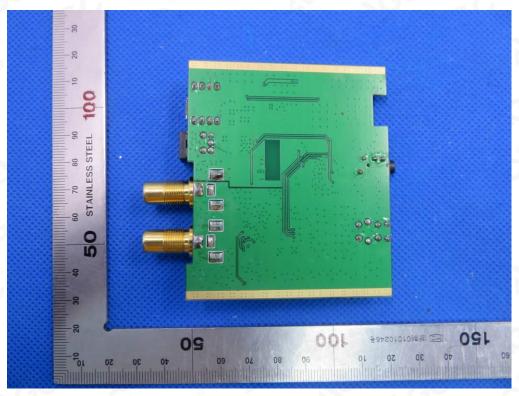




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



INTERNAL VIEW OF EUT-3

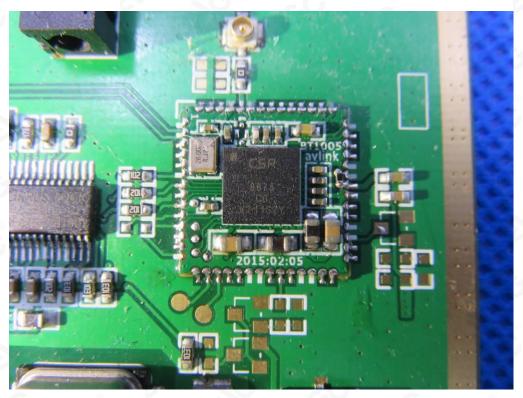

END OF REPORT----



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$