



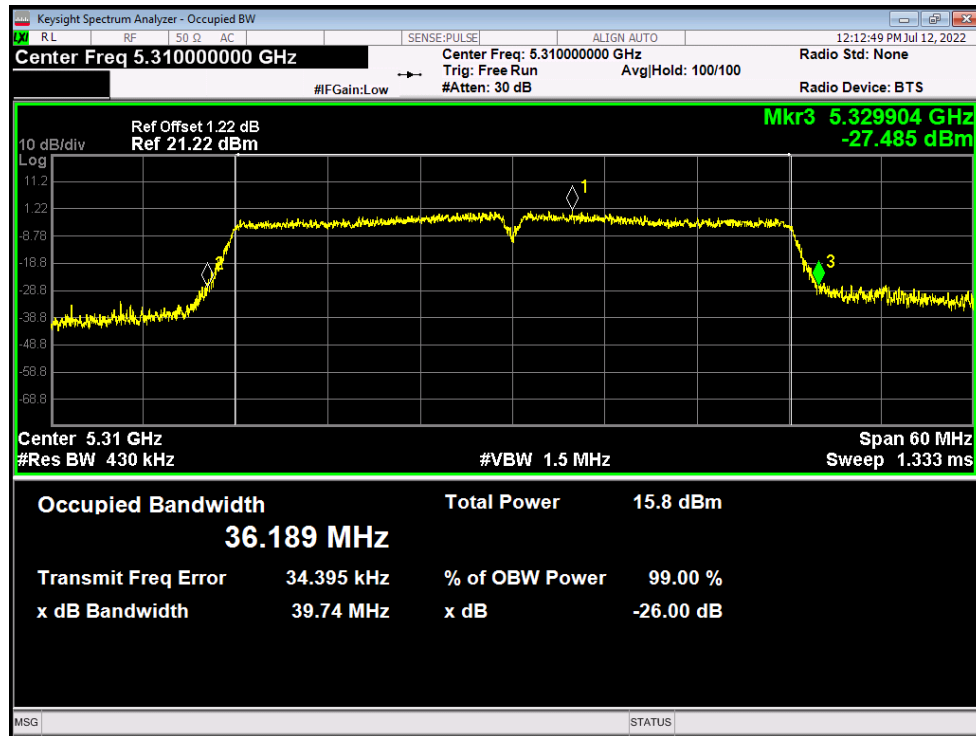


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5260	Ant1	16.605
NVNT	a	5280	Ant1	16.595
NVNT	a	5320	Ant1	16.579
NVNT	ac20	5260	Ant1	17.733
NVNT	ac20	5280	Ant1	17.725
NVNT	ac20	5320	Ant1	17.751
NVNT	ac40	5270	Ant1	36.256
NVNT	ac40	5310	Ant1	36.204
NVNT	ac80	5290	Ant1	75.389
NVNT	n20	5260	Ant1	17.769
NVNT	n20	5280	Ant1	17.746
NVNT	n20	5320	Ant1	17.727
NVNT	n40	5270	Ant1	36.211
NVNT	n40	5310	Ant1	36.205


OBW NVNT a 5260MHz Ant1

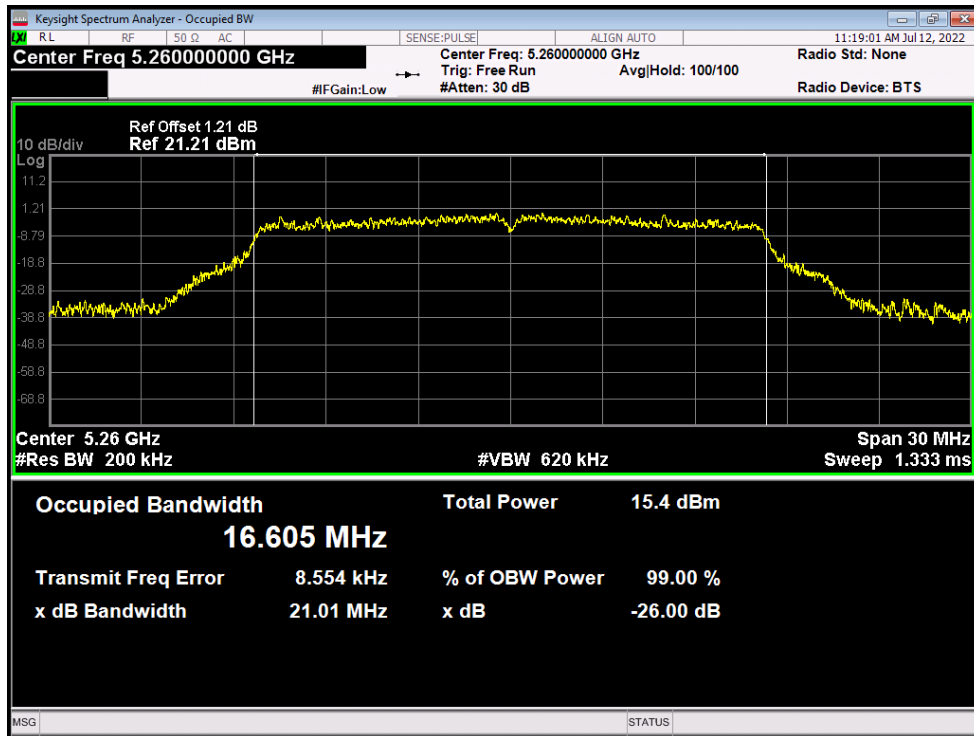


OBW NVNT a 5280MHz Ant1

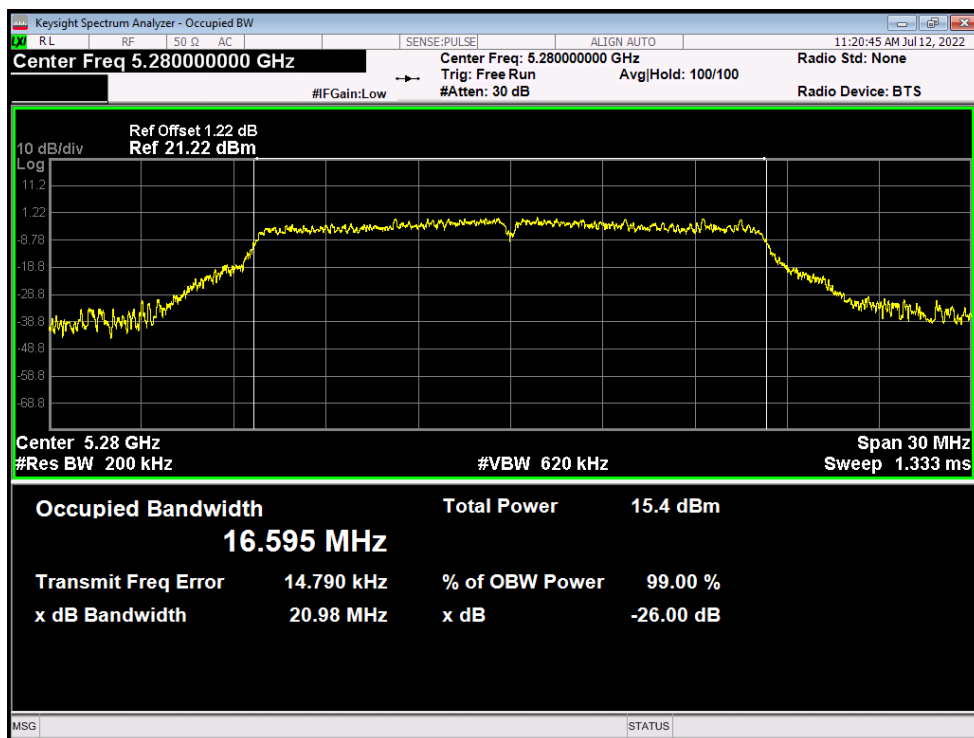


OBW NVNT a 5320MHz Ant1

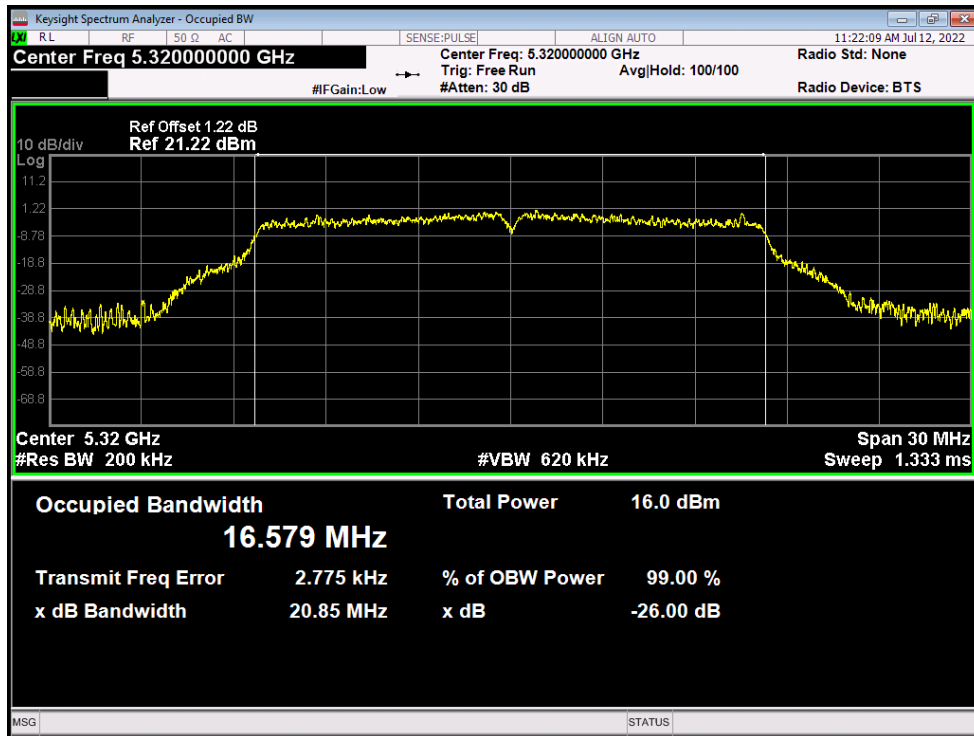


OBW NVNT ac20 5260MHz Ant1

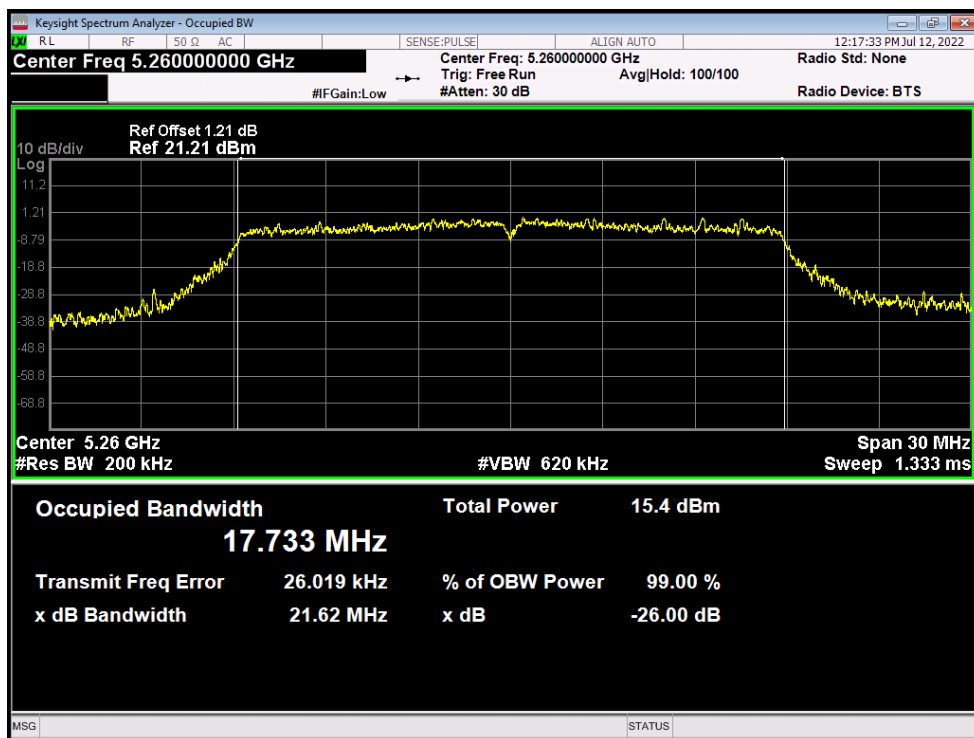


OBW NVNT ac20 5280MHz Ant1

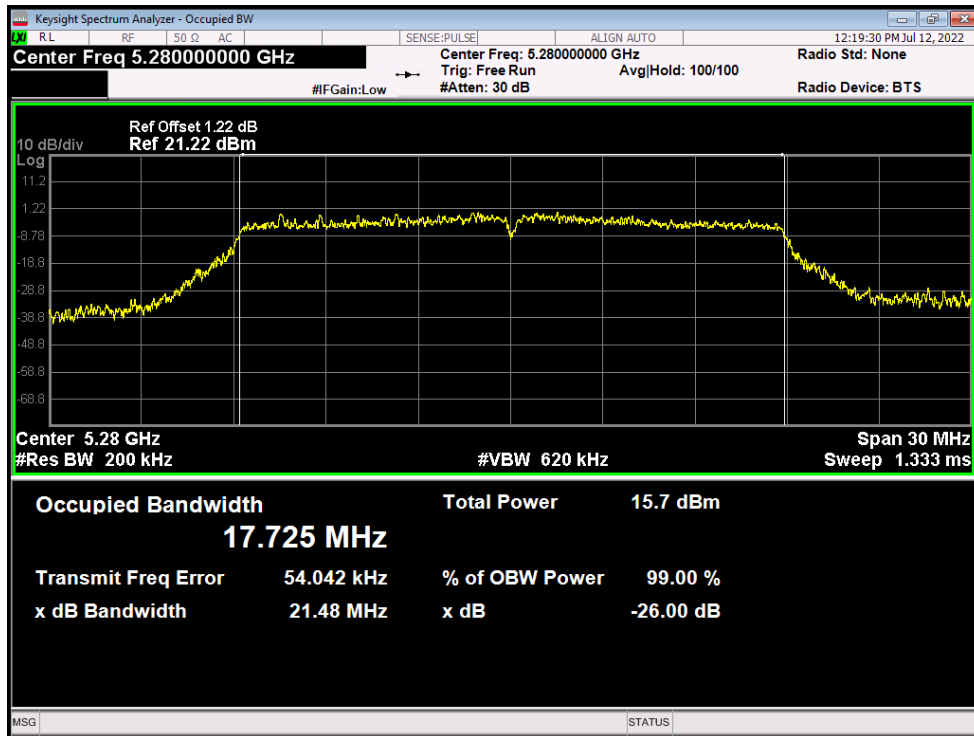


OBW NVNT ac20 5320MHz Ant1

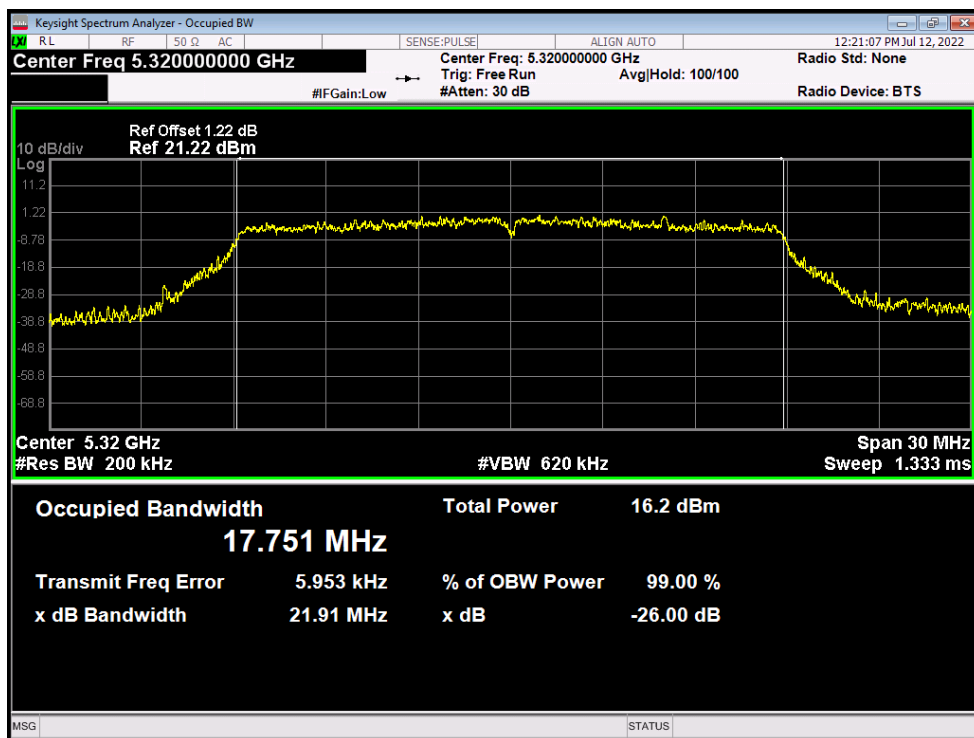


OBW NVNT ac40 5270MHz Ant1

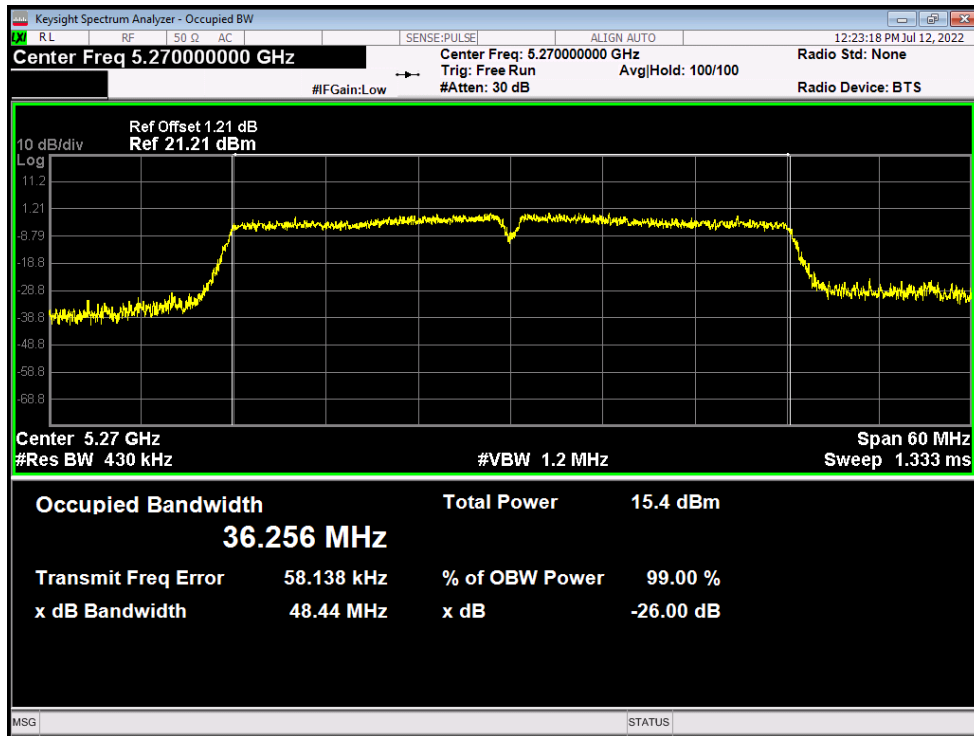


OBW NVNT ac40 5310MHz Ant1

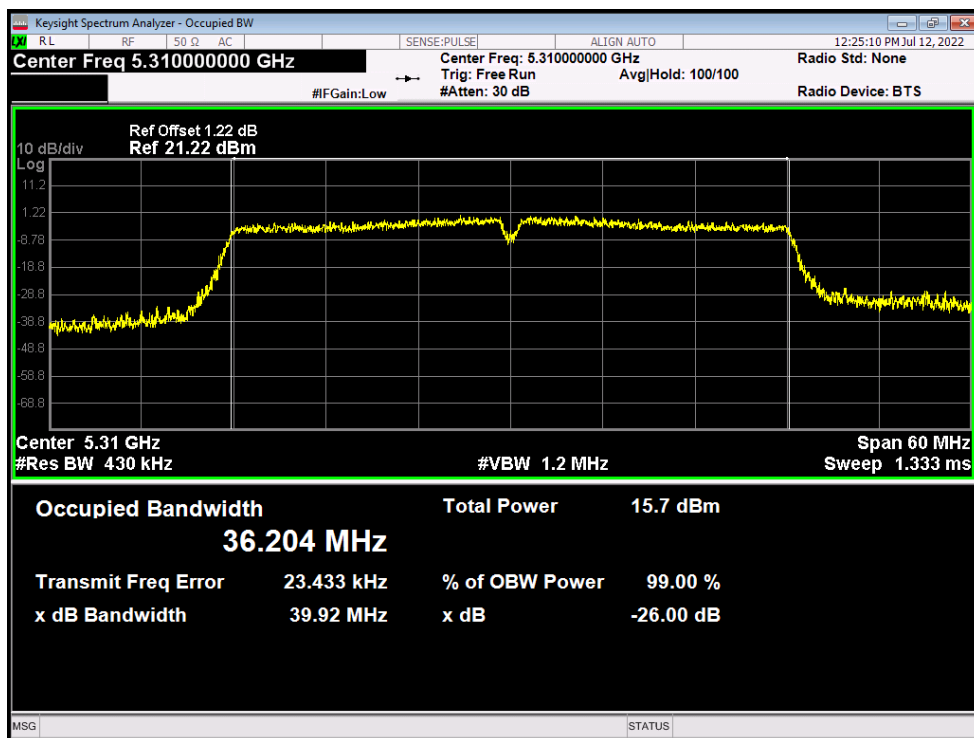


OBW NVNT ac80 5290MHz Ant1

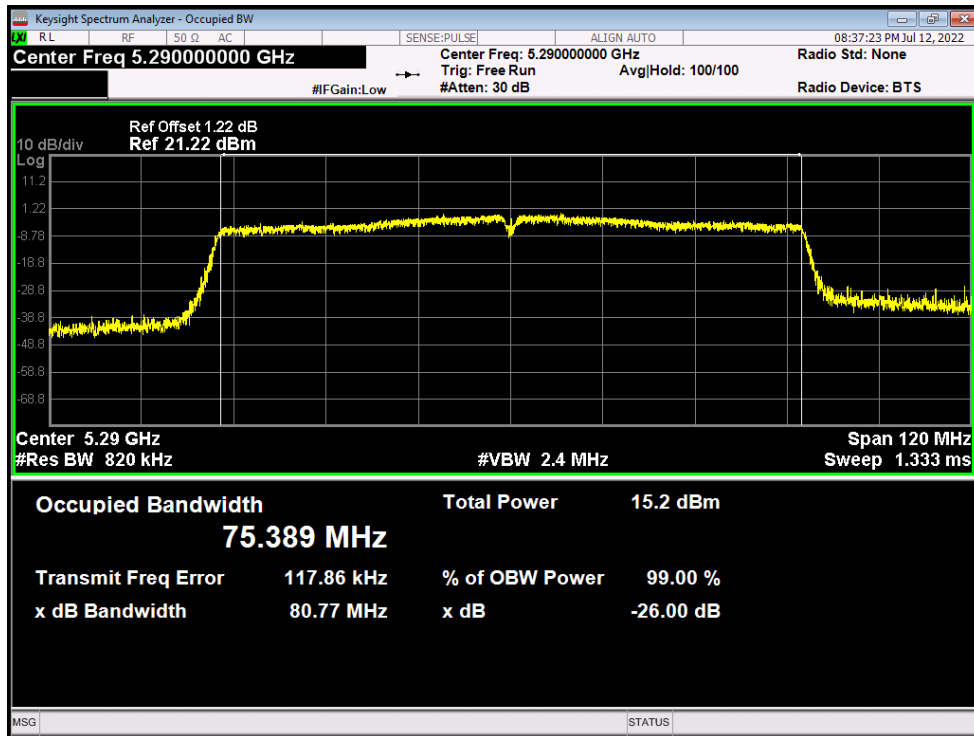


OBW NVNT n20 5260MHz Ant1

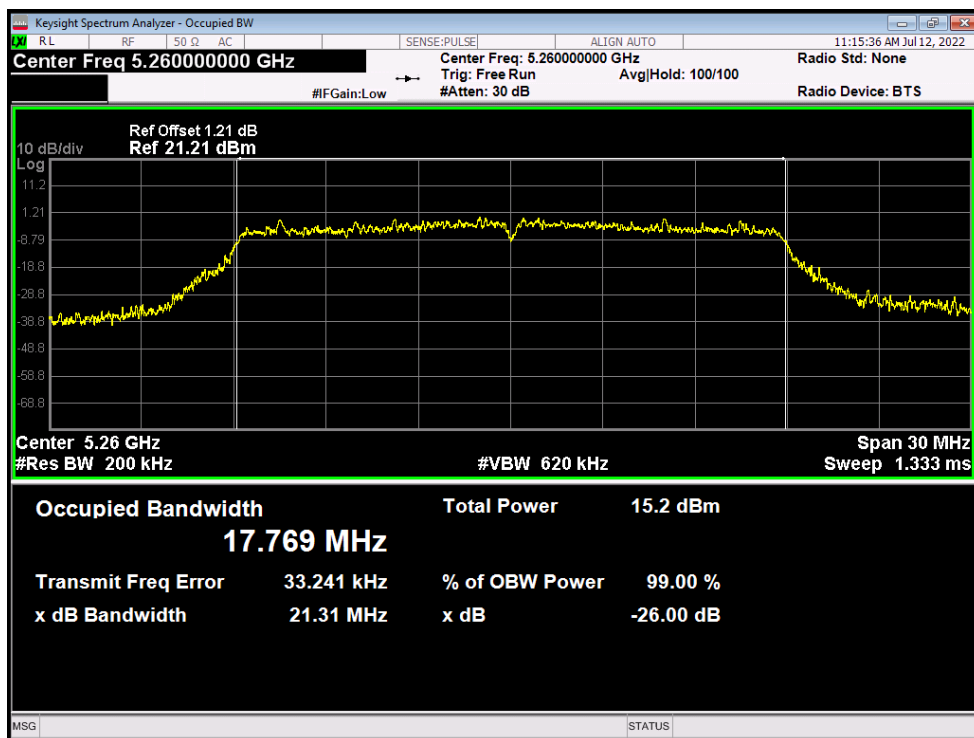


OBW NVNT n20 5280MHz Ant1

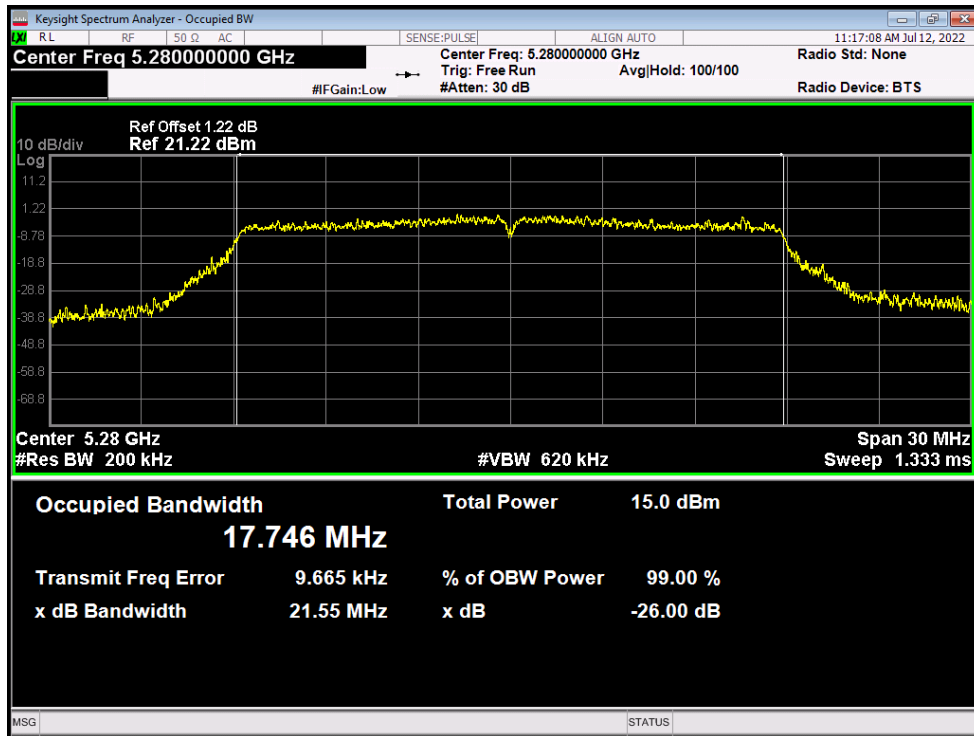


OBW NVNT n20 5320MHz Ant1

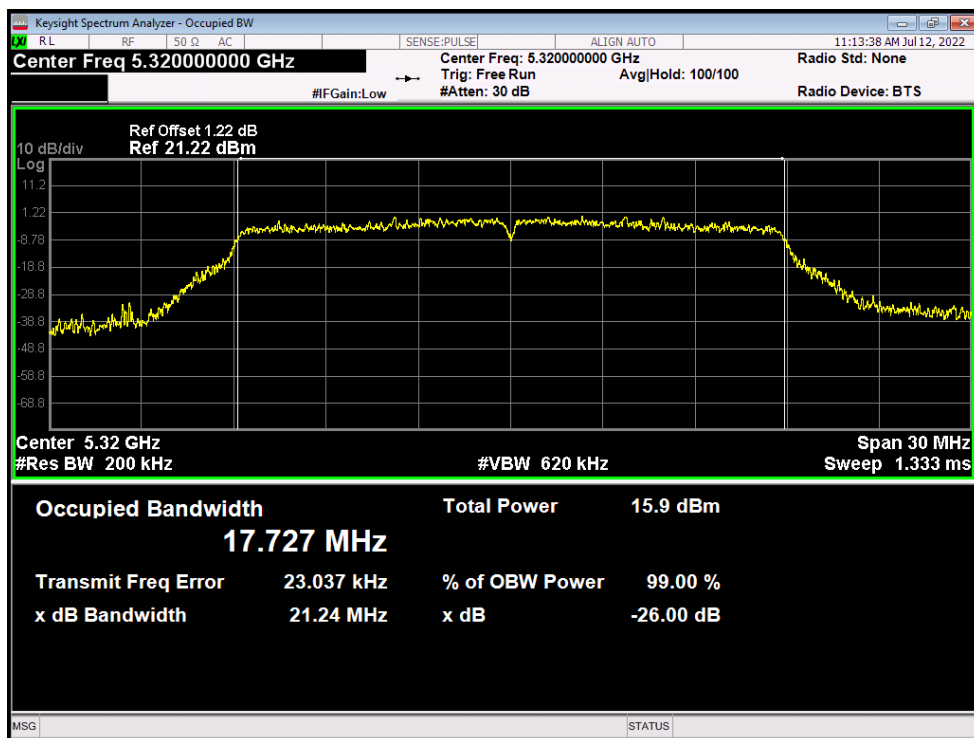

OBW NVNT n40 5270MHz Ant1

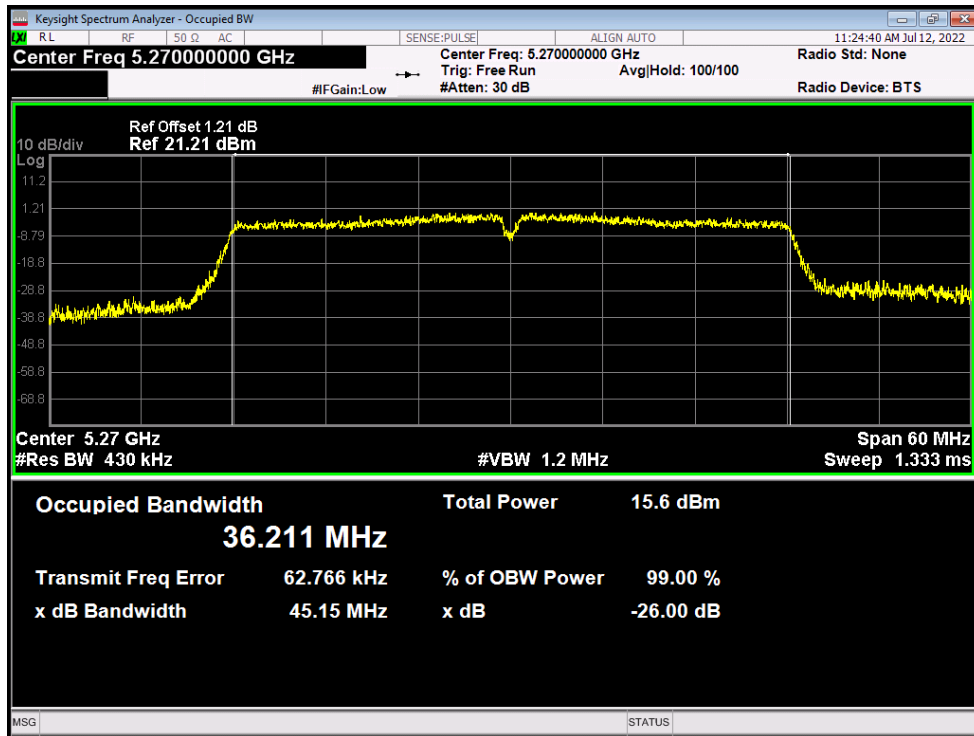


OBW NVNT n40 5310MHz Ant1

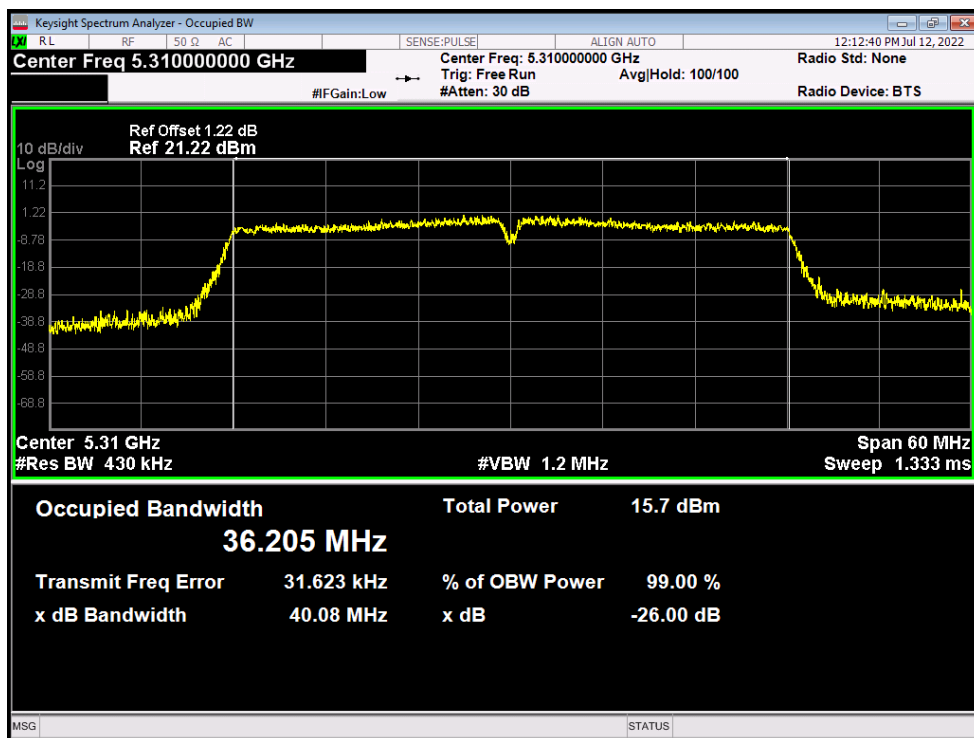


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	0.037	0.1	0.137	11	Pass
NVNT	a	5280	Ant1	0.129	0.1	0.229	11	Pass
NVNT	a	5320	Ant1	0.94	0.09	1.03	11	Pass
NVNT	ac20	5260	Ant1	0.16	0.1	0.26	11	Pass
NVNT	ac20	5280	Ant1	0.31	0.11	0.42	11	Pass
NVNT	ac20	5320	Ant1	0.774	0.1	0.874	11	Pass
NVNT	ac40	5270	Ant1	-2.99	0.19	-2.8	11	Pass
NVNT	ac40	5310	Ant1	-2.848	0.19	-2.658	11	Pass
NVNT	ac80	5290	Ant1	-6.894	0.39	-6.504	11	Pass
NVNT	n20	5260	Ant1	-0.083	0.1	0.017	11	Pass
NVNT	n20	5280	Ant1	-0.494	0.1	-0.394	11	Pass
NVNT	n20	5320	Ant1	0.418	0.1	0.518	11	Pass
NVNT	n40	5270	Ant1	-3.429	0.2	-3.229	11	Pass
NVNT	n40	5310	Ant1	-3.154	0.2	-2.954	11	Pass


PSD NVNT a 5260MHz Ant1

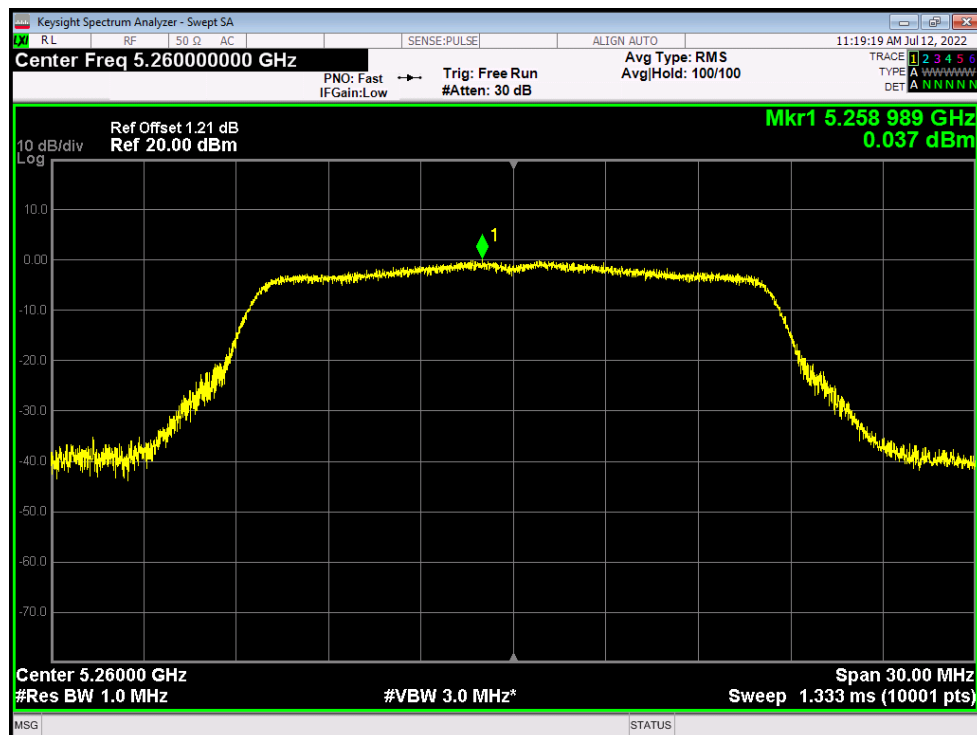


PSD NVNT a 5280MHz Ant1

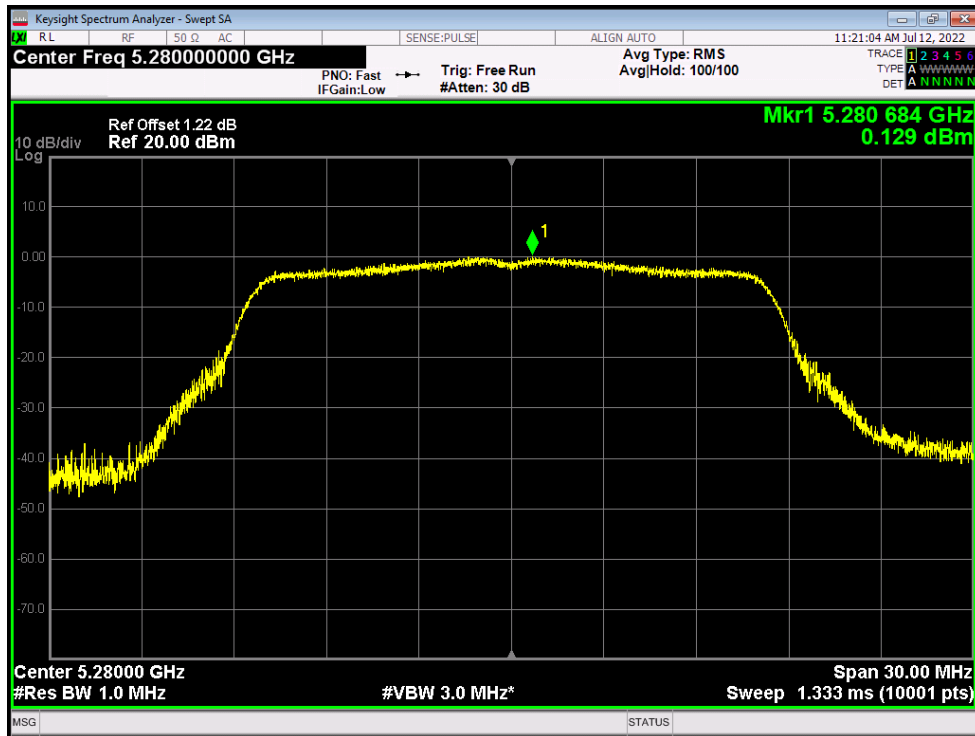


PSD NVNT a 5320MHz Ant1

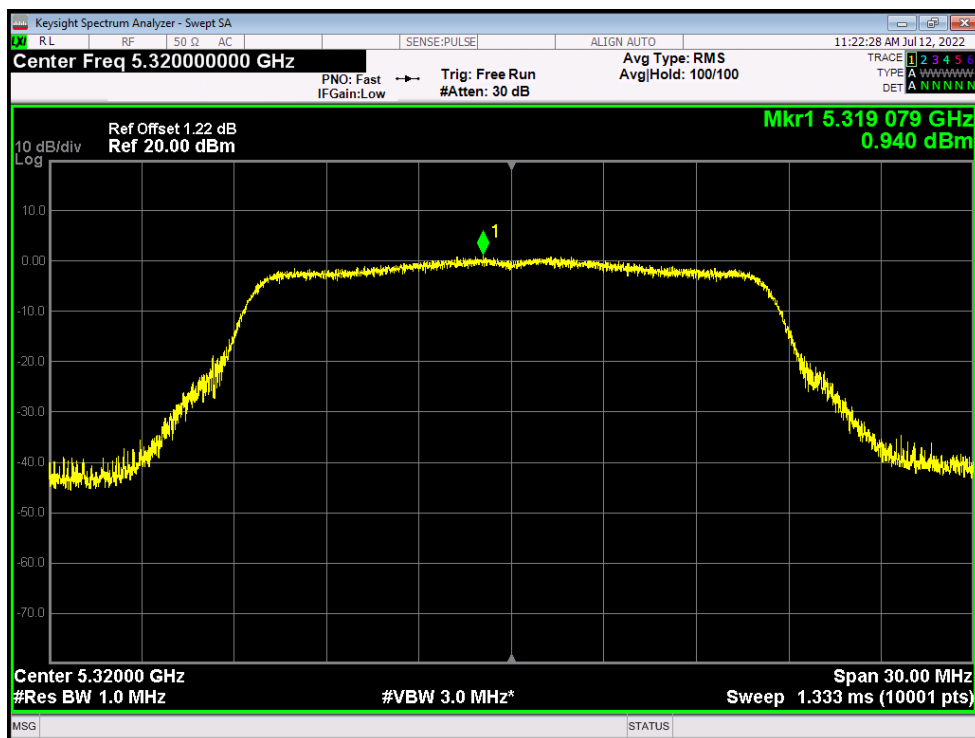


PSD NVNT ac20 5260MHz Ant1

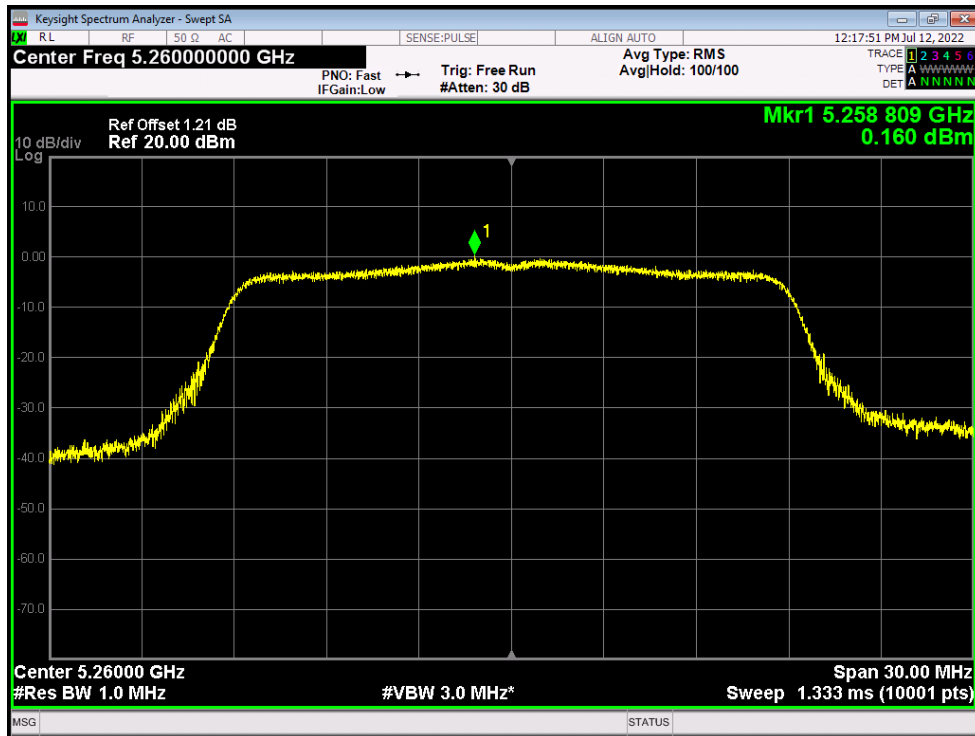


PSD NVNT ac20 5280MHz Ant1

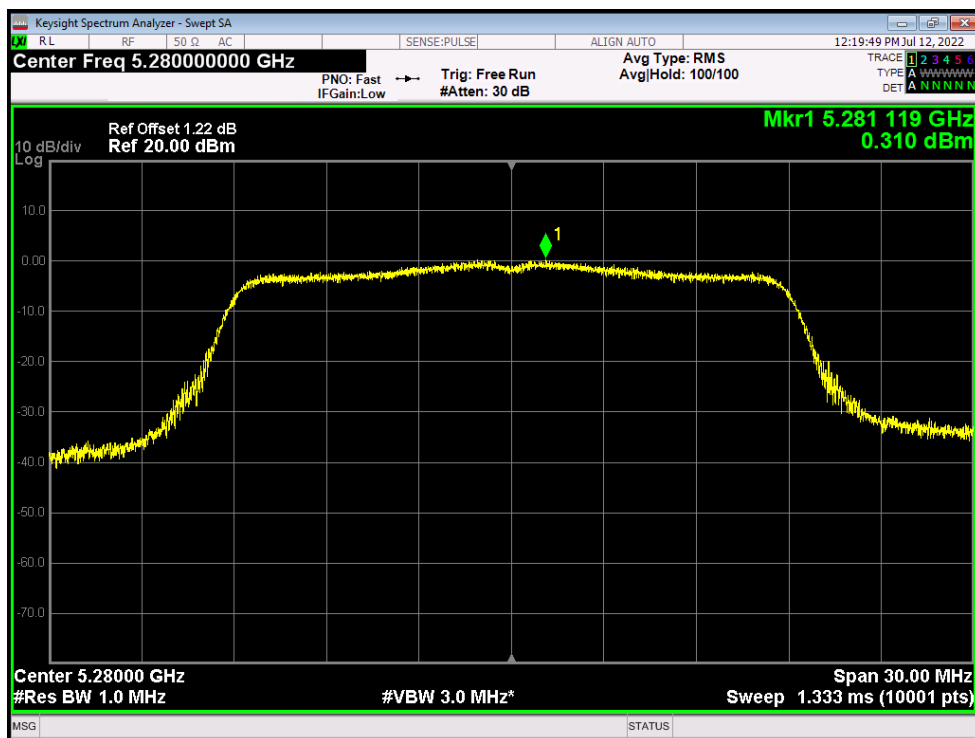


PSD NVNT ac20 5320MHz Ant1

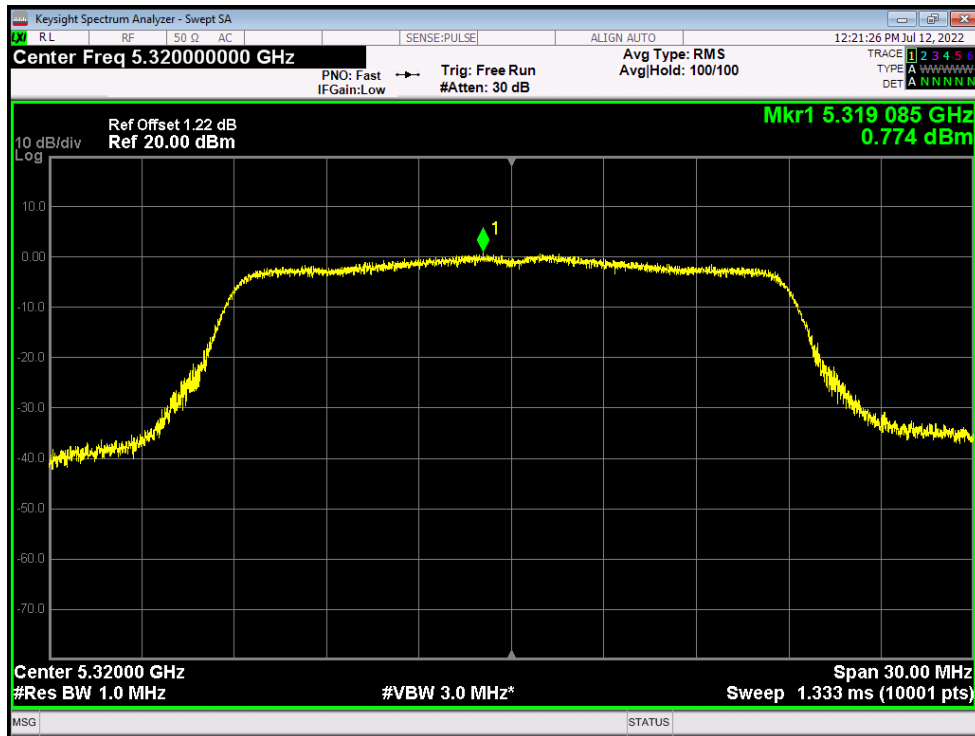


PSD NVNT ac40 5270MHz Ant1

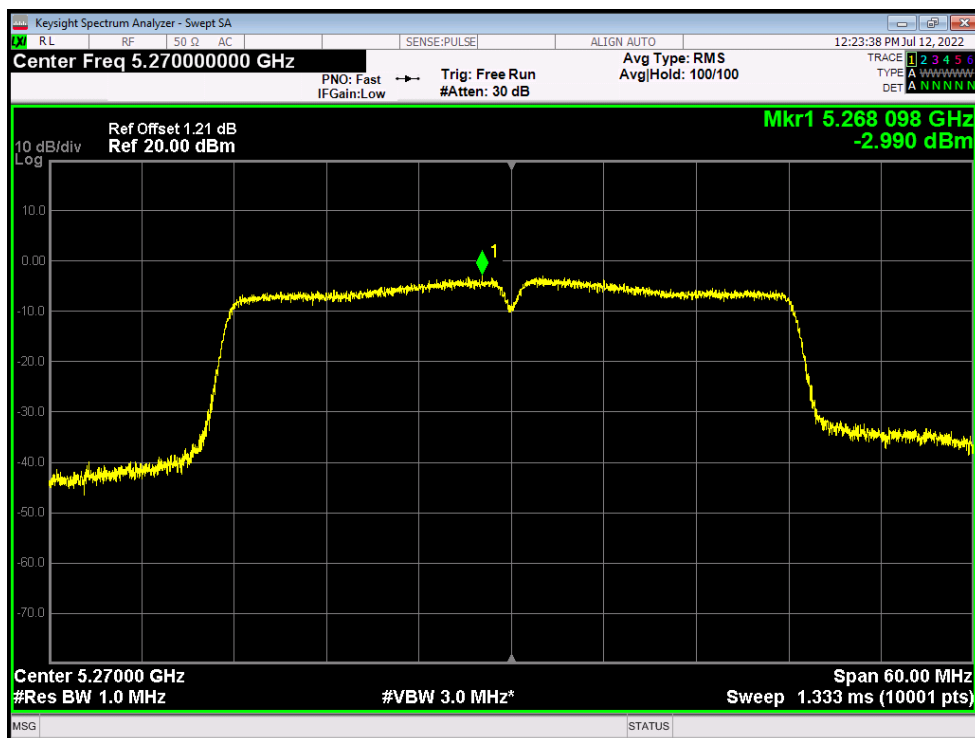


PSD NVNT ac40 5310MHz Ant1

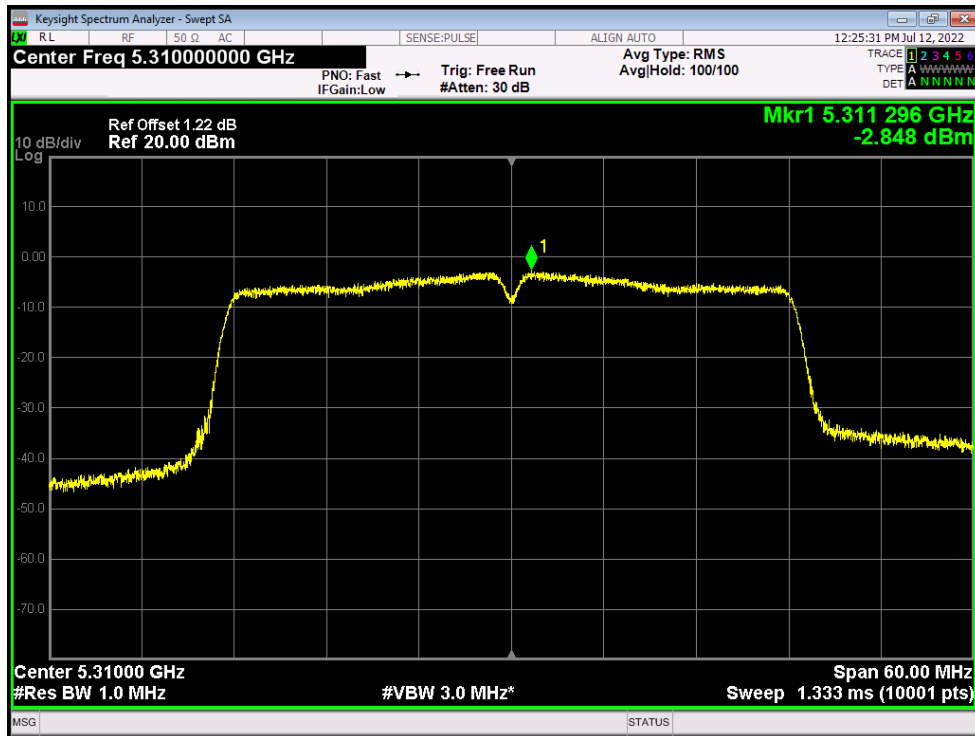


PSD NVNT ac80 5290MHz Ant1

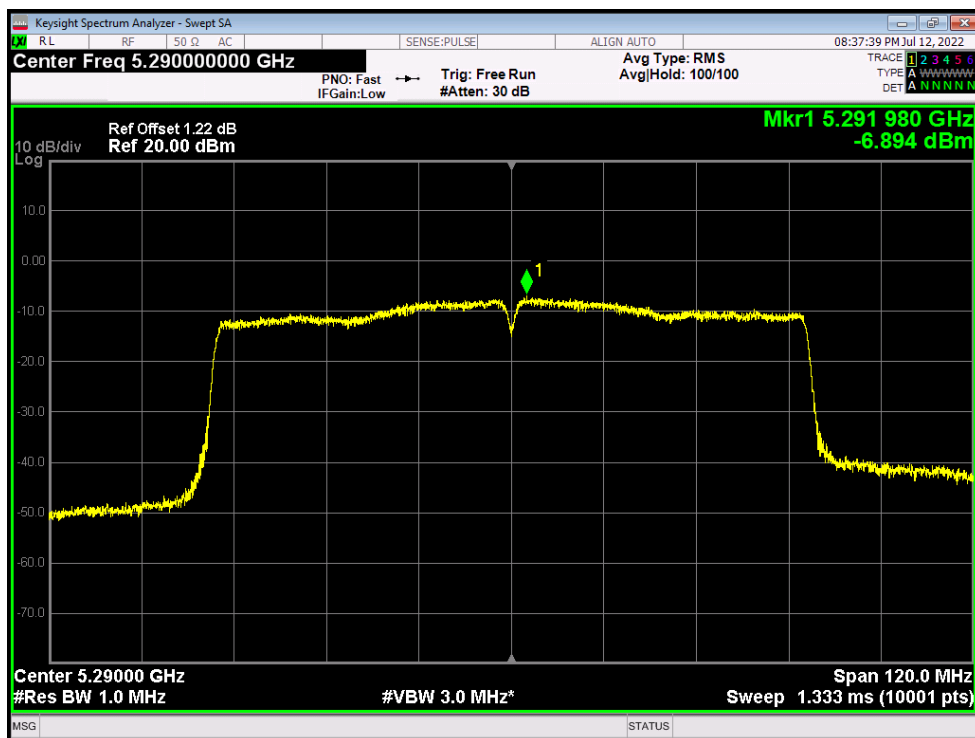


PSD NVNT n20 5260MHz Ant1

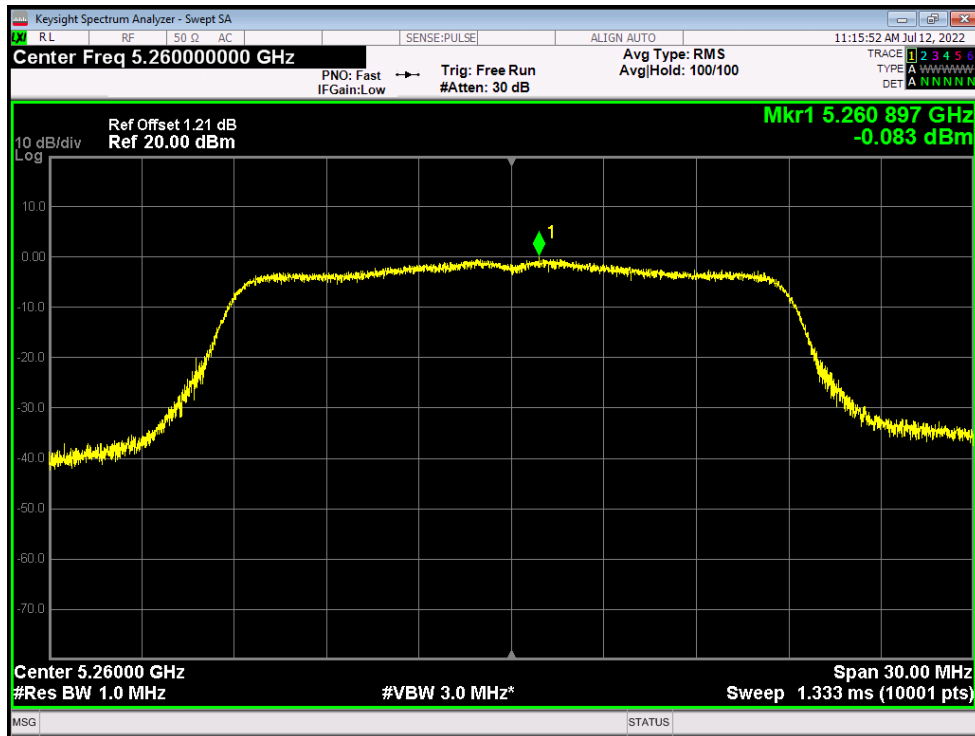


PSD NVNT n20 5280MHz Ant1

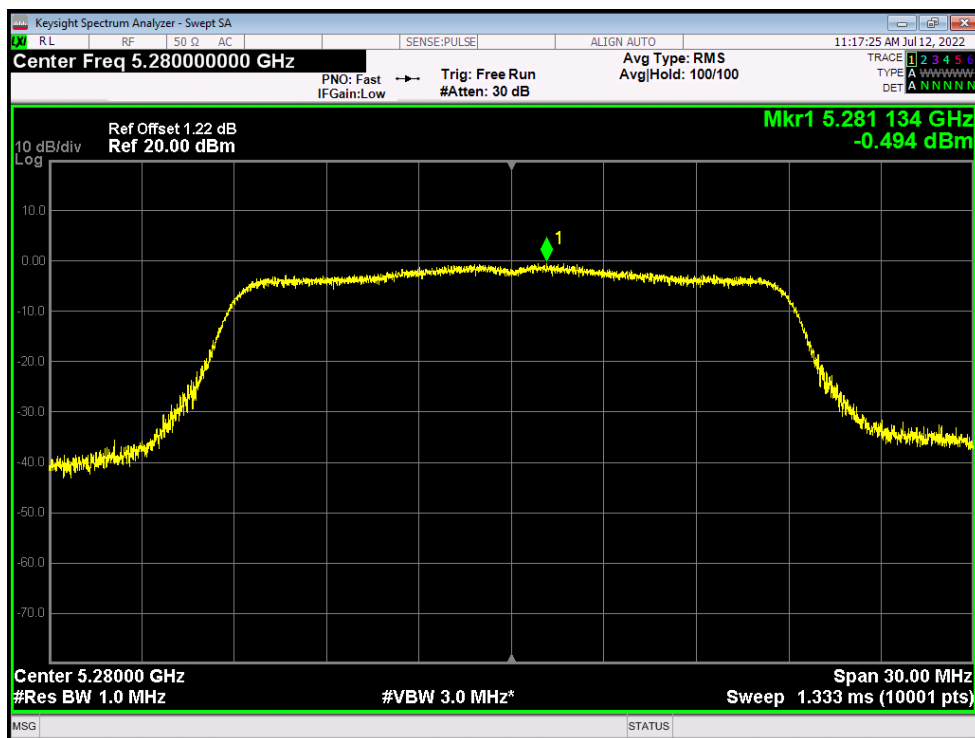


PSD NVNT n20 5320MHz Ant1

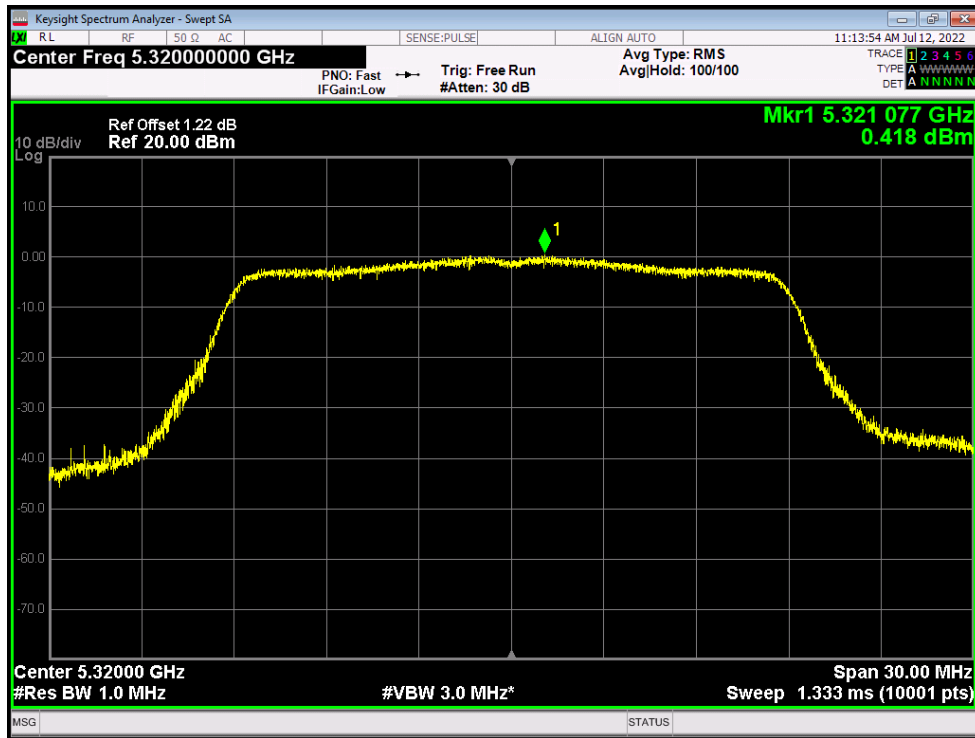

PSD NVNT n40 5270MHz Ant1

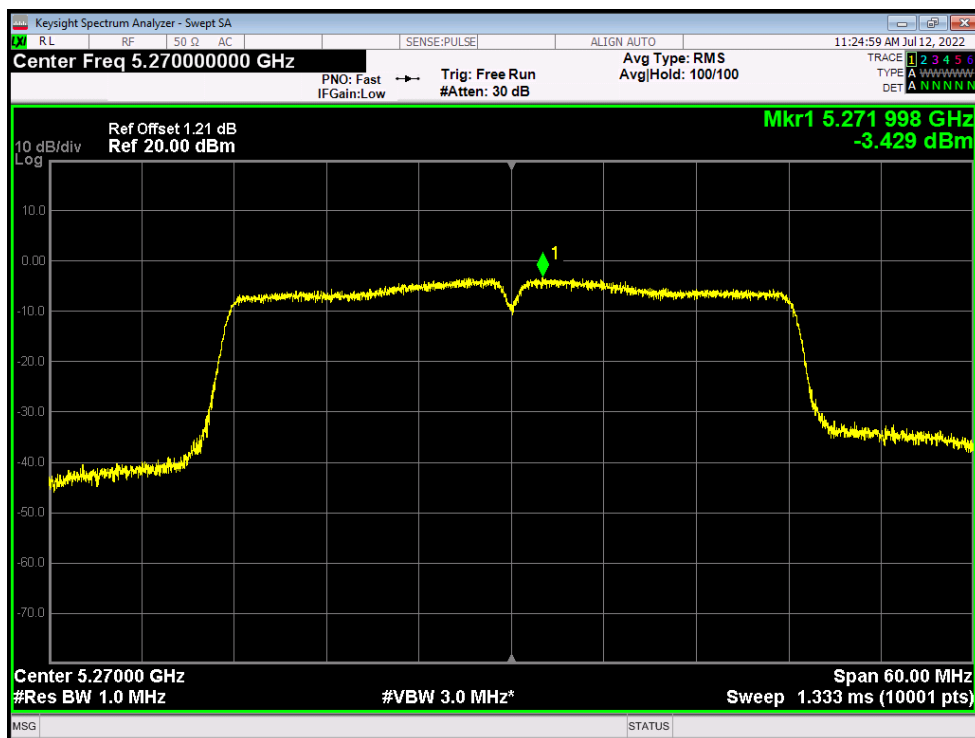


PSD NVNT n40 5310MHz Ant1

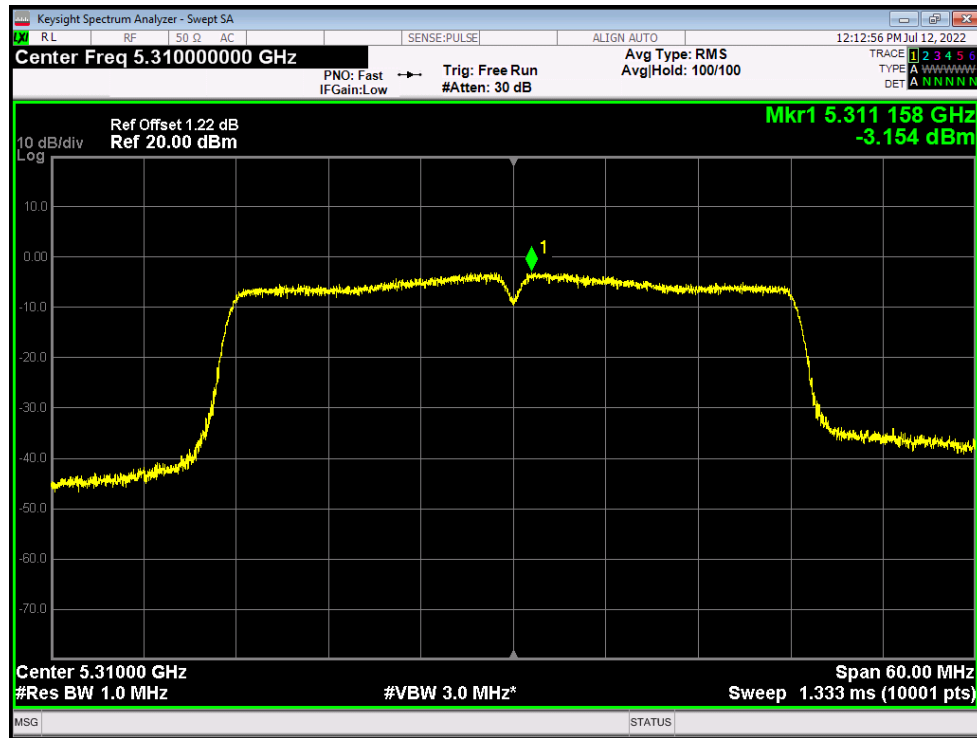


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5260	Ant1	-45.39	-27	Pass
NVNT	a	5320	Ant1	-29.68	-27	Pass
NVNT	ac20	5260	Ant1	-53.04	-27	Pass
NVNT	ac20	5320	Ant1	-31.11	-27	Pass
NVNT	ac40	5270	Ant1	-49.4	-27	Pass
NVNT	ac40	5310	Ant1	-27.9	-27	Pass
NVNT	ac80	5290	Ant1	-47.16	-27	Pass
NVNT	n20	5260	Ant1	-45.45	-27	Pass
NVNT	n20	5320	Ant1	-31.99	-27	Pass
NVNT	n40	5270	Ant1	-43.39	-27	Pass
NVNT	n40	5310	Ant1	-27.83	-27	Pass


Band Edge NVNT a 5260MHz Low Ant1

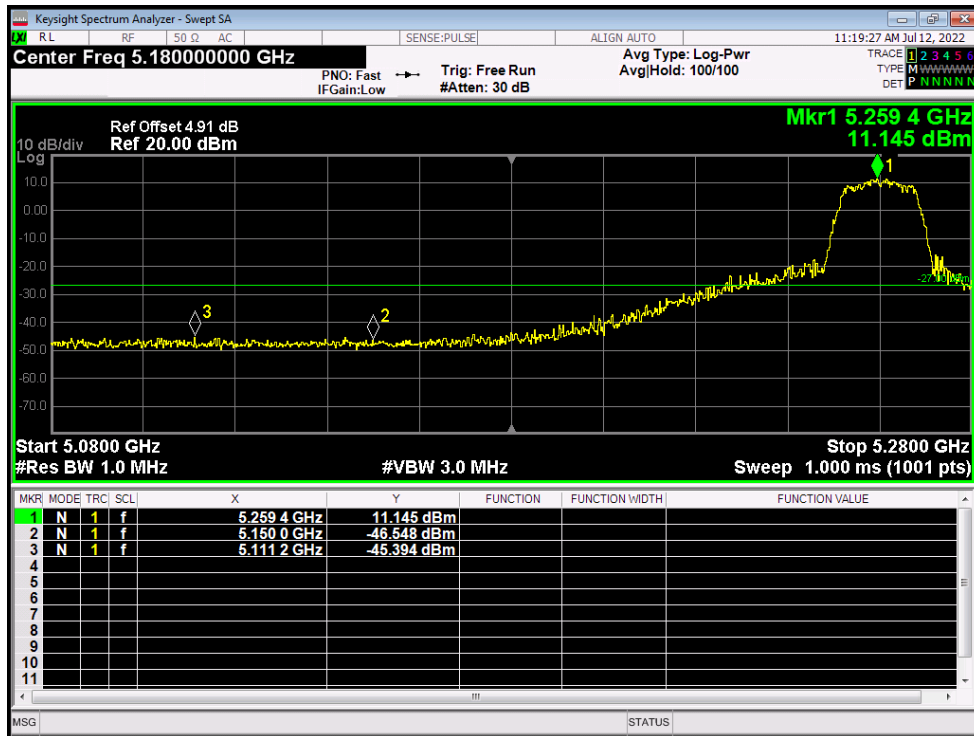


Band Edge NVNT a 5320MHz High Ant1

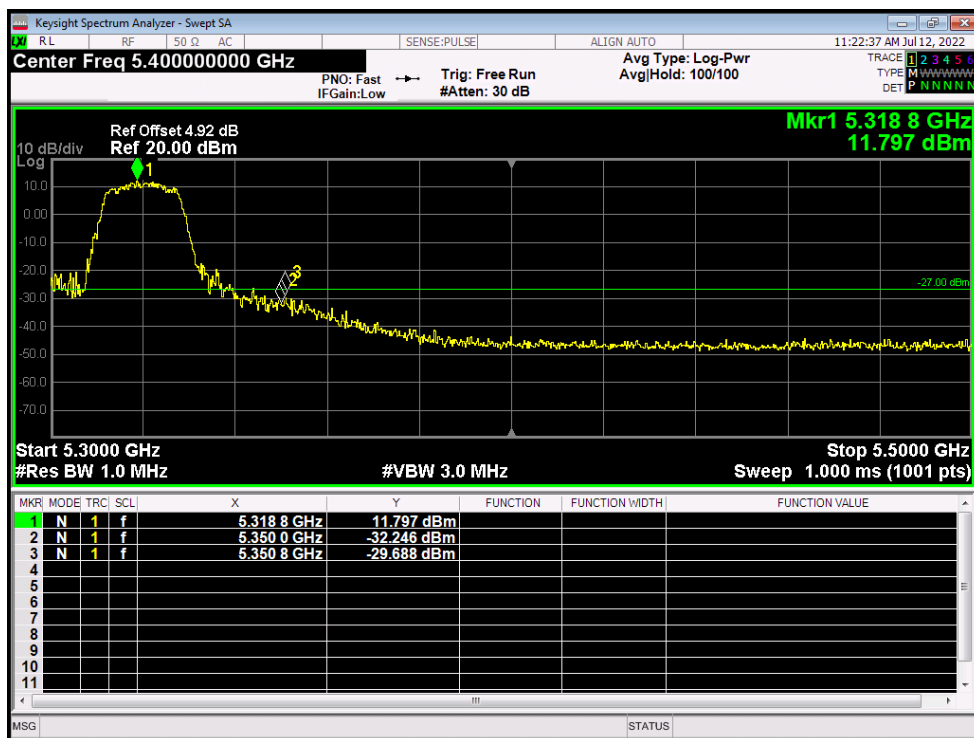


Band Edge NVNT ac20 5260MHz Low Ant1

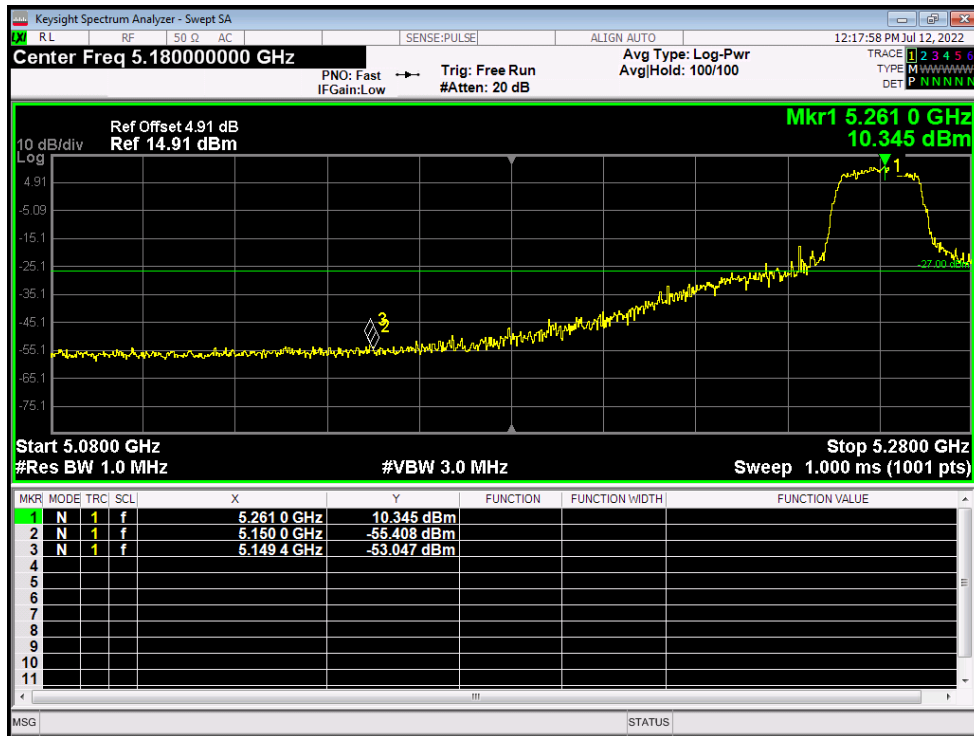

Band Edge NVNT ac20 5320MHz High Ant1

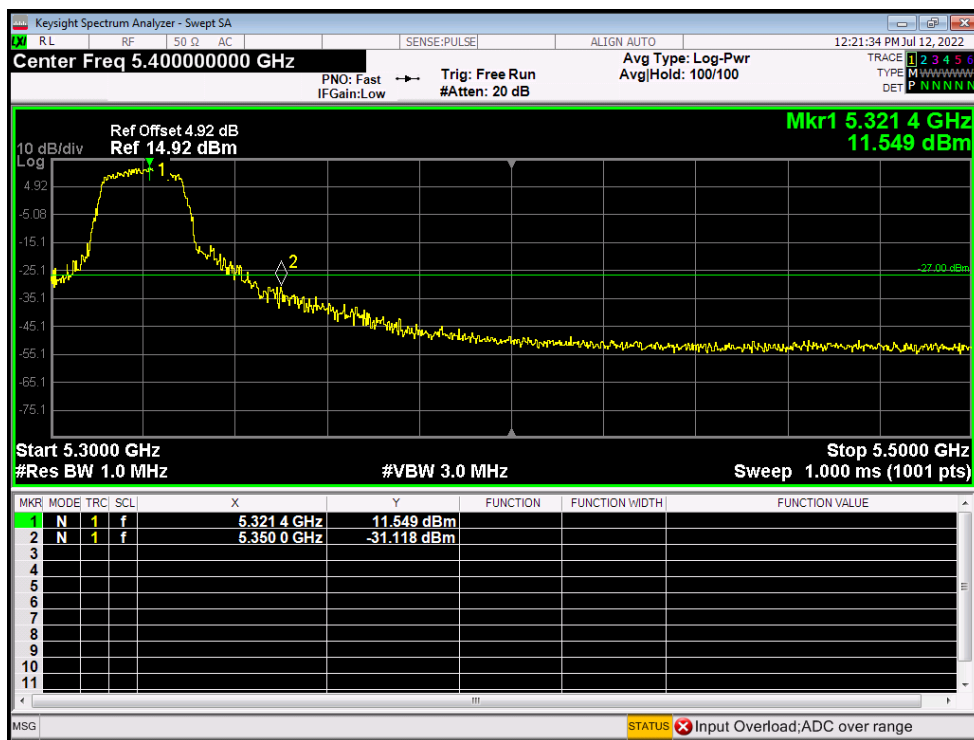


Band Edge NVNT ac40 5270MHz Low Ant1

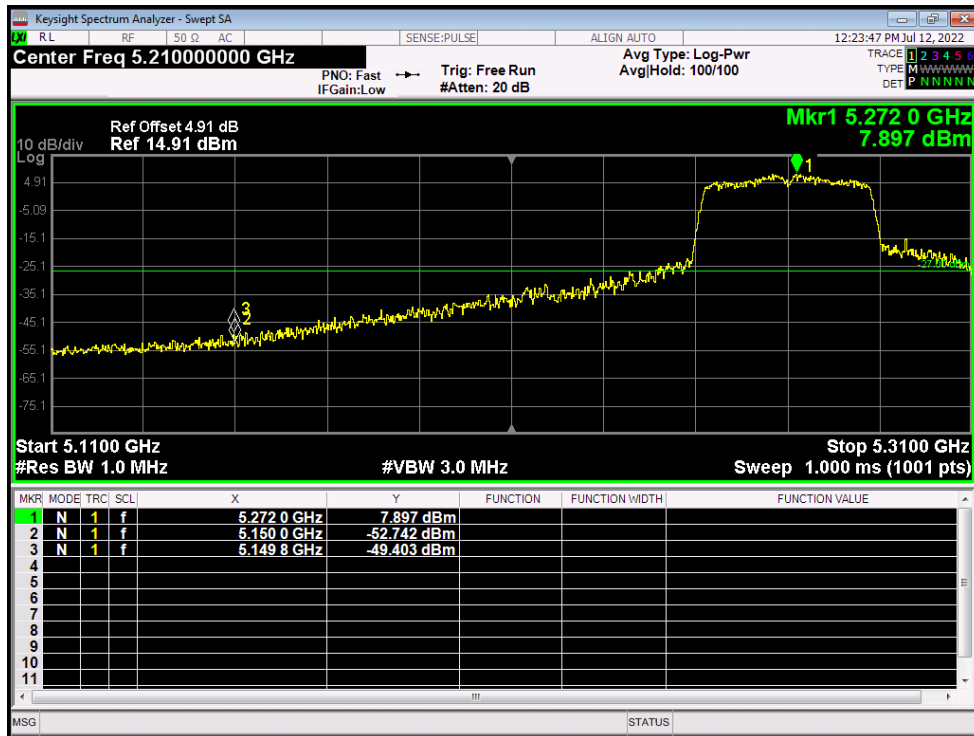


Band Edge NVNT ac40 5310MHz High Ant1




Band Edge NVNT ac80 5290MHz Low Ant1

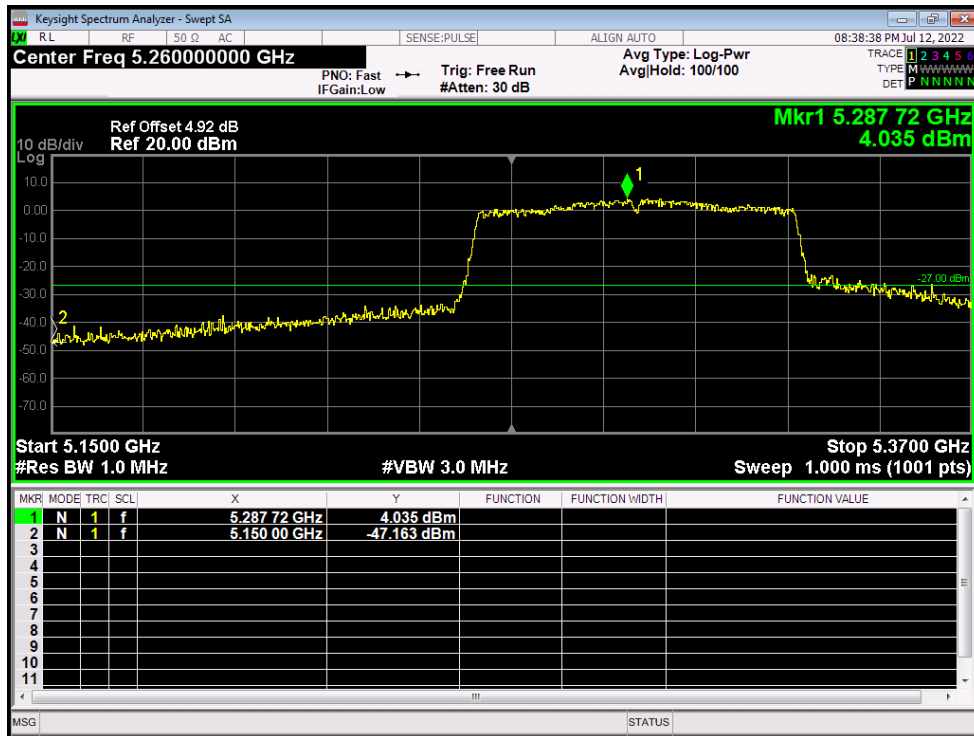


Band Edge NVNT n20 5260MHz Low Ant1

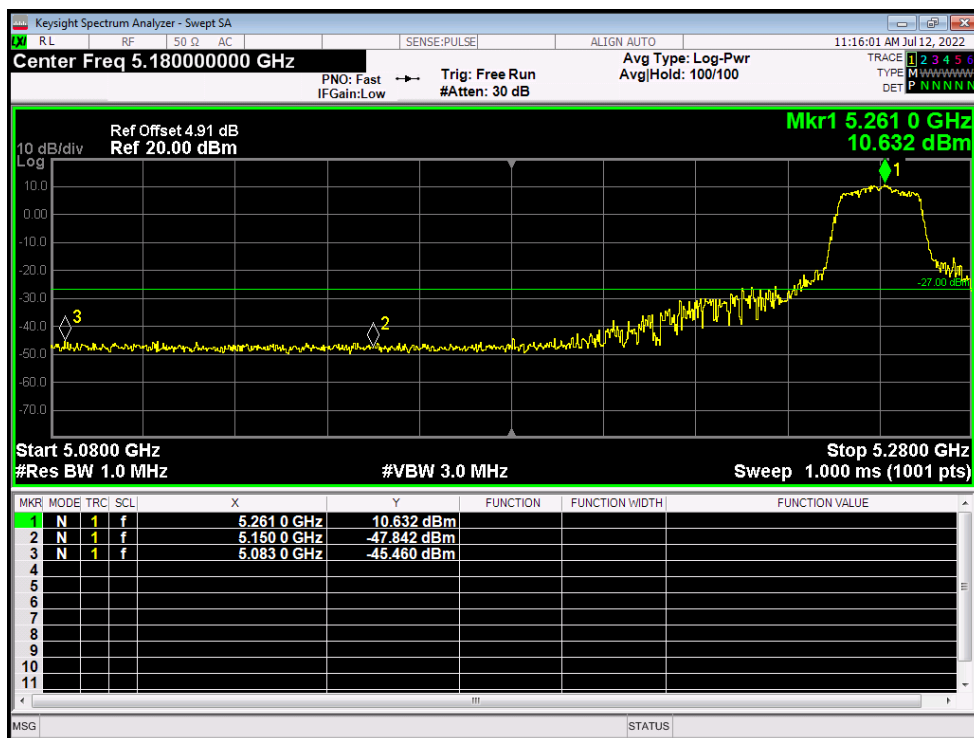

Band Edge NVNT n20 5320MHz High Ant1

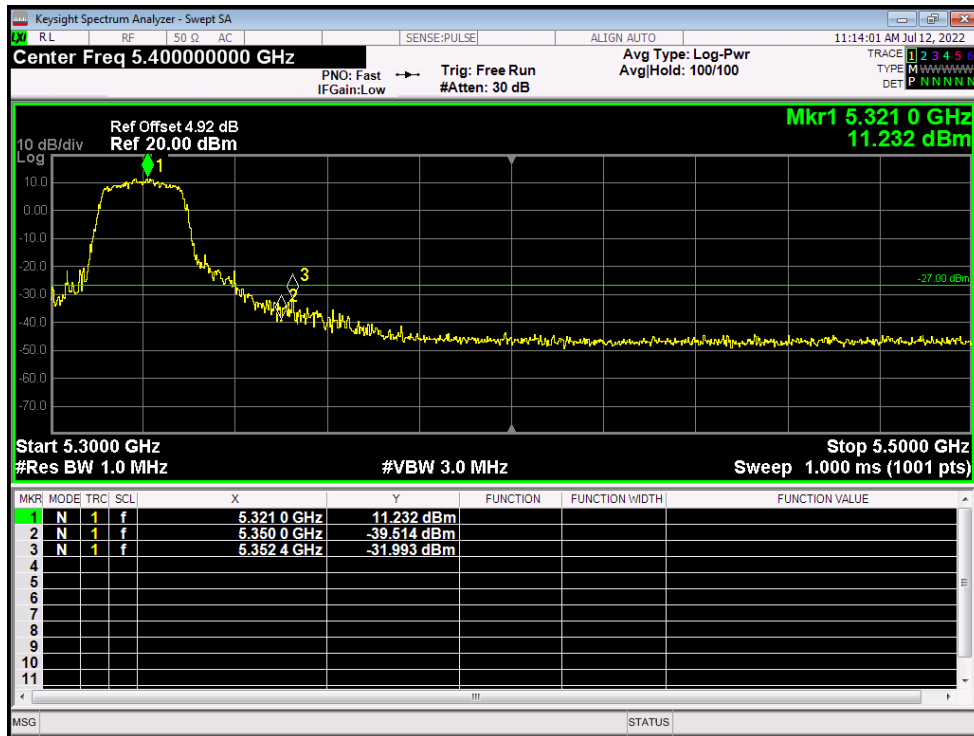

Band Edge NVNT n40 5270MHz Low Ant1

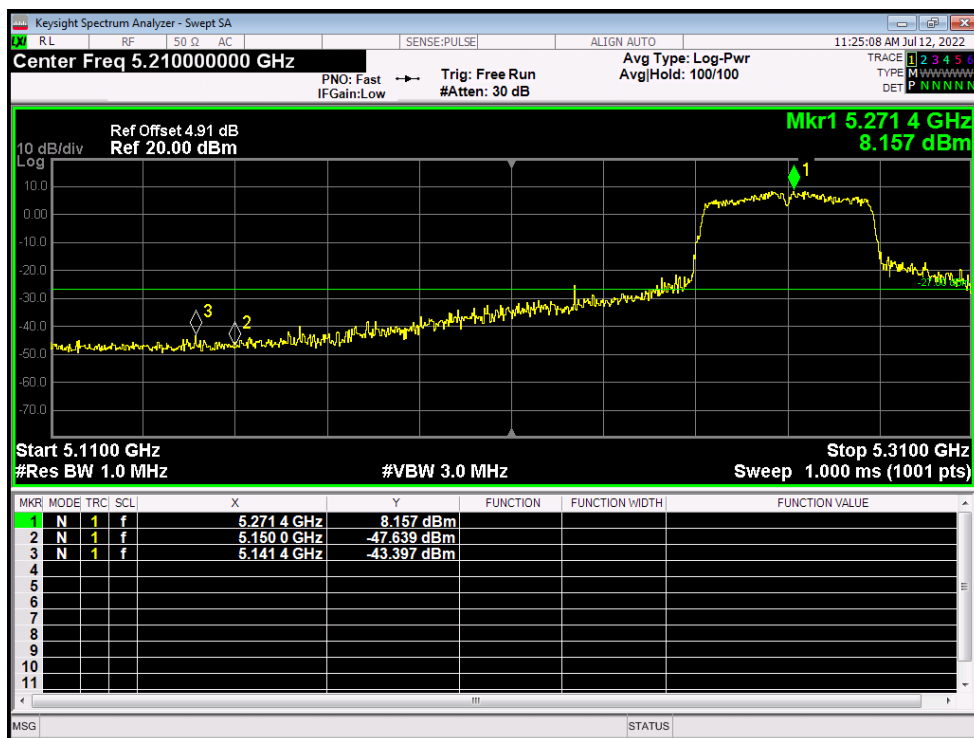


Band Edge NVNT n40 5310MHz High Ant1




Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5260	Ant1	-29.26	-27	Pass
NVNT	a	5280	Ant1	-29.77	-27	Pass
NVNT	a	5320	Ant1	-30.27	-27	Pass
NVNT	ac20	5260	Ant1	-30.25	-27	Pass
NVNT	ac20	5280	Ant1	-30.63	-27	Pass
NVNT	ac20	5320	Ant1	-29.93	-27	Pass
NVNT	ac40	5270	Ant1	-30.03	-27	Pass
NVNT	ac40	5310	Ant1	-30.48	-27	Pass
NVNT	ac80	5290	Ant1	-30.68	-27	Pass
NVNT	n20	5260	Ant1	-30.04	-27	Pass
NVNT	n20	5280	Ant1	-29.79	-27	Pass
NVNT	n20	5320	Ant1	-30.33	-27	Pass
NVNT	n40	5270	Ant1	-29.9	-27	Pass
NVNT	n40	5310	Ant1	-30.69	-27	Pass


Tx. Spurious NVNT a 5260MHz Ant1 Emission

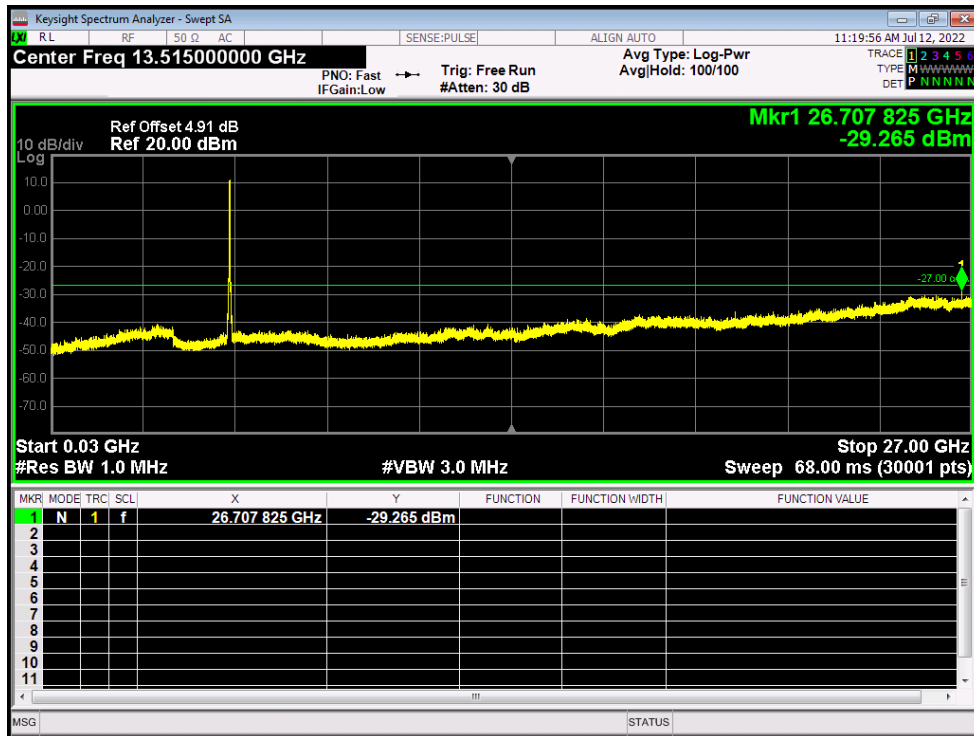


Tx. Spurious NVNT a 5280MHz Ant1 Emission

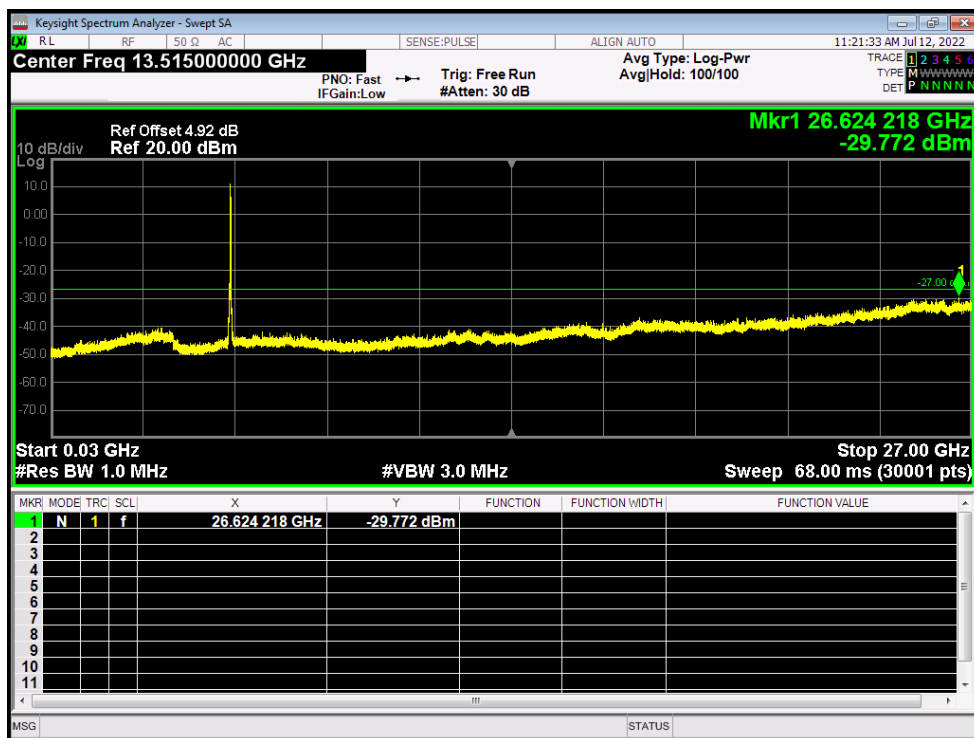


Tx. Spurious NVNT a 5320MHz Ant1 Emission

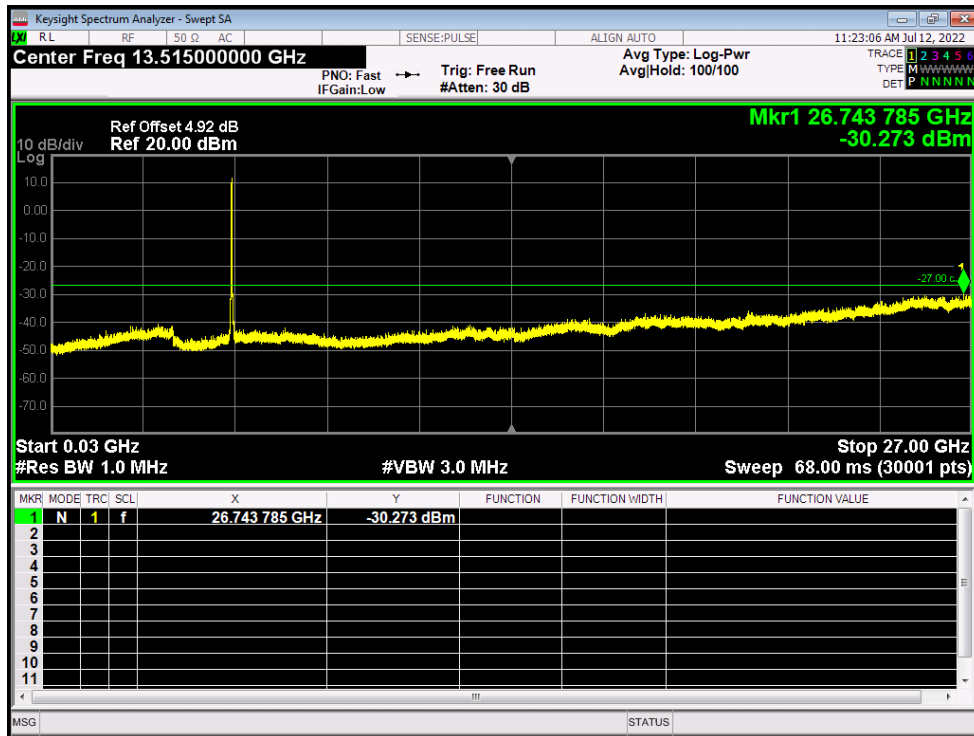


Tx. Spurious NVNT ac20 5260MHz Ant1 Emission

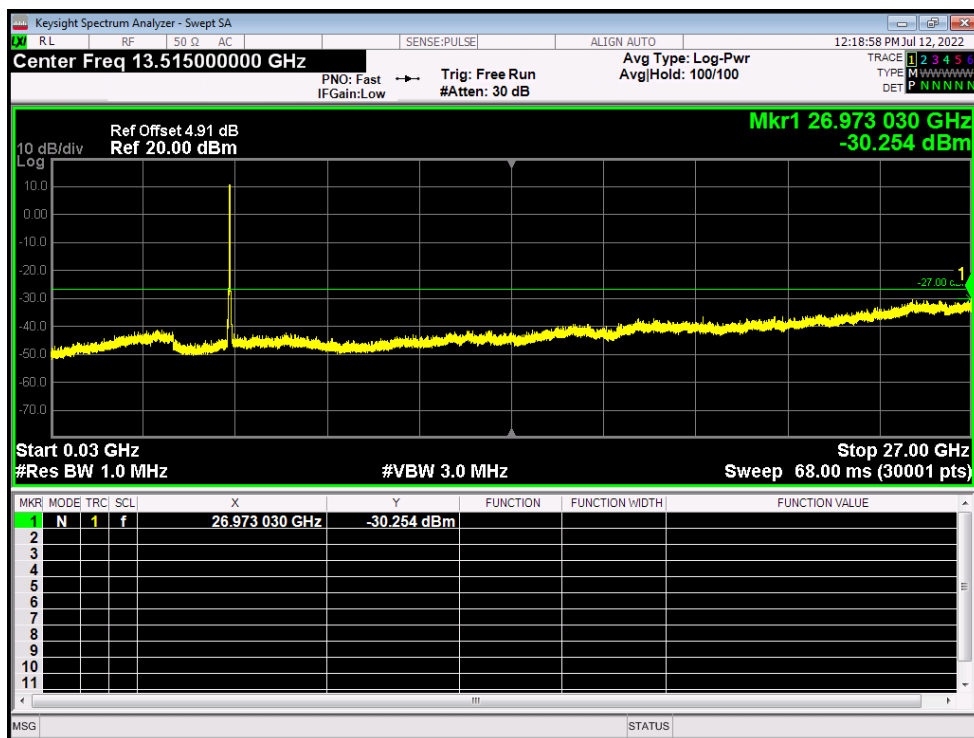


Tx. Spurious NVNT ac20 5280MHz Ant1 Emission

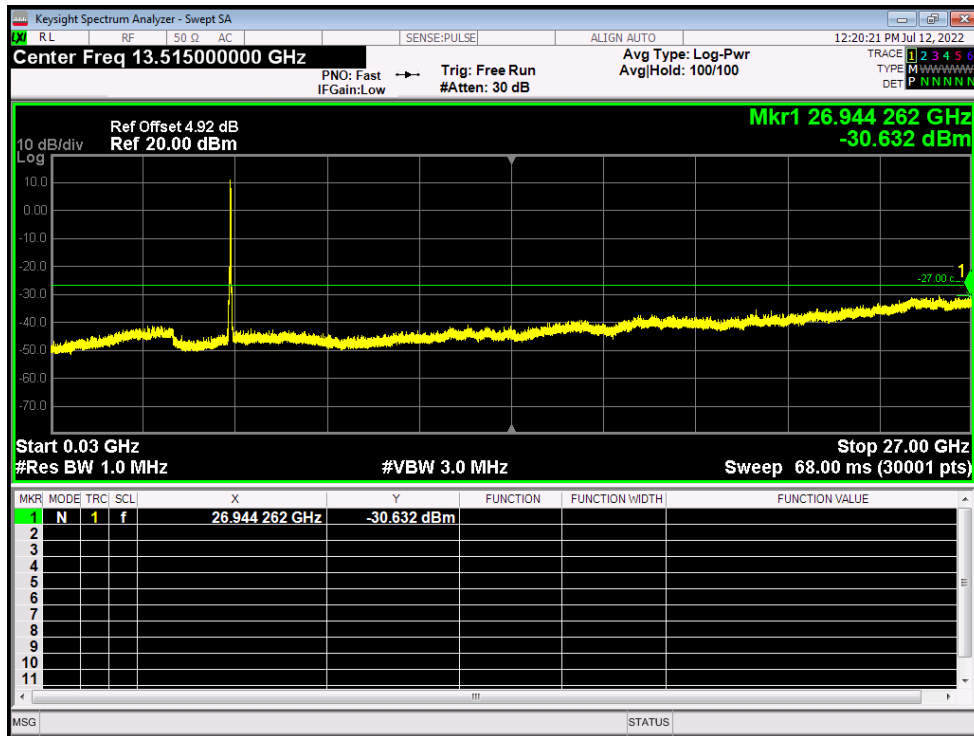


Tx. Spurious NVNT ac20 5320MHz Ant1 Emission

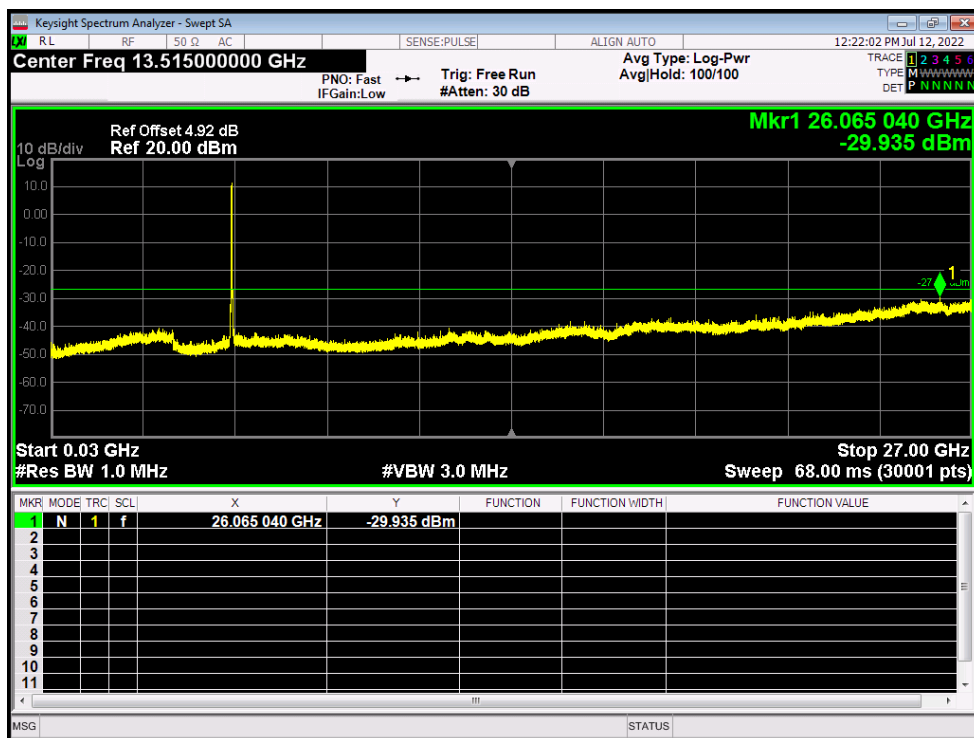


Tx. Spurious NVNT ac40 5270MHz Ant1 Emission

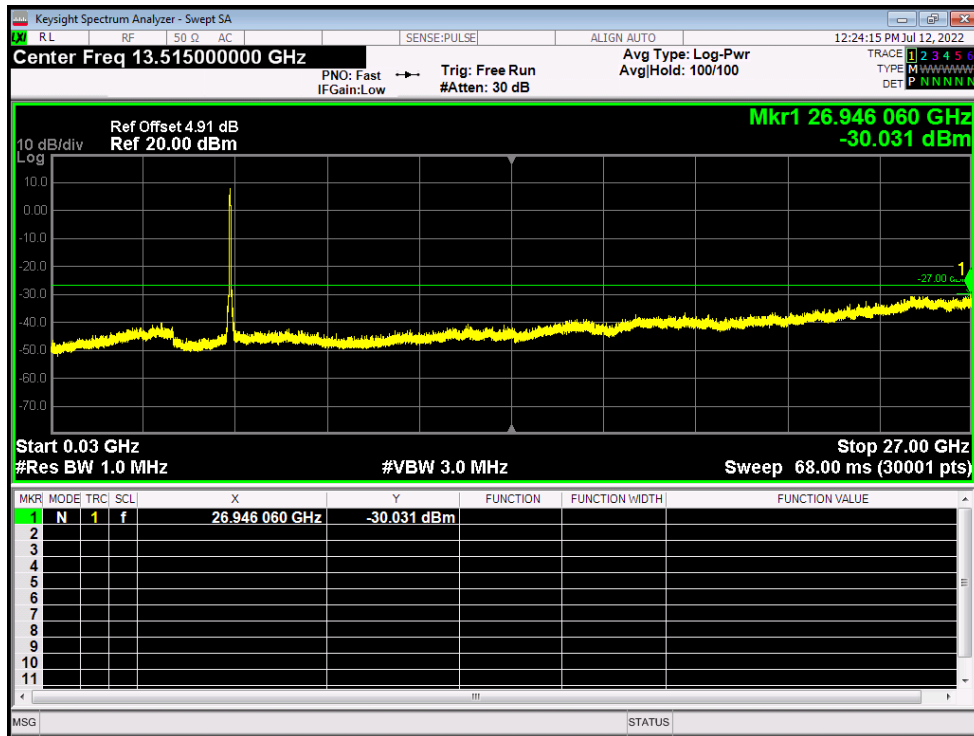


Tx. Spurious NVNT ac40 5310MHz Ant1 Emission

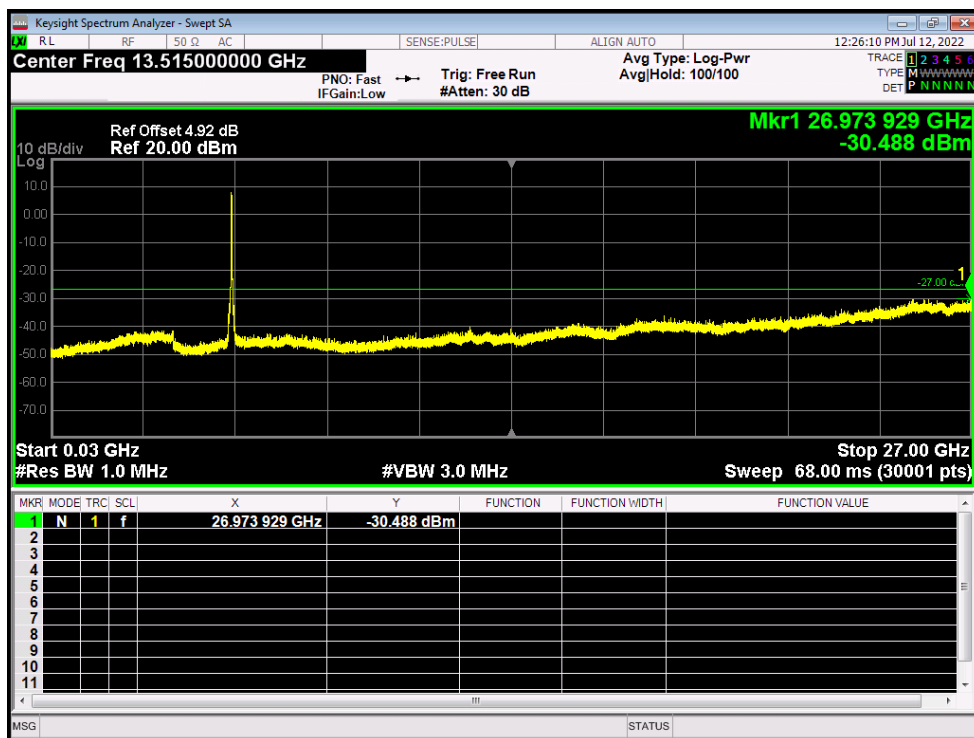


Tx. Spurious NVNT ac80 5290MHz Ant1 Emission

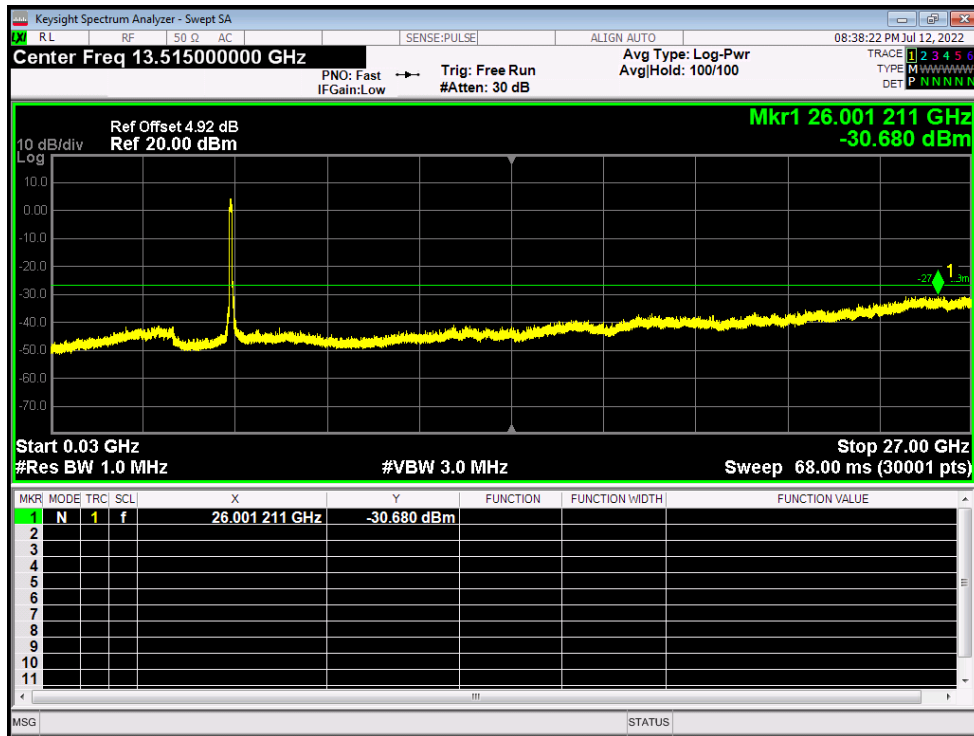


Tx. Spurious NVNT n20 5260MHz Ant1 Emission

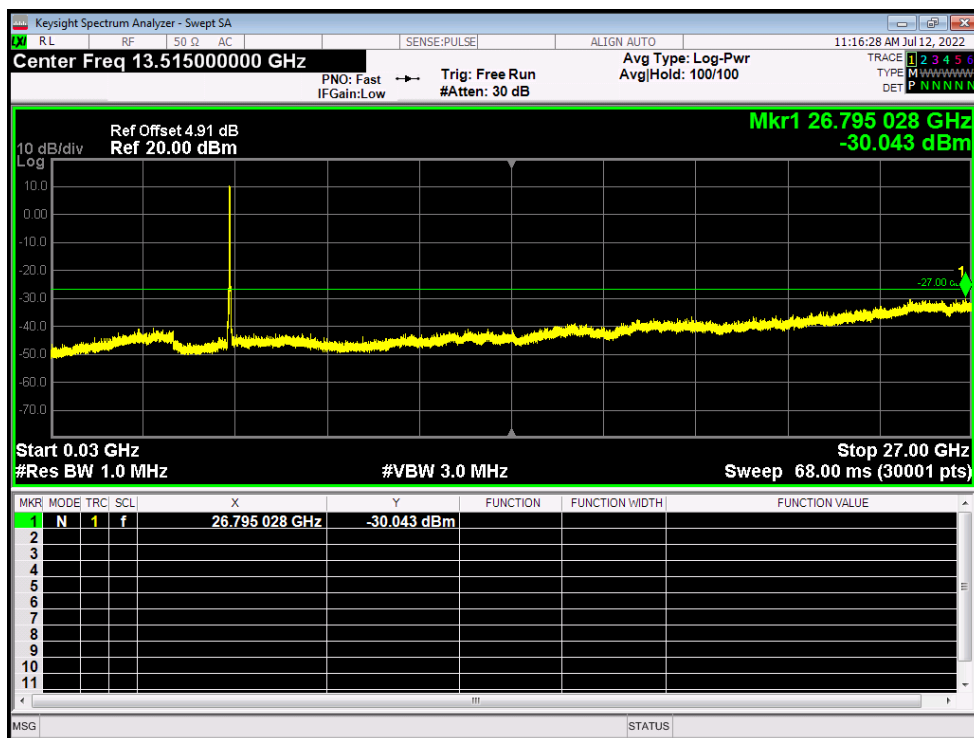


Tx. Spurious NVNT n20 5280MHz Ant1 Emission

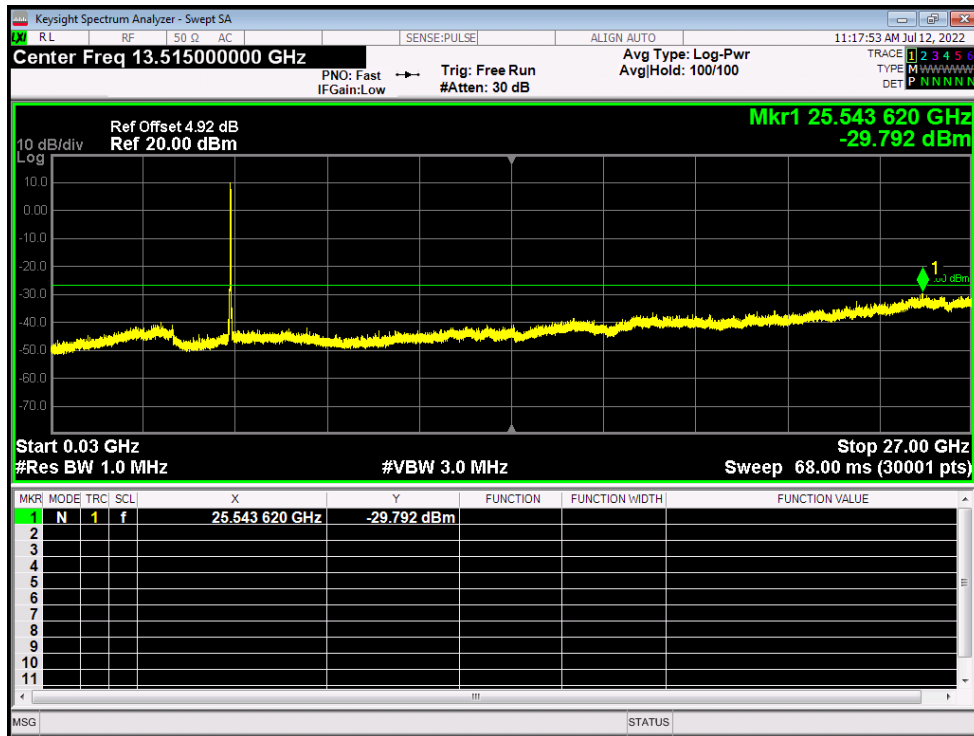


Tx. Spurious NVNT n20 5320MHz Ant1 Emission

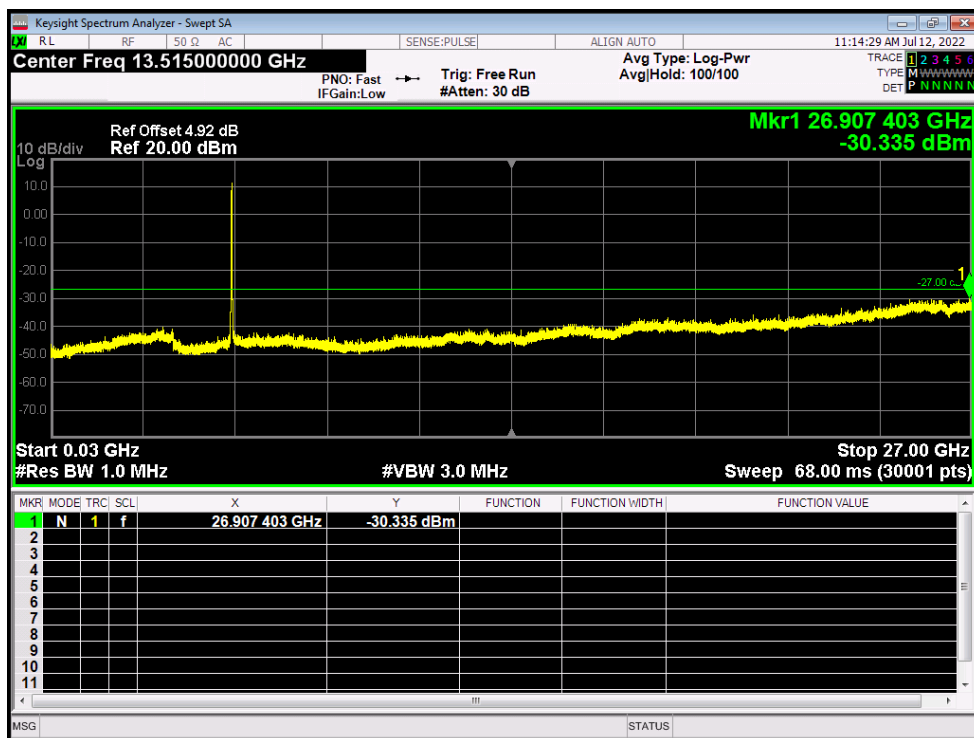

Tx. Spurious NVNT n40 5270MHz Ant1 Emission

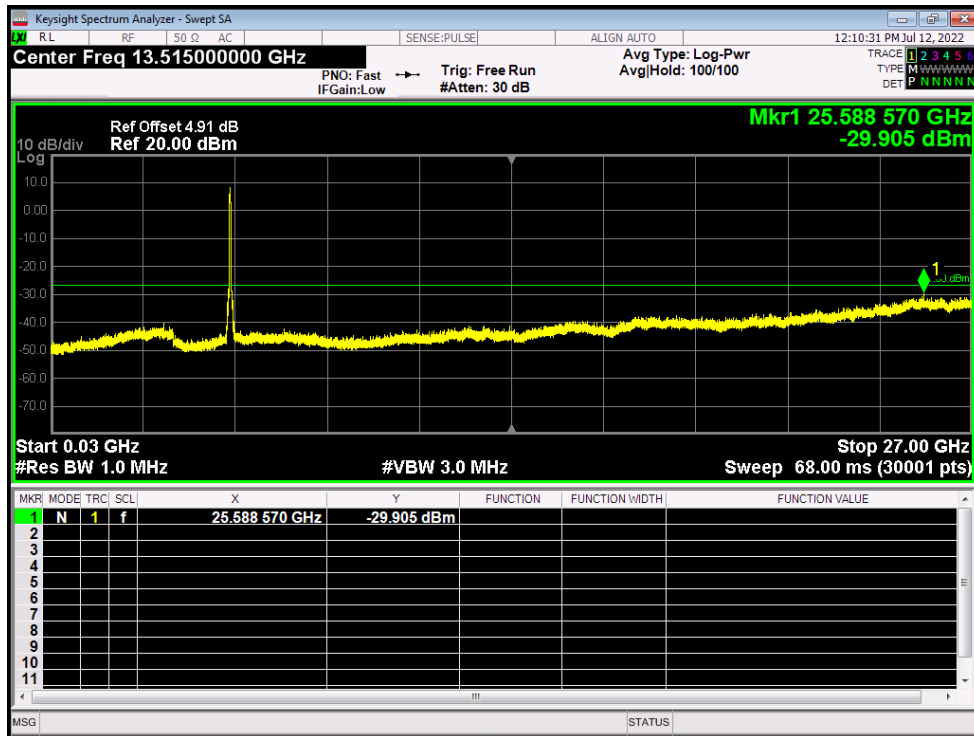

Tx. Spurious NVNT n40 5310MHz Ant1 Emission

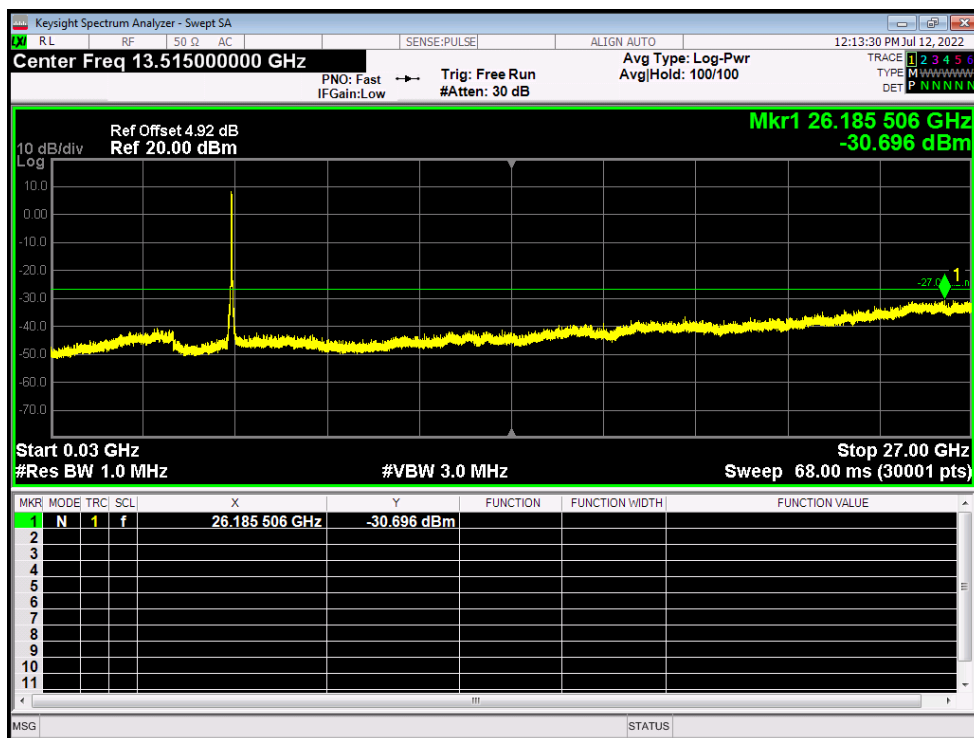


5.6G


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5500	Ant1	97.83	0.1
NVNT	a	5600	Ant1	97.82	0.1
NVNT	a	5700	Ant1	97.81	0.1
NVNT	ac20	5500	Ant1	97.76	0.1
NVNT	ac20	5600	Ant1	97.68	0.1
NVNT	ac20	5700	Ant1	97.78	0.1
NVNT	ac40	5510	Ant1	95.33	0.21
NVNT	ac40	5590	Ant1	95.71	0.19
NVNT	ac40	5670	Ant1	95.35	0.21
NVNT	ac80	5530	Ant1	91.4	0.39
NVNT	ac80	5610	Ant1	91.36	0.39
NVNT	n20	5500	Ant1	97.68	0.1
NVNT	n20	5600	Ant1	97.69	0.1
NVNT	n20	5700	Ant1	97.65	0.1
NVNT	n40	5510	Ant1	95.42	0.2
NVNT	n40	5590	Ant1	95.45	0.2
NVNT	n40	5670	Ant1	95.46	0.2


Duty Cycle NVNT a 5500MHz Ant1

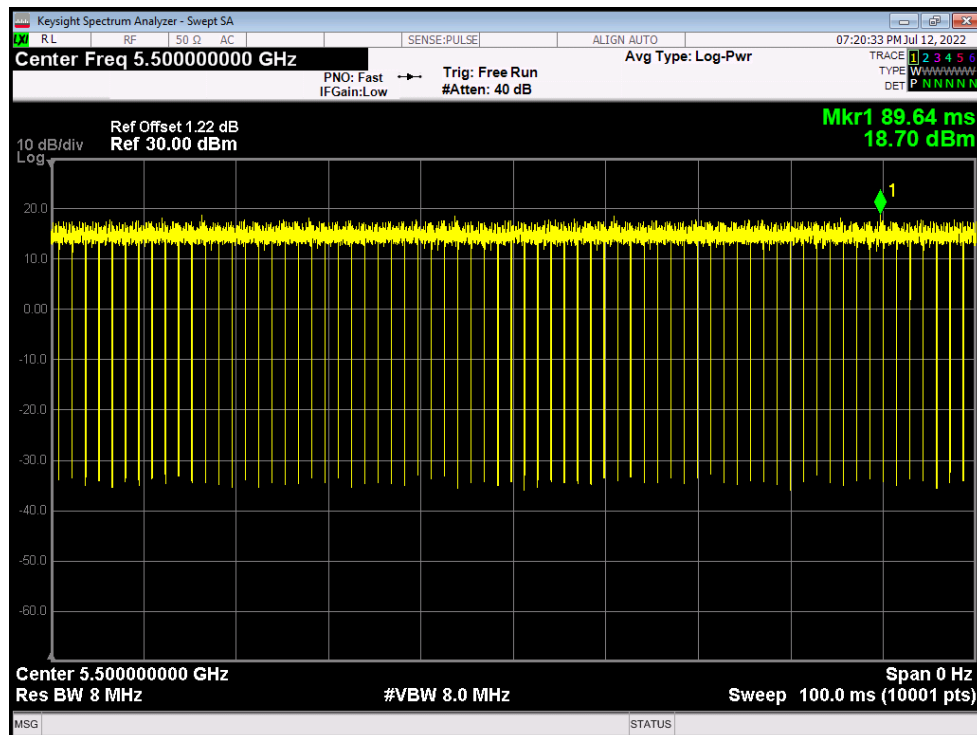


Duty Cycle NVNT a 5600MHz Ant1

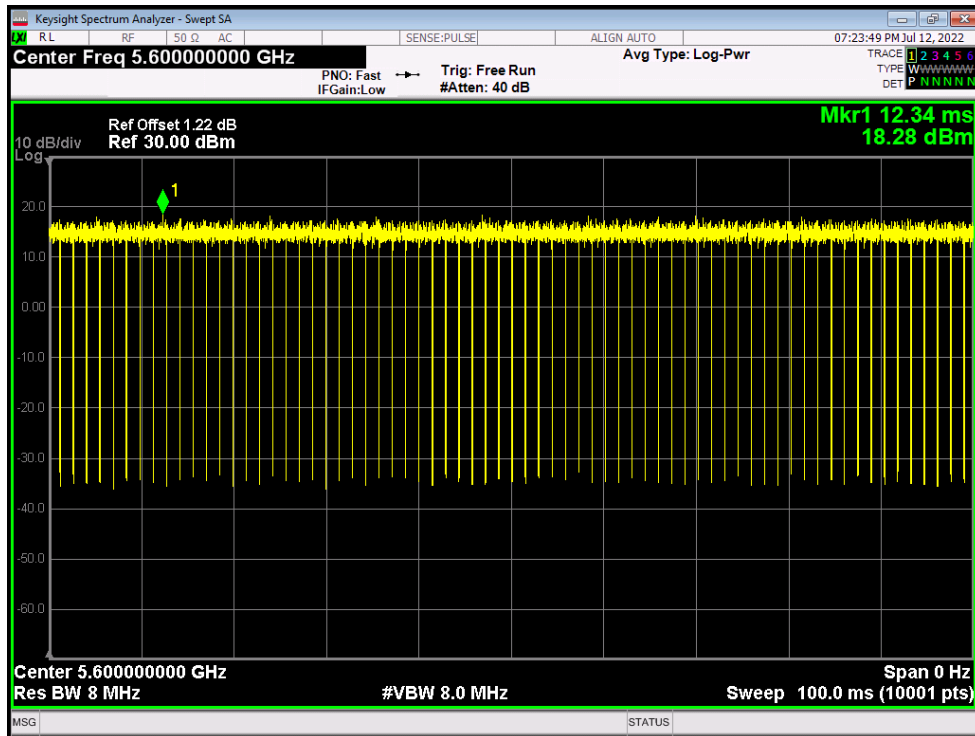


Duty Cycle NVNT a 5700MHz Ant1

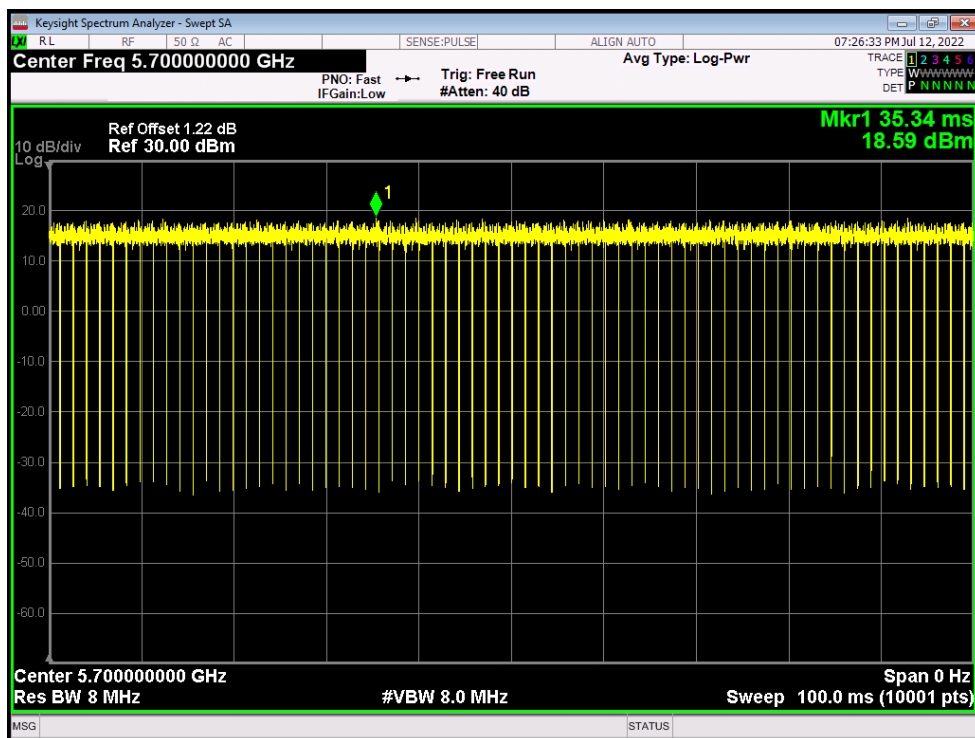


Duty Cycle NVNT ac20 5500MHz Ant1

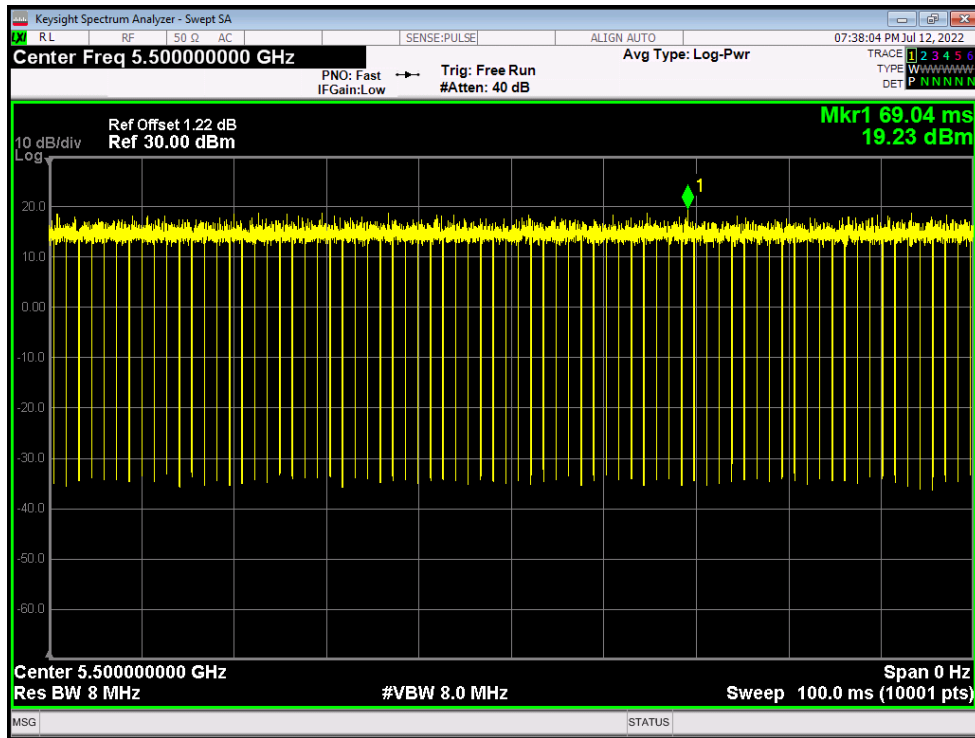


Duty Cycle NVNT ac20 5600MHz Ant1

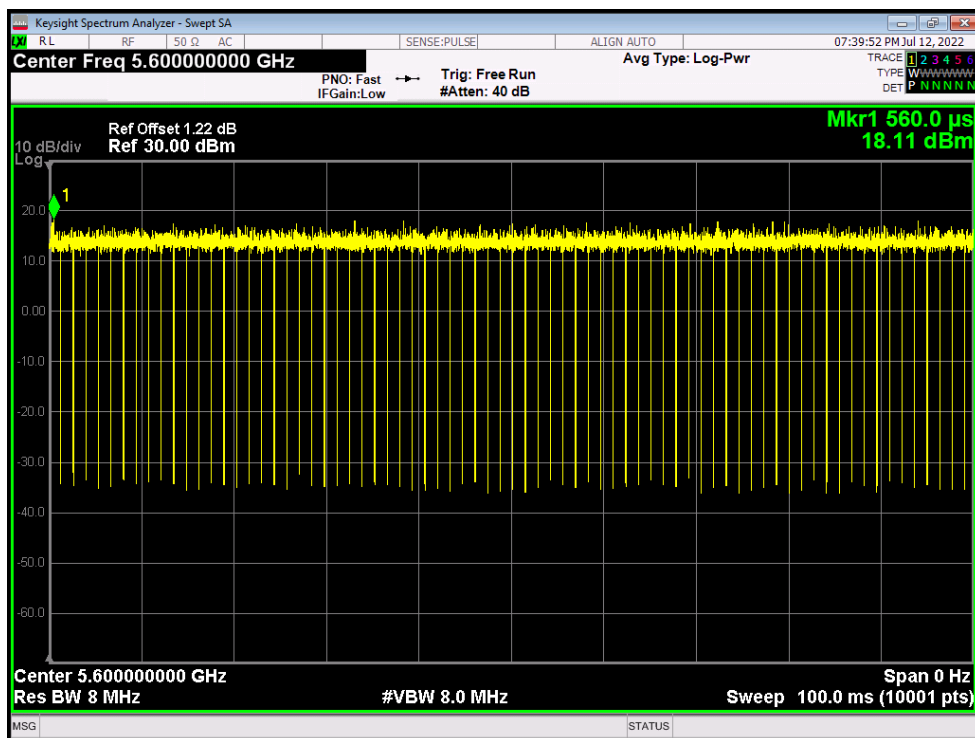


Duty Cycle NVNT ac20 5700MHz Ant1

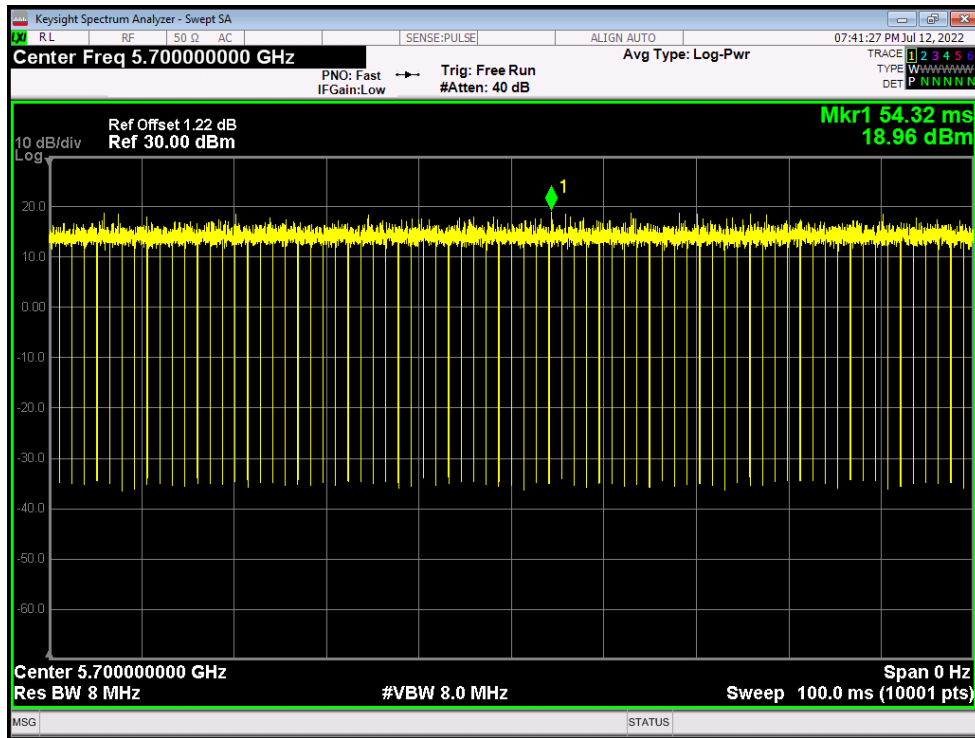


Duty Cycle NVNT ac40 5510MHz Ant1

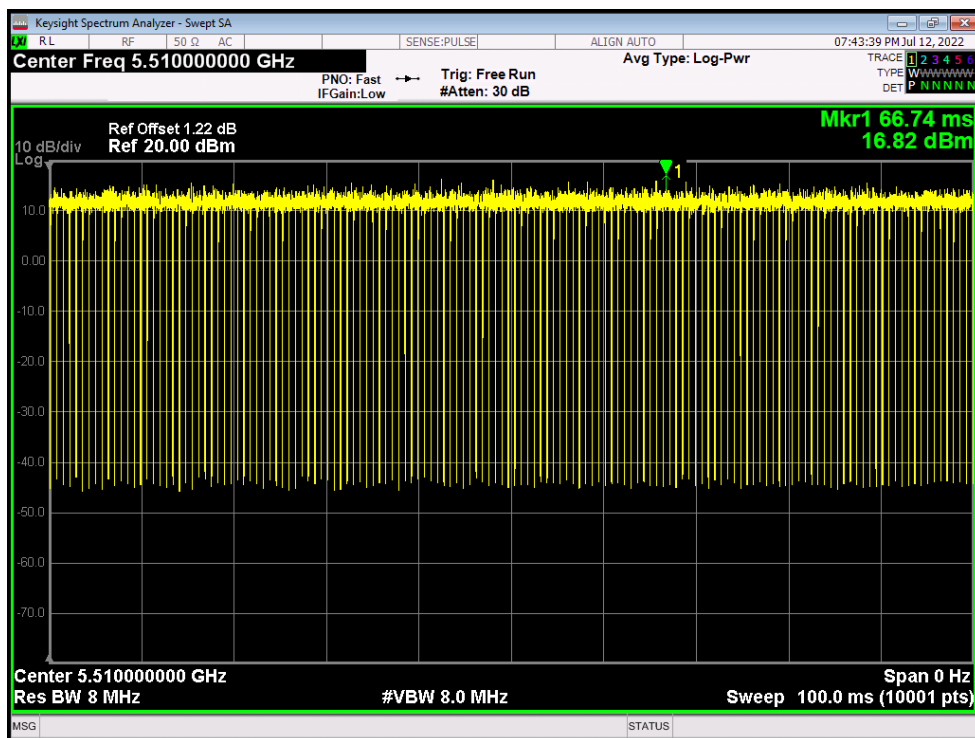


Duty Cycle NVNT ac40 5590MHz Ant1

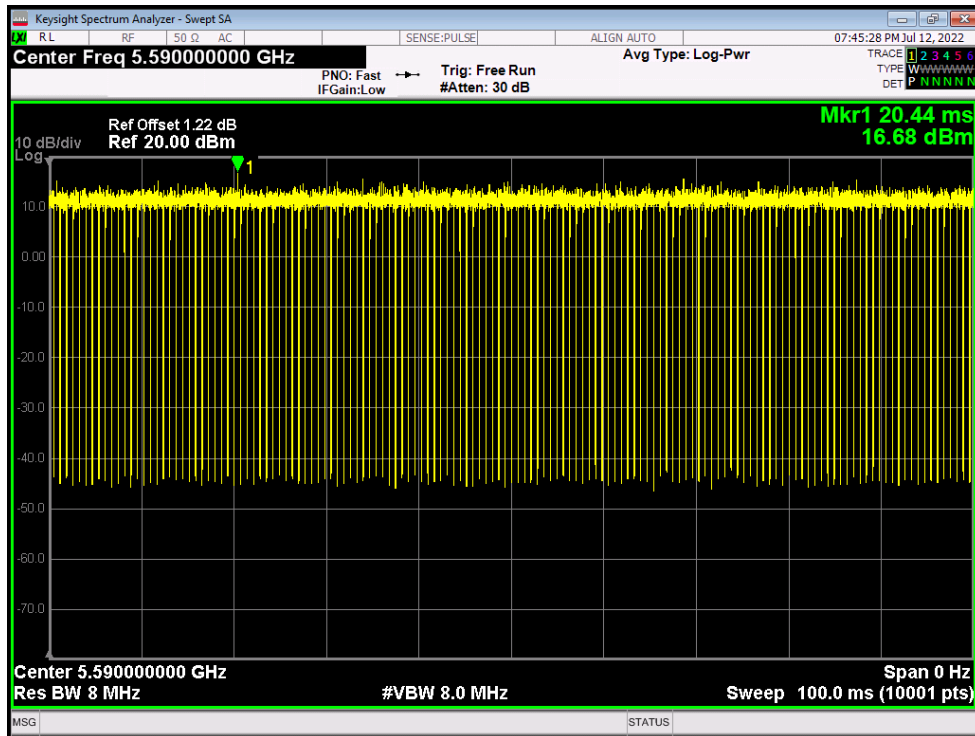


Duty Cycle NVNT ac40 5670MHz Ant1

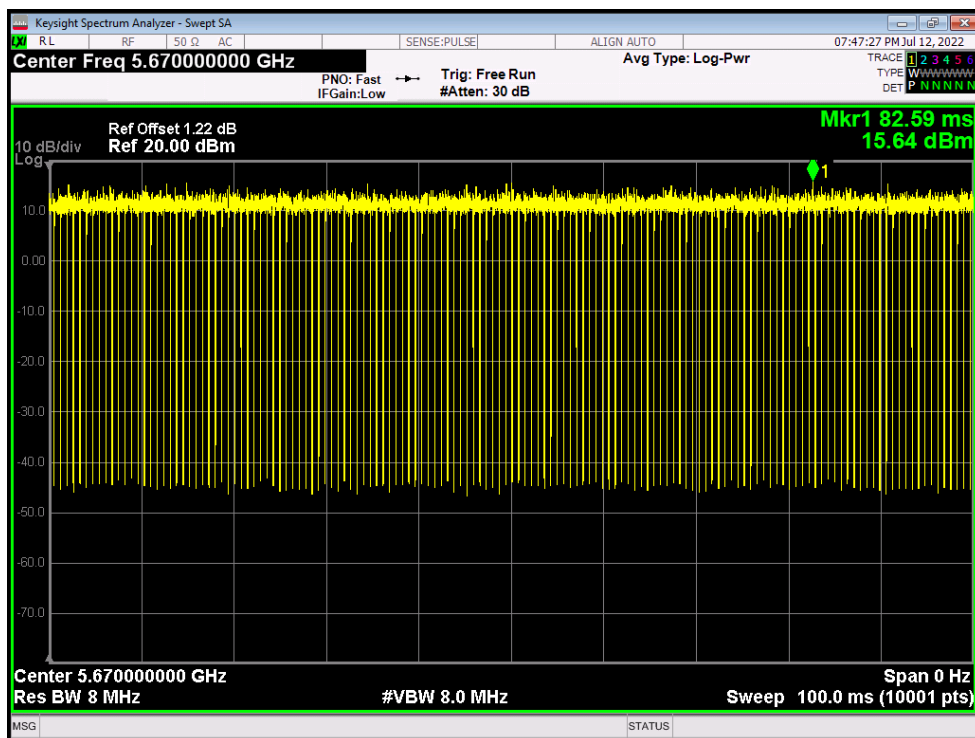


Duty Cycle NVNT ac80 5530MHz Ant1

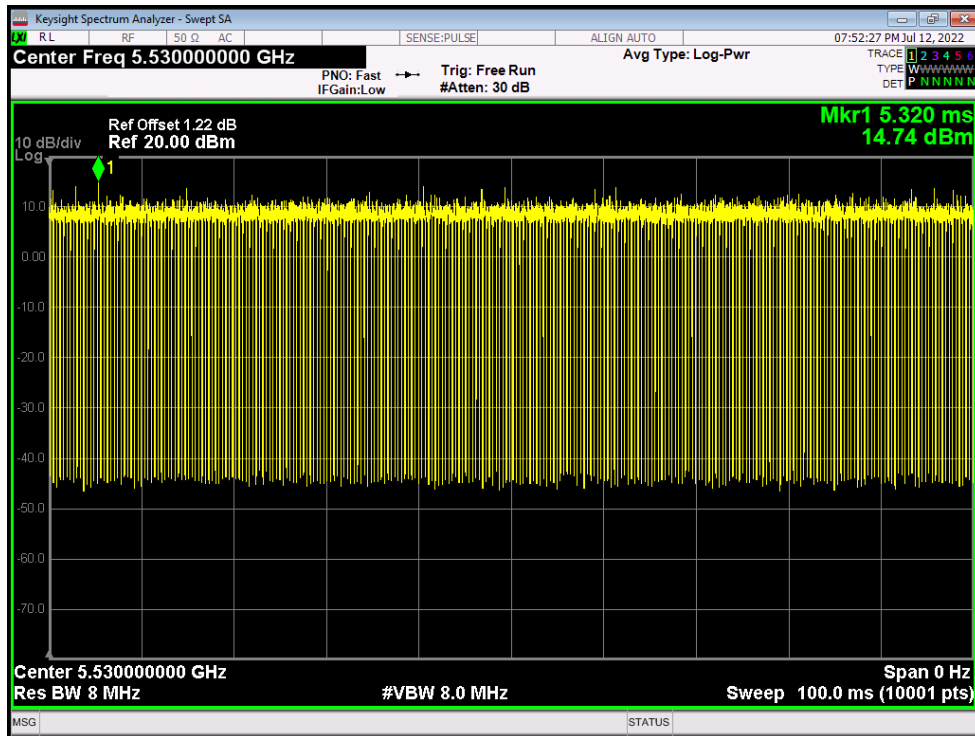


Duty Cycle NVNT ac80 5610MHz Ant1

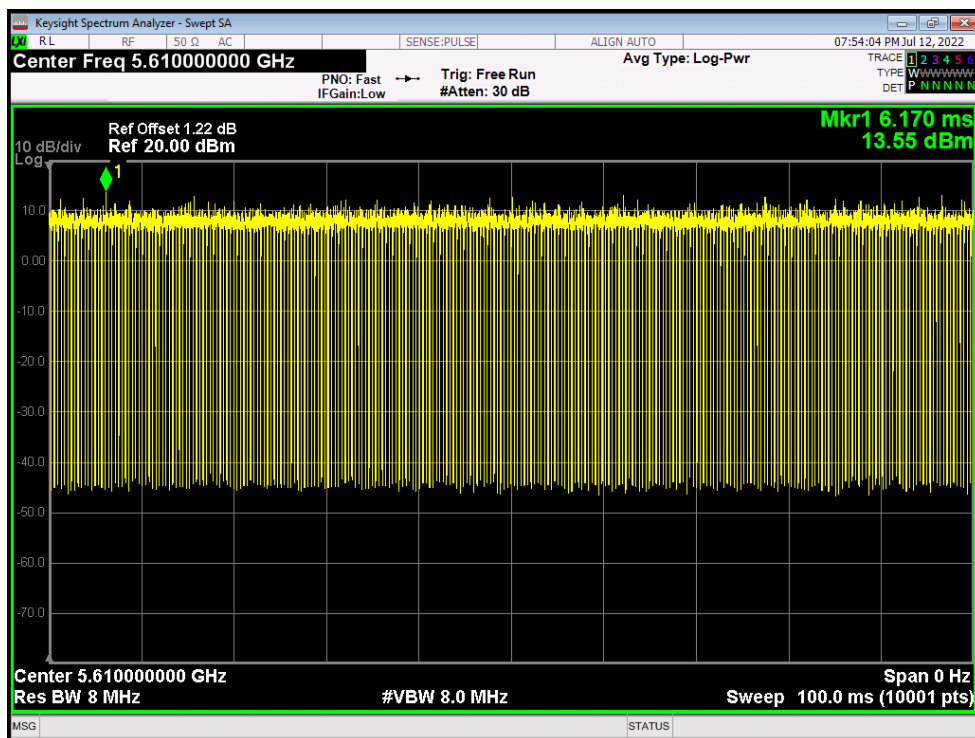


Duty Cycle NVNT n20 5500MHz Ant1

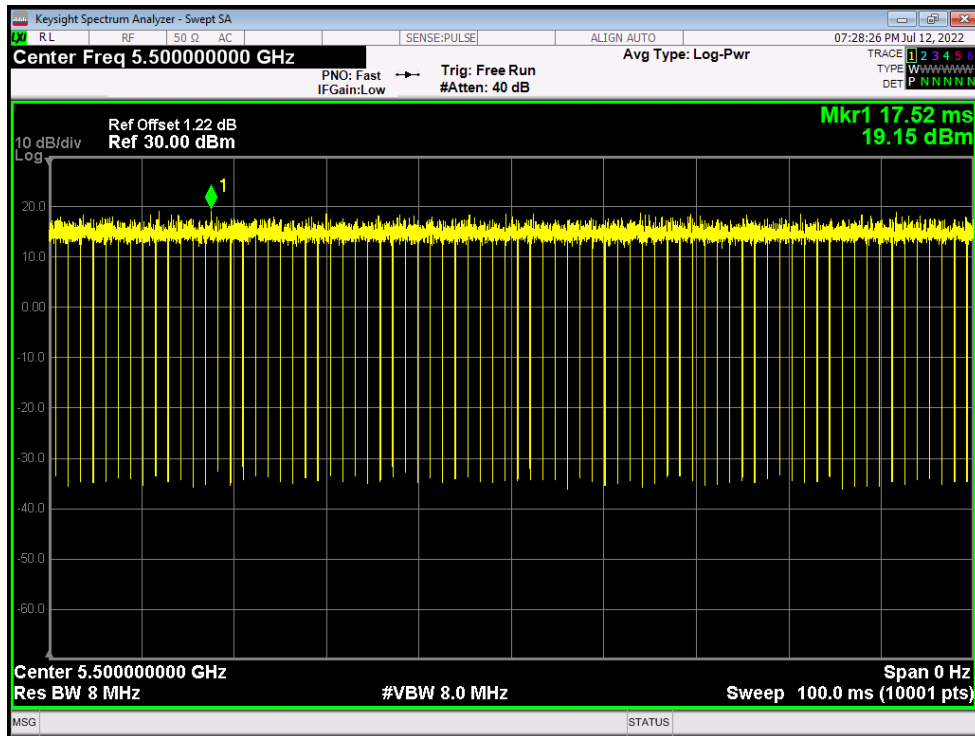


Duty Cycle NVNT n20 5600MHz Ant1

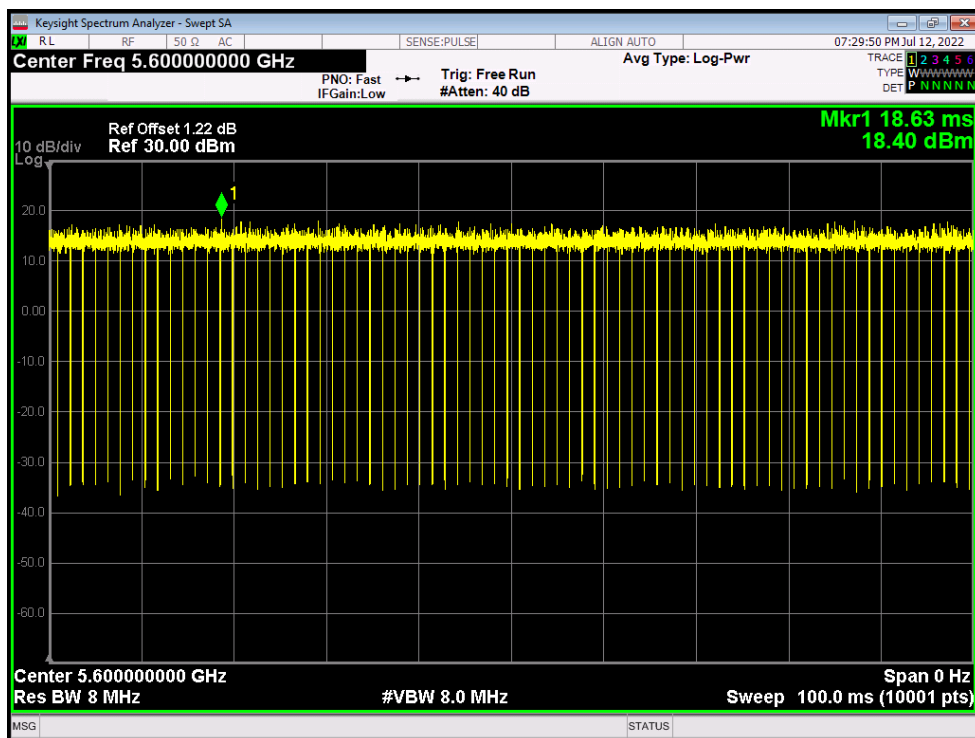


Duty Cycle NVNT n20 5700MHz Ant1

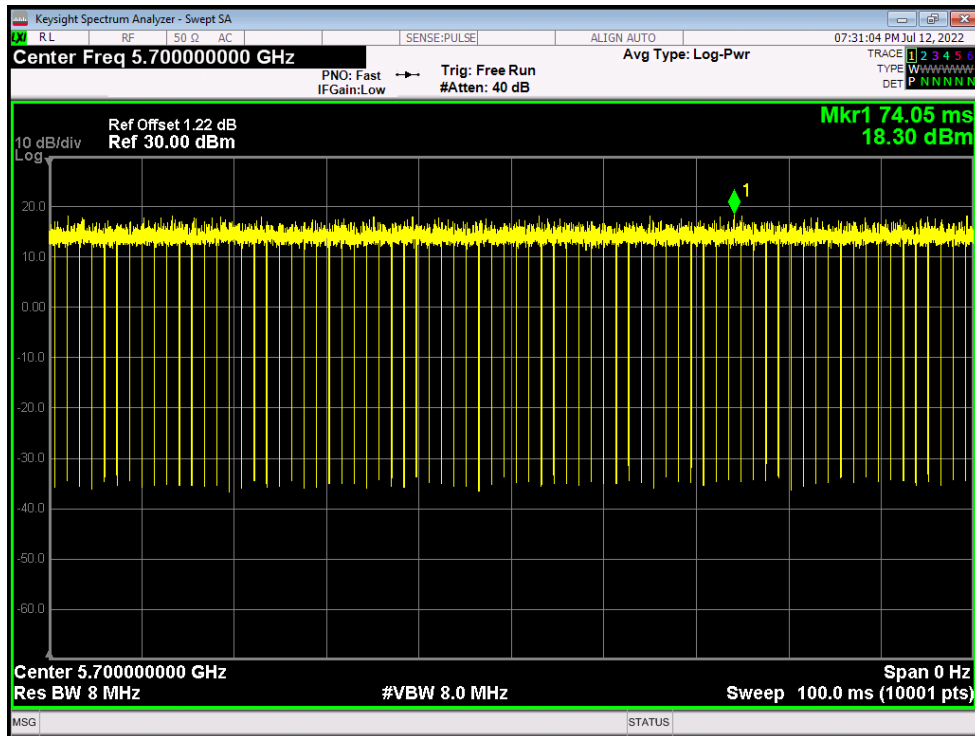


Duty Cycle NVNT n40 5510MHz Ant1

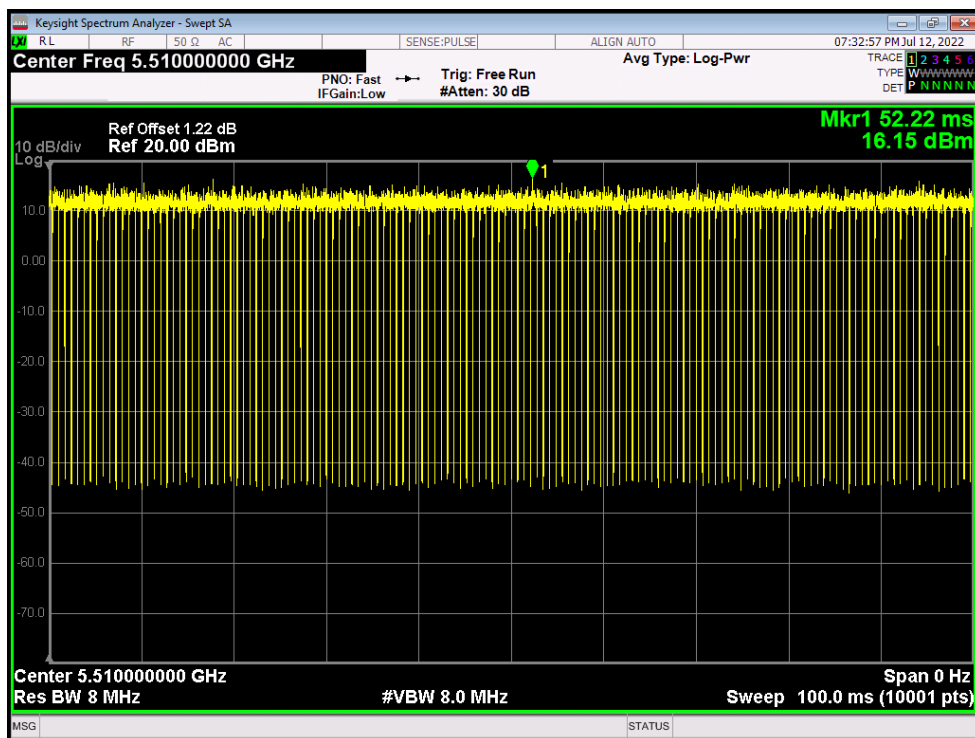

Duty Cycle NVNT n40 5590MHz Ant1

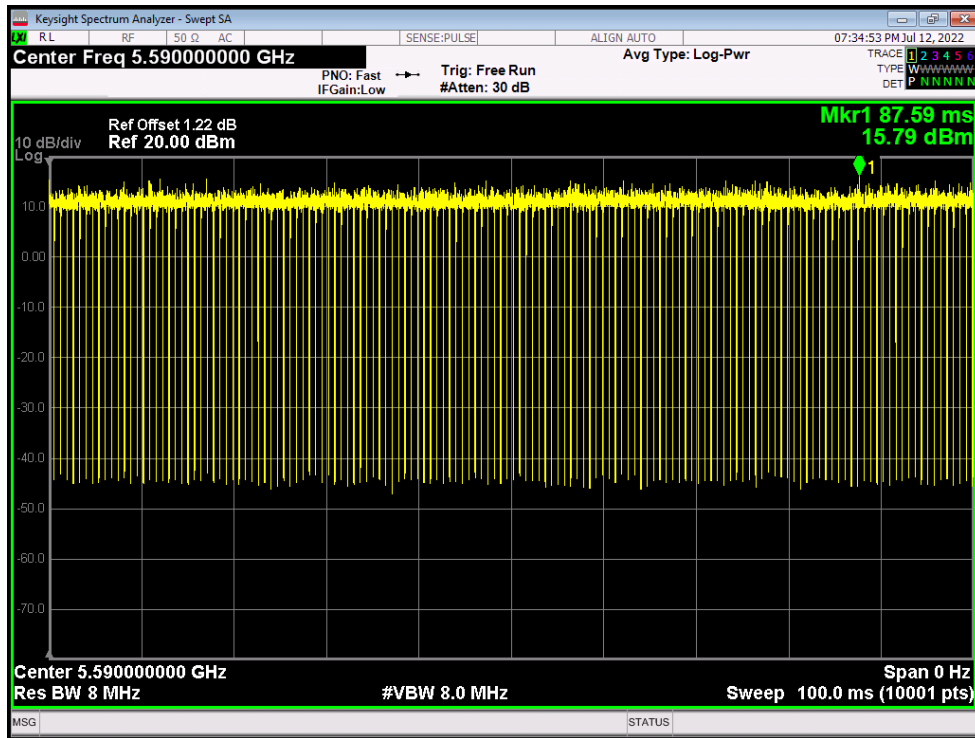

Duty Cycle NVNT n40 5670MHz Ant1

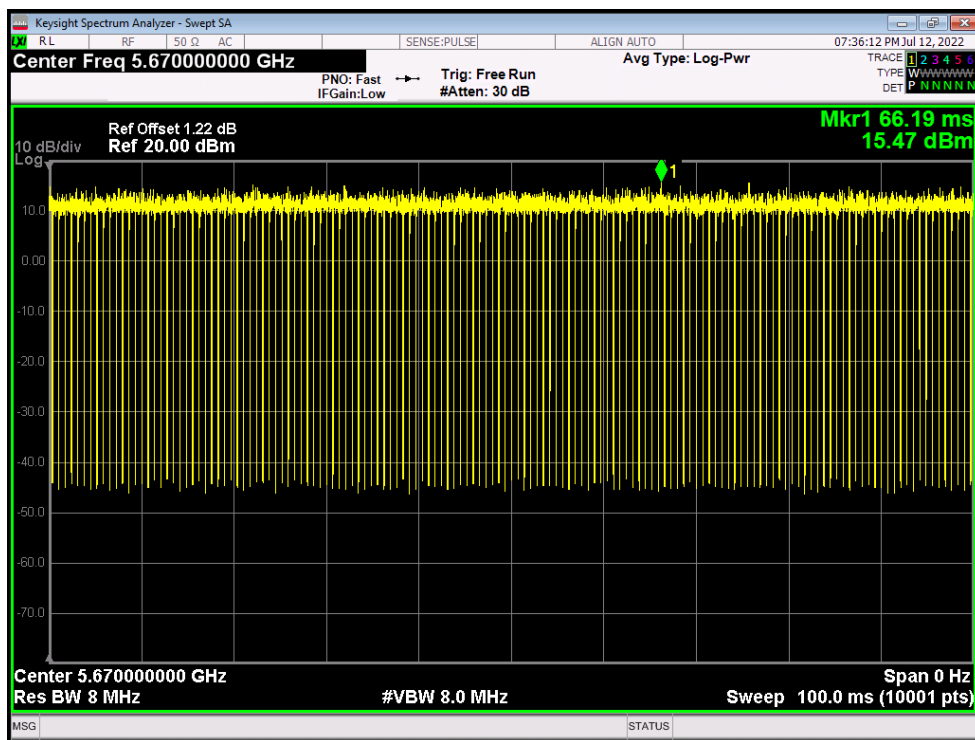


Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	10.163	0.1	10.263	24	Pass
NVNT	a	5600	Ant1	10.288	0.1	10.388	24	Pass
NVNT	a	5700	Ant1	10.327	0.1	10.427	24	Pass
NVNT	ac20	5500	Ant1	10.45	0.1	10.55	24	Pass

NVNT	ac20	5600	Ant1	9.718	0.1	9.818	24	Pass
NVNT	ac20	5700	Ant1	9.729	0.1	9.829	24	Pass
NVNT	ac40	5510	Ant1	10.098	0.21	10.308	24	Pass
NVNT	ac40	5590	Ant1	9.746	0.19	9.936	24	Pass
NVNT	ac40	5670	Ant1	9.823	0.21	10.033	24	Pass
NVNT	ac80	5530	Ant1	9.808	0.39	10.198	24	Pass
NVNT	ac80	5610	Ant1	9.14	0.39	9.53	24	Pass
NVNT	n20	5500	Ant1	10.55	0.1	10.65	24	Pass
NVNT	n20	5600	Ant1	9.783	0.1	9.883	24	Pass
NVNT	n20	5700	Ant1	9.749	0.1	9.849	24	Pass
NVNT	n40	5510	Ant1	10.098	0.2	10.298	24	Pass
NVNT	n40	5590	Ant1	9.646	0.2	9.846	24	Pass
NVNT	n40	5670	Ant1	9.635	0.2	9.835	24	Pass


Power NVNT a 5500MHz Ant1

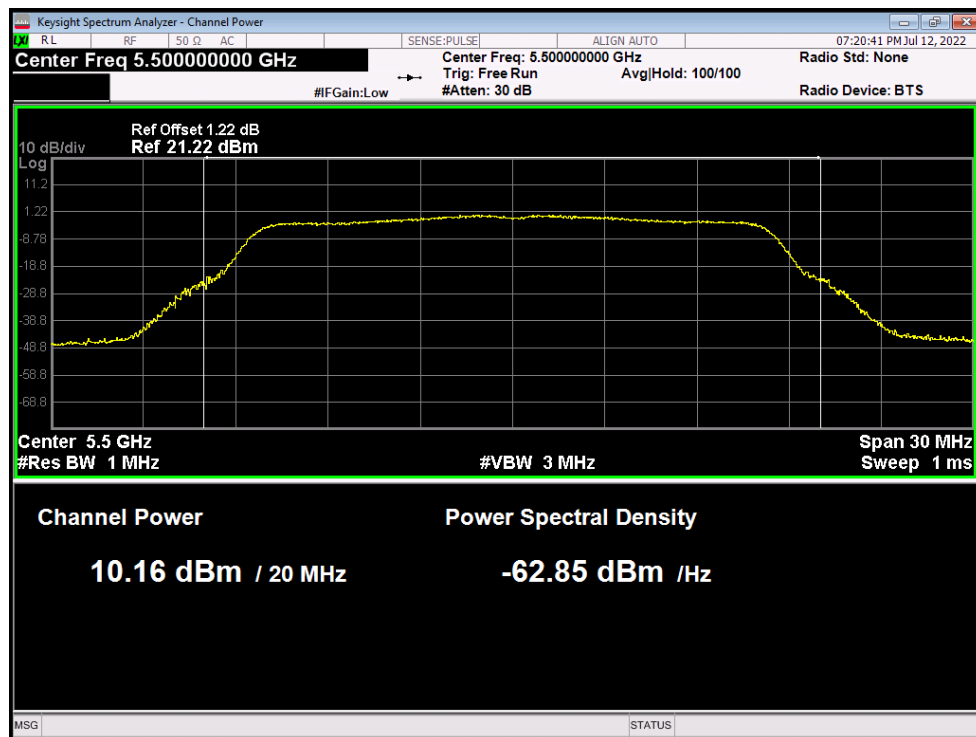


Power NVNT a 5600MHz Ant1

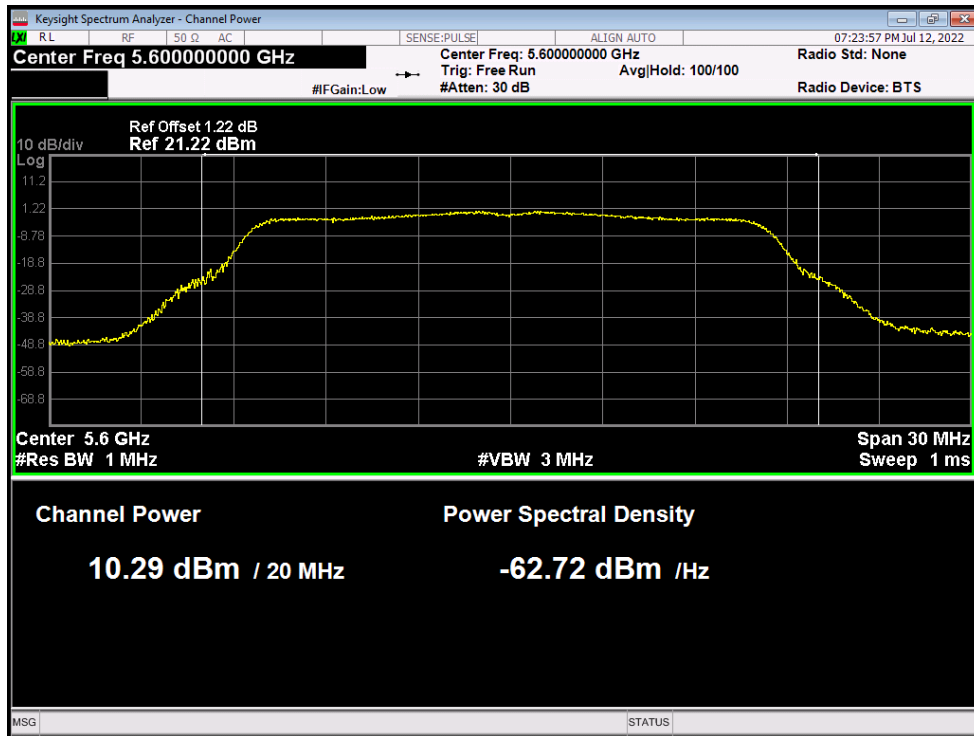


Power NVNT a 5700MHz Ant1

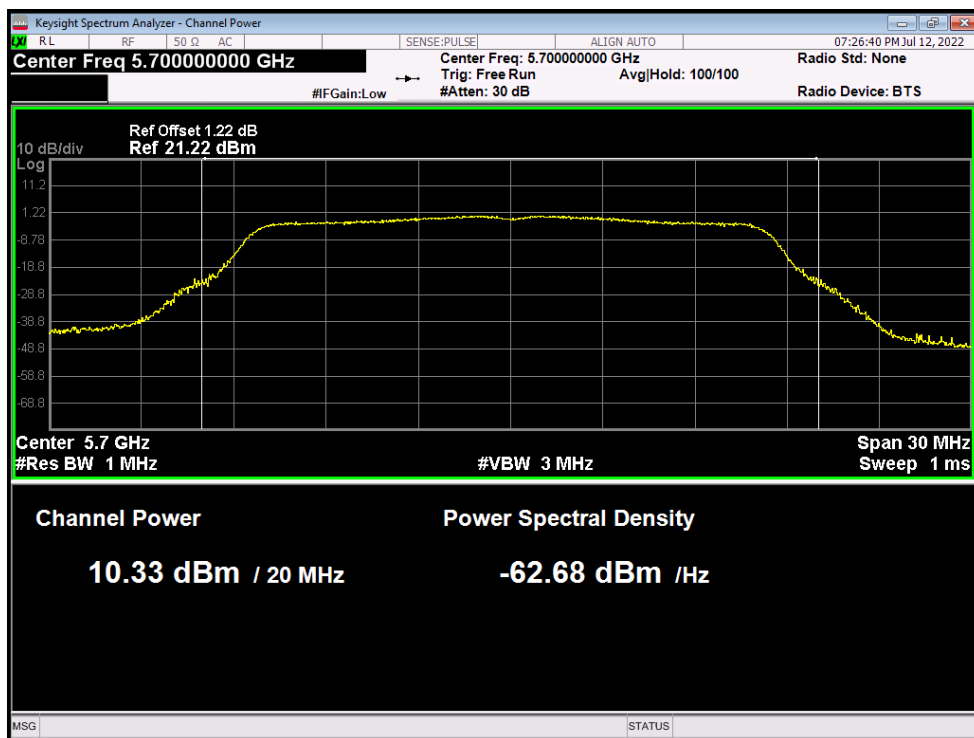


Power NVNT ac20 5500MHz Ant1

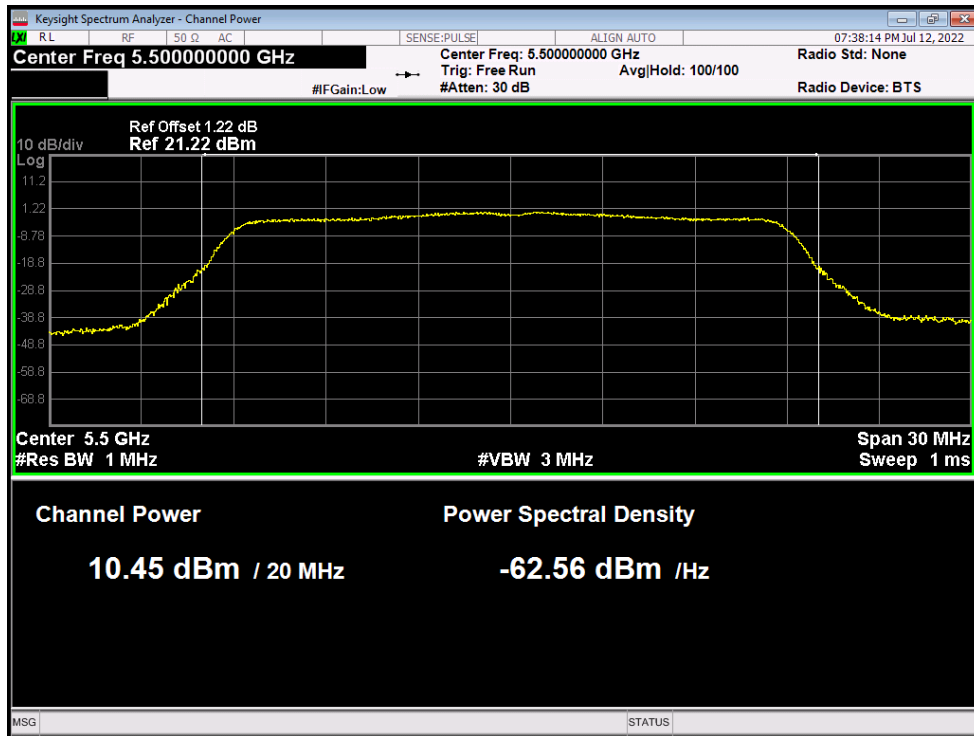


Power NVNT ac20 5600MHz Ant1

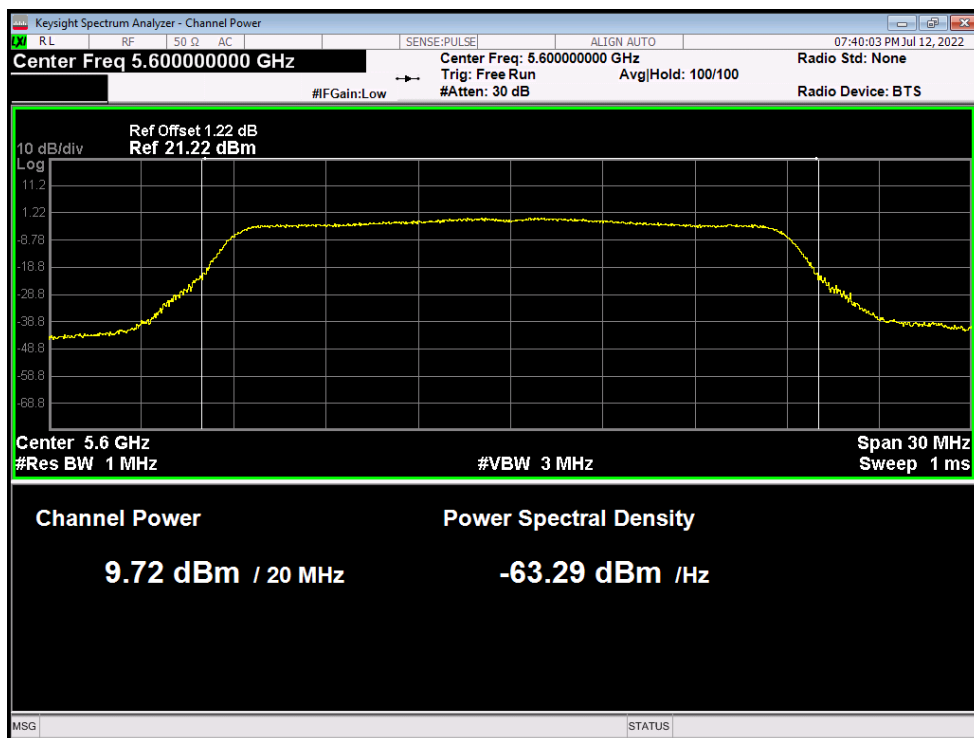


Power NVNT ac20 5700MHz Ant1

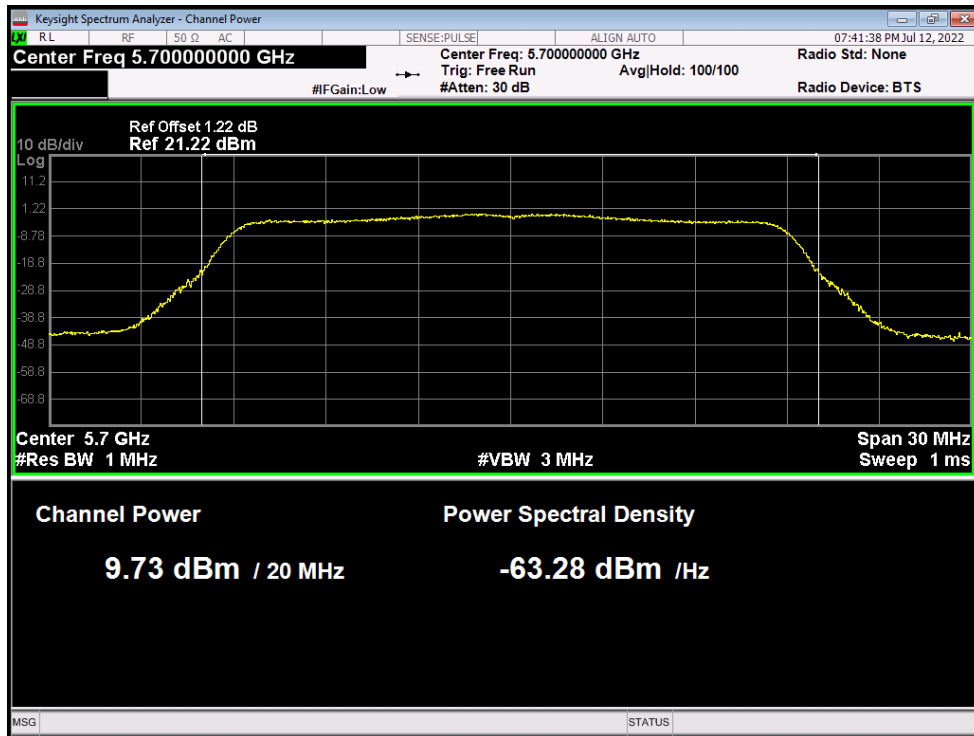


Power NVNT ac40 5510MHz Ant1

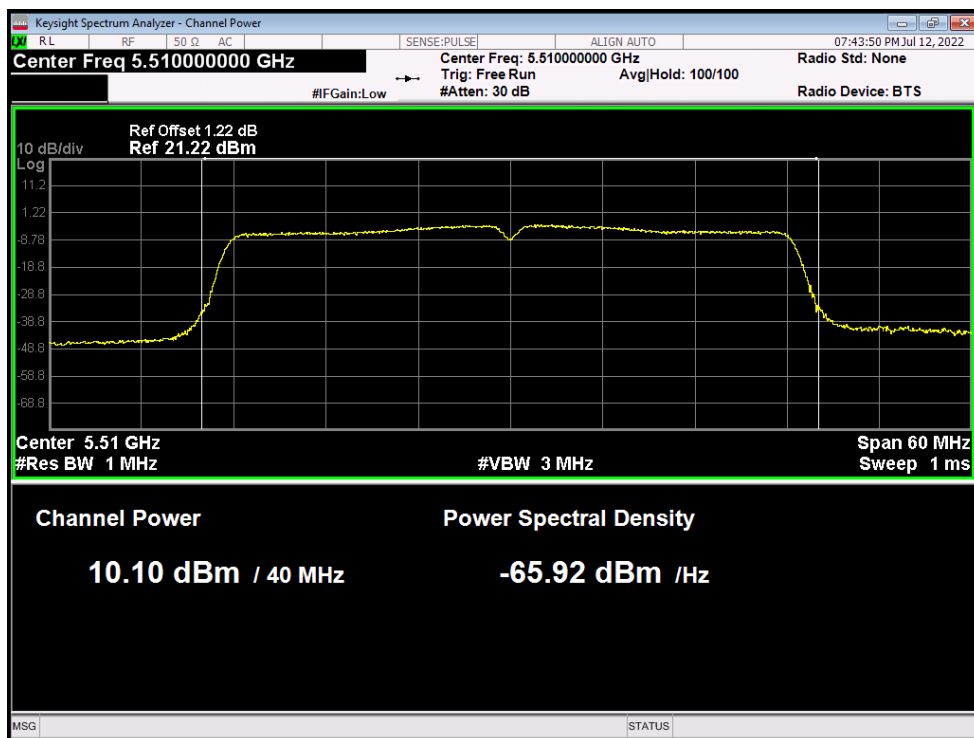


Power NVNT ac40 5590MHz Ant1

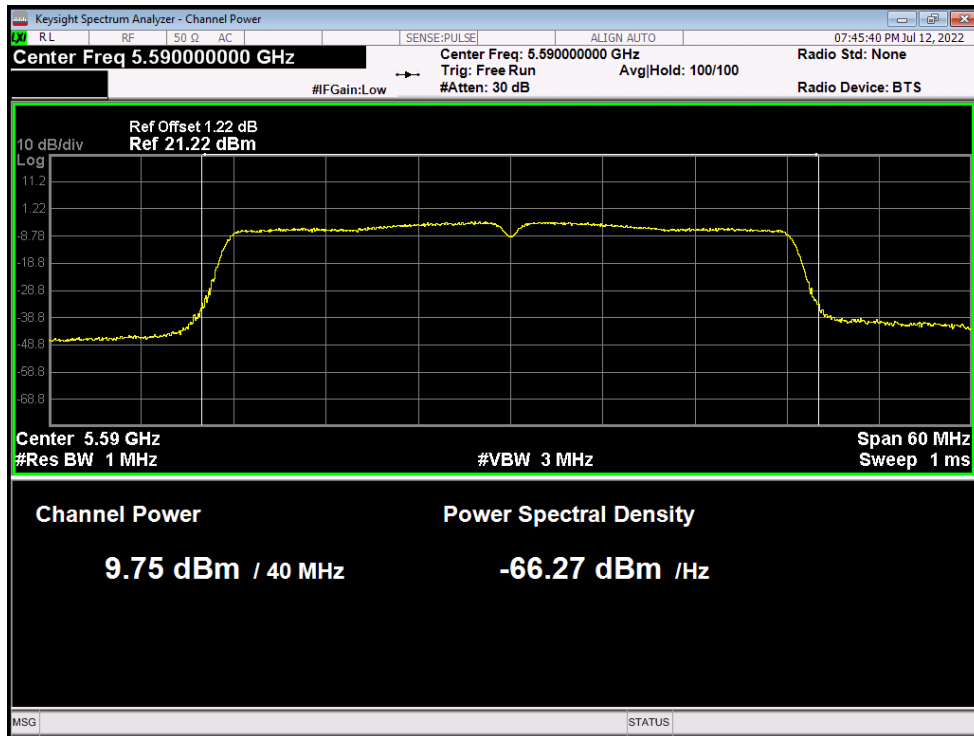


Power NVNT ac40 5670MHz Ant1

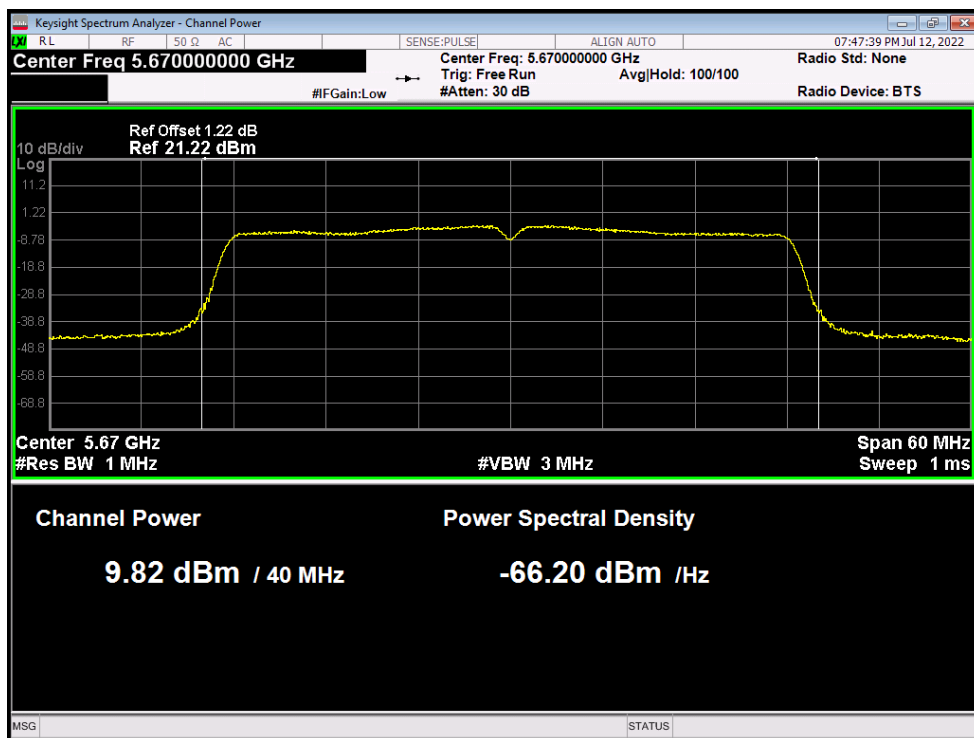


Power NVNT ac80 5530MHz Ant1

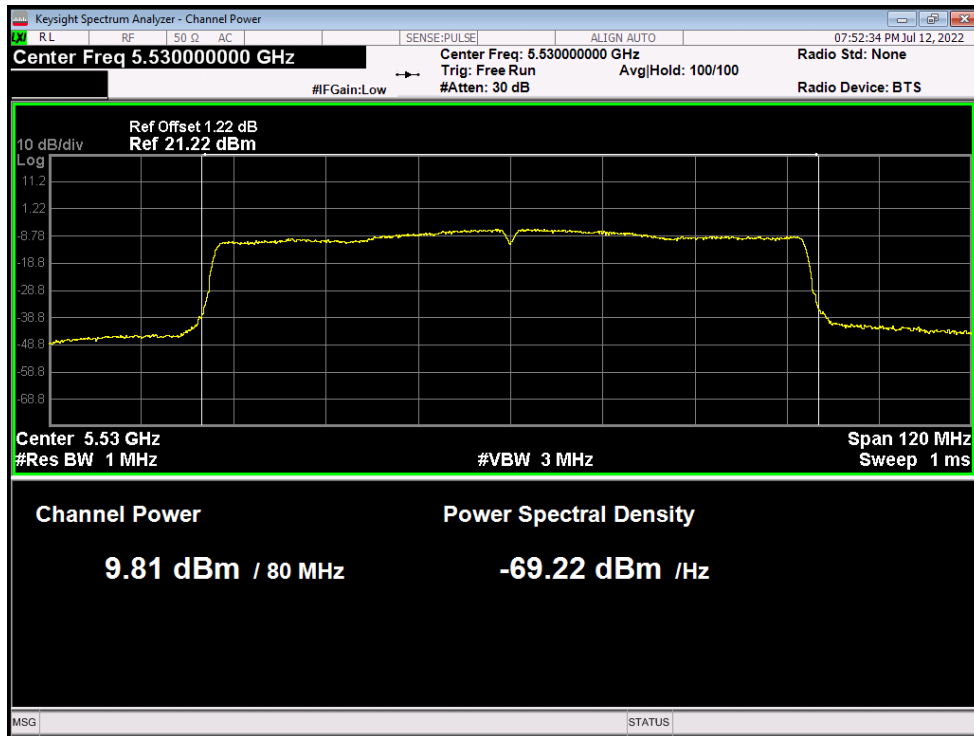


Power NVNT ac80 5610MHz Ant1

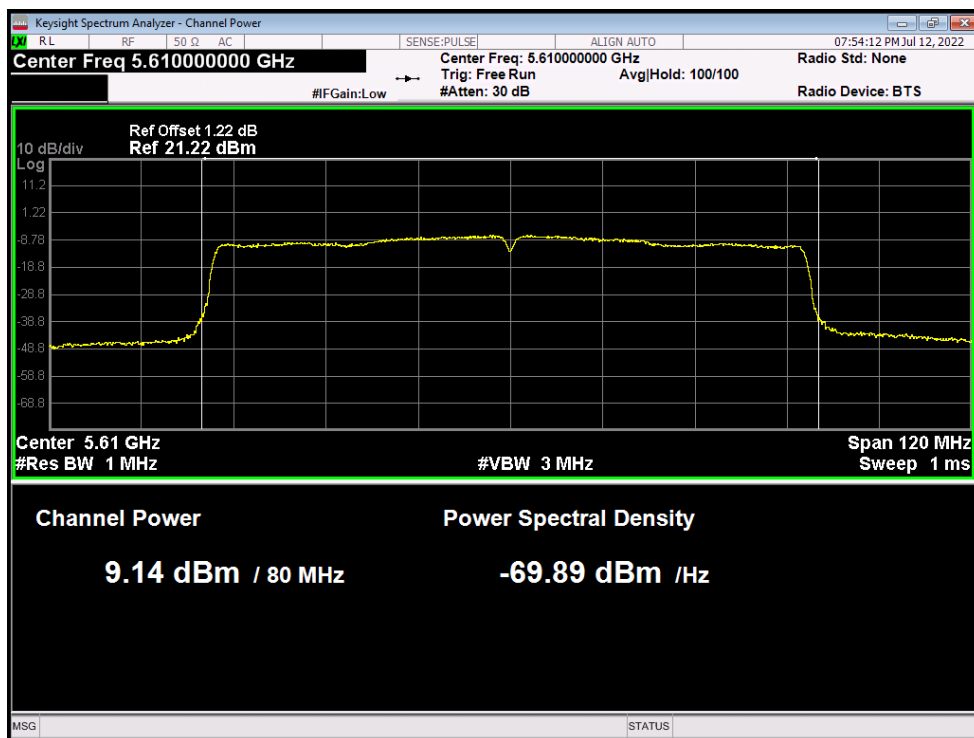


Power NVNT n20 5500MHz Ant1

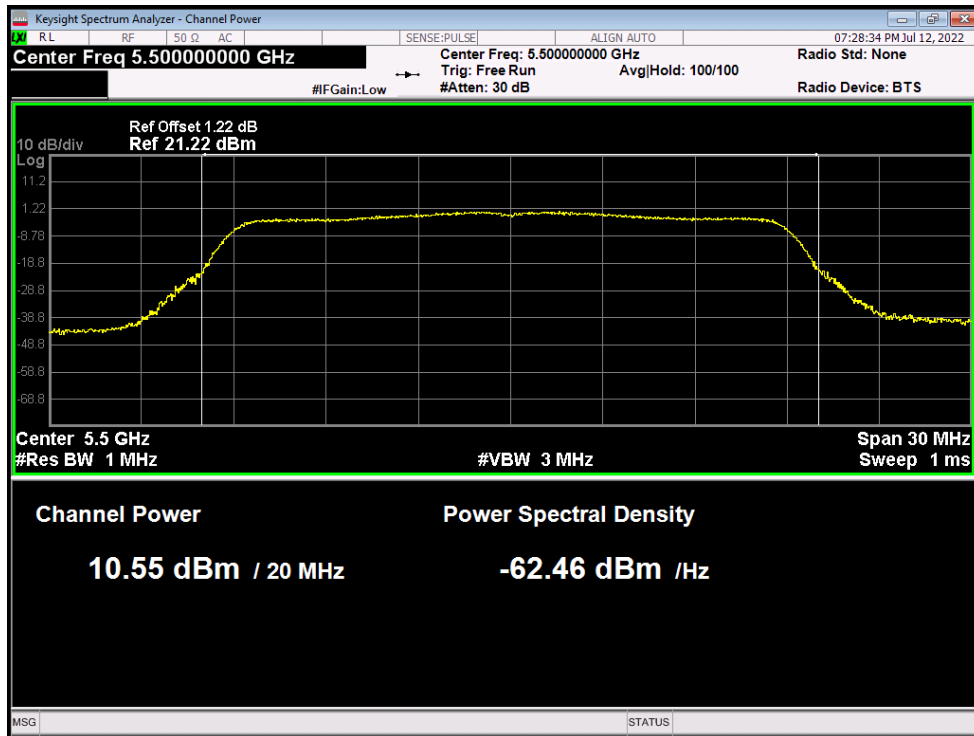


Power NVNT n20 5600MHz Ant1

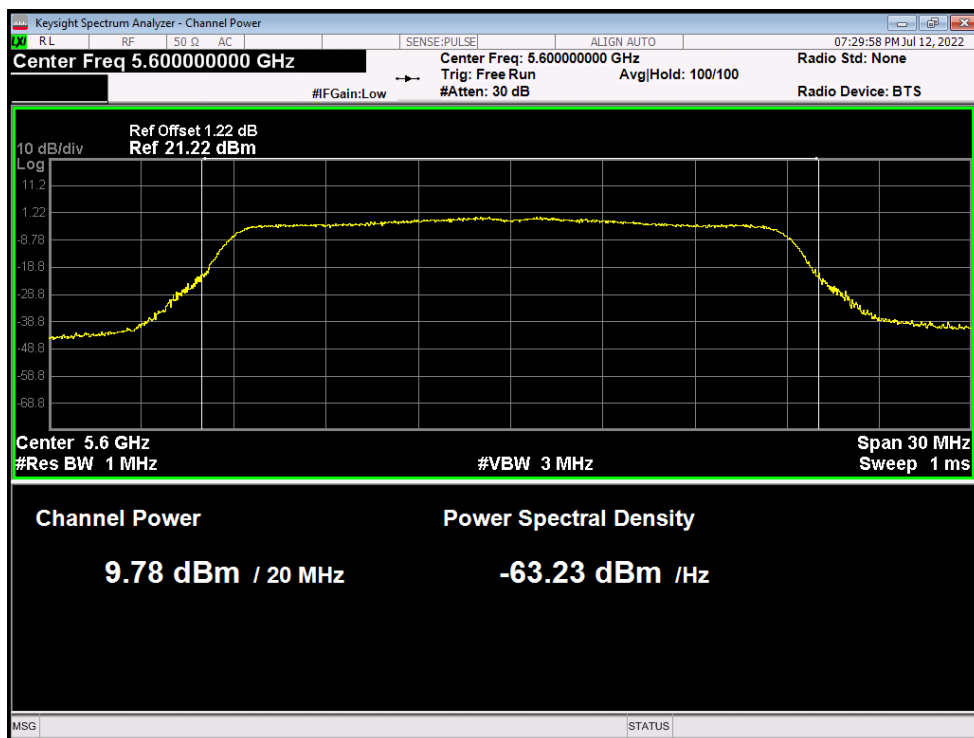


Power NVNT n20 5700MHz Ant1

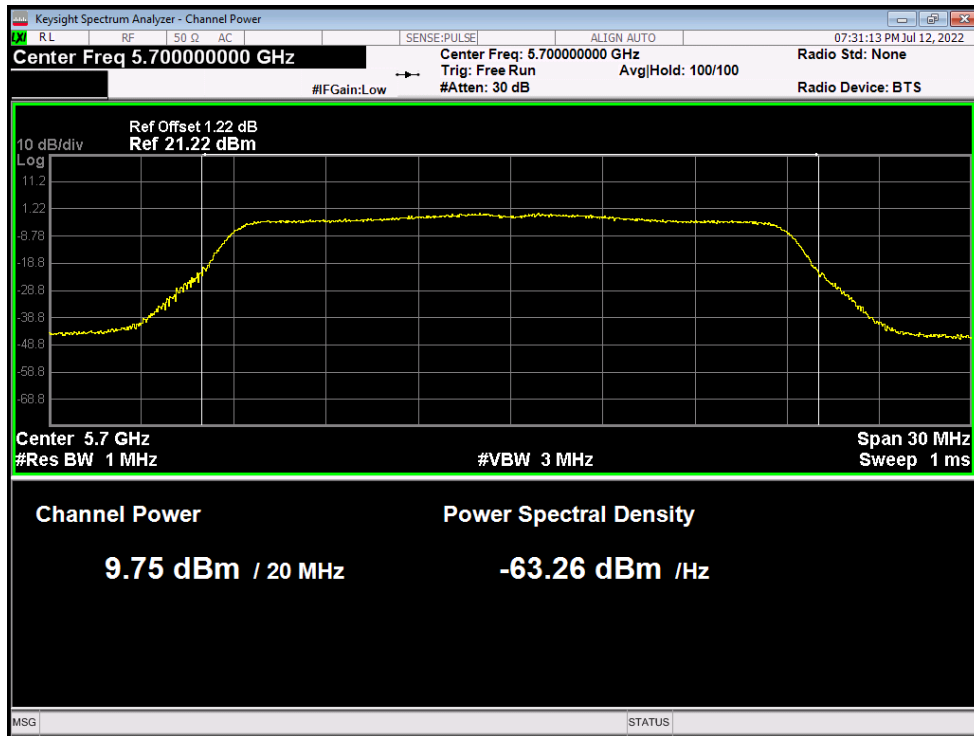


Power NVNT n40 5510MHz Ant1

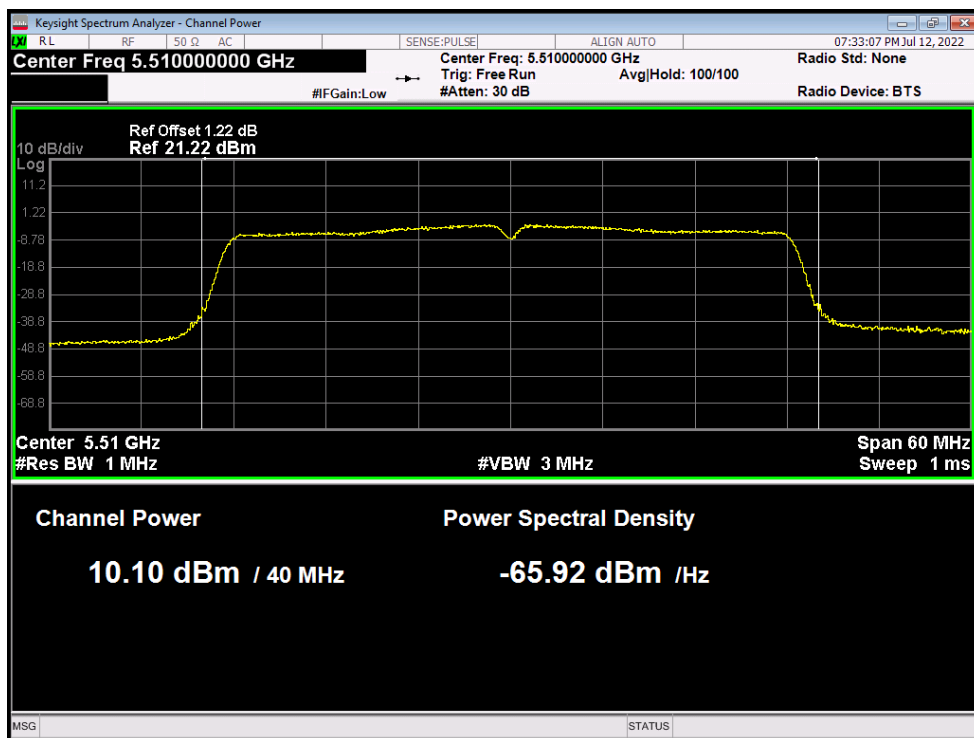

Power NVNT n40 5590MHz Ant1

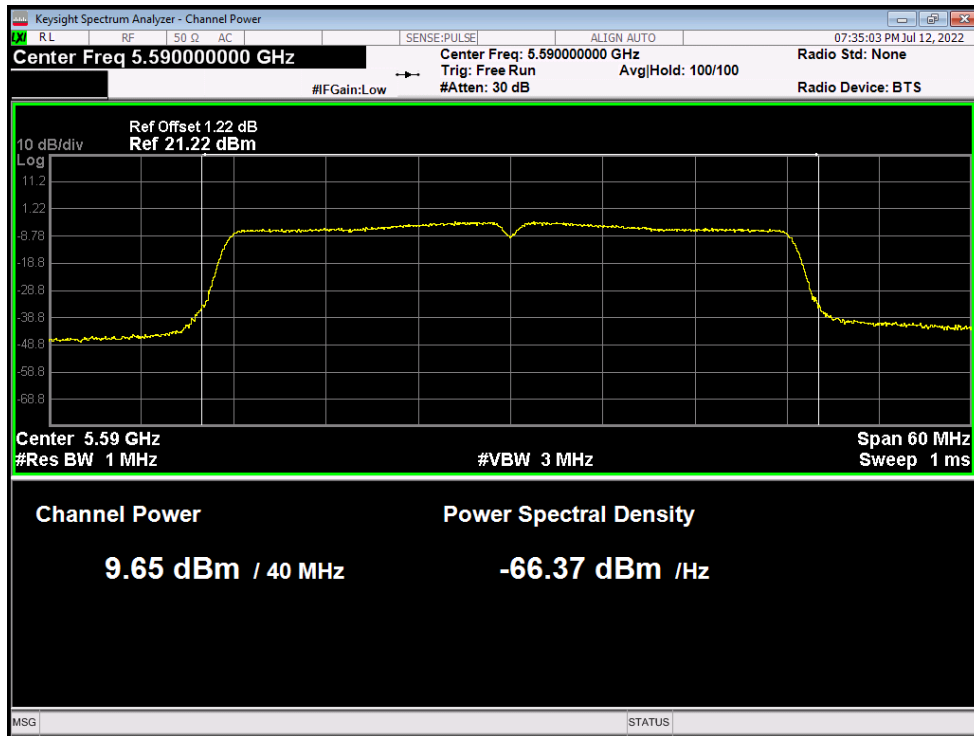

Power NVNT n40 5670MHz Ant1

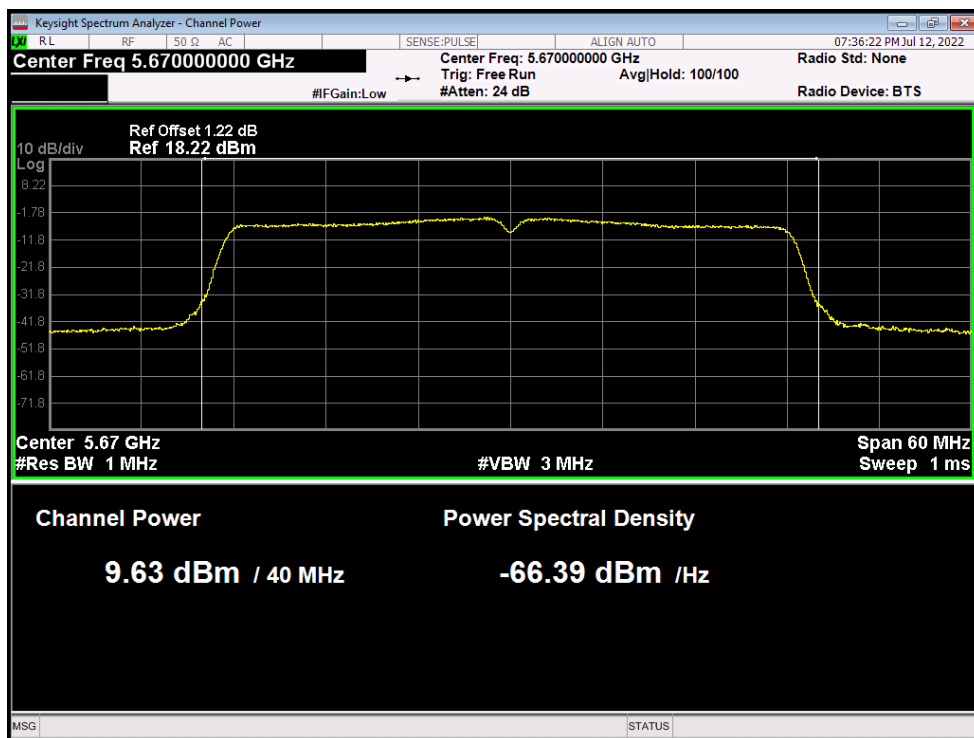


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant1	20.987	Pass
NVNT	a	5600	Ant1	20.963	Pass
NVNT	a	5700	Ant1	21.232	Pass
NVNT	ac20	5500	Ant1	21.101	Pass
NVNT	ac20	5600	Ant1	21.391	Pass

NVNT	ac20	5700	Ant1	21.291	Pass
NVNT	ac40	5510	Ant1	39.863	Pass
NVNT	ac40	5590	Ant1	39.42	Pass
NVNT	ac40	5670	Ant1	39.777	Pass
NVNT	ac80	5530	Ant1	80.468	Pass
NVNT	ac80	5610	Ant1	80.357	Pass
NVNT	n20	5500	Ant1	21.385	Pass
NVNT	n20	5600	Ant1	21.438	Pass
NVNT	n20	5700	Ant1	21.219	Pass
NVNT	n40	5510	Ant1	39.735	Pass
NVNT	n40	5590	Ant1	39.328	Pass
NVNT	n40	5670	Ant1	39.591	Pass


-26dB Bandwidth NVNT a 5500MHz Ant1

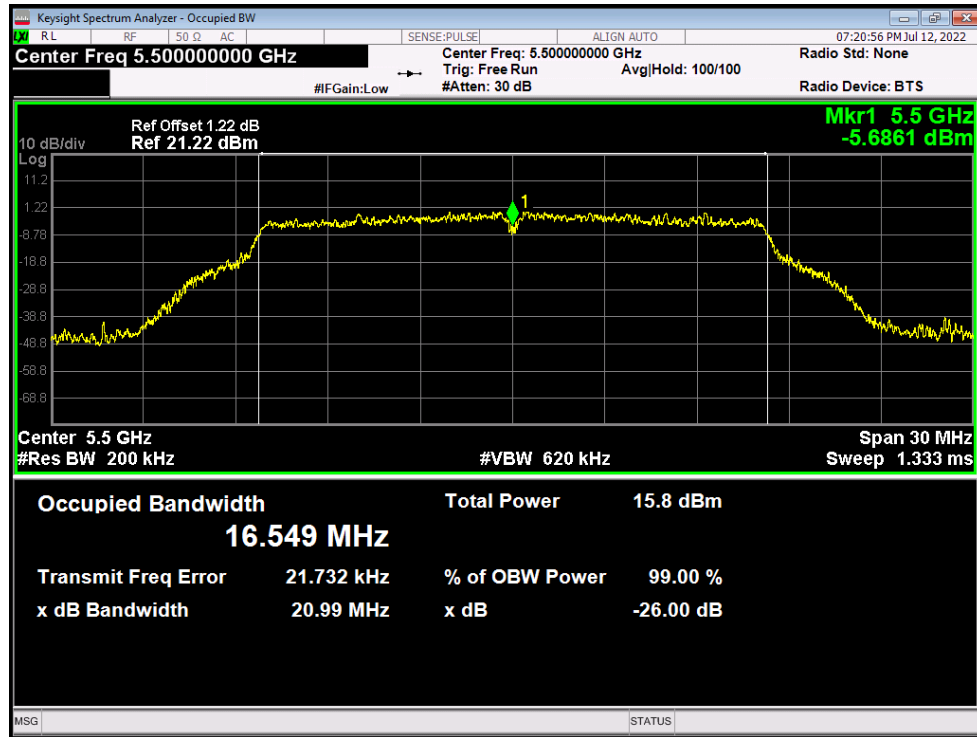


-26dB Bandwidth NVNT a 5600MHz Ant1

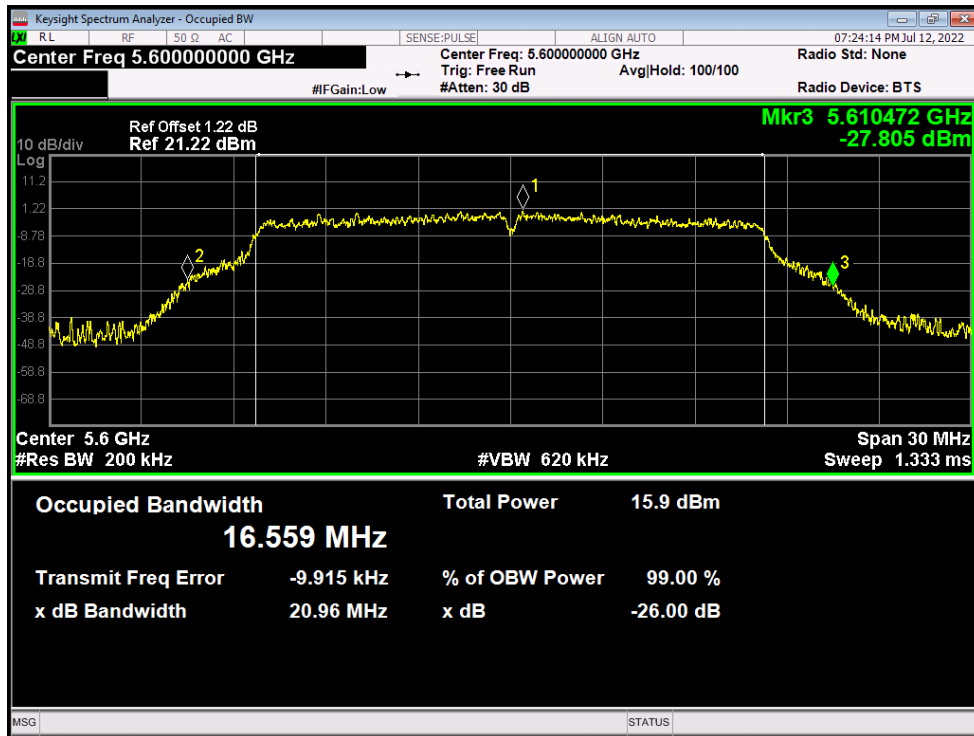


-26dB Bandwidth NVNT a 5700MHz Ant1

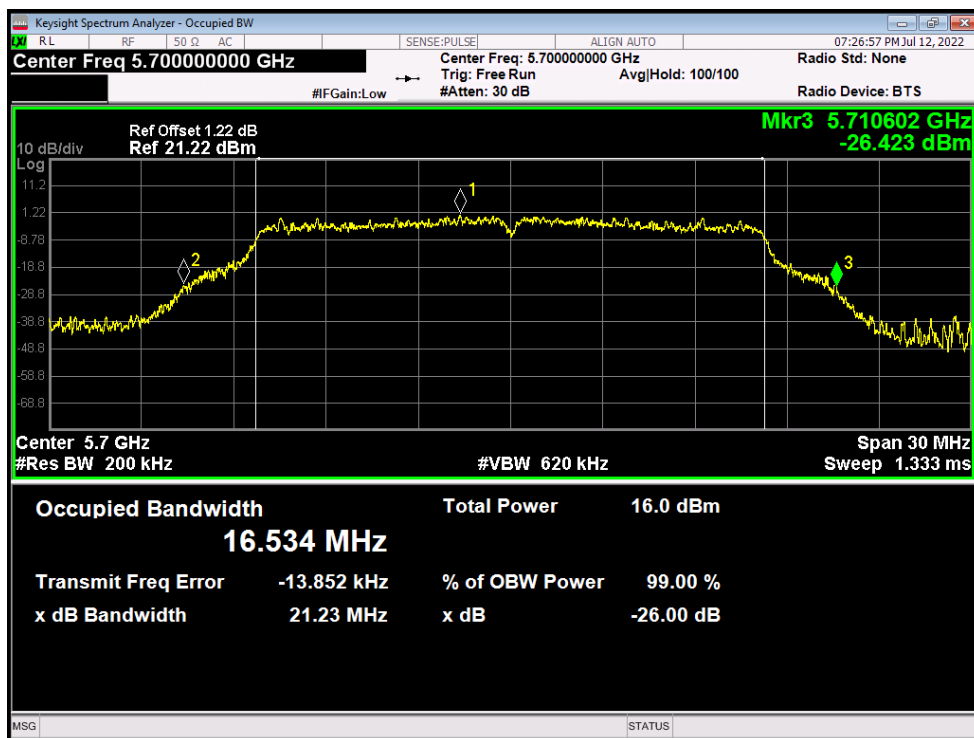


-26dB Bandwidth NVNT ac20 5500MHz Ant1

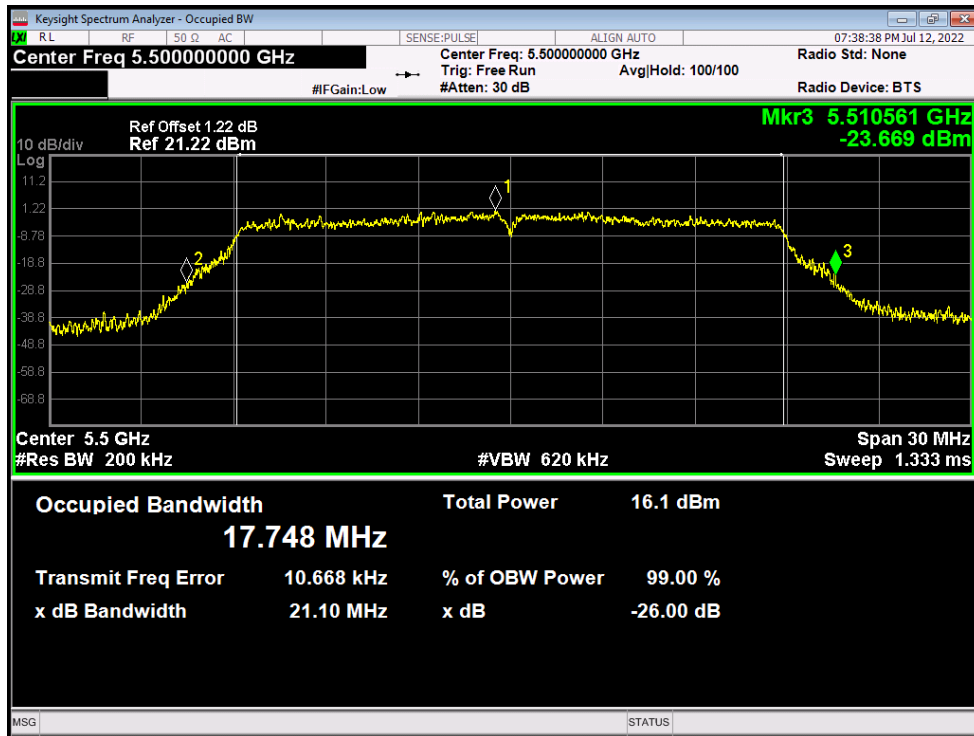


-26dB Bandwidth NVNT ac20 5600MHz Ant1

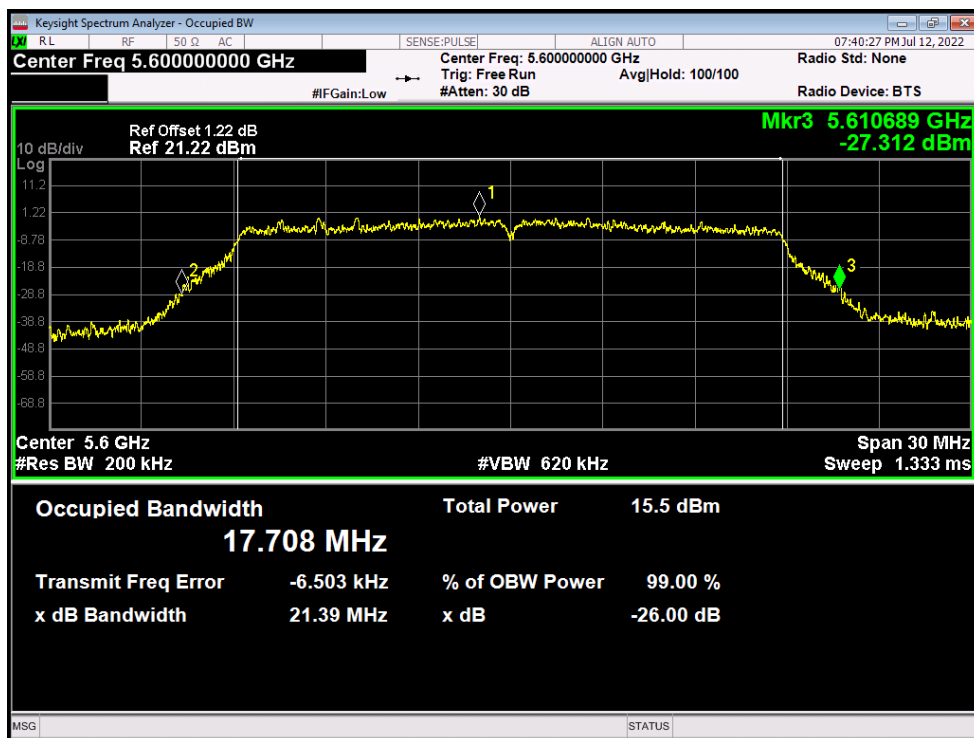


-26dB Bandwidth NVNT ac20 5700MHz Ant1

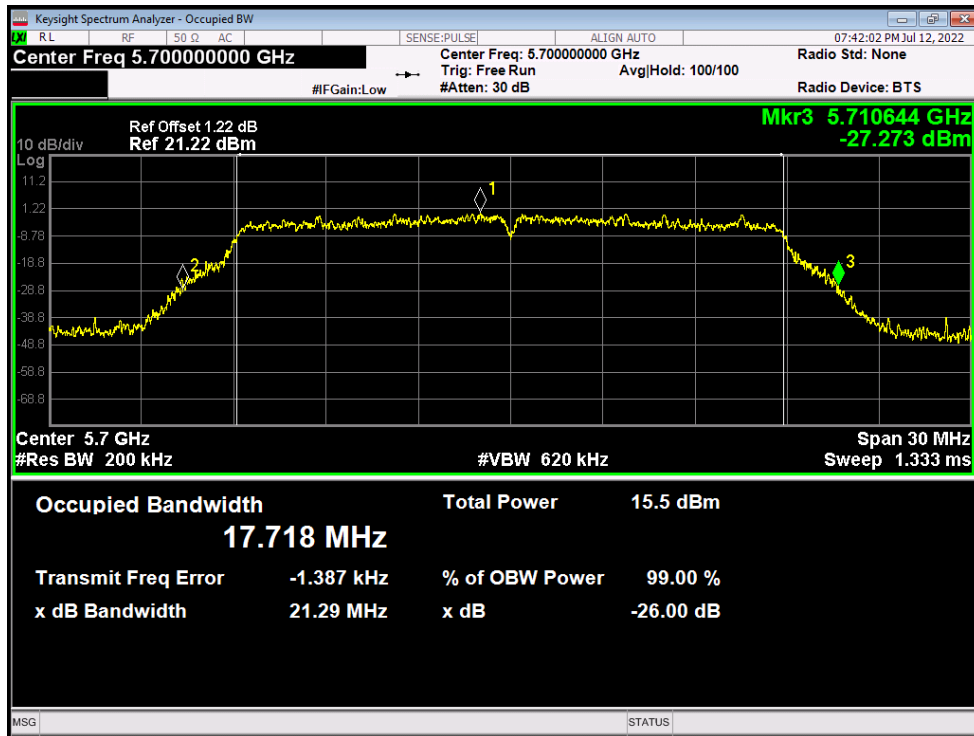


-26dB Bandwidth NVNT ac40 5510MHz Ant1

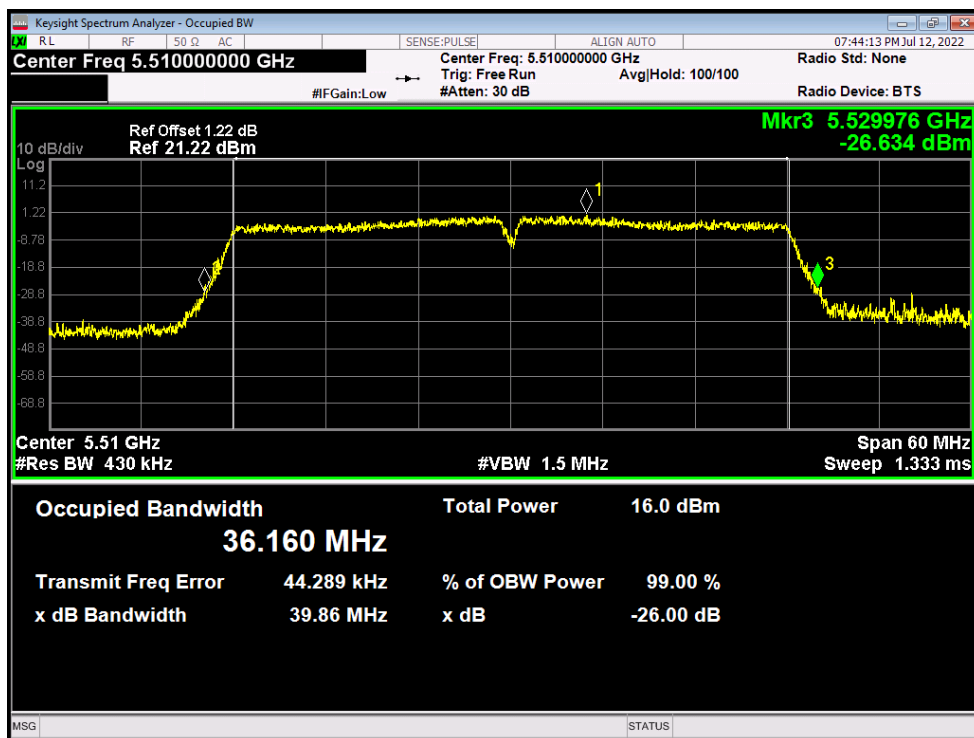


-26dB Bandwidth NVNT ac40 5590MHz Ant1

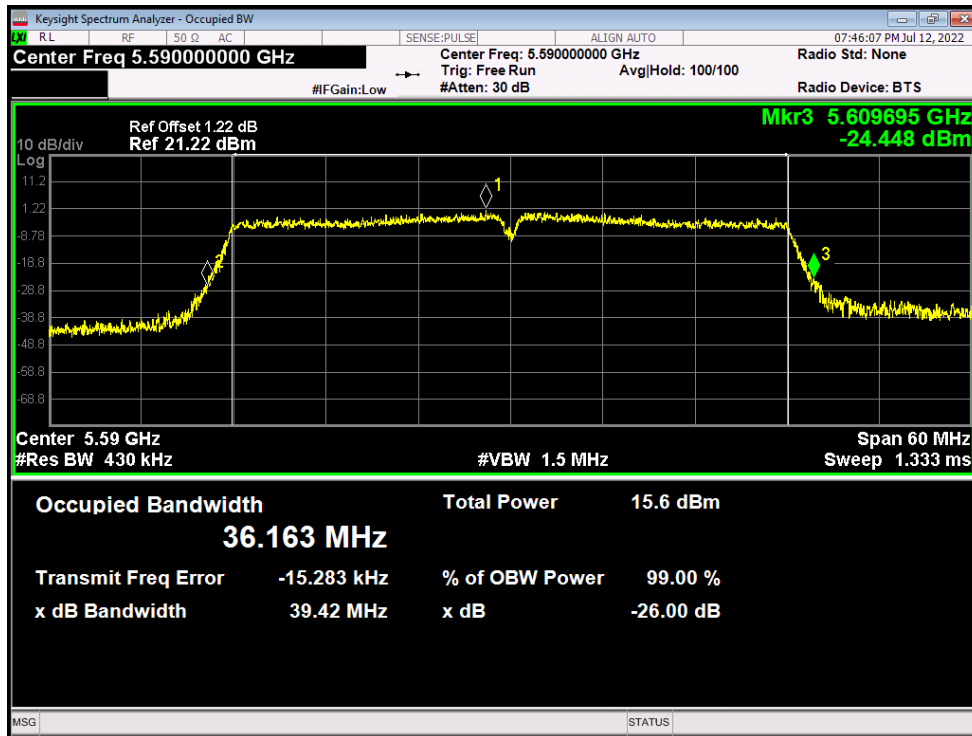


-26dB Bandwidth NVNT ac40 5670MHz Ant1

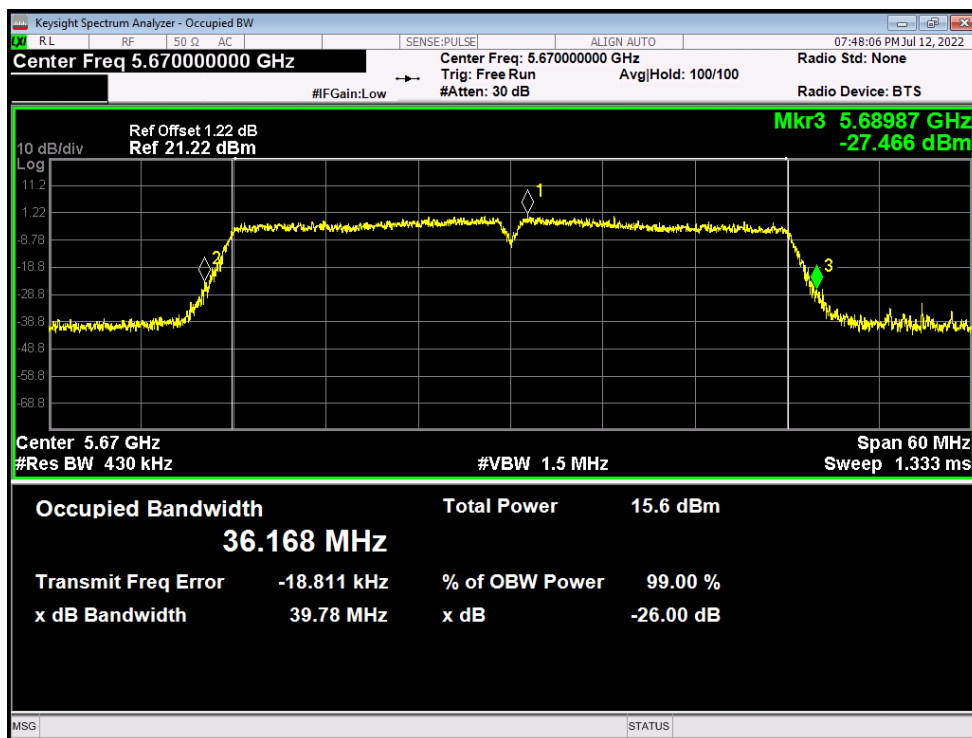


-26dB Bandwidth NVNT ac80 5530MHz Ant1

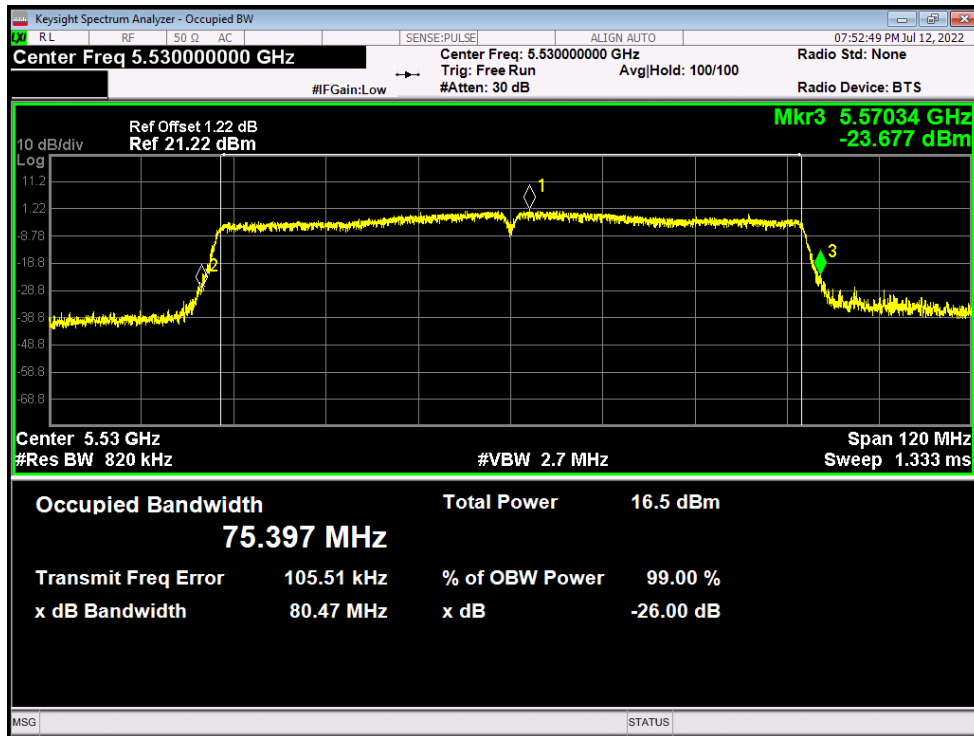


-26dB Bandwidth NVNT ac80 5610MHz Ant1

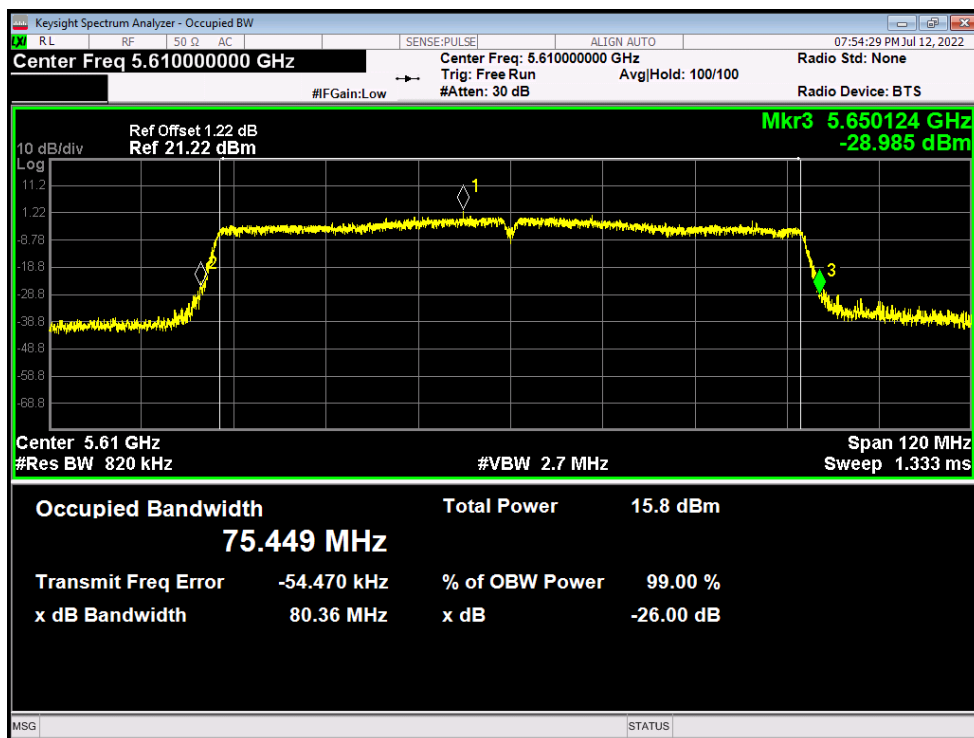


-26dB Bandwidth NVNT n20 5500MHz Ant1

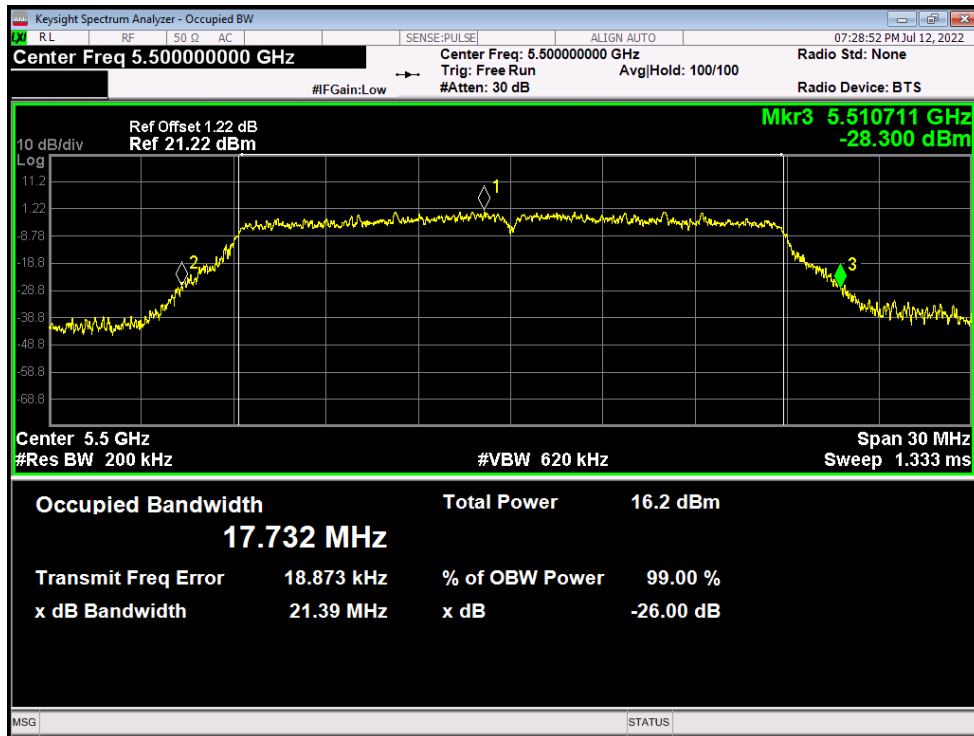


-26dB Bandwidth NVNT n20 5600MHz Ant1

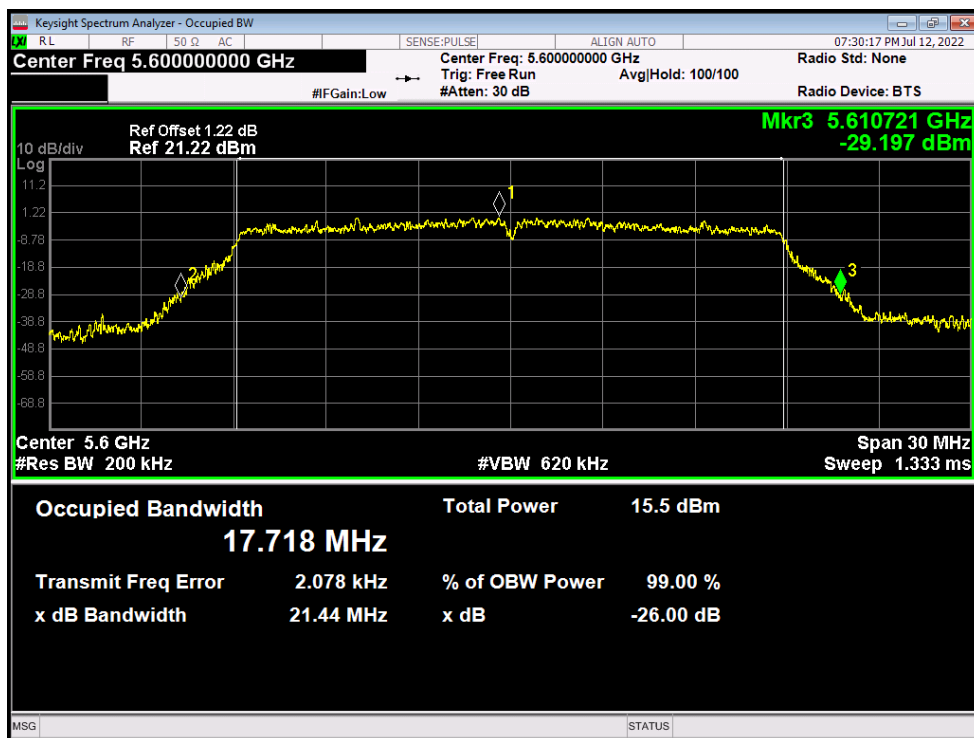


-26dB Bandwidth NVNT n20 5700MHz Ant1

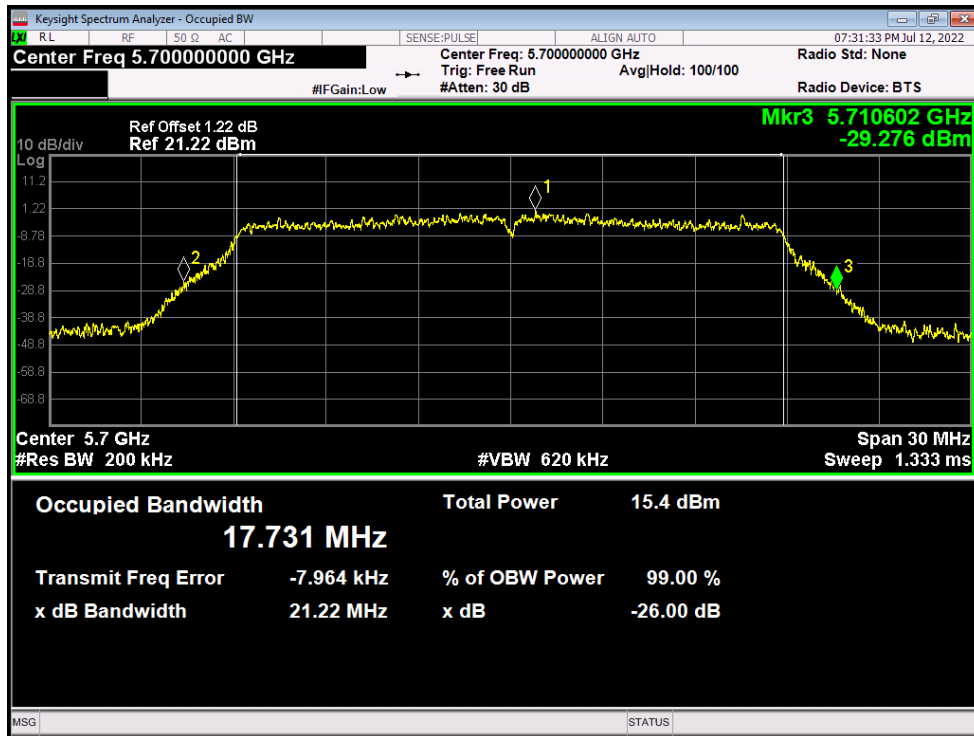


-26dB Bandwidth NVNT n40 5510MHz Ant1

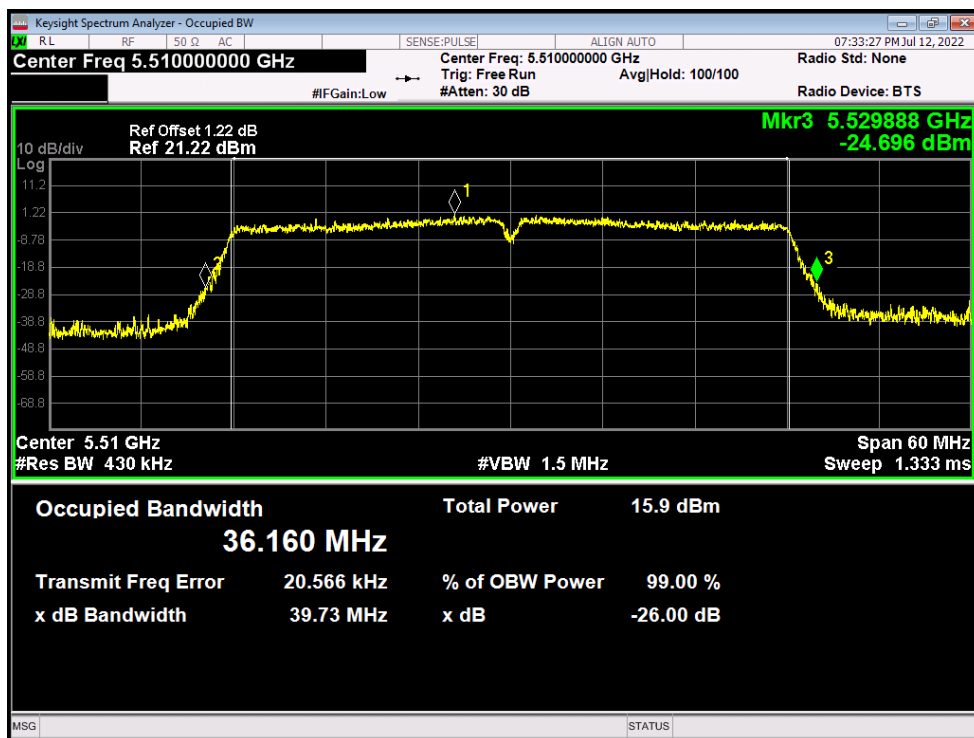

-26dB Bandwidth NVNT n40 5590MHz Ant1

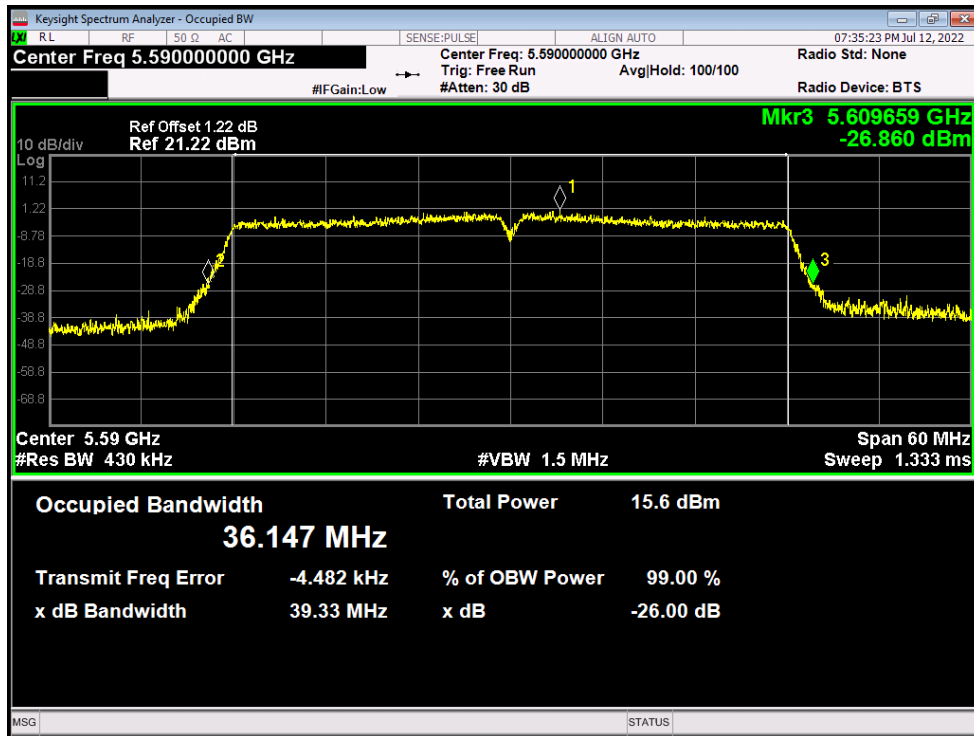

-26dB Bandwidth NVNT n40 5670MHz Ant1

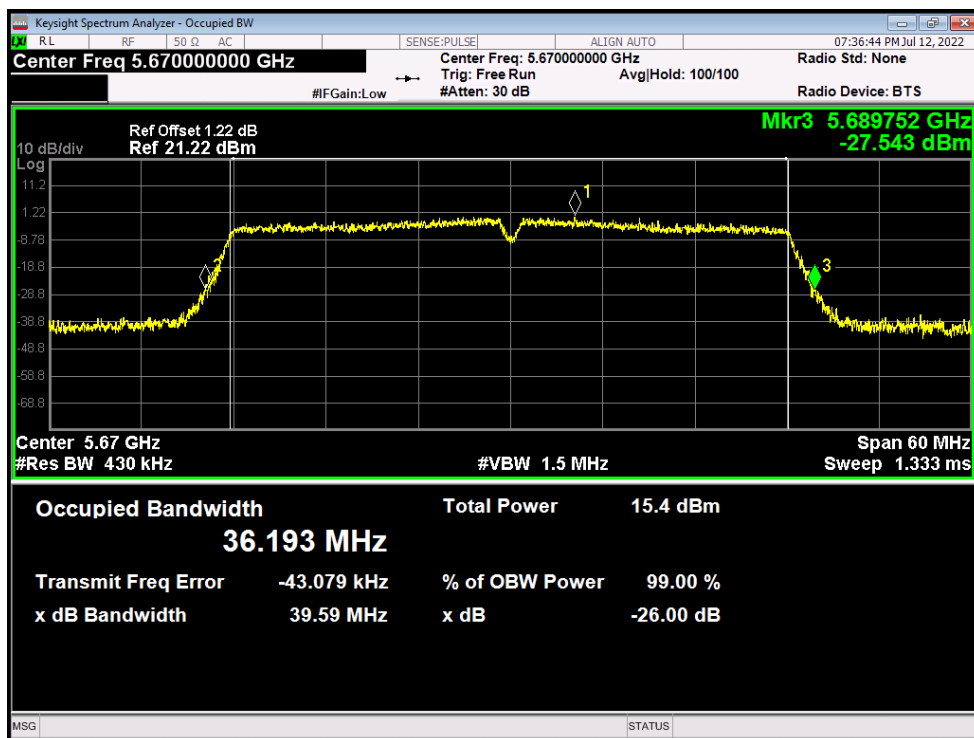


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5500	Ant1	16.56
NVNT	a	5600	Ant1	16.595
NVNT	a	5700	Ant1	16.586
NVNT	ac20	5500	Ant1	17.738
NVNT	ac20	5600	Ant1	17.761

NVNT	ac20	5700	Ant1	17.735
NVNT	ac40	5510	Ant1	36.101
NVNT	ac40	5590	Ant1	36.165
NVNT	ac40	5670	Ant1	36.167
NVNT	ac80	5530	Ant1	75.412
NVNT	ac80	5610	Ant1	75.374
NVNT	n20	5500	Ant1	17.702
NVNT	n20	5600	Ant1	17.704
NVNT	n20	5700	Ant1	17.72
NVNT	n40	5510	Ant1	36.162
NVNT	n40	5590	Ant1	36.162
NVNT	n40	5670	Ant1	36.182


OBW NVNT a 5500MHz Ant1

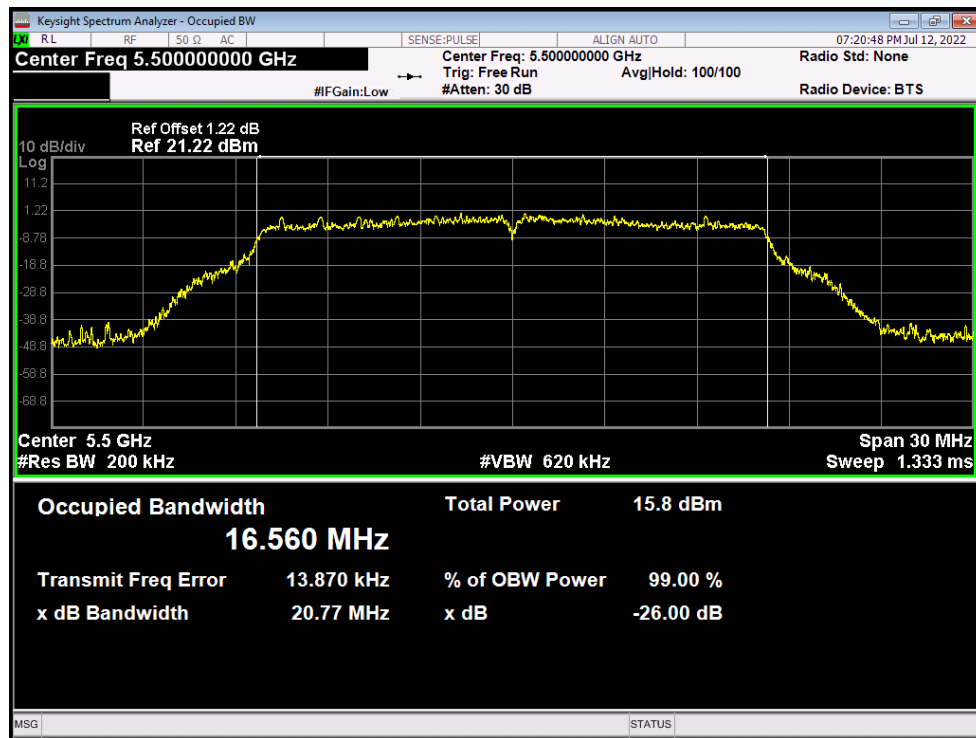


OBW NVNT a 5600MHz Ant1

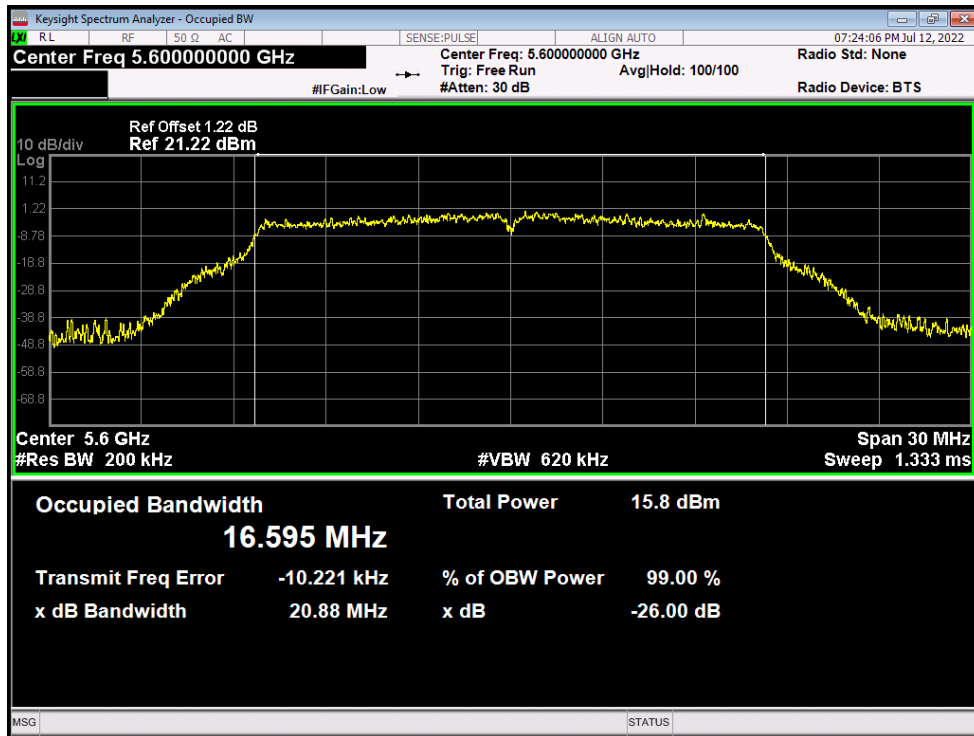


OBW NVNT a 5700MHz Ant1

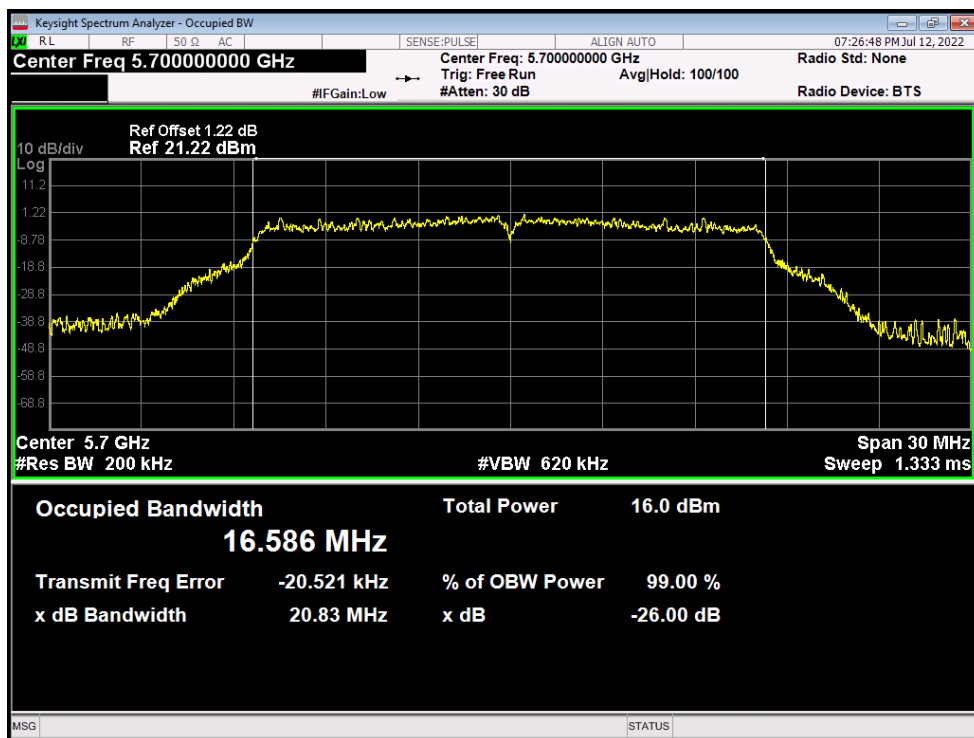


OBW NVNT ac20 5500MHz Ant1

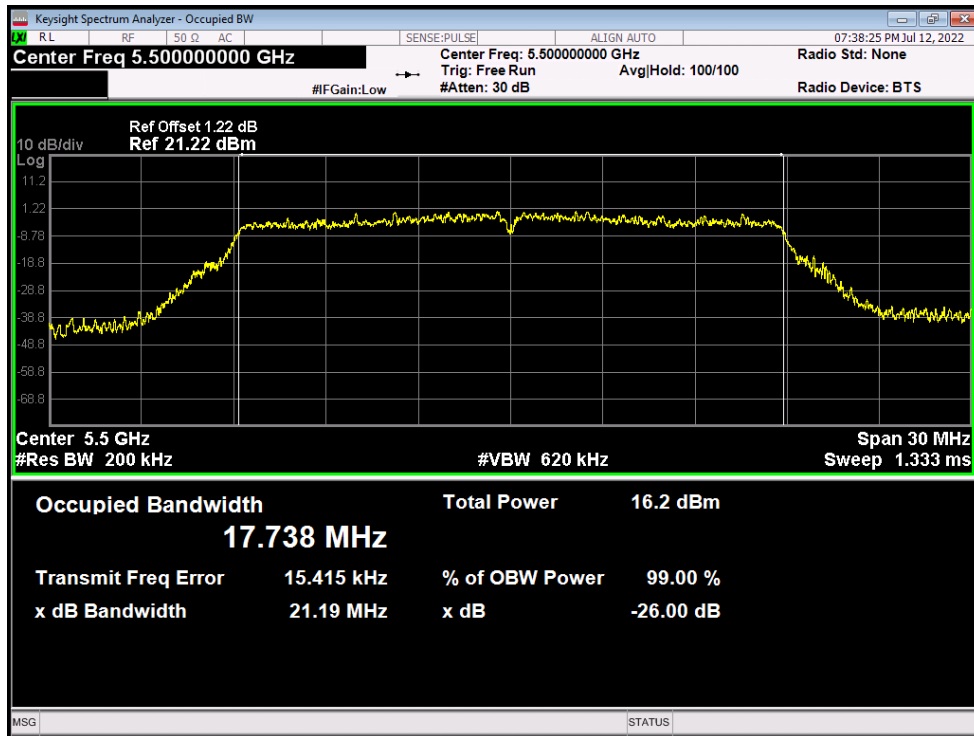


OBW NVNT ac20 5600MHz Ant1

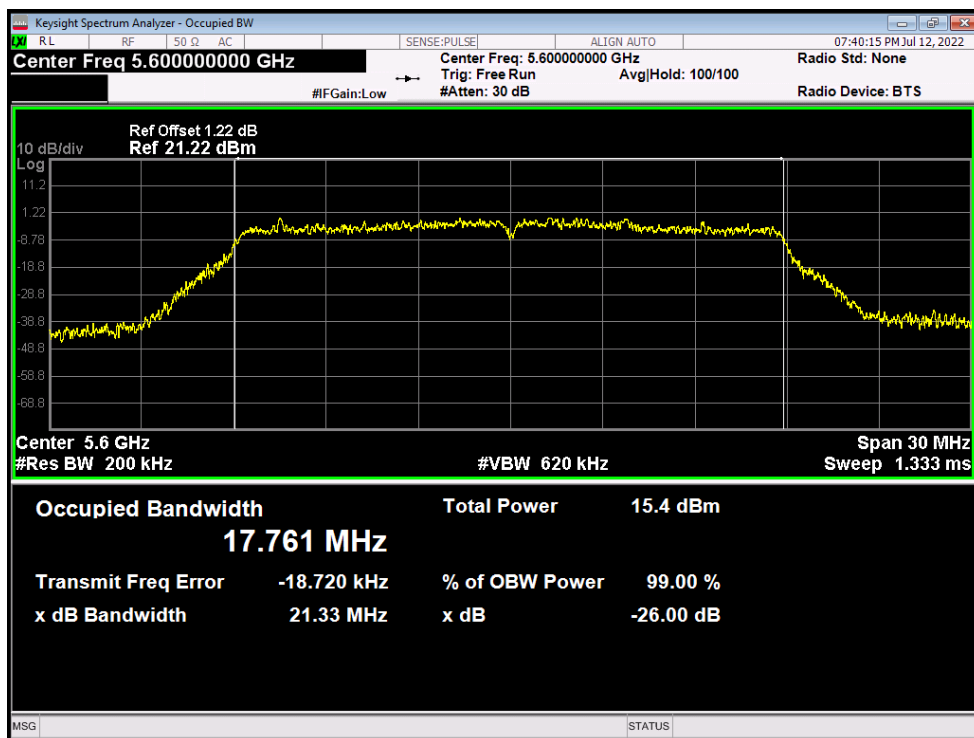


OBW NVNT ac20 5700MHz Ant1

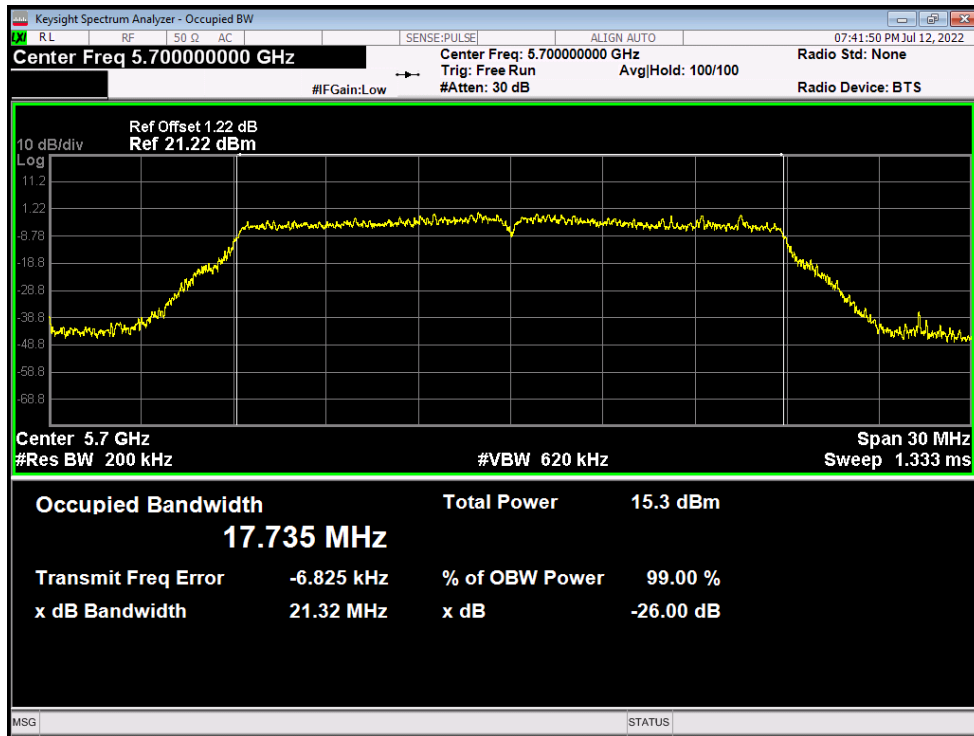


OBW NVNT ac40 5510MHz Ant1

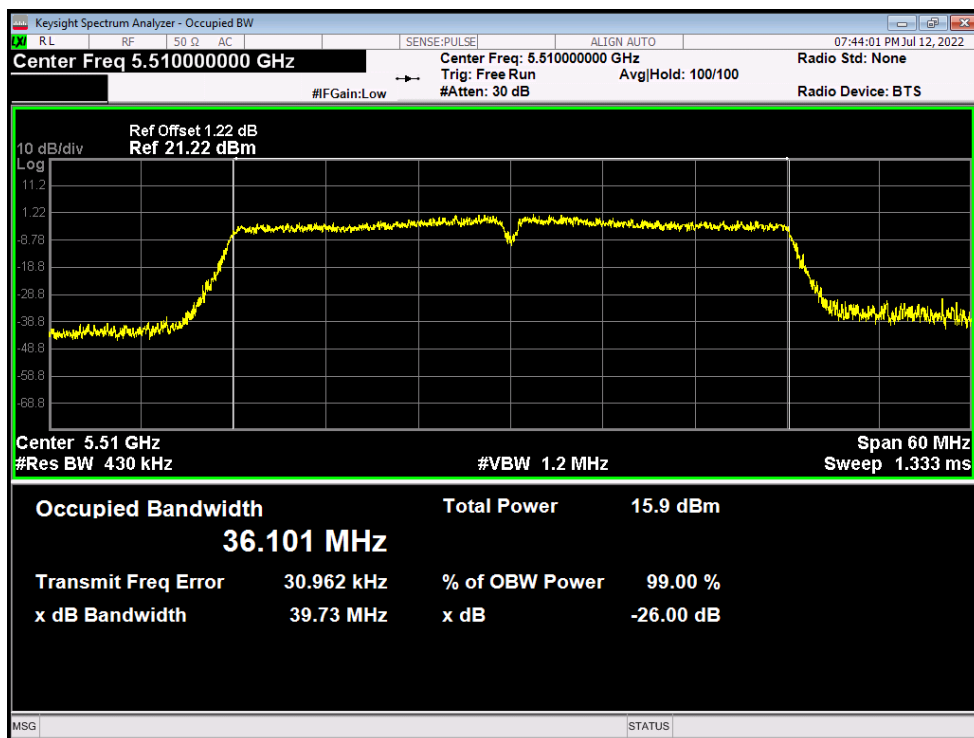


OBW NVNT ac40 5590MHz Ant1

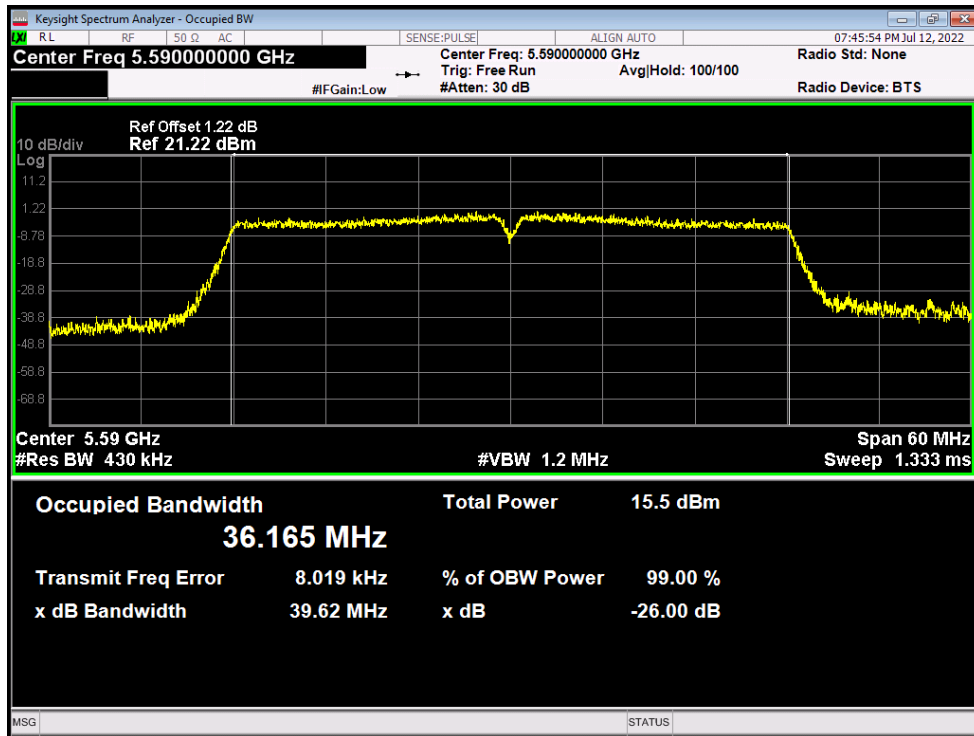


OBW NVNT ac40 5670MHz Ant1

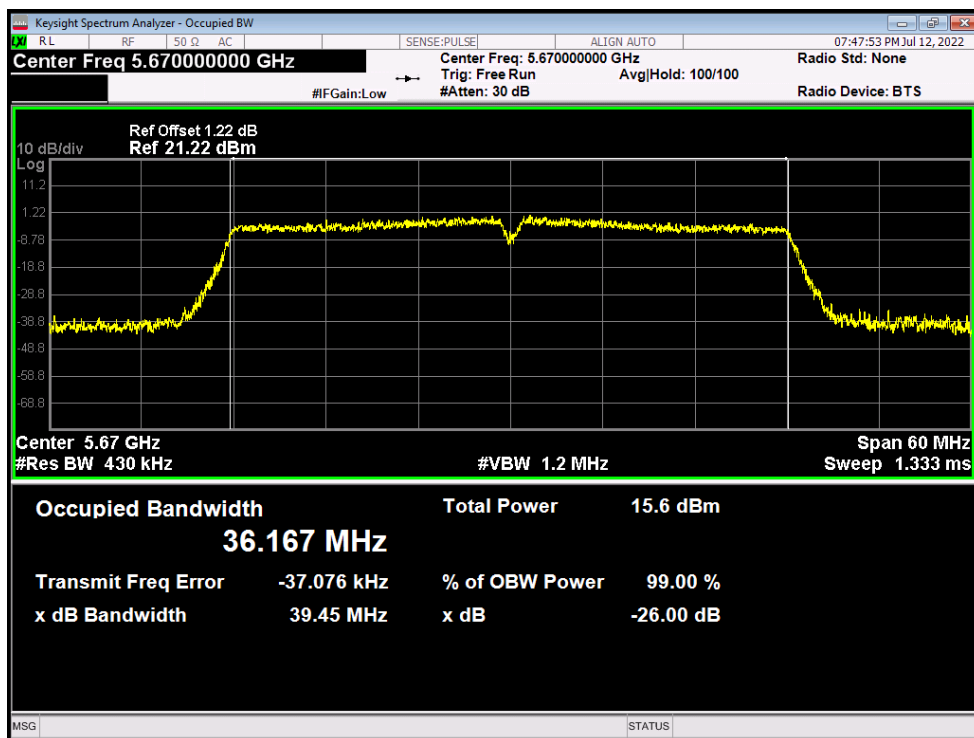


OBW NVNT ac80 5530MHz Ant1

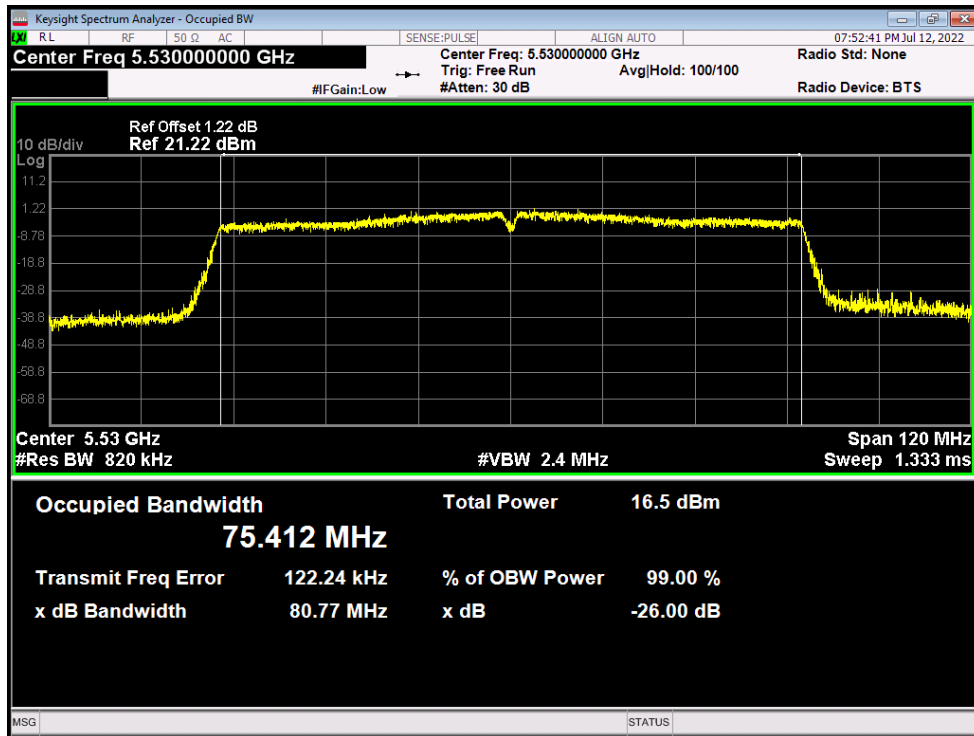


OBW NVNT ac80 5610MHz Ant1

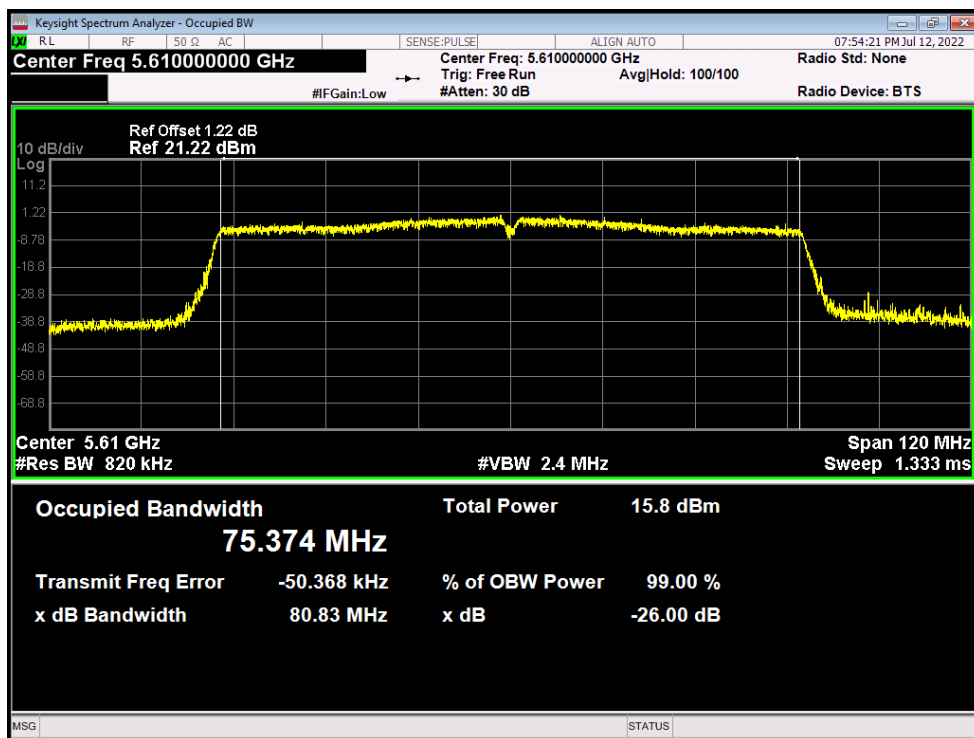


OBW NVNT n20 5500MHz Ant1

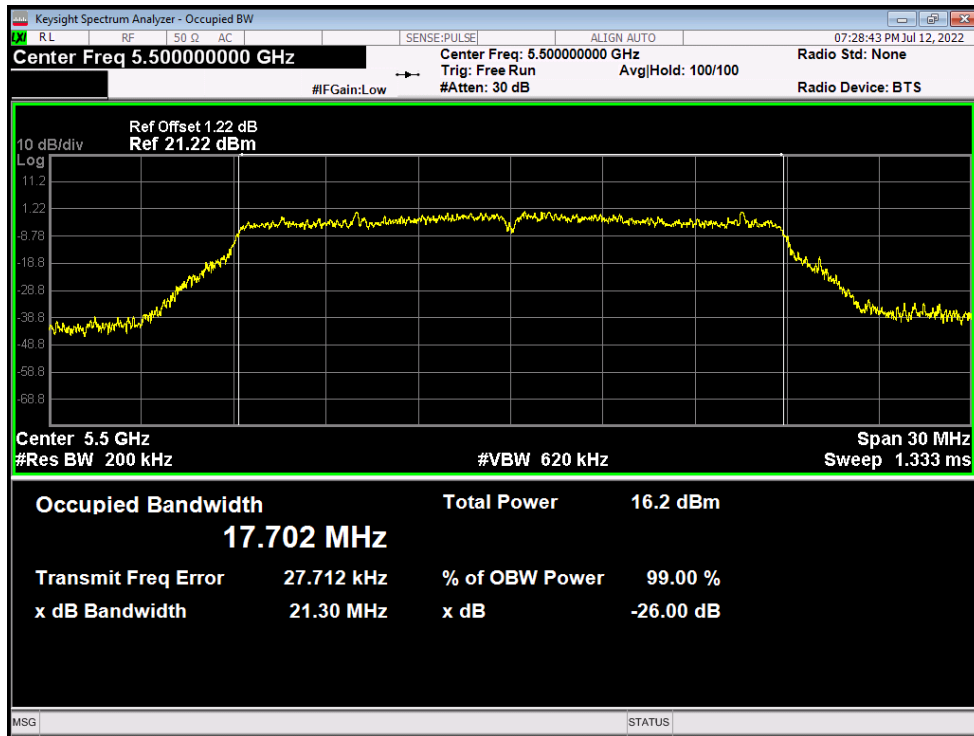


OBW NVNT n20 5600MHz Ant1

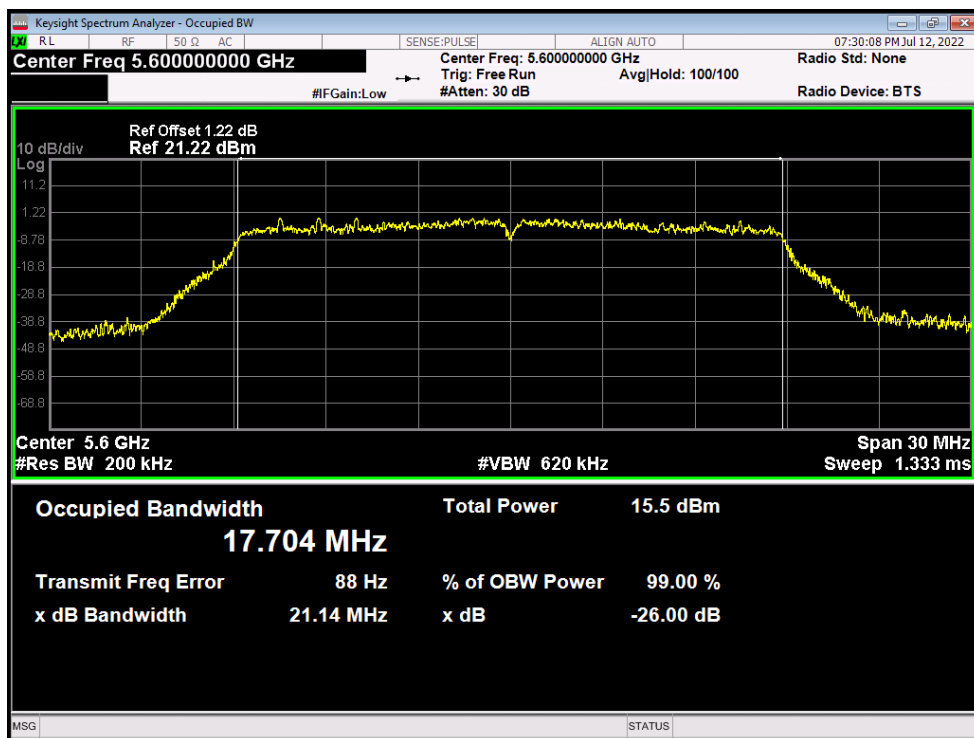


OBW NVNT n20 5700MHz Ant1

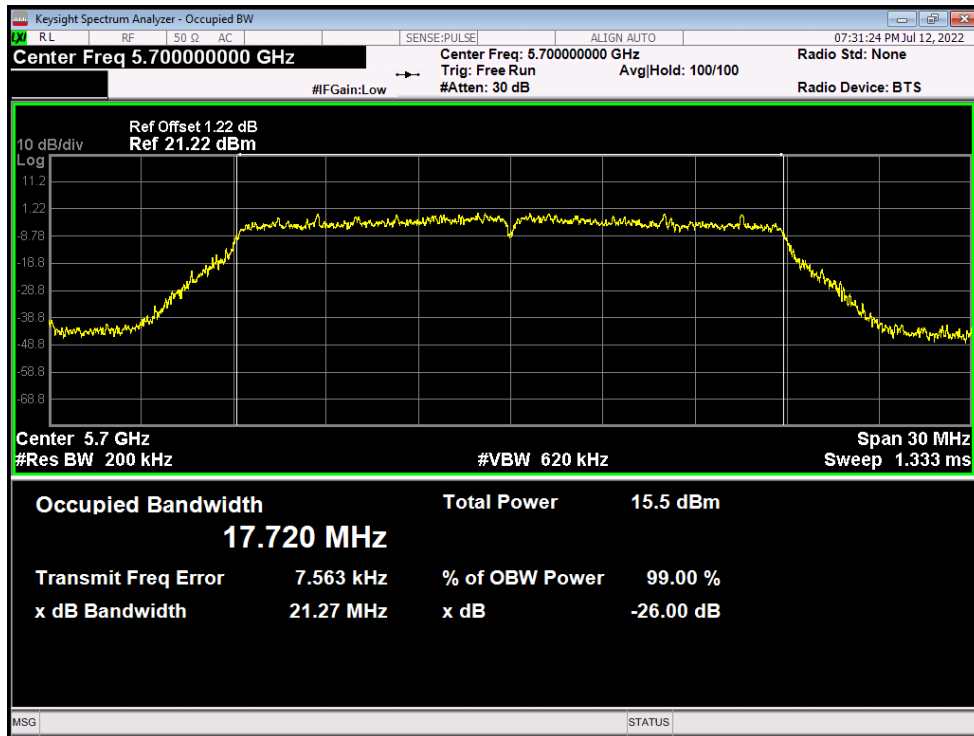


OBW NVNT n40 5510MHz Ant1

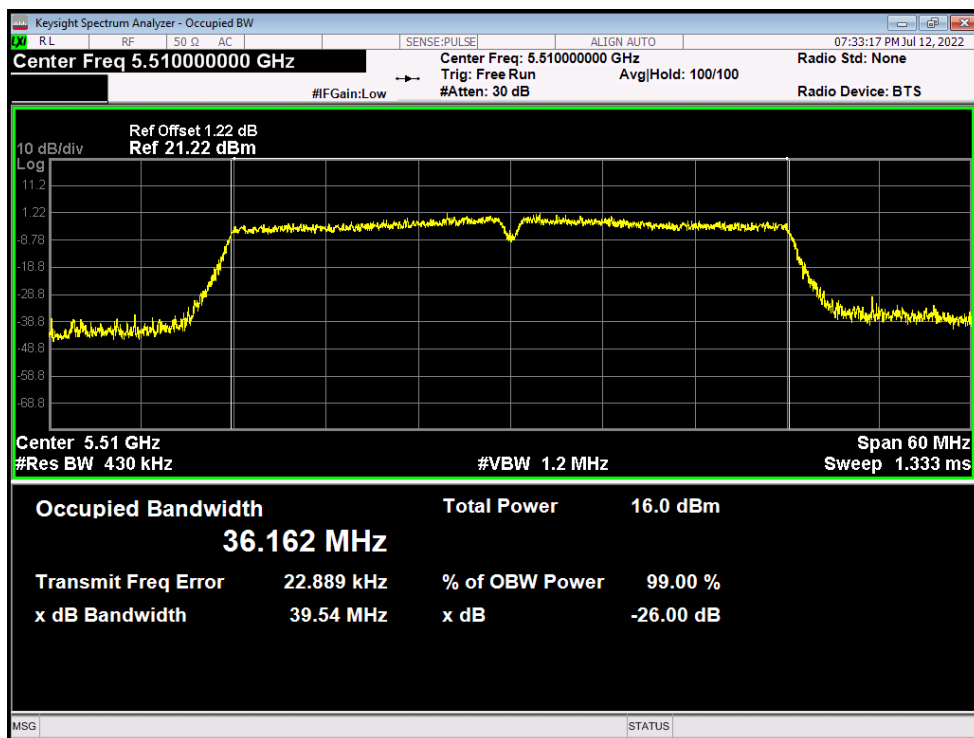

OBW NVNT n40 5590MHz Ant1

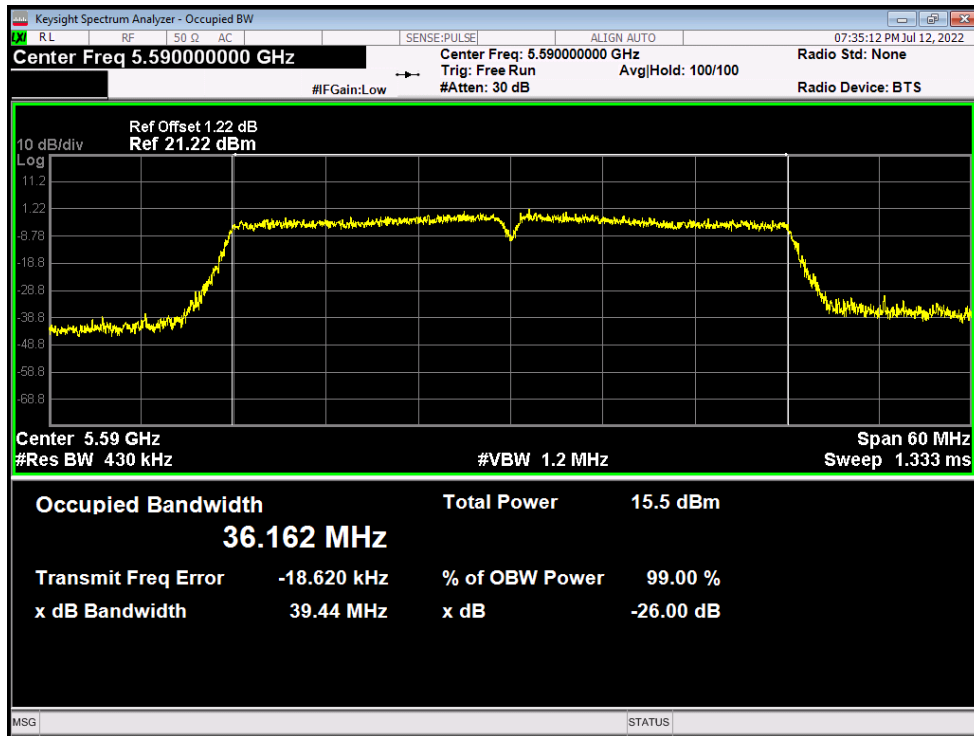


OBW NVNT n40 5670MHz Ant1

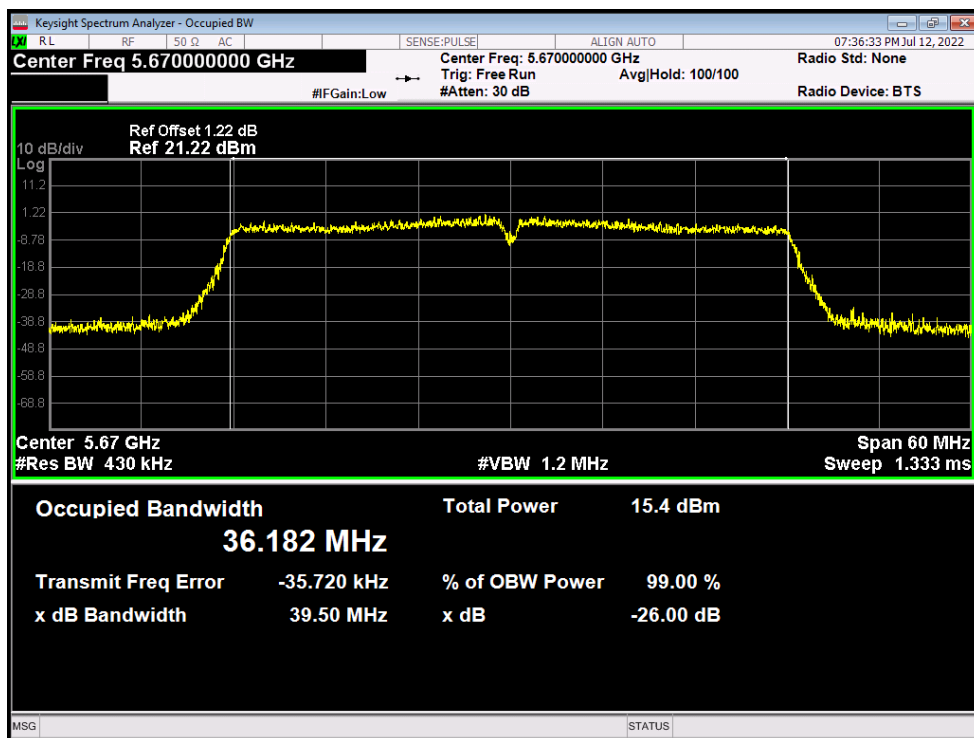


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	0.411	0.1	0.511	11	Pass
NVNT	a	5600	Ant1	0.566	0.1	0.666	11	Pass
NVNT	a	5700	Ant1	0.835	0.1	0.935	11	Pass
NVNT	ac20	5500	Ant1	0.712	0.1	0.812	11	Pass
NVNT	ac20	5600	Ant1	-0.089	0.1	0.011	11	Pass
NVNT	ac20	5700	Ant1	-0.118	0.1	-0.018	11	Pass
NVNT	ac40	5510	Ant1	-2.858	0.21	-2.648	11	Pass
NVNT	ac40	5590	Ant1	-3.066	0.19	-2.876	11	Pass
NVNT	ac40	5670	Ant1	-3.079	0.21	-2.869	11	Pass
NVNT	ac80	5530	Ant1	-5.909	0.39	-5.519	11	Pass
NVNT	ac80	5610	Ant1	-6.611	0.39	-6.221	11	Pass
NVNT	n20	5500	Ant1	0.712	0.1	0.812	11	Pass
NVNT	n20	5600	Ant1	-0.112	0.1	-0.012	11	Pass
NVNT	n20	5700	Ant1	0.149	0.1	0.249	11	Pass
NVNT	n40	5510	Ant1	-2.551	0.2	-2.351	11	Pass
NVNT	n40	5590	Ant1	-2.844	0.2	-2.644	11	Pass
NVNT	n40	5670	Ant1	-3.22	0.2	-3.02	11	Pass


PSD NVNT a 5500MHz Ant1

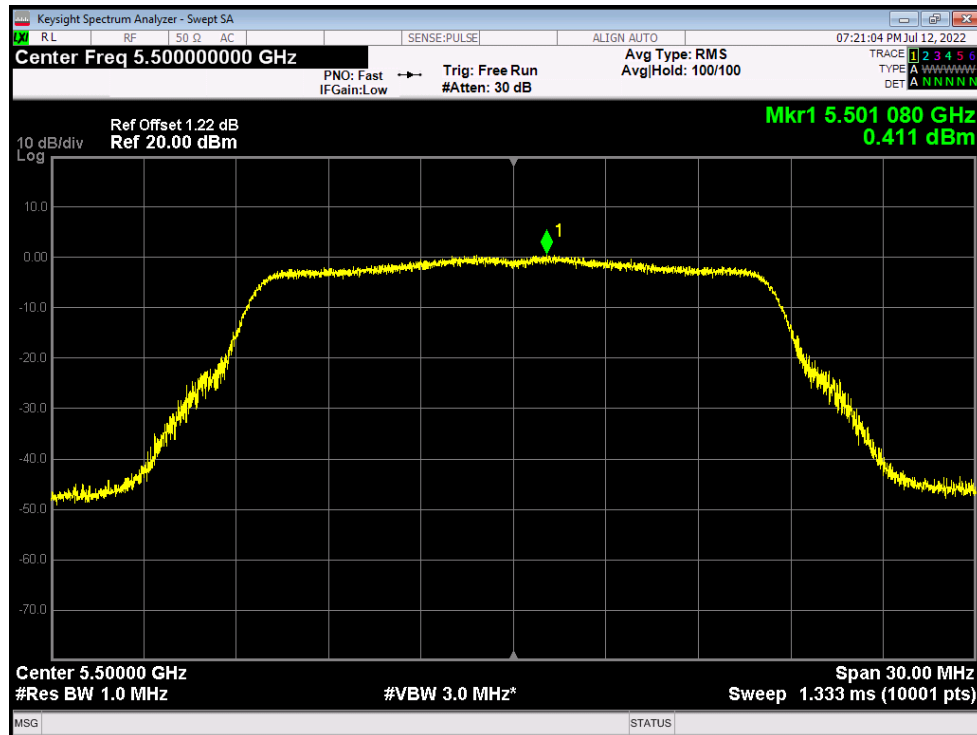


PSD NVNT a 5600MHz Ant1

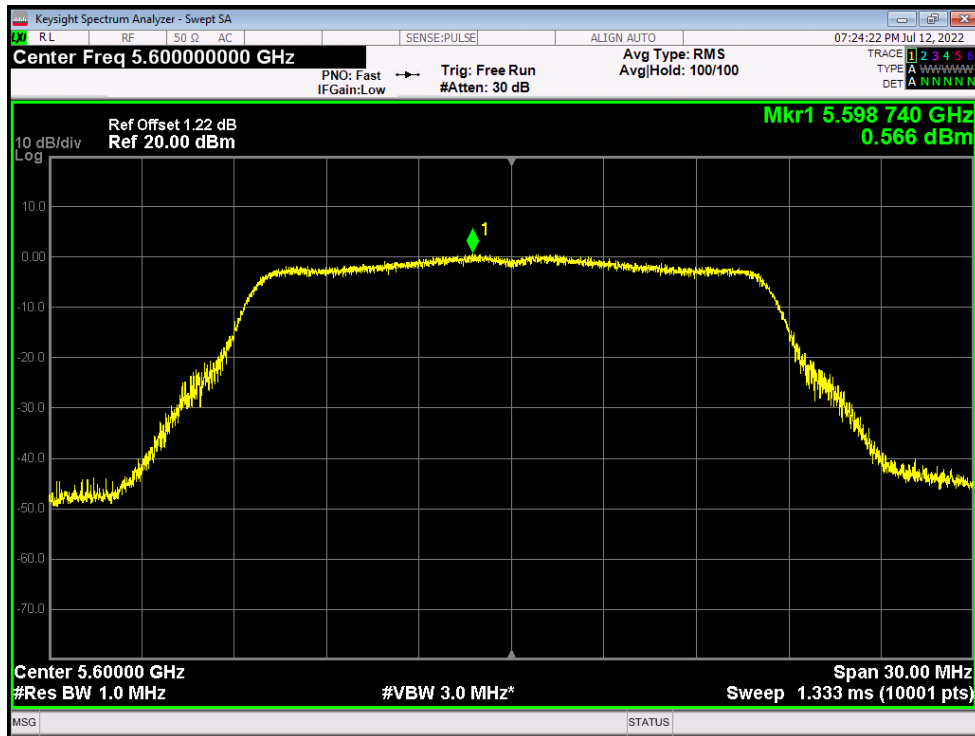


PSD NVNT a 5700MHz Ant1

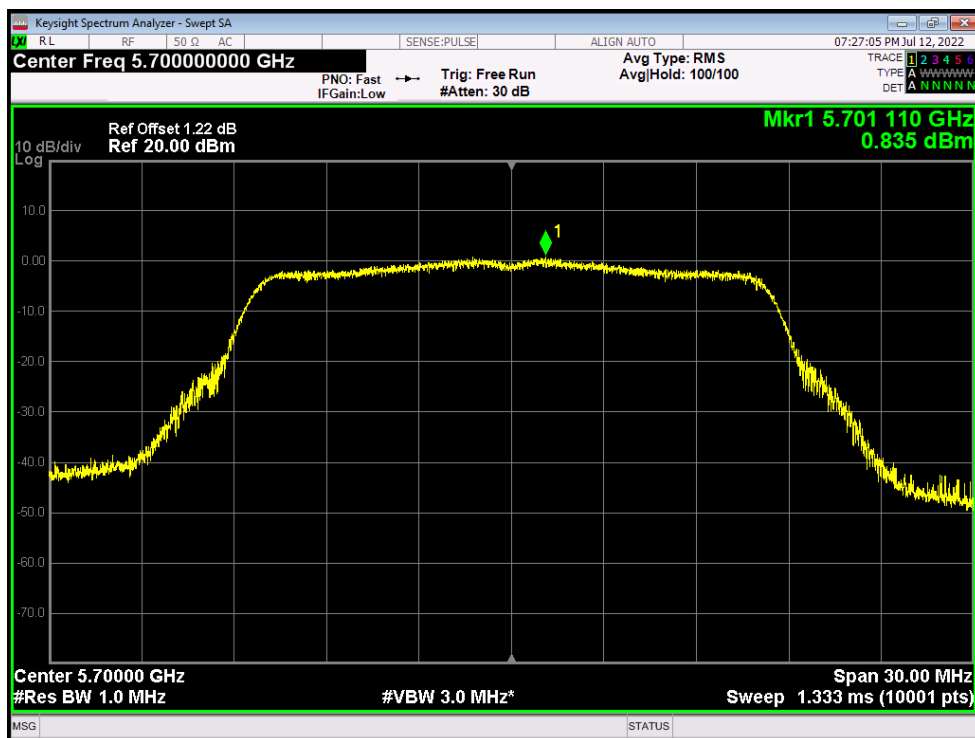


PSD NVNT ac20 5500MHz Ant1

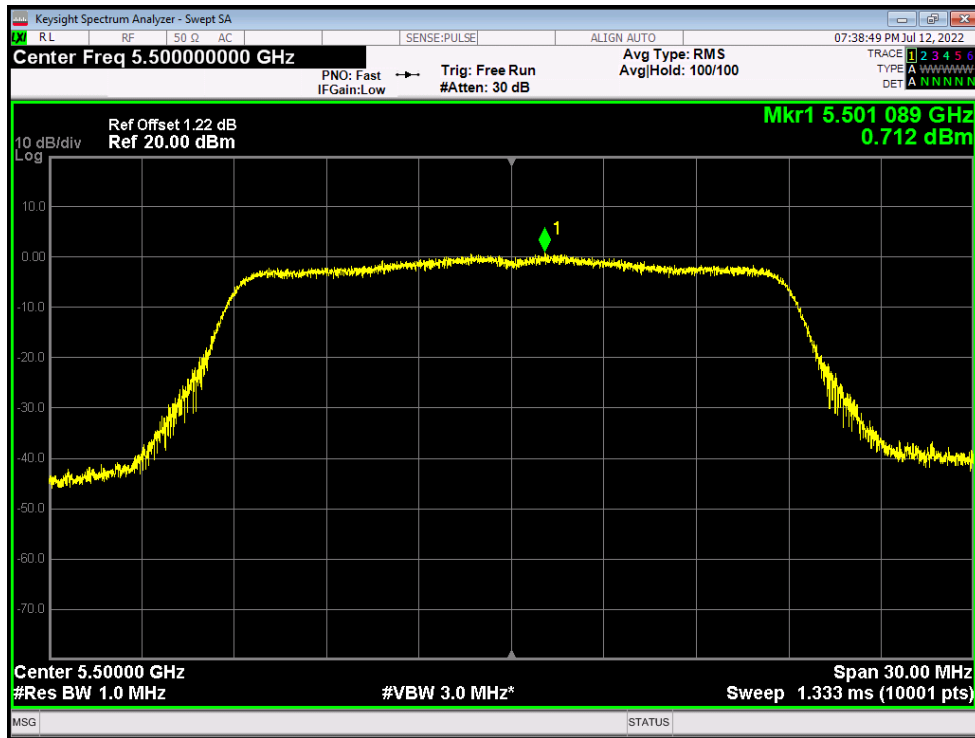


PSD NVNT ac20 5600MHz Ant1

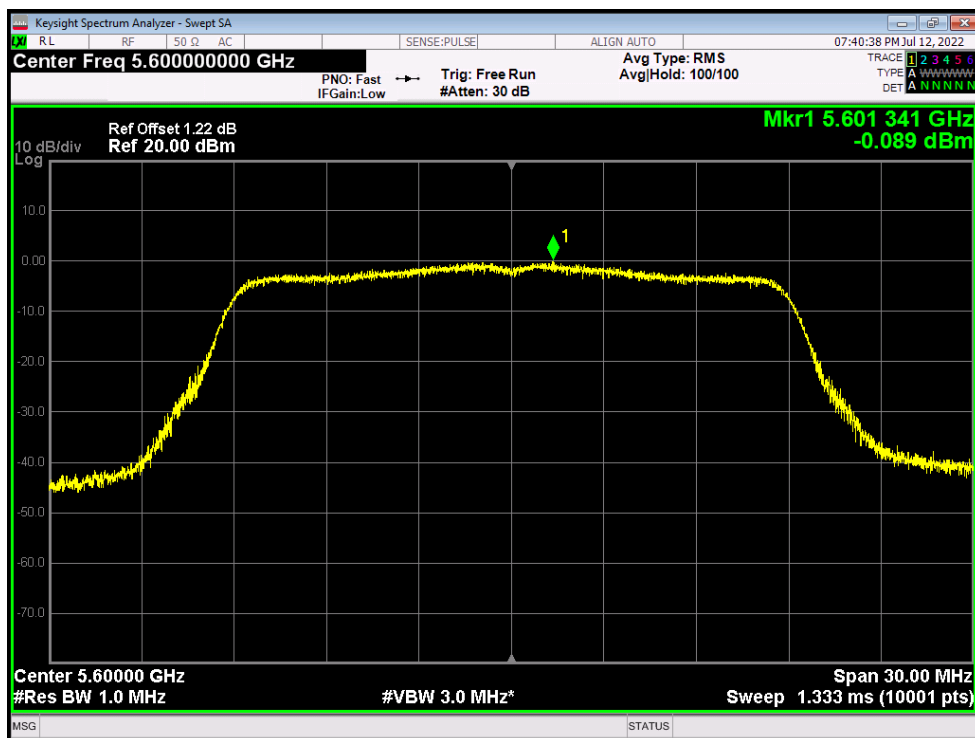


PSD NVNT ac20 5700MHz Ant1

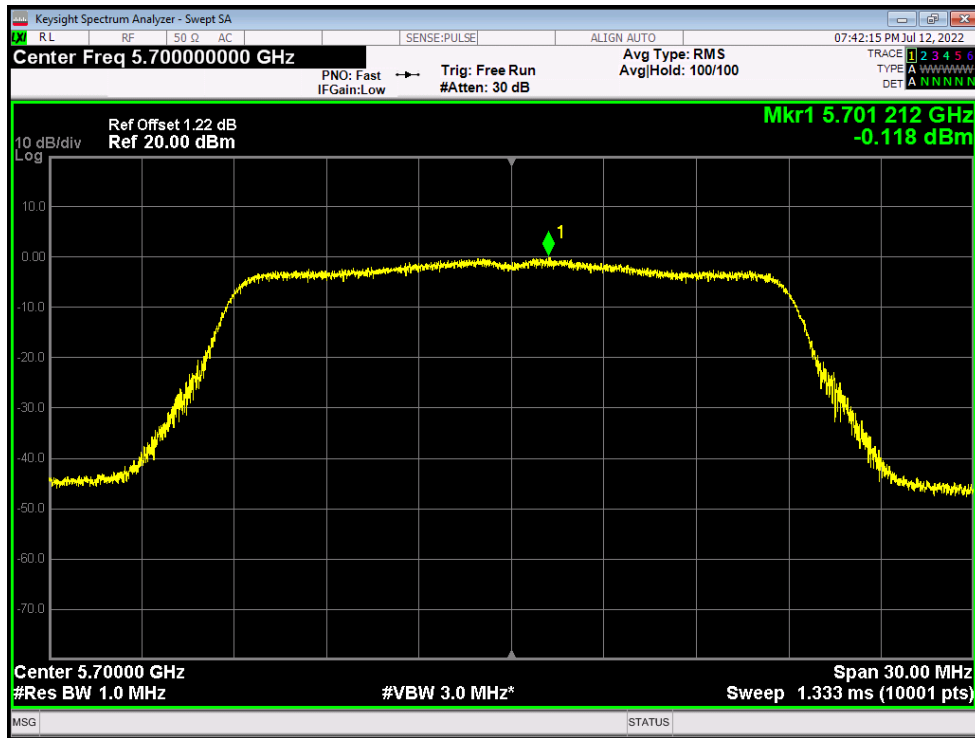


PSD NVNT ac40 5510MHz Ant1

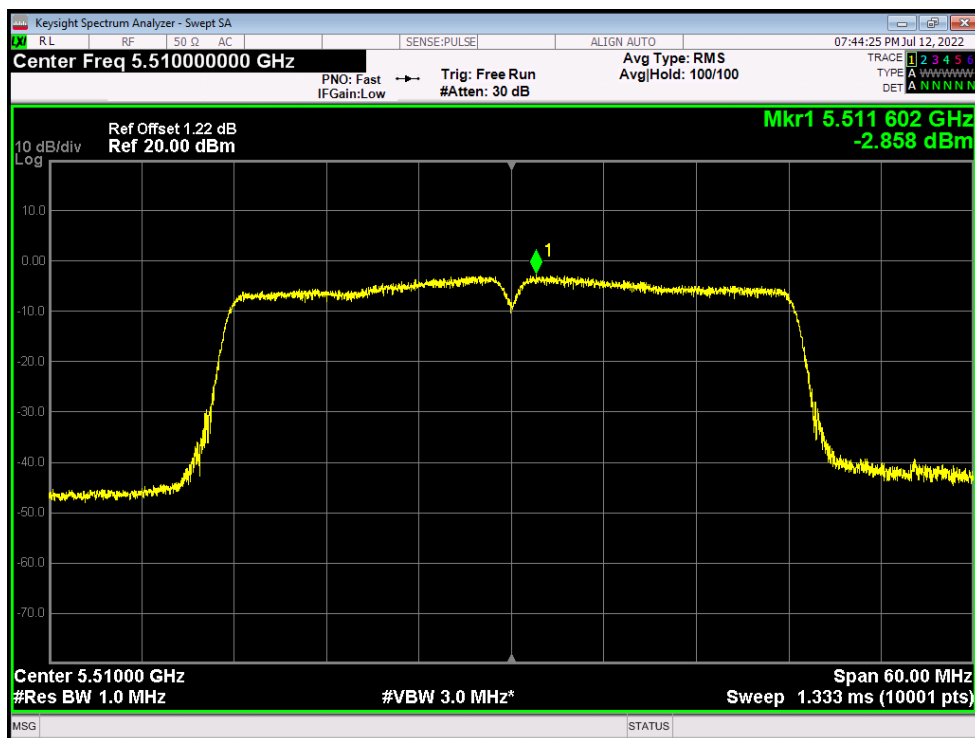


PSD NVNT ac40 5590MHz Ant1

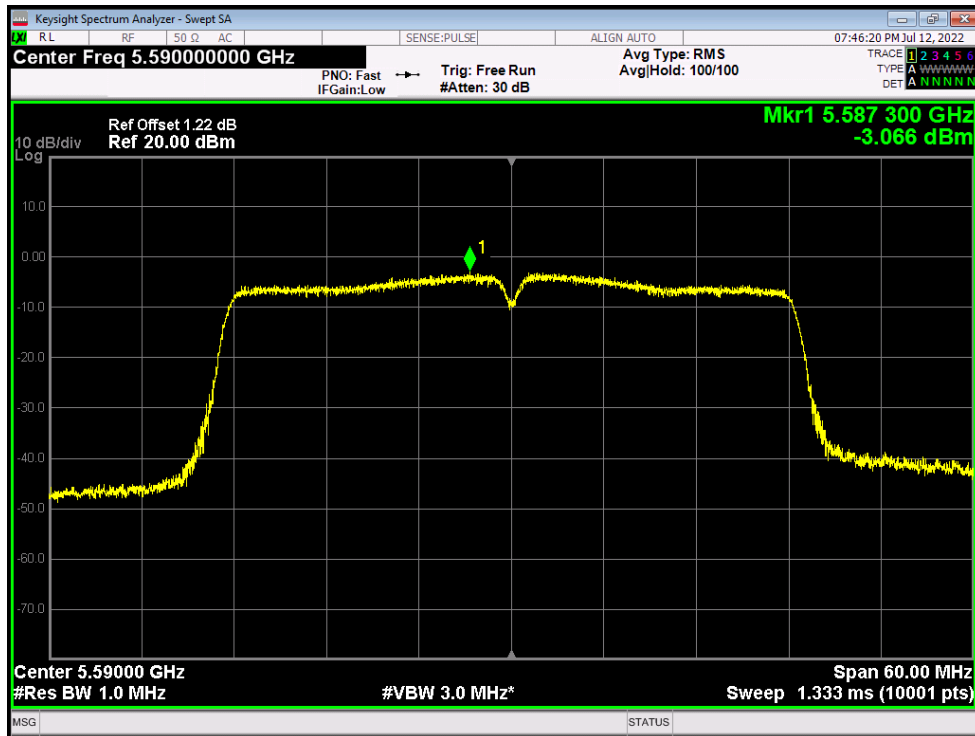


PSD NVNT ac40 5670MHz Ant1

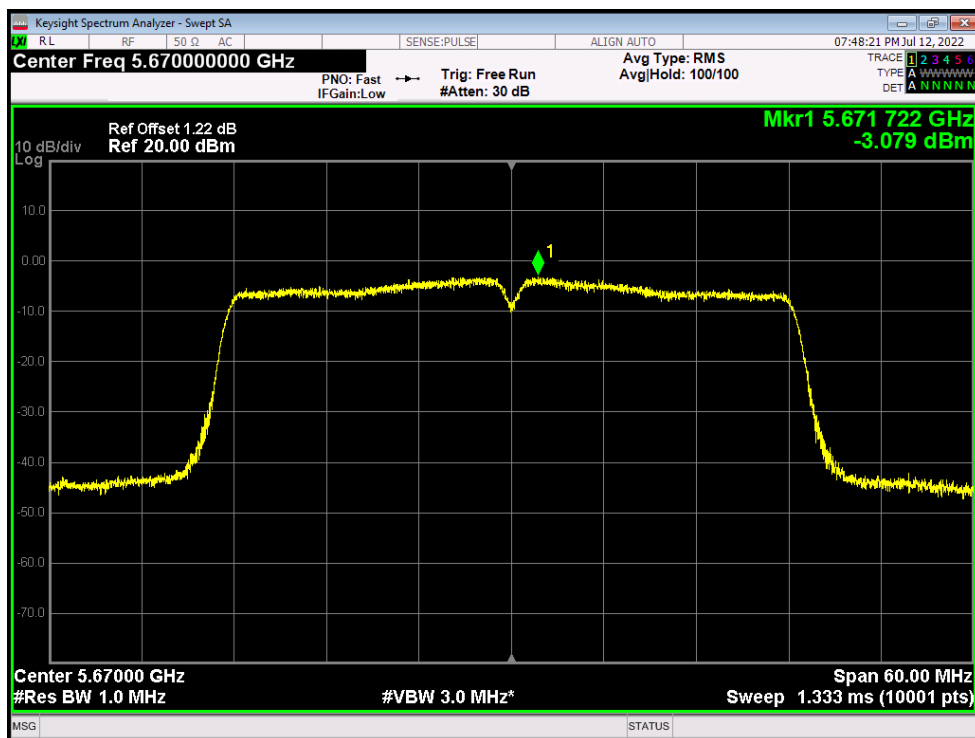


PSD NVNT ac80 5530MHz Ant1

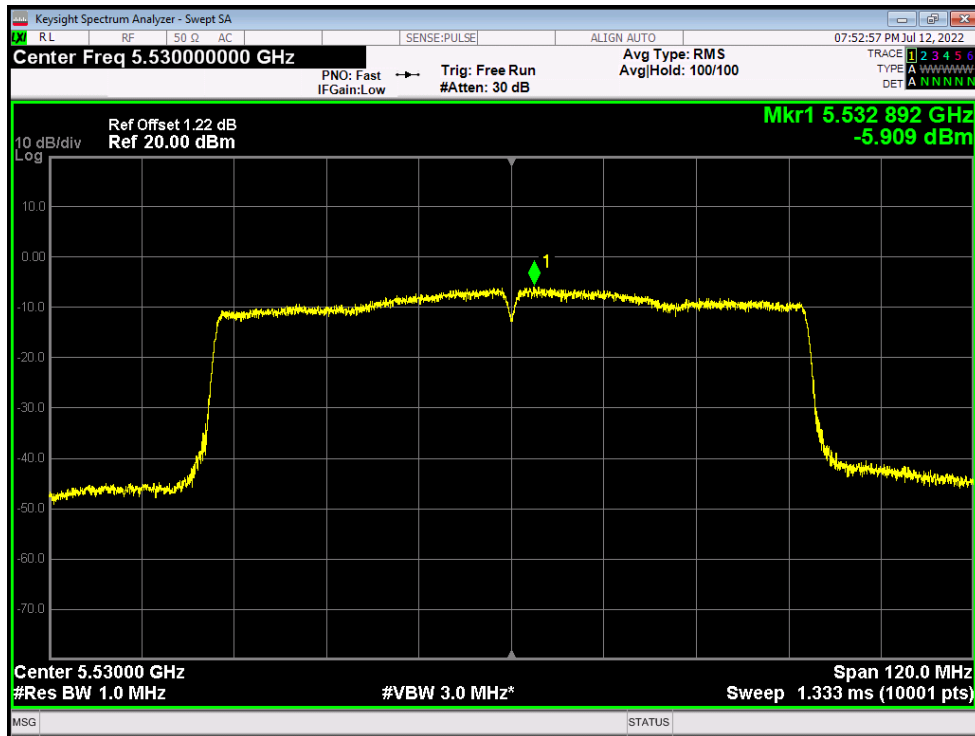


PSD NVNT ac80 5610MHz Ant1

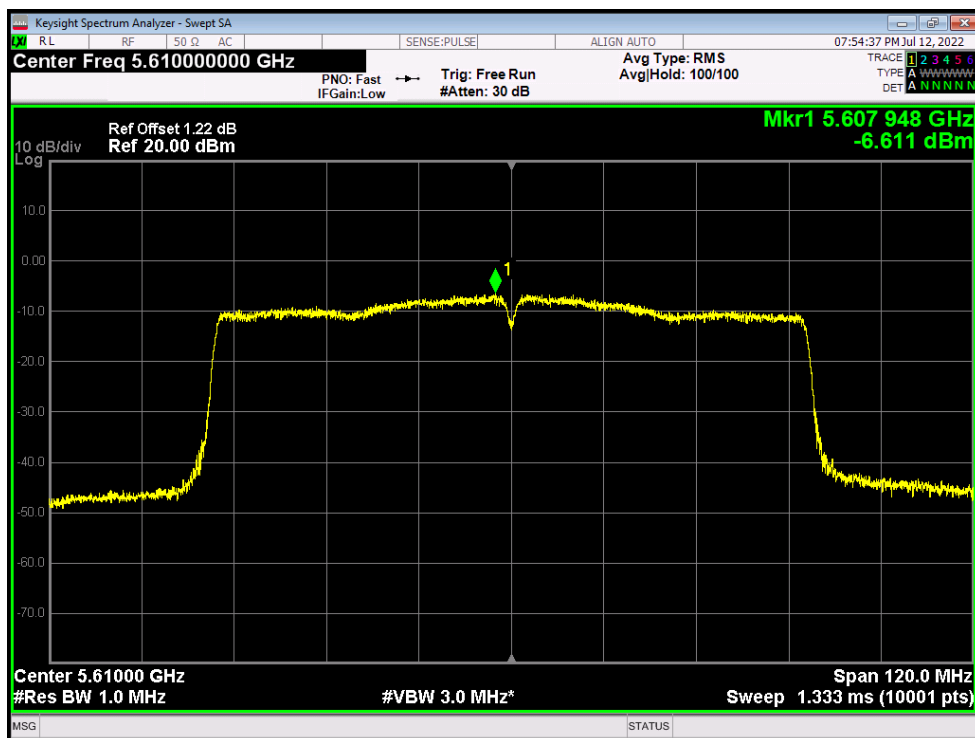


PSD NVNT n20 5500MHz Ant1

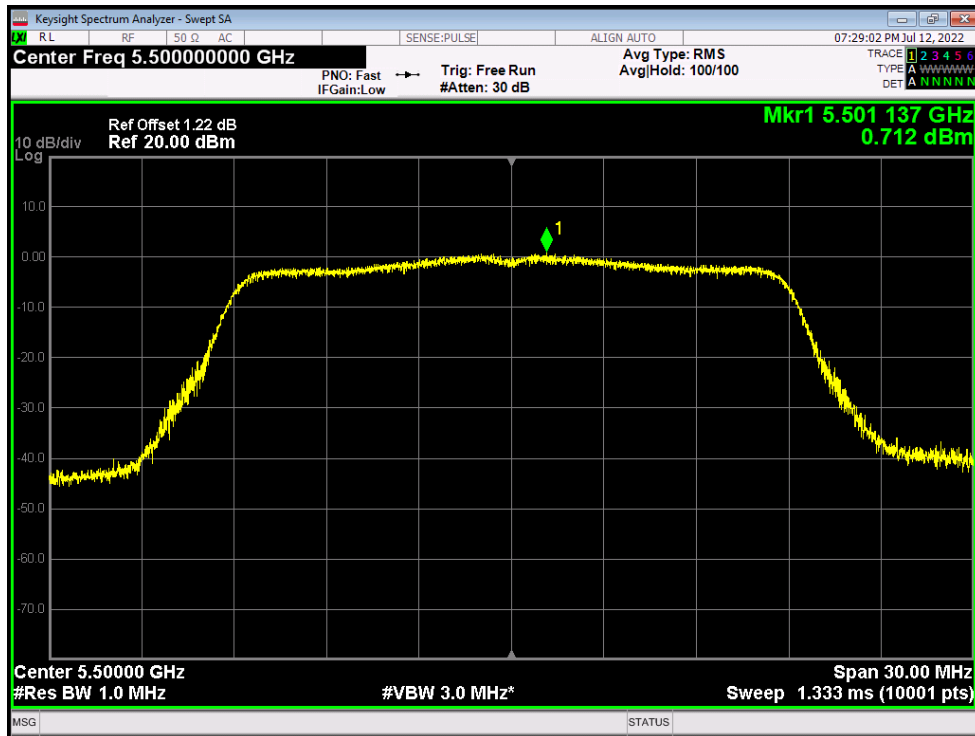


PSD NVNT n20 5600MHz Ant1

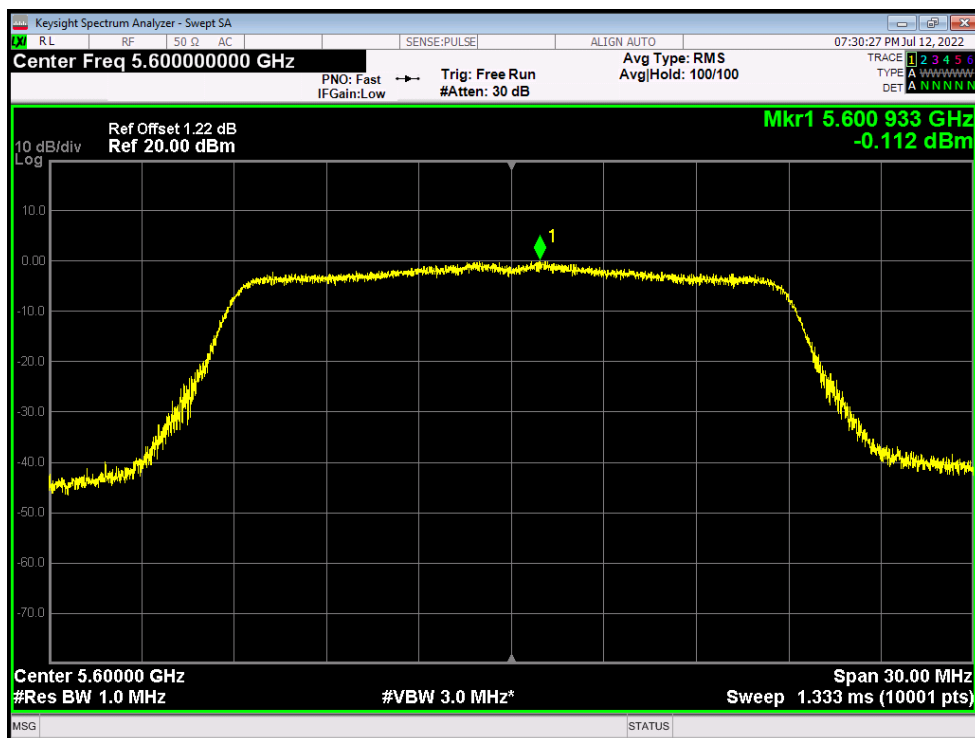


PSD NVNT n20 5700MHz Ant1

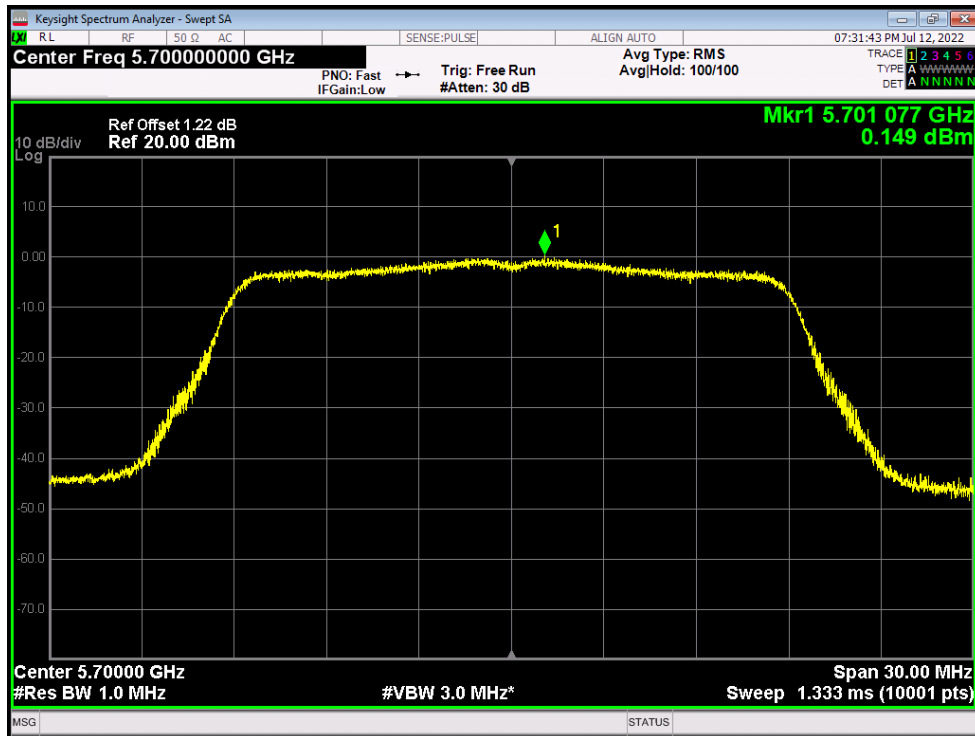


PSD NVNT n40 5510MHz Ant1

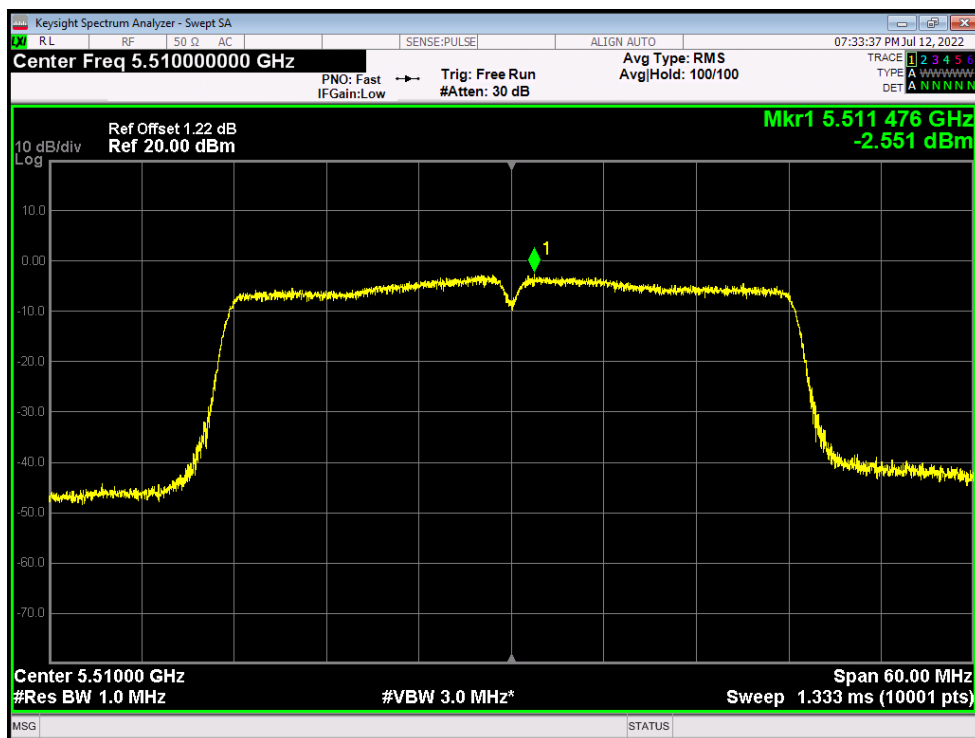

PSD NVNT n40 5590MHz Ant1

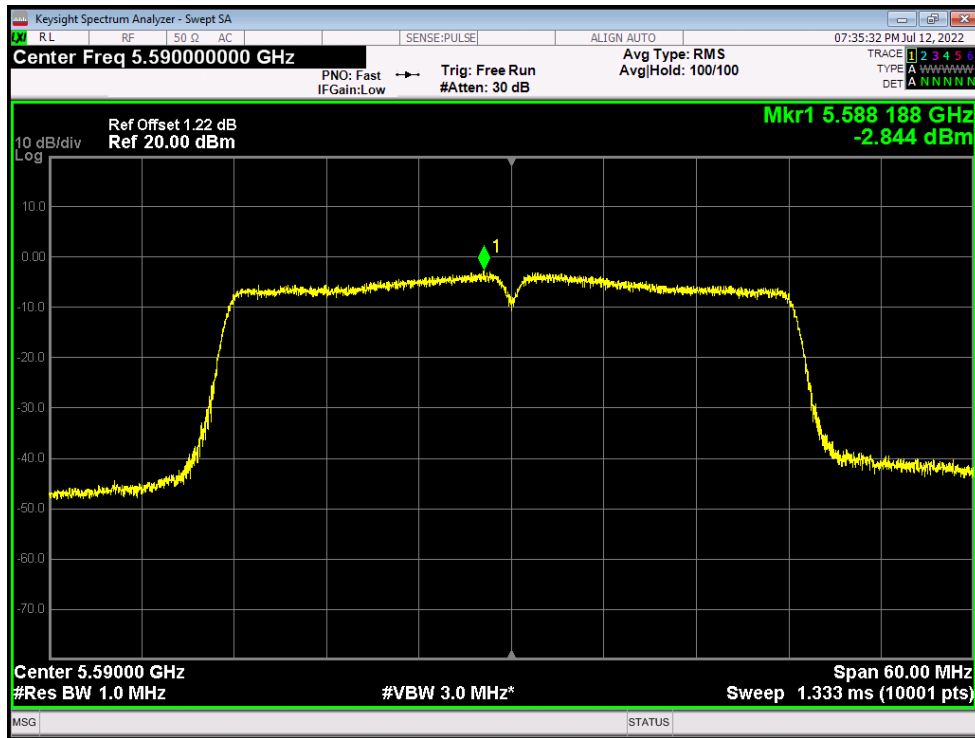

PSD NVNT n40 5670MHz Ant1

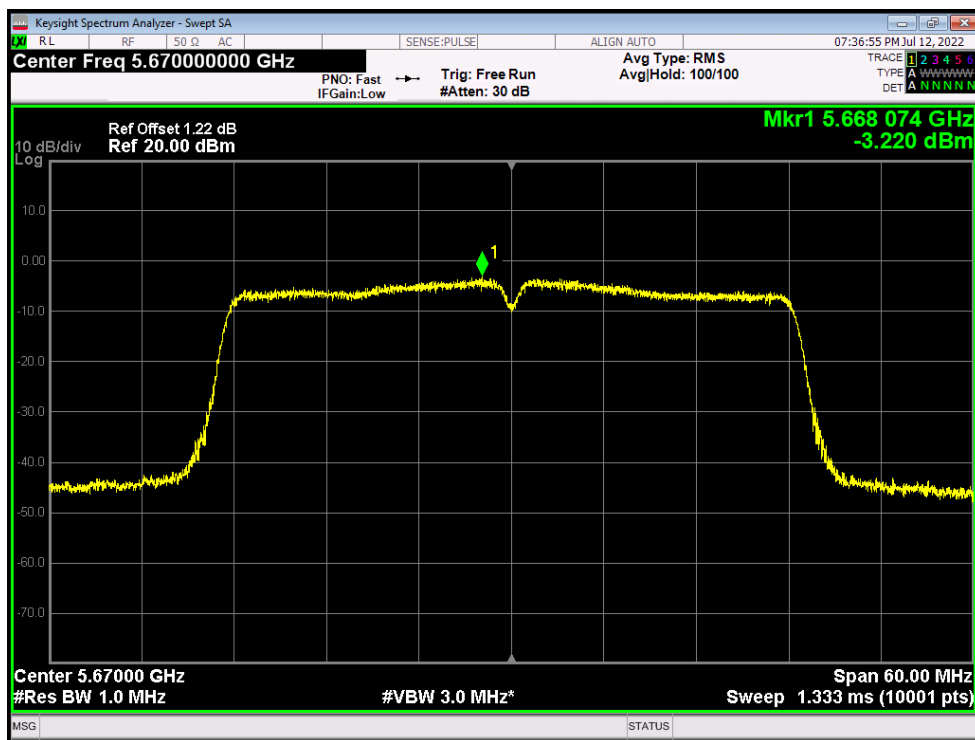


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5500	Ant1	-29.58	-27	Pass
NVNT	a	5700	Ant1	-31.85	-27	Pass
NVNT	ac20	5500	Ant1	-31.77	-27	Pass
NVNT	ac20	5700	Ant1	-38.36	-27	Pass
NVNT	ac40	5510	Ant1	-35.07	-27	Pass

NVNT	ac40	5670	Ant1	-40.54	-27	Pass
NVNT	ac80	5530	Ant1	-32.58	-27	Pass
NVNT	ac80	5610	Ant1	-42.14	-27	Pass
NVNT	n20	5500	Ant1	-35.42	-27	Pass
NVNT	n20	5700	Ant1	-35.49	-27	Pass
NVNT	n40	5510	Ant1	-31.55	-27	Pass
NVNT	n40	5670	Ant1	-39.91	-27	Pass


Band Edge NVNT a 5500MHz Low Ant1

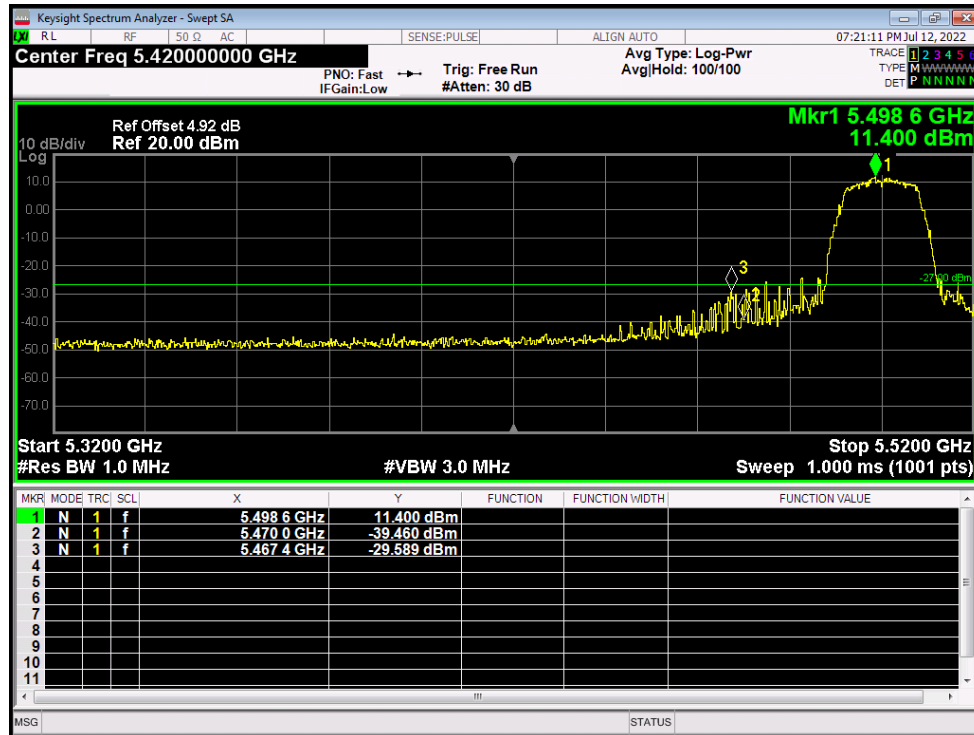


Band Edge NVNT a 5700MHz High Ant1

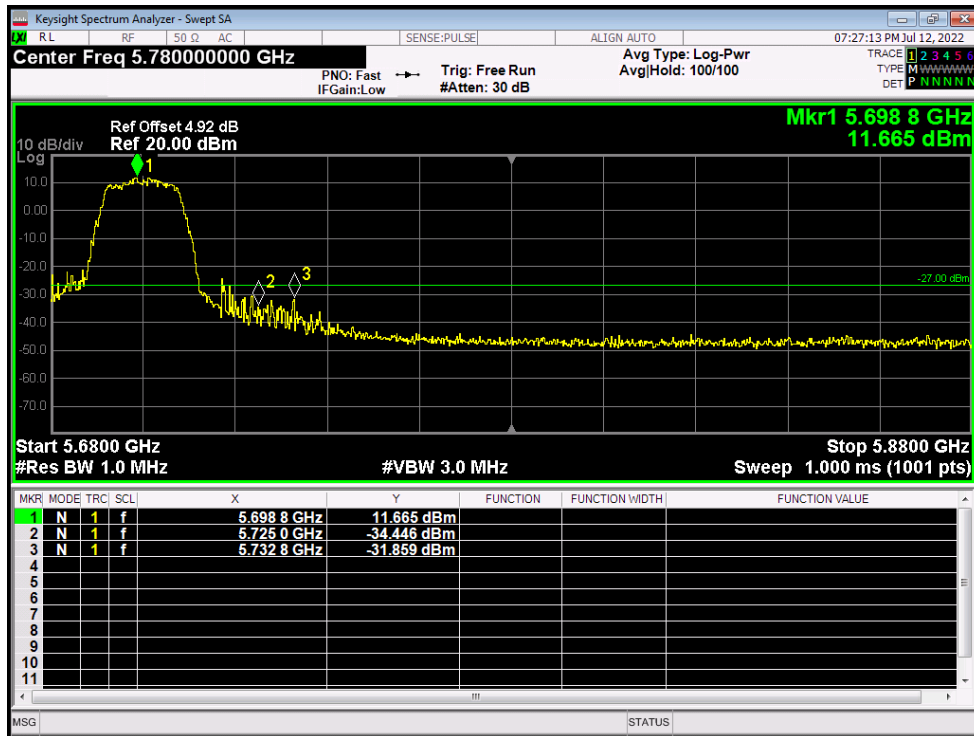


Band Edge NVNT ac20 5500MHz Low Ant1

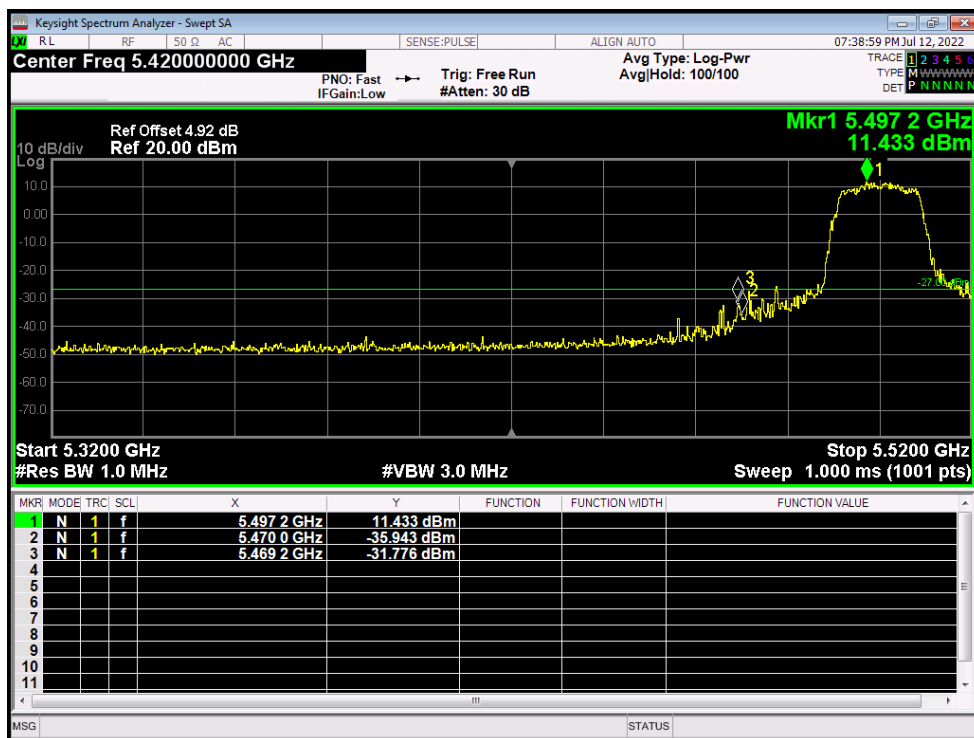


Band Edge NVNT ac20 5700MHz High Ant1

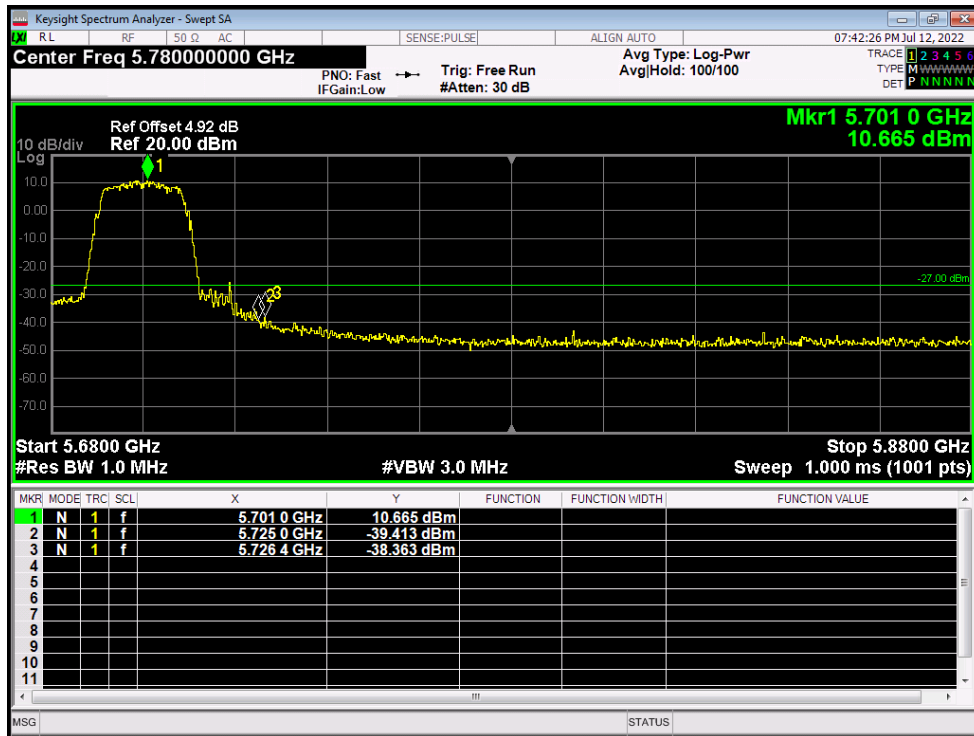


Band Edge NVNT ac40 5510MHz Low Ant1

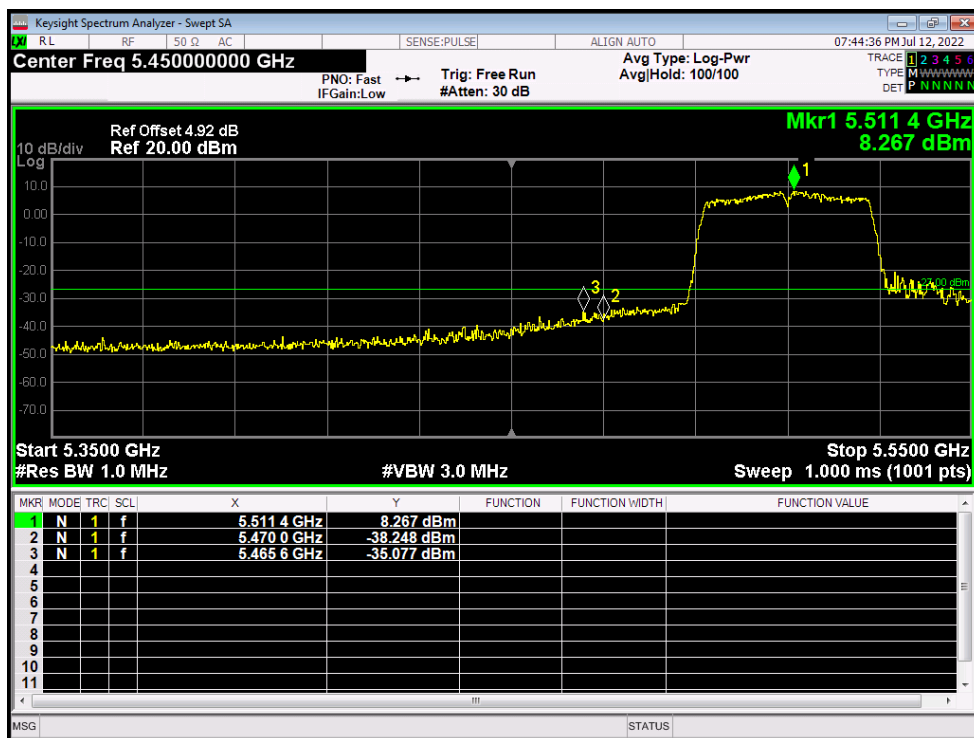


Band Edge NVNT ac40 5670MHz High Ant1

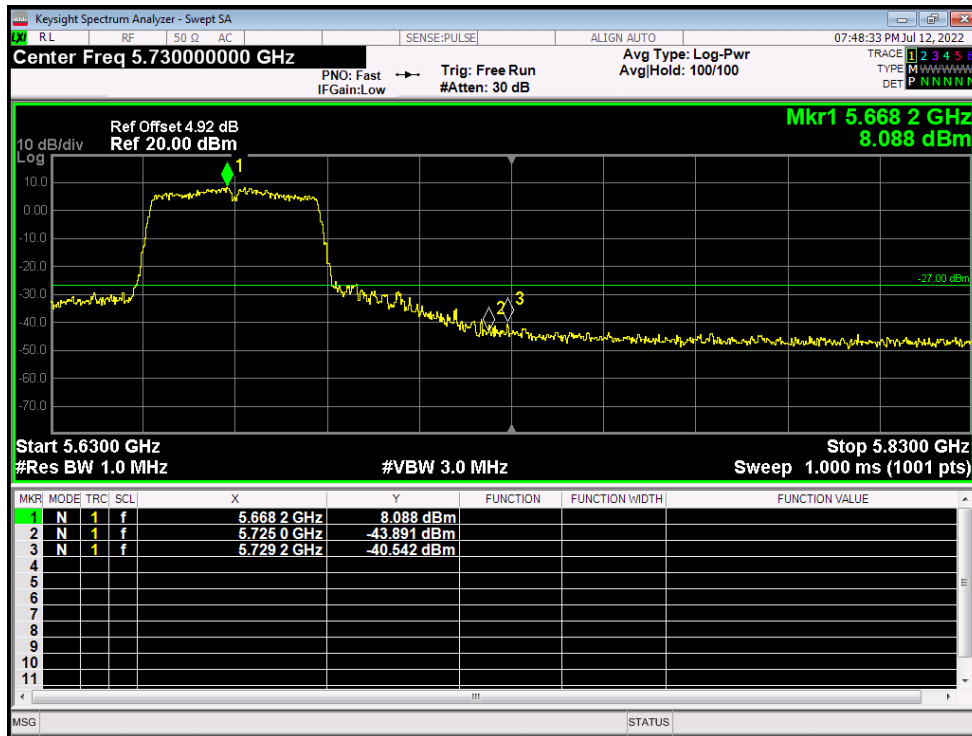


Band Edge NVNT ac80 5530MHz Low Ant1

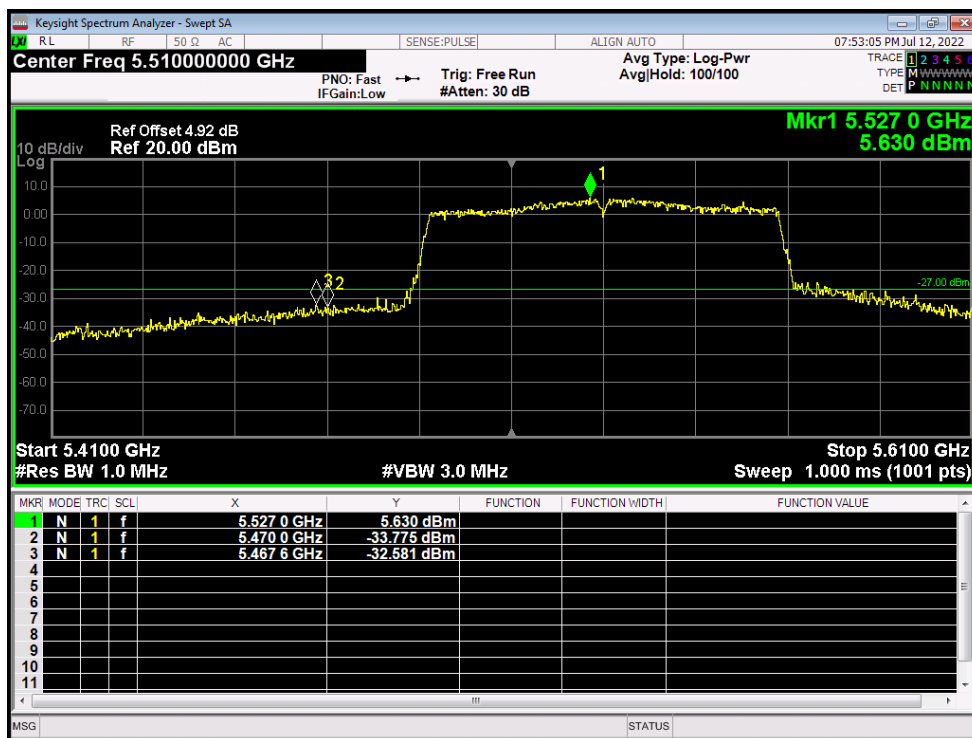


Band Edge NVNT ac80 5610MHz High Ant1

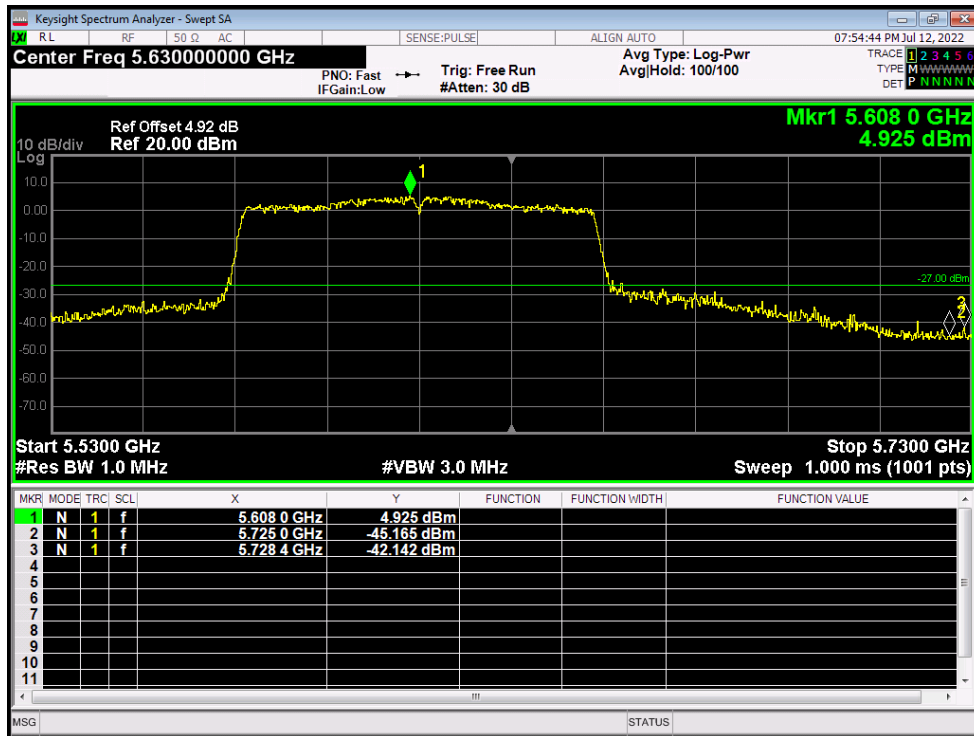


Band Edge NVNT n20 5500MHz Low Ant1

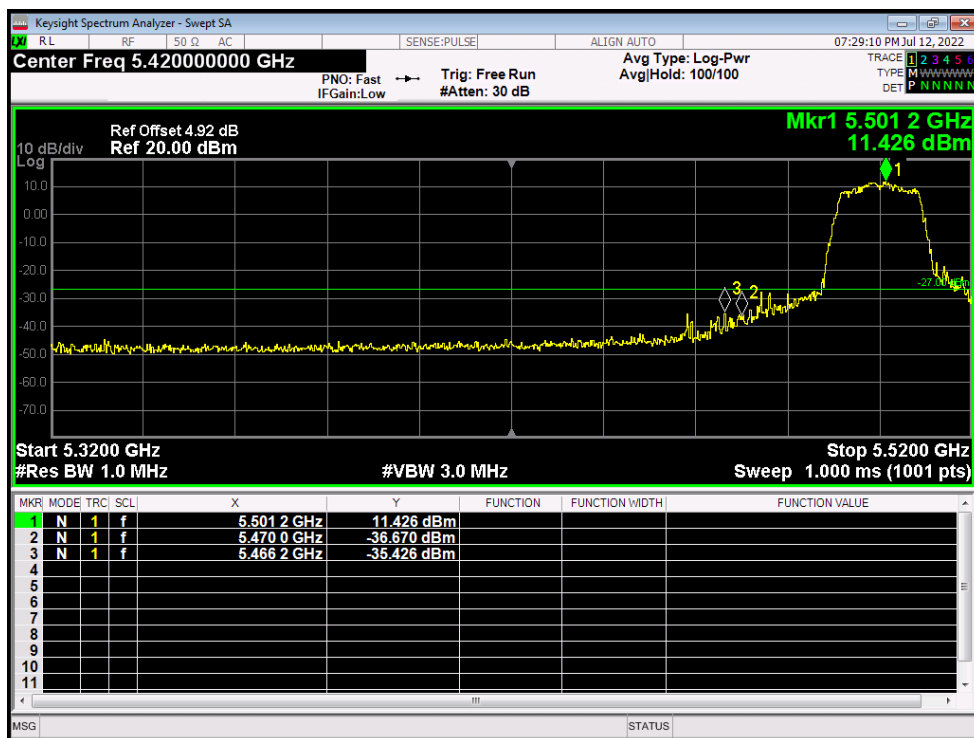

Band Edge NVNT n20 5700MHz High Ant1

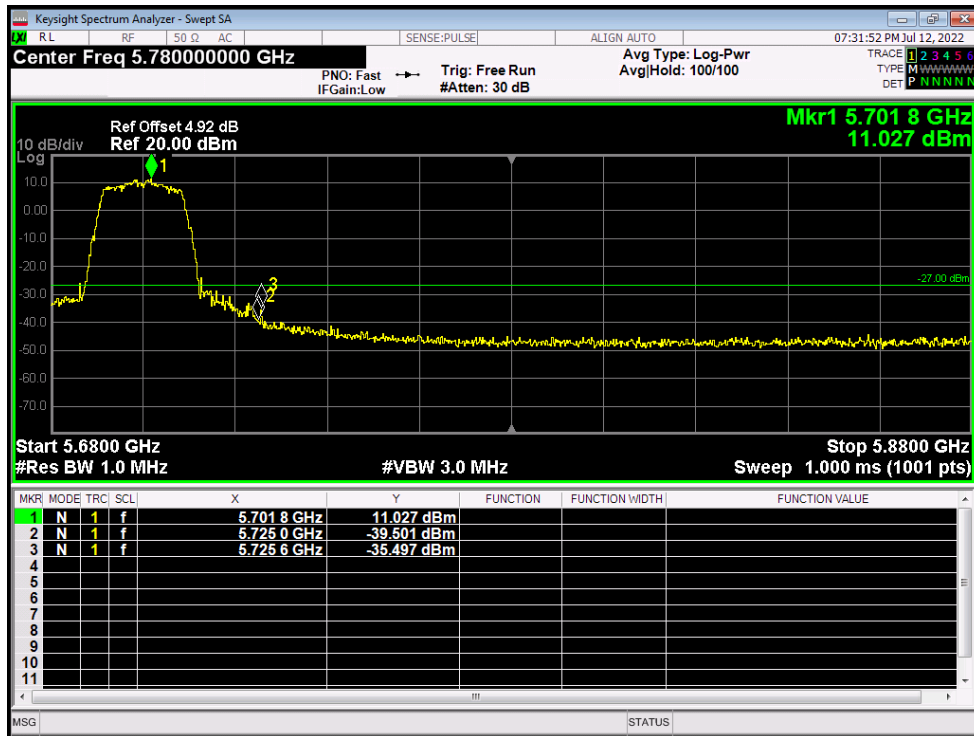

Band Edge NVNT n40 5510MHz Low Ant1

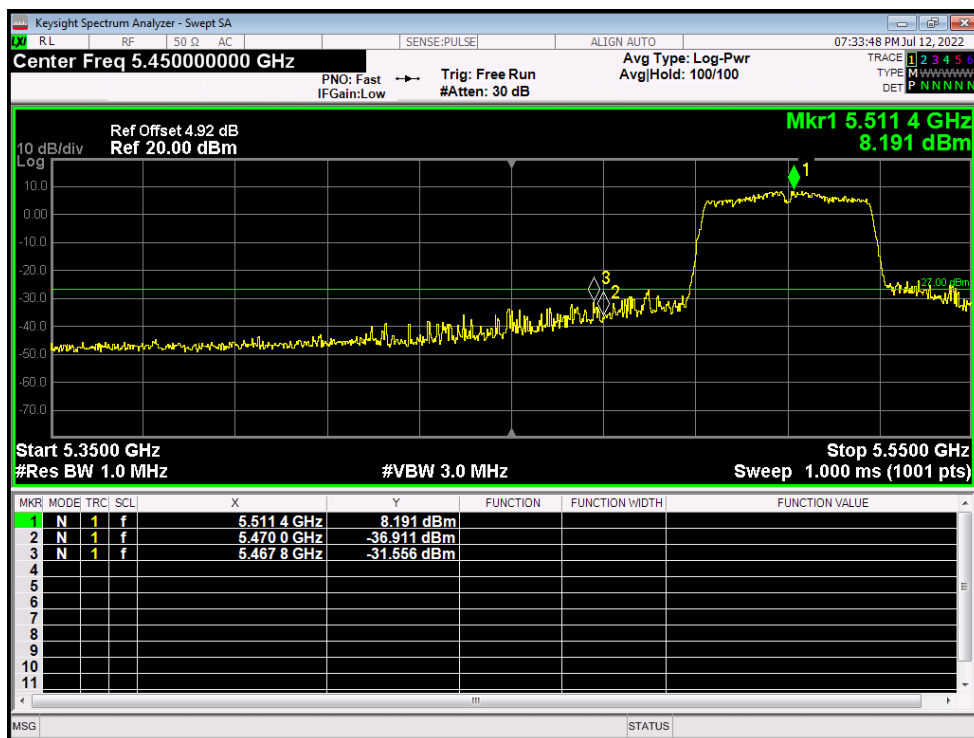

Band Edge NVNT n40 5670MHz High Ant1