


EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11g	Test Voltage	120V / 60Hz

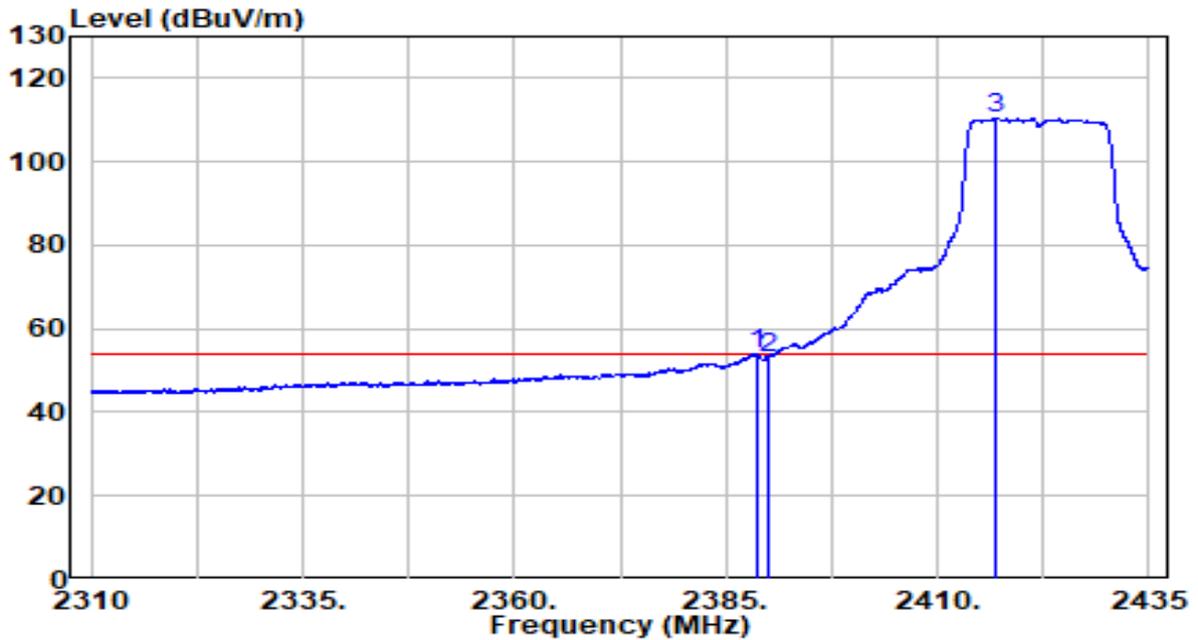


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.688	21.62	32.21	53.83	-0.17	54.00	Average
2	2390.000	20.97	32.22	53.19	-0.81	54.00	Average
3	* 2417.000	78.11	32.33	110.44	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11g	Test Voltage	120V / 60Hz

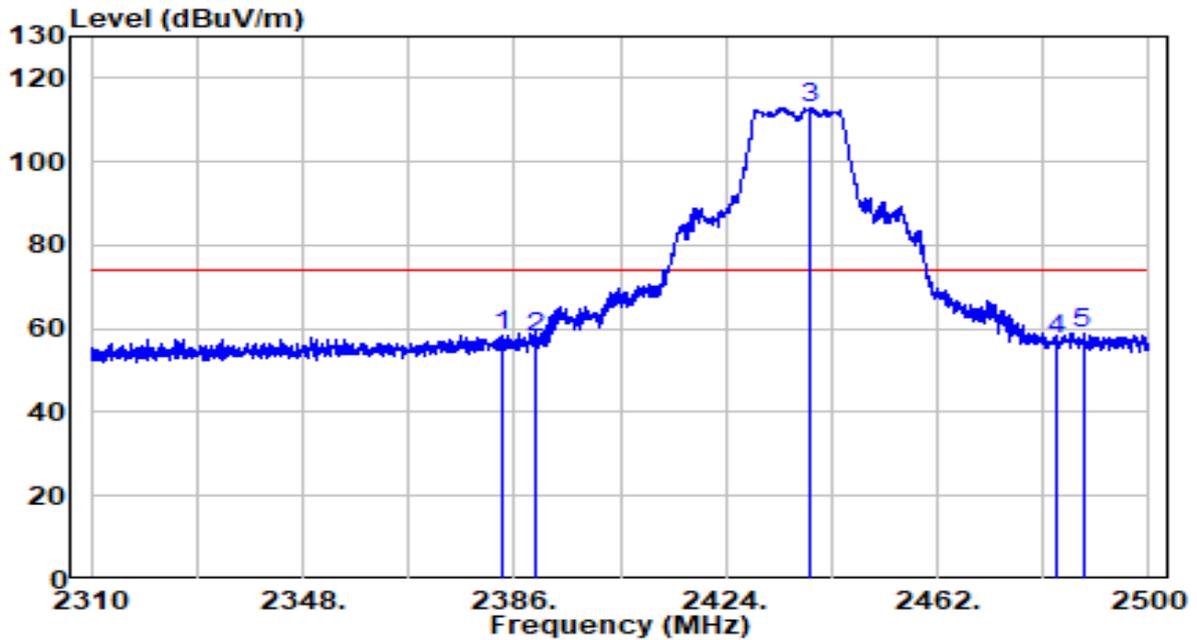


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2384.005	26.34	32.19	58.54	-15.46	74.00	Peak
2	2390.000	25.52	32.22	57.74	-16.26	74.00	Peak
3	* 2439.105	80.47	32.42	112.89	N/A	N/A	Peak
4	2483.500	24.82	32.61	57.43	-16.57	74.00	Peak
5	2488.125	26.26	32.63	58.89	-15.11	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11g	Test Voltage	120V / 60Hz

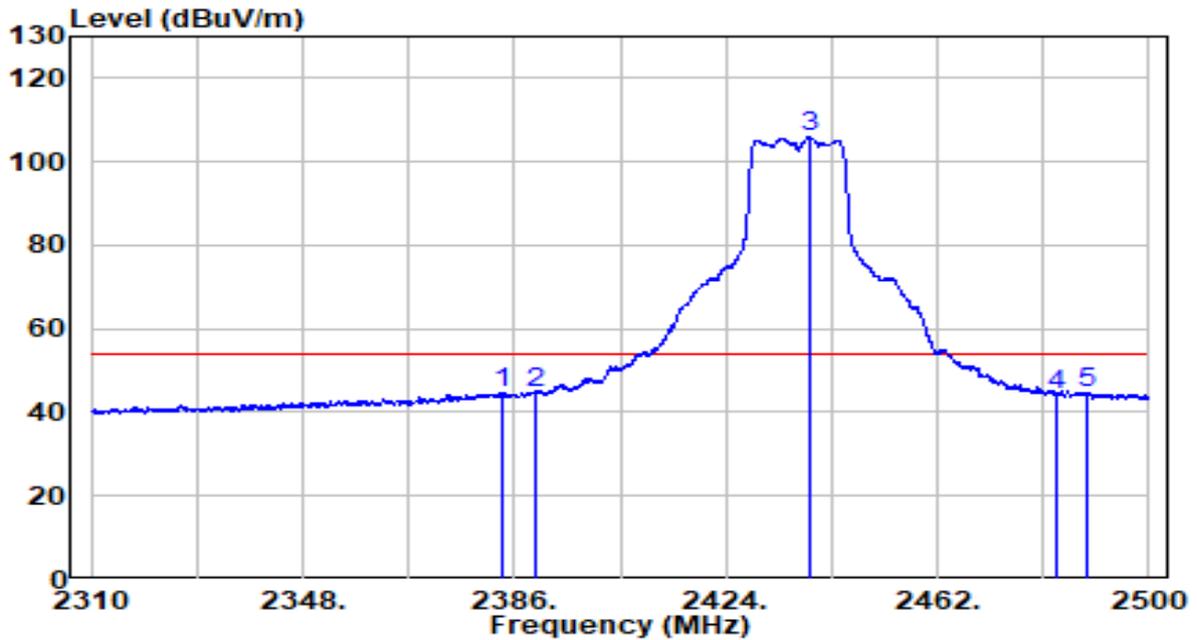


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2384.005	12.64	32.19	44.83	-9.17	54.00	Average
2	2390.000	12.39	32.22	44.61	-9.39	54.00	Average
3	* 2438.915	73.46	32.42	105.88	N/A	N/A	Average
4	2483.500	11.77	32.61	44.38	-9.62	54.00	Average
5	2489.075	12.16	32.63	44.79	-9.21	54.00	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11g	Test Voltage	120V / 60Hz

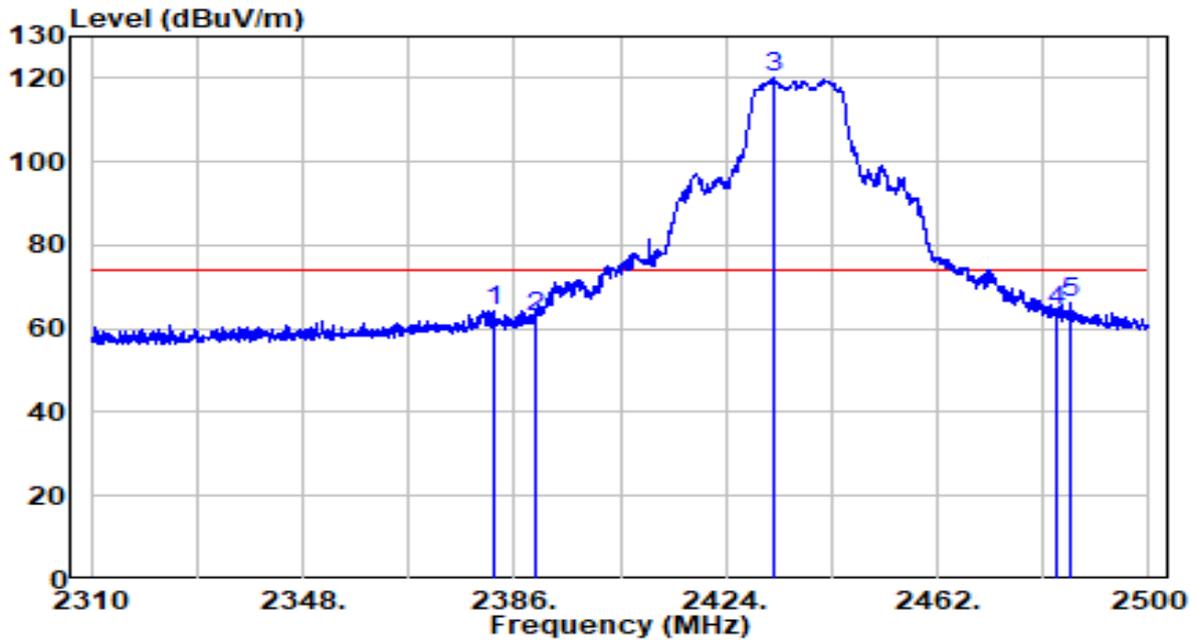


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2382.390	32.24	32.19	64.43	-9.57	74.00	Peak
2	2390.000	30.62	32.22	62.83	-11.17	74.00	Peak
3	* 2432.550	87.64	32.40	120.04	N/A	N/A	Peak
4	2483.500	31.41	32.61	64.02	-9.98	74.00	Peak
5	2485.940	33.48	32.62	66.10	-7.90	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11g	Test Voltage	120V / 60Hz

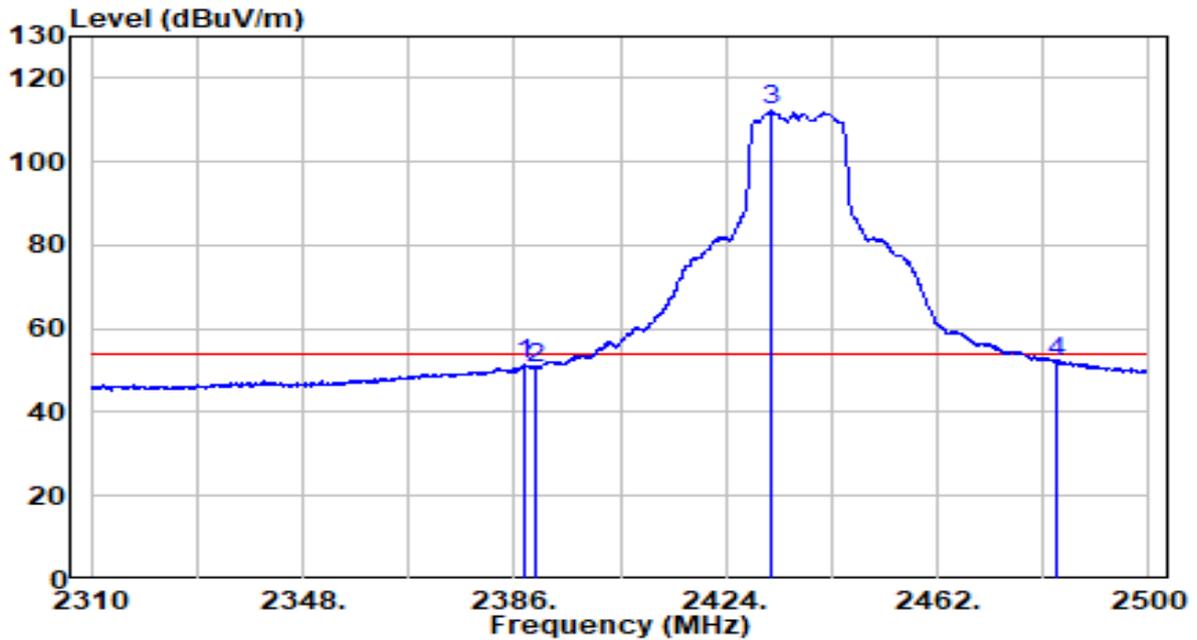


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.805	19.17	32.21	51.38	-2.62	54.00	Average
2	2390.000	18.37	32.22	50.59	-3.41	54.00	Average
3	* 2432.170	79.74	32.40	112.14	N/A	N/A	Average
4	2483.500	19.34	32.61	51.95	-2.05	54.00	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11g	Test Voltage	120V / 60Hz

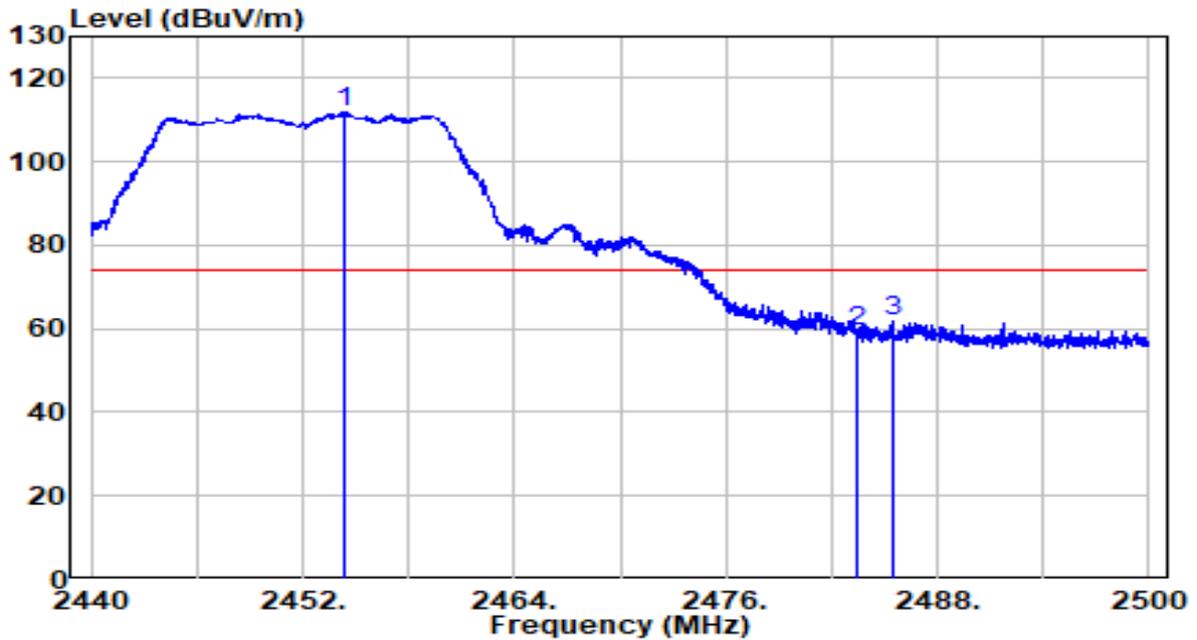


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2454.400	79.43	32.49	111.92	N/A	N/A	Peak
2	2483.500	26.56	32.61	59.17	-14.83	74.00	Peak
3	2485.420	28.99	32.62	61.61	-12.39	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11g	Test Voltage	120V / 60Hz

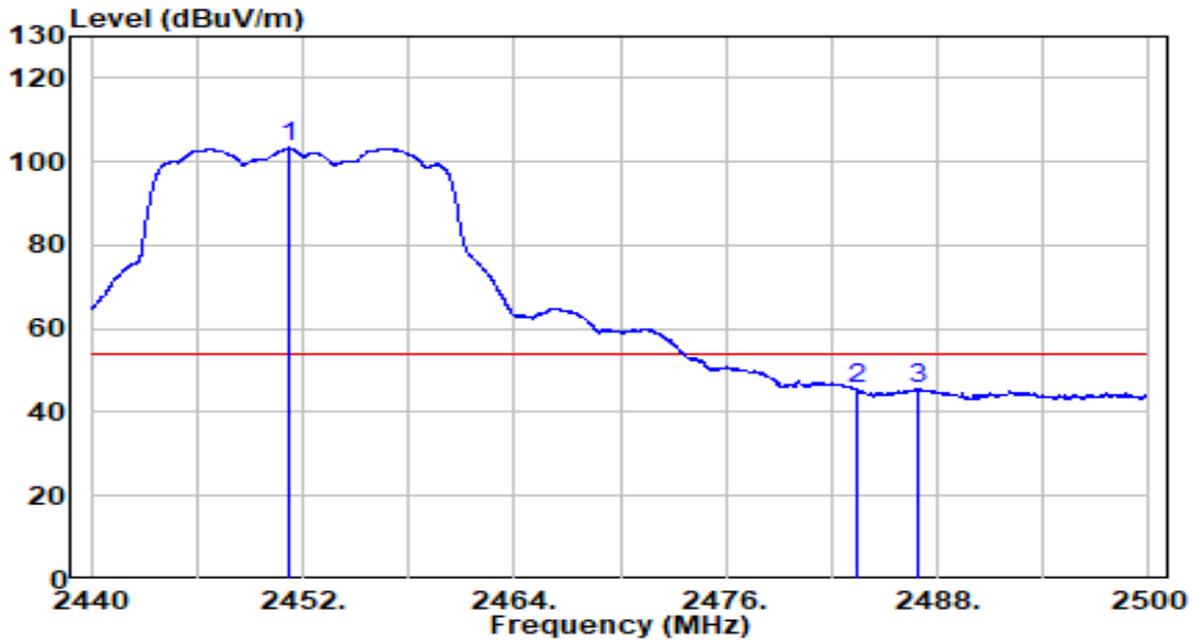


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2451.220	70.83	32.48	103.30	N/A	N/A	Average
2	2483.500	12.80	32.61	45.41	-8.59	54.00	Average
3	2486.950	12.84	32.63	45.46	-8.54	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11g	Test Voltage	120V / 60Hz

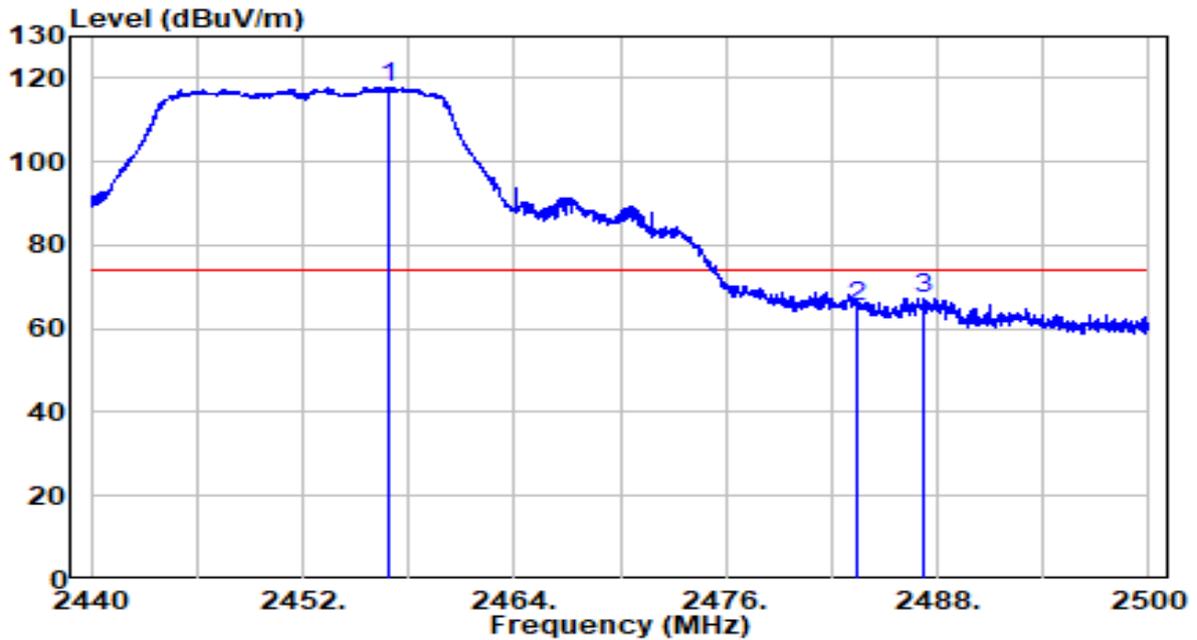


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2456.950	85.46	32.50	117.96	N/A	N/A	Peak
2		2483.500	32.67	32.61	65.28	-8.72	74.00	Peak
3		2487.190	34.57	32.63	67.20	-6.80	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11g	Test Voltage	120V / 60Hz

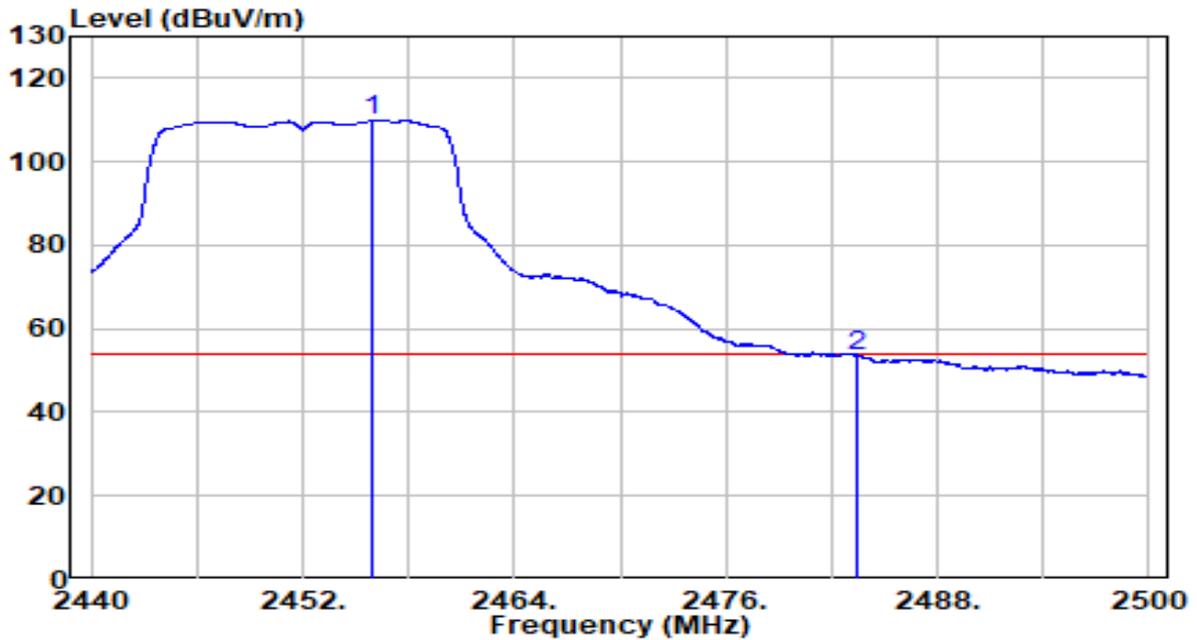


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.990	77.46	32.50	109.96	N/A	N/A	Average
2	2483.500	21.04	32.61	53.65	-0.35	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11g	Test Voltage	120V / 60Hz

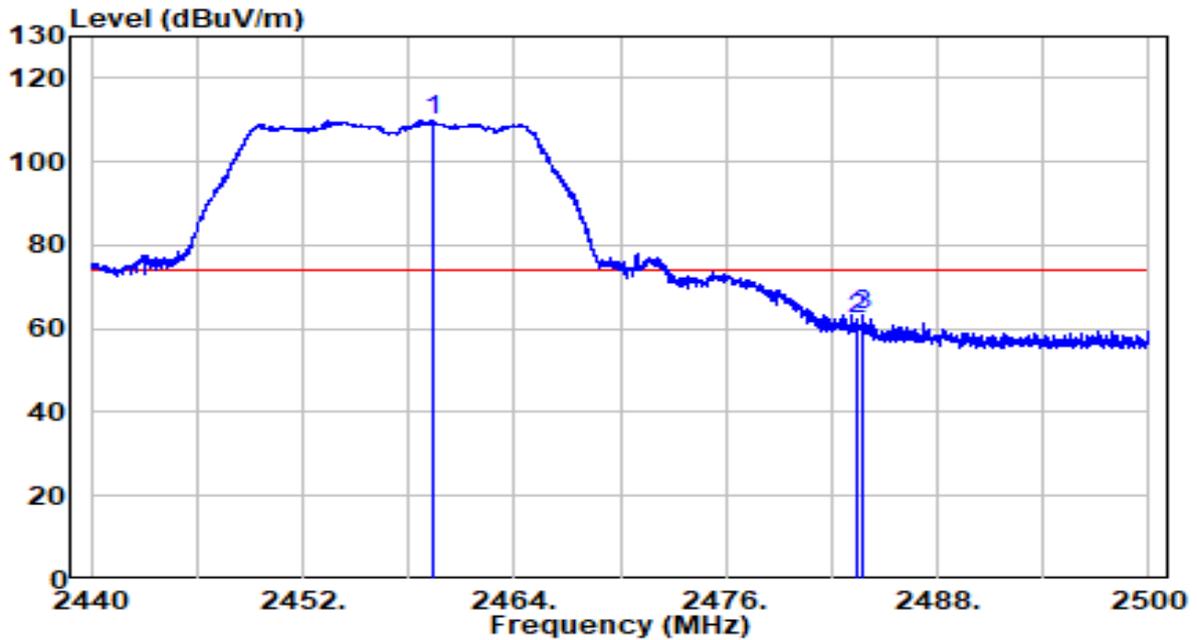


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2459.410	77.45	32.51	109.96	N/A	N/A	Peak
2	2483.500	29.91	32.61	62.52	-11.48	74.00	Peak
3	2483.740	30.65	32.61	63.26	-10.74	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11g	Test Voltage	120V / 60Hz

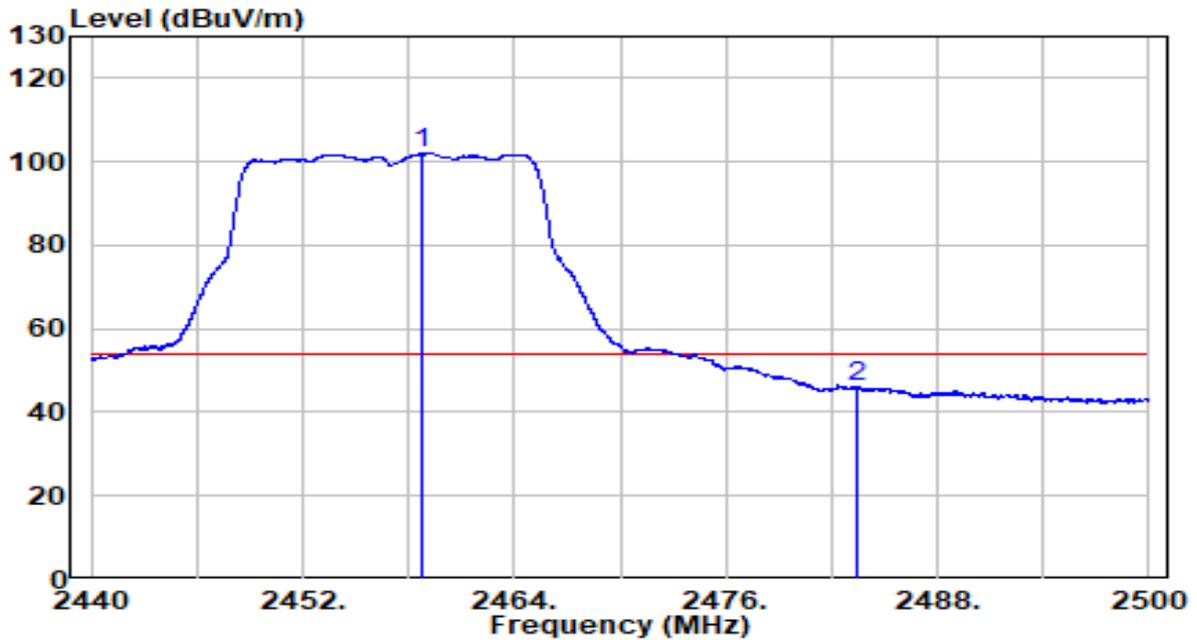


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2458.840	69.49	32.51	102.00	N/A	N/A	Average
2	2483.500	13.30	32.61	45.91	-8.09	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11g	Test Voltage	120V / 60Hz

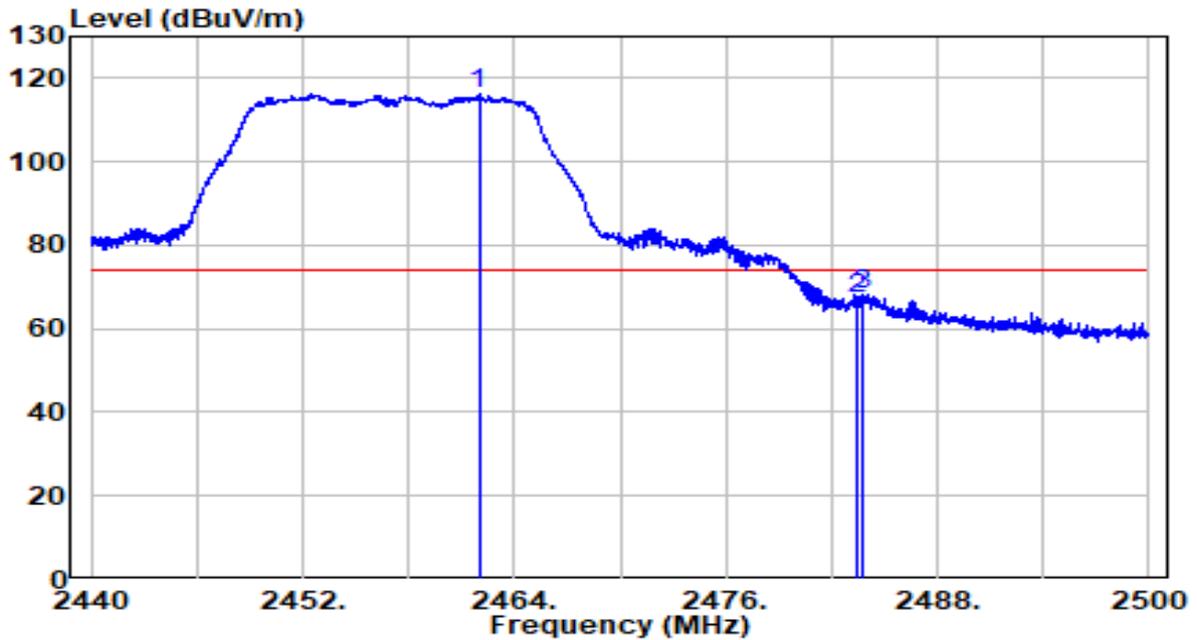


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2461.990	83.60	32.52	116.12	N/A	N/A	Peak
2	2483.500	34.62	32.61	67.23	-6.77	74.00	Peak
3	2483.800	35.80	32.61	68.41	-5.59	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11g	Test Voltage	120V / 60Hz

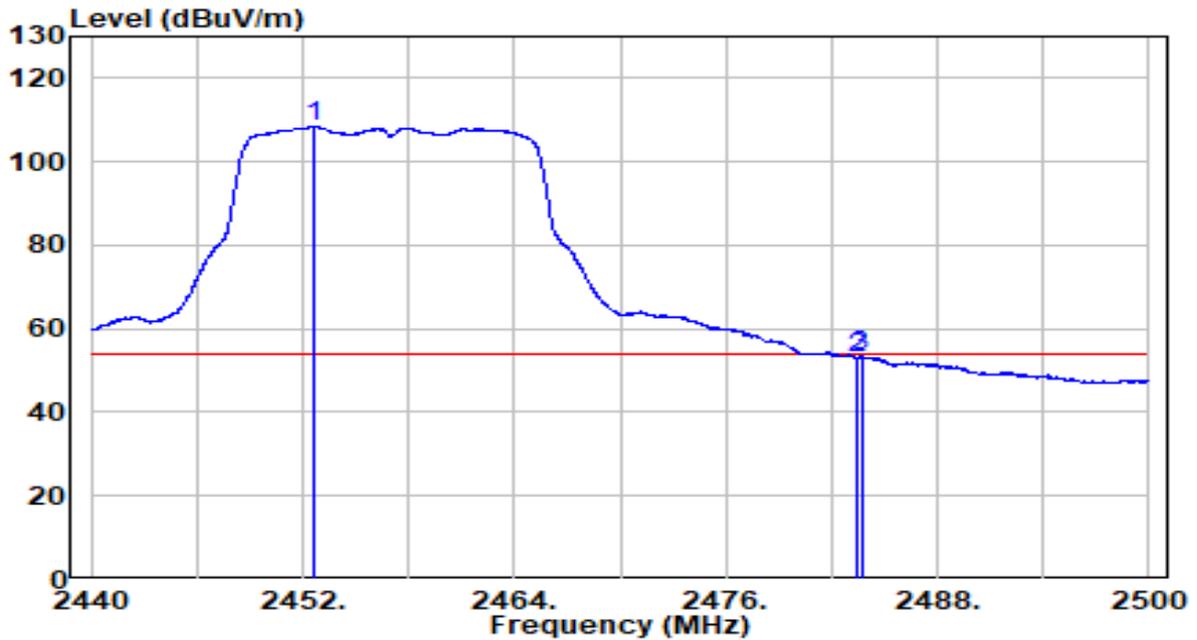


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2452.600	75.88	32.48	108.36	N/A	N/A	Average
2	2483.500	20.48	32.61	53.09	-0.91	54.00	Average
3	2483.680	20.81	32.61	53.43	-0.57	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11g	Test Voltage	120V / 60Hz

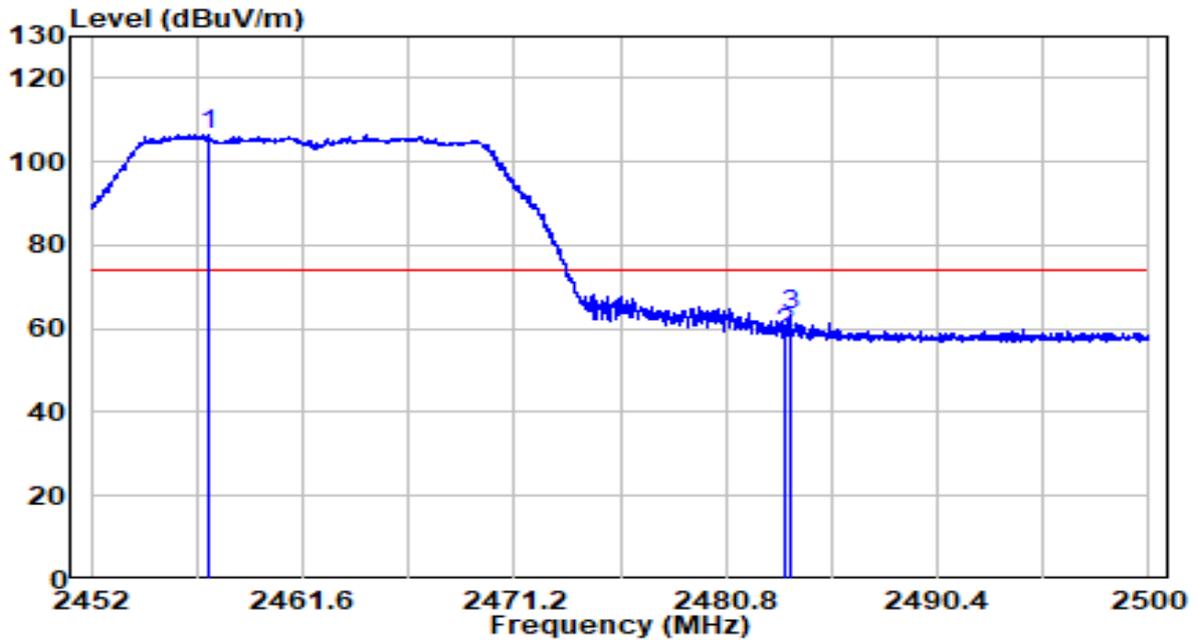


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2457.328	74.13	32.50	106.63	N/A	N/A	Peak
2	2483.500	26.11	32.61	58.72	-15.28	74.00	Peak
3	2483.704	30.76	32.61	63.37	-10.63	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11g	Test Voltage	120V / 60Hz

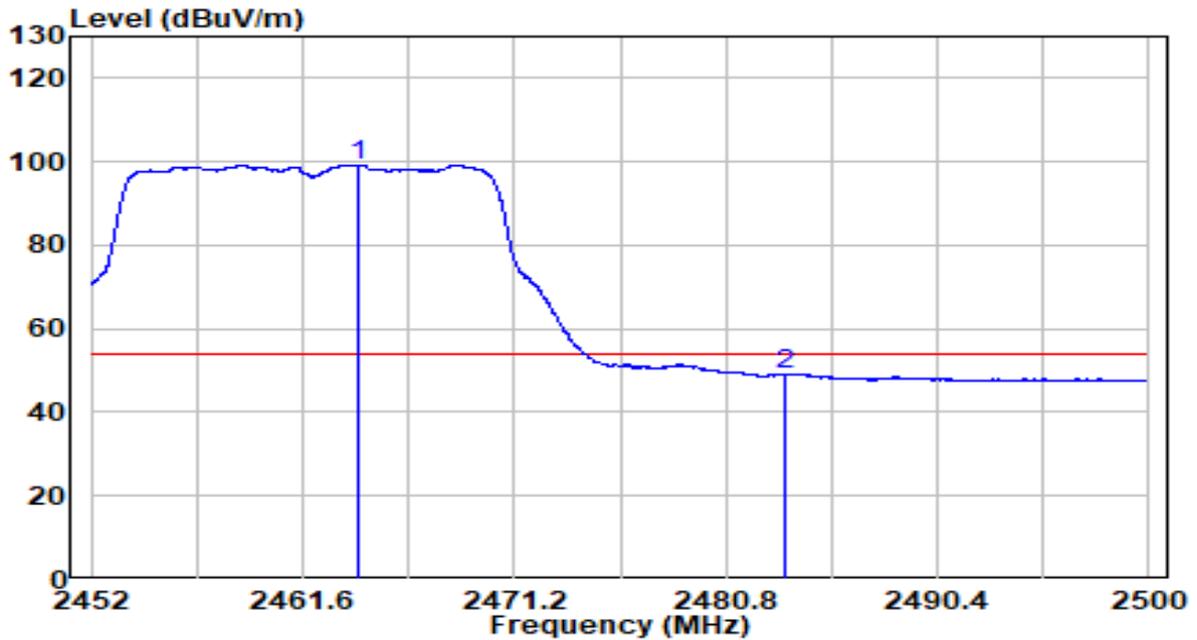


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2464.072	66.77	32.53	99.30	N/A	N/A	Average
2	2483.500	16.63	32.61	49.24	-4.76	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11g	Test Voltage	120V / 60Hz

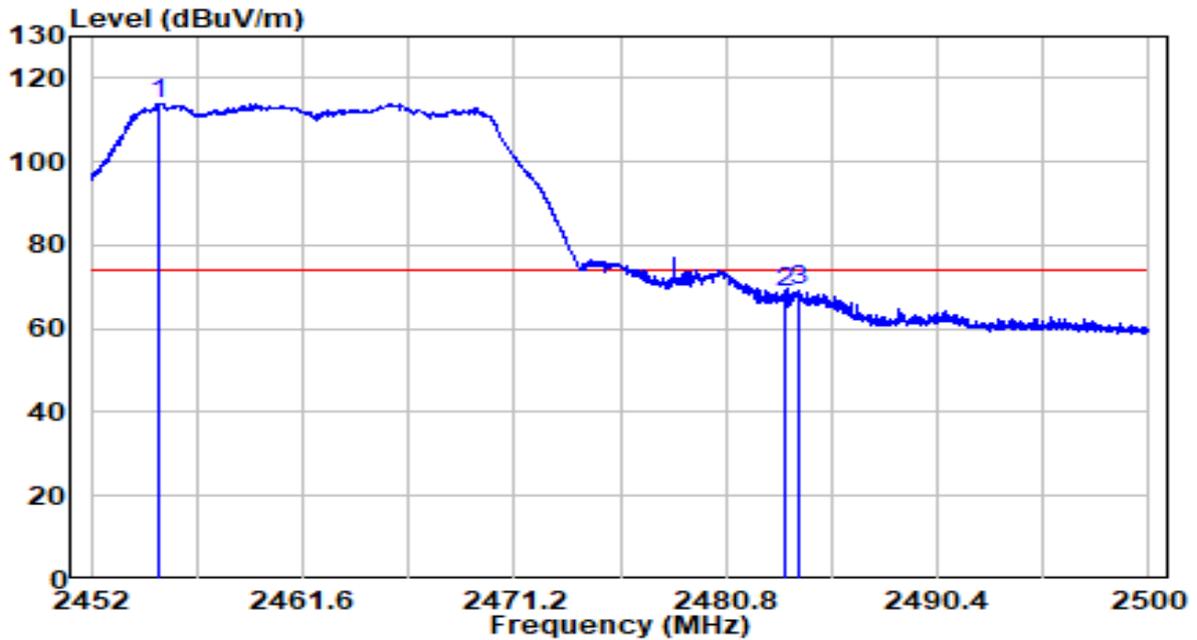


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.048	81.39	32.49	113.88	N/A	N/A	Peak
2	2483.500	36.06	32.61	68.67	-5.33	74.00	Peak
3	2484.112	36.70	32.61	69.31	-4.69	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11g	Test Voltage	120V / 60Hz

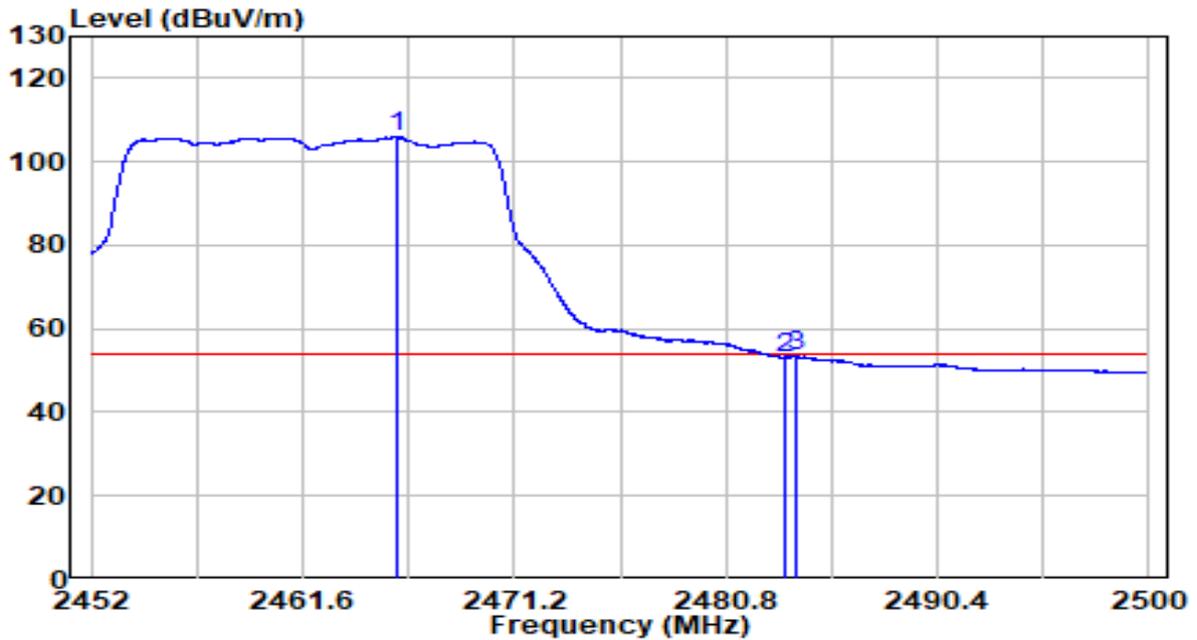


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2465.896	73.37	32.54	105.91	N/A	N/A	Average
2	2483.500	20.61	32.61	53.22	-0.78	54.00	Average
3	2484.040	20.89	32.61	53.51	-0.49	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

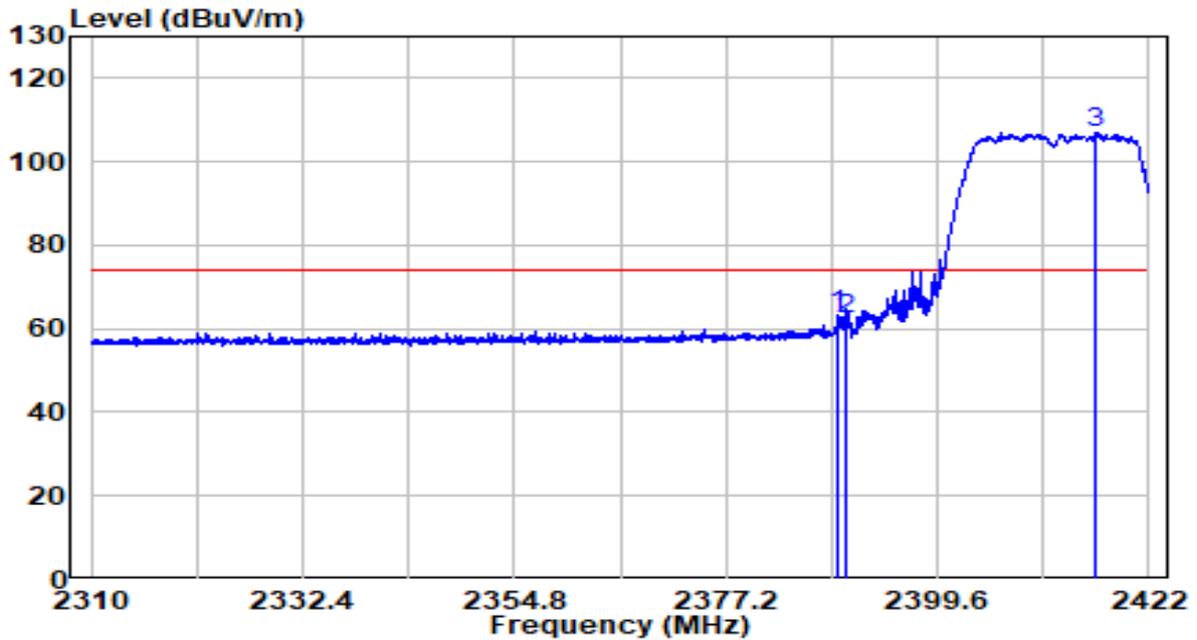


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.072	31.12	32.21	63.34	-10.66	74.00	Peak
2	2390.000	30.25	32.22	62.47	-11.53	74.00	Peak
3	* 2416.456	74.61	32.33	106.94	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

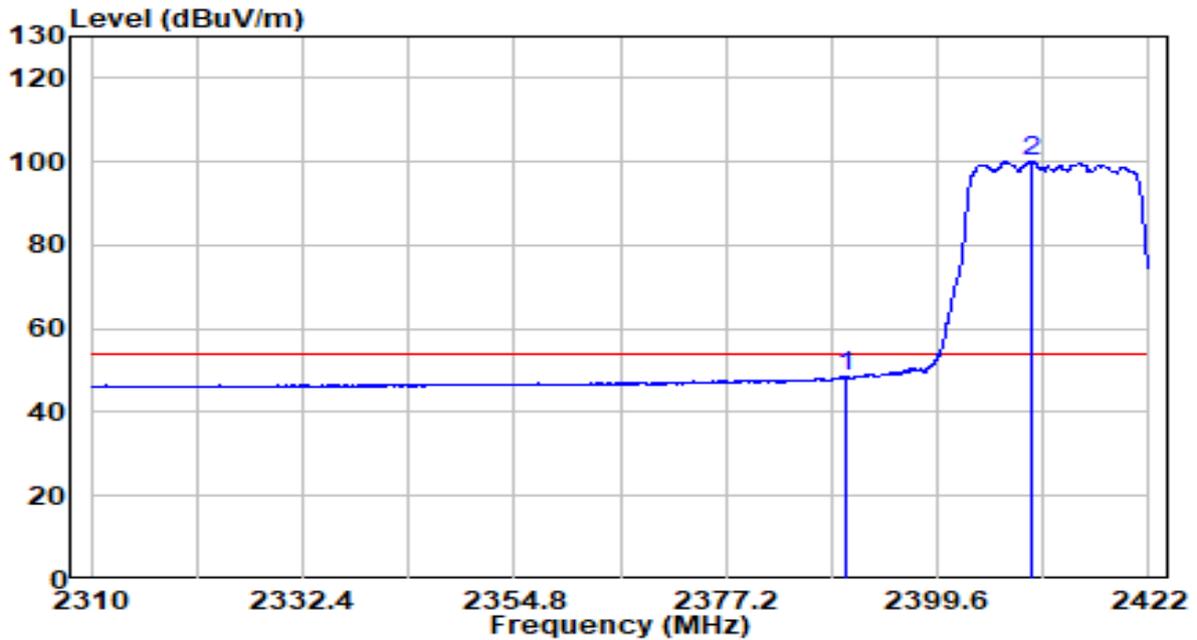


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	16.22	32.22	48.44	-5.56	54.00	Average
2	* 2409.456	67.87	32.30	100.17	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

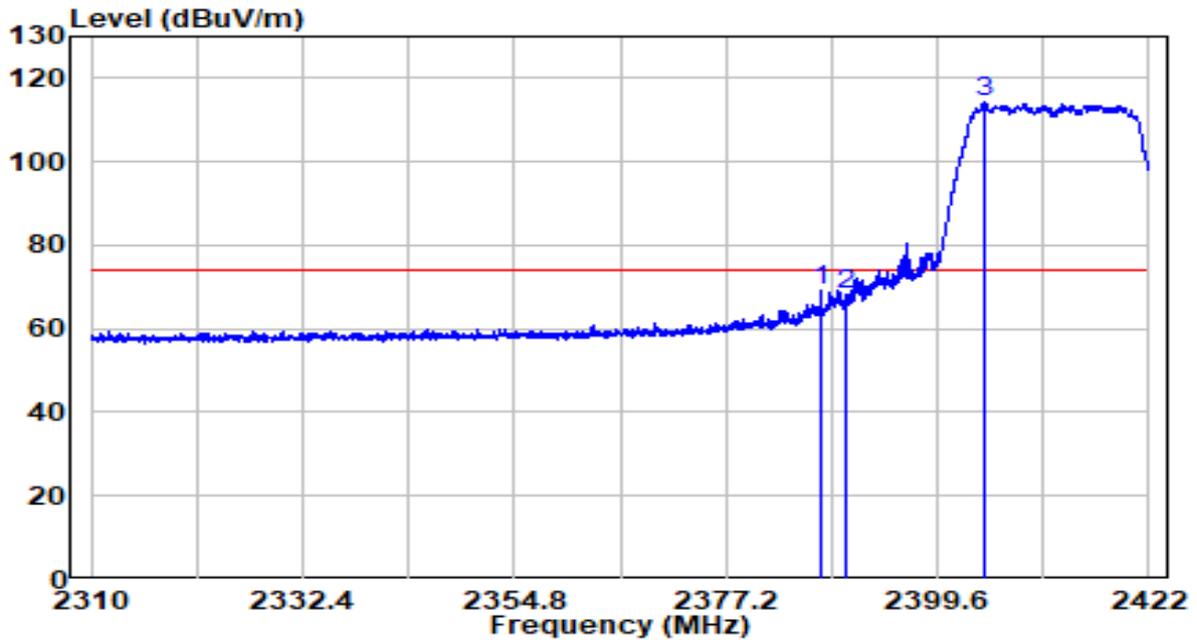


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.224	36.76	32.21	68.96	-5.04	74.00	Peak
2	2390.000	35.78	32.22	68.00	-6.00	74.00	Peak
3	* 2404.528	82.07	32.28	114.34	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

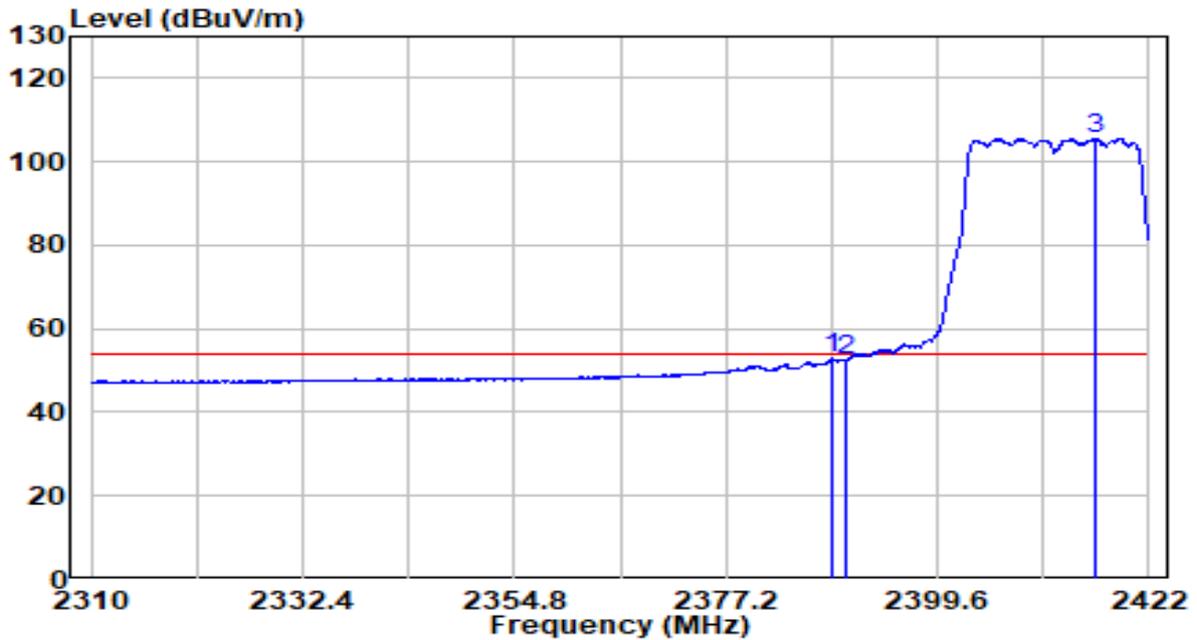


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.568	20.57	32.21	52.78	-1.22	54.00	Average
2	2390.000	20.33	32.22	52.55	-1.45	54.00	Average
3	* 2416.344	73.37	32.33	105.70	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

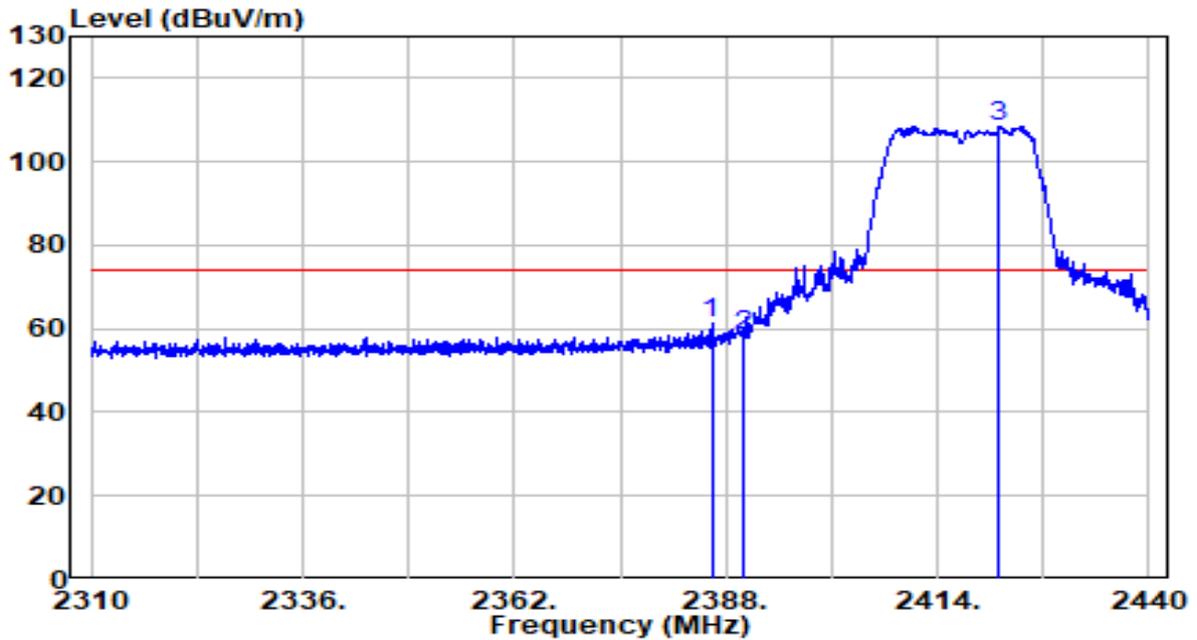


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2386.245	28.89	32.20	61.09	-12.91	74.00	Peak
2	2390.000	26.36	32.22	58.58	-15.42	74.00	Peak
3	* 2421.540	76.29	32.35	108.64	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

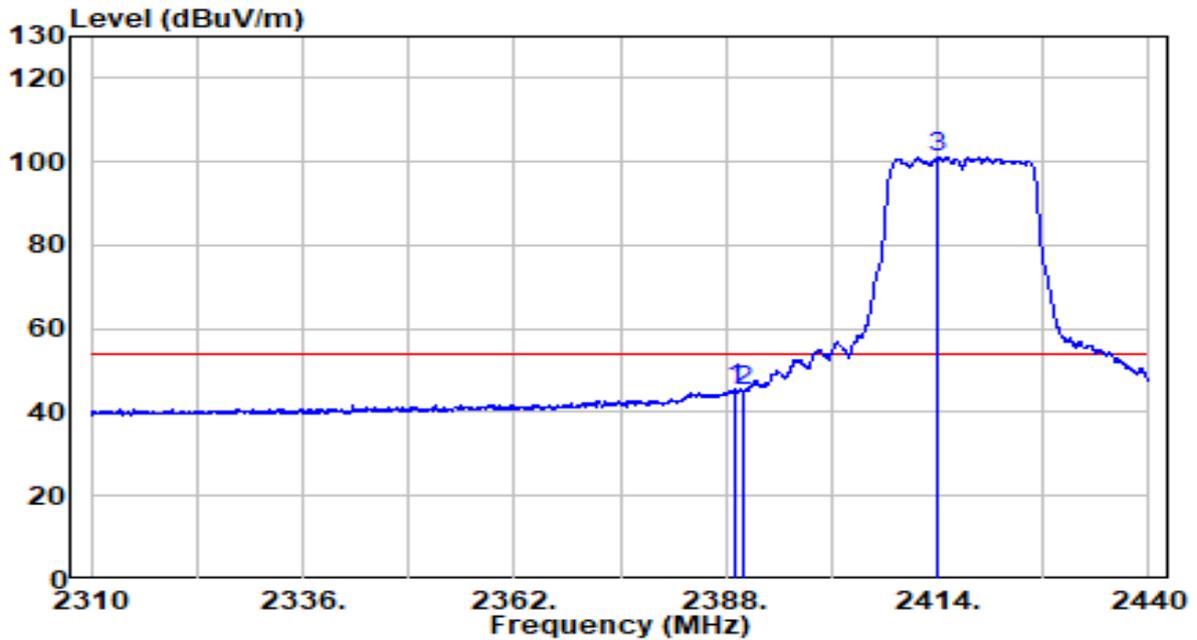


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.300	13.30	32.22	45.51	-8.49	54.00	Average
2	2390.000	12.91	32.22	45.13	-8.87	54.00	Average
3	* 2414.000	68.83	32.32	101.15	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

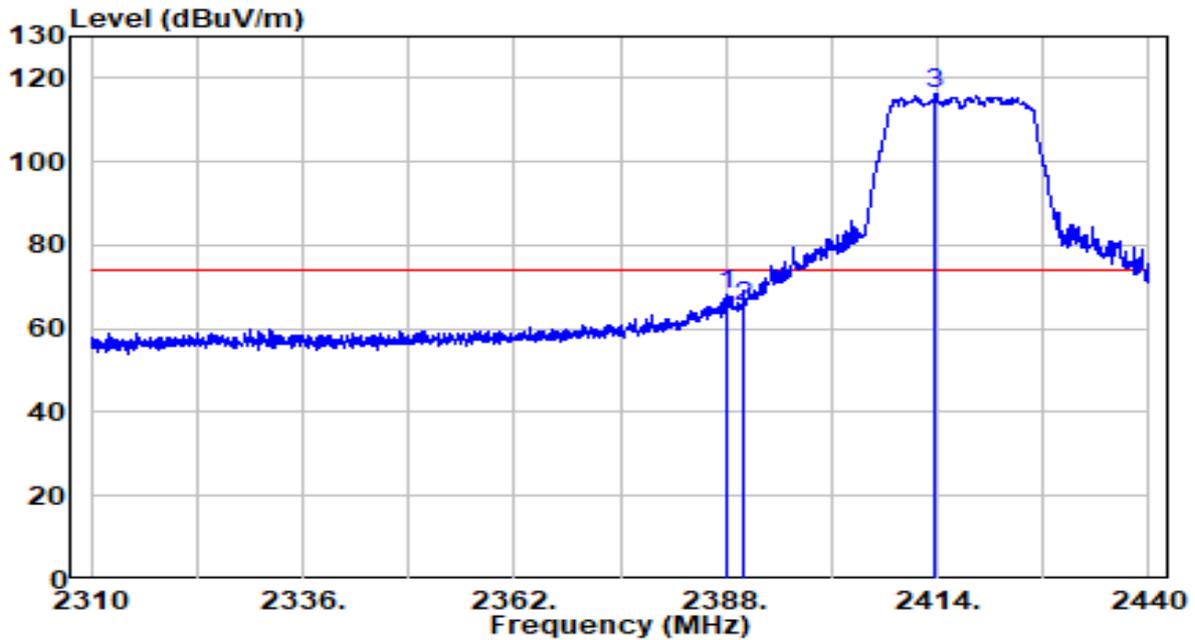


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.260	36.15	32.21	68.36	-5.64	74.00	Peak
2	2390.000	32.98	32.22	65.19	-8.81	74.00	Peak
3	* 2413.805	83.92	32.32	116.24	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

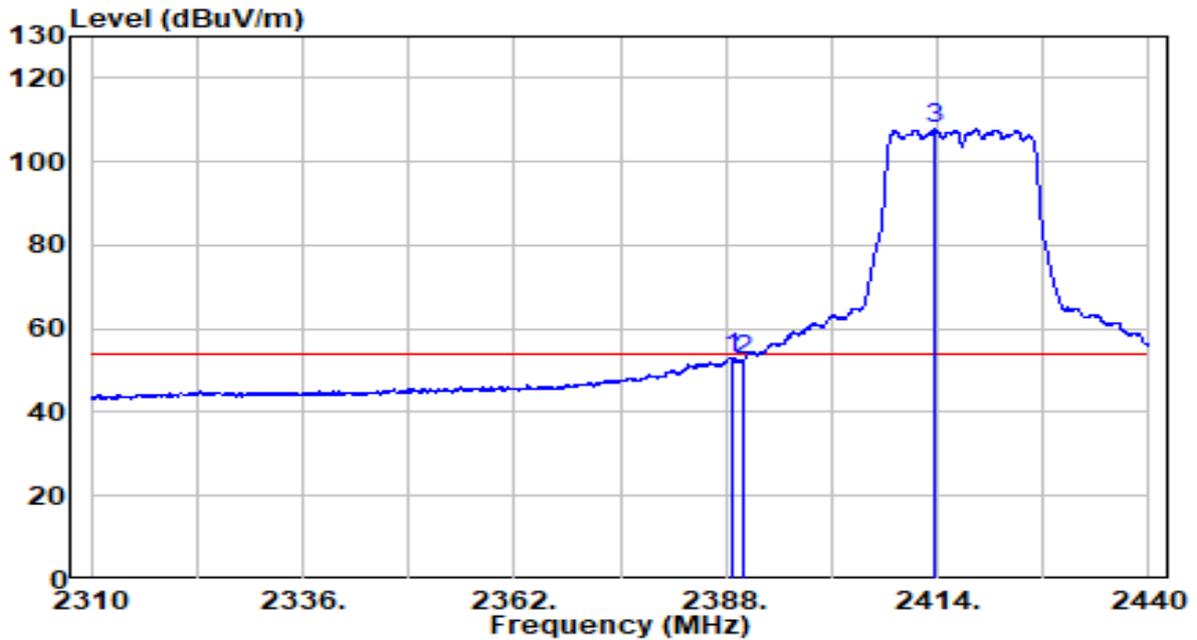


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.715	20.99	32.21	53.20	-0.80	54.00	Average
2	2390.000	20.10	32.22	52.32	-1.68	54.00	Average
3	* 2413.675	75.41	32.32	107.73	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

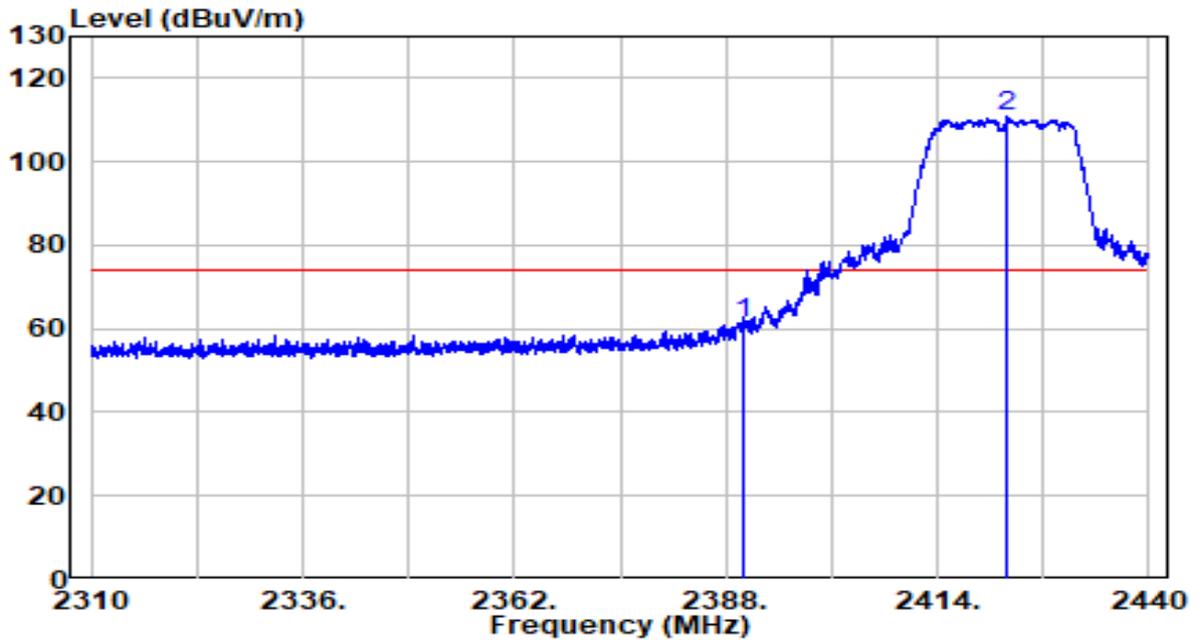


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	29.23	32.22	61.45	-12.55	74.00	Peak
2	* 2422.645	78.46	32.36	110.81	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

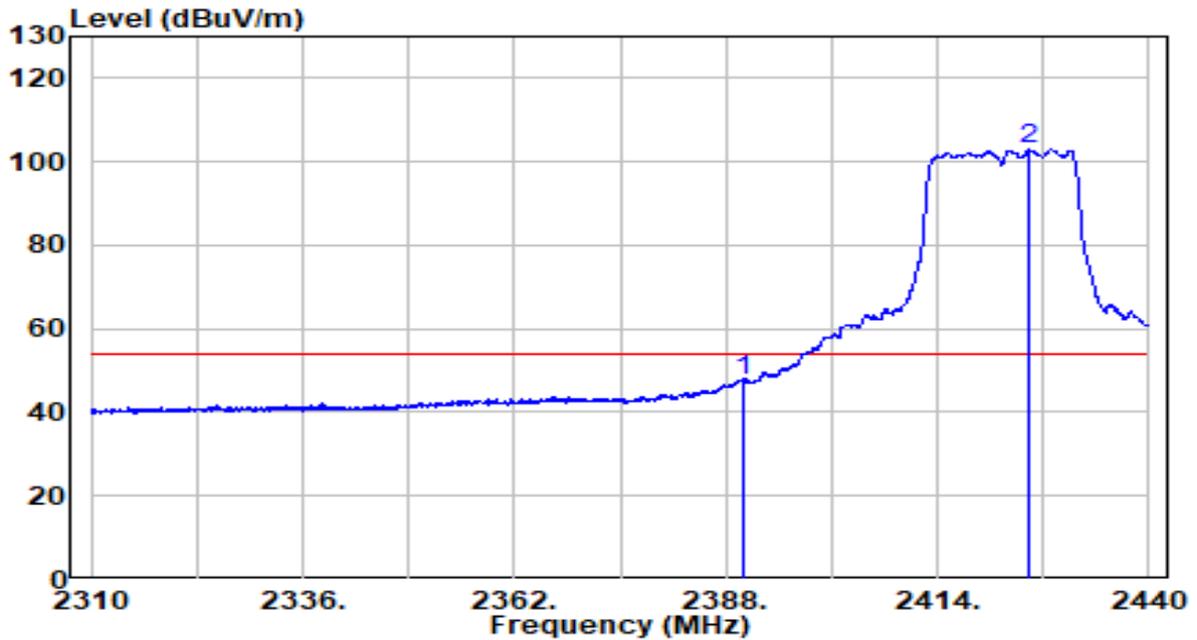


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	15.44	32.22	47.66	-6.34	54.00	Average
2	* 2425.245	70.55	32.37	102.92	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

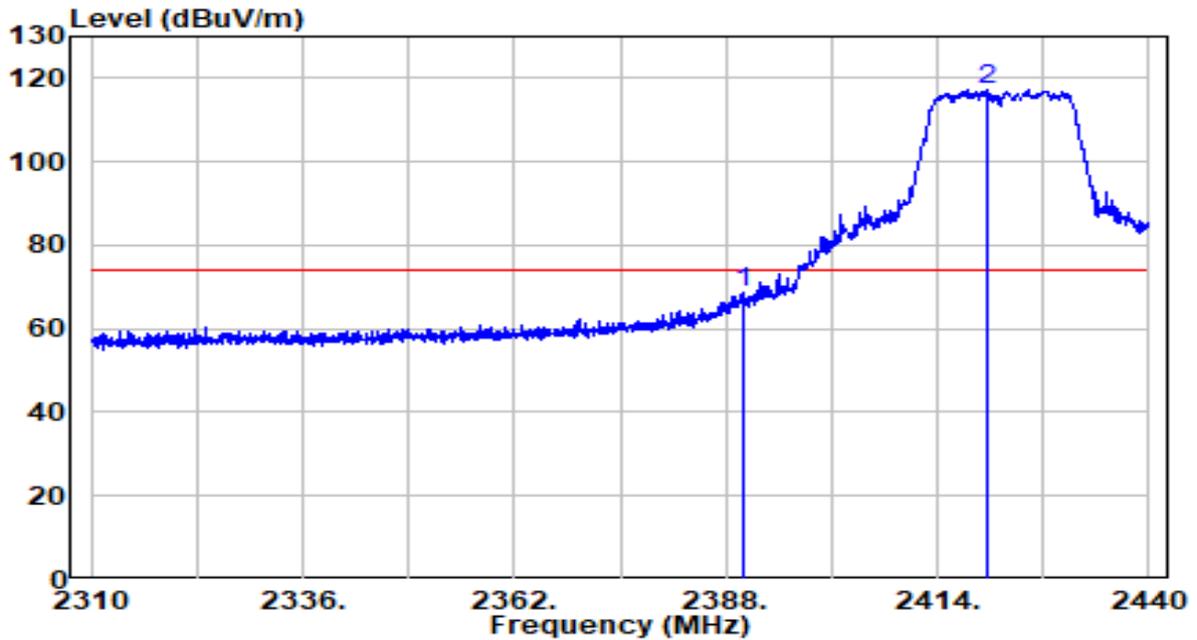


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	36.70	32.22	68.92	-5.08	74.00	Peak
2	* 2420.045	84.92	32.34	117.26	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

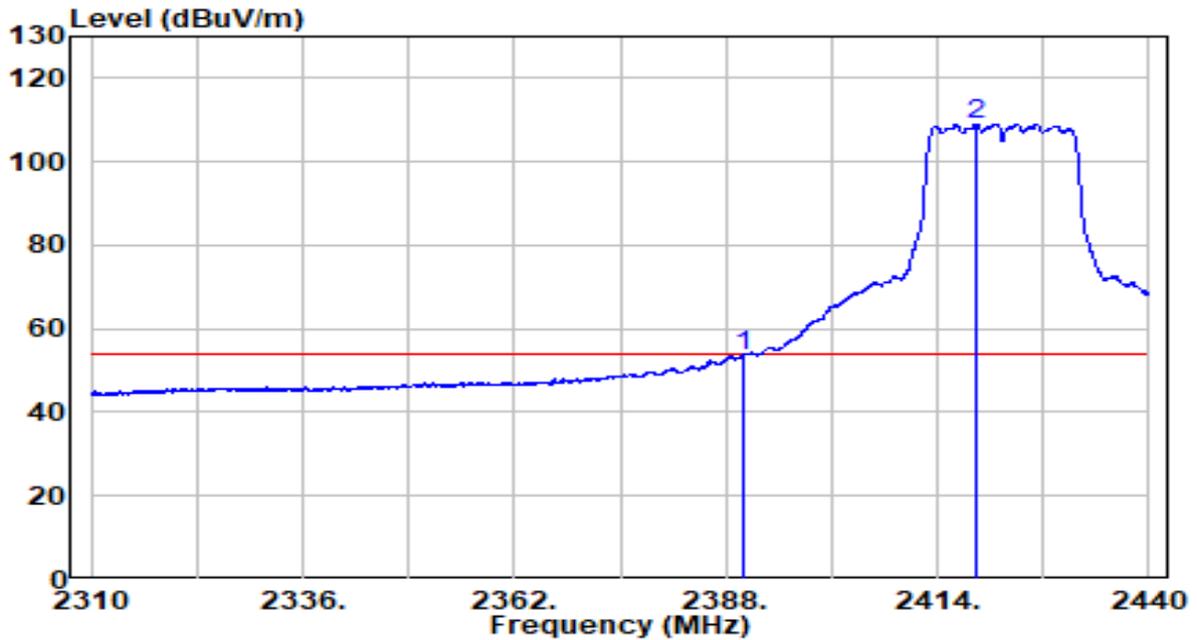


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	21.11	32.22	53.33	-0.67	54.00	Average
2	* 2418.810	76.77	32.34	109.11	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

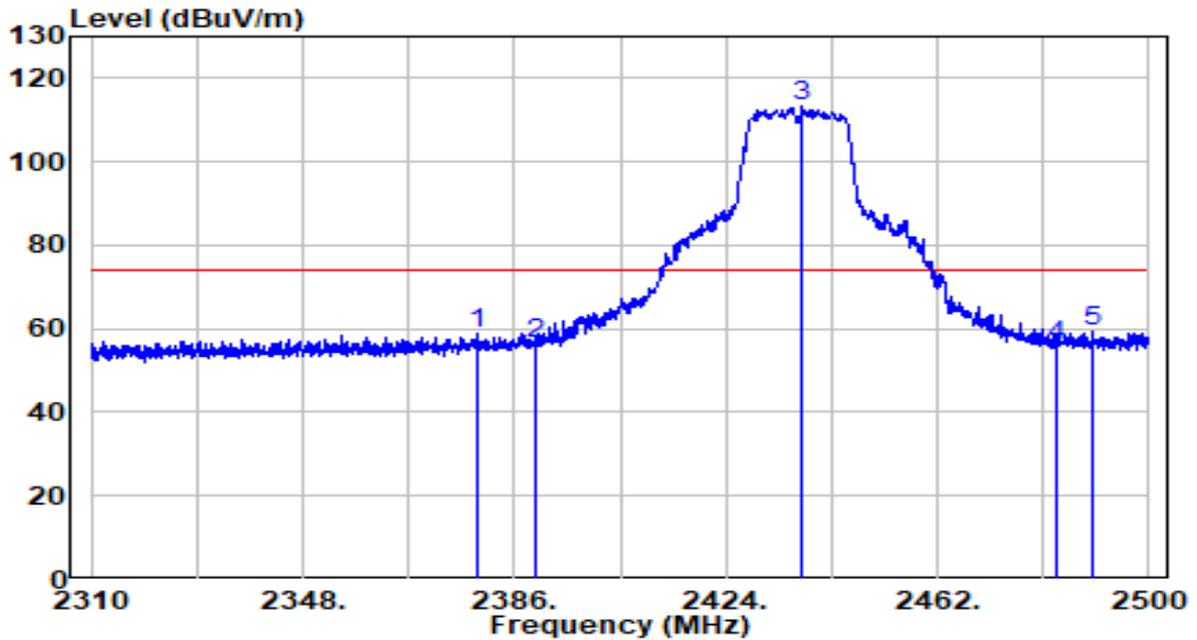


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2379.445	26.69	32.17	58.86	-15.14	74.00	Peak
2	2390.000	24.20	32.22	56.41	-17.59	74.00	Peak
3	* 2437.680	80.80	32.42	113.22	N/A	N/A	Peak
4	2483.500	23.46	32.61	56.07	-17.93	74.00	Peak
5	2489.835	26.72	32.64	59.35	-14.65	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

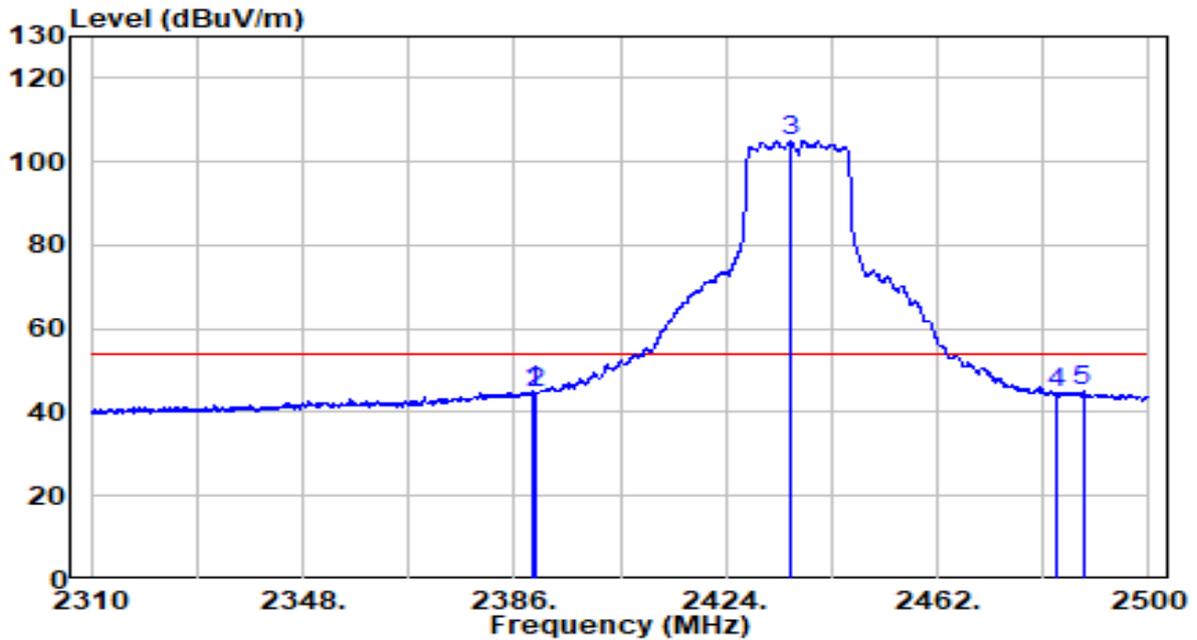


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.135	12.70	32.21	44.91	-9.09	54.00	Average
2	2390.000	12.47	32.22	44.69	-9.31	54.00	Average
3	* 2435.590	72.51	32.41	104.92	N/A	N/A	Average
4	2483.500	11.84	32.61	44.45	-9.55	54.00	Average
5	2488.125	12.40	32.63	45.03	-8.97	54.00	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

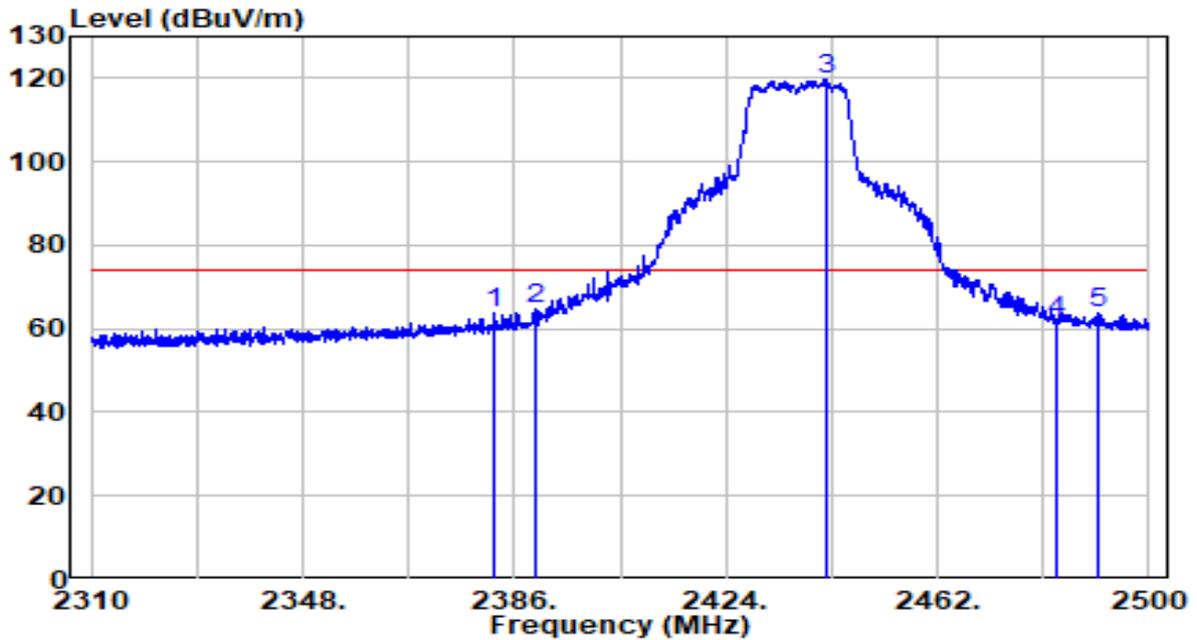


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2382.390	31.75	32.19	63.94	-10.06	74.00	Peak
2	2390.000	32.34	32.22	64.56	-9.44	74.00	Peak
3	* 2441.860	87.03	32.44	119.47	N/A	N/A	Peak
4	2483.500	29.15	32.61	61.76	-12.24	74.00	Peak
5	2490.975	31.00	32.64	63.64	-10.36	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

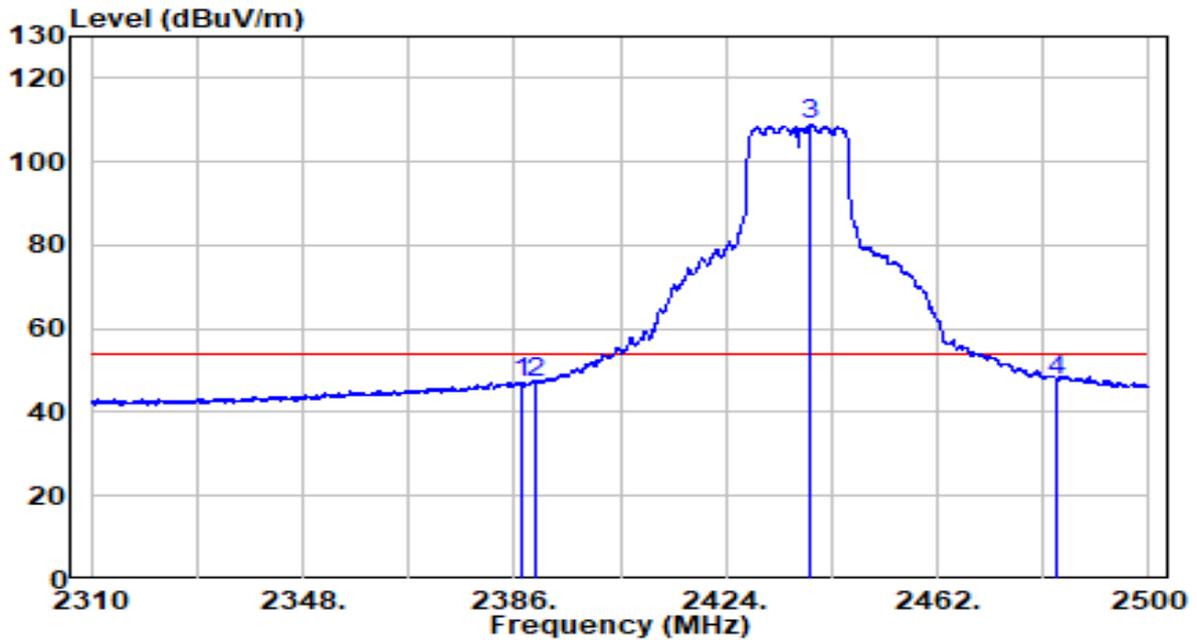


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.520	15.10	32.21	47.31	-6.69	54.00	Average
2	2390.000	15.00	32.22	47.22	-6.78	54.00	Average
3	* 2439.200	76.56	32.42	108.98	N/A	N/A	Average
4	2483.500	15.19	32.61	47.80	-6.20	54.00	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

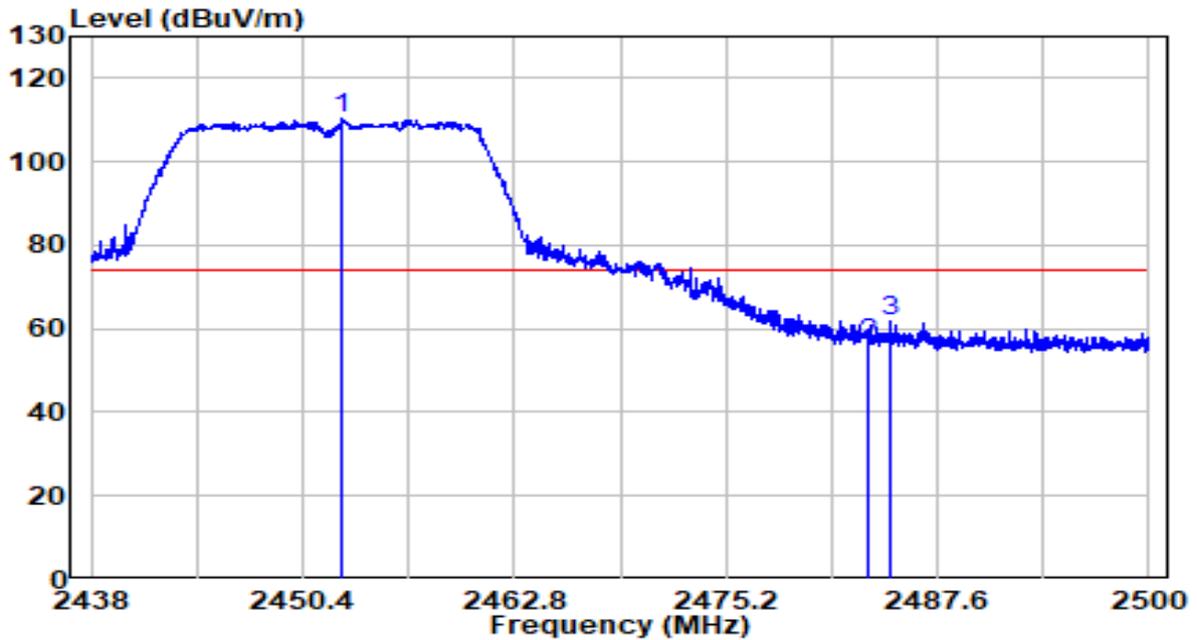


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	77.72	32.48	110.20	N/A	N/A	Peak
2		23.95	32.61	56.56	-17.44	74.00	Peak
3		29.21	32.62	61.83	-12.17	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

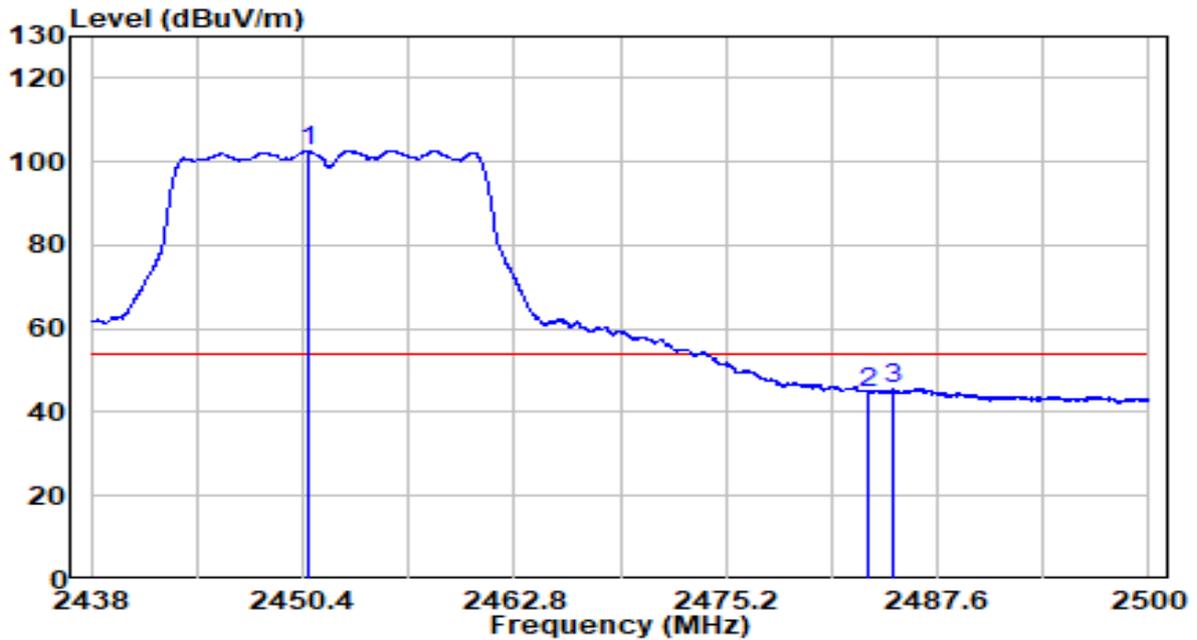


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2450.679	70.23	32.47	102.71	N/A	N/A	Average
2	2483.500	12.14	32.61	44.75	-9.25	54.00	Average
3	2484.996	12.94	32.62	45.56	-8.44	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

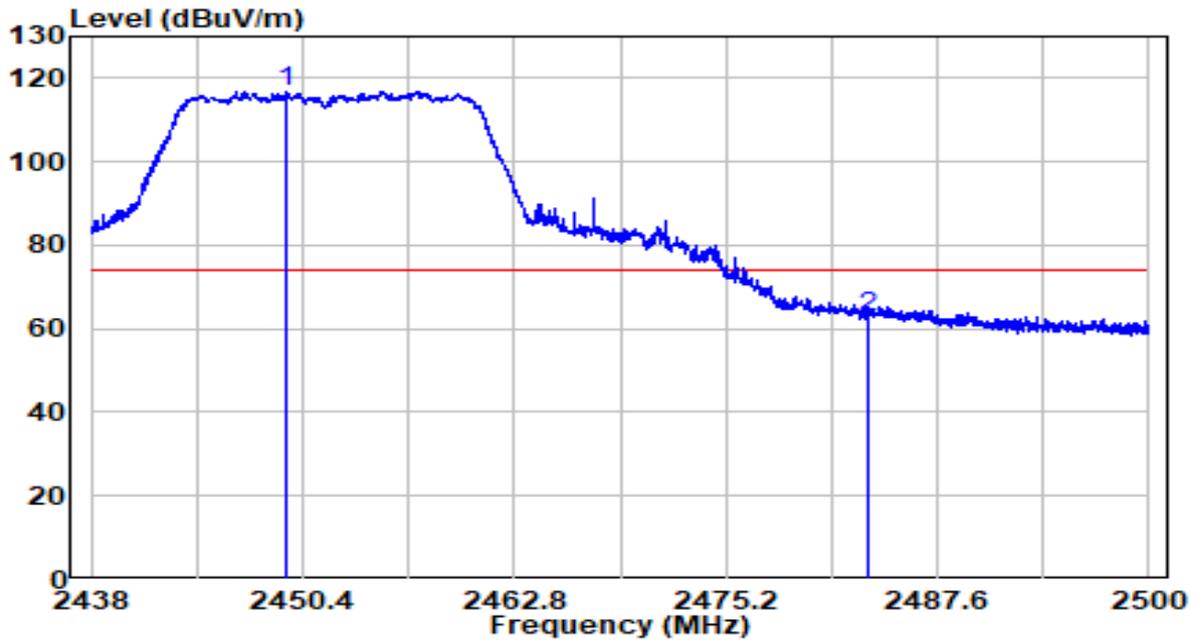


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2449.408	84.30	32.47	116.77	N/A	N/A	Peak
2	2483.500	30.42	32.61	63.03	-10.97	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

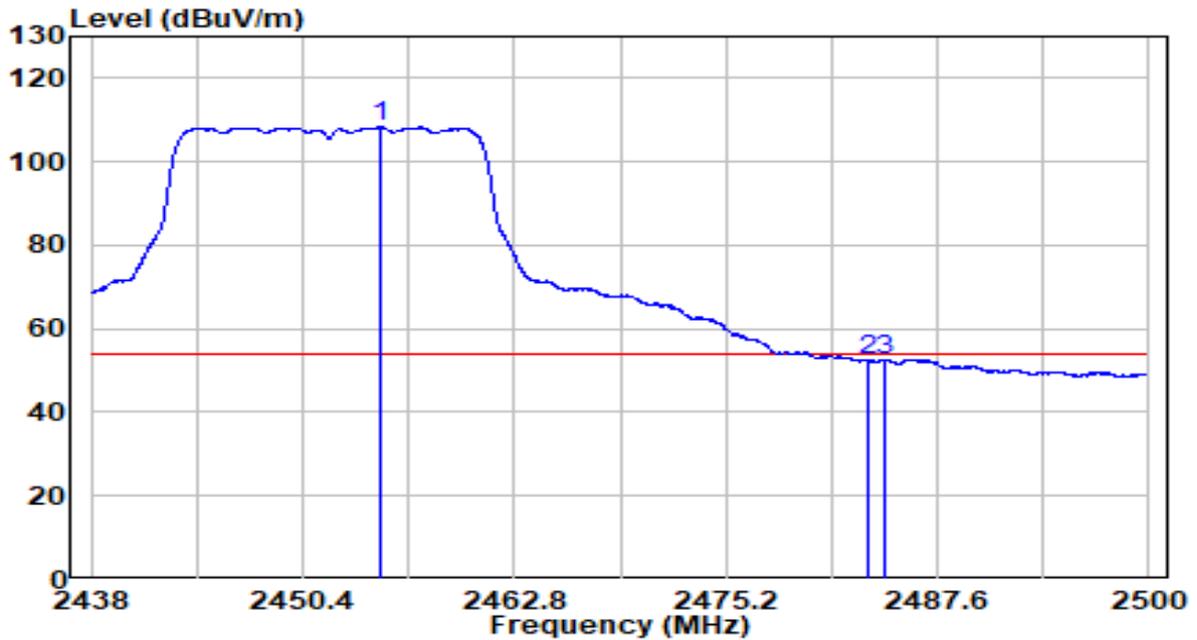


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2454.895	75.82	32.49	108.31	N/A	N/A	Average
2	2483.500	19.89	32.61	52.50	-1.50	54.00	Average
3	2484.562	19.95	32.62	52.57	-1.43	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

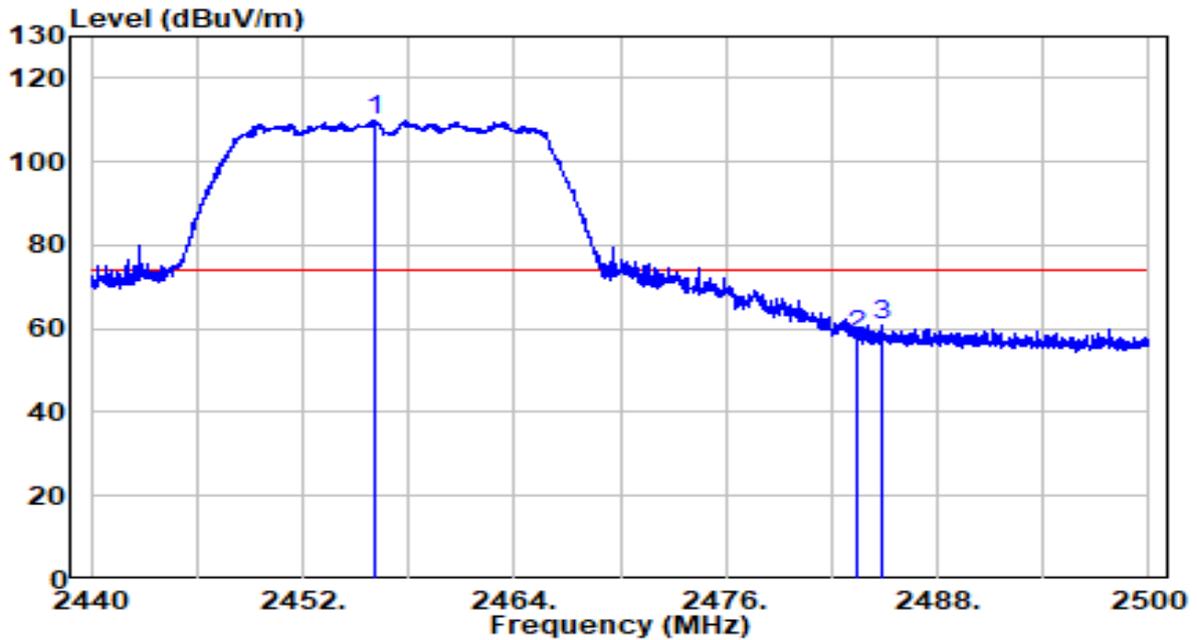


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2456.020	77.54	32.50	110.03	N/A	N/A	Peak
2	2483.500	25.64	32.61	58.25	-15.75	74.00	Peak
3	2484.790	28.08	32.62	60.70	-13.30	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

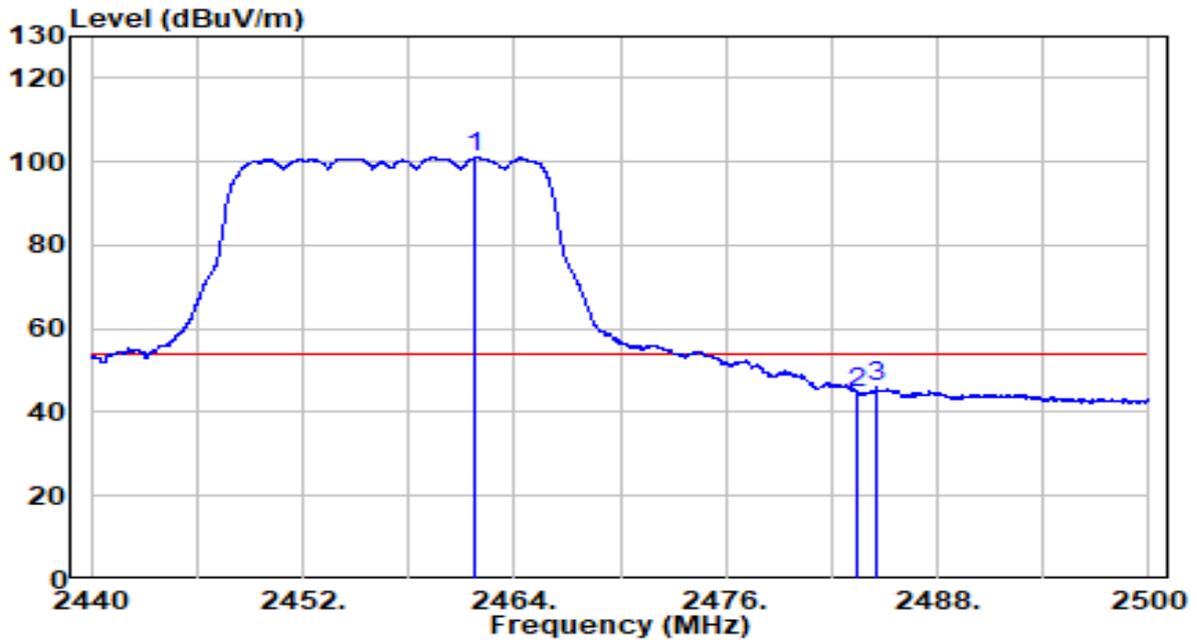


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2461.810	68.43	32.52	100.95	N/A	N/A	Average
2	2483.500	11.98	32.61	44.59	-9.41	54.00	Average
3	2484.550	13.27	32.62	45.88	-8.12	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

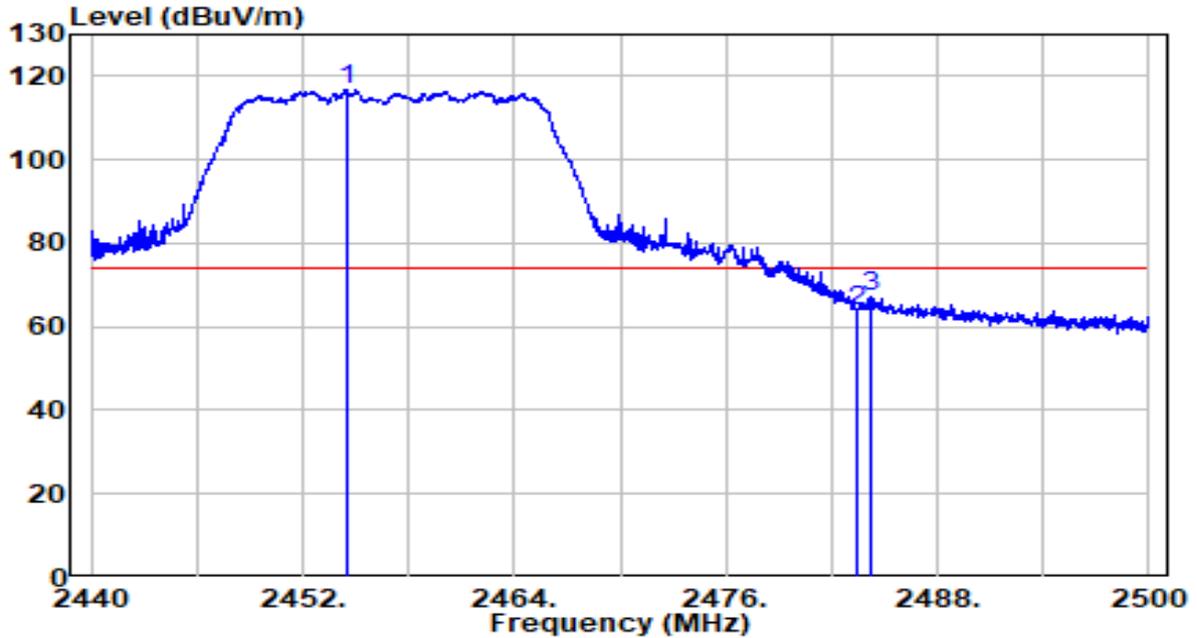


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2454.580	84.19	32.49	116.68	N/A	N/A	Peak
2		2483.500	31.39	32.61	64.00	-10.00	74.00	Peak
3		2484.280	34.45	32.61	67.06	-6.94	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11n-HT20	Test Voltage	120V / 60Hz

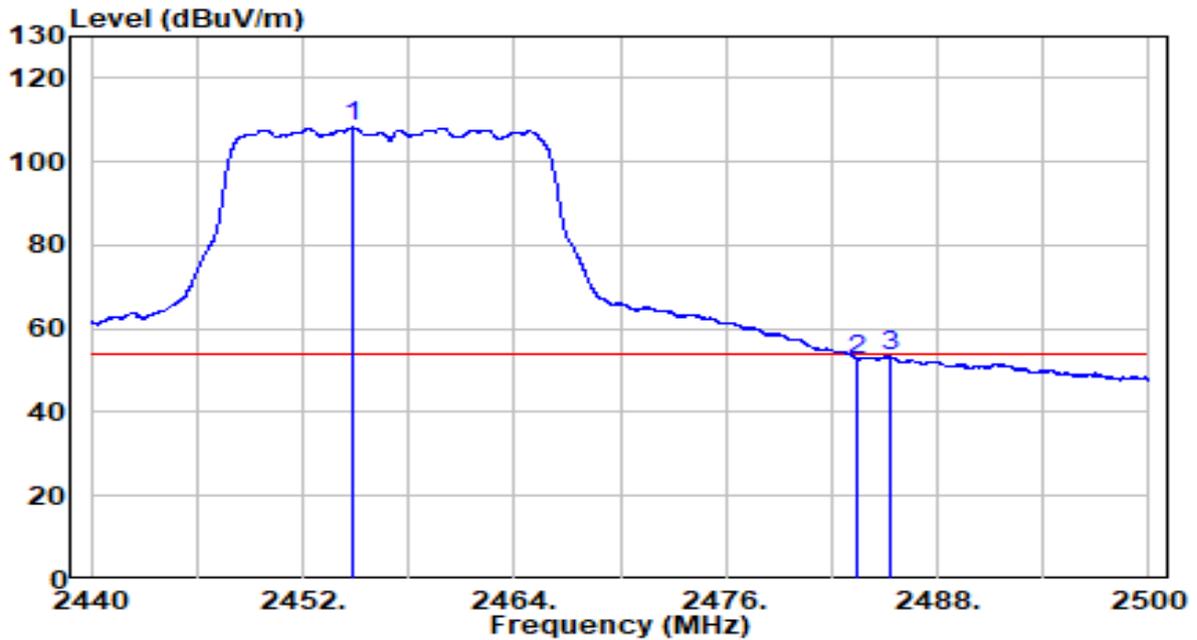


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2454.820	75.72	32.49	108.21	N/A	N/A	Average
2	2483.500	20.05	32.61	52.66	-1.34	54.00	Average
3	2485.270	20.71	32.62	53.33	-0.67	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11n-HT20	Test Voltage	120V/60Hz

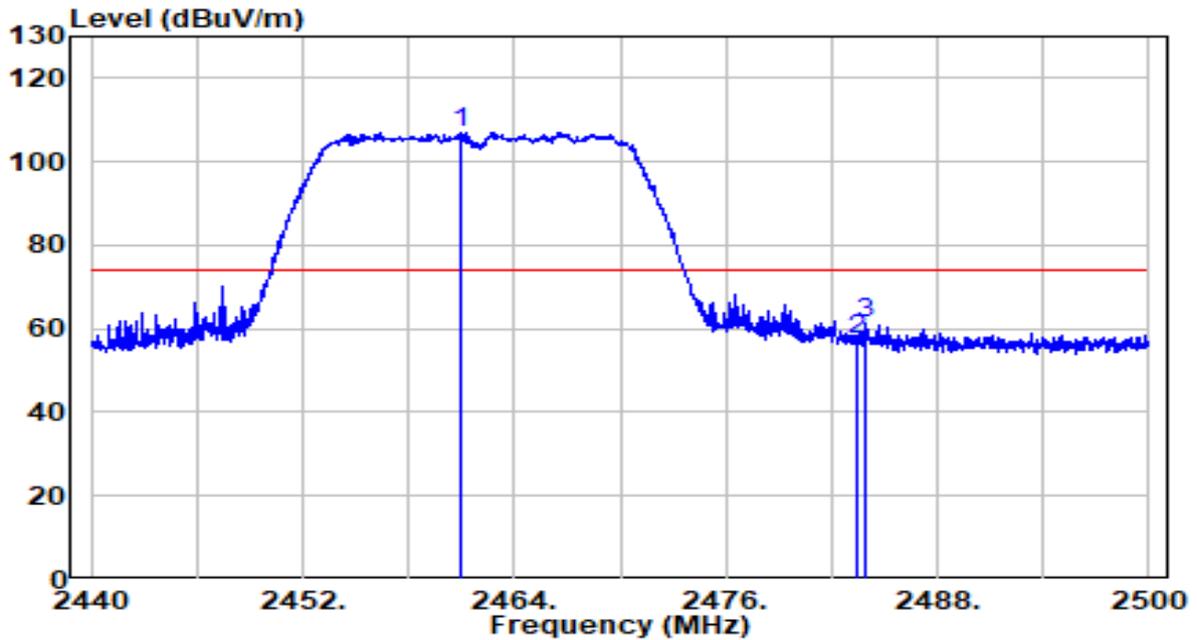


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2461.030	74.56	32.52	107.07	N/A	N/A	Peak
2	2483.500	24.59	32.61	57.20	-16.80	74.00	Peak
3	2483.860	28.94	32.61	61.55	-12.45	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11n-HT20	Test Voltage	120V/60Hz

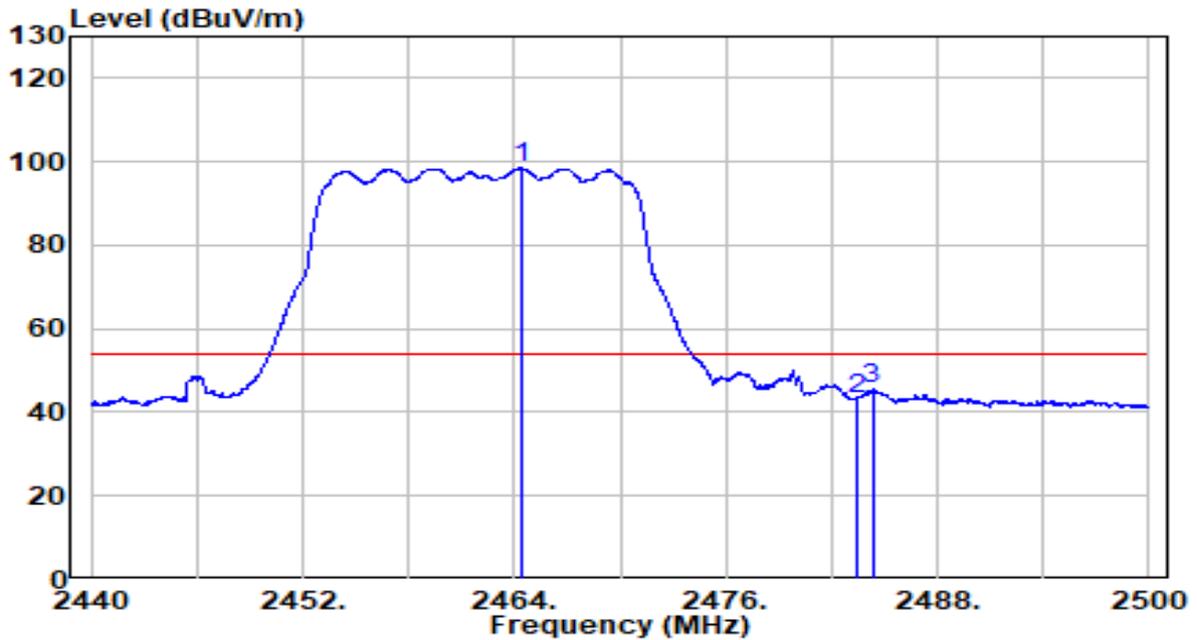


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2464.360	65.87	32.53	98.40	N/A	N/A	Average
2	2483.500	10.80	32.61	43.41	-10.59	54.00	Average
3	2484.310	12.76	32.61	45.38	-8.62	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11n-HT20	Test Voltage	120V/60Hz

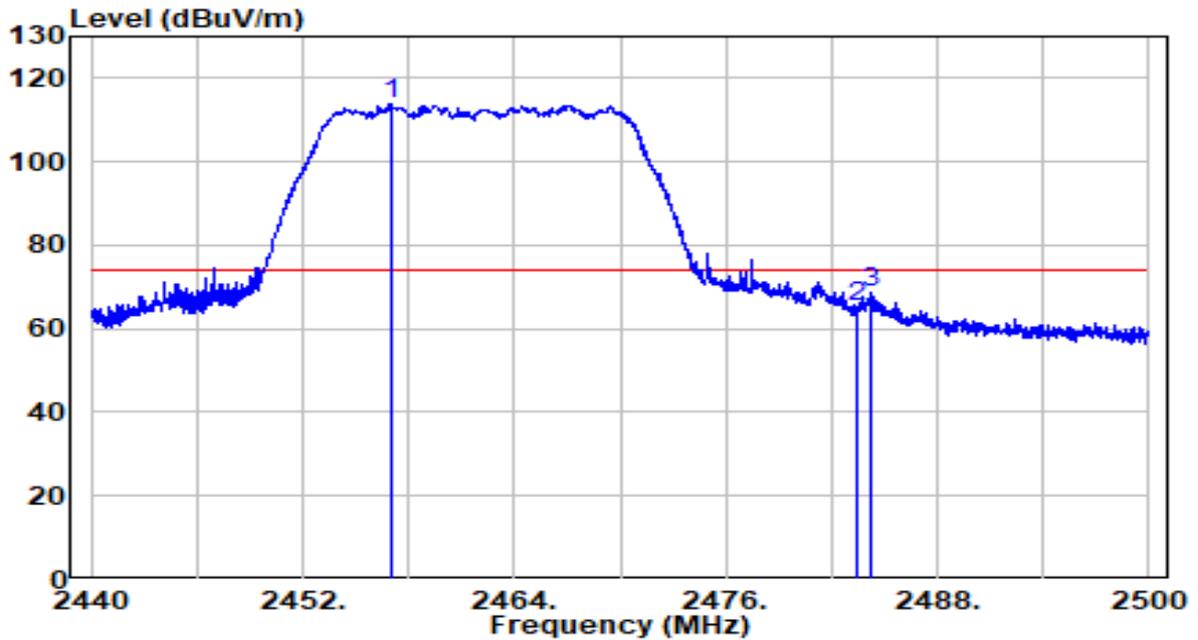


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2457.010	81.19	32.50	113.69	N/A	N/A	Peak
2	2483.500	32.86	32.61	65.47	-8.53	74.00	Peak
3	2484.220	35.84	32.61	68.45	-5.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11n-HT20	Test Voltage	120V/60Hz

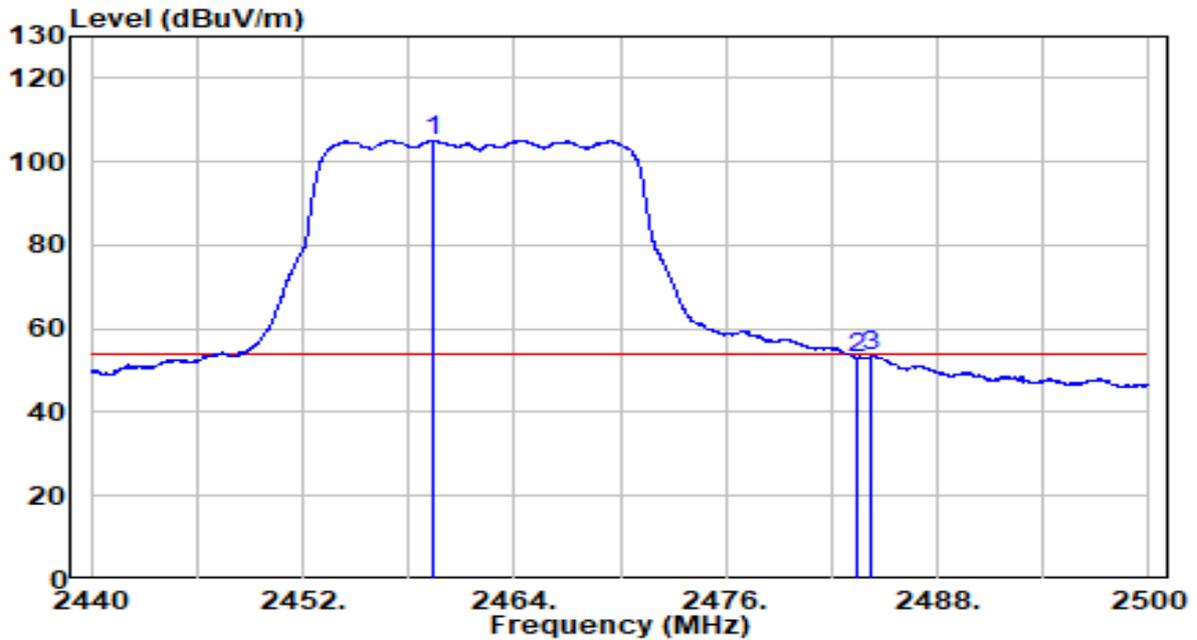


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	72.64	32.51	105.15	N/A	N/A	Average
2		20.51	32.61	53.12	-0.88	54.00	Average
3		20.95	32.61	53.56	-0.44	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT40	Test Voltage	120V/60Hz

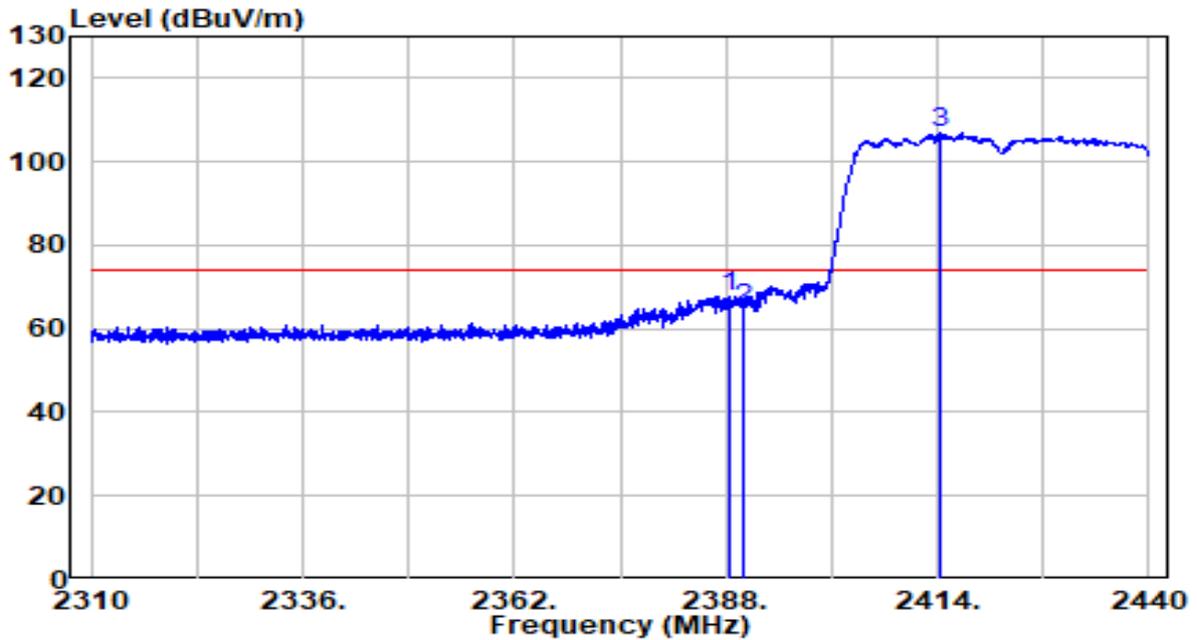


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.325	35.56	32.21	67.77	-6.23	74.00	Peak
2	2390.000	32.53	32.22	64.74	-9.26	74.00	Peak
3	* 2414.260	74.73	32.32	107.05	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT40	Test Voltage	120V/60Hz

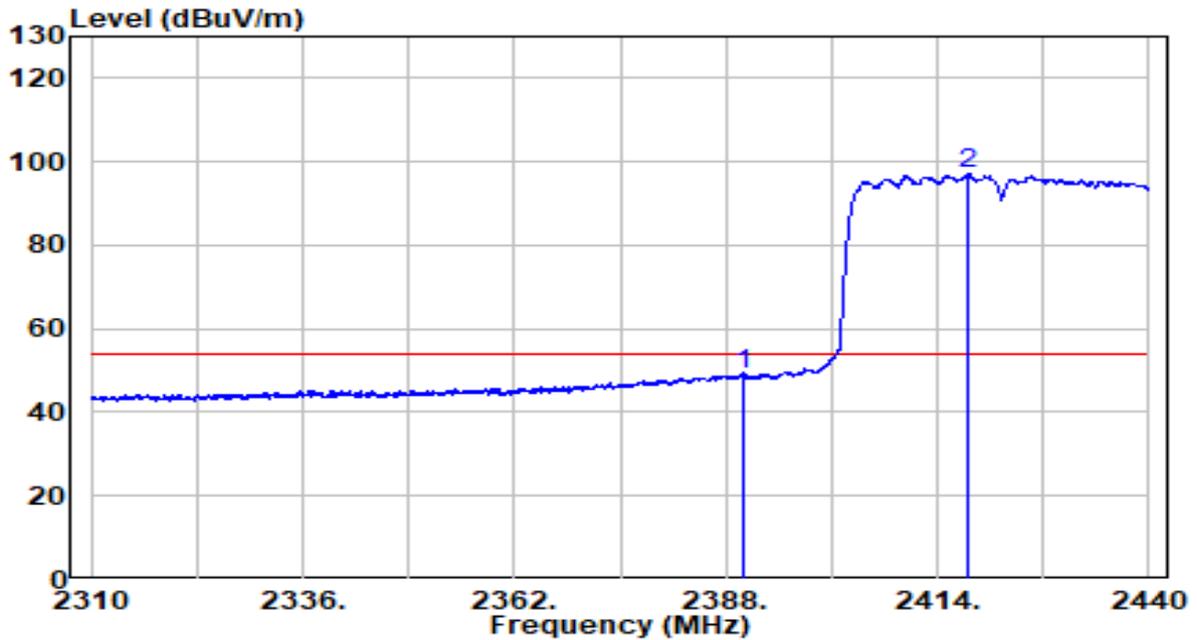


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	16.93	32.22	49.15	-4.85	54.00	Average
2	* 2417.705	64.80	32.33	97.13	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT40	Test Voltage	120V/60Hz

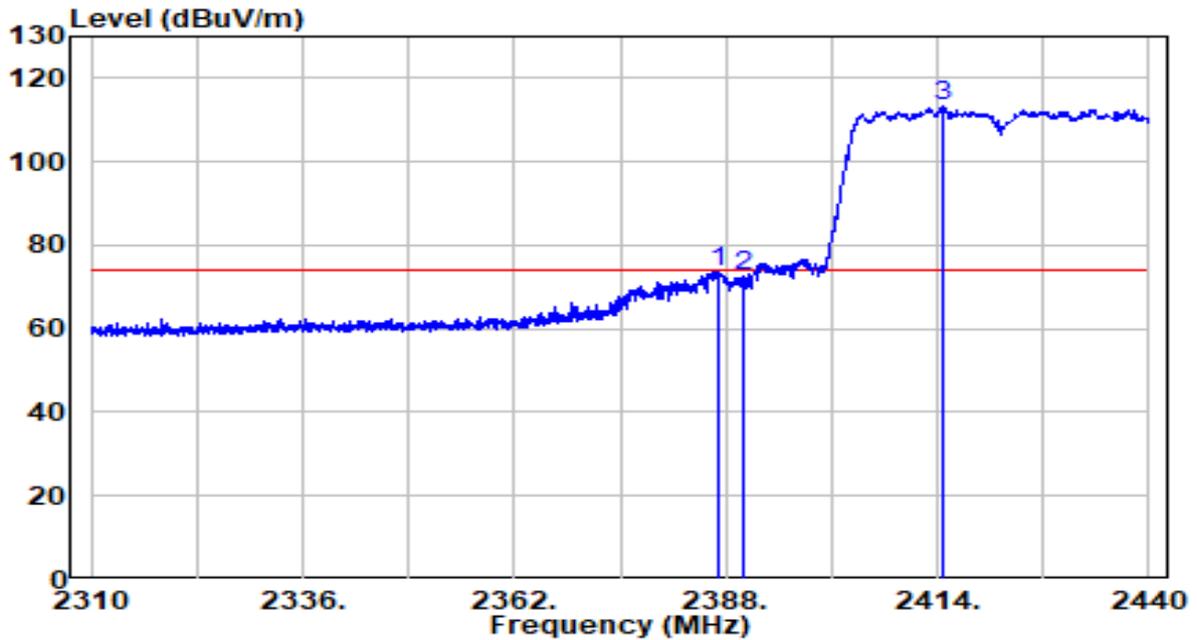


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.220	41.52	32.21	73.73	-0.27	74.00	Peak
2	2390.000	40.23	32.22	72.44	-1.56	74.00	Peak
3	* 2414.715	80.81	32.32	113.13	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11n-HT40	Test Voltage	120V/60Hz

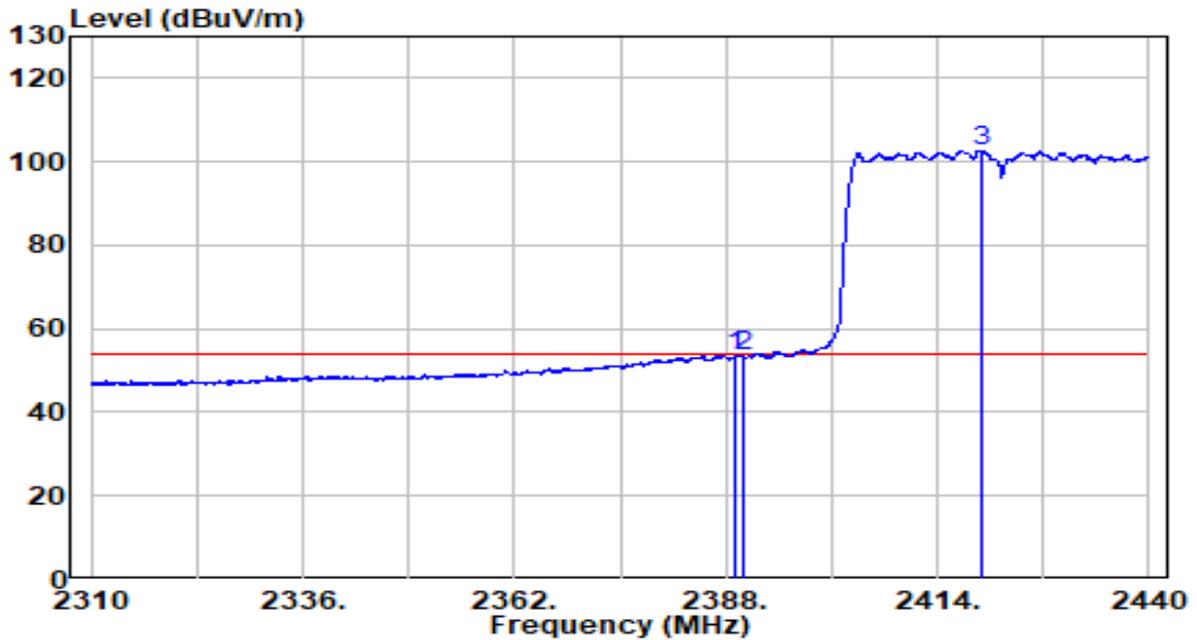


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.105	21.38	32.21	53.60	-0.40	54.00	Average
2	2390.000	21.10	32.22	53.32	-0.68	54.00	Average
3	* 2419.395	70.23	32.34	102.57	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2427MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

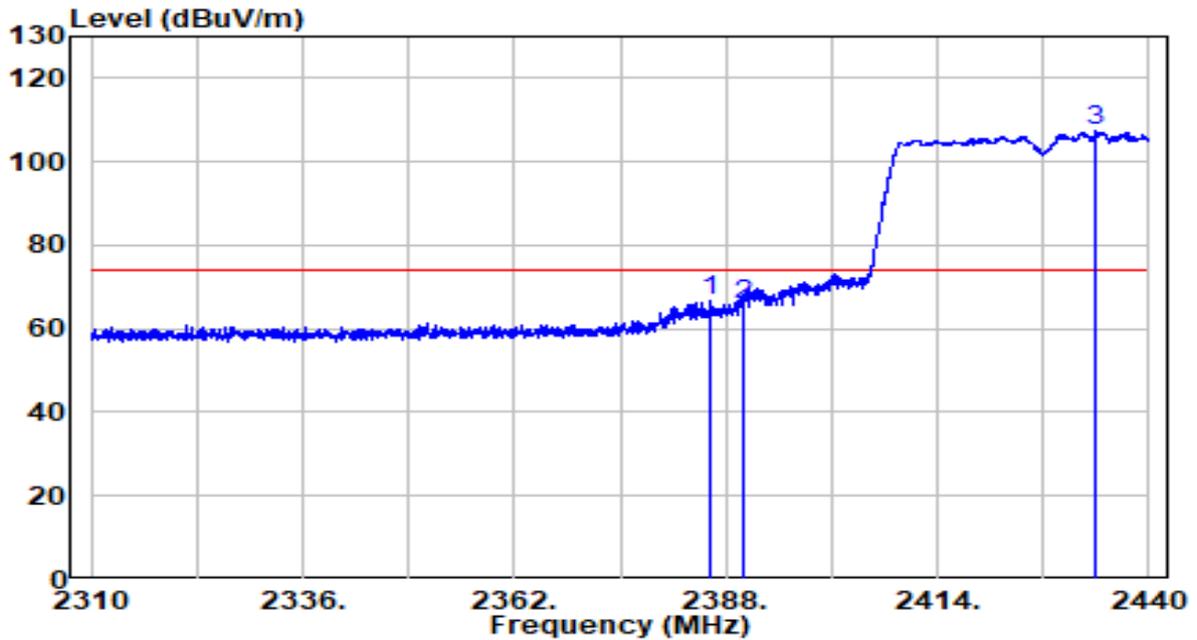


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2385.985	34.48	32.20	66.68	-7.32	74.00	Peak
2	2390.000	33.66	32.22	65.88	-8.12	74.00	Peak
3	* 2433.565	75.20	32.40	107.60	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2427MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

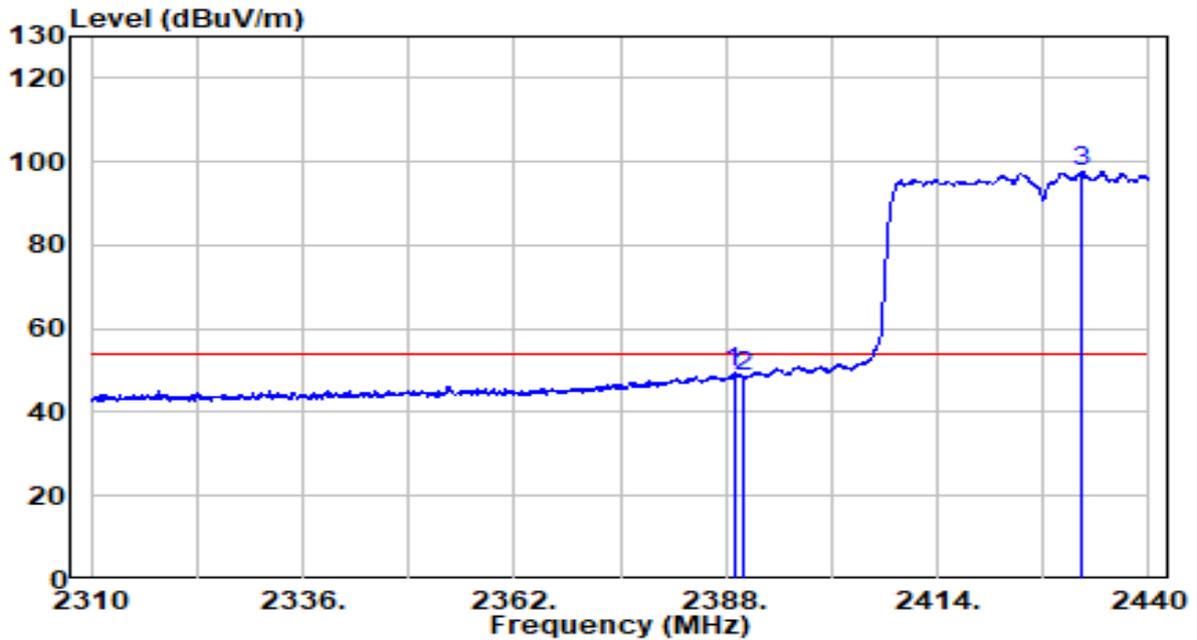


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.975	17.17	32.21	49.39	-4.61	54.00	Average
2	2390.000	16.29	32.22	48.50	-5.50	54.00	Average
3	* 2431.810	65.17	32.39	97.56	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2427MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

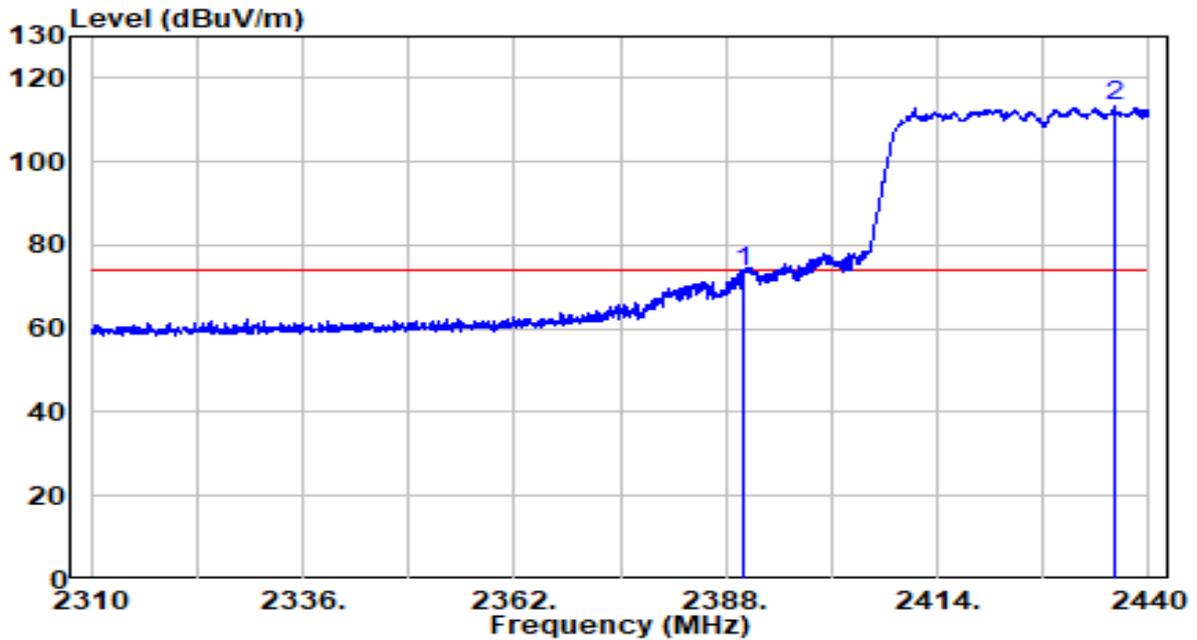


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	41.27	32.22	73.49	-0.51	74.00	Peak
2	* 2435.645	80.72	32.41	113.13	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2427MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

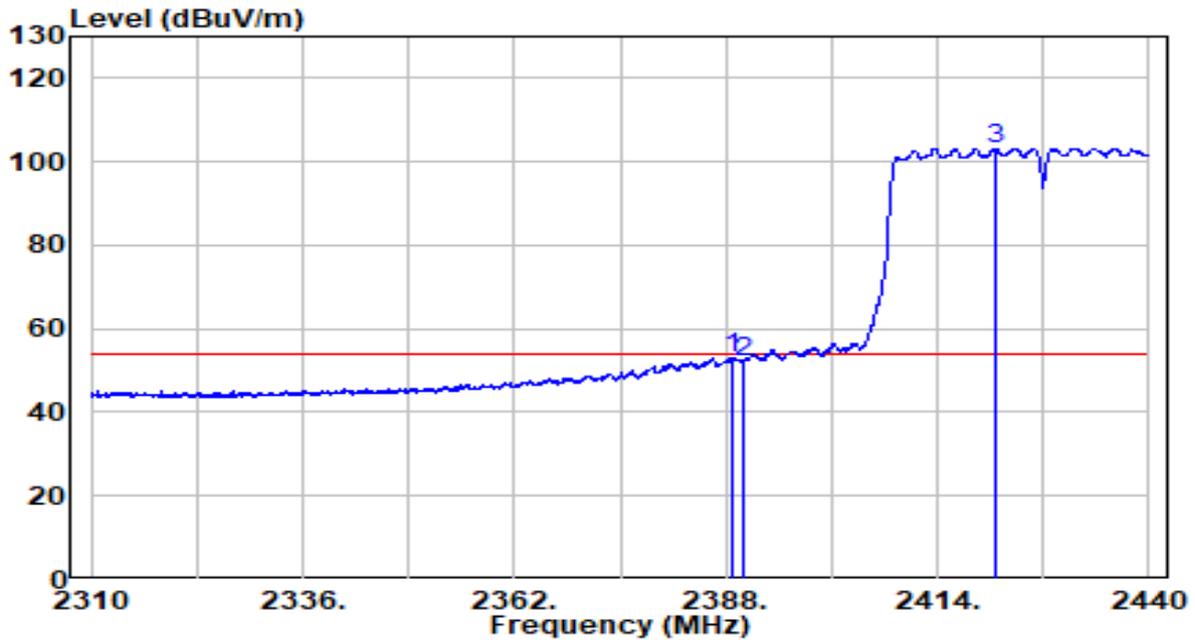


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.845	20.73	32.21	52.94	-1.06	54.00	Average
2	2390.000	19.90	32.22	52.11	-1.89	54.00	Average
3	* 2421.150	70.91	32.35	103.26	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2432MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

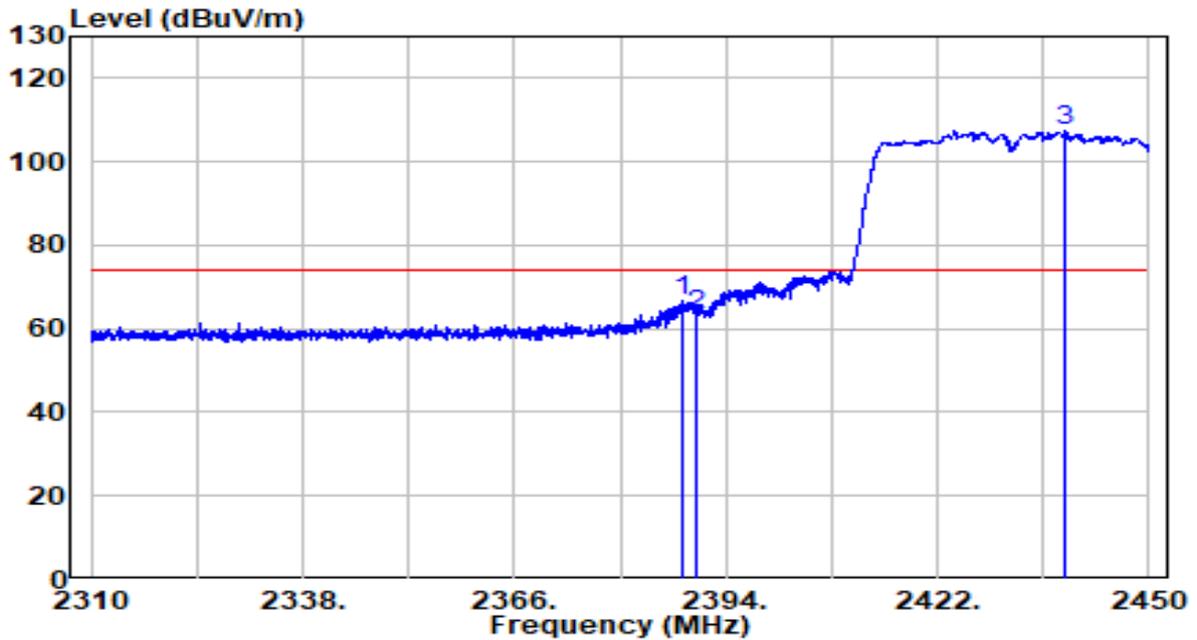


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.260	34.71	32.21	66.92	-7.08	74.00	Peak
2	2390.000	31.21	32.22	63.42	-10.58	74.00	Peak
3	* 2438.940	74.89	32.42	107.32	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2432MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

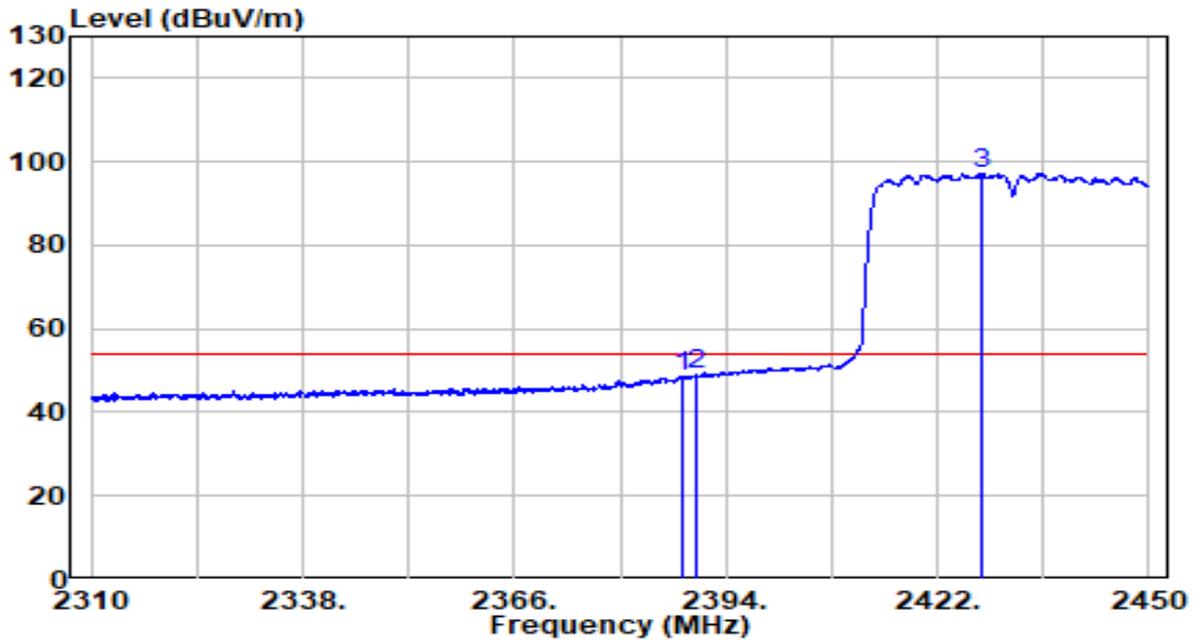


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.330	16.59	32.21	48.80	-5.20	54.00	Average
2	2390.000	16.97	32.22	49.18	-4.82	54.00	Average
3	* 2427.950	64.98	32.38	97.35	N/A	N/A	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2432MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

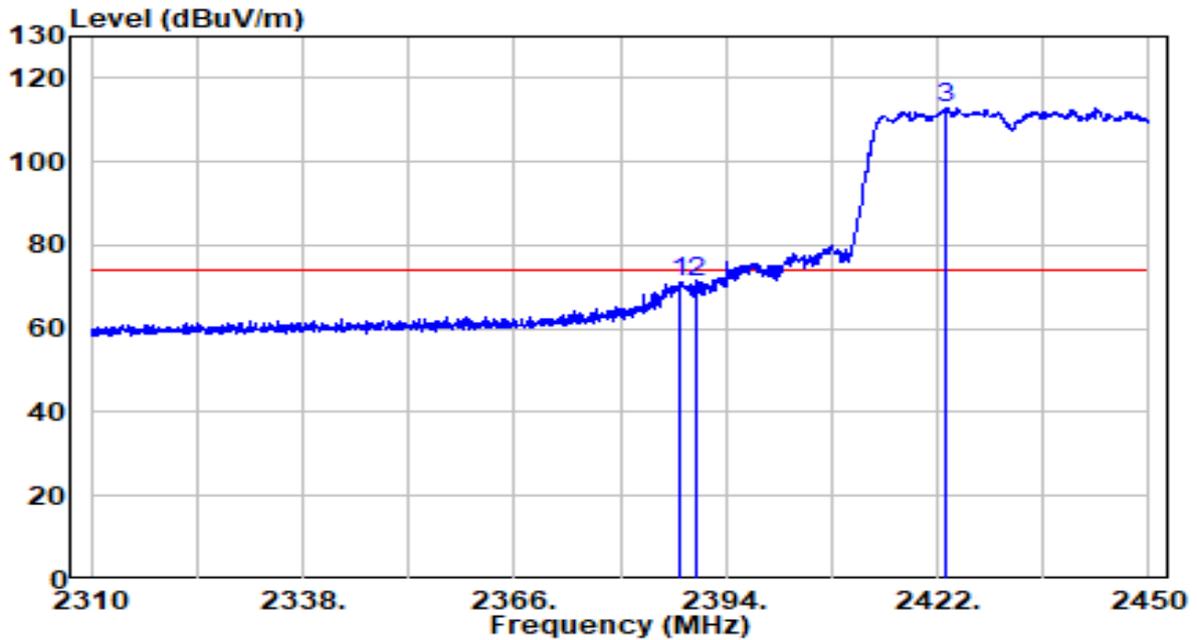


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.840	38.98	32.21	71.19	-2.81	74.00	Peak
2	2390.000	38.92	32.22	71.14	-2.86	74.00	Peak
3	* 2423.050	80.53	32.36	112.89	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2432MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

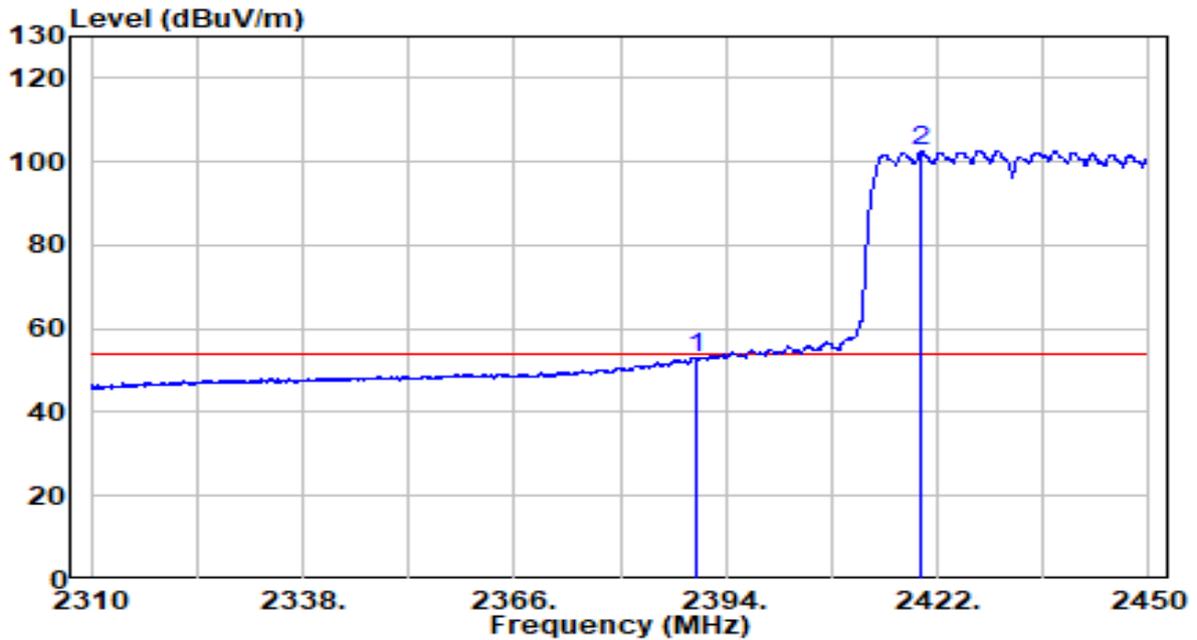


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	20.93	32.22	53.15	-0.85	54.00	Average
2	* 2419.970	70.38	32.34	102.72	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

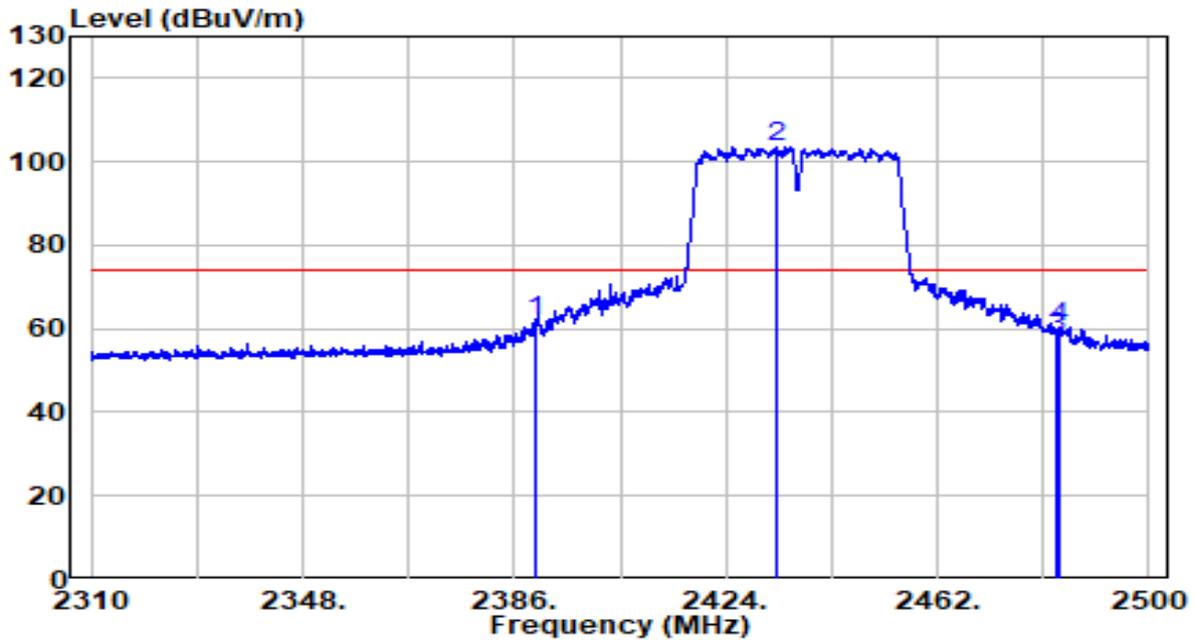


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	29.42	32.22	61.64	-12.36	74.00	Peak
2	* 2433.310	71.26	32.40	103.66	N/A	N/A	Peak
3	2483.500	25.50	32.61	58.11	-15.89	74.00	Peak
4	2483.850	27.83	32.61	60.45	-13.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

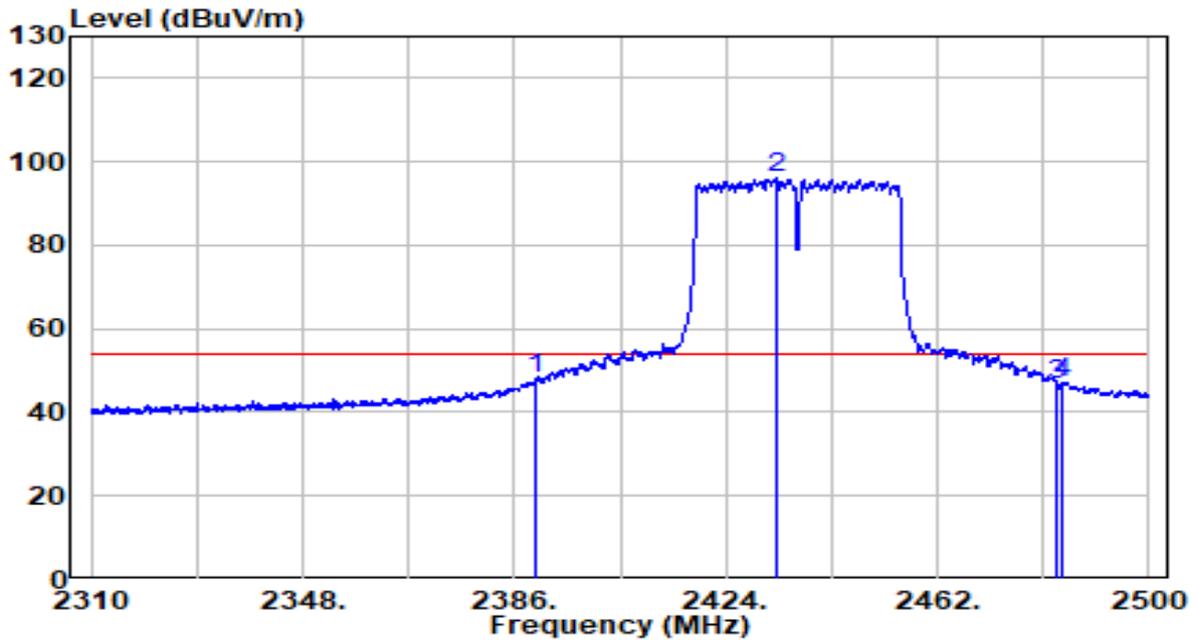


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	15.72	32.22	47.94	-6.06	54.00	Average
2	* 2432.930	63.67	32.40	96.07	N/A	N/A	Average
3	2483.500	13.94	32.61	46.55	-7.45	54.00	Average
4	2484.325	14.61	32.61	47.23	-6.77	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

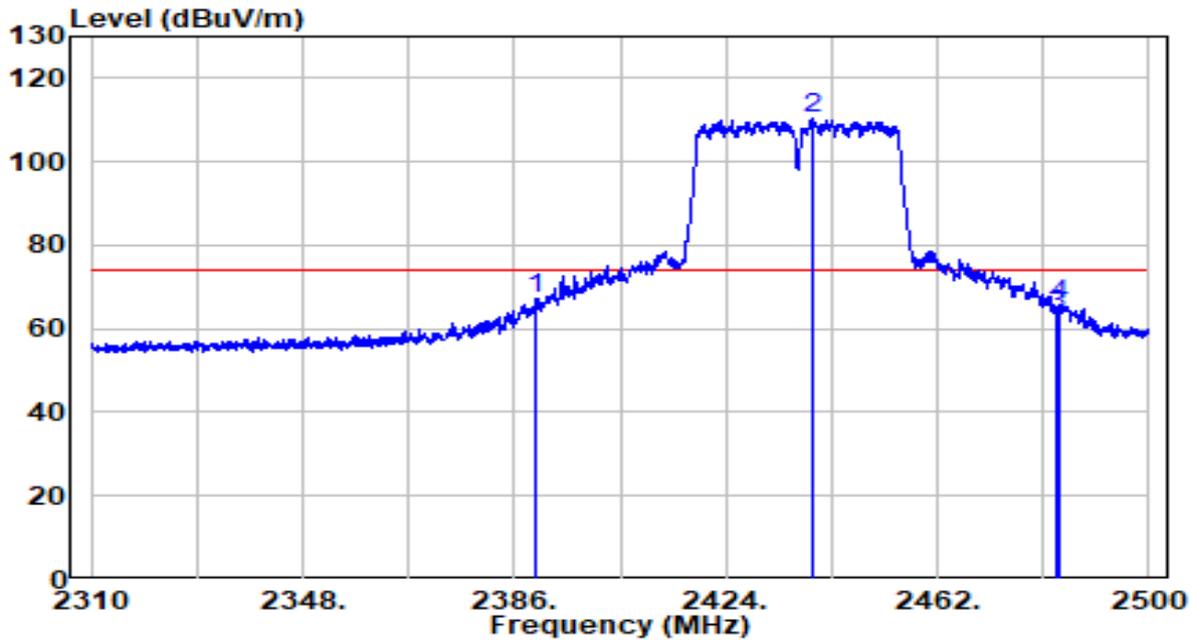


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	35.04	32.22	67.26	-6.74	74.00	Peak
2	* 2439.485	77.75	32.43	110.18	N/A	N/A	Peak
3	2483.500	30.67	32.61	63.28	-10.72	74.00	Peak
4	2483.850	33.29	32.61	65.90	-8.10	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

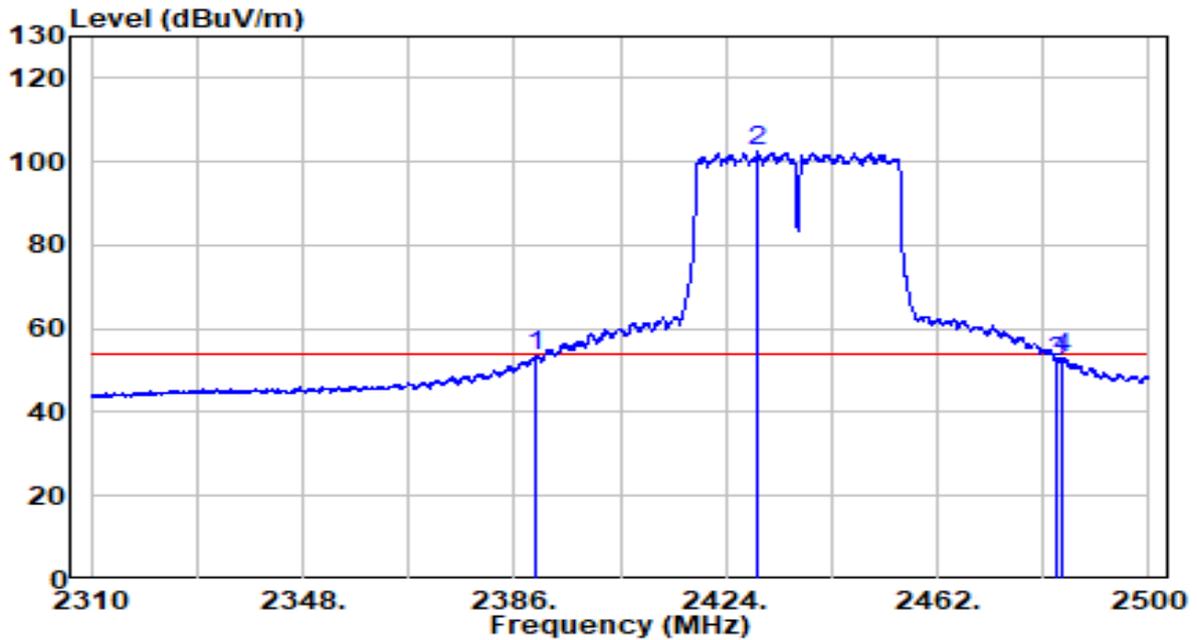


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	21.45	32.22	53.67	-0.33	54.00	Average
2	* 2429.795	69.99	32.39	102.38	N/A	N/A	Average
3	2483.500	19.40	32.61	52.01	-1.99	54.00	Average
4	2484.420	20.28	32.61	52.89	-1.11	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2442MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

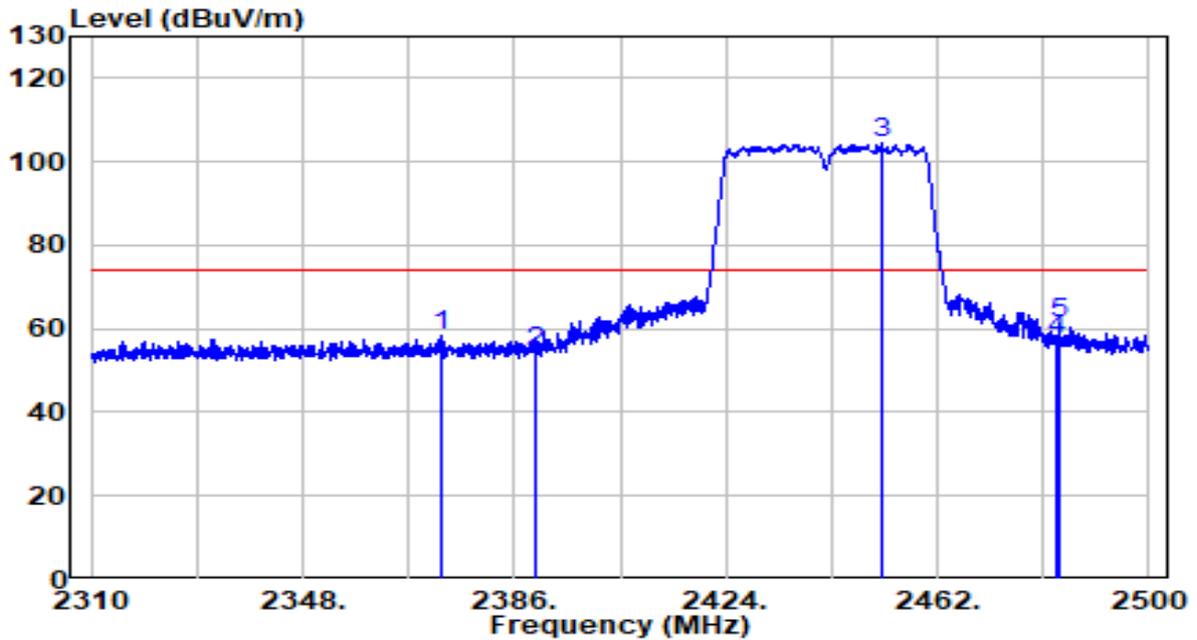


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2372.890	26.09	32.15	58.23	-15.77	74.00	Peak
2	2390.000	22.15	32.22	54.37	-19.63	74.00	Peak
3	* 2451.930	71.94	32.48	104.42	N/A	N/A	Peak
4	2483.500	24.86	32.61	57.47	-16.53	74.00	Peak
5	2484.040	28.70	32.61	61.31	-12.69	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2442MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

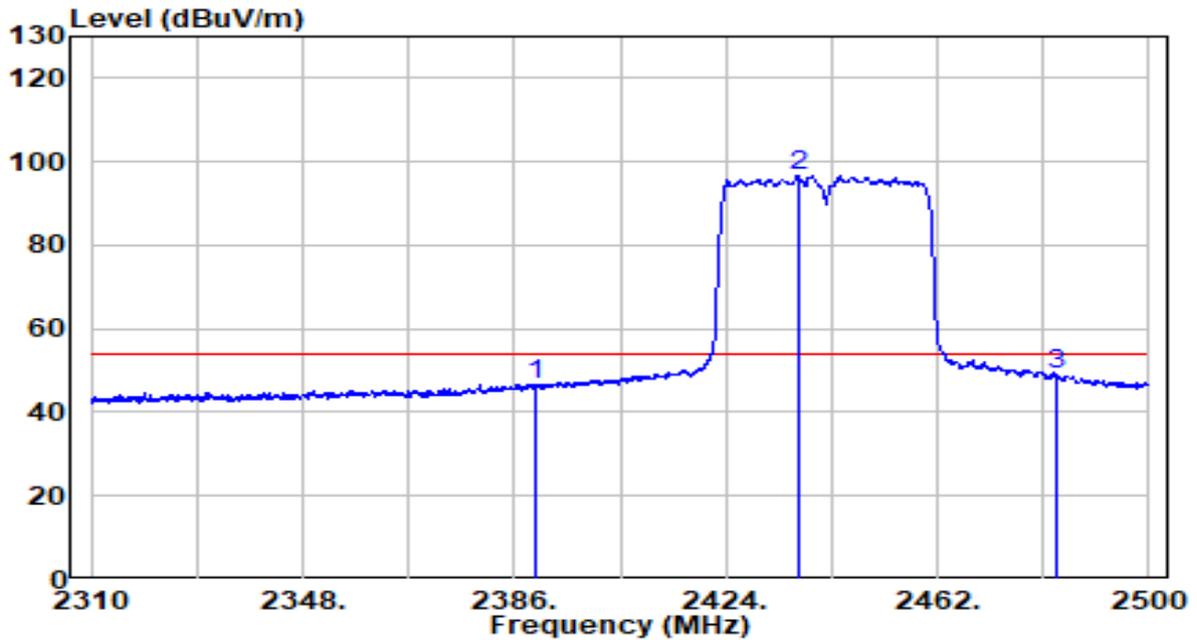


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	14.45	32.22	46.67	-7.33	54.00	Average
2	* 2436.920	64.15	32.42	96.57	N/A	N/A	Average
3	2483.500	16.31	32.61	48.92	-5.08	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2442MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

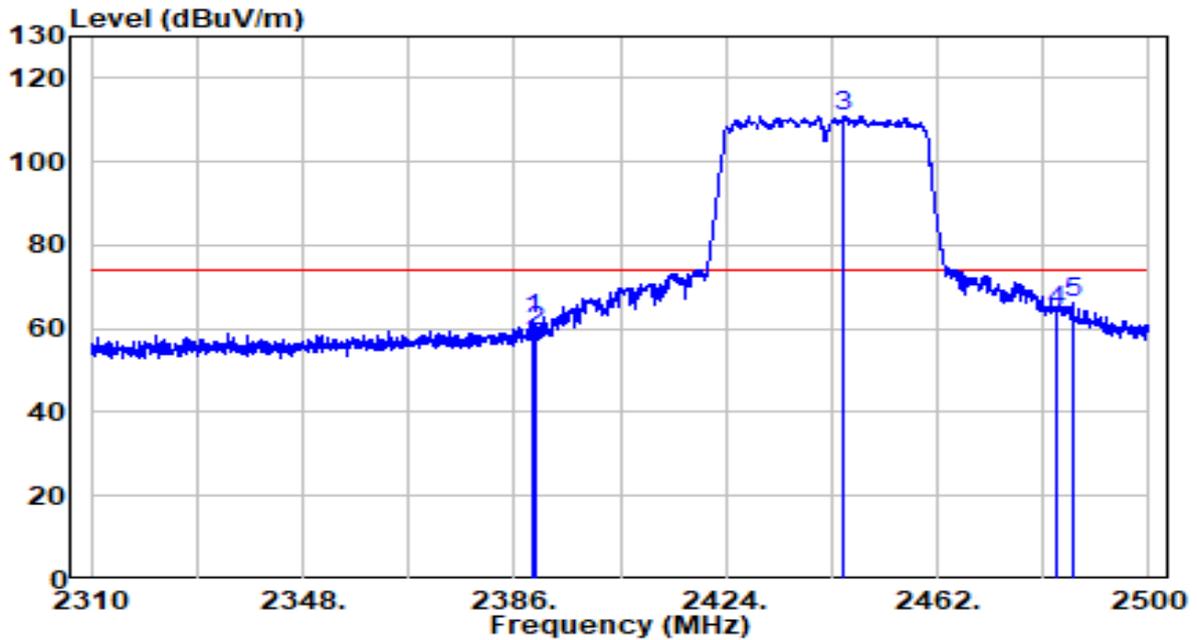


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.515	30.20	32.22	62.42	-11.58	74.00	Peak
2	2390.000	27.37	32.22	59.59	-14.41	74.00	Peak
3	* 2445.185	78.64	32.45	111.09	N/A	N/A	Peak
4	2483.500	31.77	32.61	64.38	-9.62	74.00	Peak
5	2486.320	33.48	32.62	66.10	-7.90	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2442MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

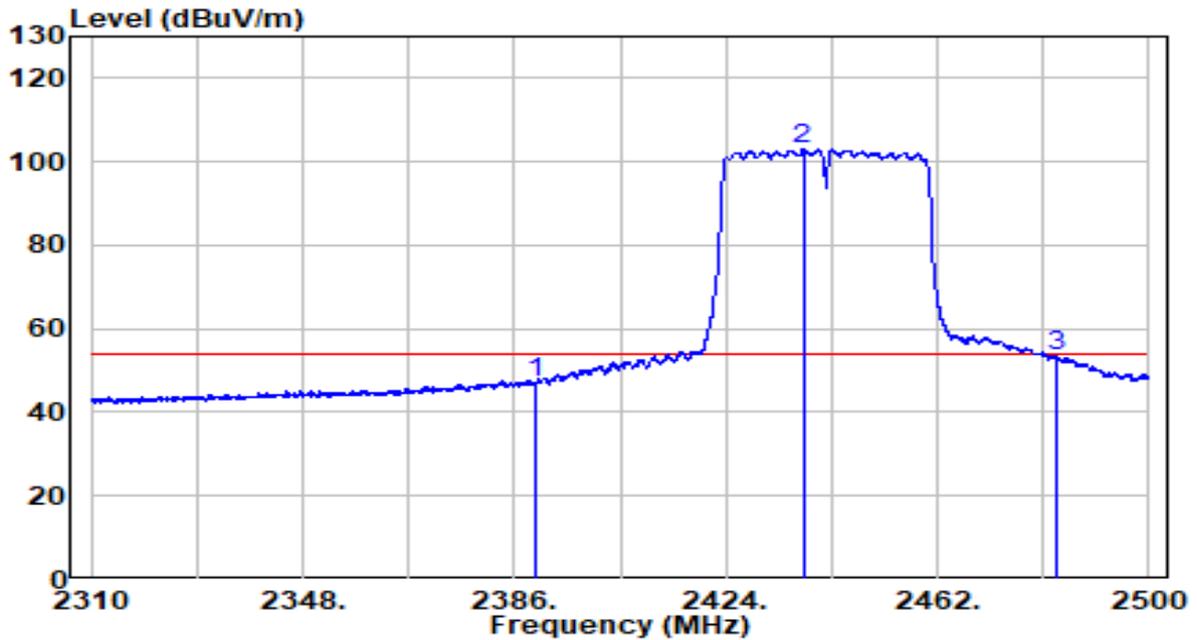


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	14.84	32.22	47.06	-6.94	54.00	Average
2	* 2437.870	70.55	32.42	102.97	N/A	N/A	Average
3	2483.500	20.71	32.61	53.32	-0.68	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

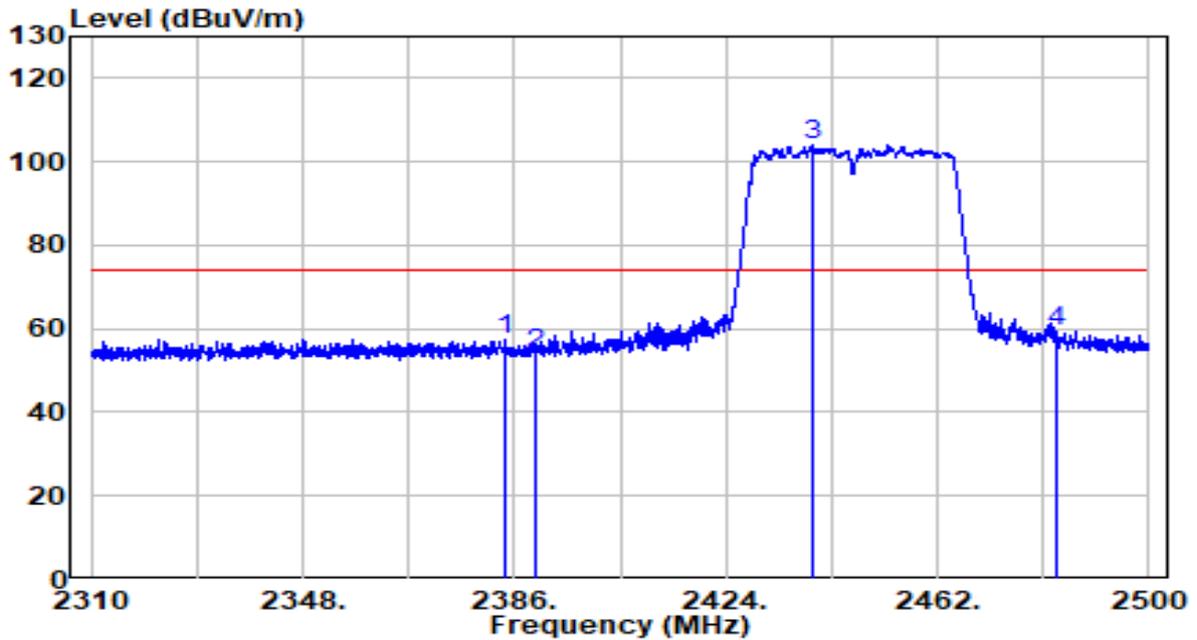


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2384.480	25.04	32.19	57.23	-16.77	74.00	Peak
2	2390.000	21.83	32.22	54.05	-19.95	74.00	Peak
3	* 2439.485	71.43	32.43	103.86	N/A	N/A	Peak
4	2483.500	26.56	32.61	59.17	-14.83	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

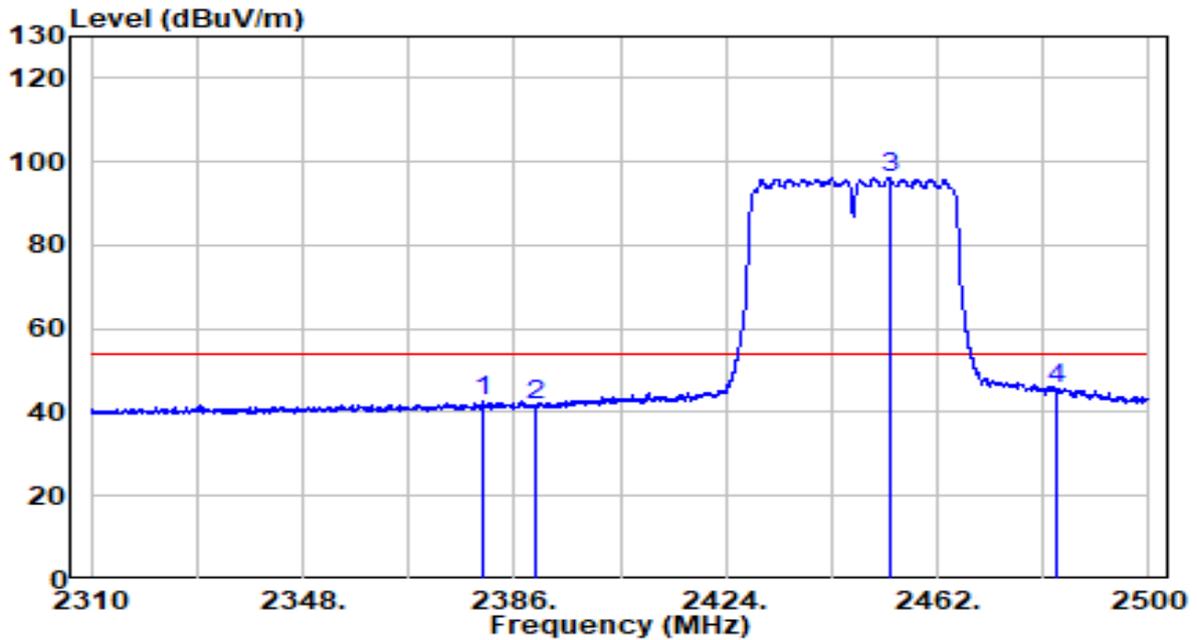


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2380.205	10.28	32.18	42.46	-11.54	54.00	Average
2	2390.000	9.55	32.22	41.77	-12.23	54.00	Average
3	* 2453.355	63.64	32.48	96.12	N/A	N/A	Average
4	2483.500	13.00	32.61	45.61	-8.39	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

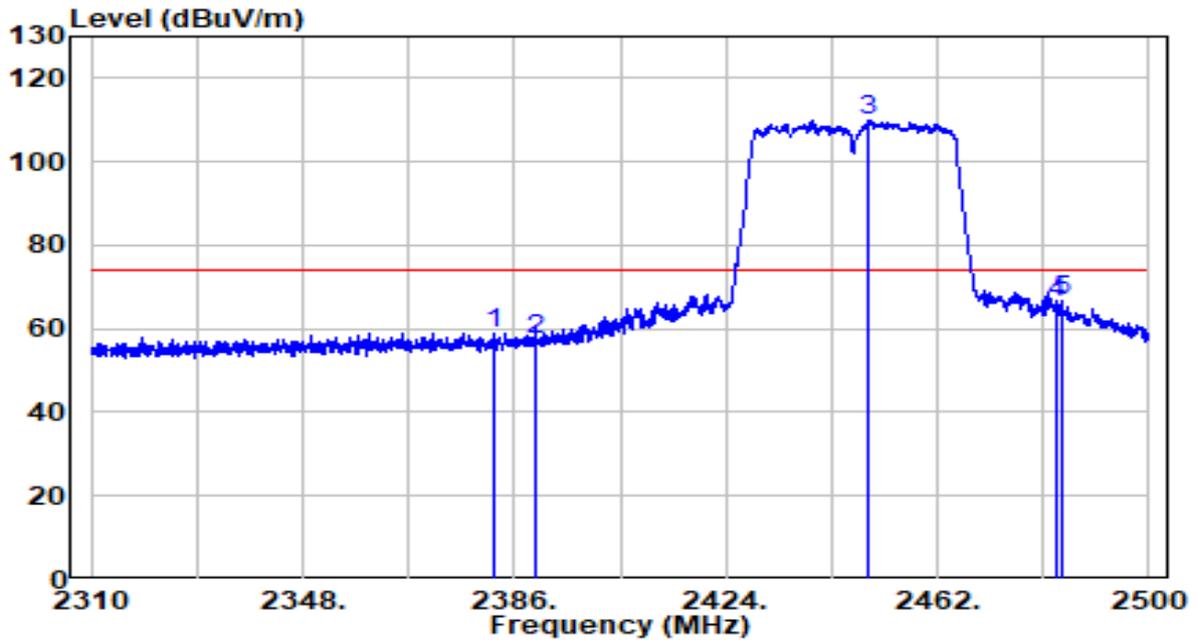


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2382.200	26.65	32.19	58.84	-15.16	74.00	Peak
2	2390.000	25.40	32.22	57.62	-16.38	74.00	Peak
3	* 2449.365	77.28	32.47	109.75	N/A	N/A	Peak
4	2483.500	33.40	32.61	66.01	-7.99	74.00	Peak
5	2484.325	34.27	32.61	66.89	-7.11	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11n-HT40	Test Voltage	120V / 60Hz

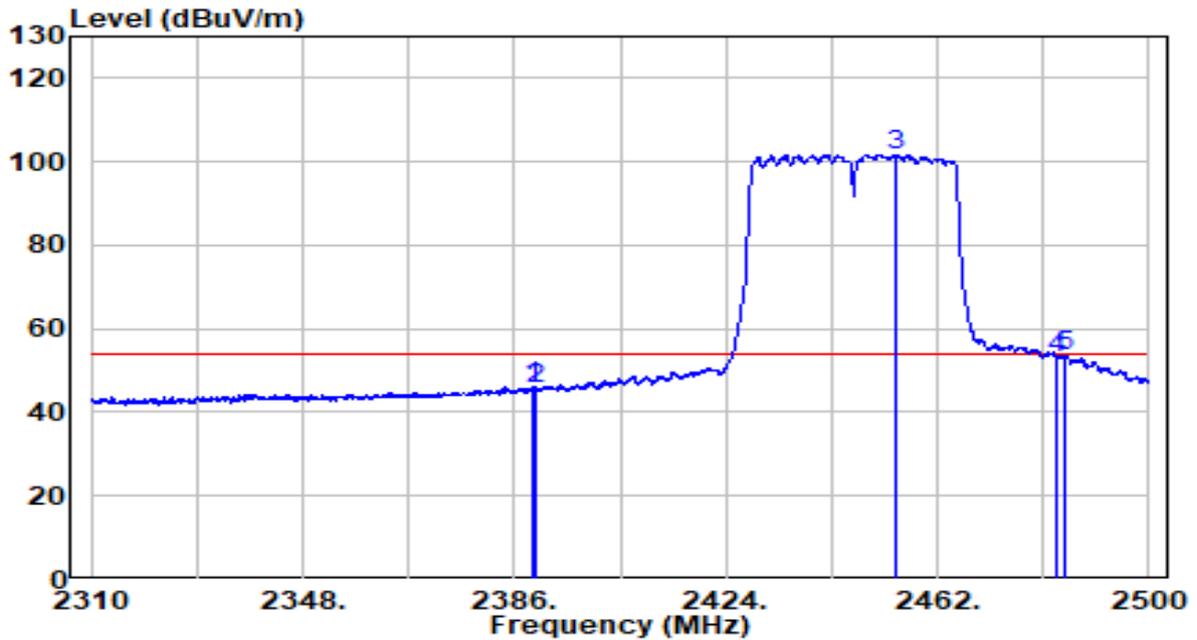


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.135	14.07	32.21	46.29	-7.71	54.00	Average
2	2390.000	13.18	32.22	45.40	-8.60	54.00	Average
3	* 2454.305	69.25	32.49	101.74	N/A	N/A	Average
4	2483.500	20.52	32.61	53.13	-0.87	54.00	Average
5	2484.800	21.00	32.62	53.62	-0.38	54.00	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT40	Test Voltage	120V/60Hz

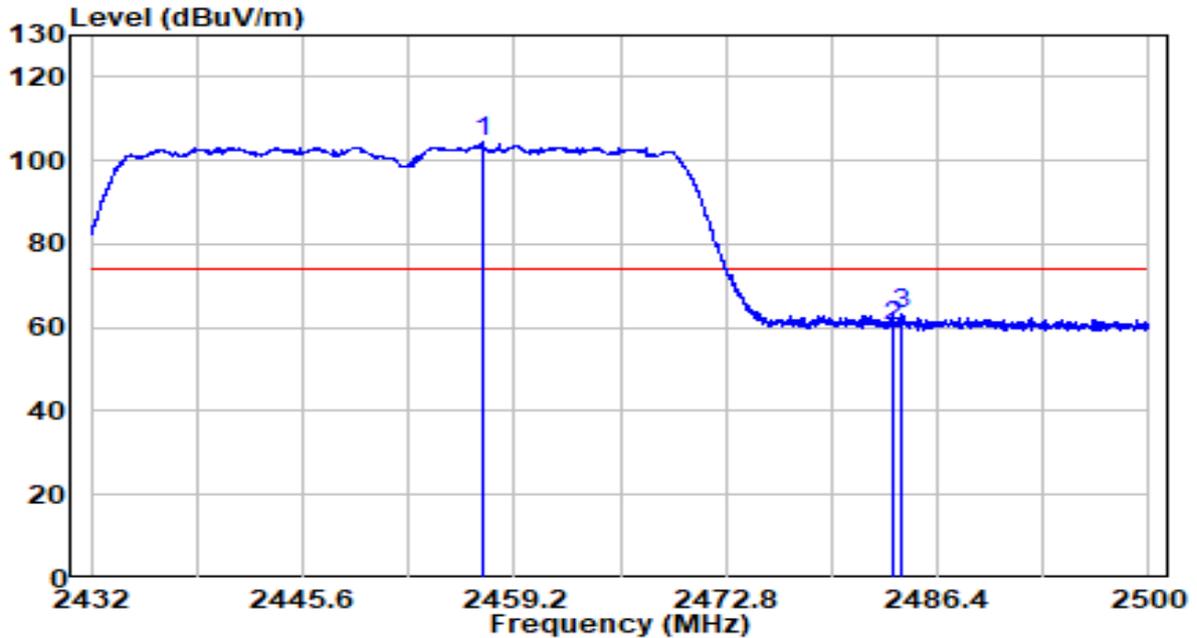


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2457.262	71.78	32.50	104.28	N/A	N/A	Peak
2	2483.500	27.69	32.61	60.30	-13.70	74.00	Peak
3	2484.020	30.68	32.61	63.30	-10.70	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT40	Test Voltage	120V/60Hz

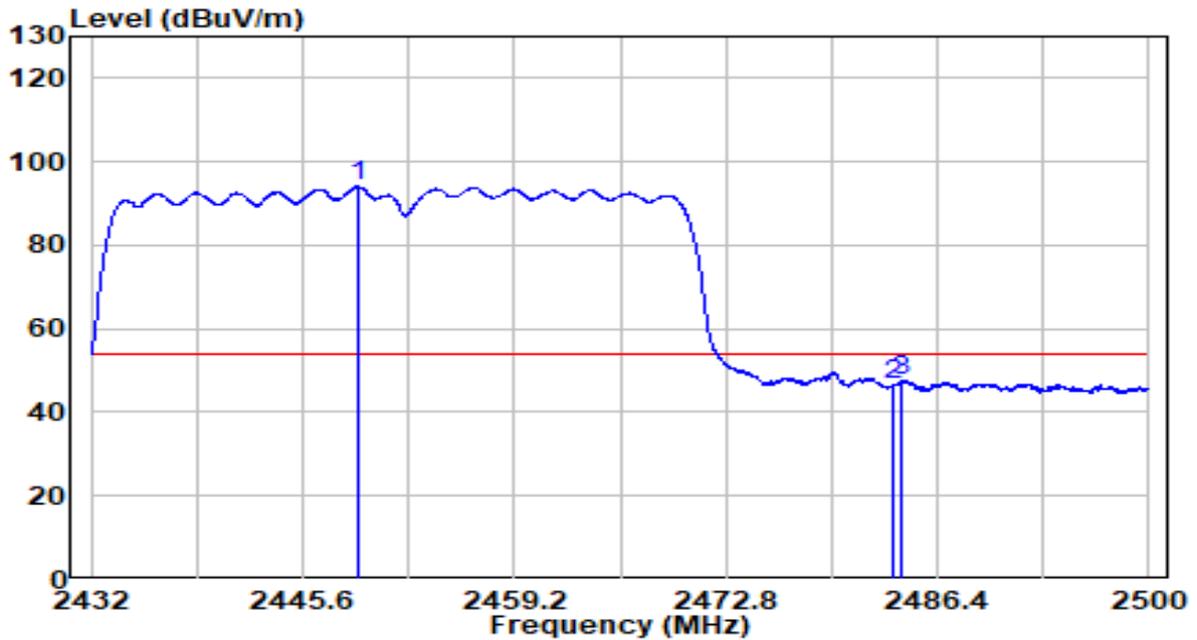


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2449.102	61.53	32.47	94.00	N/A	N/A	Average
2	2483.500	13.82	32.61	46.43	-7.57	54.00	Average
3	2484.020	15.10	32.61	47.71	-6.29	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT40	Test Voltage	120V/60Hz

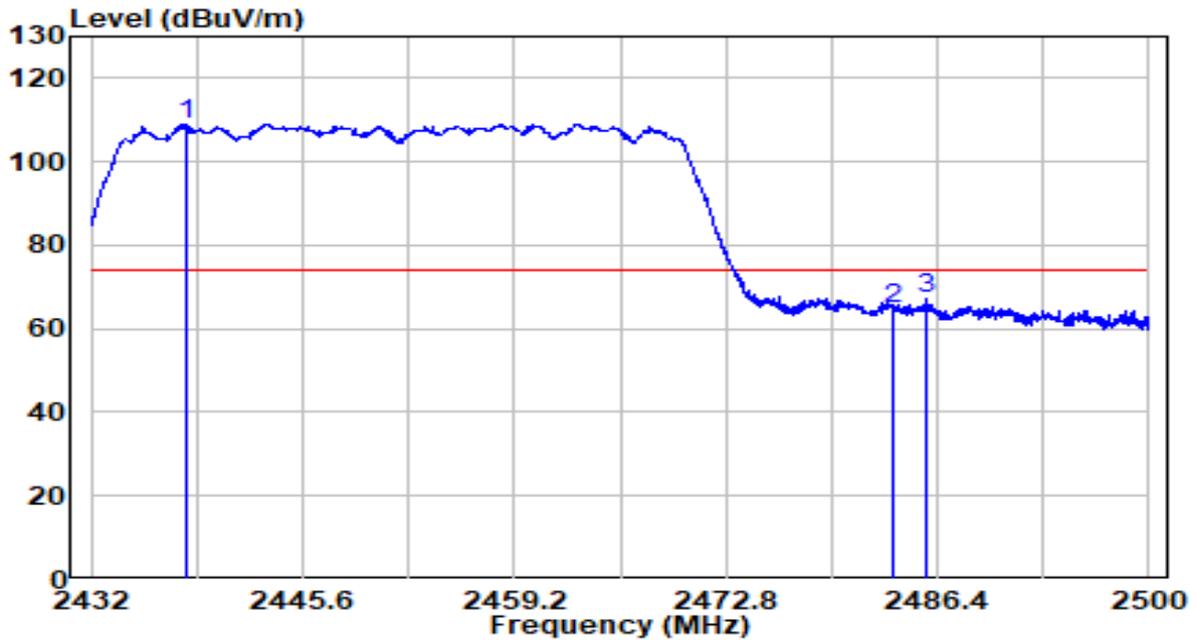


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2438.086	76.67	32.42	109.09	N/A	N/A	Peak
2	2483.500	32.31	32.61	64.93	-9.07	74.00	Peak
3	2485.754	34.44	32.62	67.07	-6.93	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11n-HT40	Test Voltage	120V/60Hz

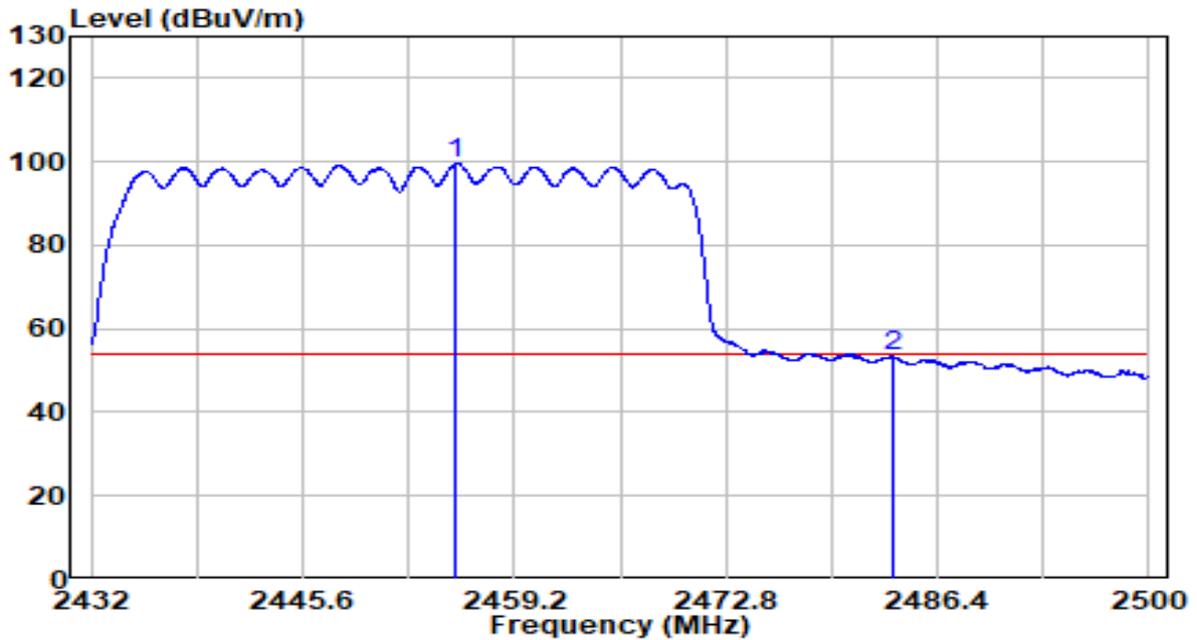


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.460	67.09	32.49	99.58	N/A	N/A	Average
2	2483.500	20.67	32.61	53.28	-0.72	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

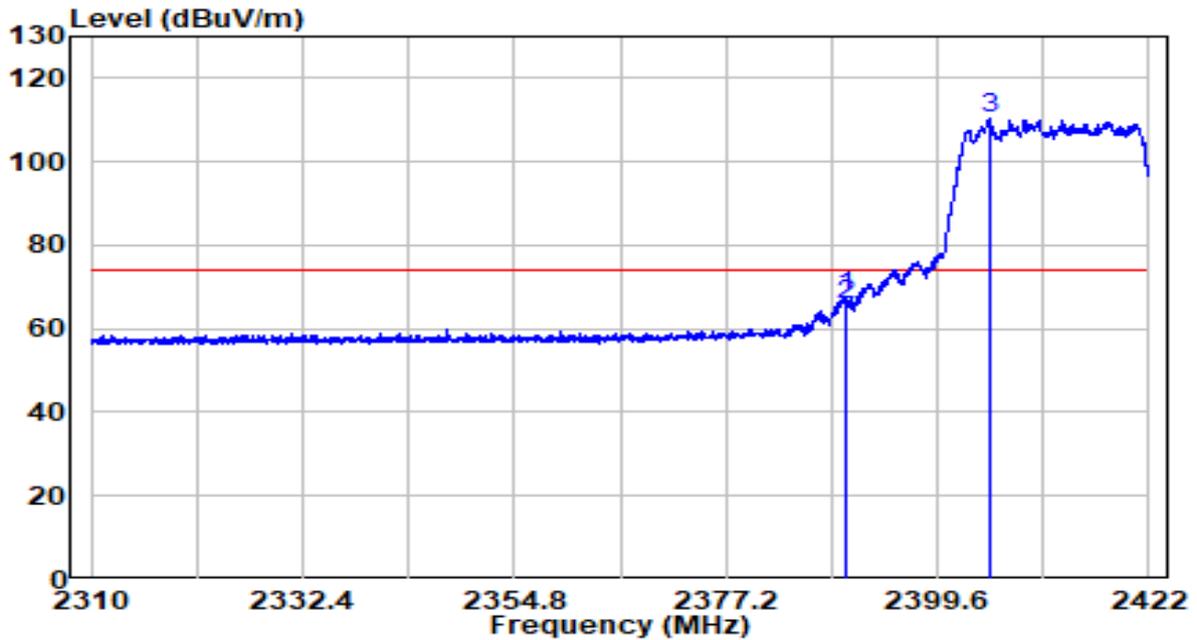


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.800	35.37	32.22	67.58	-6.42	74.00	Peak
2	2390.000	33.67	32.22	65.89	-8.11	74.00	Peak
3	* 2405.088	78.08	32.28	110.36	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

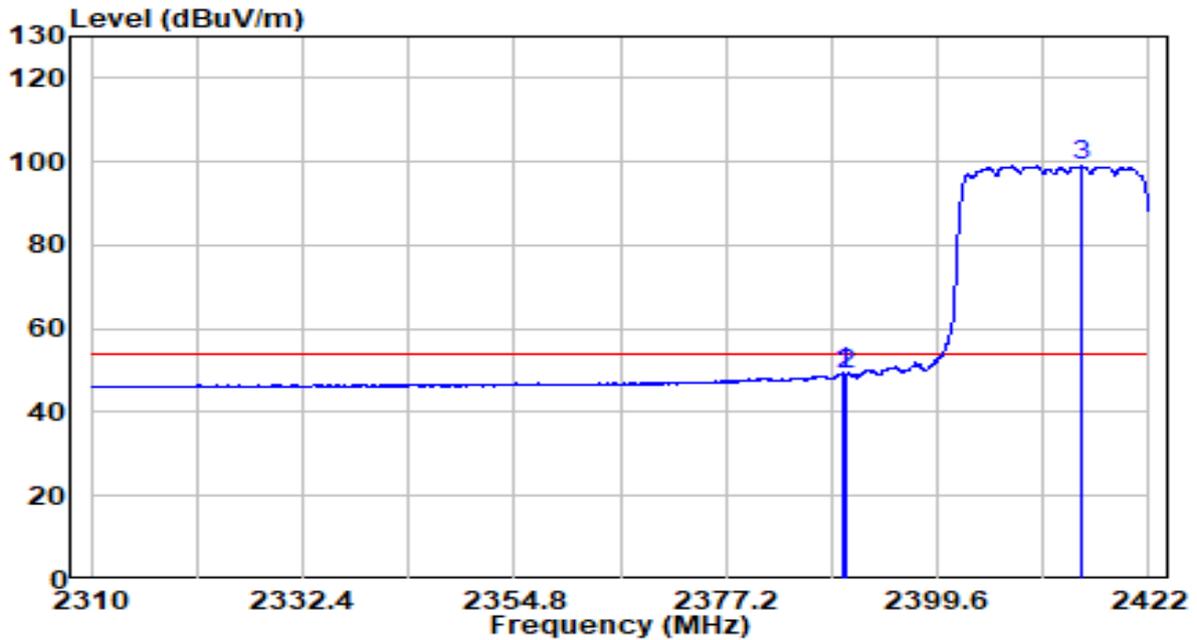


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.744	17.22	32.22	49.44	-4.56	54.00	Average
2	2390.000	17.04	32.22	49.26	-4.74	54.00	Average
3	* 2414.776	66.56	32.32	98.88	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

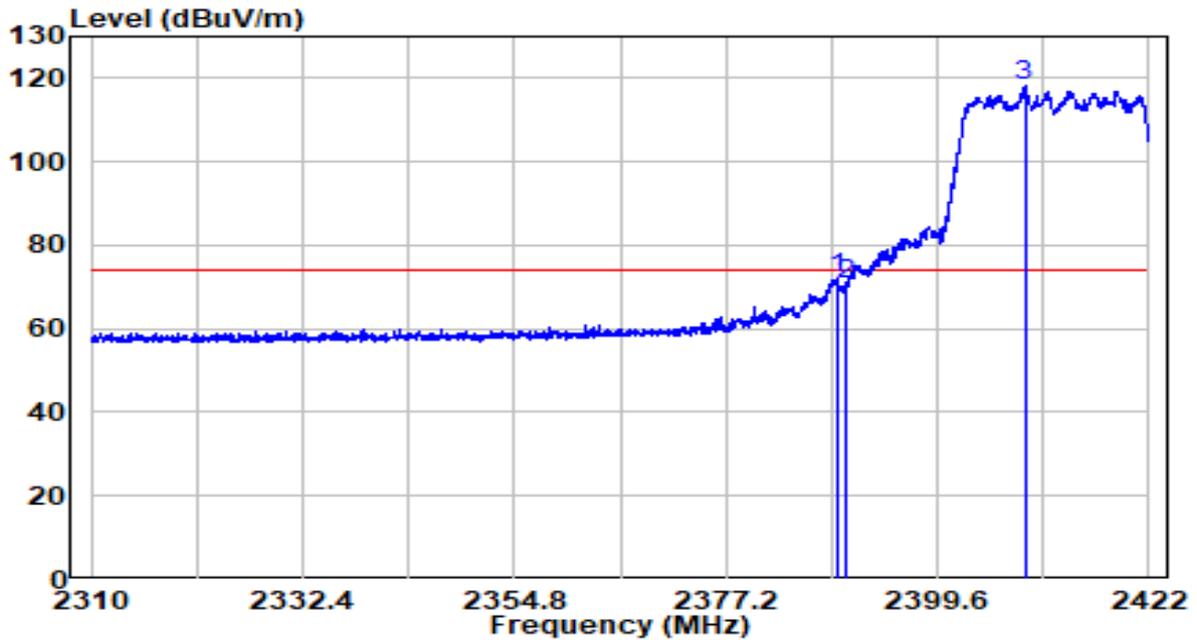


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.016	39.93	32.21	72.14	-1.86	74.00	Peak
2	2390.000	38.49	32.22	70.71	-3.29	74.00	Peak
3	* 2408.840	85.75	32.30	118.05	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

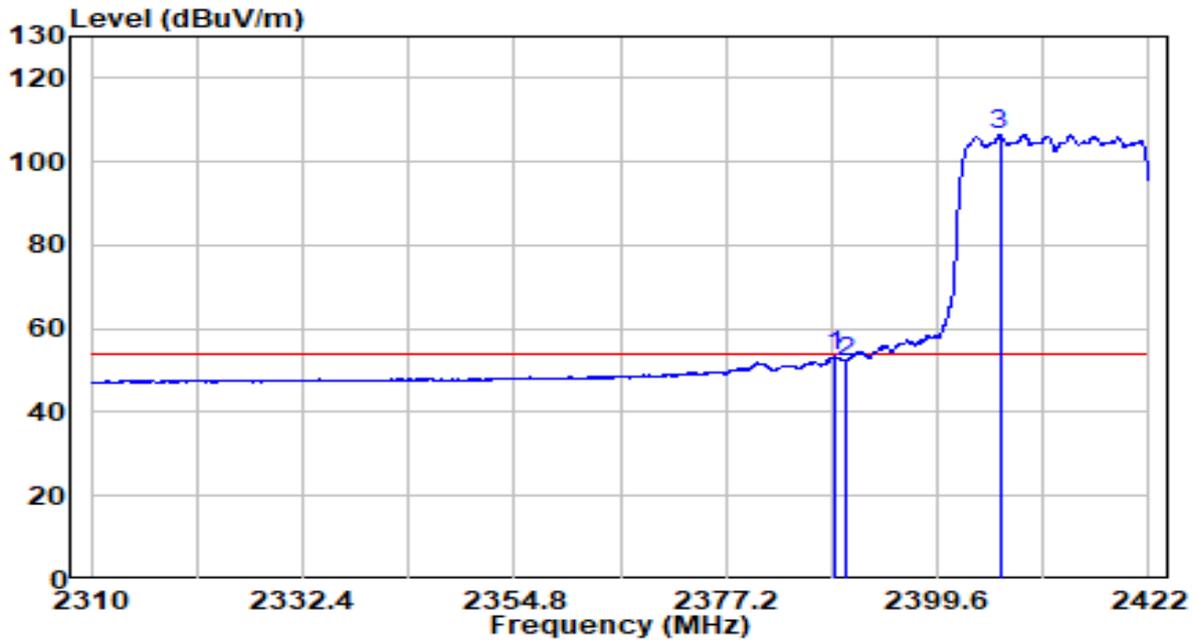


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.736	21.21	32.21	53.42	-0.58	54.00	Average
2	2390.000	19.95	32.22	52.17	-1.83	54.00	Average
3	* 2406.208	73.99	32.29	106.28	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

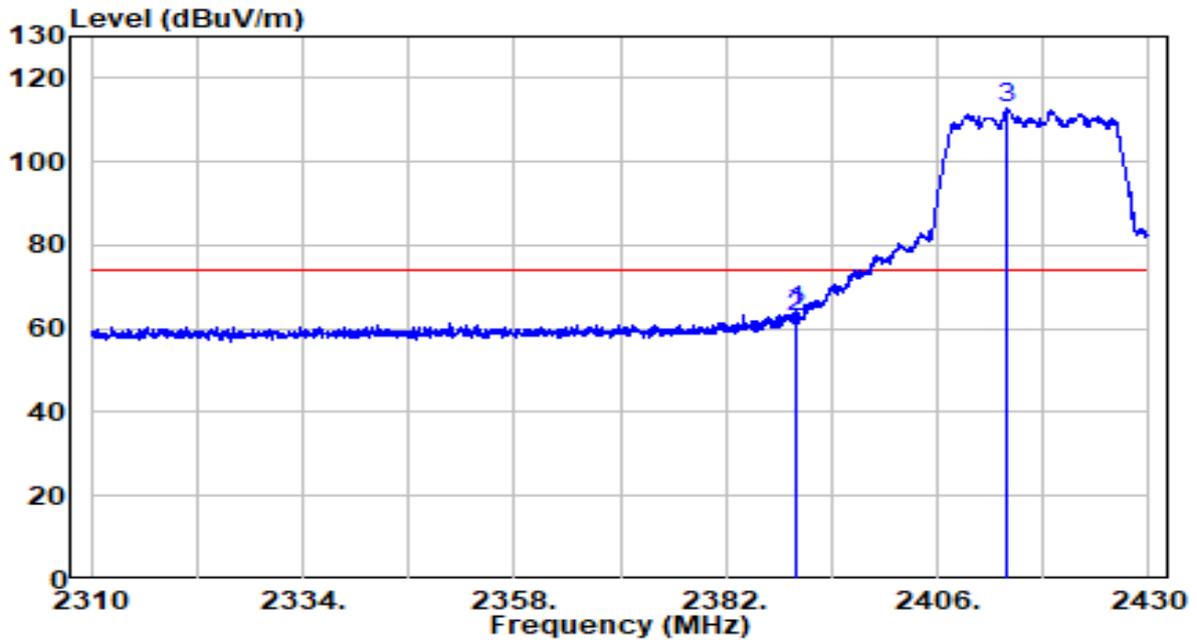


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.920	32.00	32.22	64.22	-9.78	74.00	Peak
2	2390.000	30.54	32.22	62.76	-11.24	74.00	Peak
3	* 2413.920	80.28	32.32	112.59	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

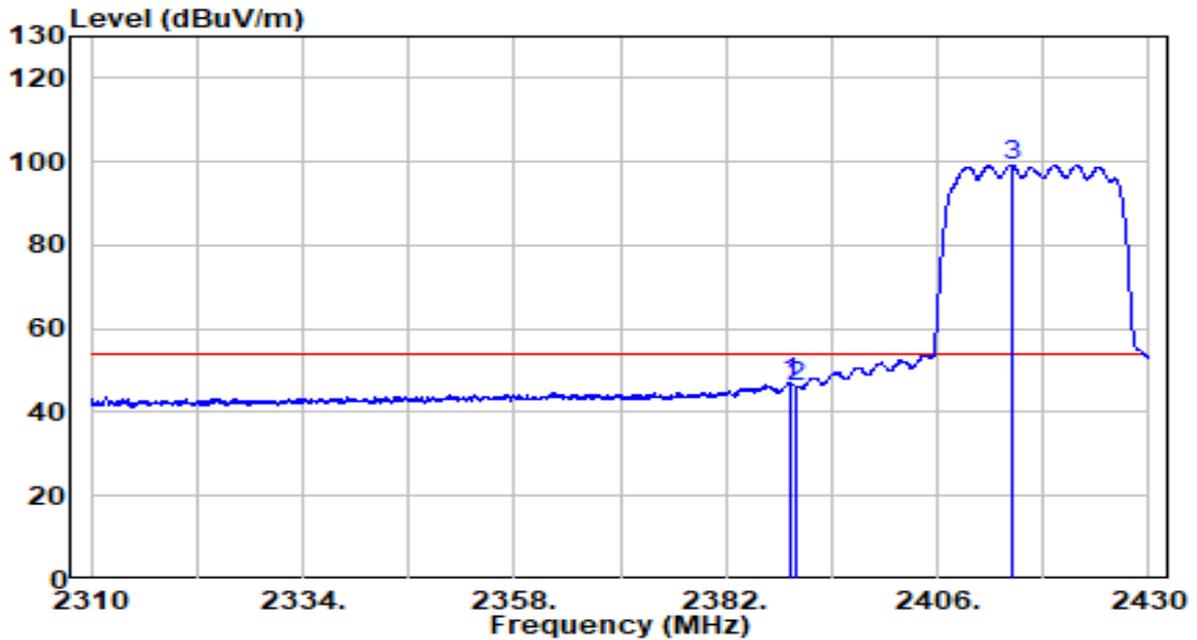


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.260	14.95	32.21	47.16	-6.84	54.00	Average
2	2390.000	13.99	32.22	46.20	-7.80	54.00	Average
3	* 2414.400	66.88	32.32	99.20	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

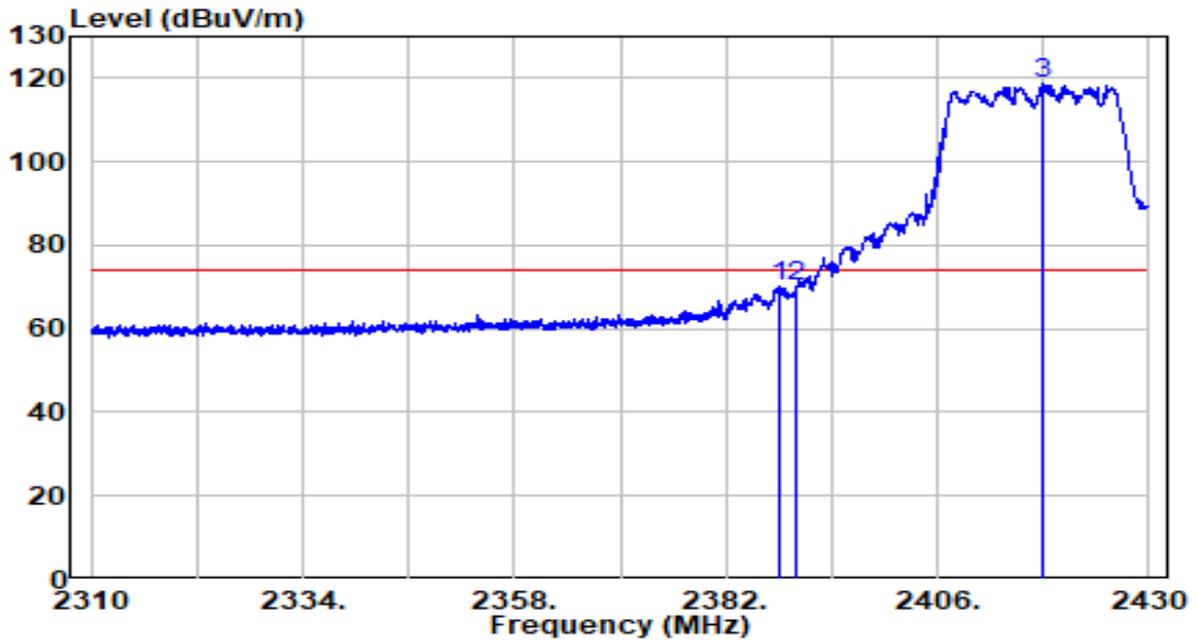


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.120	38.04	32.21	70.25	-3.75	74.00	Peak
2	2390.000	37.87	32.22	70.09	-3.91	74.00	Peak
3	* 2418.060	86.53	32.34	118.87	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2417MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

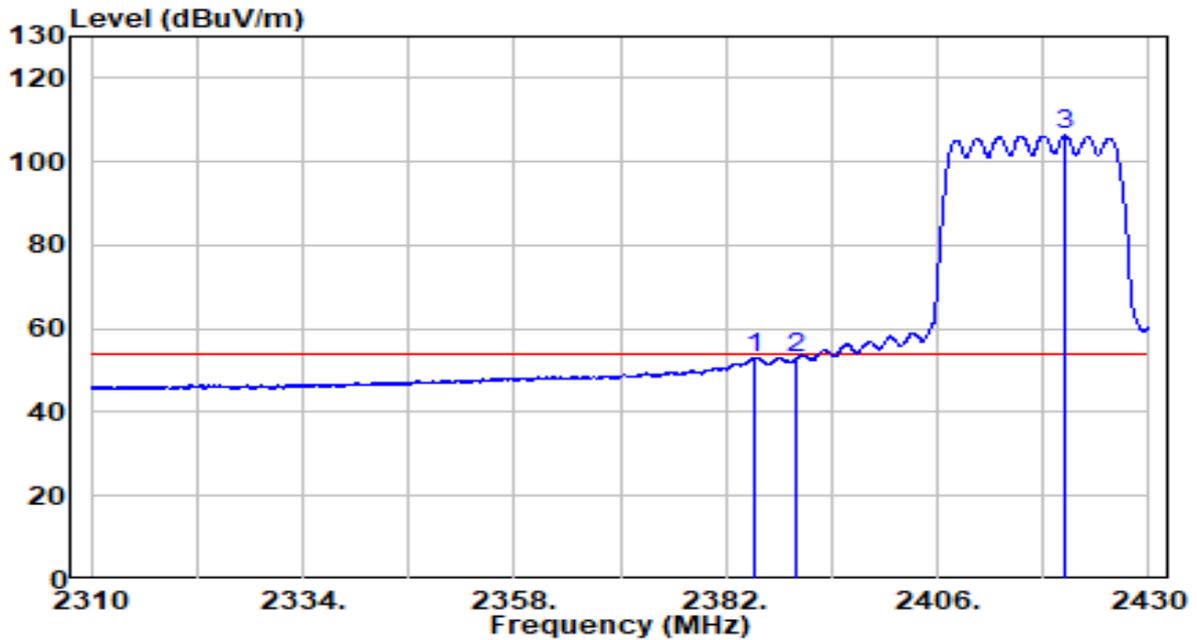


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2385.360	20.87	32.20	53.07	-0.93	54.00	Average
2	2390.000	20.55	32.22	52.77	-1.23	54.00	Average
3	* 2420.520	73.97	32.35	106.32	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

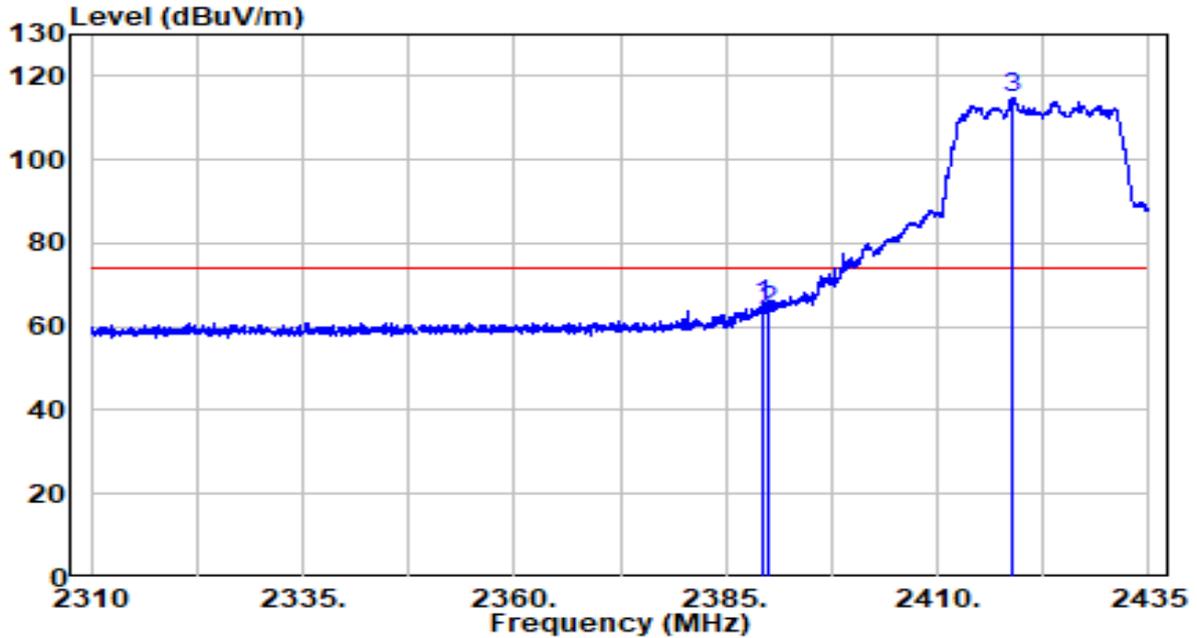


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.375	33.05	32.22	65.26	-8.74	74.00	Peak
2	2390.000	31.42	32.22	63.64	-10.36	74.00	Peak
3	* 2418.938	82.31	32.34	114.65	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

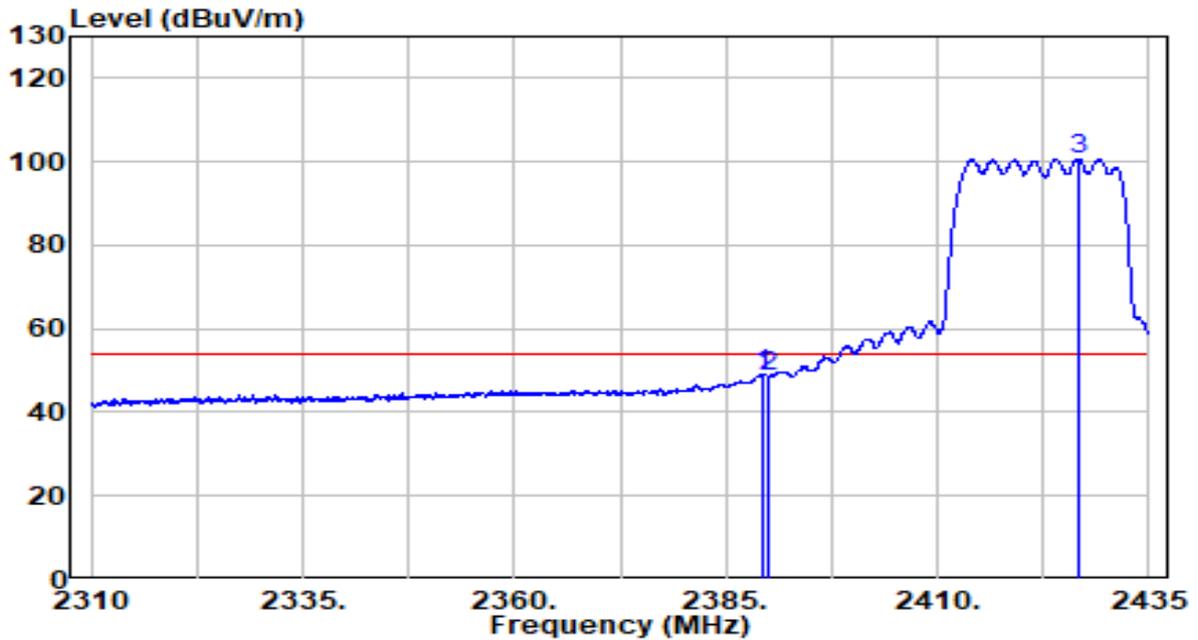


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.438	16.89	32.22	49.11	-4.89	54.00	Average
2	2390.000	16.46	32.22	48.68	-5.32	54.00	Average
3	* 2426.688	68.24	32.37	100.62	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

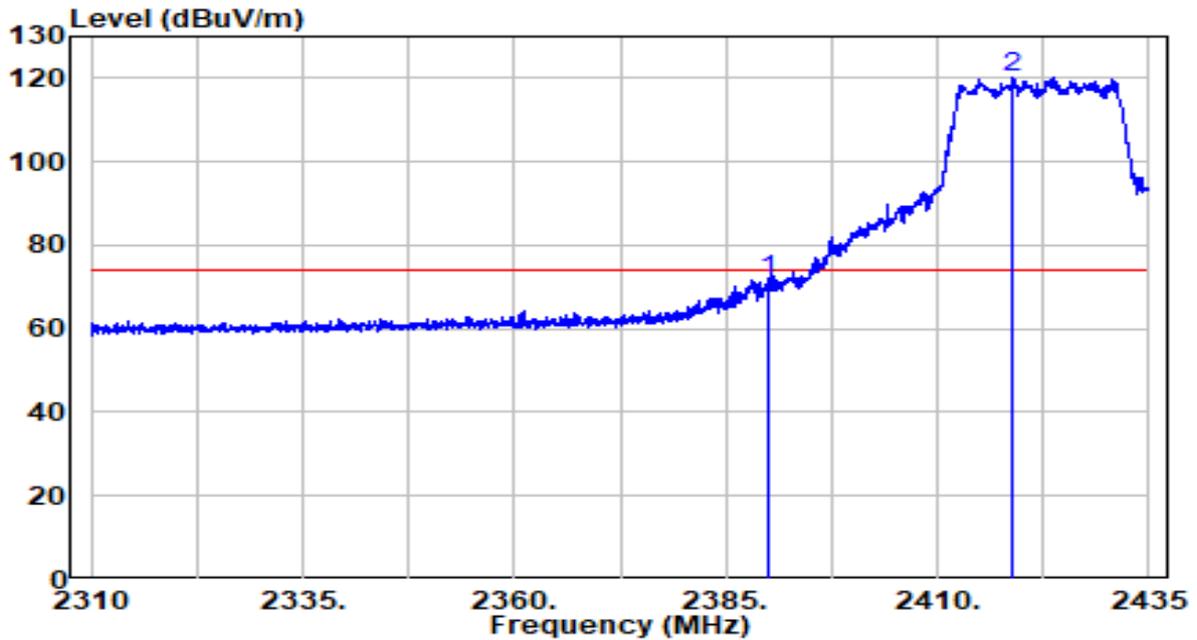


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	39.31	32.22	71.53	-2.47	74.00	Peak
2	* 2418.938	87.80	32.34	120.14	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

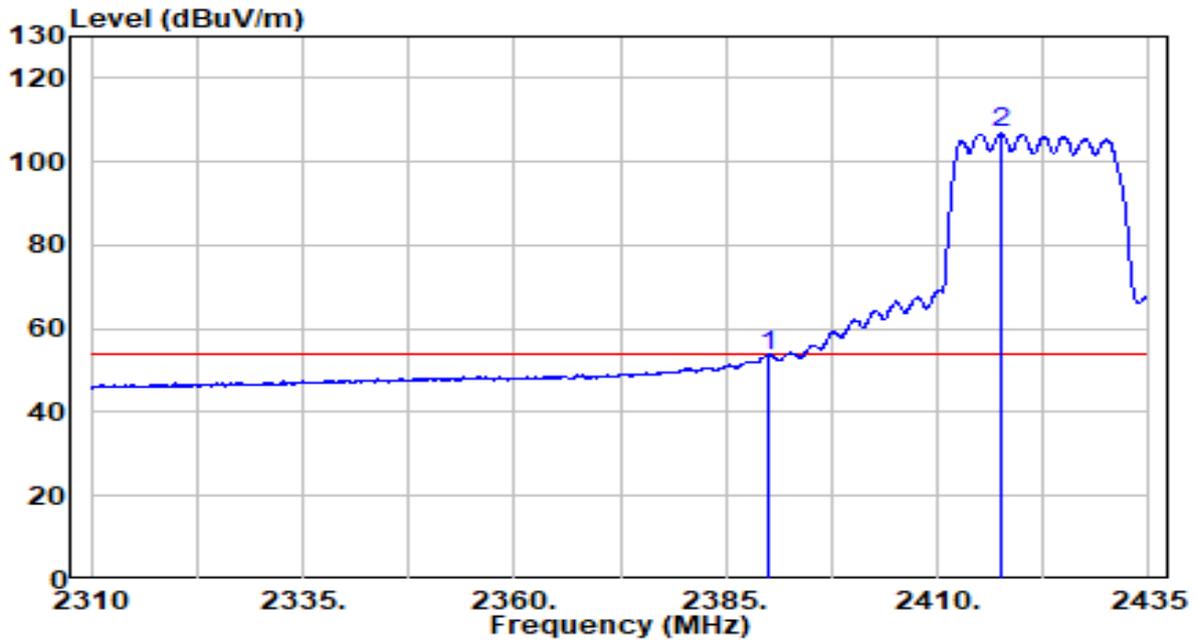


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	21.43	32.22	53.65	-0.35	54.00	Average
2	* 2417.500	74.46	32.33	106.79	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

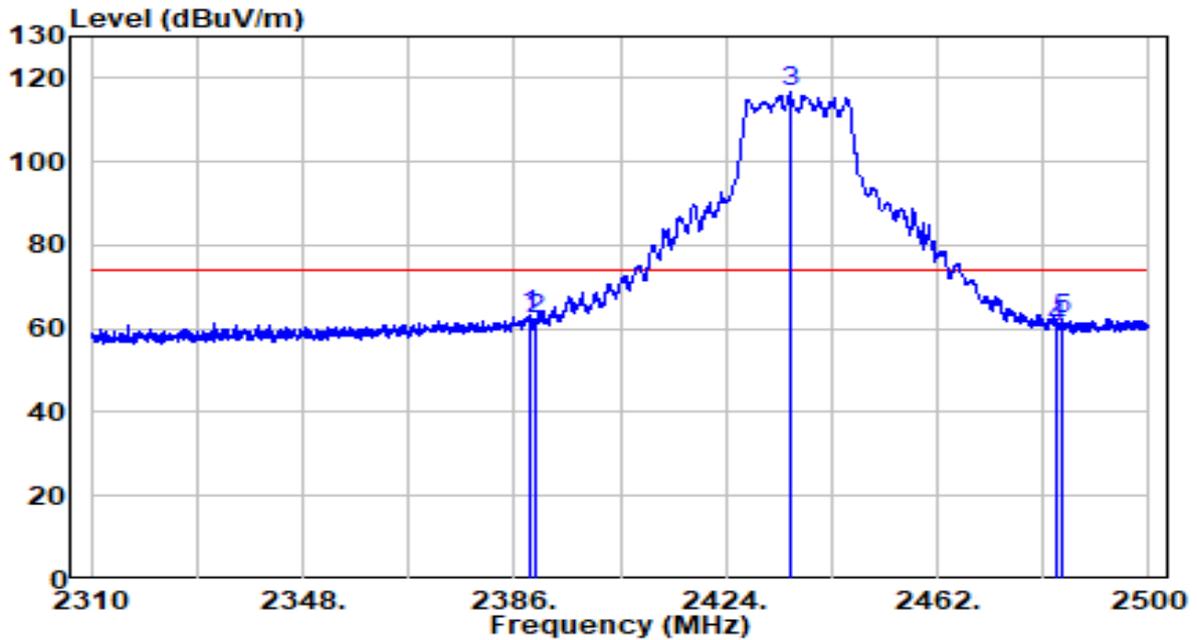


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.850	31.12	32.21	63.34	-10.66	74.00	Peak
2	2390.000	29.93	32.22	62.15	-11.85	74.00	Peak
3	* 2435.400	84.13	32.41	116.54	N/A	N/A	Peak
4	2483.500	27.59	32.61	60.20	-13.80	74.00	Peak
5	2484.325	29.56	32.61	62.18	-11.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

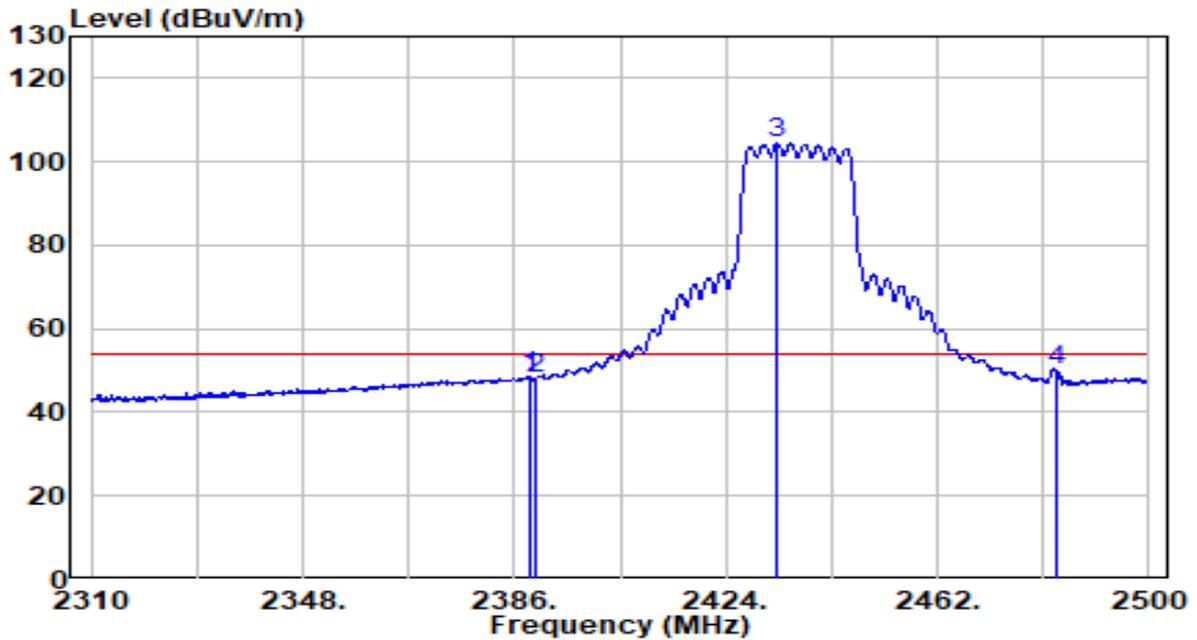


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.660	16.21	32.21	48.43	-5.57	54.00	Average
2	2390.000	16.06	32.22	48.28	-5.72	54.00	Average
3	* 2433.120	71.97	32.40	104.37	N/A	N/A	Average
4	2483.500	17.42	32.61	50.03	-3.97	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

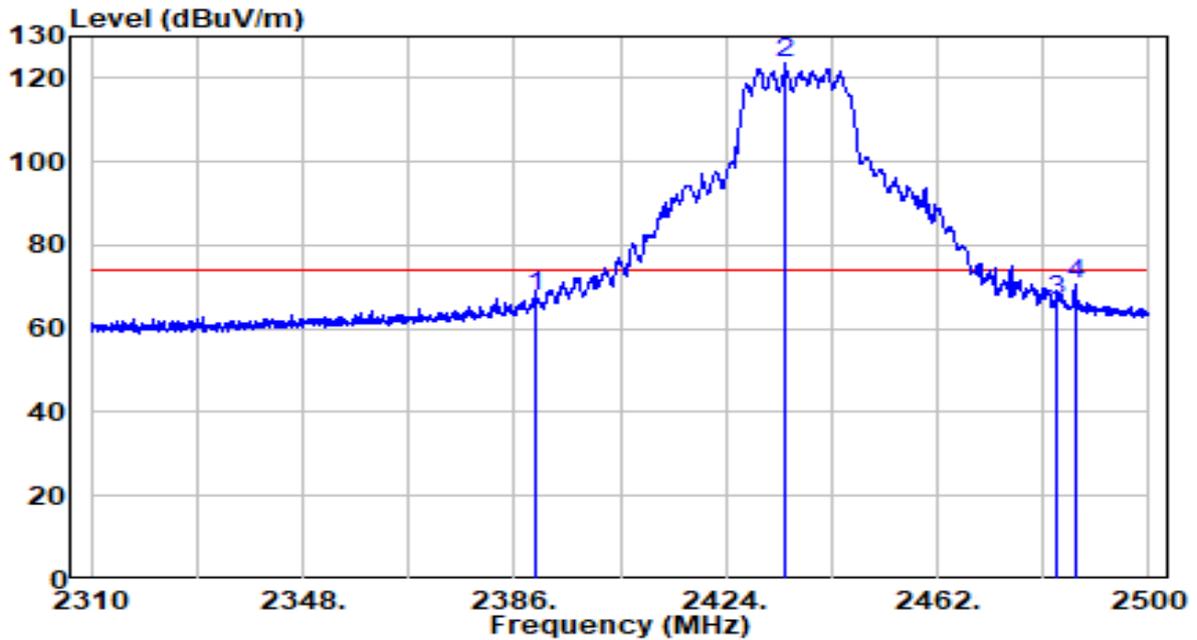


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	35.44	32.22	67.66	-6.34	74.00	Peak
2	* 2434.640	91.33	32.41	123.73	N/A	N/A	Peak
3	2483.500	33.97	32.61	66.58	-7.42	74.00	Peak
4	2486.700	37.89	32.62	70.51	-3.49	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

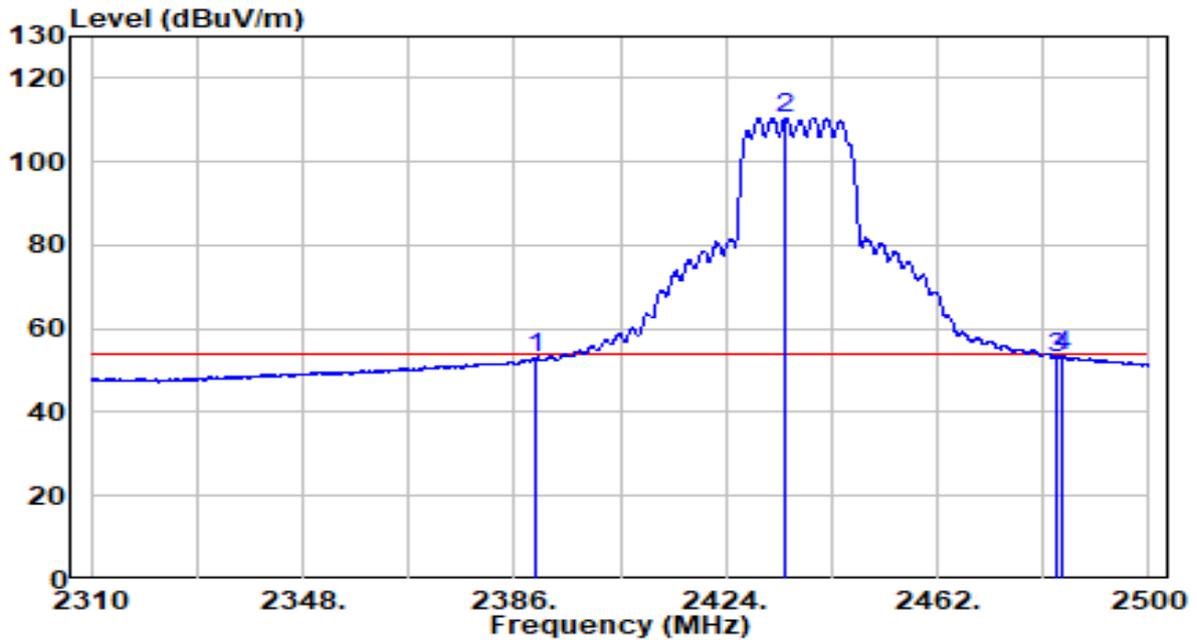


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.61	32.22	52.83	-1.17	54.00	Average
2	* 2434.830	78.21	32.41	110.61	N/A	N/A	Average
3	2483.500	20.44	32.61	53.05	-0.95	54.00	Average
4	2484.325	20.83	32.61	53.45	-0.55	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

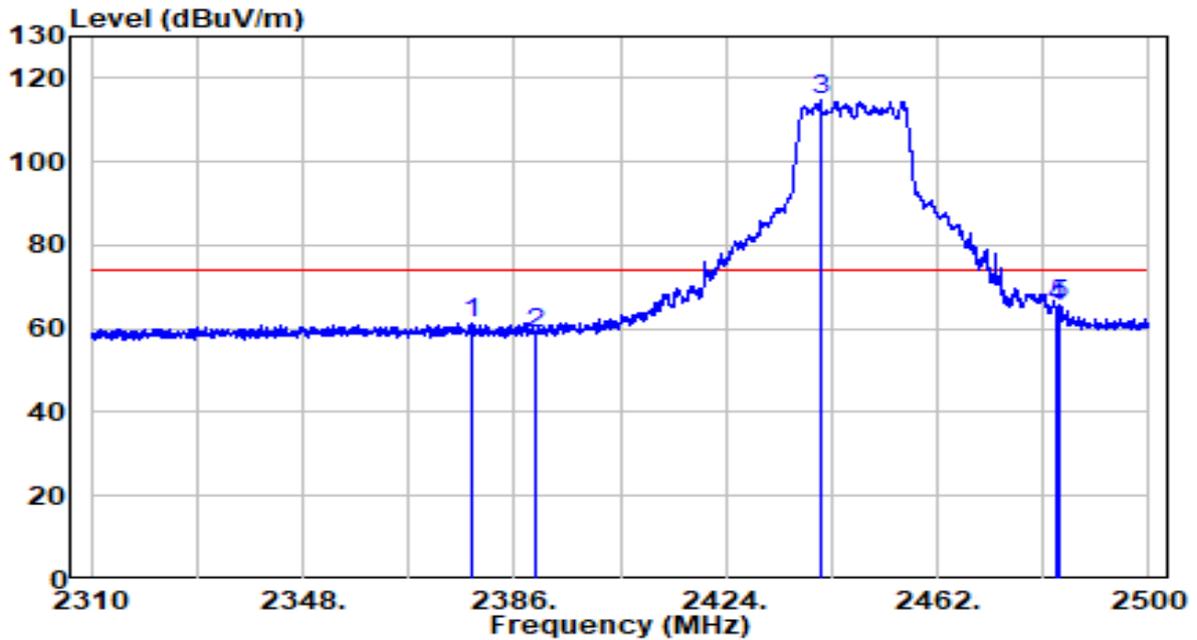


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2378.590	29.03	32.17	61.20	-12.80	74.00	Peak
2	2390.000	26.84	32.22	59.06	-14.94	74.00	Peak
3	* 2441.005	82.23	32.43	114.66	N/A	N/A	Peak
4	2483.500	32.62	32.61	65.23	-8.77	74.00	Peak
5	2483.850	32.90	32.61	65.52	-8.48	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

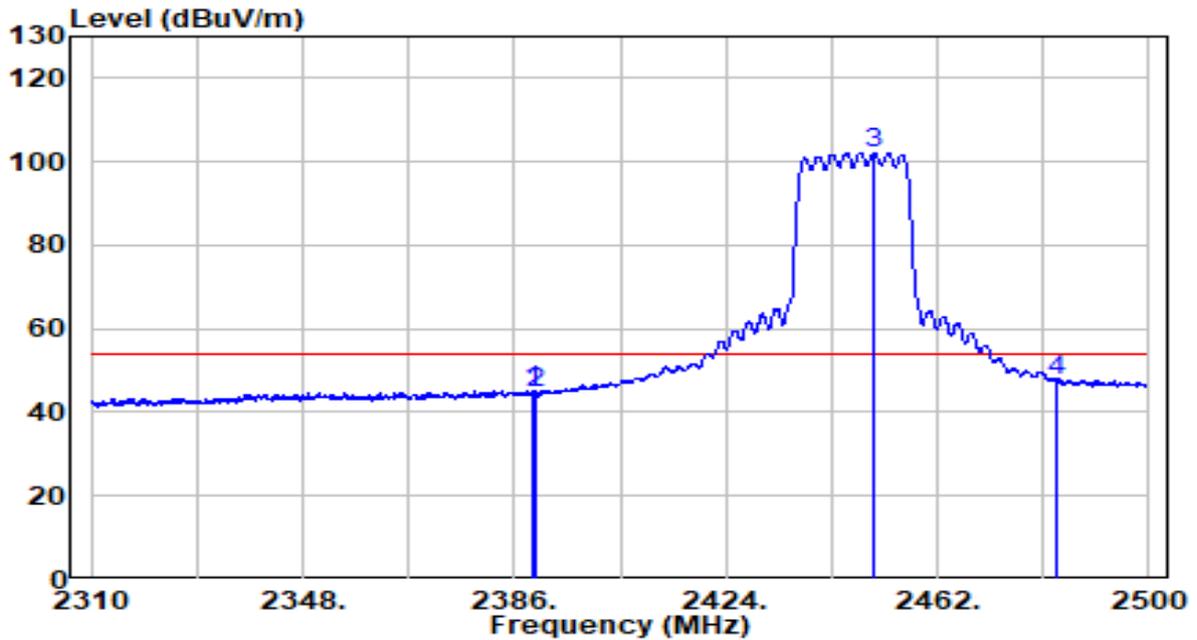


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.325	12.93	32.22	45.14	-8.86	54.00	Average
2	2390.000	12.30	32.22	44.52	-9.48	54.00	Average
3	* 2450.505	69.78	32.47	102.25	N/A	N/A	Average
4	2483.500	15.04	32.61	47.65	-6.35	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

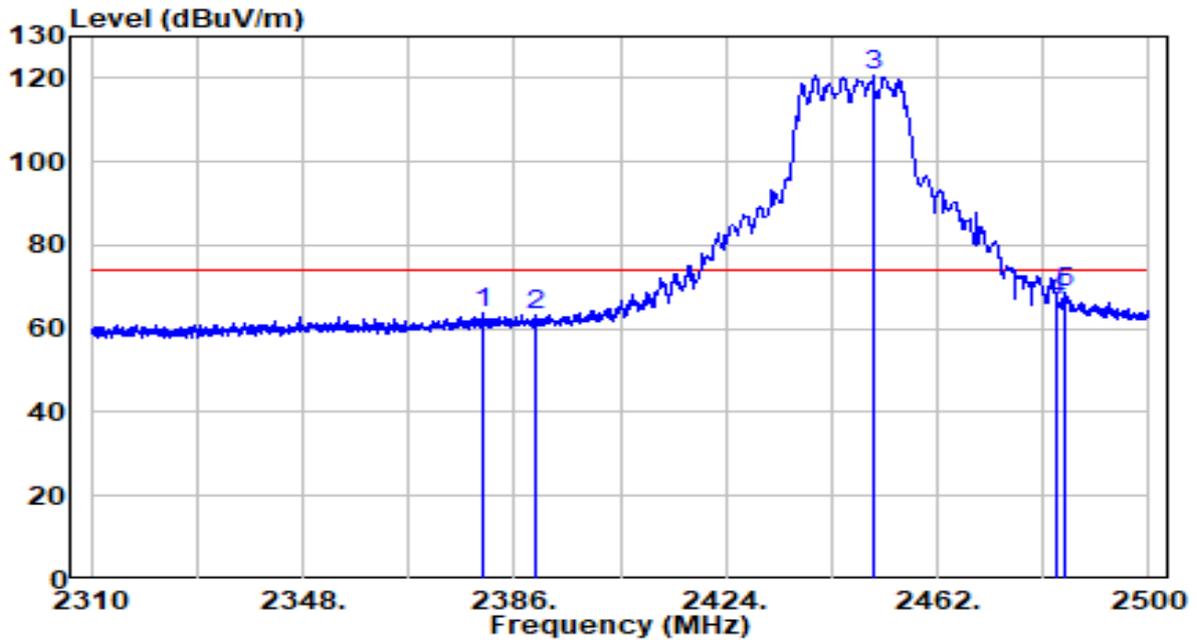


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2380.585	31.69	32.18	63.87	-10.13	74.00	Peak
2	2390.000	30.84	32.22	63.06	-10.94	74.00	Peak
3	* 2450.505	88.25	32.47	120.72	N/A	N/A	Peak
4	2483.500	34.21	32.61	66.82	-7.18	74.00	Peak
5	2484.990	36.17	32.62	68.79	-5.21	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

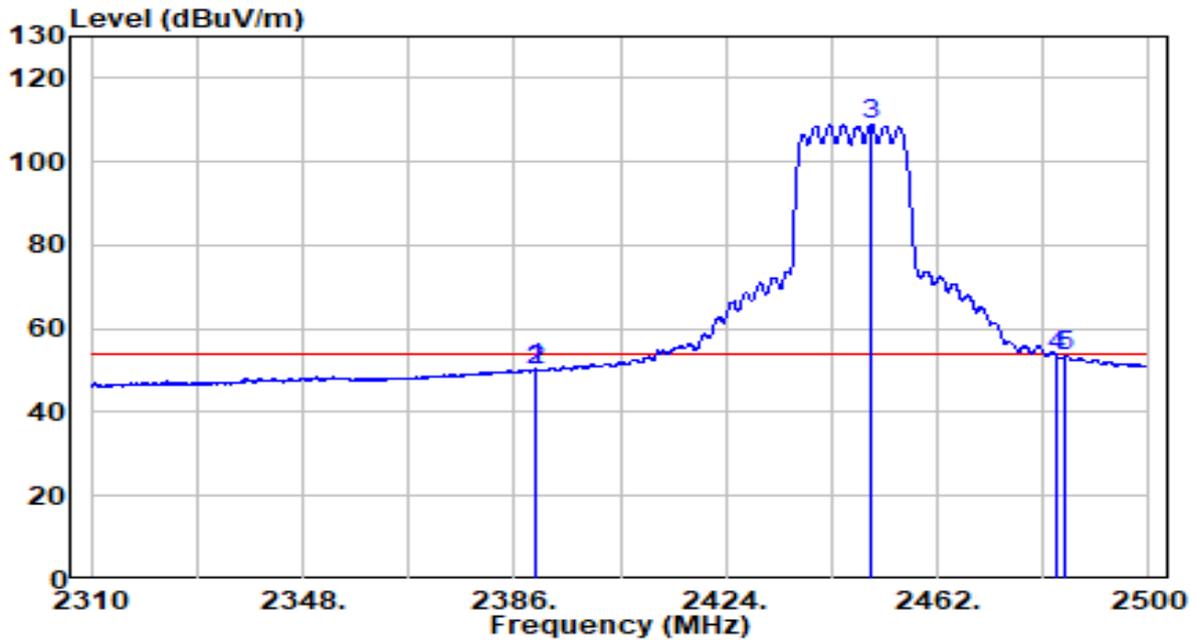


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.610	18.18	32.22	50.40	-3.60	54.00	Average
2	2390.000	17.89	32.22	50.11	-3.89	54.00	Average
3	* 2450.125	76.45	32.47	108.92	N/A	N/A	Average
4	2483.500	20.81	32.61	53.42	-0.58	54.00	Average
5	2485.085	21.00	32.62	53.62	-0.38	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

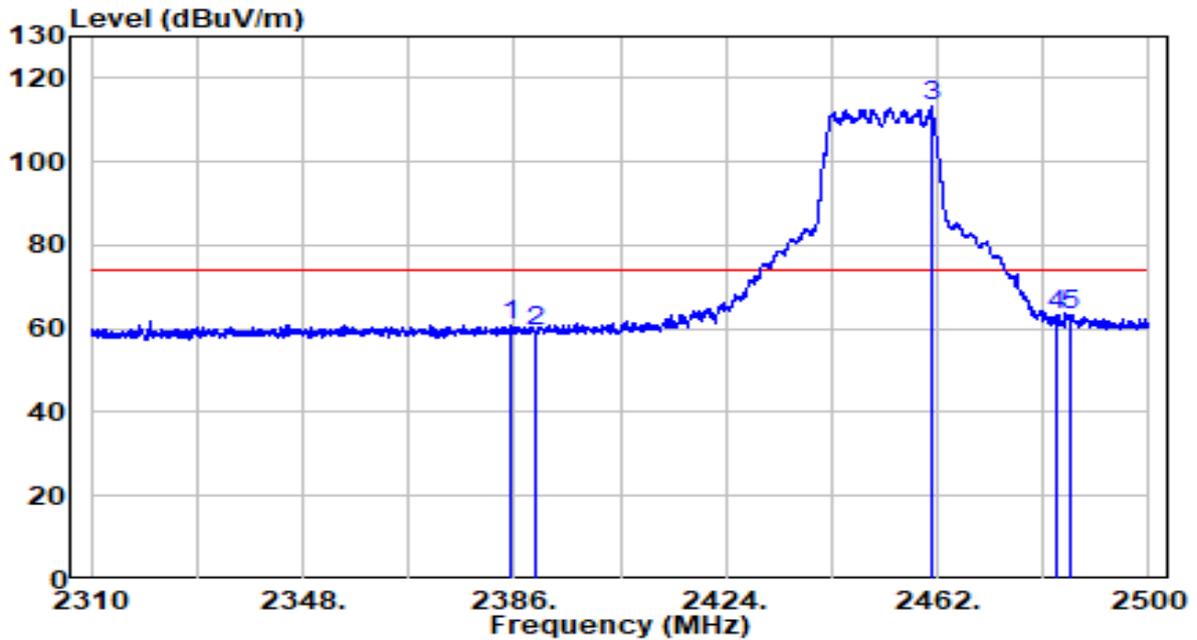


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2385.430	28.71	32.20	60.91	-13.09	74.00	Peak
2	2390.000	27.10	32.22	59.32	-14.68	74.00	Peak
3	* 2460.860	80.64	32.52	113.15	N/A	N/A	Peak
4	2483.500	30.61	32.61	63.23	-10.77	74.00	Peak
5	2485.940	30.86	32.62	63.48	-10.52	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

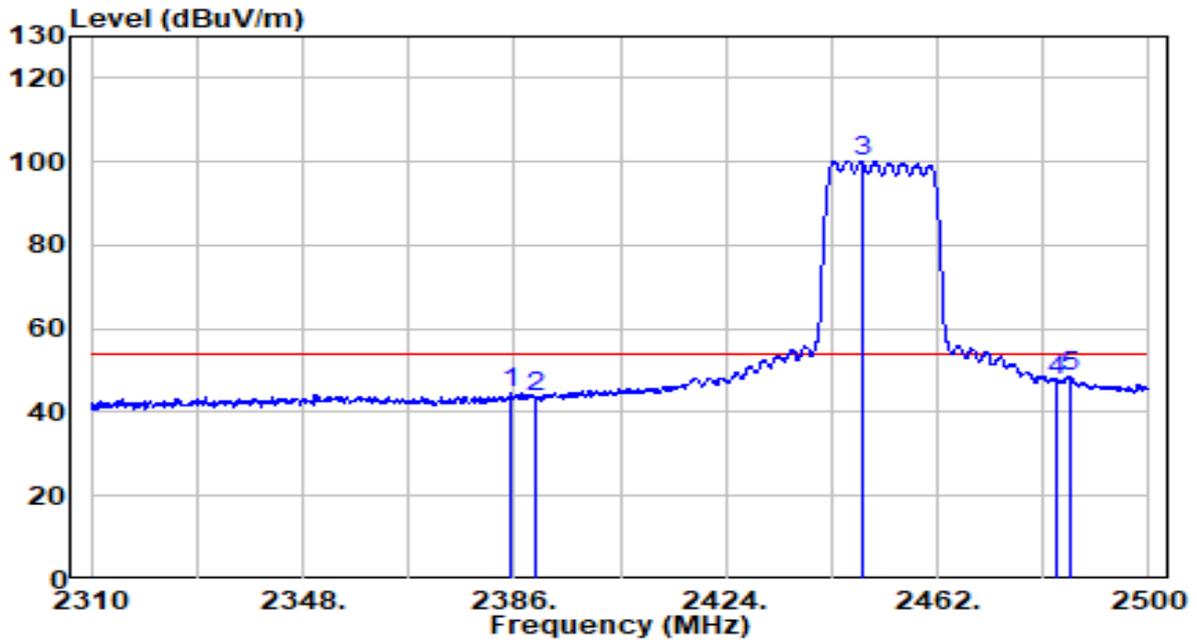


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2385.145	12.41	32.20	44.61	-9.39	54.00	Average
2	2390.000	11.52	32.22	43.74	-10.26	54.00	Average
3	* 2448.415	67.67	32.46	100.14	N/A	N/A	Average
4	2483.500	15.06	32.61	47.67	-6.33	54.00	Average
5	2485.750	16.01	32.62	48.63	-5.37	54.00	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

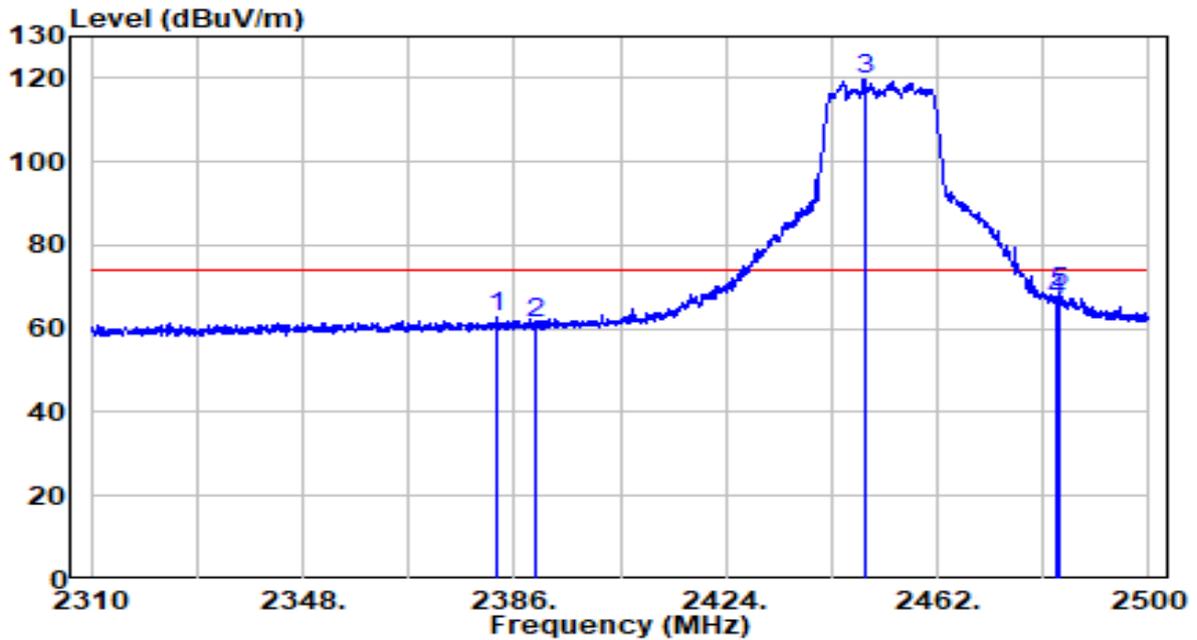


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2383.055	30.53	32.19	62.72	-11.28	74.00	Peak
2	2390.000	29.24	32.22	61.46	-12.54	74.00	Peak
3	* 2449.080	87.18	32.47	119.65	N/A	N/A	Peak
4	2483.500	33.91	32.61	66.52	-7.48	74.00	Peak
5	2483.945	35.96	32.61	68.58	-5.42	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

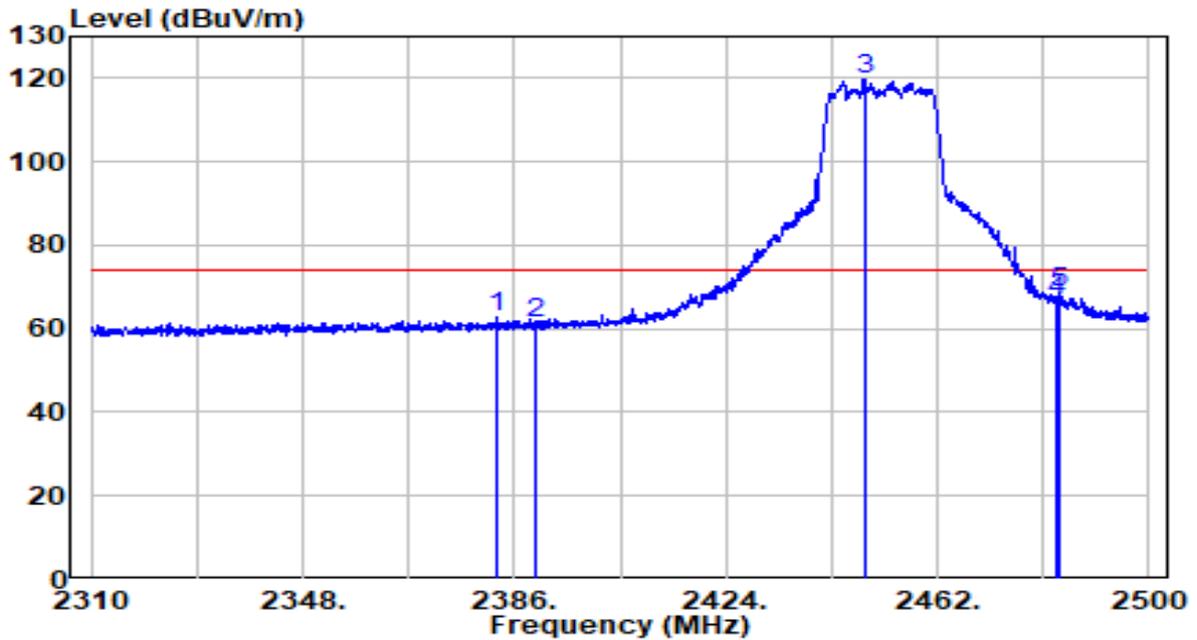


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2383.055	30.53	32.19	62.72	-11.28	74.00	Peak
2	2390.000	29.24	32.22	61.46	-12.54	74.00	Peak
3	* 2449.080	87.18	32.47	119.65	N/A	N/A	Peak
4	2483.500	33.91	32.61	66.52	-7.48	74.00	Peak
5	2483.945	35.96	32.61	68.58	-5.42	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

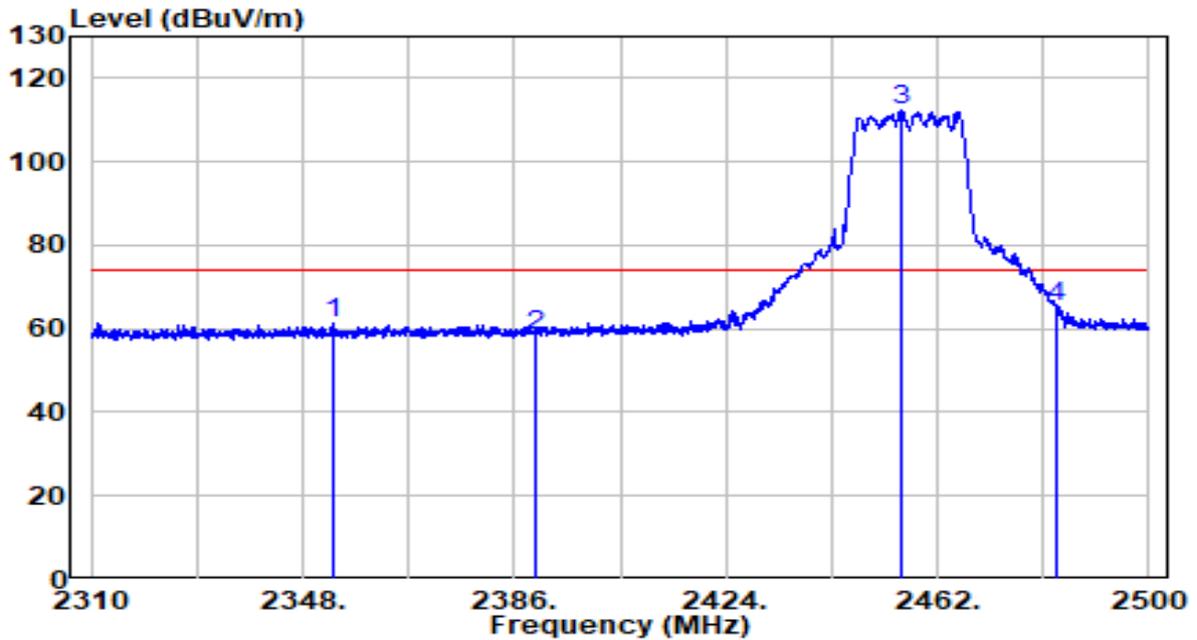


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2353.320	29.26	32.06	61.32	-12.68	74.00	Peak
2	2390.000	25.94	32.22	58.16	-15.84	74.00	Peak
3	* 2455.730	80.03	32.49	112.52	N/A	N/A	Peak
4	2483.500	32.58	32.61	65.19	-8.81	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

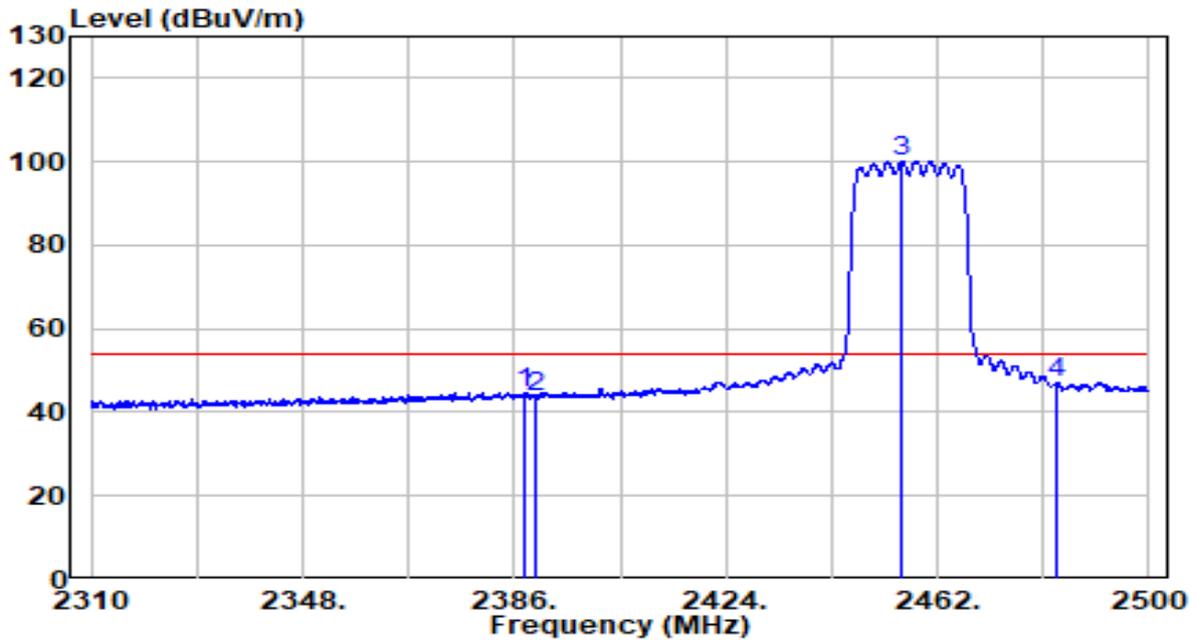


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.615	12.49	32.21	44.70	-9.30	54.00	Average
2	2390.000	11.46	32.22	43.68	-10.32	54.00	Average
3	* 2455.730	67.70	32.49	100.19	N/A	N/A	Average
4	2483.500	14.58	32.61	47.19	-6.81	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

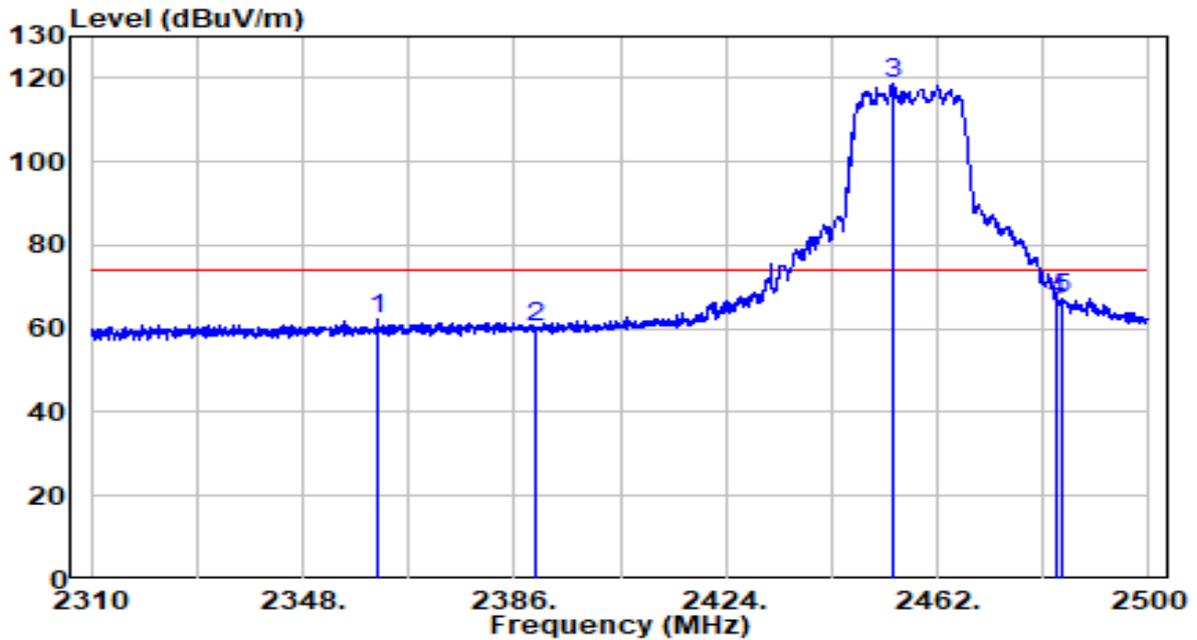


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2361.490	30.25	32.10	62.35	-11.65	74.00	Peak
2	2390.000	28.00	32.22	60.22	-13.78	74.00	Peak
3	* 2454.020	86.01	32.49	118.50	N/A	N/A	Peak
4	2483.500	34.28	32.61	66.89	-7.11	74.00	Peak
5	2484.325	34.72	32.61	67.33	-6.67	74.00	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2457MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

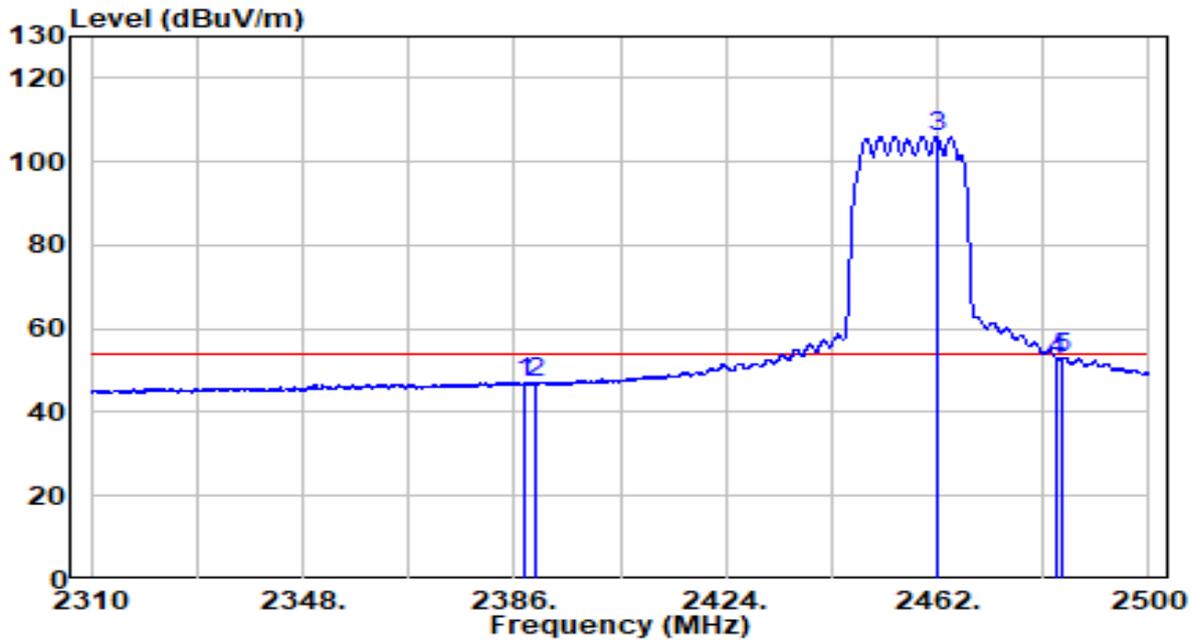


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.995	14.98	32.21	47.19	-6.81	54.00	Average
2	2390.000	14.70	32.22	46.92	-7.08	54.00	Average
3	* 2461.905	73.61	32.52	106.13	N/A	N/A	Average
4	2483.500	19.90	32.61	52.51	-1.49	54.00	Average
5	2484.515	20.52	32.61	53.13	-0.87	54.00	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

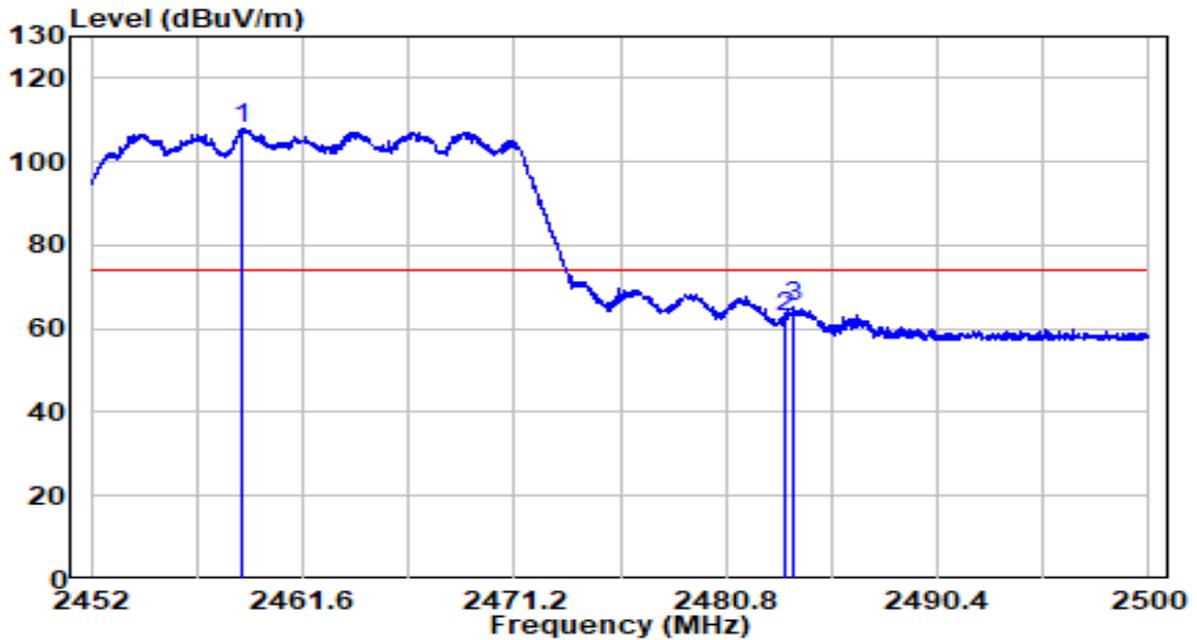


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2458.888	75.31	32.51	107.82	N/A	N/A	Peak
2	2483.500	30.34	32.61	62.95	-11.05	74.00	Peak
3	2483.872	32.57	32.61	65.18	-8.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

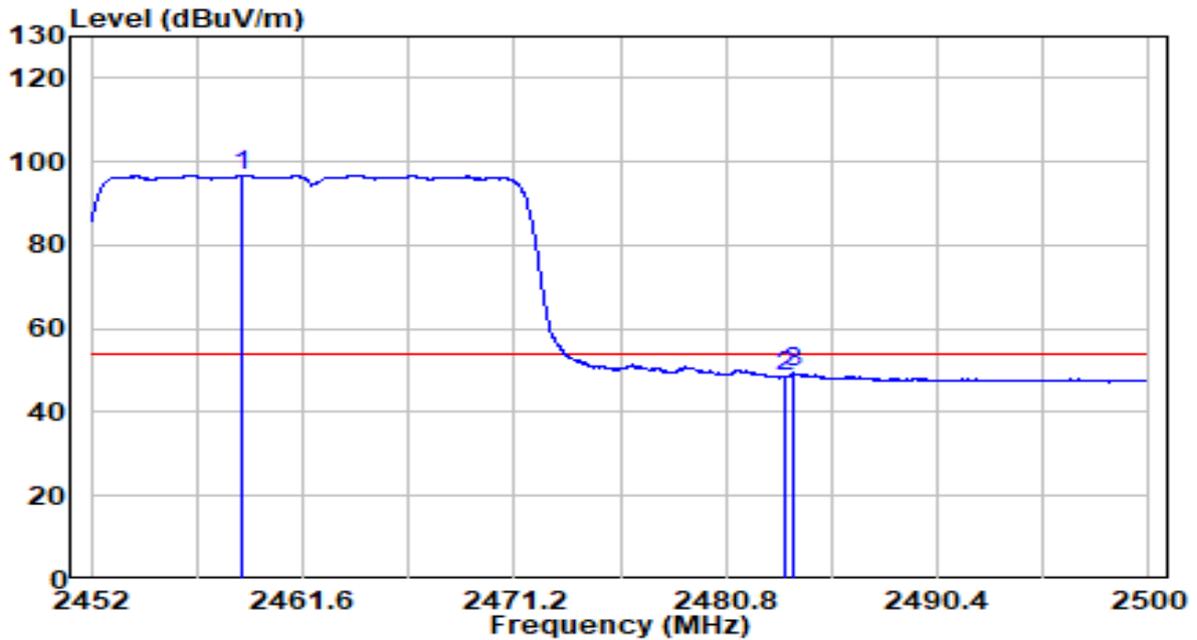


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2458.888	64.21	32.51	96.71	N/A	N/A	Average
2		2483.500	16.04	32.61	48.65	-5.35	54.00	Average
3		2483.848	16.73	32.61	49.34	-4.66	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

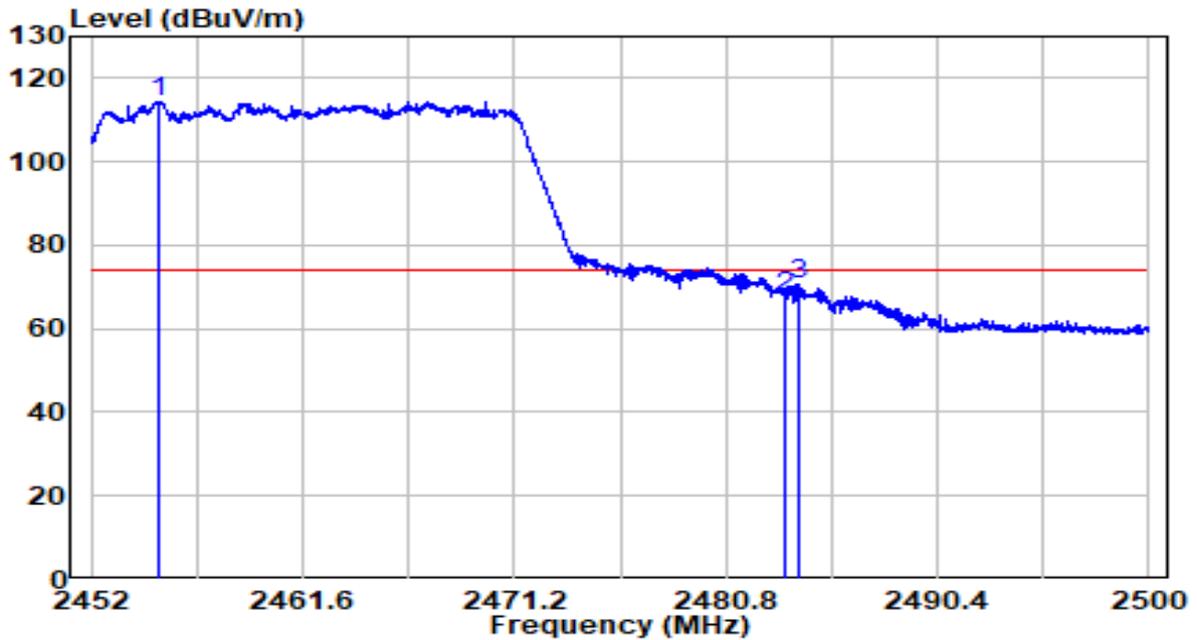


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.096	82.05	32.49	114.55	N/A	N/A	Peak
2	2483.500	35.13	32.61	67.74	-6.26	74.00	Peak
3	2484.160	38.18	32.61	70.79	-3.21	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2462MHz by 802.11ax-HE20	Test Voltage	120V / 60Hz

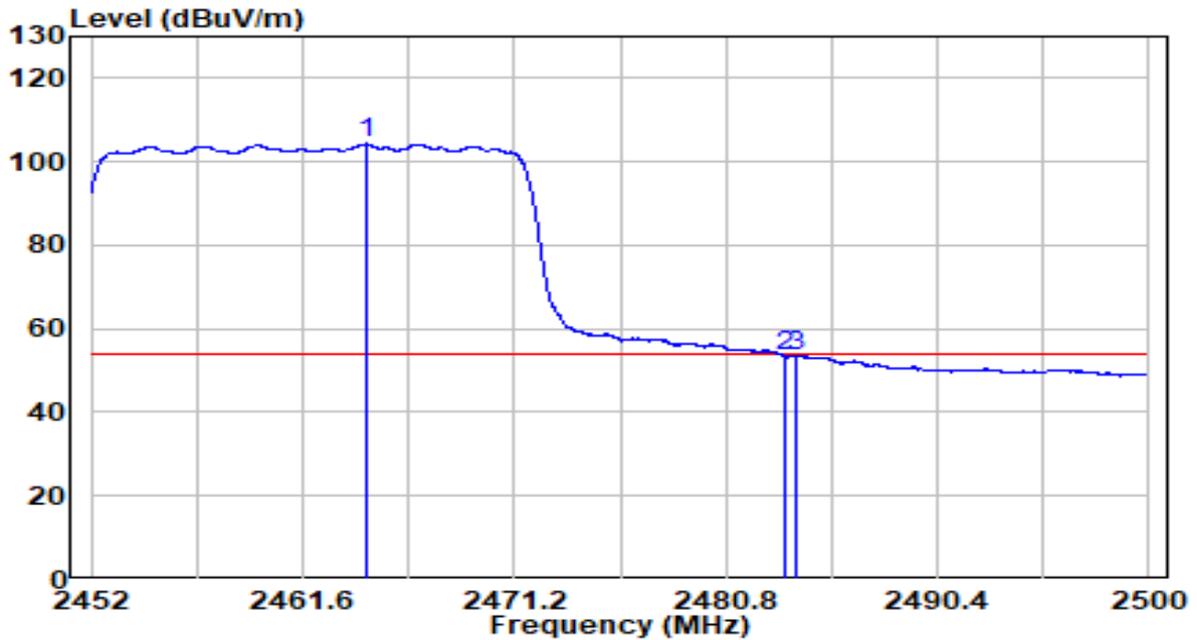


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2464.456	71.72	32.53	104.25	N/A	N/A	Average
2	2483.500	20.76	32.61	53.37	-0.63	54.00	Average
3	2484.016	21.10	32.61	53.71	-0.29	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

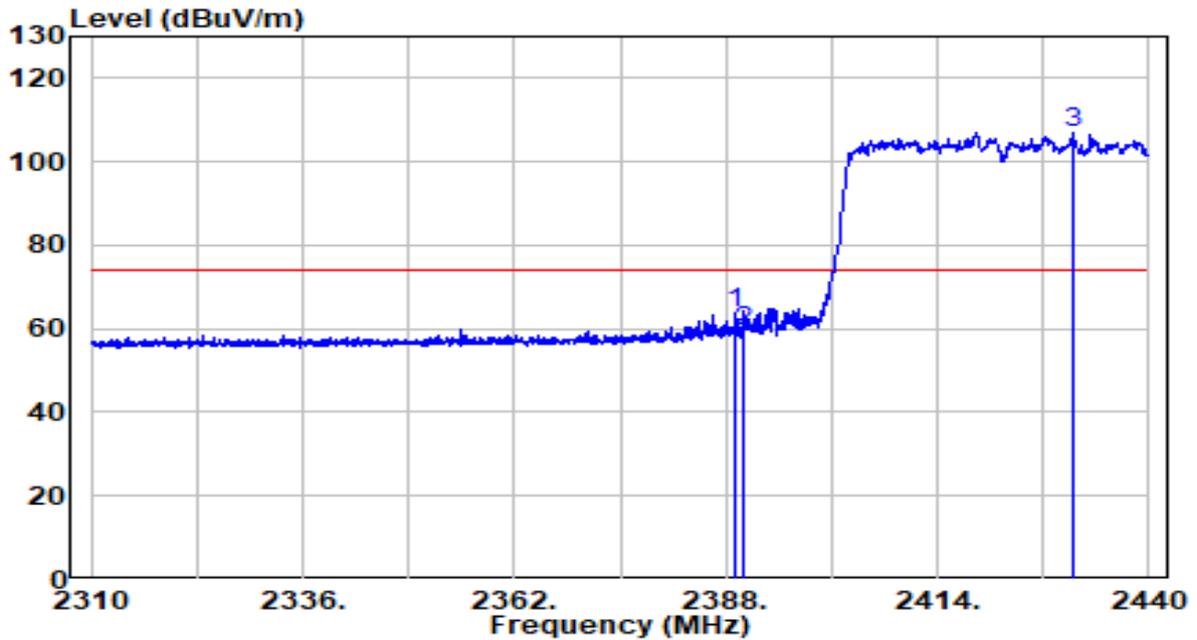


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.235	31.33	32.21	63.54	-10.46	74.00	Peak
2	2390.000	27.15	32.22	59.37	-14.63	74.00	Peak
3	* 2430.705	74.39	32.39	106.78	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

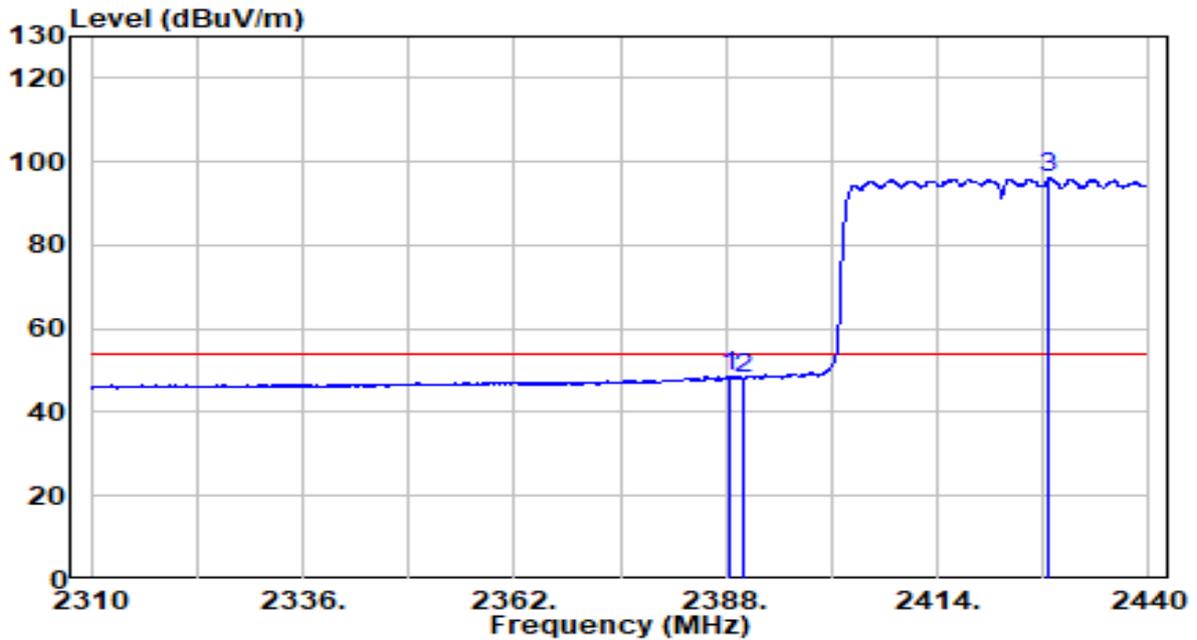


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.455	16.34	32.21	48.55	-5.45	54.00	Peak
2	2390.000	15.74	32.22	47.96	-6.04	54.00	Peak
3	* 2427.715	63.69	32.38	96.07	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

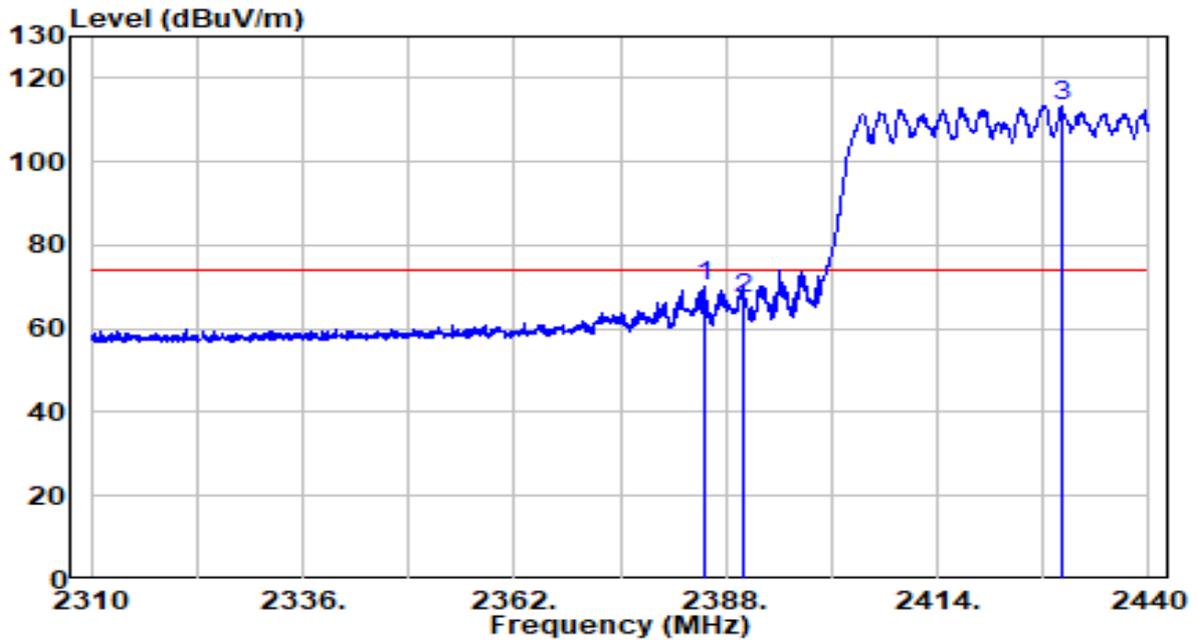


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2385.270	38.10	32.20	70.30	-3.70	74.00	Peak
2	2390.000	34.81	32.22	67.03	-6.97	74.00	Peak
3	* 2429.275	80.85	32.38	113.24	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2422MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

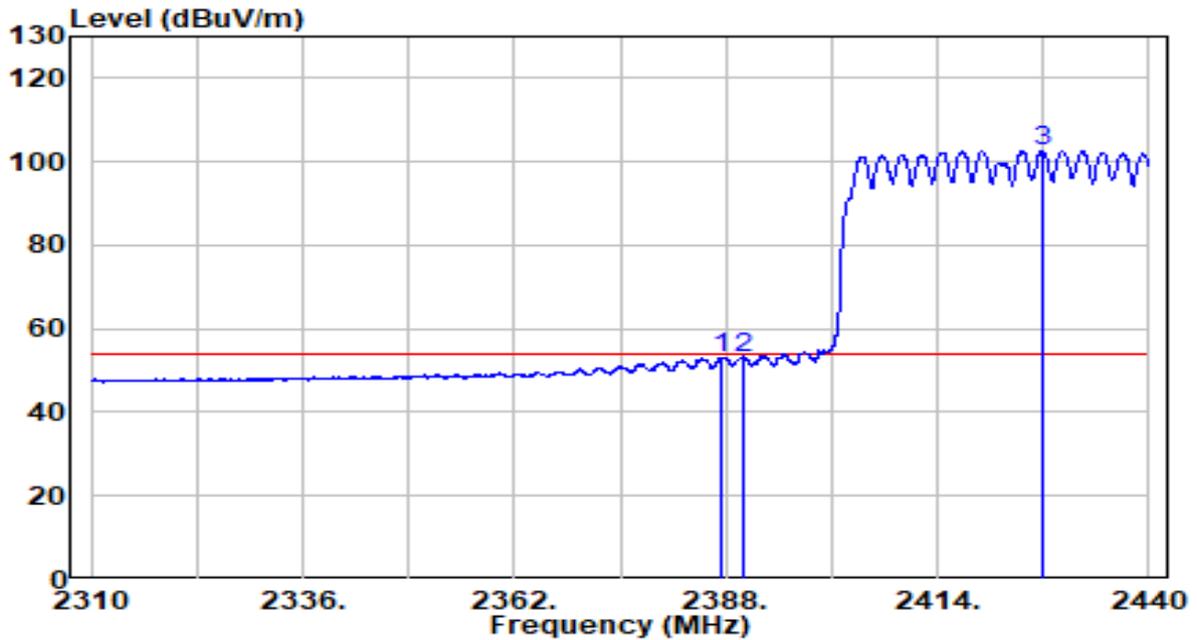


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.480	21.01	32.21	53.22	-0.78	54.00	Average
2	2390.000	20.98	32.22	53.20	-0.80	54.00	Average
3	* 2426.805	70.23	32.37	102.60	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

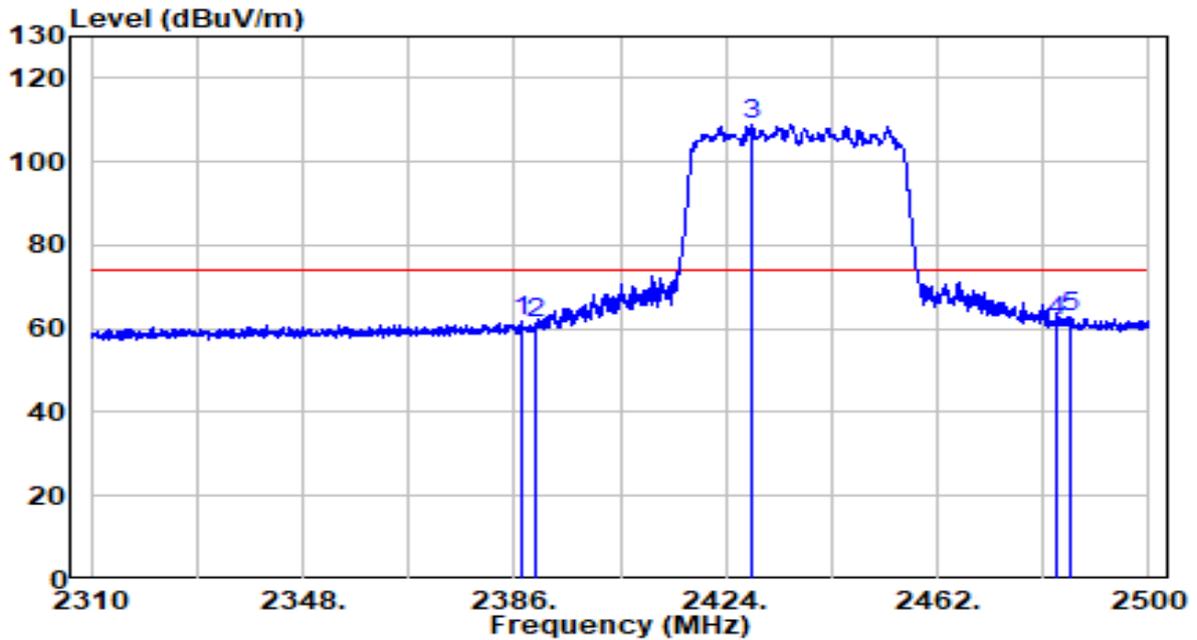


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.520	29.47	32.21	61.68	-12.32	74.00	Peak
2	2390.000	29.33	32.22	61.55	-12.45	74.00	Peak
3	* 2428.845	76.45	32.38	108.83	N/A	N/A	Peak
4	2483.500	29.01	32.61	61.62	-12.38	74.00	Peak
5	2486.130	30.41	32.62	63.04	-10.96	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

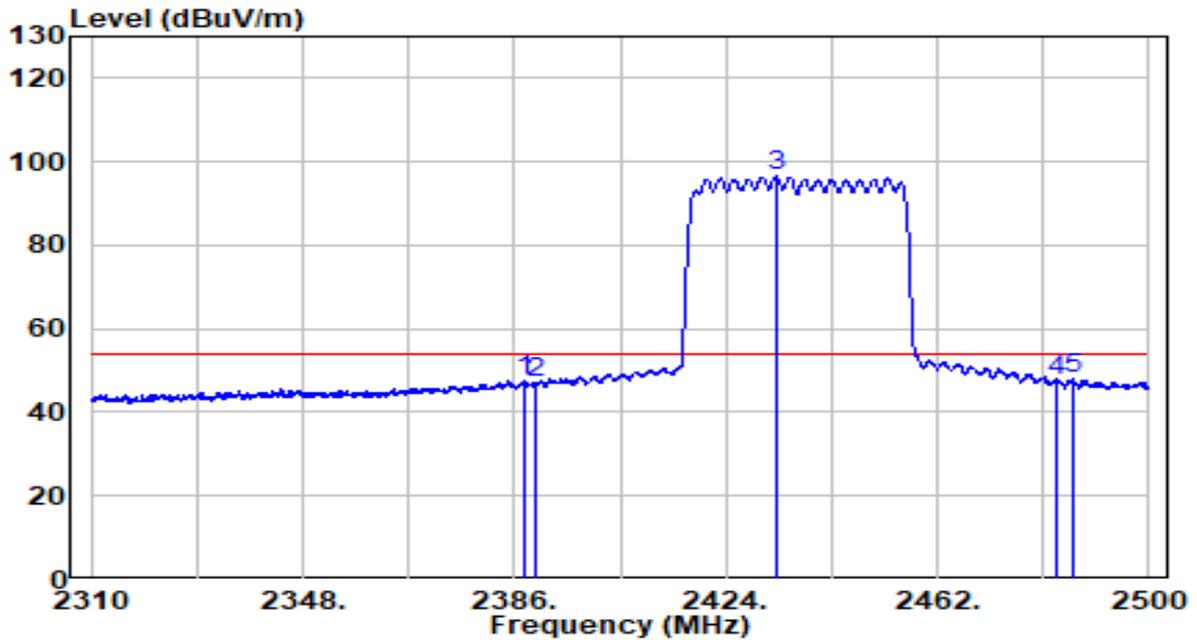


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.995	15.19	32.21	47.40	-6.60	54.00	Average
2	2390.000	14.82	32.22	47.04	-6.96	54.00	Average
3	* 2433.025	64.04	32.40	96.44	N/A	N/A	Average
4	2483.500	14.80	32.61	47.41	-6.59	54.00	Average
5	2486.415	15.45	32.62	48.07	-5.93	54.00	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

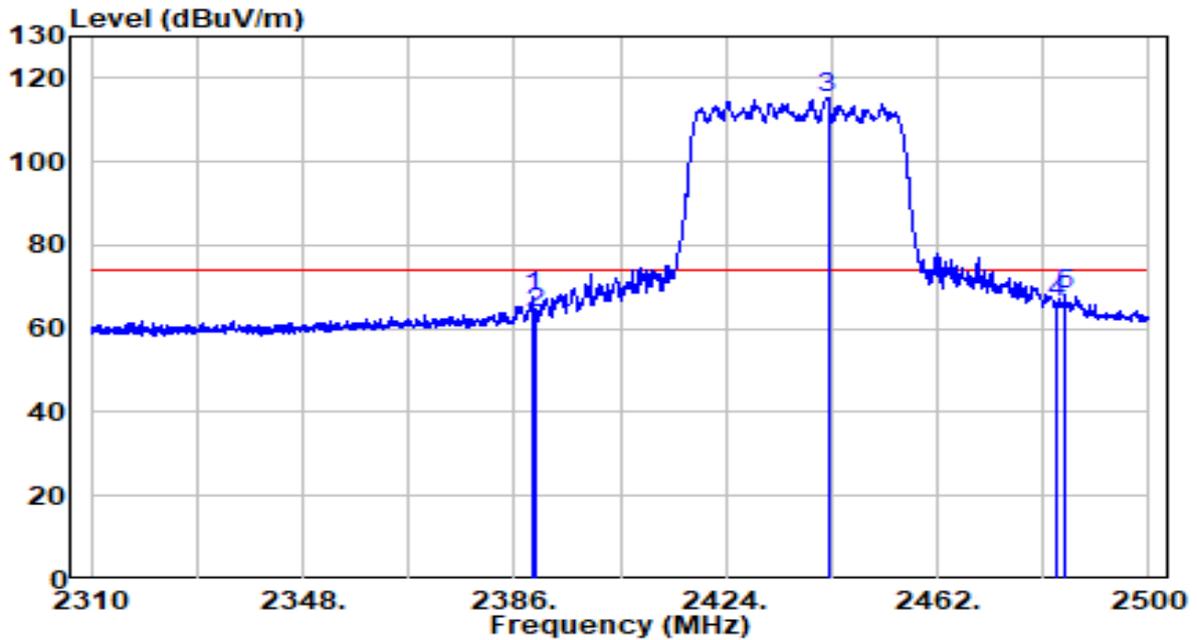


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.230	35.44	32.21	67.66	-6.34	74.00	Peak
2	2390.000	31.37	32.22	63.58	-10.42	74.00	Peak
3	* 2442.335	82.94	32.44	115.38	N/A	N/A	Peak
4	2483.500	33.50	32.61	66.11	-7.89	74.00	Peak
5	2484.800	35.62	32.62	68.24	-5.76	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2437MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

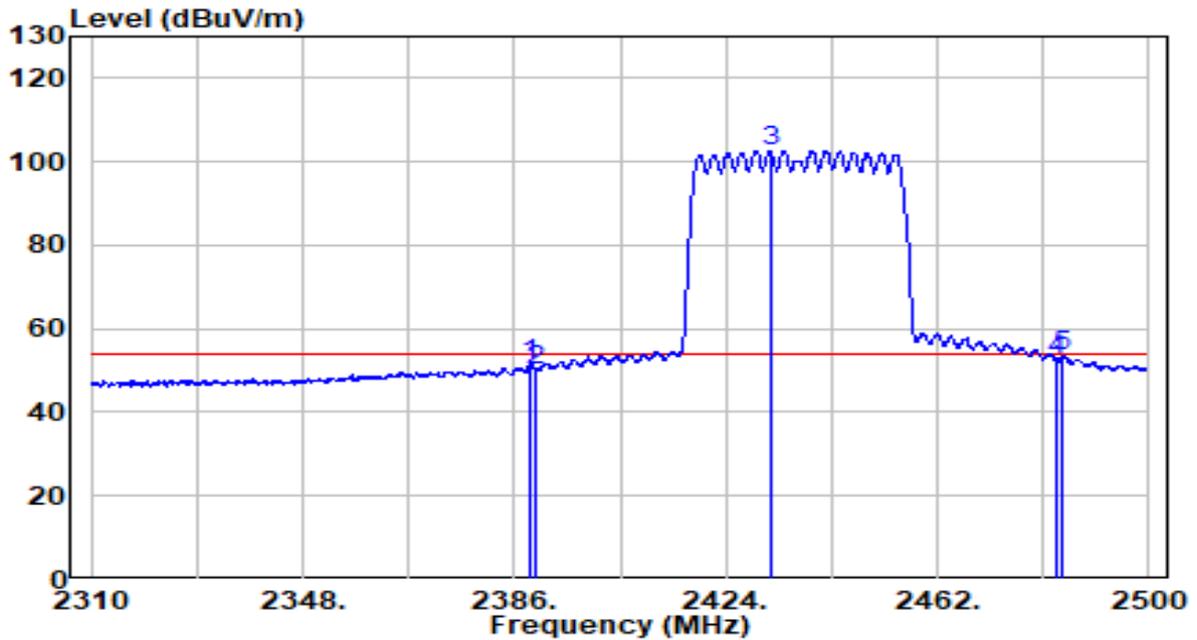


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.040	19.13	32.21	51.35	-2.65	54.00	Average
2	2390.000	18.01	32.22	50.23	-3.77	54.00	Average
3	* 2431.980	70.28	32.39	102.68	N/A	N/A	Average
4	2483.500	19.65	32.61	52.26	-1.74	54.00	Average
5	2484.610	20.80	32.62	53.42	-0.58	54.00	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

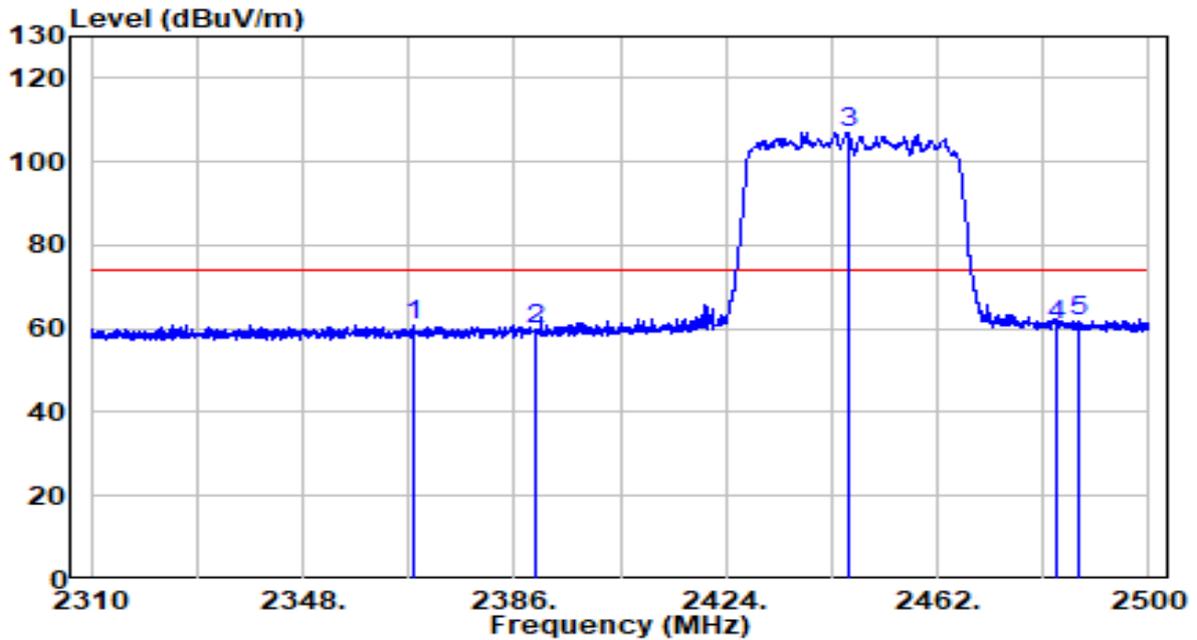


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2368.140	28.86	32.13	60.98	-13.02	74.00	Peak
2	2390.000	27.70	32.22	59.92	-14.08	74.00	Peak
3	* 2445.945	74.65	32.45	107.10	N/A	N/A	Peak
4	2483.500	28.29	32.61	60.90	-13.10	74.00	Peak
5	2487.365	29.41	32.63	62.03	-11.97	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

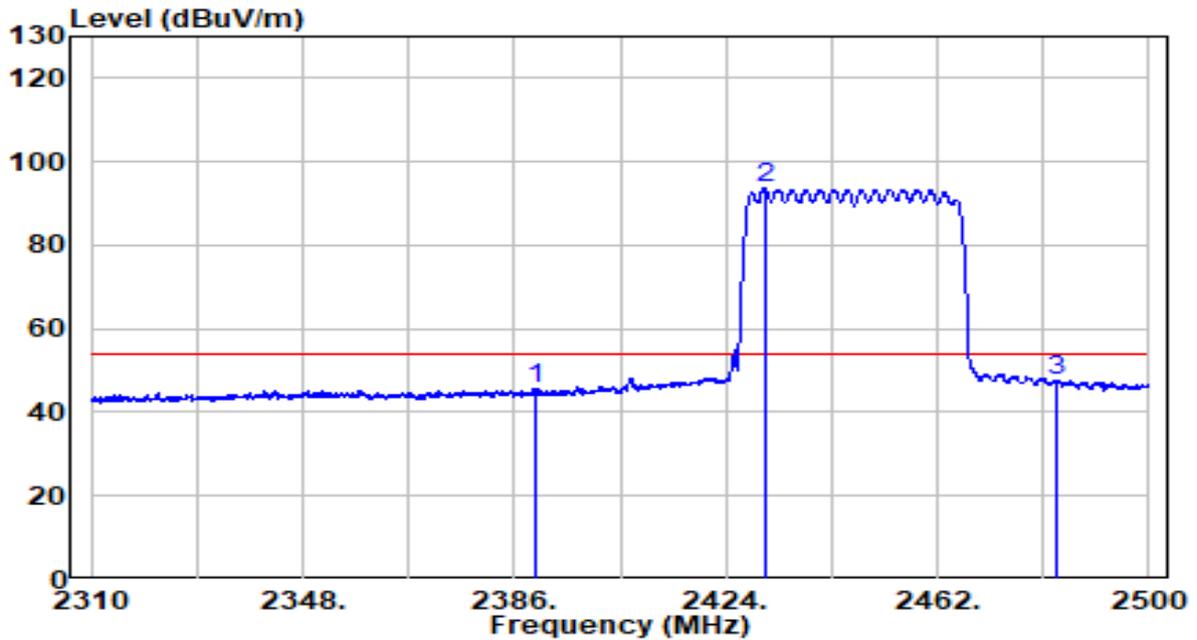


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	13.19	32.22	45.41	-8.59	54.00	Average
2	* 2430.935	61.09	32.39	93.48	N/A	N/A	Average
3	2483.500	15.04	32.61	47.65	-6.35	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

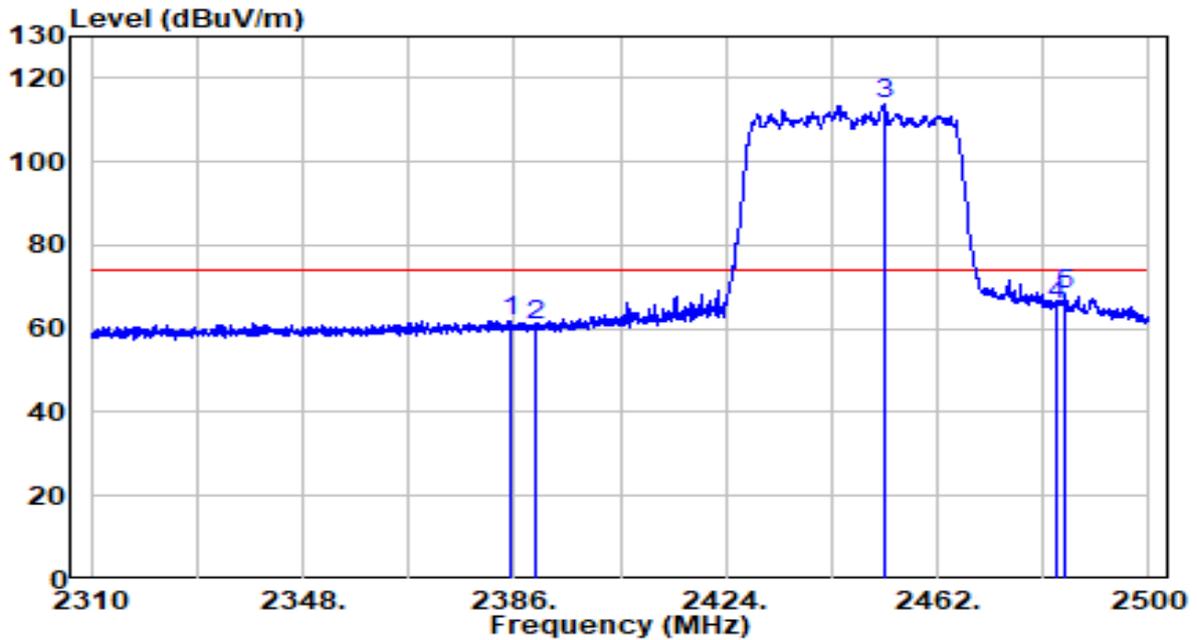


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2385.145	29.60	32.20	61.79	-12.21	74.00	Peak
2	2390.000	28.39	32.22	60.60	-13.40	74.00	Peak
3	* 2452.310	81.12	32.48	113.60	N/A	N/A	Peak
4	2483.500	33.22	32.61	65.83	-8.17	74.00	Peak
5	2484.800	35.52	32.62	68.14	-5.86	74.00	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-24
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	22.9°C/50.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2447MHz by 802.11ax-HE40	Test Voltage	120V / 60Hz

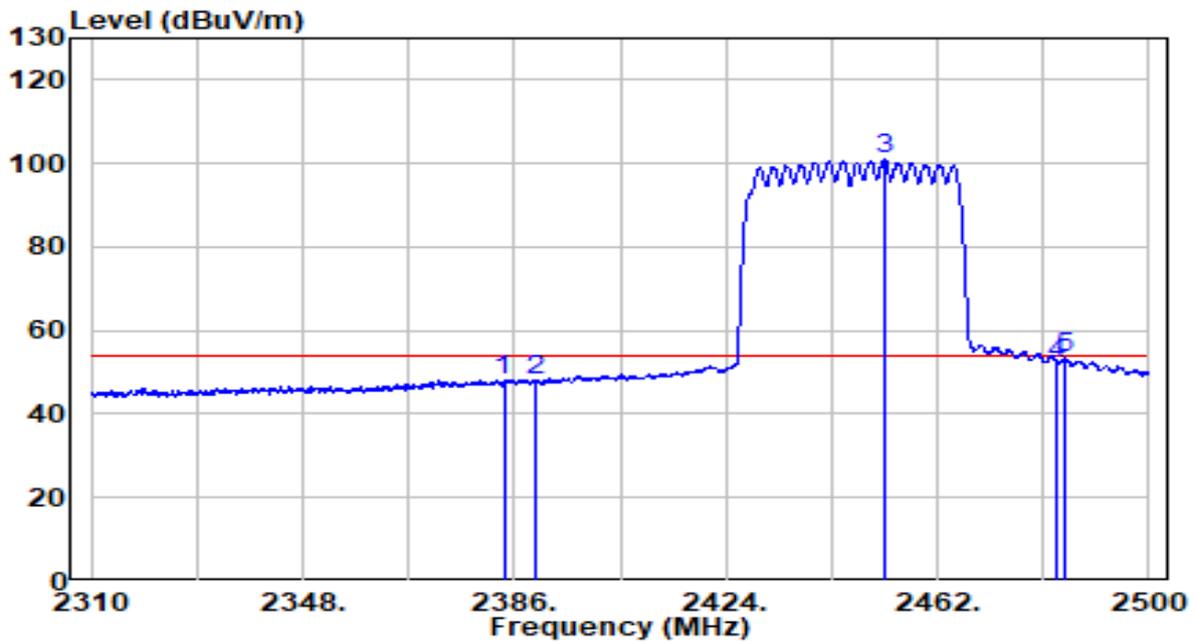


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2384.100	16.03	32.19	48.23	-5.77	54.00	Average
2	2390.000	15.93	32.22	48.15	-5.85	54.00	Average
3	* 2452.405	68.41	32.48	100.89	N/A	N/A	Average
4	2483.500	19.60	32.61	52.22	-1.78	54.00	Average
5	2485.085	20.74	32.62	53.36	-0.64	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

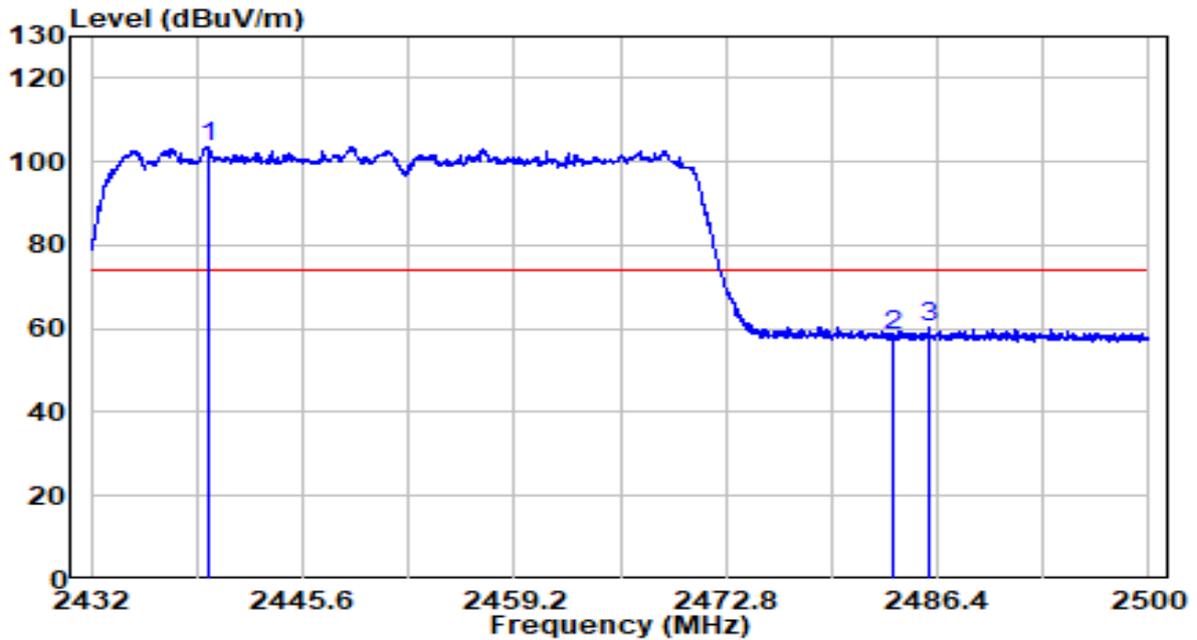


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2439.480	71.03	32.43	103.46	N/A	N/A	Peak
2	2483.500	25.59	32.61	58.20	-15.80	74.00	Peak
3	2485.822	27.77	32.62	60.39	-13.61	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

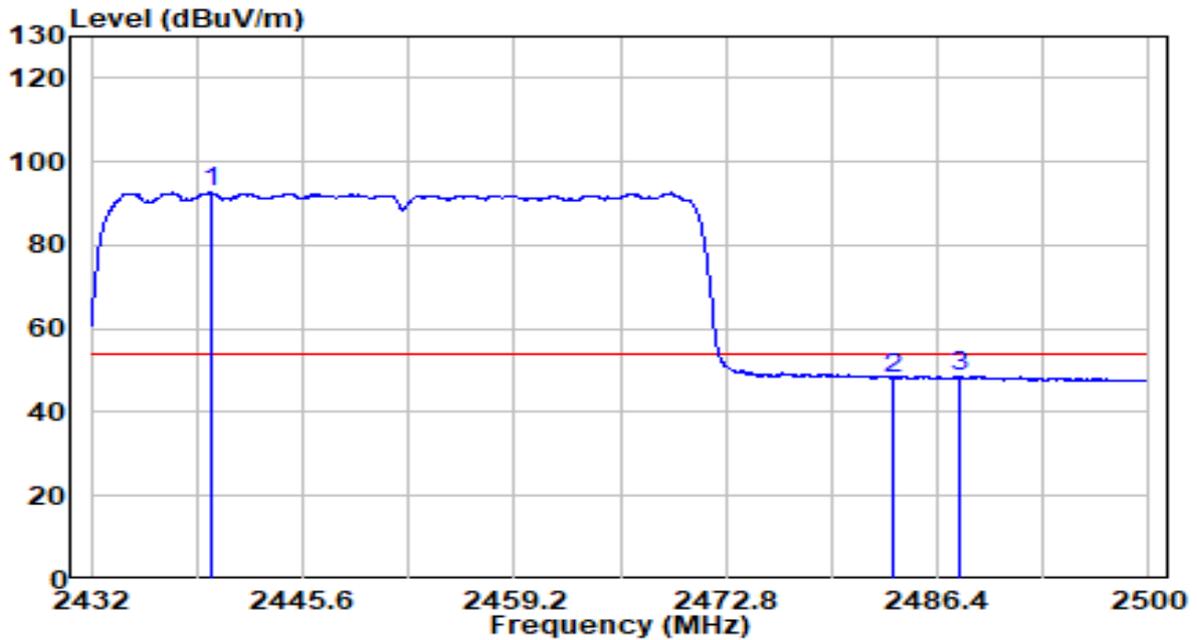


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2439.684	60.08	32.43	92.51	N/A	N/A	Average
2	2483.500	15.68	32.61	48.29	-5.71	54.00	Average
3	2487.896	16.04	32.63	48.67	-5.33	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

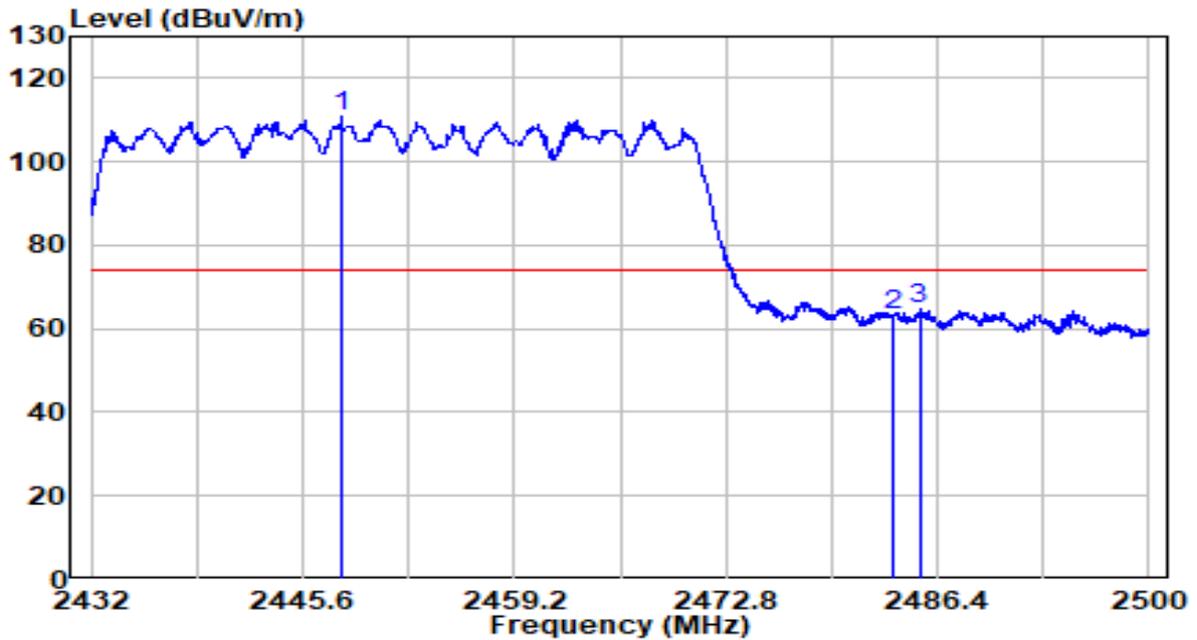


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2448.082	78.62	32.46	111.08	N/A	N/A	Peak
2		2483.500	30.50	32.61	63.11	-10.89	74.00	Peak
3		2485.244	32.09	32.62	64.71	-9.29	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-08
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	23.2°C/47.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2452MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

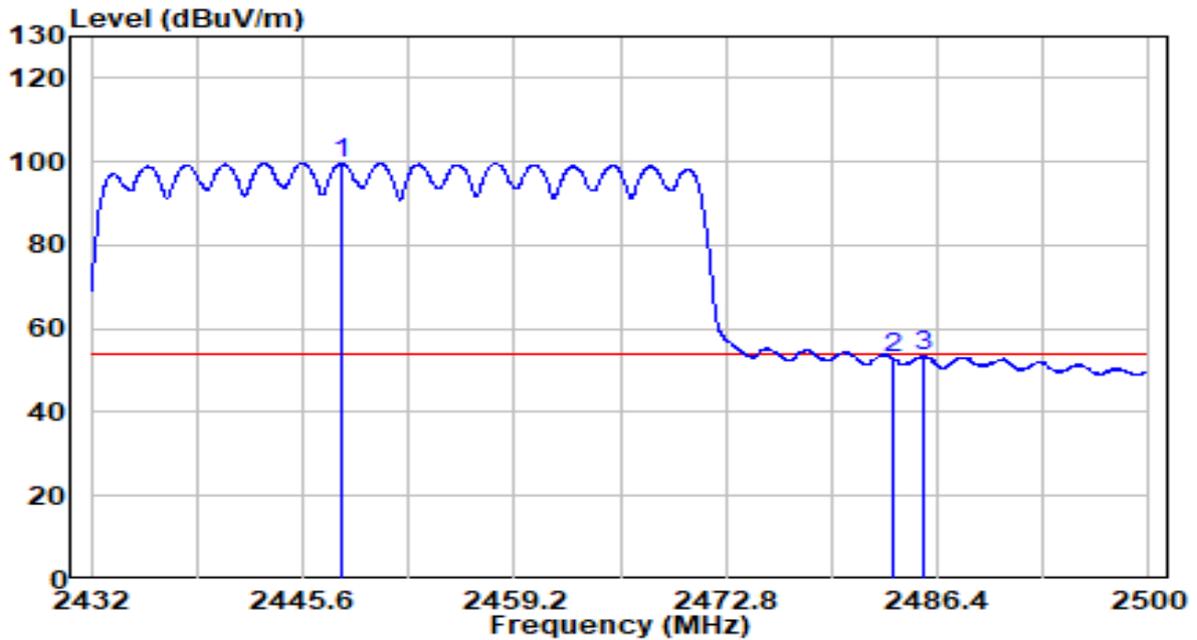

No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2448.048	67.30	32.46	99.76	N/A	N/A	Average
2		2483.500	20.46	32.61	53.07	-0.93	54.00	Average
3		2485.516	20.86	32.62	53.48	-0.52	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

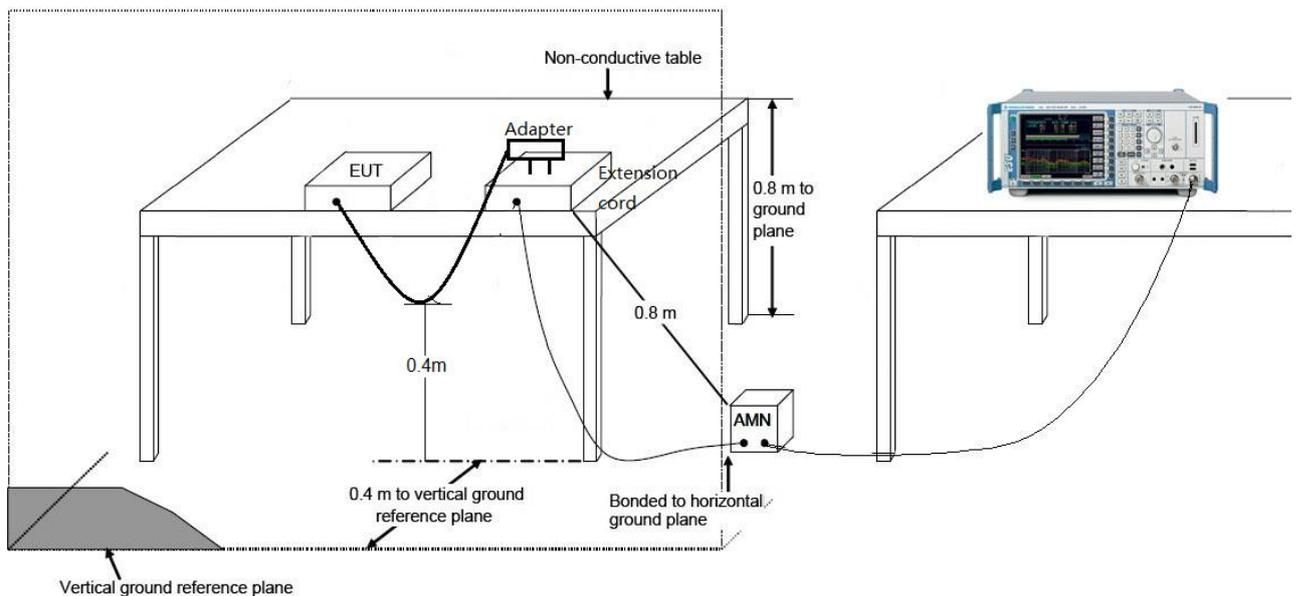

### 7.8.3. Test Result

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-15
Factor	CE_ENV216-L1 (Filter OFF) _2021	Temp. / Humidity	18°C /48%
Polarity	Line1	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11b	Test Voltage	120V/60Hz

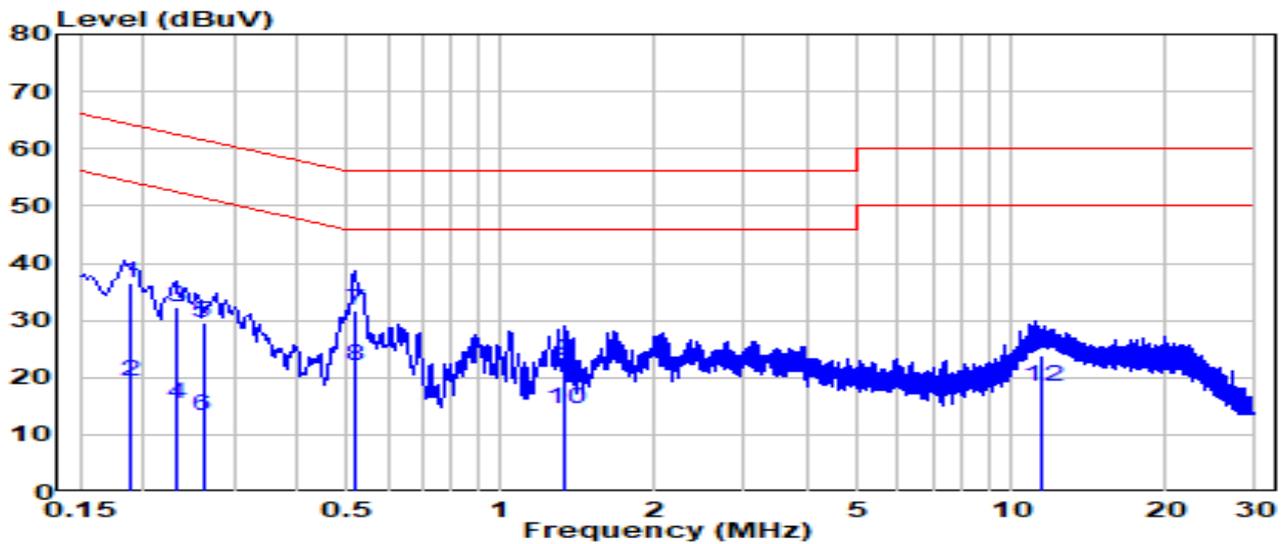


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	0.188	26.80	9.61	36.41	-27.71	64.12	QP
2	0.188	9.80	9.61	19.41	-34.71	54.12	Average
3	0.233	22.80	9.61	32.41	-29.93	62.34	QP
4	0.233	5.80	9.61	15.41	-36.93	52.34	Average
5	0.261	20.10	9.62	29.72	-31.68	61.40	QP
6	0.261	3.70	9.62	13.32	-38.08	51.40	Average
7	0.520	22.20	9.63	31.83	-24.17	56.00	QP
8	*	12.50	9.63	22.13	-23.87	46.00	Average
9	1.327	13.42	9.67	23.09	-32.91	56.00	QP
10	1.327	4.82	9.67	14.49	-31.51	46.00	Average
11	11.512	14.00	9.89	23.89	-36.11	60.00	QP
12	11.512	8.60	9.89	18.49	-31.51	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

EUT	AX3000 Whole Home Mesh Wi-Fi 6 System	Date of Test	2021-12-15
Factor	CE_ENV216-N (Filter OFF) _2021	Temp. / Humidity	18°C /48%
Polarity	Neutral	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 2412MHz by 802.11b	Test Voltage	120V/60Hz

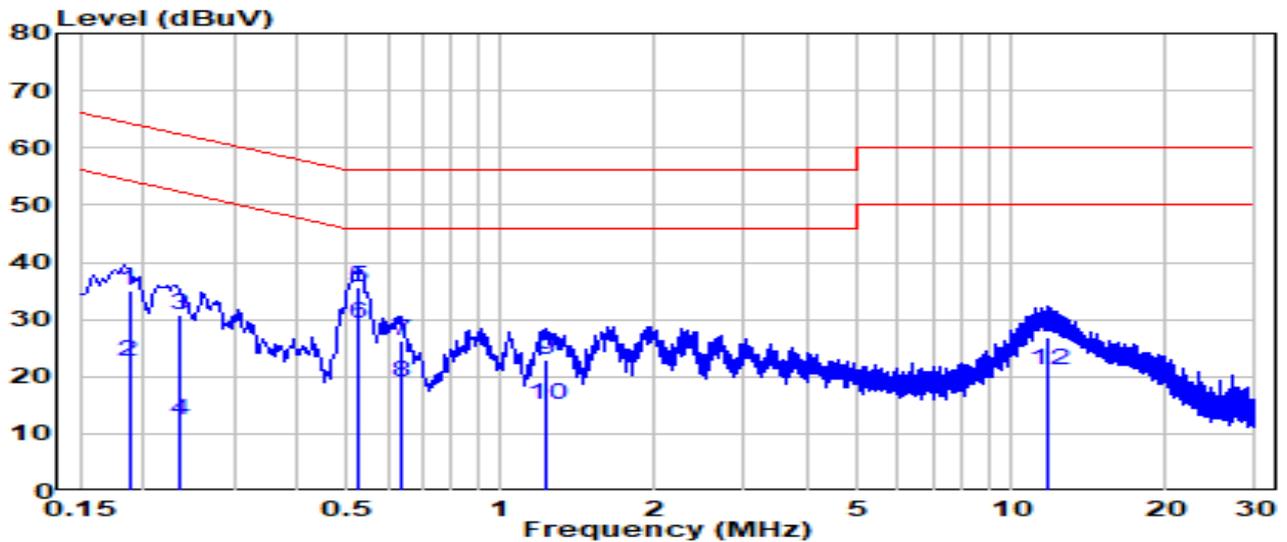

No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	0.187	25.50	9.61	35.11	-29.06	64.17	QP
2	0.187	12.90	9.61	22.51	-31.66	54.17	Average
3	0.235	21.30	9.61	30.91	-31.36	62.27	QP
4	0.235	2.80	9.61	12.41	-39.86	52.27	Average
5	0.527	26.08	9.64	35.72	-20.28	56.00	QP
6	*	19.58	9.64	29.22	-16.78	46.00	Average
7	0.636	16.49	9.64	26.13	-29.87	56.00	QP
8	0.636	9.29	9.64	18.93	-27.07	46.00	Average
9	1.223	13.30	9.67	22.97	-33.03	56.00	QP
10	1.223	5.50	9.67	15.17	-30.83	46.00	Average
11	11.841	16.86	9.92	26.78	-33.22	60.00	QP
12	11.841	11.36	9.92	21.28	-28.72	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dB $\mu$ V) = Reading(dB $\mu$ V) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

————— The End —————

## **Appendix A - Test Setup Photograph**

Refer to "2111TW0005-Setup photo" file.

## **Appendix B - External Photograph**

Refer to "2111TW0005-External photo" file.

## **Appendix C - Internal Photograph**

Refer to "2111TW0005-Internal photo" file.