

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

WIFI2.4G- Horizontal-TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.22.18

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

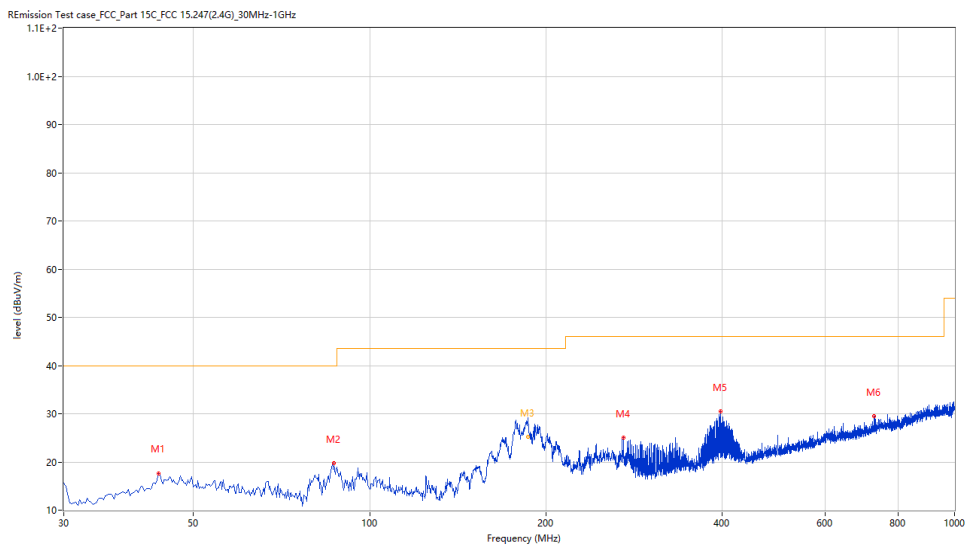

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.577	17.66	-19.75	40.0	-22.34	Peak	360.00	200	Horizontal	Pass
2	86.973	19.78	-23.97	40.0	-20.22	Peak	74.70	200	Horizontal	Pass
3	186.480	29.28	-21.63	43.5	-14.22	Peak	121.60	130	Horizontal	Pass
3*	186.480	25.13	-21.63	43.5	-18.37	QP	121.60	130	Horizontal	Pass
4	271.470	25.03	-18.71	46.0	-20.97	Peak	60.20	100	Horizontal	Pass
5	398.265	30.49	-15.19	46.0	-15.51	Peak	187.40	100	Horizontal	Pass
6	728.953	29.54	-7.51	46.0	-16.46	Peak	360.00	200	Horizontal	Pass

WIFI2.4G-Vertical-TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.14.08

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

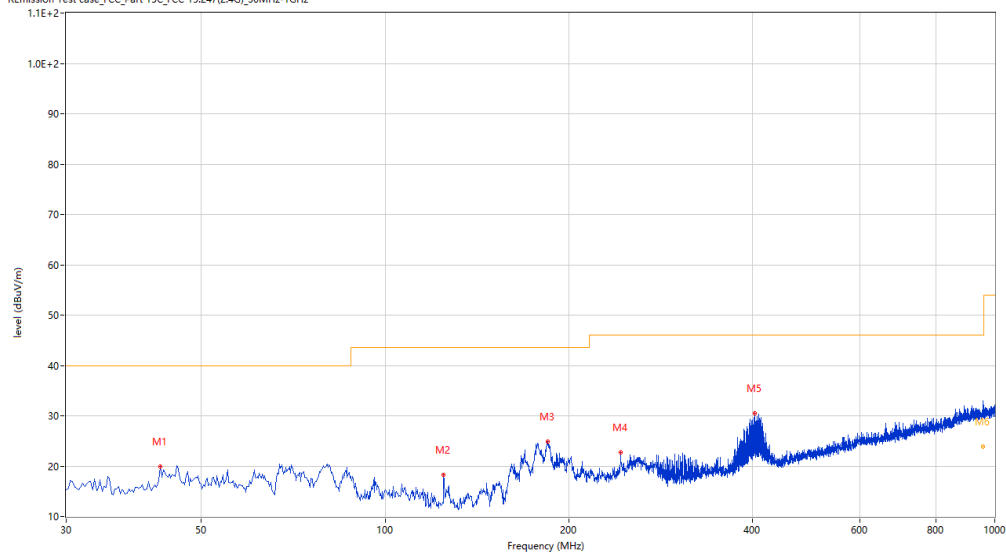

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.849	19.84	-19.88	40.0	-20.16	Peak	293.90	100	Vertical	Pass
2	124.794	18.33	-23.36	43.5	-25.17	Peak	48.90	100	Vertical	Pass
3	184.919	24.86	-21.82	43.5	-18.64	Peak	0.00	200	Vertical	Pass
4	243.589	22.71	-18.99	46.0	-23.29	Peak	0.00	200	Vertical	Pass
5	404.326	30.42	-14.87	46.0	-15.58	Peak	153.90	100	Vertical	Pass
6	956.112	30.33	-3.20	46.0	-15.67	Peak	0.00	173	Vertical	Pass
6*	956.112	23.81	-3.20	46.0	-22.19	QP	0.00	173	Vertical	Pass

1-18G

WIFI2.4G-B- Low channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.16.48

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

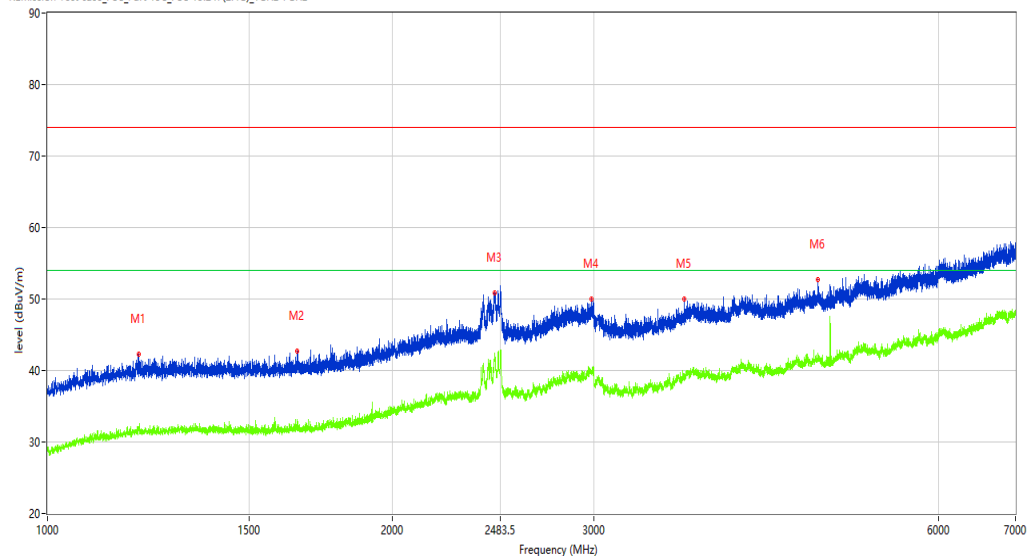

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1201.475	42.31	-13.05	74.0	-31.69	Peak	21.60	100	Horizontal	Pass
1**	1201.475	31.77	-13.05	54.0	-22.23	AV	21.60	100	Horizontal	Pass
2	1652.168	42.65	-13.01	74.0	-31.35	Peak	160.80	100	Horizontal	Pass
2**	1652.168	31.68	-13.01	54.0	-22.32	AV	160.80	100	Horizontal	Pass
3	2458.068	50.89	-3.11	74.0	-23.11	Peak	101.60	100	Horizontal	Pass
3**	2458.068	42.00	-3.11	54.0	-12.00	AV	101.60	100	Horizontal	Pass
4	2983.002	49.99	-3.21	74.0	-24.01	Peak	83.40	100	Horizontal	Pass
4**	2983.002	39.49	-3.21	54.0	-14.51	AV	83.40	100	Horizontal	Pass
5	3596.425	50.02	-2.98	74.0	-23.98	Peak	1.90	100	Horizontal	Pass
5**	3596.425	38.73	-2.98	54.0	-15.27	AV	1.90	100	Horizontal	Pass
6	4707.787	52.67	-0.98	74.0	-21.33	Peak	234.70	100	Horizontal	Pass
6**	4707.787	42.31	-0.98	54.0	-11.69	AV	234.70	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.24.55

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

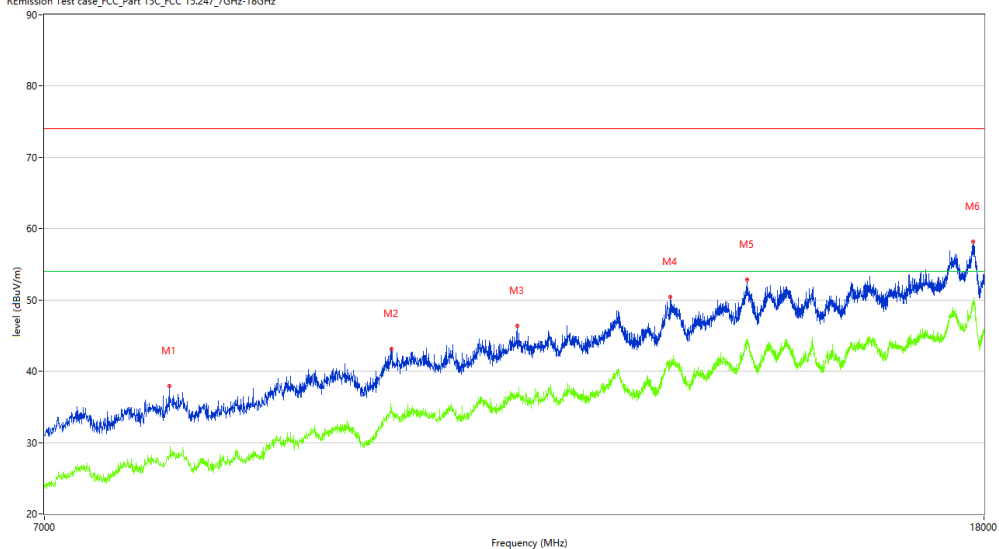

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7934.766	37.90	6.97	74.0	-36.10	Peak	359.60	100	Horizontal	Pass
1**	7934.766	28.19	6.97	54.0	-25.81	AV	359.60	100	Horizontal	Pass
2	9922.519	43.11	13.52	74.0	-30.89	Peak	151.90	100	Horizontal	Pass
2**	9922.519	34.64	13.52	54.0	-19.36	AV	151.90	100	Horizontal	Pass
3	11255.936	46.34	15.30	74.0	-27.66	Peak	278.60	100	Horizontal	Pass
3**	11255.936	36.24	15.30	54.0	-17.76	AV	278.60	100	Horizontal	Pass
4	13136.466	50.41	18.53	74.0	-23.59	Peak	360.00	100	Horizontal	Pass
4**	13136.466	40.75	18.53	54.0	-13.25	AV	360.00	100	Horizontal	Pass
5	14189.453	52.84	22.33	74.0	-21.16	Peak	247.70	100	Horizontal	Pass
5**	14189.453	44.04	22.33	54.0	-9.96	AV	247.70	100	Horizontal	Pass
6	17804.799	58.16	24.91	74.0	-15.84	Peak	224.50	100	Horizontal	Pass
6**	17804.799	49.69	24.91	54.0	-4.31	AV	224.50	100	Horizontal	Pass

WIFI2.4G-B-Low channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.20.21

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

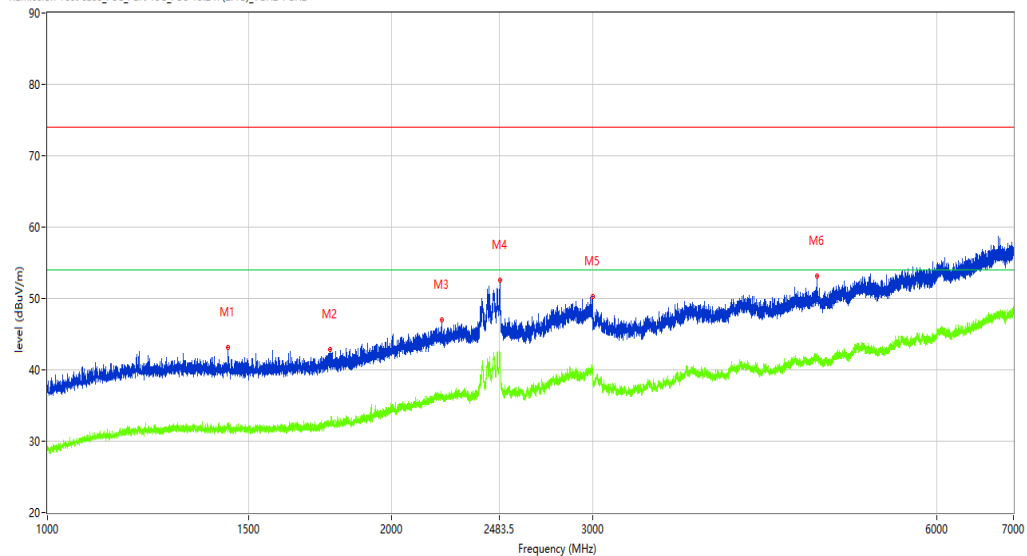

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1437.445	43.16	-12.99	74.0	-30.84	Peak	0.90	100	Vertical	Pass
1**	1437.445	32.52	-12.99	54.0	-21.48	AV	0.90	100	Vertical	Pass
2	1766.654	42.90	-12.38	74.0	-31.10	Peak	139.20	100	Vertical	Pass
2**	1766.654	32.29	-12.38	54.0	-21.71	AV	139.20	100	Vertical	Pass
3	2211.599	47.01	-8.46	74.0	-26.99	Peak	341.20	100	Vertical	Pass
3**	2211.599	36.45	-8.46	54.0	-17.55	AV	341.20	100	Vertical	Pass
4	2488.314	52.61	-2.42	74.0	-21.39	Peak	225.10	100	Vertical	Pass
4**	2488.314	41.87	-2.42	54.0	-12.13	AV	225.10	100	Vertical	Pass
5	2998.500	50.30	-3.09	74.0	-23.70	Peak	327.80	100	Vertical	Pass
5**	2998.500	40.55	-3.09	54.0	-13.45	AV	327.80	100	Vertical	Pass
6	4709.286	53.08	-0.99	74.0	-20.92	Peak	67.60	100	Vertical	Pass
6**	4709.286	42.26	-0.99	54.0	-11.74	AV	67.60	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17:49:51

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8039.240	37.85	8.26	74.0	-36.15	Peak	68.00	100	Vertical	Pass
1**	8039.240	28.30	8.26	54.0	-25.70	AV	68.00	100	Vertical	Pass
2	9416.646	41.59	11.50	74.0	-32.41	Peak	208.50	100	Vertical	Pass
2**	9416.646	32.65	11.50	54.0	-21.35	AV	208.50	100	Vertical	Pass
3	10057.236	43.94	13.08	74.0	-30.06	Peak	227.40	100	Vertical	Pass
3**	10057.236	33.84	13.08	54.0	-20.16	AV	227.40	100	Vertical	Pass
4	11629.843	47.18	14.80	74.0	-26.82	Peak	200.50	100	Vertical	Pass
4**	11629.843	37.61	14.80	54.0	-16.39	AV	200.50	100	Vertical	Pass
5	14192.202	52.31	22.26	74.0	-21.69	Peak	17.30	100	Vertical	Pass
5**	14192.202	44.19	22.26	54.0	-9.81	AV	17.30	100	Vertical	Pass
6	17799.300	57.87	25.06	74.0	-16.13	Peak	25.10	100	Vertical	Pass
6**	17799.300	49.51	25.06	54.0	-4.49	AV	25.10	100	Vertical	Pass

WIFI2.4G-B-Middle channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.29.04

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

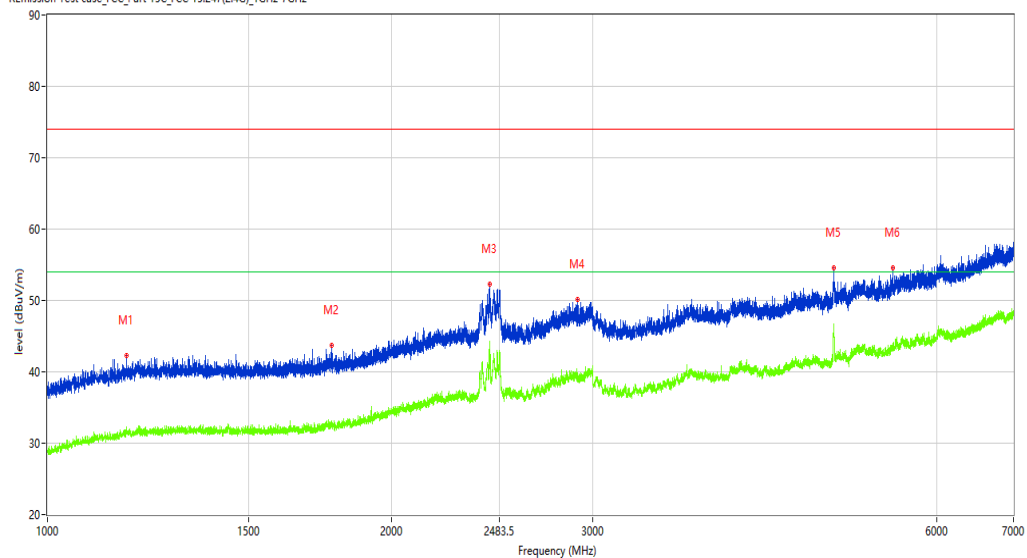

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1173.228	42.27	-12.84	74.0	-31.73	Peak	136.20	100	Horizontal	Pass
1**	1173.228	31.58	-12.84	54.0	-22.42	AV	136.20	100	Horizontal	Pass
2	1771.904	43.77	-12.39	74.0	-30.23	Peak	58.80	100	Horizontal	Pass
2**	1771.904	32.95	-12.39	54.0	-21.05	AV	58.80	100	Horizontal	Pass
3	2437.320	52.23	-3.60	74.0	-21.77	Peak	68.10	100	Horizontal	Pass
3**	2437.320	43.48	-3.60	54.0	-10.52	AV	68.10	100	Horizontal	Pass
4	2907.762	50.14	-4.13	74.0	-23.86	Peak	162.20	100	Horizontal	Pass
4**	2907.762	39.20	-4.13	54.0	-14.80	AV	162.20	100	Horizontal	Pass
5	4873.766	54.58	-0.89	74.0	-19.42	Peak	120.00	100	Horizontal	Pass
5**	4873.766	46.40	-0.89	54.0	-7.60	AV	120.00	100	Horizontal	Pass
6	5491.189	54.64	0.38	74.0	-19.36	Peak	234.30	100	Horizontal	Pass
6**	5491.189	44.04	0.38	54.0	-9.96	AV	234.30	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17:33:12

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

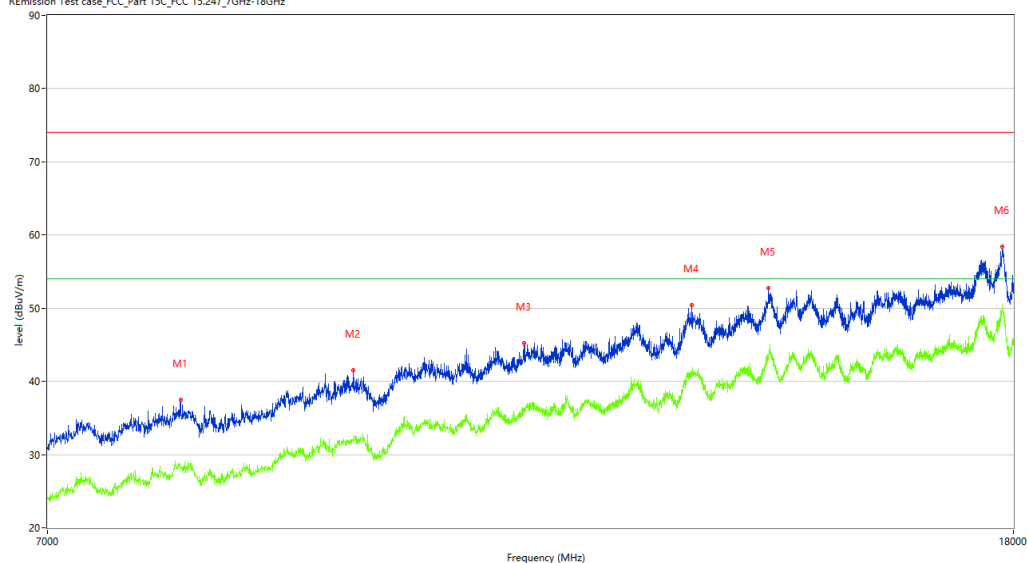

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7973.257	37.45	7.36	74.0	-36.55	Peak	150.10	100	Horizontal	Pass
1**	7973.257	28.50	7.36	54.0	-25.50	AV	150.10	100	Horizontal	Pass
2	9441.390	41.52	11.50	74.0	-32.48	Peak	65.80	100	Horizontal	Pass
2**	9441.390	31.95	11.50	54.0	-22.05	AV	65.80	100	Horizontal	Pass
3	11156.961	45.18	14.16	74.0	-28.82	Peak	89.00	100	Horizontal	Pass
3**	11156.961	36.28	14.16	54.0	-17.72	AV	89.00	100	Horizontal	Pass
4	13141.965	50.46	18.53	74.0	-23.54	Peak	42.70	100	Horizontal	Pass
4**	13141.965	41.21	18.53	54.0	-12.79	AV	42.70	100	Horizontal	Pass
5	14161.960	52.75	21.58	74.0	-21.25	Peak	358.60	100	Horizontal	Pass
5**	14161.960	43.60	21.58	54.0	-10.40	AV	358.60	100	Horizontal	Pass
6	17807.548	58.42	24.83	74.0	-15.58	Peak	142.70	100	Horizontal	Pass
6**	17807.548	49.56	24.83	54.0	-4.44	AV	142.70	100	Horizontal	Pass

WIFI2.4G-B-Middle channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.23.36

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

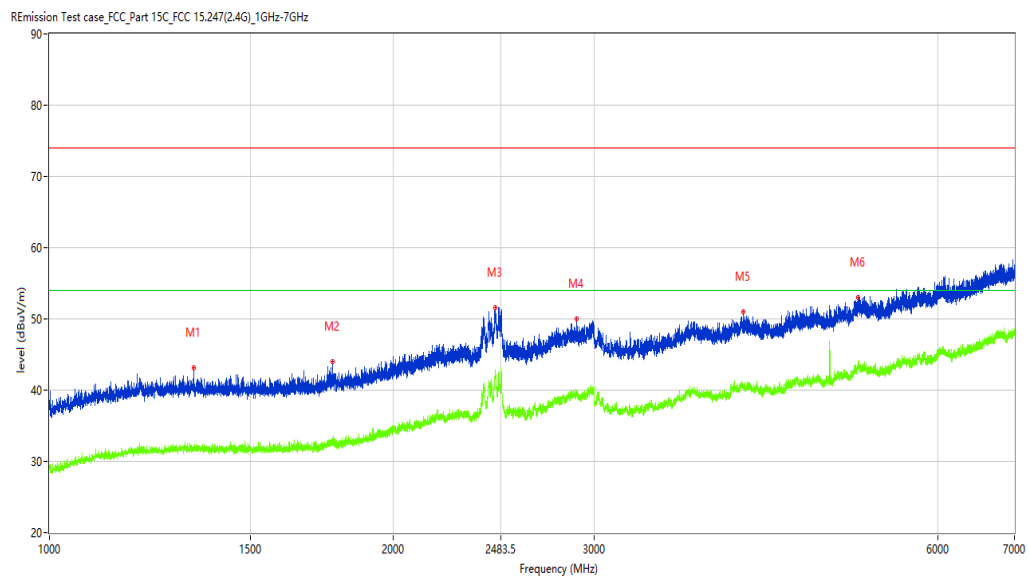

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1338.458	43.15	-13.05	74.0	-30.85	Peak	356.20	100	Vertical	Pass
1**	1338.458	32.17	-13.05	54.0	-21.83	AV	356.20	100	Vertical	Pass
2	1769.904	44.04	-12.39	74.0	-29.96	Peak	73.80	100	Vertical	Pass
2**	1769.904	33.31	-12.39	54.0	-20.69	AV	73.80	100	Vertical	Pass
3	2459.068	51.53	-3.09	74.0	-22.47	Peak	175.00	100	Vertical	Pass
3**	2459.068	41.58	-3.09	54.0	-12.42	AV	175.00	100	Vertical	Pass
4	2893.763	50.05	-4.03	74.0	-23.95	Peak	108.80	100	Vertical	Pass
4**	2893.763	39.50	-4.03	54.0	-14.50	AV	108.80	100	Vertical	Pass
5	4054.868	51.03	-1.37	74.0	-22.97	Peak	154.60	100	Vertical	Pass
5**	4054.868	40.67	-1.37	54.0	-13.33	AV	154.60	100	Vertical	Pass
6	5107.737	52.98	0.34	74.0	-21.02	Peak	0.60	100	Vertical	Pass
6**	5107.737	44.07	0.34	54.0	-9.93	AV	0.60	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.57.51

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8080.480	36.79	7.67	74.0	-37.21	Peak	50.40	100	Vertical	Pass
1**	8080.480	27.55	7.67	54.0	-26.45	AV	50.40	100	Vertical	Pass
2	10136.966	43.62	13.17	74.0	-30.38	Peak	81.60	100	Vertical	Pass
2**	10136.966	34.24	13.17	54.0	-19.76	AV	81.60	100	Vertical	Pass
3	13205.199	49.59	18.51	74.0	-24.41	Peak	168.70	100	Vertical	Pass
3**	13205.199	40.88	18.51	54.0	-13.12	AV	168.70	100	Vertical	Pass
4	14755.811	52.72	21.42	74.0	-21.28	Peak	218.40	100	Vertical	Pass
4**	14755.811	43.73	21.42	54.0	-10.27	AV	218.40	100	Vertical	Pass
5	16034.241	53.45	20.58	74.0	-20.55	Peak	329.90	100	Vertical	Pass
5**	16034.241	44.57	20.58	54.0	-9.43	AV	329.90	100	Vertical	Pass
6	17802.049	58.48	25.00	74.0	-15.52	Peak	115.60	100	Vertical	Pass
6**	17802.049	50.11	25.00	54.0	-3.89	AV	115.60	100	Vertical	Pass

WIFI2.4G-B-High channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.31.25

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

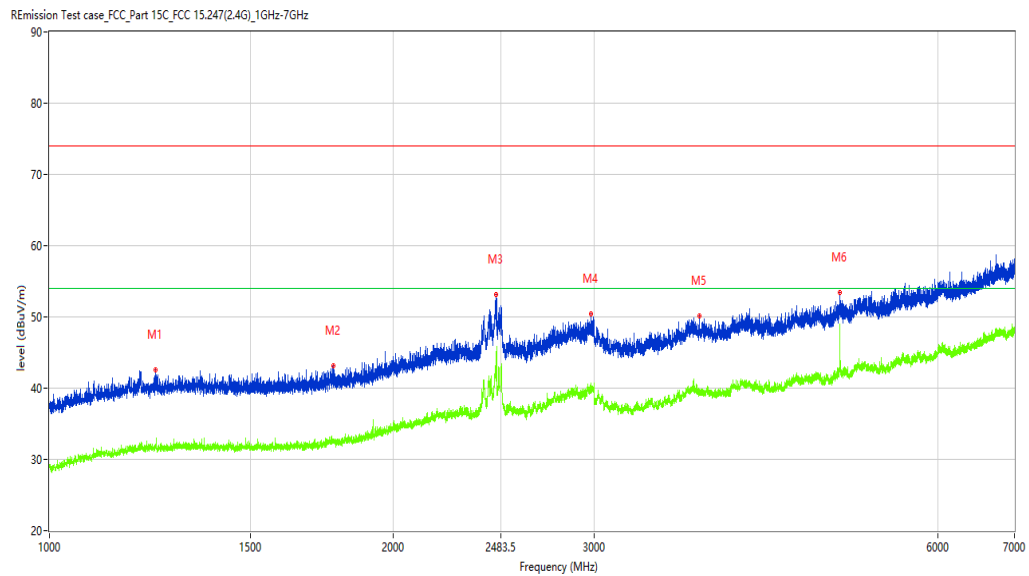

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1239.470	42.54	-13.05	74.0	-31.46	Peak	301.10	100	Horizontal	Pass
1**	1239.470	31.80	-13.05	54.0	-22.20	AV	301.10	100	Horizontal	Pass
2	1772.403	43.09	-12.40	74.0	-30.91	Peak	37.30	100	Horizontal	Pass
2**	1772.403	32.88	-12.40	54.0	-21.12	AV	37.30	100	Horizontal	Pass
3	2462.817	53.08	-2.99	74.0	-20.92	Peak	73.30	100	Horizontal	Pass
3**	2462.817	44.93	-2.99	54.0	-9.07	AV	73.30	100	Horizontal	Pass
4	2981.002	50.36	-3.23	74.0	-23.64	Peak	160.80	100	Horizontal	Pass
4**	2981.002	39.45	-3.23	54.0	-14.55	AV	160.80	100	Horizontal	Pass
5	3708.911	50.12	-2.77	74.0	-23.88	Peak	35.90	100	Horizontal	Pass
5**	3708.911	39.93	-2.77	54.0	-14.07	AV	35.90	100	Horizontal	Pass
6	4923.760	53.40	-0.67	74.0	-20.60	Peak	125.20	100	Horizontal	Pass
6**	4923.760	48.95	-0.67	54.0	-5.05	AV	125.20	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.44.21

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

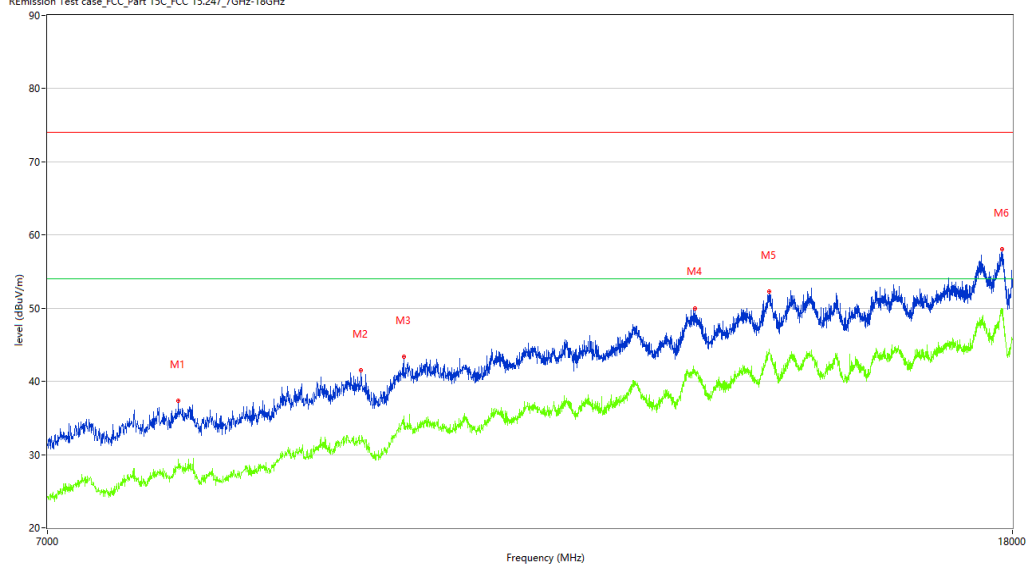

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7956.761	37.32	7.19	74.0	-36.68	Peak	301.60	100	Horizontal	Pass
1**	7956.761	29.40	7.19	54.0	-24.60	AV	301.60	100	Horizontal	Pass
2	9515.621	41.46	11.89	74.0	-32.54	Peak	88.80	100	Horizontal	Pass
2**	9515.621	31.88	11.89	54.0	-22.12	AV	88.80	100	Horizontal	Pass
3	9922.519	43.35	13.52	74.0	-30.65	Peak	88.80	100	Horizontal	Pass
3**	9922.519	35.26	13.52	54.0	-18.74	AV	88.80	100	Horizontal	Pass
4	13196.951	50.01	18.51	74.0	-23.99	Peak	115.30	100	Horizontal	Pass
4**	13196.951	41.19	18.51	54.0	-12.81	AV	115.30	100	Horizontal	Pass
5	14189.453	52.29	22.33	74.0	-21.71	Peak	168.50	100	Horizontal	Pass
5**	14189.453	44.16	22.33	54.0	-9.84	AV	168.50	100	Horizontal	Pass
6	17813.047	58.04	24.67	74.0	-15.96	Peak	1.10	100	Horizontal	Pass
6**	17813.047	50.02	24.67	54.0	-3.98	AV	1.10	100	Horizontal	Pass

WIFI2.4G-B-High channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.34.39

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

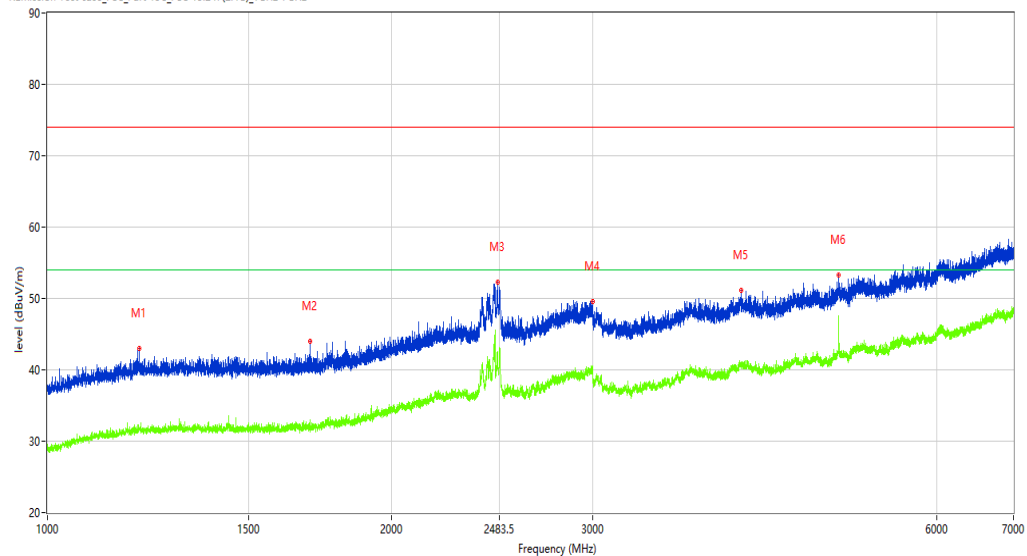

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1202.975	43.02	-13.07	74.0	-30.98	Peak	24.20	100	Vertical	Pass
1**	1202.975	31.89	-13.07	54.0	-22.11	AV	24.20	100	Vertical	Pass
2	1696.163	43.94	-13.15	74.0	-30.06	Peak	218.10	100	Vertical	Pass
2**	1696.163	32.95	-13.15	54.0	-21.05	AV	218.10	100	Vertical	Pass
3	2476.315	52.29	-2.67	74.0	-21.71	Peak	0.00	100	Vertical	Pass
3**	2476.315	41.58	-2.67	54.0	-12.42	AV	0.00	100	Vertical	Pass
4	2998.750	49.60	-3.09	74.0	-24.40	Peak	142.20	100	Vertical	Pass
4**	2998.750	40.01	-3.09	54.0	-13.99	AV	142.20	100	Vertical	Pass
5	4042.870	51.19	-1.50	74.0	-22.81	Peak	302.00	100	Vertical	Pass
5**	4042.870	41.03	-1.50	54.0	-12.97	AV	302.00	100	Vertical	Pass
6	4923.760	53.35	-0.67	74.0	-20.65	Peak	115.90	100	Vertical	Pass
6**	4923.760	47.52	-0.67	54.0	-6.48	AV	115.90	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_18.07.18

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

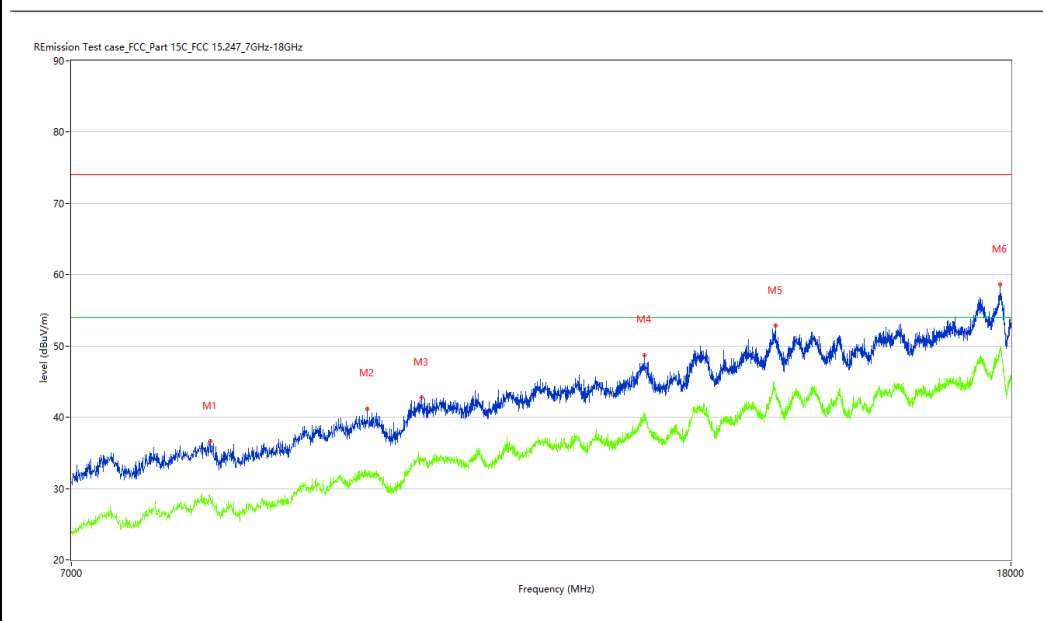

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8047.488	36.68	8.34	74.0	-37.32	Peak	99.60	100	Vertical	Pass
1**	8047.488	28.35	8.34	54.0	-25.65	AV	99.60	100	Vertical	Pass
2	9424.894	41.22	11.49	74.0	-32.78	Peak	168.10	100	Vertical	Pass
2**	9424.894	31.57	11.49	54.0	-22.43	AV	168.10	100	Vertical	Pass
3	9955.511	42.78	13.32	74.0	-31.22	Peak	198.10	100	Vertical	Pass
3**	9955.511	34.12	13.32	54.0	-19.88	AV	198.10	100	Vertical	Pass
4	12451.887	48.75	17.14	74.0	-25.25	Peak	179.60	100	Vertical	Pass
4**	12451.887	40.15	17.14	54.0	-13.85	AV	179.60	100	Vertical	Pass
5	14205.949	52.87	21.94	74.0	-21.13	Peak	213.20	100	Vertical	Pass
5**	14205.949	43.99	21.94	54.0	-10.01	AV	213.20	100	Vertical	Pass
6	17799.300	58.59	25.06	74.0	-15.41	Peak	69.30	100	Vertical	Pass
6**	17799.300	49.76	25.06	54.0	-4.24	AV	69.30	100	Vertical	Pass

WIFI2.4G-G-Low channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.54.48

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

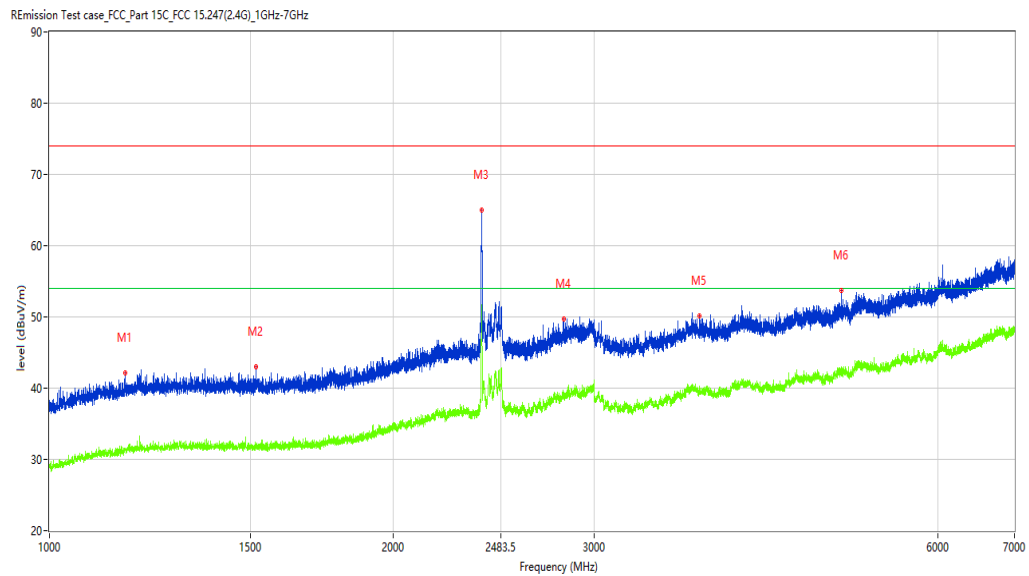

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1164.979	42.19	-13.14	74.0	-31.81	Peak	225.90	100	Horizontal	Pass
1**	1164.979	31.47	-13.14	54.0	-22.53	AV	225.90	100	Horizontal	Pass
2	1515.936	42.99	-13.24	74.0	-31.01	Peak	154.50	100	Horizontal	Pass
2**	1515.936	31.73	-13.24	54.0	-22.27	AV	154.50	100	Horizontal	Pass
3	2391.076	65.05	-6.02	74.0	-8.95	Peak	60.00	100	Horizontal	Pass
3**	2391.076	50.77	-6.02	54.0	-3.23	AV	60.00	100	Horizontal	Pass
4	2821.022	49.67	-4.75	74.0	-24.33	Peak	83.40	100	Horizontal	Pass
4**	2821.022	38.98	-4.75	54.0	-15.02	AV	83.40	100	Horizontal	Pass
5	3711.411	50.15	-2.76	74.0	-23.85	Peak	360.00	100	Horizontal	Pass
5**	3711.411	39.82	-2.76	54.0	-14.18	AV	360.00	100	Horizontal	Pass
6	4936.758	53.66	-0.58	74.0	-20.34	Peak	333.60	100	Horizontal	Pass
6**	4936.758	42.93	-0.58	54.0	-11.07	AV	333.60	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.27.47

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

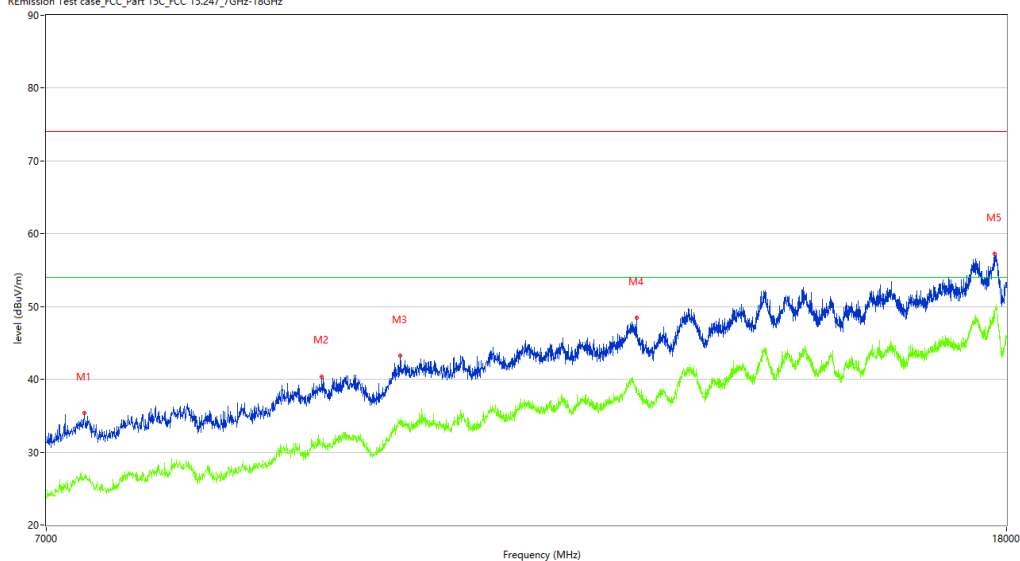

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7269.433	35.34	5.74	74.0	-38.66	Peak	102.10	100	Horizontal	Pass
1**	7269.433	26.37	5.74	54.0	-27.63	AV	102.10	100	Horizontal	Pass
2	9180.205	40.40	10.65	74.0	-33.60	Peak	17.40	100	Horizontal	Pass
2**	9180.205	31.50	10.65	54.0	-22.50	AV	17.40	100	Horizontal	Pass
3	9917.021	43.27	13.55	74.0	-30.73	Peak	167.80	100	Horizontal	Pass
3**	9917.021	34.29	13.55	54.0	-19.71	AV	167.80	100	Horizontal	Pass
4	12506.873	48.42	16.25	74.0	-25.58	Peak	160.10	100	Horizontal	Pass
4**	12506.873	38.89	16.25	54.0	-15.11	AV	160.10	100	Horizontal	Pass
5	17788.303	57.26	25.09	74.0	-16.74	Peak	121.50	100	Horizontal	Pass
5**	17788.303	48.58	25.09	54.0	-5.42	AV	121.50	100	Horizontal	Pass

WIFI2.4G-G-Low channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.48.54

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

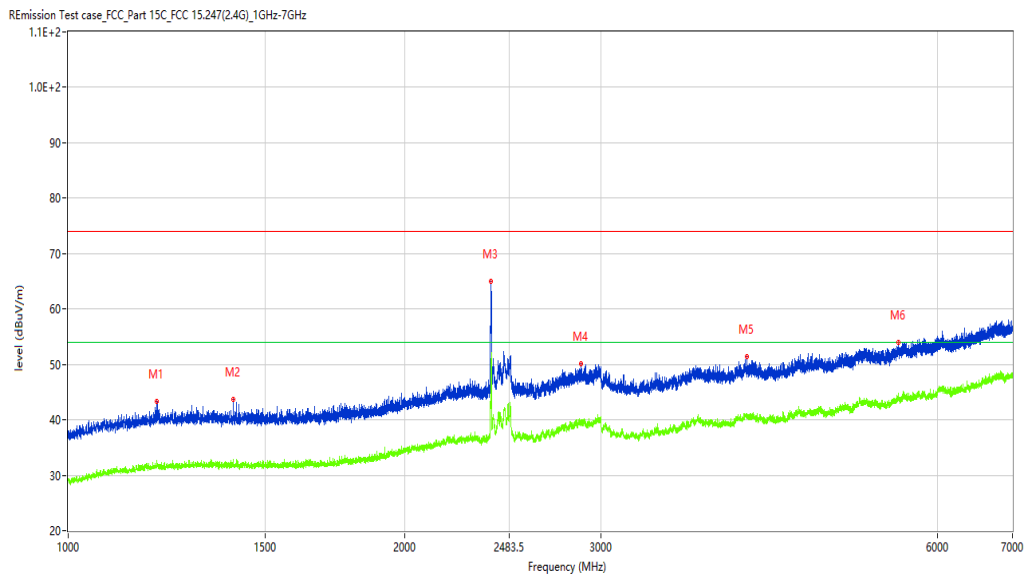

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.475	43.31	-13.01	74.0	-30.69	Peak	29.50	100	Vertical	Pass
1**	1199.475	32.65	-13.01	54.0	-21.35	AV	29.50	100	Vertical	Pass
2	1405.199	43.68	-13.08	74.0	-30.32	Peak	124.40	100	Vertical	Pass
2**	1405.199	32.19	-13.08	54.0	-21.81	AV	124.40	100	Vertical	Pass
3	2390.076	65.04	-6.43	74.0	-8.96	Peak	24.30	100	Vertical	Pass
3**	2390.076	50.19	-6.43	54.0	-3.81	AV	24.30	100	Vertical	Pass
4	2879.265	50.15	-4.00	74.0	-23.85	Peak	238.30	100	Vertical	Pass
4**	2879.265	39.93	-4.00	54.0	-14.07	AV	238.30	100	Vertical	Pass
5	4050.369	51.43	-1.42	74.0	-22.57	Peak	322.50	100	Vertical	Pass
5**	4050.369	40.68	-1.42	54.0	-13.32	AV	322.50	100	Vertical	Pass
6	5536.683	53.95	0.50	74.0	-20.05	Peak	155.80	100	Vertical	Pass
6**	5536.683	44.76	0.50	54.0	-9.24	AV	155.80	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.51.29

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8421.395	37.03	7.25	74.0	-36.97	Peak	132.00	100	Vertical	Pass
1**	8421.395	27.82	7.25	54.0	-26.18	AV	132.00	100	Vertical	Pass
2	10527.368	44.09	13.31	74.0	-29.91	Peak	243.80	100	Vertical	Pass
2**	10527.368	34.54	13.31	54.0	-19.46	AV	243.80	100	Vertical	Pass
3	12427.143	48.42	17.04	74.0	-25.58	Peak	167.20	100	Vertical	Pass
3**	12427.143	38.87	17.04	54.0	-15.13	AV	167.20	100	Vertical	Pass
4	14186.703	53.15	22.33	74.0	-20.85	Peak	190.10	100	Vertical	Pass
4**	14186.703	44.62	22.33	54.0	-9.38	AV	190.10	100	Vertical	Pass
5	16069.983	53.62	20.49	74.0	-20.38	Peak	63.10	100	Vertical	Pass
5**	16069.983	46.29	20.49	54.0	-7.71	AV	63.10	100	Vertical	Pass
6	17804.799	57.26	24.91	74.0	-16.74	Peak	39.70	100	Vertical	Pass
6**	17804.799	49.89	24.91	54.0	-4.11	AV	39.70	100	Vertical	Pass

WIFI2.4G-G-Middle channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16.57.09

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

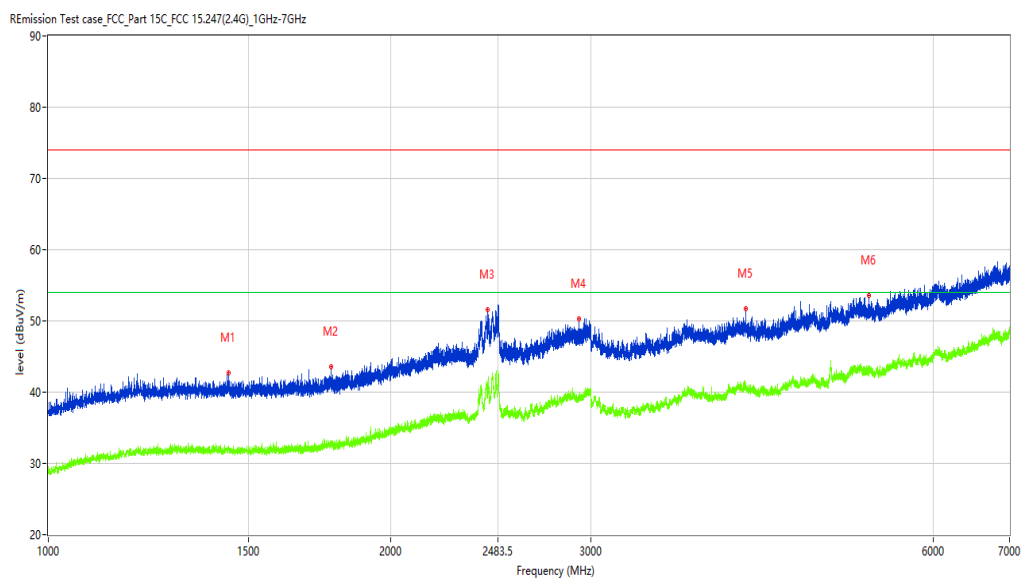

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.195	42.73	-13.03	74.0	-31.27	Peak	339.60	100	Horizontal	Pass
1**	1440.195	32.16	-13.03	54.0	-21.84	AV	339.60	100	Horizontal	Pass
2	1772.903	43.53	-12.40	74.0	-30.47	Peak	86.50	100	Horizontal	Pass
2**	1772.903	33.12	-12.40	54.0	-20.88	AV	86.50	100	Horizontal	Pass
3	2433.321	51.58	-3.69	74.0	-22.42	Peak	325.50	100	Horizontal	Pass
3**	2433.321	41.18	-3.69	54.0	-12.82	AV	325.50	100	Horizontal	Pass
4	2926.509	50.25	-4.34	74.0	-23.75	Peak	104.30	100	Horizontal	Pass
4**	2926.509	39.46	-4.34	54.0	-14.54	AV	104.30	100	Horizontal	Pass
5	4103.362	51.77	-1.54	74.0	-22.23	Peak	244.70	100	Horizontal	Pass
5**	4103.362	40.81	-1.54	54.0	-13.19	AV	244.70	100	Horizontal	Pass
6	5262.717	53.55	-0.19	74.0	-20.45	Peak	271.10	100	Horizontal	Pass
6**	5262.717	42.46	-0.19	54.0	-11.54	AV	271.10	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.35.52

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8006.248	37.45	7.72	74.0	-36.55	Peak	54.50	100	Horizontal	Pass
1**	8006.248	27.78	7.72	54.0	-26.22	AV	54.50	100	Horizontal	Pass
2	9380.905	41.84	11.47	74.0	-32.16	Peak	261.40	100	Horizontal	Pass
2**	9380.905	31.59	11.47	54.0	-22.41	AV	261.40	100	Horizontal	Pass
3	10090.227	43.53	13.21	74.0	-30.47	Peak	234.60	100	Horizontal	Pass
3**	10090.227	33.65	13.21	54.0	-20.35	AV	234.60	100	Horizontal	Pass
4	11258.685	45.80	15.33	74.0	-28.20	Peak	13.10	100	Horizontal	Pass
4**	11258.685	36.53	15.33	54.0	-17.47	AV	13.10	100	Horizontal	Pass
5	14186.703	52.32	22.33	74.0	-21.68	Peak	354.90	100	Horizontal	Pass
5**	14186.703	44.77	22.33	54.0	-9.23	AV	354.90	100	Horizontal	Pass
6	17818.545	57.97	24.50	74.0	-16.03	Peak	23.90	100	Horizontal	Pass
6**	17818.545	50.02	24.50	54.0	-3.98	AV	23.90	100	Horizontal	Pass

WIFI2.4G-G-Middle channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_16:59:29

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

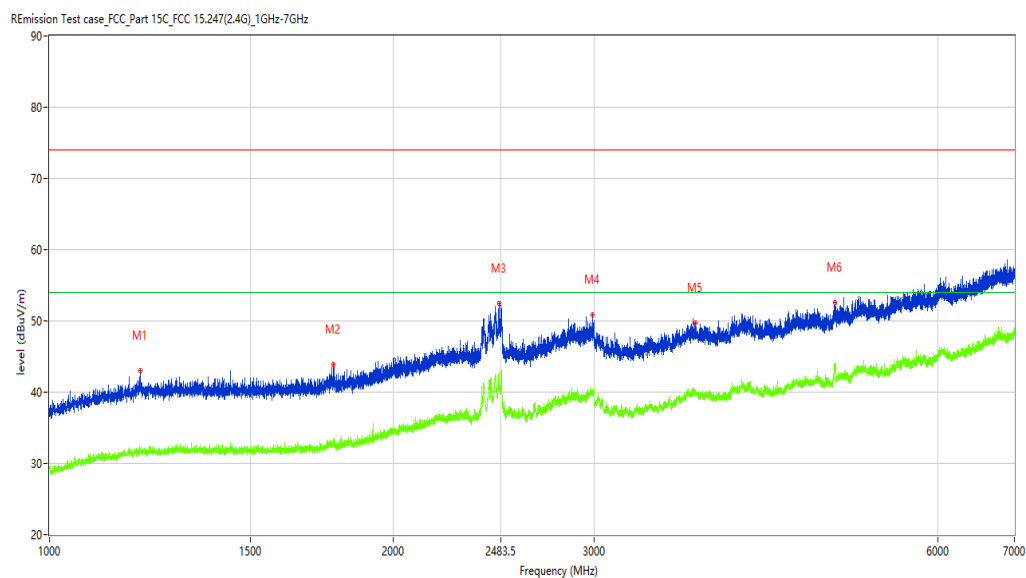

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1200.475	42.96	-13.03	74.0	-31.04	Peak	26.80	100	Vertical	Pass
1**	1200.475	31.70	-13.03	54.0	-22.30	AV	26.80	100	Vertical	Pass
2	1771.654	43.92	-12.39	74.0	-30.08	Peak	53.30	100	Vertical	Pass
2**	1771.654	33.33	-12.39	54.0	-20.67	AV	53.30	100	Vertical	Pass
3	2477.065	52.36	-2.65	74.0	-21.64	Peak	232.30	100	Vertical	Pass
3**	2477.065	41.84	-2.65	54.0	-12.16	AV	232.30	100	Vertical	Pass
4	2989.251	50.84	-3.16	74.0	-23.16	Peak	219.60	100	Vertical	Pass
4**	2989.251	40.24	-3.16	54.0	-13.76	AV	219.60	100	Vertical	Pass
5	3677.915	49.70	-2.62	74.0	-24.30	Peak	22.10	100	Vertical	Pass
5**	3677.915	39.64	-2.62	54.0	-14.36	AV	22.10	100	Vertical	Pass
6	4875.766	52.63	-0.88	74.0	-21.37	Peak	104.80	100	Vertical	Pass
6**	4875.766	43.02	-0.88	54.0	-10.98	AV	104.80	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_18.00.14

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8377.406	37.37	7.57	74.0	-36.63	Peak	358.50	100	Vertical	Pass
1**	8377.406	28.19	7.57	54.0	-25.81	AV	358.50	100	Vertical	Pass
2	10125.969	43.87	13.25	74.0	-30.13	Peak	217.90	100	Vertical	Pass
2**	10125.969	35.59	13.25	54.0	-18.41	AV	217.90	100	Vertical	Pass
3	11646.338	45.95	14.83	74.0	-28.05	Peak	354.90	100	Vertical	Pass
3**	11646.338	36.90	14.83	54.0	-17.10	AV	354.90	100	Vertical	Pass
4	12443.639	48.35	17.11	74.0	-25.65	Peak	13.10	100	Vertical	Pass
4**	12443.639	39.94	17.11	54.0	-14.06	AV	13.10	100	Vertical	Pass
5	14189.453	52.11	22.33	74.0	-21.89	Peak	358.50	100	Vertical	Pass
5**	14189.453	44.01	22.33	54.0	-9.99	AV	358.50	100	Vertical	Pass
6	17802.049	57.77	25.00	74.0	-16.23	Peak	5.40	100	Vertical	Pass
6**	17802.049	49.73	25.00	54.0	-4.27	AV	5.40	100	Vertical	Pass

WIFI2.4G-G-High channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17.19.48

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

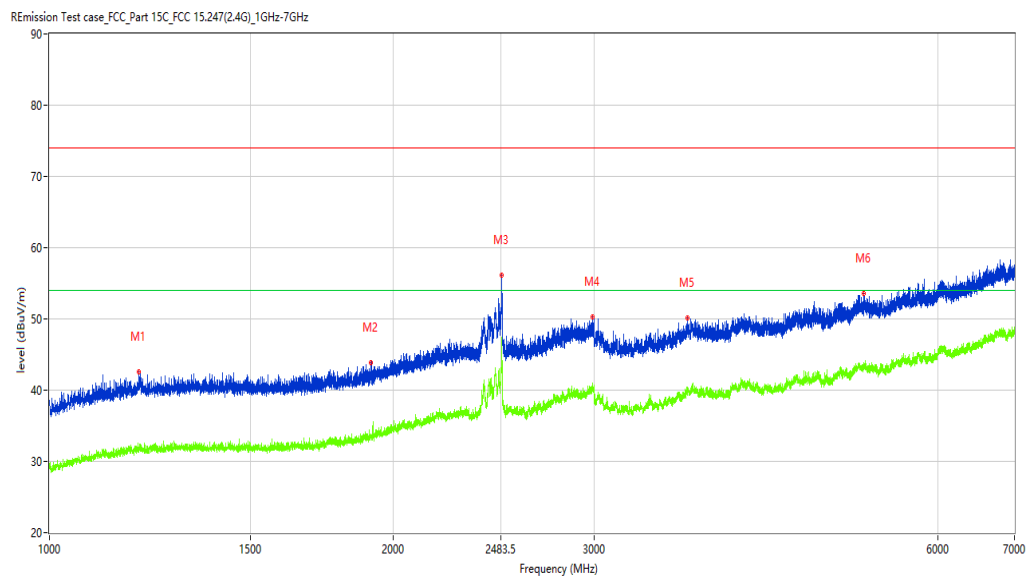

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.725	42.54	-12.99	74.0	-31.46	Peak	21.80	100	Horizontal	Pass
1**	1197.725	31.47	-12.99	54.0	-22.53	AV	21.80	100	Horizontal	Pass
2	1913.386	43.88	-11.58	74.0	-30.12	Peak	109.60	100	Horizontal	Pass
2**	1913.386	33.85	-11.58	54.0	-20.15	AV	109.60	100	Horizontal	Pass
3	2490.064	56.18	-2.54	74.0	-17.82	Peak	65.30	100	Horizontal	Pass
3**	2490.064	47.43	-2.54	54.0	-6.57	AV	65.30	100	Horizontal	Pass
4	2991.501	50.27	-3.14	74.0	-23.73	Peak	60.90	100	Horizontal	Pass
4**	2991.501	40.25	-3.14	54.0	-13.75	AV	60.90	100	Horizontal	Pass
5	3622.922	50.07	-2.34	74.0	-23.93	Peak	2.60	100	Horizontal	Pass
5**	3622.922	40.29	-2.34	54.0	-13.71	AV	2.60	100	Horizontal	Pass
6	5168.729	53.59	0.24	74.0	-20.41	Peak	13.70	100	Horizontal	Pass
6**	5168.729	43.28	0.24	54.0	-10.72	AV	13.70	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.46.09

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7241.940	32.86	5.65	74.0	-41.14	Peak	169.00	100	Horizontal	Pass
1**	7241.940	26.40	5.65	54.0	-27.60	AV	169.00	100	Horizontal	Pass
2	7976.006	37.16	7.39	74.0	-36.84	Peak	69.20	100	Horizontal	Pass
2**	7976.006	28.28	7.39	54.0	-25.72	AV	69.20	100	Horizontal	Pass
3	12457.386	48.66	17.17	74.0	-25.34	Peak	42.30	100	Horizontal	Pass
3**	12457.386	40.53	17.17	54.0	-13.47	AV	42.30	100	Horizontal	Pass
4	14777.806	53.10	21.33	74.0	-20.90	Peak	138.40	100	Horizontal	Pass
4**	14777.806	43.69	21.33	54.0	-10.31	AV	138.40	100	Horizontal	Pass
5	17461.135	56.92	24.94	74.0	-17.08	Peak	268.10	100	Horizontal	Pass
5**	17461.135	48.38	24.94	54.0	-5.62	AV	268.10	100	Horizontal	Pass
6	17821.295	57.51	24.42	74.0	-16.49	Peak	207.30	100	Horizontal	Pass
6**	17821.295	49.81	24.42	54.0	-4.19	AV	207.30	100	Horizontal	Pass

WIFI2.4G-G-High channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17.17.12

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

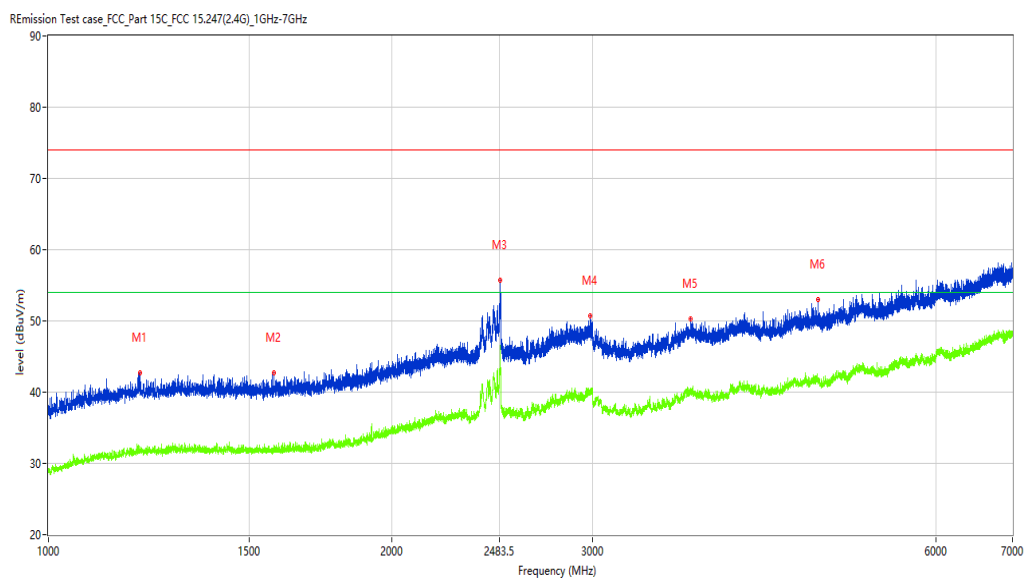

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1202.225	42.76	-13.06	74.0	-31.24	Peak	9.40	100	Vertical	Pass
1**	1202.225	32.00	-13.06	54.0	-22.00	AV	9.40	100	Vertical	Pass
2	1575.428	42.67	-13.18	74.0	-31.33	Peak	149.30	100	Vertical	Pass
2**	1575.428	31.92	-13.18	54.0	-22.08	AV	149.30	100	Vertical	Pass
3	2489.814	55.78	-2.38	74.0	-18.22	Peak	64.80	100	Vertical	Pass
3**	2489.814	46.60	-2.38	54.0	-7.40	AV	64.80	100	Vertical	Pass
4	2986.252	50.69	-3.18	74.0	-23.31	Peak	260.50	100	Vertical	Pass
4**	2986.252	39.71	-3.18	54.0	-14.29	AV	260.50	100	Vertical	Pass
5	3654.918	50.23	-2.28	74.0	-23.77	Peak	257.40	100	Vertical	Pass
5**	3654.918	40.12	-2.28	54.0	-13.88	AV	257.40	100	Vertical	Pass
6	4730.284	53.04	-1.16	74.0	-20.96	Peak	5.50	100	Vertical	Pass
6**	4730.284	41.54	-1.16	54.0	-12.46	AV	5.50	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_18.08.53

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Lim it (dBuV/m)	Over Lim it (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7959.510	37.59	7.22	74.0	-36.41	Peak	281.70	100	Vertical	Pass
1**	7959.510	28.59	7.22	54.0	-25.41	AV	281.70	100	Vertical	Pass
2	9152.712	40.65	10.86	74.0	-33.35	Peak	274.30	100	Vertical	Pass
2**	9152.712	31.39	10.86	54.0	-22.61	AV	274.30	100	Vertical	Pass
3	11638.090	46.33	14.82	74.0	-27.67	Peak	250.80	100	Vertical	Pass
3**	11638.090	37.17	14.82	54.0	-16.83	AV	250.80	100	Vertical	Pass
4	14156.461	52.55	21.42	74.0	-21.45	Peak	254.50	100	Vertical	Pass
4**	14156.461	43.38	21.42	54.0	-10.62	AV	254.50	100	Vertical	Pass
5	16056.236	53.20	20.52	74.0	-20.80	Peak	173.60	100	Vertical	Pass
5**	16056.236	44.60	20.52	54.0	-9.40	AV	173.60	100	Vertical	Pass
6	17804.799	58.09	24.91	74.0	-15.91	Peak	212.20	100	Vertical	Pass
6**	17804.799	49.27	24.91	54.0	-4.73	AV	212.20	100	Vertical	Pass

WIFI2.4G-N-Low channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17:30:54

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

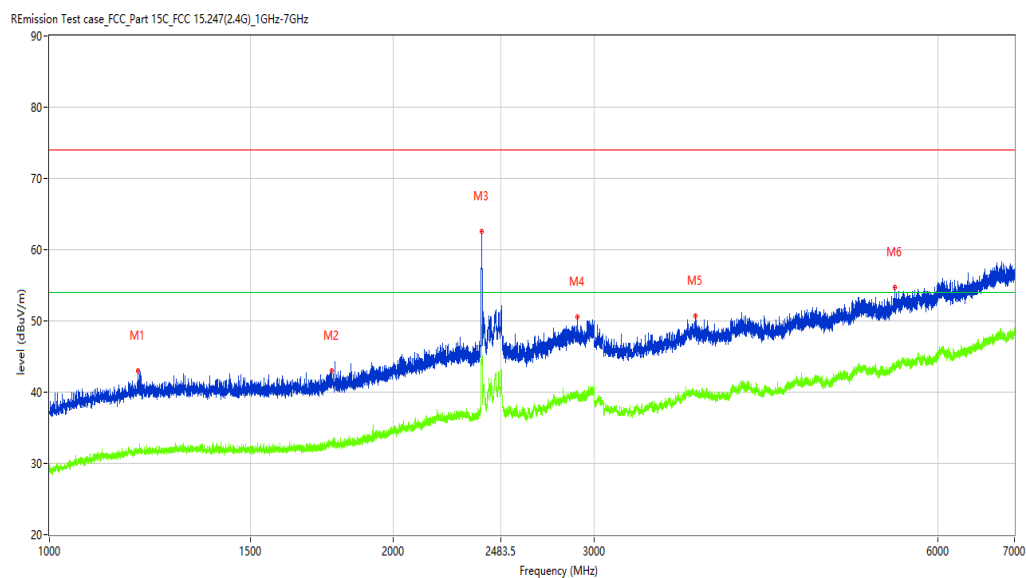

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.976	43.07	-12.99	74.0	-30.93	Peak	60.80	100	Horizontal	Pass
1**	1194.976	31.95	-12.99	54.0	-22.05	AV	60.80	100	Horizontal	Pass
2	1768.154	42.97	-12.38	74.0	-31.03	Peak	223.80	100	Horizontal	Pass
2**	1768.154	32.55	-12.38	54.0	-21.45	AV	223.80	100	Horizontal	Pass
3	2392.076	62.58	-4.59	74.0	-11.42	Peak	18.70	100	Horizontal	Pass
3**	2392.076	48.26	-4.59	54.0	-5.74	AV	18.70	100	Horizontal	Pass
4	2899.763	50.53	-4.04	74.0	-23.47	Peak	277.90	100	Horizontal	Pass
4**	2899.763	40.24	-4.04	54.0	-13.76	AV	277.90	100	Horizontal	Pass
5	3677.915	50.78	-2.62	74.0	-23.22	Peak	64.70	100	Horizontal	Pass
5**	3677.915	39.97	-2.62	54.0	-14.03	AV	64.70	100	Horizontal	Pass
6	5498.688	54.71	0.49	74.0	-19.29	Peak	338.50	100	Horizontal	Pass
6**	5498.688	44.02	0.49	54.0	-9.98	AV	338.50	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.29.53

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9411.147	41.48	11.51	74.0	-32.52	Peak	321.00	100	Horizontal	Pass
1**	9411.147	31.86	11.51	54.0	-22.14	AV	321.00	100	Horizontal	Pass
2	11679.330	46.45	14.87	74.0	-27.55	Peak	305.50	100	Horizontal	Pass
2**	11679.330	37.35	14.87	54.0	-16.65	AV	305.50	100	Horizontal	Pass
3	14159.210	52.37	21.50	74.0	-21.63	Peak	1.40	100	Horizontal	Pass
3**	14159.210	44.06	21.50	54.0	-9.94	AV	1.40	100	Horizontal	Pass
4	14747.563	53.85	21.32	74.0	-20.15	Peak	316.90	100	Horizontal	Pass
4**	14747.563	44.66	21.32	54.0	-9.34	AV	316.90	100	Horizontal	Pass
5	17419.895	57.66	24.54	74.0	-16.34	Peak	127.90	100	Horizontal	Pass
5**	17419.895	48.25	24.54	54.0	-5.75	AV	127.90	100	Horizontal	Pass
6	17802.049	57.45	25.00	74.0	-16.55	Peak	5.40	100	Horizontal	Pass
6**	17802.049	49.26	25.00	54.0	-4.74	AV	5.40	100	Horizontal	Pass

WIFI2.4G-N-Low channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_18.05.46

Vertical: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

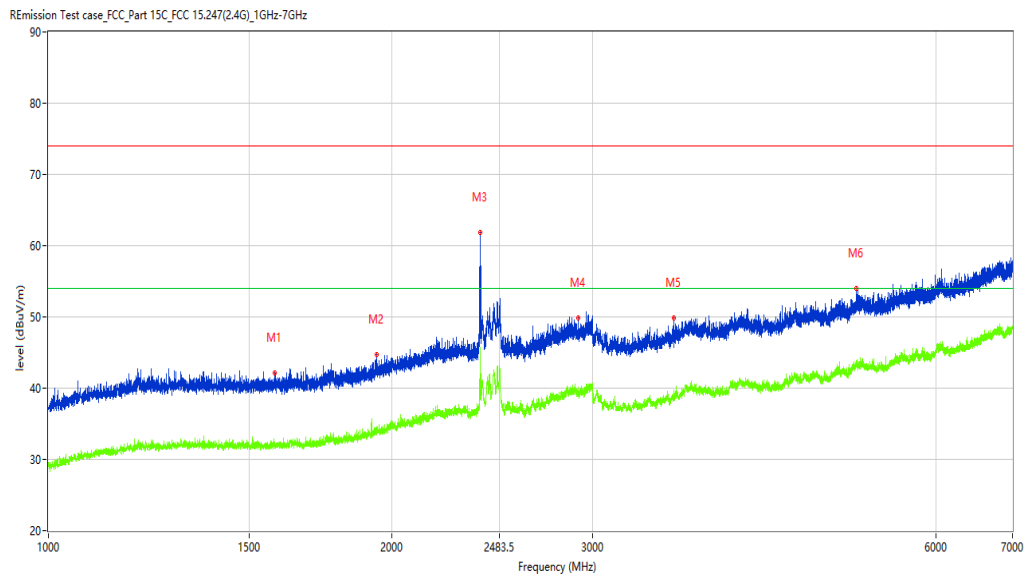

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1577.928	42.11	-13.20	74.0	-31.89	Peak	225.60	100		Pass
1**	1577.928	32.13	-13.20	54.0	-21.87	AV	225.60	100	Vertical	Pass
2	1939.383	44.66	-11.15	74.0	-29.34	Peak	30.90	100	Vertical	Pass
2**	1939.383	34.26	-11.15	54.0	-19.74	AV	30.90	100	Vertical	Pass
3	2392.076	61.84	-4.59	74.0	-12.16	Peak	62.90	100	Vertical	Pass
3**	2392.076	45.75	-4.59	54.0	-8.25	AV	62.90	100	Vertical	Pass
4	2914.511	49.86	-4.20	74.0	-24.14	Peak	107.60	100	Vertical	Pass
4**	2914.511	40.17	-4.20	54.0	-13.83	AV	107.60	100	Vertical	Pass
5	3535.433	49.83	-3.26	74.0	-24.17	Peak	137.90	100	Vertical	Pass
5**	3535.433	39.78	-3.26	54.0	-14.22	AV	137.90	100	Vertical	Pass
6	5105.237	53.94	0.33	74.0	-20.06	Peak	184.10	100	Vertical	Pass
6**	5105.237	43.52	0.33	54.0	-10.48	AV	184.10	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.54.28

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

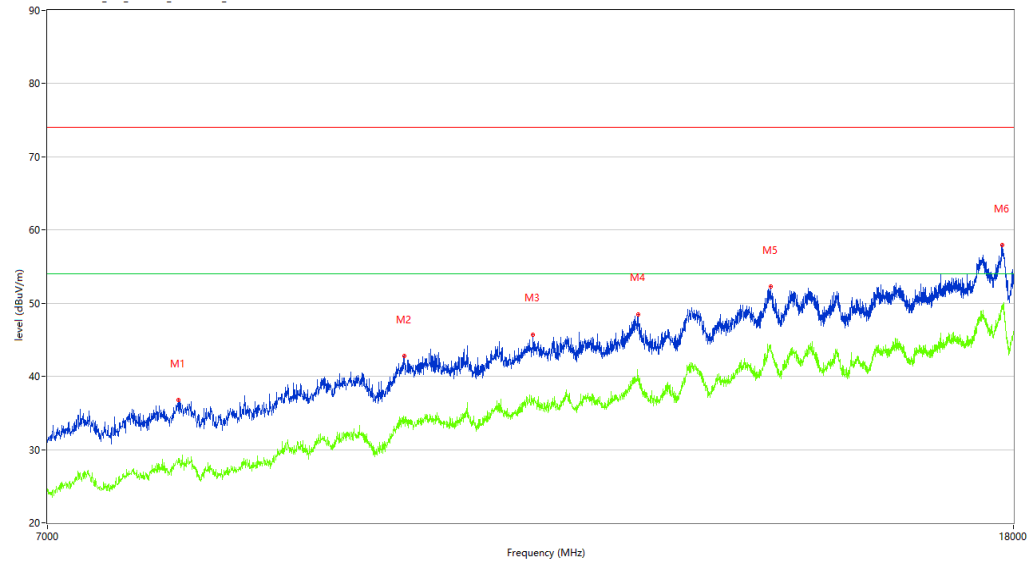

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7954.011	36.81	7.17	74.0	-37.19	Peak	124.50	100	Vertical	Pass
1**	7954.011	28.16	7.17	54.0	-25.84	AV	124.50	100	Vertical	Pass
2	9925.269	42.74	13.50	74.0	-31.26	Peak	32.50	100	Vertical	Pass
2**	9925.269	33.88	13.50	54.0	-20.12	AV	32.50	100	Vertical	Pass
3	11253.187	45.74	15.26	74.0	-28.26	Peak	55.30	100	Vertical	Pass
3**	11253.187	36.55	15.26	54.0	-17.45	AV	55.30	100	Vertical	Pass
4	12473.882	48.51	17.02	74.0	-25.49	Peak	344.40	100	Vertical	Pass
4**	12473.882	39.29	17.02	54.0	-14.71	AV	344.40	100	Vertical	Pass
5	14194.951	52.25	22.20	74.0	-21.75	Peak	317.90	100	Vertical	Pass
5**	14194.951	44.19	22.20	54.0	-9.81	AV	317.90	100	Vertical	Pass
6	17802.049	57.95	25.00	74.0	-16.05	Peak	166.50	100	Vertical	Pass
6**	17802.049	49.71	25.00	54.0	-4.29	AV	166.50	100	Vertical	Pass

WIFI2.4G-N-Middle channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17.33.11

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

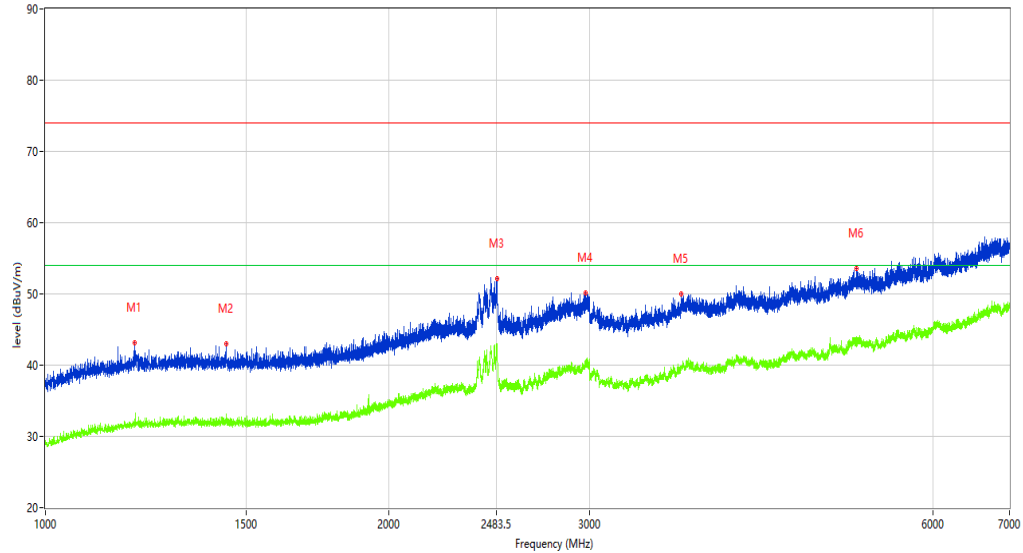

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.975	43.17	-12.99	74.0	-30.83	Peak	38.40	100	Horizontal	Pass
1**	1197.975	32.46	-12.99	54.0	-21.54	AV	38.40	100	Horizontal	Pass
2	1439.695	42.95	-13.02	74.0	-31.05	Peak	338.70	100	Horizontal	Pass
2**	1439.695	33.14	-13.02	54.0	-20.86	AV	338.70	100	Horizontal	Pass
3	2487.064	52.16	-2.44	74.0	-21.84	Peak	215.60	100	Horizontal	Pass
3**	2487.064	42.84	-2.44	54.0	-11.16	AV	215.60	100	Horizontal	Pass
4	2973.503	50.12	-3.31	74.0	-23.88	Peak	0.00	100	Horizontal	Pass
4**	2973.503	39.92	-3.31	54.0	-14.08	AV	0.00	100	Horizontal	Pass
5	3609.924	49.97	-2.71	74.0	-24.03	Peak	359.50	100	Horizontal	Pass
5**	3609.924	39.61	-2.71	54.0	-14.39	AV	359.50	100	Horizontal	Pass
6	5142.232	53.61	0.25	74.0	-20.39	Peak	18.90	100	Horizontal	Pass
6**	5142.232	42.83	0.25	54.0	-11.17	AV	18.90	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.37.23

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7794.551	37.23	6.38	74.0	-36.77	Peak	188.20	100	Horizontal	Pass
1**	7794.551	28.03	6.38	54.0	-25.97	AV	188.20	100	Horizontal	Pass
2	9485.379	40.74	11.68	74.0	-33.26	Peak	264.50	100	Horizontal	Pass
2**	9485.379	31.84	11.68	54.0	-22.16	AV	264.50	100	Horizontal	Pass
3	10150.712	43.29	13.07	74.0	-30.71	Peak	80.70	100	Horizontal	Pass
3**	10150.712	34.63	13.07	54.0	-19.37	AV	80.70	100	Horizontal	Pass
4	12451.887	48.95	17.14	74.0	-25.05	Peak	42.40	100	Horizontal	Pass
4**	12451.887	39.63	17.14	54.0	-14.37	AV	42.40	100	Horizontal	Pass
5	14192.202	53.41	22.26	74.0	-20.59	Peak	241.60	100	Horizontal	Pass
5**	14192.202	44.94	22.26	54.0	-9.06	AV	241.60	100	Horizontal	Pass
6	17826.793	57.77	24.25	74.0	-16.23	Peak	341.40	100	Horizontal	Pass
6**	17826.793	49.71	24.25	54.0	-4.29	AV	341.40	100	Horizontal	Pass

WIFI2.4G-N-Middle channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17.35.18

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

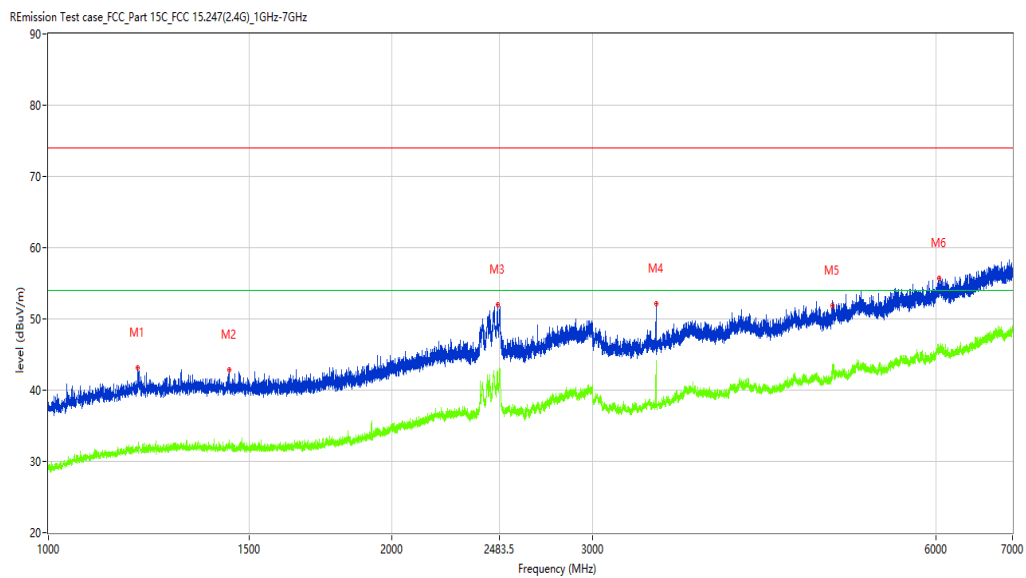

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.725	43.08	-12.99	74.0	-30.92	Peak	23.70	100	Vertical	Pass
1**	1197.725	31.81	-12.99	54.0	-22.19	AV	23.70	100	Vertical	Pass
2	1439.945	42.89	-13.02	74.0	-31.11	Peak	330.10	100	Vertical	Pass
2**	1439.945	32.50	-13.02	54.0	-21.50	AV	330.10	100	Vertical	Pass
3	2475.566	52.02	-2.68	74.0	-21.98	Peak	95.50	100	Vertical	Pass
3**	2475.566	42.45	-2.68	54.0	-11.55	AV	95.50	100	Vertical	Pass
4	3410.449	52.09	-5.14	74.0	-21.91	Peak	322.80	100	Vertical	Pass
4**	3410.449	44.12	-5.14	54.0	-9.88	AV	322.80	100	Vertical	Pass
5	4866.767	51.89	-0.91	74.0	-22.11	Peak	122.30	100	Vertical	Pass
5**	4866.767	43.57	-0.91	54.0	-10.43	AV	122.30	100	Vertical	Pass
6	6033.621	55.71	2.04	74.0	-18.29	Peak	155.10	100	Vertical	Pass
6**	6033.621	46.05	2.04	54.0	-7.95	AV	155.10	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_18.01.58

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7747.813	36.96	5.73	74.0	-37.04	Peak	169.30	100	Vertical	Pass
1**	7747.813	27.22	5.73	54.0	-26.78	AV	169.30	100	Vertical	Pass
2	9908.773	43.80	13.44	74.0	-30.20	Peak	352.40	100	Vertical	Pass
2**	9908.773	34.12	13.44	54.0	-19.88	AV	352.40	100	Vertical	Pass
3	12468.383	48.25	17.15	74.0	-25.75	Peak	169.30	100	Vertical	Pass
3**	12468.383	39.69	17.15	54.0	-14.31	AV	169.30	100	Vertical	Pass
4	14183.954	53.03	22.24	74.0	-20.97	Peak	345.00	100	Vertical	Pass
4**	14183.954	44.11	22.24	54.0	-9.89	AV	345.00	100	Vertical	Pass
5	14764.059	53.27	21.52	74.0	-20.73	Peak	115.50	100	Vertical	Pass
5**	14764.059	43.78	21.52	54.0	-10.22	AV	115.50	100	Vertical	Pass
6	17793.802	58.31	25.08	74.0	-15.69	Peak	146.40	100	Vertical	Pass
6**	17793.802	49.46	25.08	54.0	-4.54	AV	146.40	100	Vertical	Pass

WIFI2.4G-N-High channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17:54:58

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

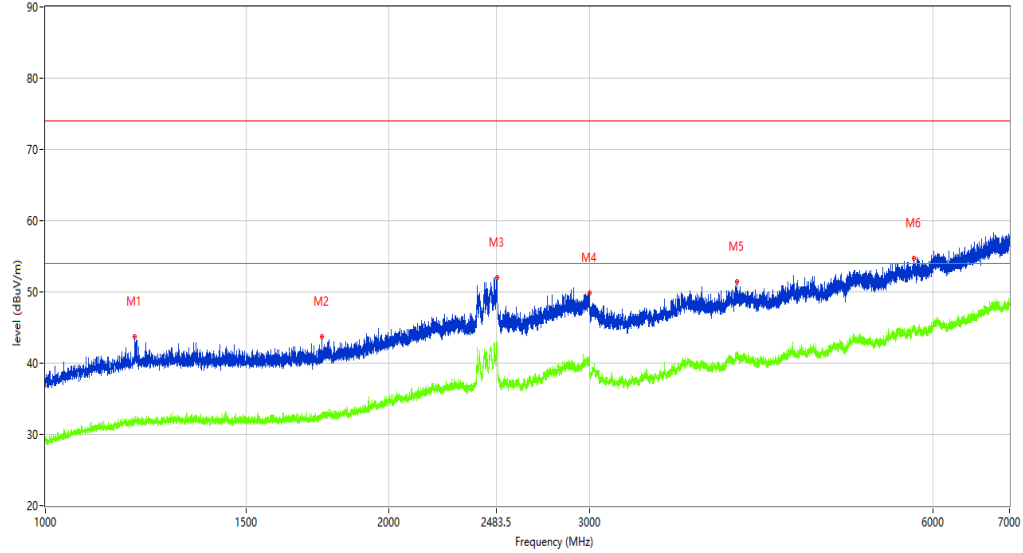

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.475	43.65	-12.99	74.0	-30.35	Peak	33.90	100	Horizontal	Pass
1**	1197.475	31.68	-12.99	54.0	-22.32	AV	33.90	100	Horizontal	Pass
2	1747.407	43.67	-12.75	74.0	-30.33	Peak	98.30	100	Horizontal	Pass
2**	1747.407	32.98	-12.75	54.0	-21.02	AV	98.30	100	Horizontal	Pass
3	2487.064	52.07	-2.44	74.0	-21.93	Peak	47.30	100	Horizontal	Pass
3**	2487.064	42.99	-2.44	54.0	-11.01	AV	47.30	100	Horizontal	Pass
4	3000.000	49.87	-3.08	74.0	-24.13	Peak	10.80	100	Horizontal	Pass
4**	3000.000	40.38	-3.08	54.0	-13.62	AV	10.80	100	Horizontal	Pass
5	4037.370	51.43	-1.52	74.0	-22.57	Peak	142.40	100	Horizontal	Pass
5**	4037.370	41.41	-1.52	54.0	-12.59	AV	142.40	100	Horizontal	Pass
6	5772.653	54.70	1.46	74.0	-19.30	Peak	45.00	100	Horizontal	Pass
6**	5772.653	45.09	1.46	54.0	-8.91	AV	45.00	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.48.04

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7970.507	37.31	7.33	74.0	-36.69	Peak	182.40	100	Horizontal	Pass
1**	7970.507	29.05	7.33	54.0	-24.95	AV	182.40	100	Horizontal	Pass
2	9281.930	40.48	10.21	74.0	-33.52	Peak	293.60	100	Horizontal	Pass
2**	9281.930	30.75	10.21	54.0	-23.25	AV	293.60	100	Horizontal	Pass
3	10112.222	43.53	13.30	74.0	-30.47	Peak	178.40	100	Horizontal	Pass
3**	10112.222	34.73	13.30	54.0	-19.27	AV	178.40	100	Horizontal	Pass
4	13163.959	50.66	18.52	74.0	-23.34	Peak	312.70	100	Horizontal	Pass
4**	13163.959	41.46	18.52	54.0	-12.54	AV	312.70	100	Horizontal	Pass
5	14777.806	52.89	21.33	74.0	-21.11	Peak	274.40	100	Horizontal	Pass
5**	14777.806	43.85	21.33	54.0	-10.15	AV	274.40	100	Horizontal	Pass
6	17796.551	57.66	25.07	74.0	-16.34	Peak	358.60	100	Horizontal	Pass
6**	17796.551	50.58	25.07	54.0	-3.42	AV	358.60	100	Horizontal	Pass

WIFI2.4G-N-High channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17.28.23

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

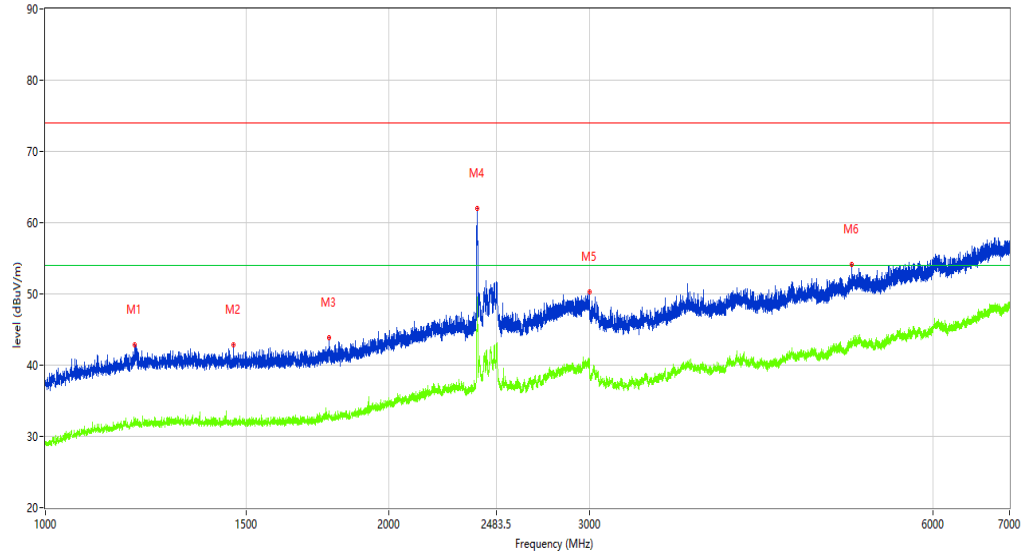

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.475	42.82	-12.98	74.0	-31.18	Peak	144.10	100	Vertical	Pass
1**	1196.475	32.09	-12.98	54.0	-21.91	AV	144.10	100	Vertical	Pass
2	1462.192	42.92	-13.24	74.0	-31.08	Peak	6.10	100	Vertical	Pass
2**	1462.192	31.73	-13.24	54.0	-22.27	AV	6.10	100	Vertical	Pass
3	1773.653	43.80	-12.40	74.0	-30.20	Peak	55.10	100	Vertical	Pass
3**	1773.653	32.76	-12.40	54.0	-21.24	AV	55.10	100	Vertical	Pass
4	2392.326	62.03	-4.58	74.0	-11.97	Peak	17.50	100	Vertical	Pass
4**	2392.326	47.36	-4.58	54.0	-6.64	AV	17.50	100	Vertical	Pass
5	2999.500	50.30	-3.09	74.0	-23.70	Peak	6.10	100	Vertical	Pass
5**	2999.500	40.39	-3.09	54.0	-13.61	AV	6.10	100	Vertical	Pass
6	5089.739	54.10	0.27	74.0	-19.90	Peak	284.90	100	Vertical	Pass
6**	5089.739	43.03	0.27	54.0	-10.97	AV	284.90	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_18.10.35

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7956.761	37.36	7.19	74.0	-36.64	Peak	29.10	100	Vertical	Pass
1**	7956.761	29.40	7.19	54.0	-25.60	AV	29.10	100	Vertical	Pass
2	9383.654	41.44	11.48	74.0	-32.56	Peak	358.40	100	Vertical	Pass
2**	9383.654	32.28	11.48	54.0	-21.72	AV	358.40	100	Vertical	Pass
3	9897.776	43.34	13.26	74.0	-30.66	Peak	2.80	100	Vertical	Pass
3**	9897.776	34.27	13.26	54.0	-19.73	AV	2.80	100	Vertical	Pass
4	14230.692	52.79	21.37	74.0	-21.21	Peak	301.00	100	Vertical	Pass
4**	14230.692	43.36	21.37	54.0	-10.64	AV	301.00	100	Vertical	Pass
5	15778.555	53.07	18.24	74.0	-20.93	Peak	212.90	100	Vertical	Pass
5**	15778.555	44.87	18.24	54.0	-9.13	AV	212.90	100	Vertical	Pass
6	17796.551	58.19	25.07	74.0	-15.81	Peak	193.10	100	Vertical	Pass
6**	17796.551	49.11	25.07	54.0	-4.89	AV	193.10	100	Vertical	Pass

WIFI2.4G-N40-Low channel-Horizontal-TX

Test result74.0

Project Number: 1744444

Test Time: 2021-03-11_17:59:57

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

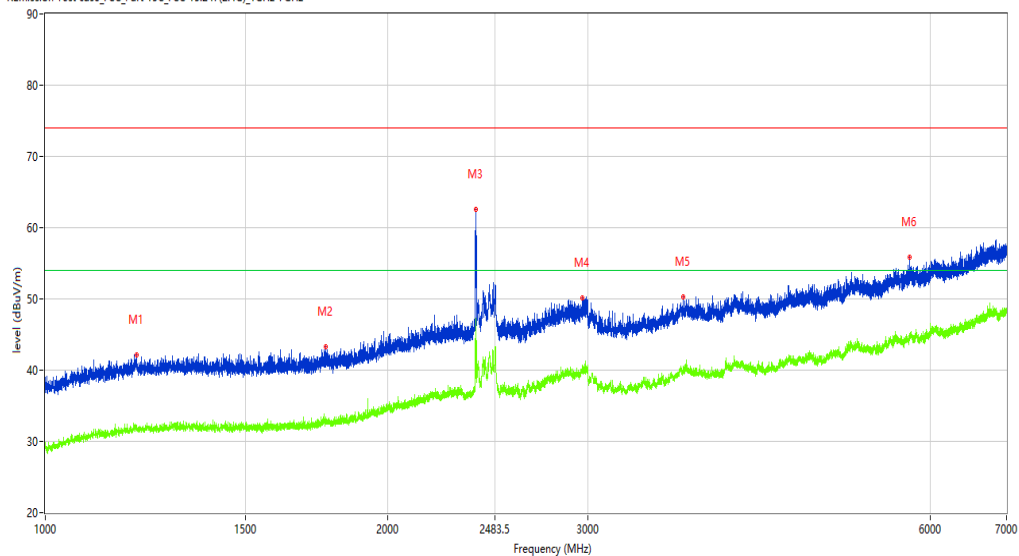

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.475	42.21	-13.08		-31.79	Peak	36.50	100	Horizontal	Pass
1**	1203.475	31.66	-13.08	54.0	-22.34	AV	36.50	100	Horizontal	Pass
2	1763.655	43.33	-12.37	74.0	-30.67	Peak	54.80	100	Horizontal	Pass
2**	1763.655	33.45	-12.37	54.0	-20.55	AV	54.80	100	Horizontal	Pass
3	2390.576	62.62	-6.27	74.0	-11.38	Peak	22.40	100	Horizontal	Pass
3**	2390.576	47.28	-6.27	54.0	-6.72	AV	22.40	100	Horizontal	Pass
4	2965.754	50.17	-3.38	74.0	-23.83	Peak	189.90	100	Horizontal	Pass
4**	2965.754	40.36	-3.38	54.0	-13.64	AV	189.90	100	Horizontal	Pass
5	3639.920	50.27	-2.25	74.0	-23.73	Peak	127.80	100	Horizontal	Pass
5**	3639.920	40.16	-2.25	54.0	-13.84	AV	127.80	100	Horizontal	Pass
6	5754.656	55.79	1.25	74.0	-18.21	Peak	226.30	100	Horizontal	Pass
6**	5754.656	44.42	1.25	54.0	-9.58	AV	226.30	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.31.32

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8019.995	36.83	7.94	74.0	-37.17	Peak	63.10	100	Horizontal	Pass
1**	8019.995	27.91	7.94	54.0	-26.09	AV	63.10	100	Horizontal	Pass
2	9452.387	41.25	11.54	74.0	-32.75	Peak	213.60	100	Horizontal	Pass
2**	9452.387	31.88	11.54	54.0	-22.12	AV	213.60	100	Horizontal	Pass
3	10805.049	44.68	14.09	74.0	-29.32	Peak	190.70	100	Horizontal	Pass
3**	10805.049	35.66	14.09	54.0	-18.34	AV	190.70	100	Horizontal	Pass
4	12429.893	48.51	17.05	74.0	-25.49	Peak	156.40	100	Horizontal	Pass
4**	12429.893	39.88	17.05	54.0	-14.12	AV	156.40	100	Horizontal	Pass
5	14186.703	52.66	22.33	74.0	-21.34	Peak	78.90	100	Horizontal	Pass
5**	14186.703	44.87	22.33	54.0	-9.13	AV	78.90	100	Horizontal	Pass
6	17813.047	57.42	24.67	74.0	-16.58	Peak	55.70	100	Horizontal	Pass
6**	17813.047	49.03	24.67	54.0	-4.97	AV	55.70	100	Horizontal	Pass

WIFI2.4G-N40-Low channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_18.02.09

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

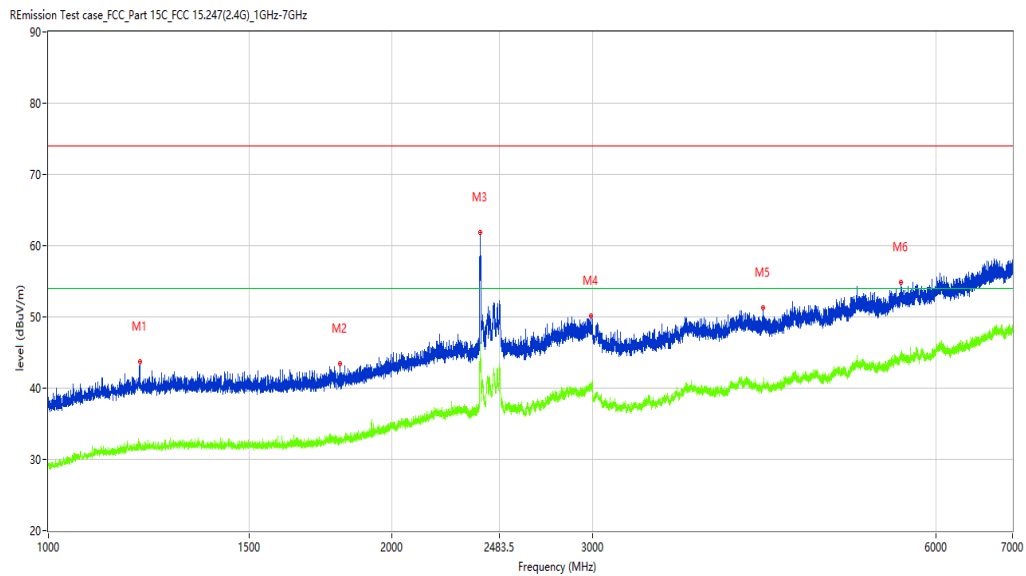

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1202.225	43.67	-13.06	74.0	-30.33	Peak	36.70	100	Vertical	Pass
1**	1202.225	32.39	-13.06	54.0	-21.61	AV	36.70	100	Vertical	Pass
2	1800.400	43.40	-12.62	74.0	-30.60	Peak	180.00	100	Vertical	Pass
2**	1800.400	33.23	-12.62	54.0	-20.77	AV	180.00	100	Vertical	Pass
3	2390.076	61.80	-6.43	74.0	-12.20	Peak	22.50	100	Vertical	Pass
3**	2390.076	46.20	-6.43	54.0	-7.80	AV	22.50	100	Vertical	Pass
4	2987.502	50.14	-3.17	74.0	-23.86	Peak	351.00	100	Vertical	Pass
4**	2987.502	39.81	-3.17	54.0	-14.19	AV	351.00	100	Vertical	Pass
5	4231.846	51.25	-2.35	74.0	-22.75	Peak	0.00	100	Vertical	Pass
5**	4231.846	39.95	-2.35	54.0	-14.05	AV	0.00	100	Vertical	Pass
6	5591.676	54.90	0.87	74.0	-19.10	Peak	163.60	100	Vertical	Pass
6**	5591.676	44.50	0.87	54.0	-9.50	AV	163.60	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.56.03

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7989.753	36.62	7.52	74.0	-37.38	Peak	289.20	100	Vertical	Pass
1**	7989.753	28.09	7.52	54.0	-25.91	AV	289.20	100	Vertical	Pass
2	9488.128	41.13	11.70	74.0	-32.87	Peak	158.90	100	Vertical	Pass
2**	9488.128	32.54	11.70	54.0	-21.46	AV	158.90	100	Vertical	Pass
3	9952.762	43.38	13.34	74.0	-30.62	Peak	127.70	100	Vertical	Pass
3**	9952.762	34.74	13.34	54.0	-19.26	AV	127.70	100	Vertical	Pass
4	12471.132	48.69	17.08	74.0	-25.31	Peak	358.50	100	Vertical	Pass
4**	12471.132	40.61	17.08	54.0	-13.39	AV	358.50	100	Vertical	Pass
5	14164.709	52.91	21.66	74.0	-21.09	Peak	254.60	100	Vertical	Pass
5**	14164.709	43.52	21.66	54.0	-10.48	AV	254.60	100	Vertical	Pass
6	17818.545	58.79	24.50	74.0	-15.21	Peak	351.00	100	Vertical	Pass
6**	17818.545	49.56	24.50	54.0	-4.44	AV	351.00	100	Vertical	Pass

WIFI2.4G-N40-Middle channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17.57.03

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

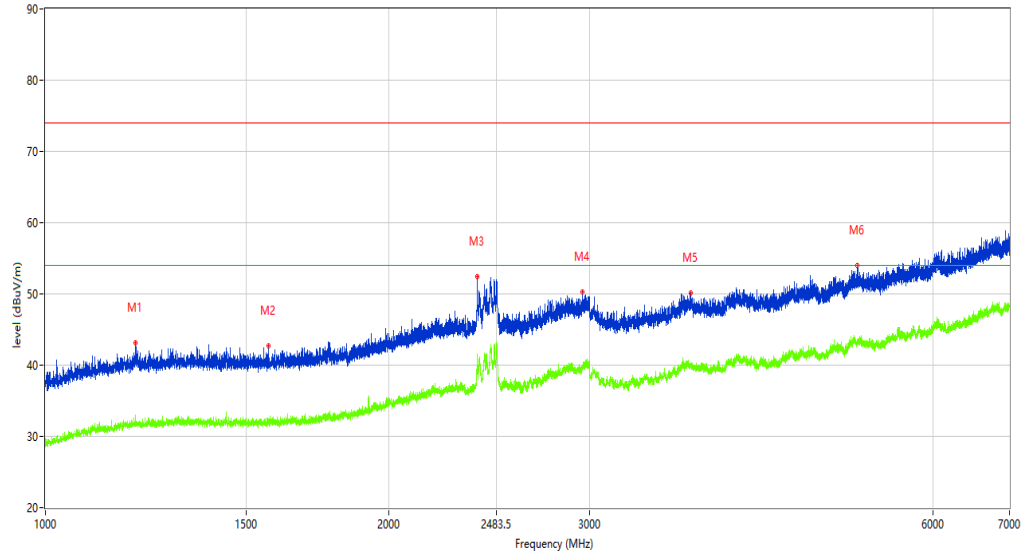

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.975	43.15	-13.02	74.0	-30.85	Peak	41.00	100	Horizontal	Pass
1**	1199.975	33.03	-13.02	54.0	-20.97	AV	41.00	100	Horizontal	Pass
2	1567.679	42.72	-13.12	74.0	-31.28	Peak	221.60	100	Horizontal	Pass
2**	1567.679	32.41	-13.12	54.0	-21.59	AV	221.60	100	Horizontal	Pass
3	2390.826	52.49	-6.19	74.0	-21.51	Peak	59.20	100	Horizontal	Pass
3**	2390.826	40.14	-6.19	54.0	-13.86	AV	59.20	100	Horizontal	Pass
4	2954.506	50.23	-3.57	74.0	-23.77	Peak	82.70	100	Horizontal	Pass
4**	2954.506	39.50	-3.57	54.0	-14.50	AV	82.70	100	Horizontal	Pass
5	3680.915	50.11	-2.67	74.0	-23.89	Peak	217.70	100	Horizontal	Pass
5**	3680.915	40.32	-2.67	54.0	-13.68	AV	217.70	100	Horizontal	Pass
6	5145.232	54.01	0.25	74.0	-19.99	Peak	288.00	100	Horizontal	Pass
6**	5145.232	43.05	0.25	54.0	-10.95	AV	288.00	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.39.07

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7613.097	36.23	6.23	74.0	-37.77	Peak	59.40	100	Horizontal	Pass
1**	7613.097	28.59	6.23	54.0	-25.41	AV	59.40	100	Horizontal	Pass
2	9386.403	40.75	11.49	74.0	-33.25	Peak	328.50	100	Horizontal	Pass
2**	9386.403	32.22	11.49	54.0	-21.78	AV	328.50	100	Horizontal	Pass
3	11272.432	45.83	15.51	74.0	-28.17	Peak	0.00	100	Horizontal	Pass
3**	11272.432	36.16	15.51	54.0	-17.84	AV	0.00	100	Horizontal	Pass
4	13238.190	49.96	18.48	74.0	-24.04	Peak	236.40	100	Horizontal	Pass
4**	13238.190	40.77	18.48	54.0	-13.23	AV	236.40	100	Horizontal	Pass
5	14181.205	52.48	22.16	74.0	-21.52	Peak	267.00	100	Horizontal	Pass
5**	14181.205	44.17	22.16	54.0	-9.83	AV	267.00	100	Horizontal	Pass
6	17832.292	58.76	24.09	74.0	-15.24	Peak	185.80	100	Horizontal	Pass
6**	17832.292	49.90	24.09	54.0	-4.10	AV	185.80	100	Horizontal	Pass

WIFI2.4G-N40-Middle channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_17:52:34

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

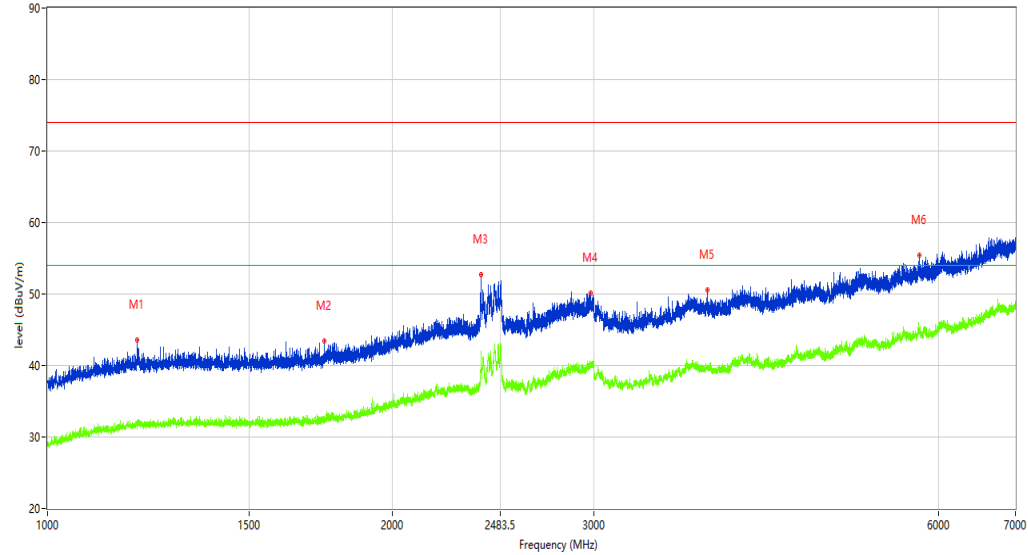

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.975	43.57	-12.99	74.0	-30.43	Peak	36.20	100	Vertical	Pass
1**	1197.975	32.25	-12.99	54.0	-21.75	AV	36.20	100	Vertical	Pass
2	1744.407	43.44	-12.76	74.0	-30.56	Peak	36.20	100	Vertical	Pass
2**	1744.407	32.00	-12.76	54.0	-22.00	AV	36.20	100	Vertical	Pass
3	2389.076	52.68	-6.75	74.0	-21.32	Peak	27.30	100	Vertical	Pass
3**	2389.076	39.77	-6.75	54.0	-14.23	AV	27.30	100	Vertical	Pass
4	2981.502	50.19	-3.23	74.0	-23.81	Peak	225.60	100	Vertical	Pass
4**	2981.502	39.97	-3.23	54.0	-14.03	AV	225.60	100	Vertical	Pass
5	3769.904	50.60	-2.62	74.0	-23.40	Peak	72.50	100	Vertical	Pass
5**	3769.904	39.98	-2.62	54.0	-14.02	AV	72.50	100	Vertical	Pass
6	5769.654	55.45	1.43	74.0	-18.55	Peak	261.10	100	Vertical	Pass
6**	5769.654	45.23	1.43	54.0	-8.77	AV	261.10	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_18.03.49

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

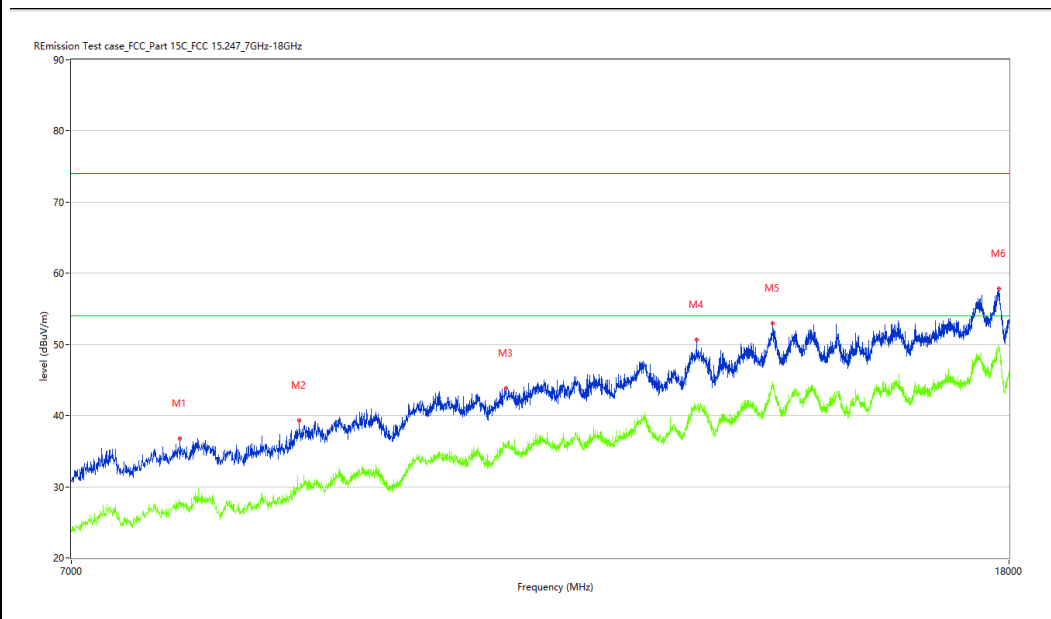

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7808.298	36.72	6.66	74.0	-37.28	Peak	356.90	100	Vertical	Pass
1**	7808.298	27.86	6.66	54.0	-26.14	AV	356.90	100	Vertical	Pass
2	8809.048	39.27	8.96	74.0	-34.73	Peak	113.80	100	Vertical	Pass
2**	8809.048	29.81	8.96	54.0	-24.19	AV	113.80	100	Vertical	Pass
3	10843.539	43.78	14.63	74.0	-30.22	Peak	270.40	100	Vertical	Pass
3**	10843.539	35.76	14.63	54.0	-18.24	AV	270.40	100	Vertical	Pass
4	13139.215	50.68	18.53	74.0	-23.32	Peak	129.20	100	Vertical	Pass
4**	13139.215	40.99	18.53	54.0	-13.01	AV	129.20	100	Vertical	Pass
5	14189.453	52.98	22.33	74.0	-21.02	Peak	354.30	100	Vertical	Pass
5**	14189.453	44.40	22.33	54.0	-9.60	AV	354.30	100	Vertical	Pass
6	17821.295	57.83	24.42	74.0	-16.17	Peak	61.30	100	Vertical	Pass
6**	17821.295	49.84	24.42	54.0	-4.16	AV	61.30	100	Vertical	Pass

WIFI2.4G-N40-High channel-Horizontal-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_18.13.58

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

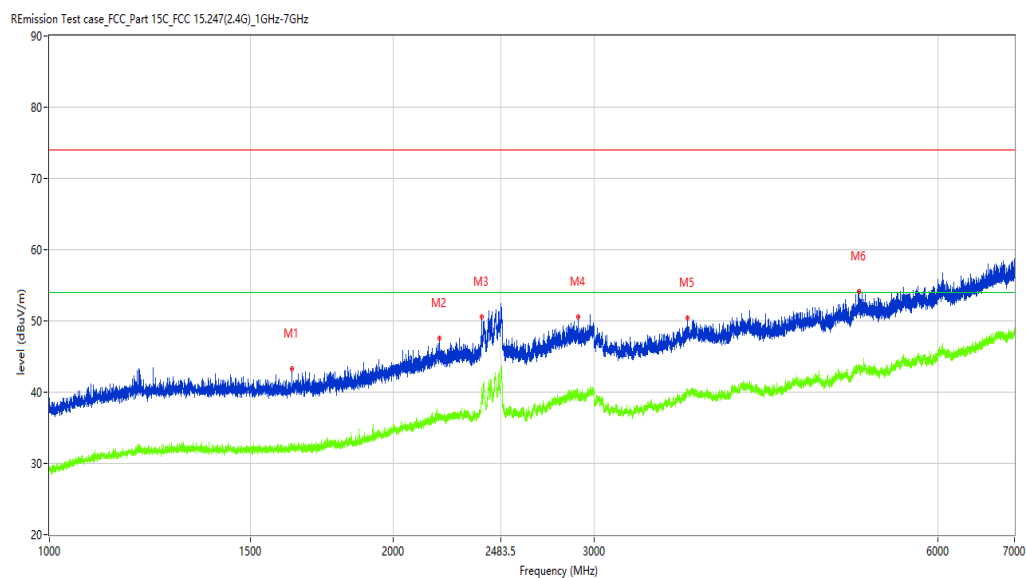

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1630.421	43.26	-13.03	74.0	-30.74	Peak	283.20	100	Horizontal	Pass
1**	1630.421	32.41	-13.03	54.0	-21.59	AV	283.20	100	Horizontal	Pass
2	2195.851	47.52	-8.19	74.0	-26.48	Peak	2.70	100	Horizontal	Pass
2**	2195.851	36.36	-8.19	54.0	-17.64	AV	2.70	100	Horizontal	Pass
3	2392.076	50.58	-4.59	74.0	-23.42	Peak	18.50	100	Horizontal	Pass
3**	2392.076	40.38	-4.59	54.0	-13.62	AV	18.50	100	Horizontal	Pass
4	2903.262	50.56	-4.08	74.0	-23.44	Peak	244.10	100	Horizontal	Pass
4**	2903.262	39.42	-4.08	54.0	-14.58	AV	244.10	100	Horizontal	Pass
5	3622.422	50.38	-2.35	74.0	-23.62	Peak	299.70	100	Horizontal	Pass
5**	3622.422	40.20	-2.35	54.0	-13.80	AV	299.70	100	Horizontal	Pass
6	5114.736	54.19	0.35	74.0	-19.81	Peak	360.00	100	Horizontal	Pass
6**	5114.736	43.33	0.35	54.0	-10.67	AV	360.00	100	Horizontal	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.42.10

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7615.846	36.16	6.22	74.0	-37.84	Peak	293.70	100	Horizontal	Pass
1**	7615.846	26.87	6.22	54.0	-27.13	AV	293.70	100	Horizontal	Pass
2	8968.508	39.83	11.34	74.0	-34.17	Peak	57.20	100	Horizontal	Pass
2**	8968.508	30.59	11.34	54.0	-23.41	AV	57.20	100	Horizontal	Pass
3	10087.478	43.66	13.20	74.0	-30.34	Peak	316.30	100	Horizontal	Pass
3**	10087.478	34.18	13.20	54.0	-19.82	AV	316.30	100	Horizontal	Pass
4	11478.630	46.40	15.46	74.0	-27.60	Peak	16.10	100	Horizontal	Pass
4**	11478.630	36.18	15.46	54.0	-17.82	AV	16.10	100	Horizontal	Pass
5	14175.706	51.86	21.99	74.0	-22.14	Peak	255.50	100	Horizontal	Pass
5**	14175.706	44.30	21.99	54.0	-9.70	AV	255.50	100	Horizontal	Pass
6	17815.796	58.46	24.58	74.0	-15.54	Peak	308.60	100	Horizontal	Pass
6**	17815.796	49.34	24.58	54.0	-4.66	AV	308.60	100	Horizontal	Pass

WIFI2.4G-N40-High channel-Vertical-TX

Test result

Project Number: 1744444

Test Time: 2021-03-11_18.11.18

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

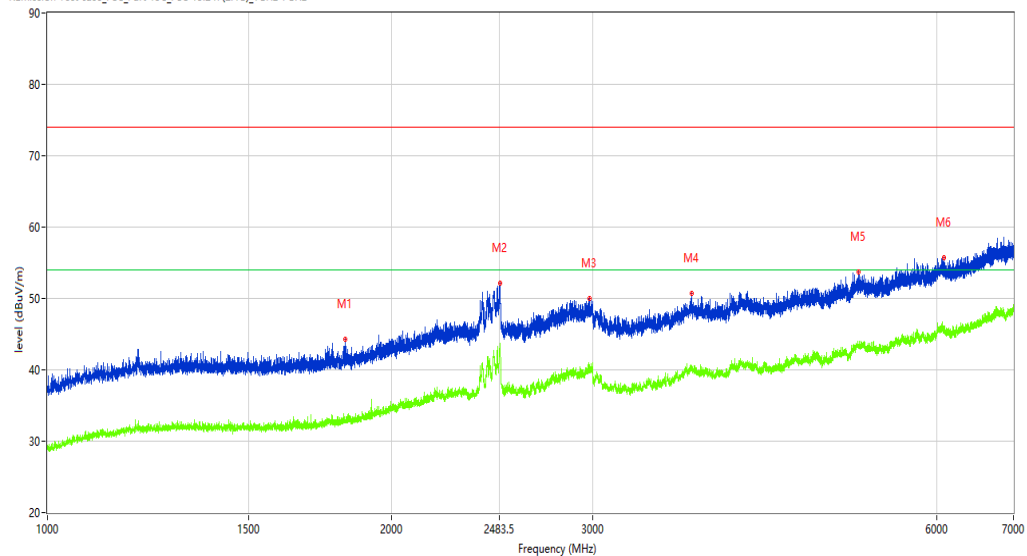

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1822.647	44.22	-12.34	74.0	-29.78	Peak	129.00	100	Vertical	Pass
1**	1822.647	33.06	-12.34	54.0	-20.94	AV	129.00	100	Vertical	Pass
2	2489.564	52.14	-2.39	74.0	-21.86	Peak	53.50	100	Vertical	Pass
2**	2489.564	42.92	-2.39	54.0	-11.08	AV	53.50	100	Vertical	Pass
3	2981.502	50.07	-3.23	74.0	-23.93	Peak	347.30	100	Vertical	Pass
3**	2981.502	40.01	-3.23	54.0	-13.99	AV	347.30	100	Vertical	Pass
4	3659.918	50.79	-2.31	74.0	-23.21	Peak	260.60	100	Vertical	Pass
4**	3659.918	40.26	-2.31	54.0	-13.74	AV	260.60	100	Vertical	Pass
5	5126.234	53.71	0.29	74.0	-20.29	Peak	195.50	100	Vertical	Pass
5**	5126.234	43.02	0.29	54.0	-10.98	AV	195.50	100	Vertical	Pass
6	6090.114	55.71	1.97	74.0	-18.29	Peak	96.20	100	Vertical	Pass
6**	6090.114	45.35	1.97	54.0	-8.65	AV	96.20	100	Vertical	Pass

Test result

Project Number: 认证项目

Test Time: 2021-03-07_18.05.37

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9930.767	42.65	13.47	74.0	-31.35	Peak	135.60	100	Vertical	Pass
1**	9930.767	34.08	13.47	54.0	-19.92	AV	135.60	100	Vertical	Pass
2	12443.639	48.37	17.11	74.0	-25.63	Peak	192.80	100	Vertical	Pass
2**	12443.639	40.22	17.11	54.0	-13.78	AV	192.80	100	Vertical	Pass
3	13235.441	50.42	18.52	74.0	-23.58	Peak	81.60	100	Vertical	Pass
3**	13235.441	42.30	18.52	54.0	-11.70	AV	81.60	100	Vertical	Pass
4	14192.202	52.94	22.26	74.0	-21.06	Peak	1.80	100	Vertical	Pass
4**	14192.202	44.32	22.26	54.0	-9.68	AV	1.80	100	Vertical	Pass
5	17813.047	57.79	24.67	74.0	-16.21	Peak	9.60	100	Vertical	Pass
5**	17813.047	50.37	24.67	54.0	-3.63	AV	9.60	100	Vertical	Pass

WIFI2.4G-Bandedge -B-Low channel- Horizontal –TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_14.20.16

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

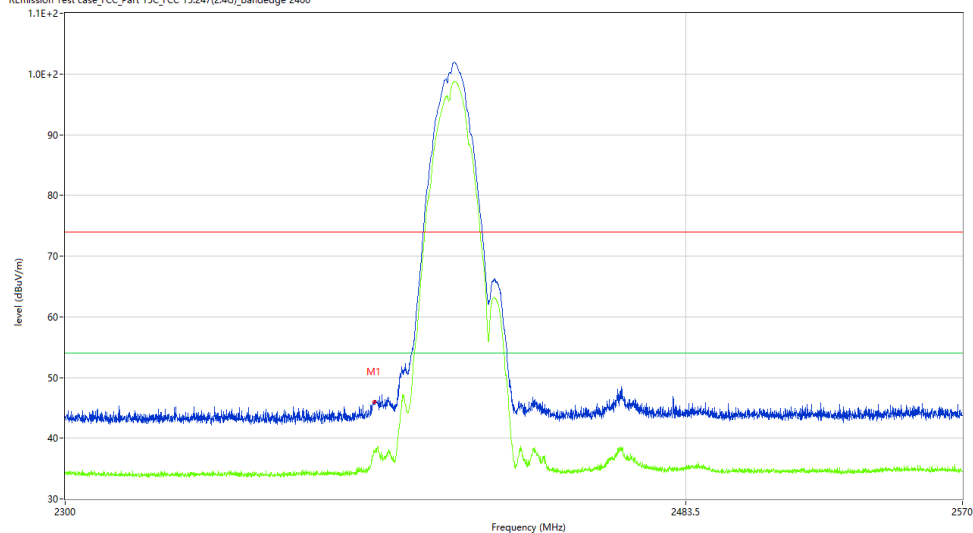

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	45.99	-10.38	74.0	-28.01	Peak	130.10	100	H	Pass
1**	2390.000	37.81	-10.38	54.0	-16.19	AV	130.10	100	H	Pass

WIFI2.4G-Bandedge -B-Low channel- Vertical -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_14.14.38

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

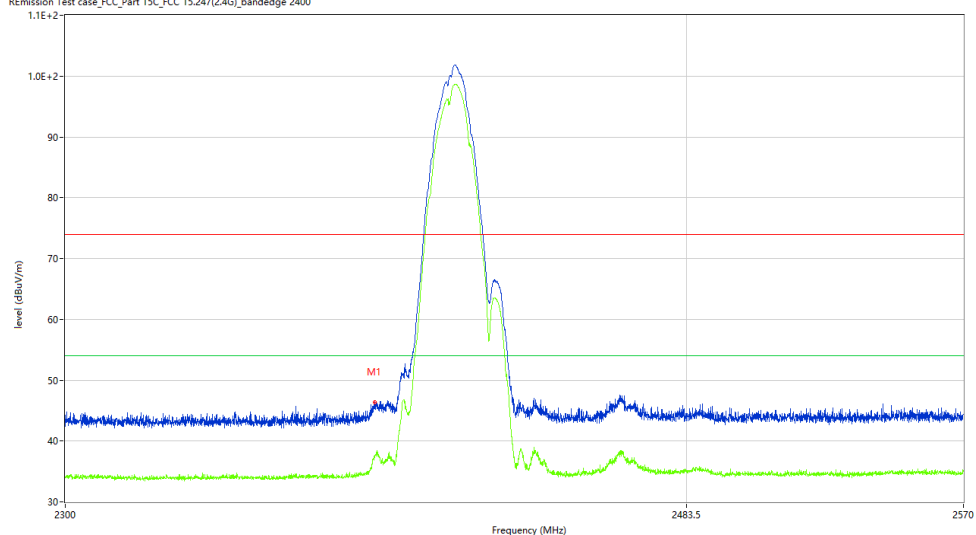

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	46.12	-10.38	74.0	-27.88	Peak	116.16	100	V	Pass
1**	2390.000	37.62	-10.38	54.0	-16.38	AV	116.16	100	V	Pass

WIFI2.4G-Bandedge -B-High channel- Horizontal -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_15.13.50

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

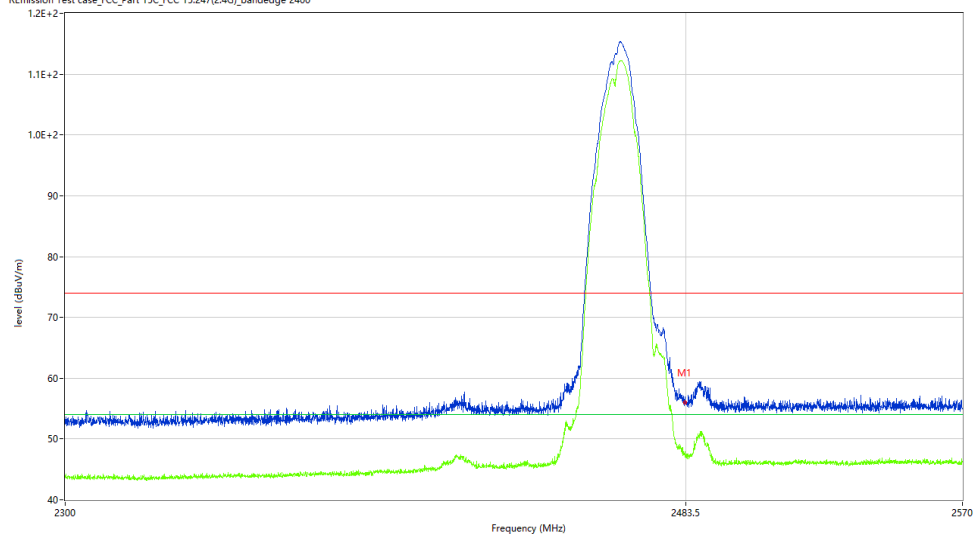

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	55.95	1.48	74.0	-18.05	Peak	60.24	100	H	Pass
1**	2483.500	47.36	1.48	54.0	-6.64	AV	60.24	100	H	Pass

WIFI2.4G-Bandedge -B-High channel- Vertical-TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_15.11.09

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

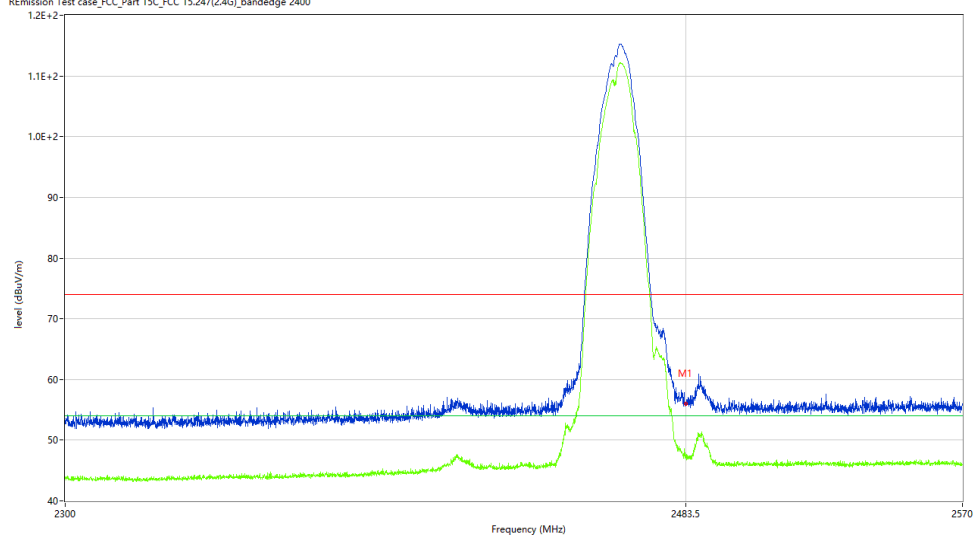

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.01	1.48	74.0	-17.99	Peak	127.01	100	V	Pass
1**	2483.500	47.47	1.48	54.0	-6.53	AV	127.01	100	V	Pass

WIFI2.4G-Bandedge -G-Low channel- Horizontal –TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_15.40.59

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

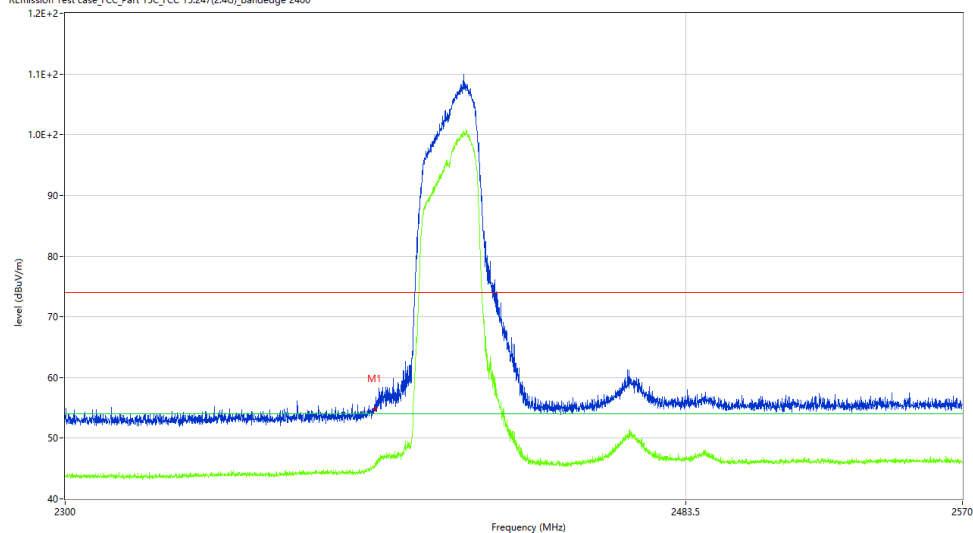

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.81	-0.53	74.0	-19.19	Peak	118.75	100	H	Pass
1**	2390.000	45.68	-0.53	54.0	-8.32	AV	118.75	100	H	Pass

WIFI2.4G-Bandedge -G-Low channel- Vertical -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_15.44.41

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

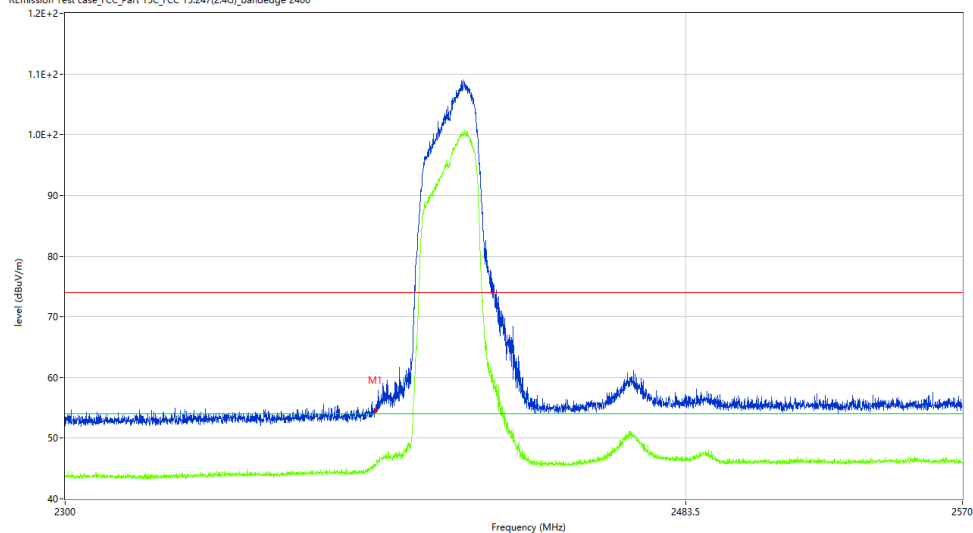

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.47	-0.53	74.0	-19.53	Peak	359.28	100	V	Pass
1**	2390.000	45.52	-0.53	54.0	-8.48	AV	359.28	100	V	Pass

WIFI2.4G-Bandedge -G-High channel- Horizontal -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_15.35.40

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

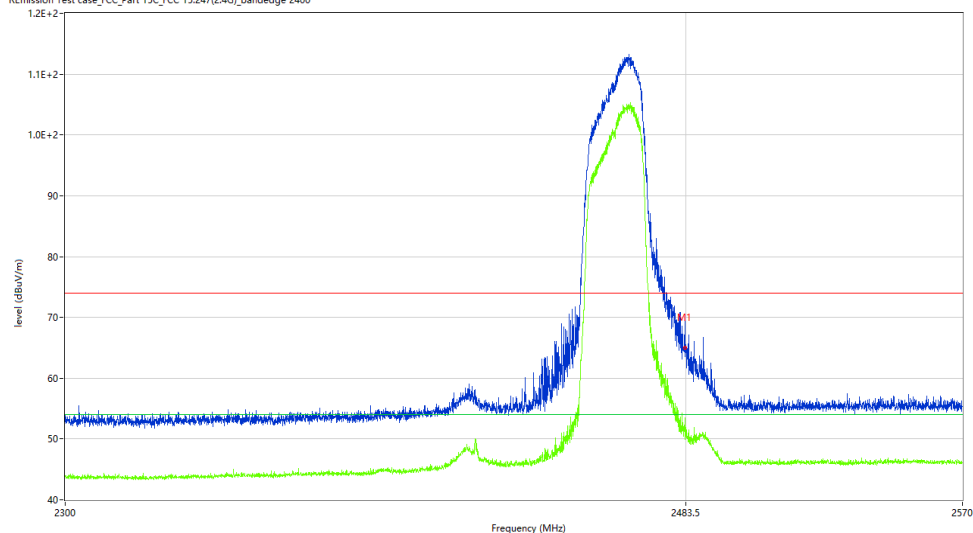

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	65.02	1.48	74.0	-8.98	Peak	106.75	100	H	Pass
1**	2483.500	51.91	1.48	54.0	-2.09	AV	106.75	100	H	Pass

WIFI2.4G-Bandedge -G-High channel- Vertical-TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_15.33.23

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

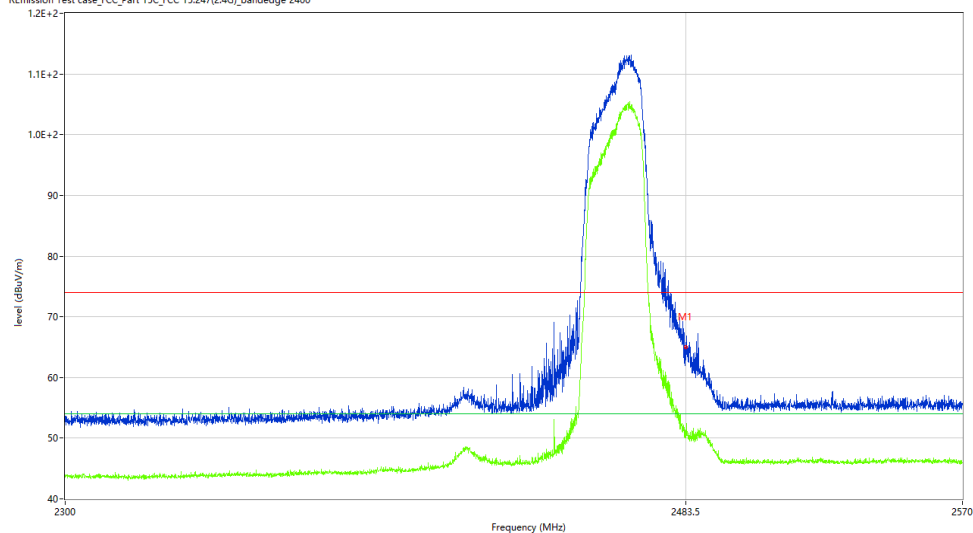

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	65.22	1.48	74.0	-8.78	Peak	197.01	100	V	Pass
1**	2483.500	50.87	1.48	54.0	-3.13	AV	197.01	100	V	Pass

WIFI2.4G-Bandedge -N-Low channel- Horizontal –TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_16.38.24

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

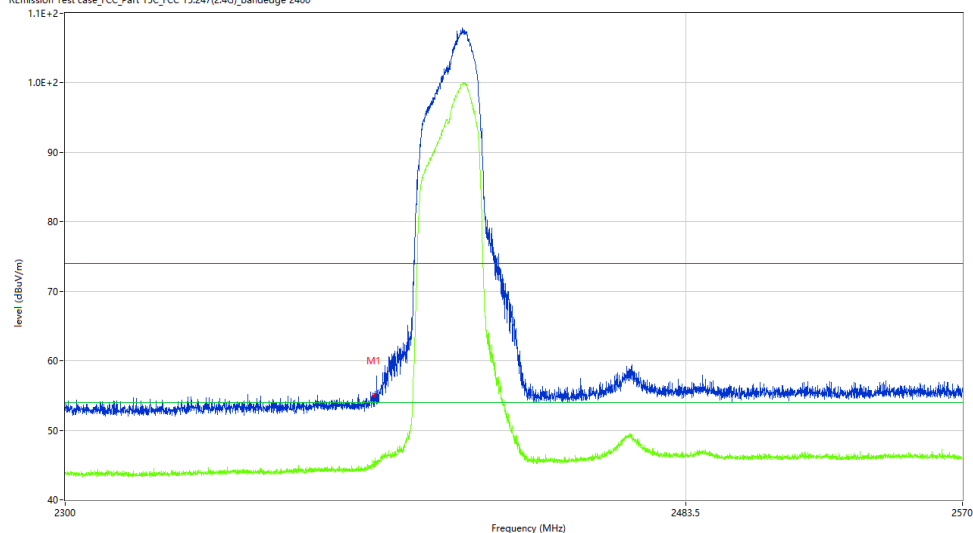

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	55.24	-0.53	74.0	-18.76	Peak	16.21	100	H	Pass
1**	2390.000	45.31	-0.53	54.0	-8.69	AV	16.21	100	H	Pass

WIFI2.4G-Bandedge -N-Low channel- Vertical -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_16.40.16

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

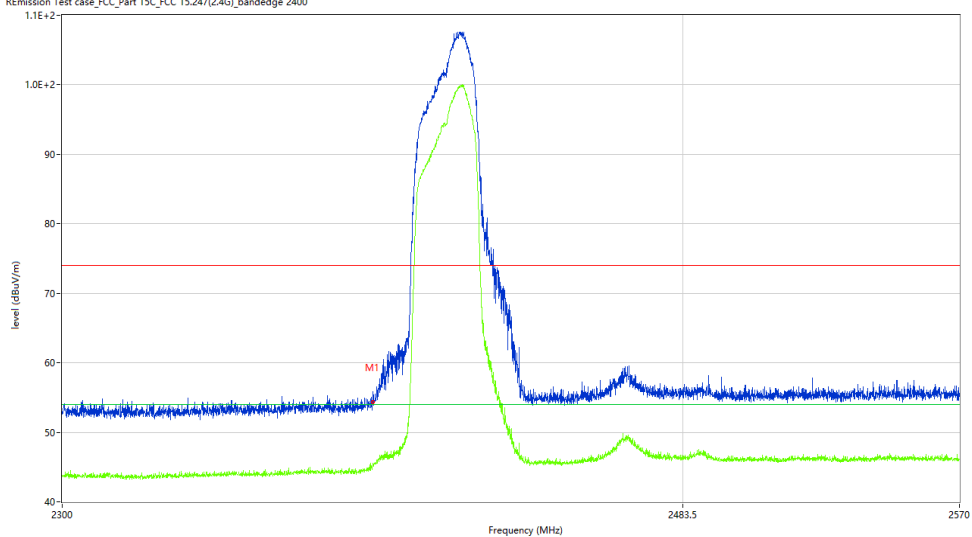

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.31	-0.53	74.0	-19.69	Peak	173.71	100	V	Pass
1**	2390.000	45.23	-0.53	54.0	-8.77	AV	173.71	100	V	Pass

WIFI2.4G-Bandedge -N-High channel- Horizontal -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_16.15.15

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

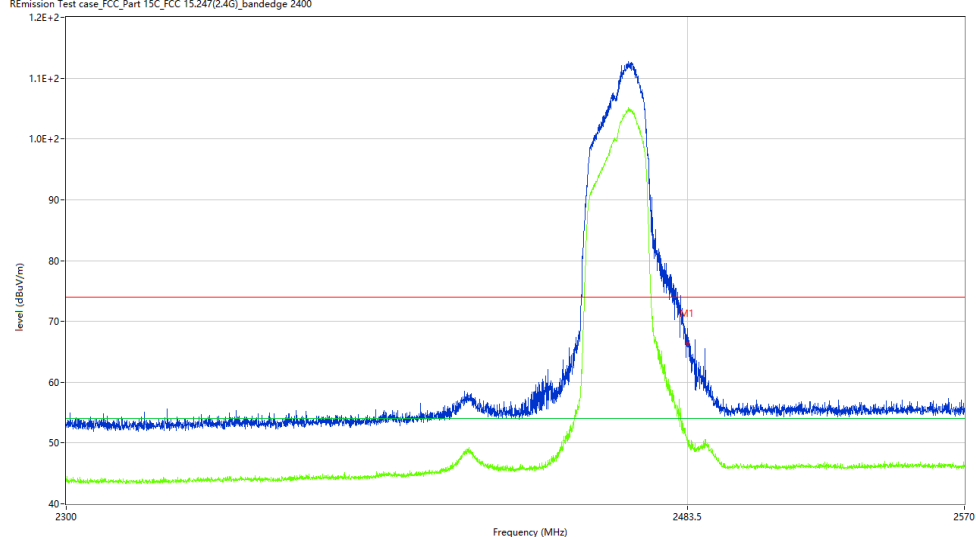

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.24	1.48	74.0	-7.76	Peak	219.90	100	H	Pass
1**	2483.500	50.01	1.48	54.0	-3.99	AV	219.90	100	H	Pass

WIFI2.4G-Bandedge -N-High channel- Vertical-TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_16.17.02

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

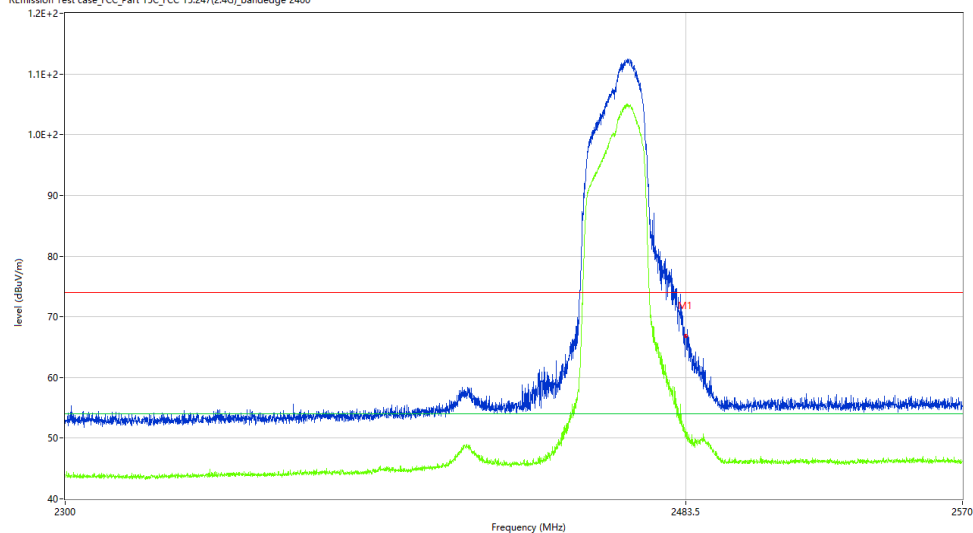

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.85	1.48	74.0	-7.15	Peak	195.74	100	V	Pass
1**	2483.500	50.93	1.48	54.0	-3.07	AV	195.74	100	V	Pass

WIFI2.4G-Bandedge –N40-Low channel- Horizontal –TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17.04.10

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

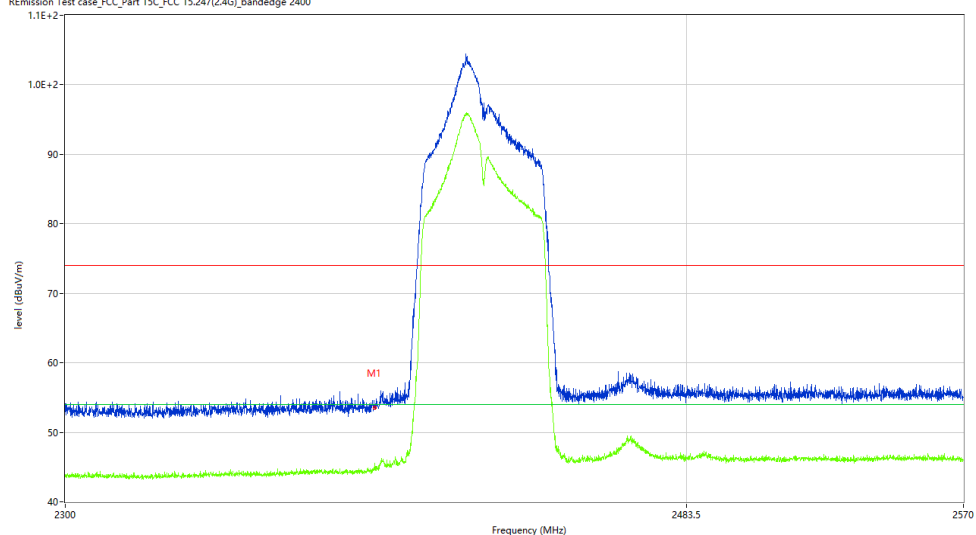

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.49	-0.53	74.0	-20.51	Peak	209.01	100	H	Pass
1**	2390.000	44.86	-0.53	54.0	-9.14	AV	209.01	100	H	Pass

WIFI2.4G-Bandedge -N40-Low channel- Vertical -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_17:06:00

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

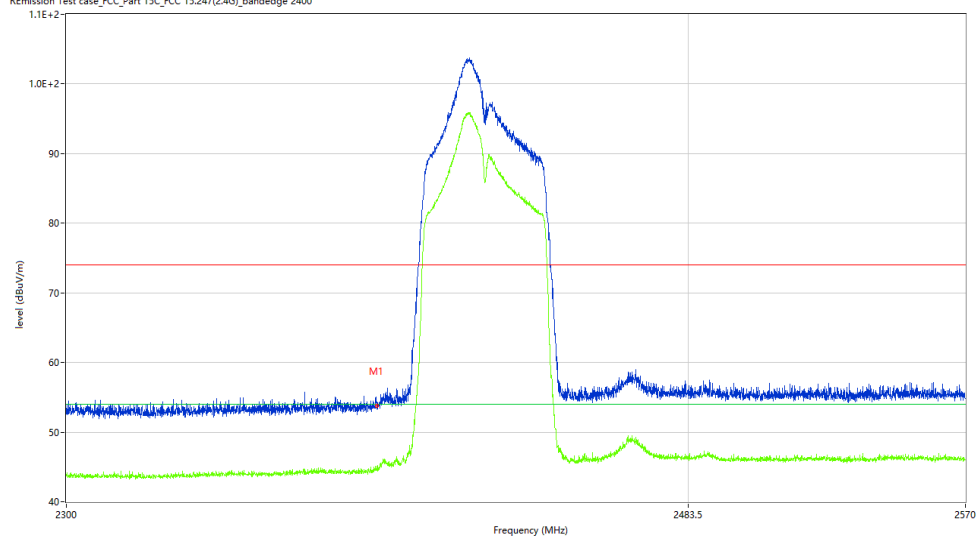

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.91	-0.53	74.0	-20.09	Peak	184.32	100	V	Pass
1**	2390.000	44.89	-0.53	54.0	-9.11	AV	184.32	100	V	Pass

WIFI2.4G-Bandedge -N40-High channel- Horizontal -TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_16.49.28

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

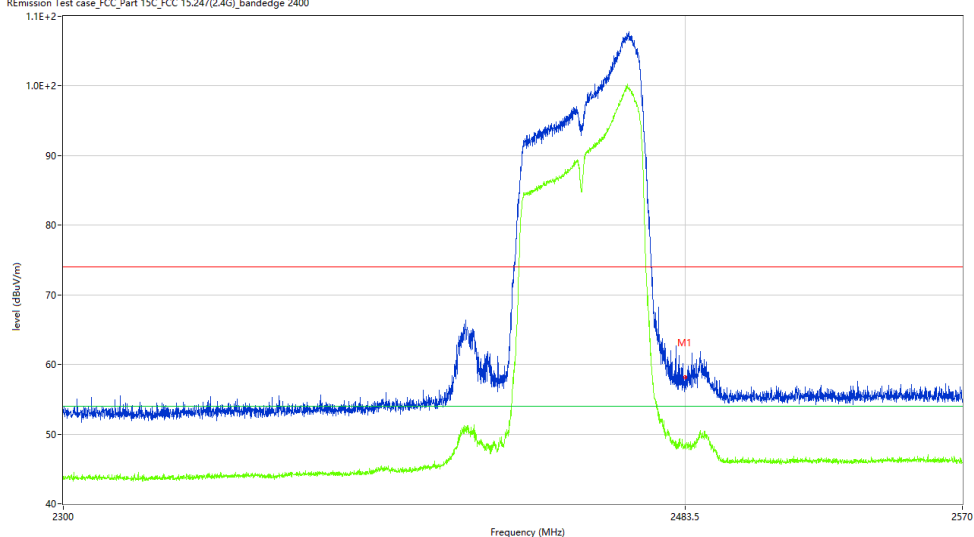

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.17	1.48	74.0	-15.83	Peak	91.74	100	H	Pass
1**	2483.500	48.61	1.48	54.0	-5.39	AV	91.74	100	H	Pass

WIFI2.4G-Bandedge -N40-High channel- Vertical-TX

Test result

Project Number: 认证项目

Test Time: 2021-03-07_16.47.18

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.7

Load: N.A

Hum.: 50%

Remark: DR-RSE01-E21010036-01#01

REmission Test case_FCC_Part15C_FCC 15.247(2.4G)_bandedge 2400

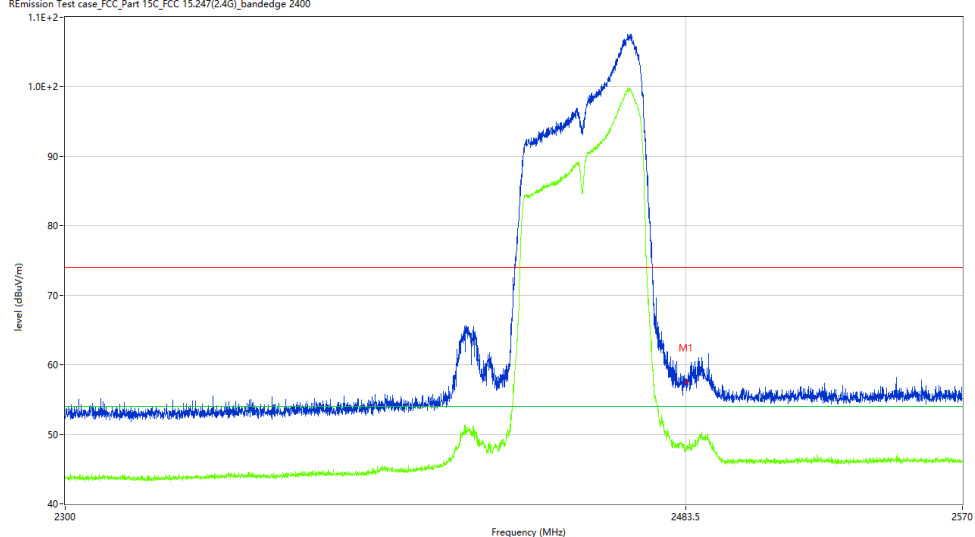

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.35	1.48	74.0	-16.65	Peak	214.40	100	V	Pass
1**	2483.500	48.03	1.48	54.0	-5.97	AV	214.40	100	V	Pass