

TEST REPORT

Reference No...... : WTD21D03021969W004 V2
FCC ID..... : 2AZDF-R4060
Applicant..... : Shenzhen Venz Technology Co., Ltd
Address..... : 1008, 10/F, Jinqizhigu building, 1 road Tangling, NanShan District, Shenzhen, China
Manufacturer..... : Shenzhen Venz Technology Co., Ltd
Address..... : 1008, 10/F, Jinqizhigu building, 1 road Tangling, NanShan District, Shenzhen, China
Product..... : Multi Functional Gateway
Model(s)..... : R4060
Standards..... : FCC CFR47 Part 15 Section 15.231:2019
Date of Receipt sample.... : 2021-03-22
Date of Test..... : 2021-03-22 to 2021-04-08
Date of Issue..... : 2021-04-21
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

levi xiao

levi Xiao / Project Engineer

Approved by:



Daniel Liu

Daniel Liu / Designated Reviewer

2 Contents

	Page
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.	4
4.3 TEST MODE	4
5 EQUIPMENT USED DURING TEST	5
5.1 EQUIPMENTS LIST	5
5.2 MEASUREMENT UNCERTAINTY	5
5.3 SUBCONTRACTED	6
6 TEST SUMMARY	7
7 CONDUCTED EMISSION	8
7.1 E.U.T. OPERATION	8
7.2 EUT SETUP.....	8
7.3 MEASUREMENT DESCRIPTION.....	8
7.4 CONDUCTED EMISSION TEST RESULT	9
8 RADIATED SPURIOUS EMISSIONS.....	11
8.1 EUT OPERATION	11
8.2 TEST SETUP	12
8.3 SPECTRUM ANALYZER SETUP.....	13
8.4 TEST PROCEDURE	14
8.5 SUMMARY OF TEST RESULTS	15
9 PERIODIC OPERATION	16
10 EMISSION BANDWIDTH	19
10.1 TEST PROCEDURE	19
10.2 TEST RESULT	19
11 ANTENNA REQUIREMENT	20
12 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	21

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D03021969W004	2021-03-22	2021-03-22 to 2021-04-08	2021-04-09	Original	-	replaced
WTD21D03021969W004 V1	2021-03-22	2021-03-22 to 2021-04-08	2021-04-14	Version 1	Update	replaced
WTD21D03021969W004 V2	2021-03-22	2021-03-22 to 2021-04-08	2021-04-21	Version 2	Update	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Multi Functional Gateway
Model(s):	R4060
Wi-Fi Specification:	2.4G-802.11b/g/n HT20
Bluetooth Version:	Bluetooth v4.2 with BLE
Zigbee :	Support
SRD(433.92Mhz)	Support
Antenna installation:	Spring antenna
Hardware Version:	VENZ_C03 JIEMABAN_V1.2
Software Version:	1.3.1
Antenna Gain:	-0.2dBi

4.2 Details of E.U.T.

Ratings:	DC 5V/2A(Micro USB) Manufacturer: andsmips Model:AS013Z-0502000UU Input:100-240VAC, 50/60Hz 0.45A
----------	--

4.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Test channel
Transmitting	433.92MHz

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2020-09-17	2021-09-16
2.	LISN	R&S	ENV216	101215	2020-09-17	2021-09-16
3.	Cable	Top	TYPE16(3.5M)	-	2020-09-17	2021-09-16
3m Semi-anechoic Chamber for Radiation Emissions						
1	Test Receiver	R&S	ESCI	101296	2020.04.20	2021.04.19
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020.04.25	2021.04.24
3	Amplifier	ANRITSU	MH648A	M43381	2020.04.20	2021.04.19
4	Cable	HUBER+SUHNER	CBL2	525178	2020.04.20	2021.04.19
5	Spectrum Analyzer	R&S	FSP30	100091	2020-04-20	2021.04.19
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-25	2021.04.24
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-08-26	2020-08-25
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020-07-30	2021-07-29
2	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2020-07-30	2021-07-29
3	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	2020-07-30	2021-07-29
4	EXA Signal Analyzer	Keysight	N9010A	MY50520207526B25MP BW7X	2020-04-20	2021-04-19
“*”: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.						

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Confidence interval: 95%. Confidence factor:k=2	

5.3 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

6 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	Pass
Radiated Spurious Emissions	15.205(a) 15.209 15.231(a)	Pass
Periodic Operation	15.231(a)	Pass
Emission Bandwidth	15.231(c)	Pass
Antenna Requirement	15.203	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :

Temperature: 25.5 °C

Humidity: 51 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

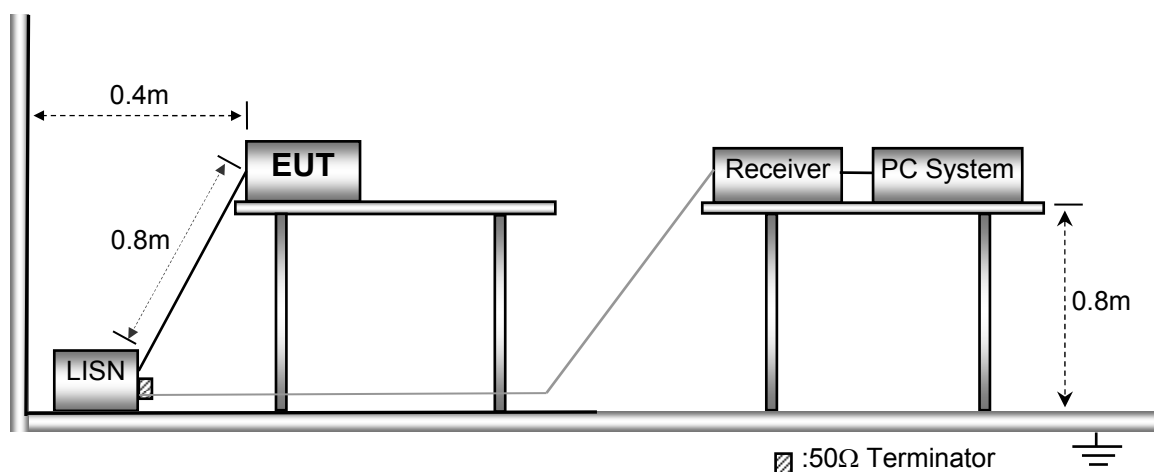


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

Live line:

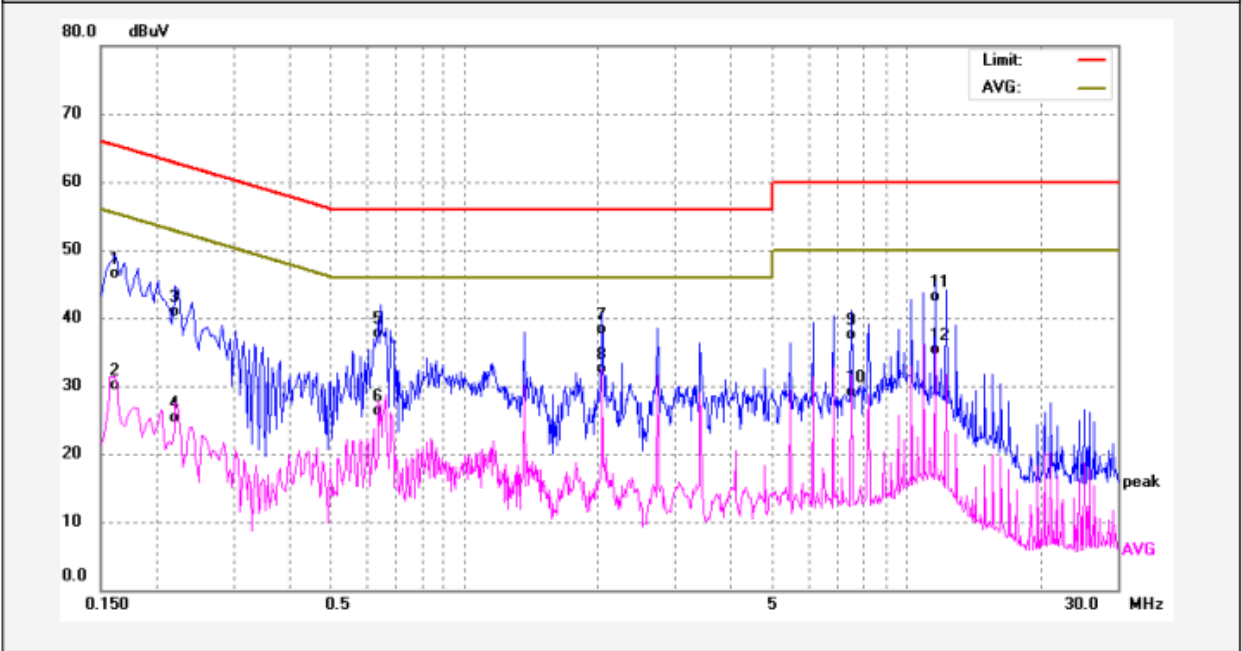

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	35.81	10.78	46.59	65.36	-18.77	QP	
2	0.1620	19.24	10.78	30.02	55.36	-25.34	AVG	
3	0.2220	30.27	10.66	40.93	62.74	-21.81	QP	
4	0.2220	14.60	10.66	25.26	52.74	-27.48	AVG	
5	0.6460	27.21	10.58	37.79	56.00	-18.21	QP	
6	0.6460	15.82	10.58	26.40	46.00	-19.60	AVG	
7	2.0500	27.72	10.60	38.32	56.00	-17.68	QP	
8	2.0500	21.86	10.60	32.46	46.00	-13.54	AVG	
9	7.5100	26.74	10.67	37.41	60.00	-22.59	QP	
10	7.5100	18.52	10.67	29.19	50.00	-20.81	AVG	
11	11.6100	32.40	10.80	43.20	60.00	-16.80	QP	
12	11.6100	24.47	10.80	35.27	50.00	-14.73	AVG	

Neutral line:

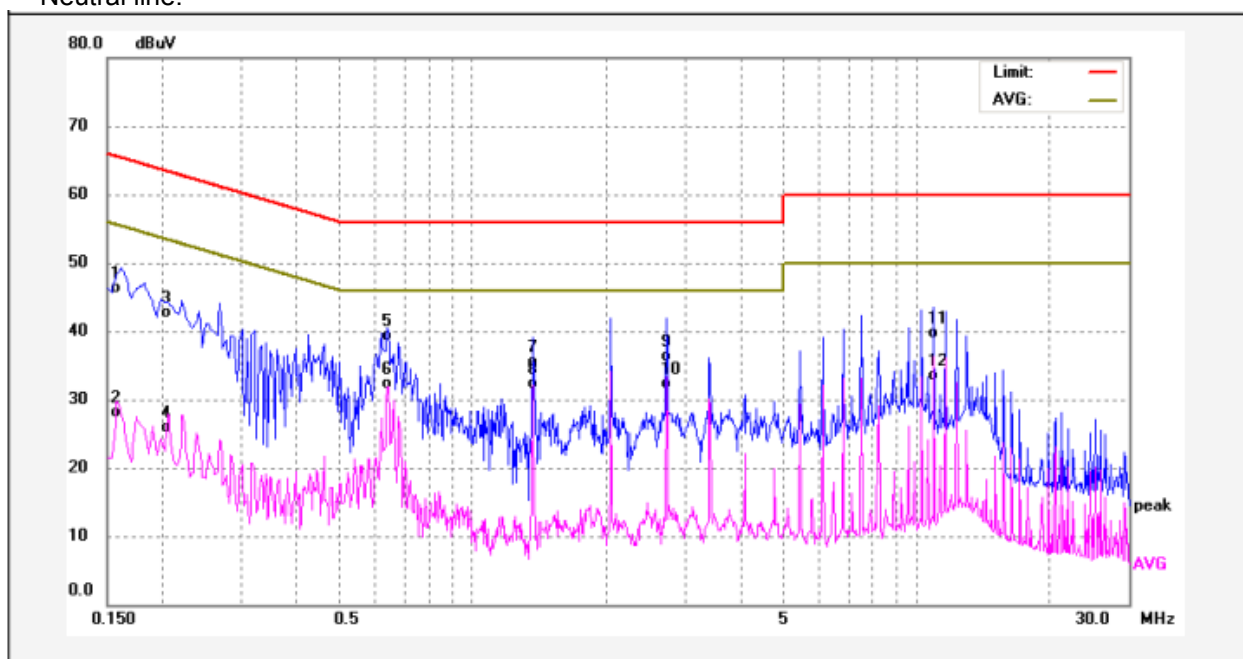

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	35.43	10.80	46.23	65.56	-19.33	QP	
2	0.1580	17.32	10.80	28.12	55.56	-27.44	AVG	
3	0.2060	32.08	10.67	42.75	63.36	-20.61	QP	
4	0.2060	15.18	10.67	25.85	53.36	-27.51	AVG	
5	0.6419	28.65	10.58	39.23	56.00	-16.77	QP	
6	0.6419	21.82	10.58	32.40	46.00	-13.60	AVG	
7	1.3660	25.00	10.60	35.60	56.00	-20.40	QP	
8	1.3660	21.79	10.60	32.39	46.00	-13.61	AVG	
9	2.7340	25.60	10.67	36.27	56.00	-19.73	QP	
10	2.7340	21.68	10.67	32.35	46.00	-13.65	AVG	
11	10.9300	28.88	10.80	39.68	60.00	-20.32	QP	
12	10.9300	22.65	10.80	33.45	50.00	-16.55	AVG	

8 Radiated Spurious Emissions

Test Requirement: FCC Part15 Paragraph 15.231(a), 15.209, 15.205

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Fundamental Frequency (MHz)	Field Strength of Fundamental (uV/m)	Field Strength of Fundamental (dBuV/m)	Field Strength of Spurious Emission (uV/m)	Field Strength of Spurious Emission (dBuV/m)
44.66-40.70	2250	67	225	47
70-130	1250	62	125	42
130-174	1250 to 3750*	62 to 71.48*	125 to 375*	42 to 51.48*
174-260	3750	71.48	375	51.48
260-470	3750 to 12500*	71.48 to 81.94*	375 to 1250*	51.48 to 61.94*
Above 470	12500	81.94	1250	61.94
* linear interpolations				

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 54.6% RH

Atmospheric Pressure: 101.7kPa

Test Voltage: AC 120V/60Hz


EUT Operation :

*The test was performed in Transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

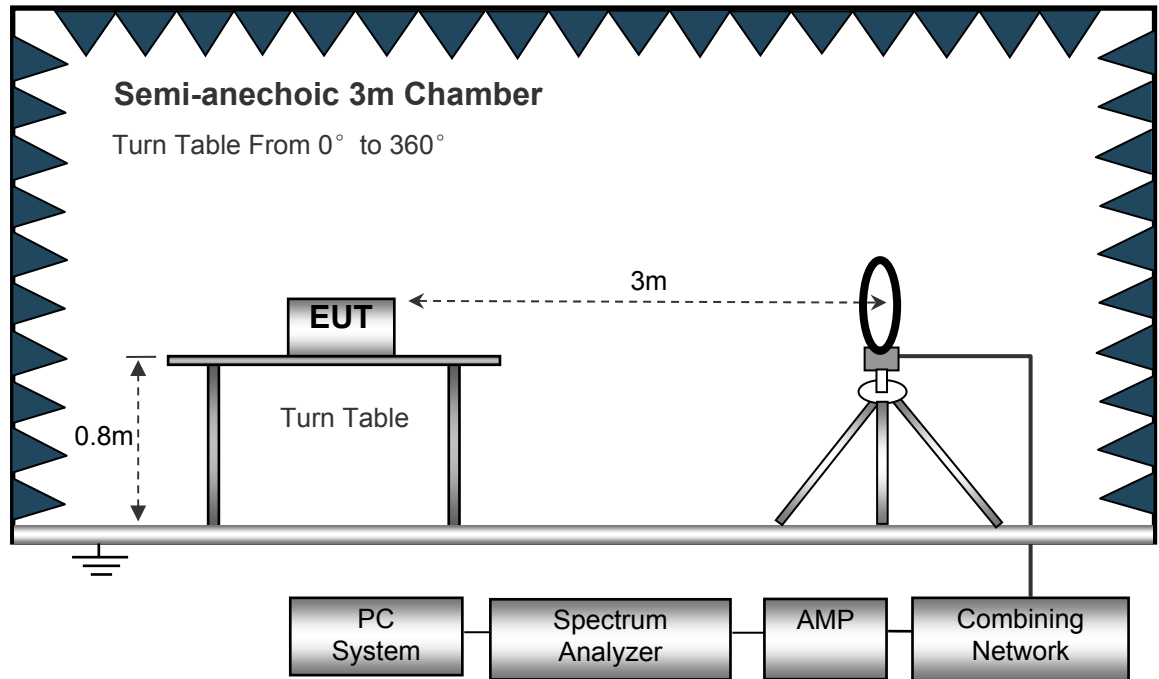

The test setup for emission measurement from 30 MHz to 1 GHz.

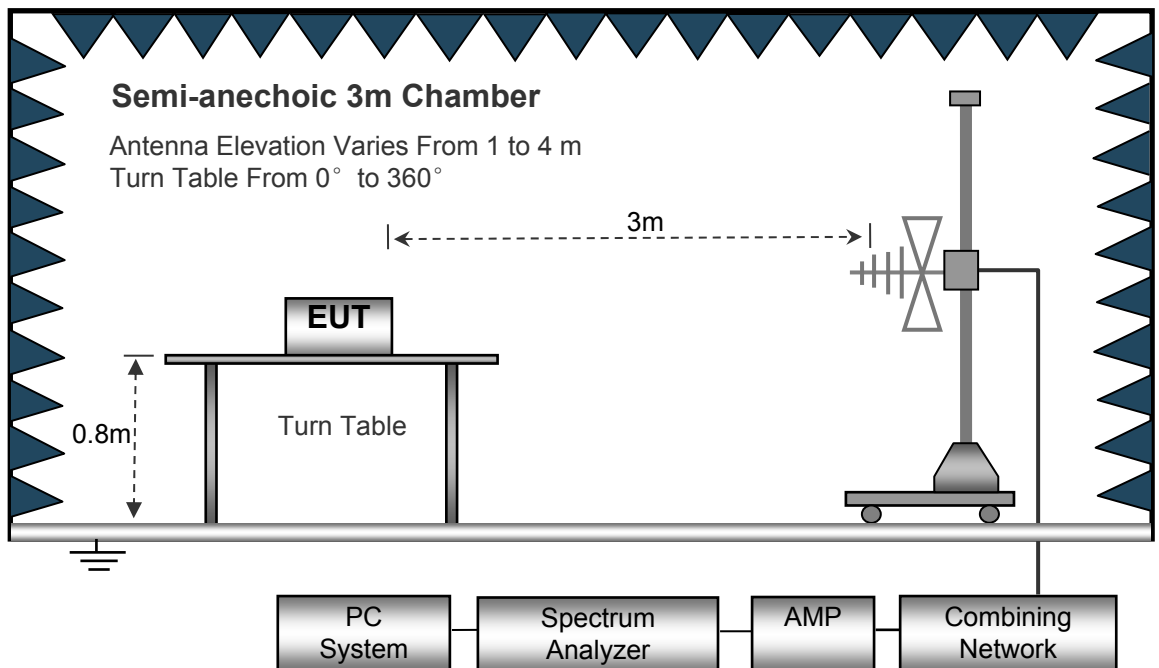

The test setup for emission measurement above 1 GHz.

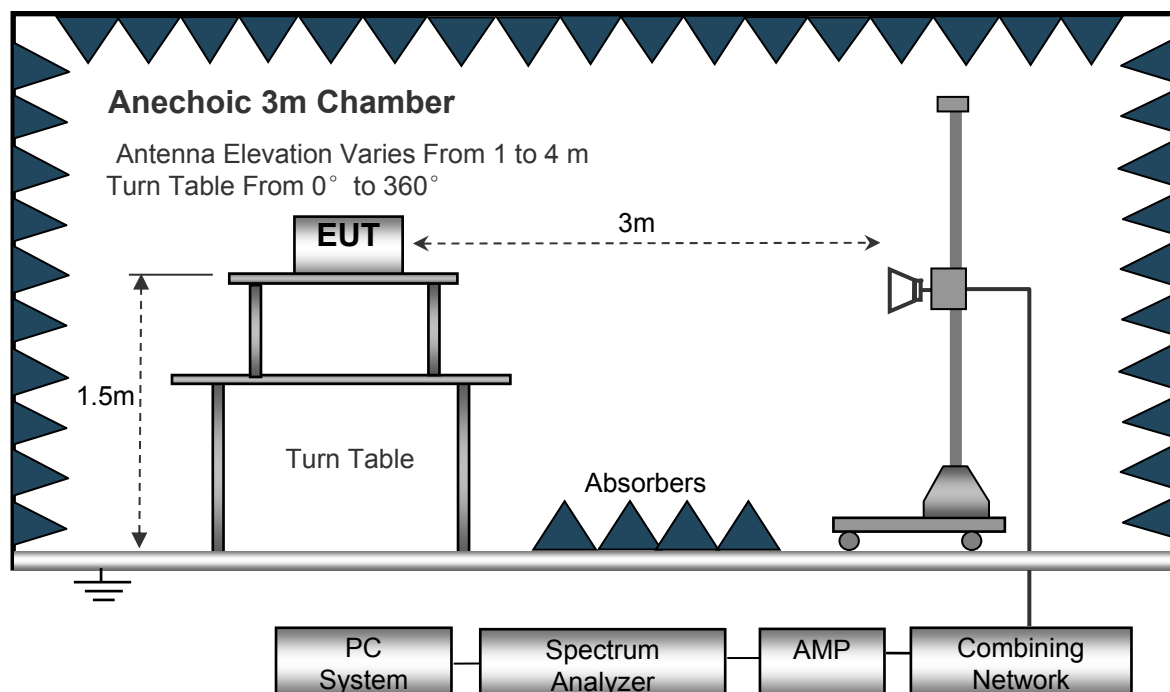

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep SpeedAuto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Summary of Test Results

Test Frequency: 9 kHz~30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30 MHz ~ 5 GHz

Test Channel: 433.92MHz

Frequency	Receiver Reading (PK)	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude (PK)	FCC Part 15.231/15.209/205	
			Height	Polar			Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
433.92	80.6	124	1.2	H	-10.44	70.16	100.83	-30.67
433.92	79.63	146	1.8	V	-10.44	69.19	100.83	-31.64
867.84	40.74	304	1.1	H	0.04	40.78	80.83	-40.05
867.84	31.32	339	1.4	V	0.04	31.36	80.83	-49.47
2725.20	54.49	272	1.4	H	-14.87	39.62	74.00	-34.38
2725.20	57.16	157	1.4	V	-14.87	42.29	74.00	-31.71

AV = Peak +20Log₁₀ (duty cycle) =PK+ (-4.74) [refer to section 8 for more detail]

Frequency	PK	RX Antenna Polar	Duty cycle Factor	Calculated AV	FCC Part 15.231/209/205	
					Limit	Margin
(MHz)	(dBμV/m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
433.92	70.16	H	-4.74	65.42	80.83	-15.41
433.92	69.19	V	-4.74	64.45	80.83	-16.38
867.84	40.78	H	-4.74	36.04	60.83	-24.79
867.84	31.36	V	-4.74	26.62	60.83	-34.21
2725.20	39.62	H	-4.74	34.88	54.00	-19.12
2725.20	42.29	V	-4.74	37.55	54.00	-16.45

9 Periodic Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, The duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion


Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train * %



Duty Cycle Correction Factor(dB)=20 * Log₁₀(Duty Cycle(%))

Total transmission time(ms)	1.472*16+0.576*9=28.736
Length of a complete transmission period(ms)	49.6ms
Duty Cycle(%)	57.93%
Duty Cycle Correction Factor(dB)	-4.74

(* Note: the transmitter operates for longer than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. So the Length of a complete transmission period=100ms)


Refer to the duty cycle plot (as below)

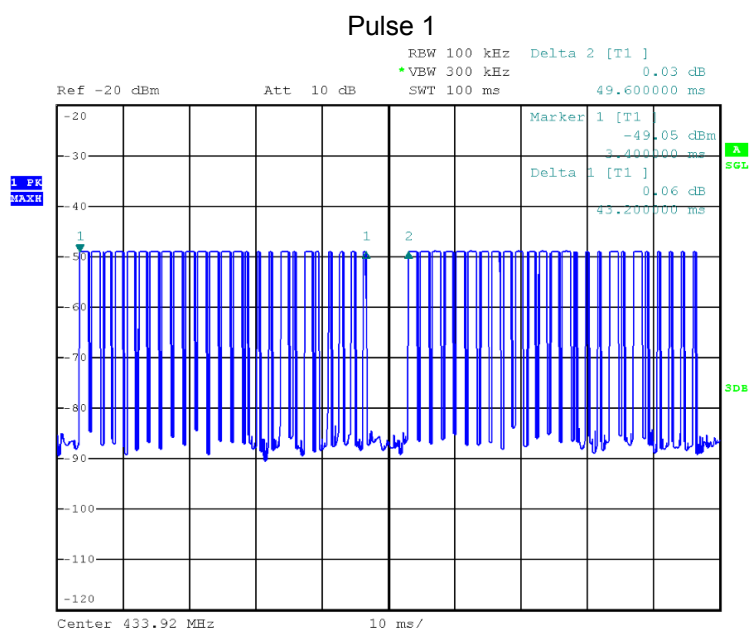

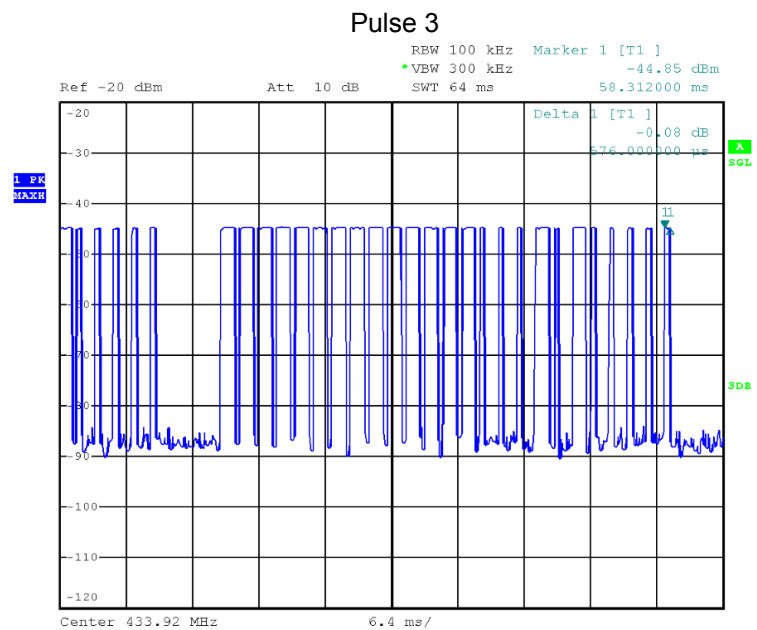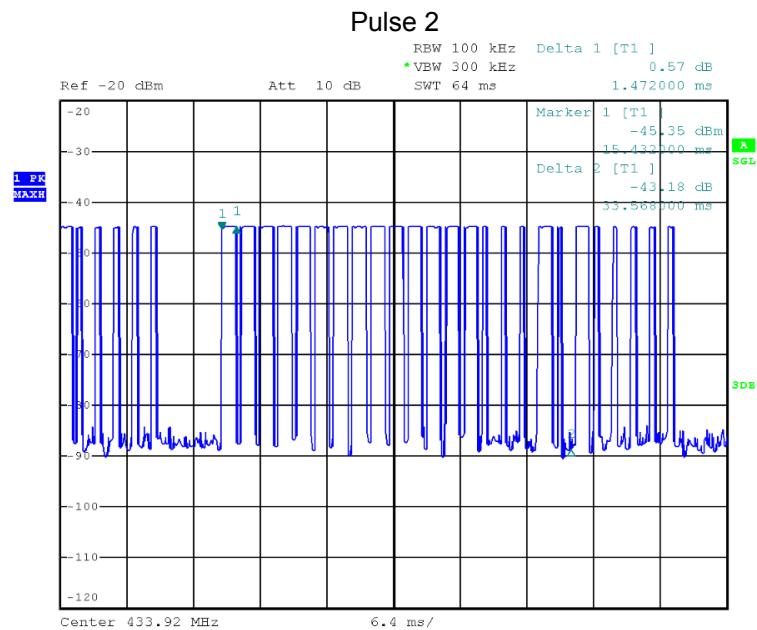

FCC Part15.231 (a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2)A transmitter activated automatically shall cease transmission within 5 seconds after activation.

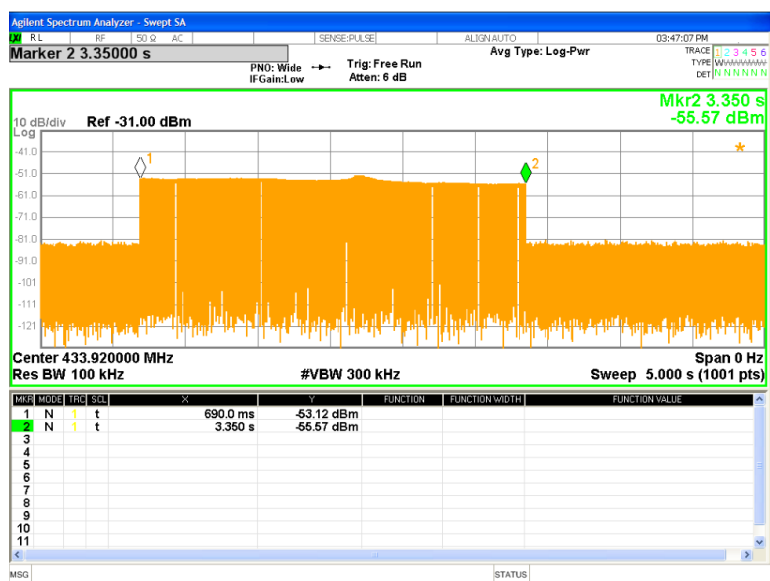

10 Emission Bandwidth

Test Requirement:	FCC Part15.231(c)
Test Method:	FCC Part15.231(c)
Limit	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

10.1 Test Procedure


1. The transmitter output (antenna port) was connected to the spectrum analyzer. EUT and its simulators are placed on a table, let EUT working in test mode, then test it.
2. The bandwidth of the fundamental frequency was measure by spectrum analyser with 10 kHz RBW and 30 kHz VBW. The 20 dB bandwidth was recorded.

10.2 Test Result

Frequency (MHz)	20dB Bandwidth Emission(kHz)	Limit (kHz)	Result
433.92	52.69	1084.8	Compliance

Limit=Center Frequency*0.25%

Test Plot

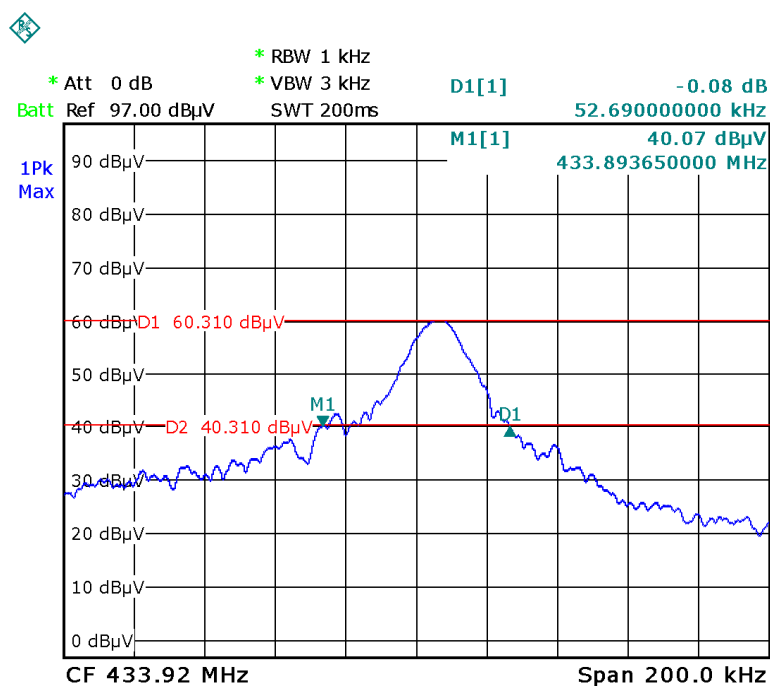


11 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one Spring antenna, the gain is -0.2 dBi. meets the requirements of FCC 15.203.

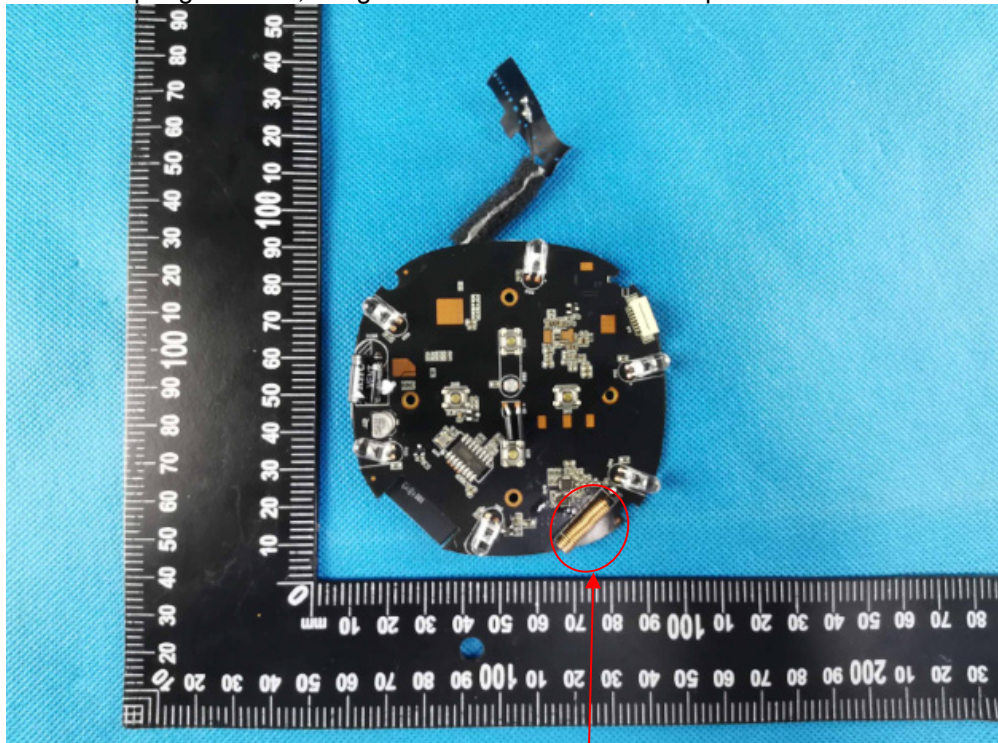

ANT

12 Photographs - Constructional Details

Note: Please refer to appendix: Appendix- R4060 -Photos.

=====End of Report=====