


QUICK START GUIDE


Solar Dual Lens Panoramic Battery Camera
(Ultra Low Power)

WIFI

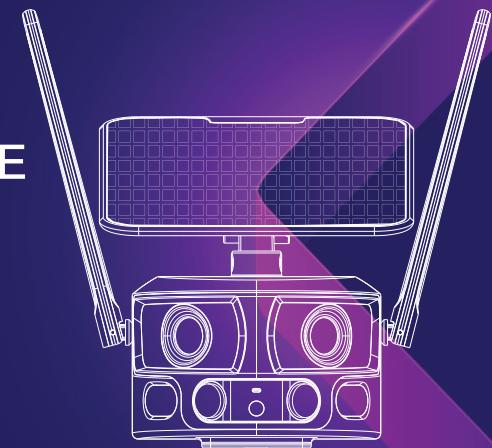

V1.0.3


1.What's Included

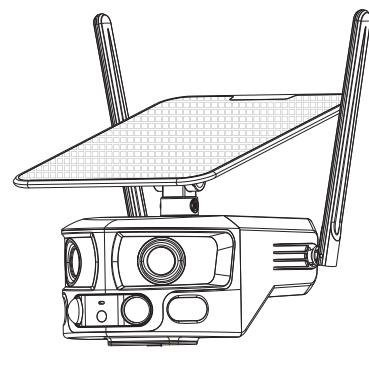


① Camera



④ TYPE-C
Charging Cable




② Camera Bracket




③ Solar Panel Bracket



⑤ Hexagon Wrench




⑥ Screw Packs




⑦ Wall-mounted
iron

2. Product Overview

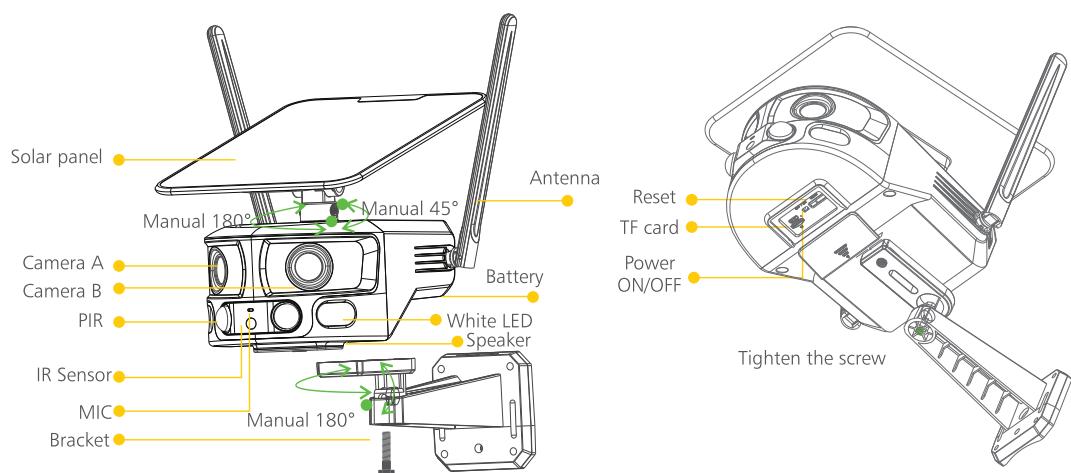


3. Application Scenarios

Put the solar panel towards the direction of maximum sunlight to get continuous power. The two wide-angle lenses will be seamlessly spliced horizontally, presenting a 180-degree panoramic surveillance video, free of wiring, full-view without blind corner.

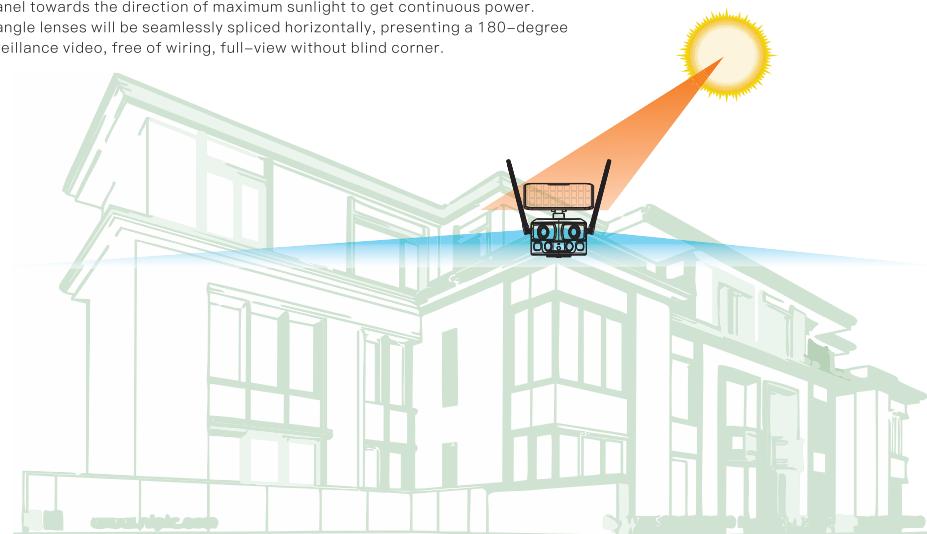


4.Boot Instructions

1 For a better use, charge the camera preferably for 10 hours before use.

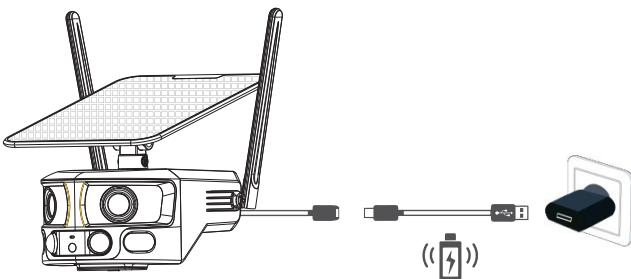

2 Connect the solar charging cable, switch on the power, Tapping and holding the reset button for 5 seconds, ready to match the network.

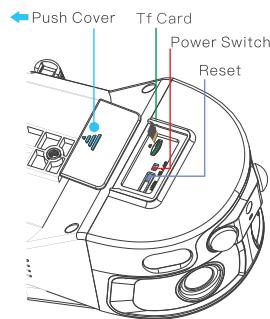

5. Download APP & Register

1. Download APP

Download the APP NIVIEW from App Store(IOS devices) or Google Play(Android device).




APP.NICEVIEWER.COM

Scan the QR code or visit website to download the APP.

2. Register


To better user experience and equipment protection, we suggest that first-time user choose verification code mode to register, use Email to register your account by APP and set the password for your confidentiality. Account and password to login.

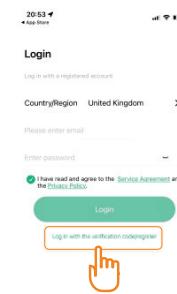

6. Configuration and Addition of WiFi Devices


3. Add Camera

Run the app, click the upper right corner “” to add.

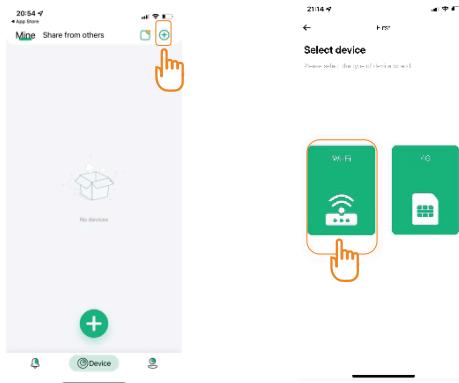


4. Choose Network Type

Select the WiFi option on the left.

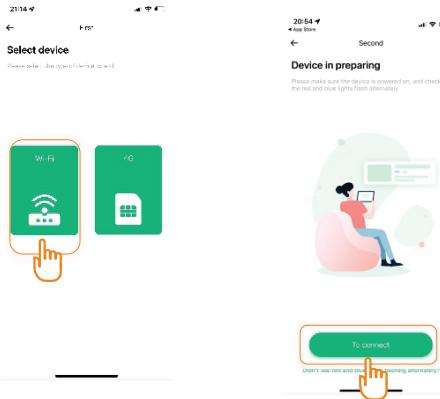


5. Confirm Camera Status

Follow the prompts to determine whether the indicator light on the front of the camera is flashing alternately in red and blue. If the indicator light flashes red and blue alternately, just click “To connect”.

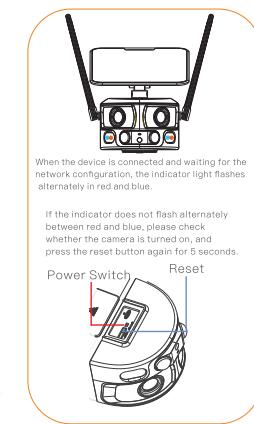

6. Enter Network Information

Click Switch WiFi to select your home WiFi SSID, and enter the password below. (In order to avoid input errors, after the input is completed, you can click the eye pattern on the right to check whether the password is entered correctly).

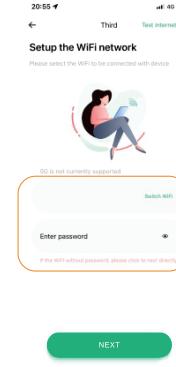


Enter the WiFi SSID and password below
Attention:
5G is not currently supported

7. Scan QR code to Add Devices

Scan the QR code of the camera body, and click “connect” after hearing the mobile phone scan prompt voice. The APP and the camera will be automatically connected to network.


Notice: Versions below iOS11 require manual connection to the camera hotspot network. Please follow the APP prompts, go to the phone settings interface to connect to the hotspot starting with NIVIEW_XXXX, then return to the APP interface to configure the network.

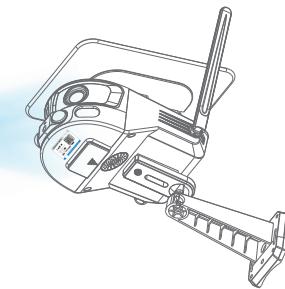

7.APP Homepage Instructions


8.Homepage Function

Introduction of camera's functions in the home page.

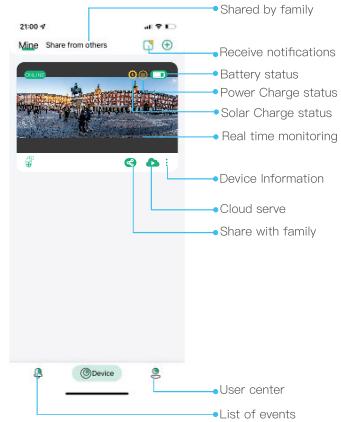


9.Sharing Function

After your family has registered the account, click to share with them.

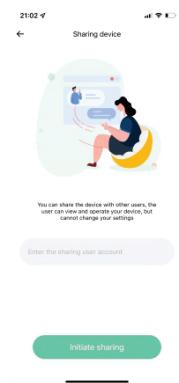

10.Do not Disturb Mode

At the top of the page Enter the Do Not Disturb mode setting. When PIR is triggered, you will get the notifications in the real time. If you do not want to receive notifications, you can turn on Do Not Disturb mode.

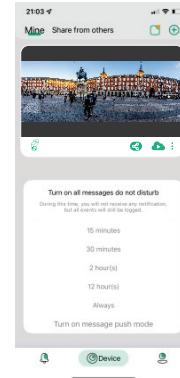


11.Viewing the Event List

Click "Event" at the bottom of the page to enter the event list to view the alarm list of the device.




12.Cloud Storage Service

Click at the homepage to purchase the cloud storage packages.

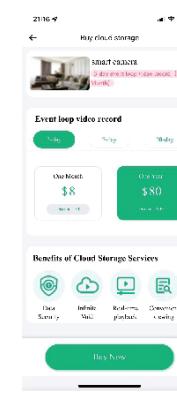


13.Manage Account Information

Click "Mine" at the bottom of the page to enter the APP page, you can modify the login password and manage all functions.

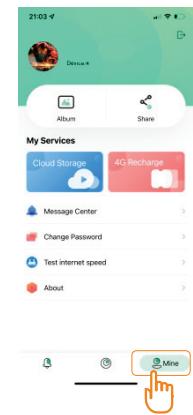


8. Real-time Monitoring and Play back


14. Real-time Monitoring

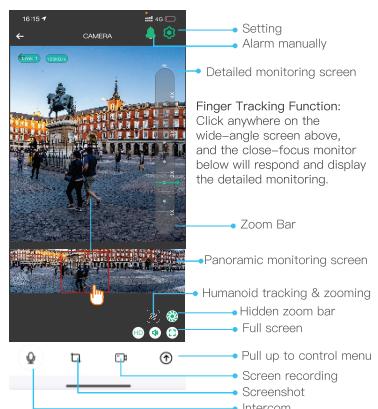

15. Video Playback of Memory Card

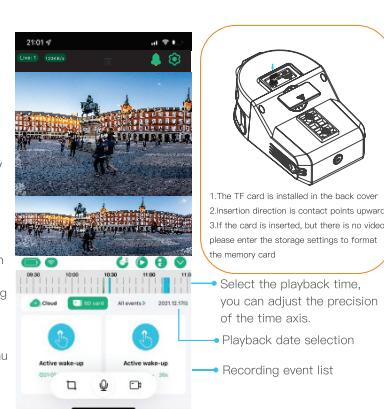


16. Video Playback of Cloud Storage

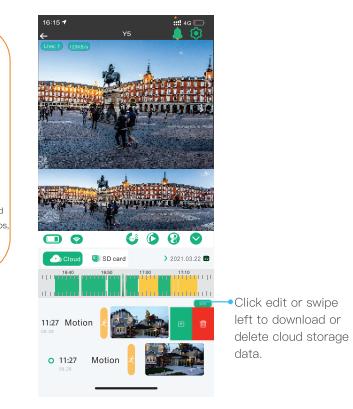

9. Control Instructions

17. PTZ Control

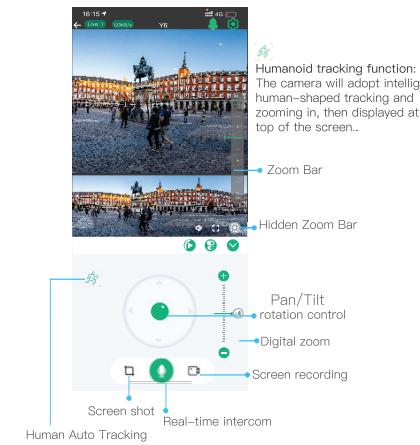

18. Device Information


Click to enter device information, check firmware version and upgrade.



19. System Settings

Click to enter the camera quick settings.

Click to enter system settings, change the camera's display mode and other system settings.

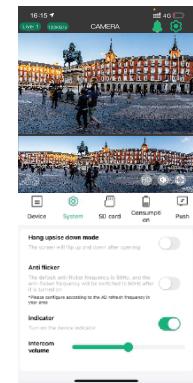

10. System Settings

20. Memory card Settings

Click  to enter memory card settings, you can check its usage status and format.




21. Alert Push Settings

Click  to enter the push settings of the camera, select the information to be accepted according to your needs.




22. Detection Settings

Click  to enter camera motion detection settings, you can set the sensitivity and detection distance adjustment.

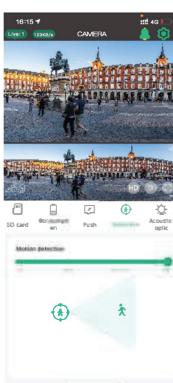

23. Power Consumption

Click  to enter power management, select the use mode according to the environment and user needs, which can better manage the use of the battery.

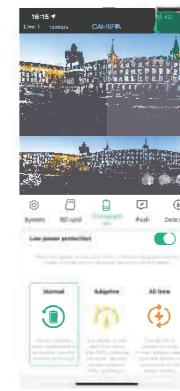

Low power protection:

It is recommended to turn on this function. When the power of the camera is lower than 10%, the camera will automatically turn off PIR and other power-consuming functions.

Normal mode:

It is the most energy-saving and efficient working mode. When the mobile phone is not remotely monitored, the camera is in standby mode. When a human body passes by, it will automatically activate the alarm and video record and push to the mobile APP at the same time.

Adaptive mode:


When the power is more than 50%, it will start recording at full time. If lower than 45%, it will work on standby.

All time mode:

The camera is working at all times, please make sure to connect the power supply to charge in this mode.

24. Sound & light settings

Click  to enter camera sound and light settings, setting working mode of infrared led, white lights and alarm.

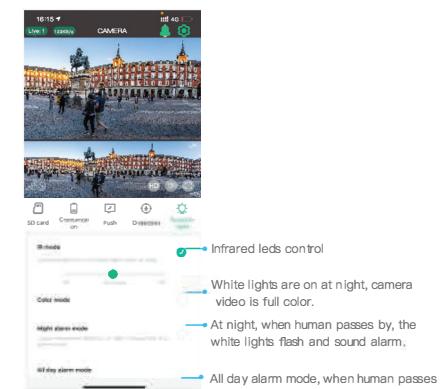

11.Wall Mounted Installation Instructions



The image stitching node of the dual lens is 2.5 meters away from the camera, Please pay attention when installing


1

Install the bracket on the wall, then fix the camera and bracket with screw, tighten the screw after adjusting the angle.

2

Fix the solar panel and the bracket together by hexagonal wrench, and adjust it to the maximum sunlight orientation according to the installation environment.

12.Ceiling Mounted Installation Instructions

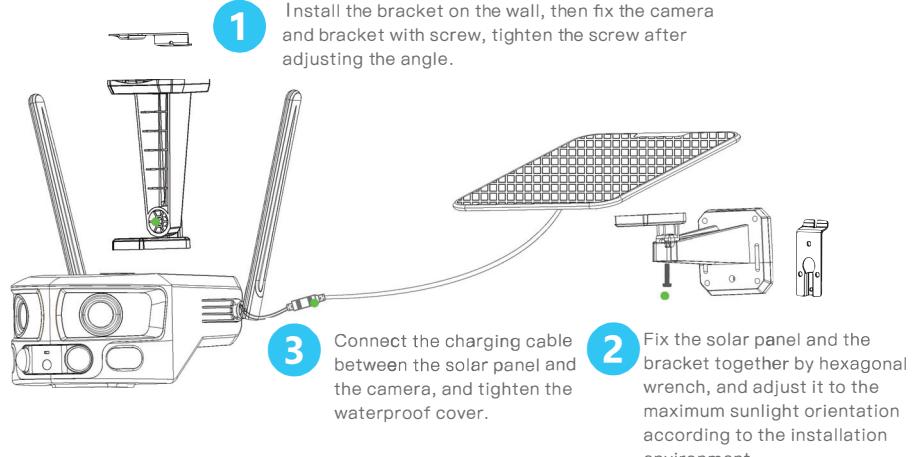

1

Install the bracket on the wall, then fix the camera and bracket with screw, tighten the screw after adjusting the angle.

3

Connect the charging cable between the solar panel and the camera, and tighten the waterproof cover.

2

Fix the solar panel and the bracket together by hexagonal wrench, and adjust it to the maximum sunlight orientation according to the installation environment.

14. Technical Analysis

1. Q: Why doesn't the Wi-Fi name appear when I connect to Wi-Fi?

A: On iOS devices with iOS11 and above, you need to turn on the "location permission" for the app in the system settings and change it to "allow when using".

2. Q: Will the camera show red lights when night vision is activated?

A: The built-in infrared LEDs make the camera only show some dim red lights when night vision is activated, but the image quality is still clear under no light environment.

3. Q: How far should the device be from the router?

A: After testing, the Wi-Fi connection distance can normally reach up to 220 meters in the open area. However, the actual situation depends on the strength of Wi-Fi and its surrounding environment (thick walls, electromagnetic devices, large metal objects will all cause interference to the Wi-Fi signals). If the camera connection signal is weak or unstable, please place the camera as close to the router as possible.

4. Q: What is the longest recording time?

A: The camera has three working modes.

The default mode is low power consumption mode. When someone passes by, the camera will automatically start recording for 15 seconds. When the person is in the monitoring range, the camera will keep recording. The built-in battery of the camera can work for 6000 wake-ups, and the solar energy supplements 250 wake-ups per hour. In theory, it can be used all the time. The second mode is the adaptive mode. When the battery is above 50%, the camera will record 24 hours. When the power is below 45%, the low-power working mode is turned on. When someone passes by, the camera will automatically start recording for 15 seconds. When the person is in the monitoring range, the camera will keep recording. The third mode is the full-time mode. In this mode, a continuous power supply is required. At full power, if there is no power supply, it can only work for 36 hours.

Technical Analysis

5. Q: How to check the video playback?

A: Click the video playback button on the homepage of the pull-up control menu, select memory card playback or cloud storage playback.

6. Q: Do I need to always connect my mobile device to any WiFi if I'd like to watch the videos?

A: No, you don't. You can use WLAN or Cellular Data to watch them only if your camera is well connected to your router's WiFi.

7. Q: What will happen when the memory card runs out of space?

A: The oldest footage will be overwritten by the latest one. Please back up the important videos timely or delete the unnecessary videos to release more space. Alternatively, you can subscribe to a cloud plan.

8. Q: What should I do if the WiFi connection failed?

A: * Please make sure your camera is connecting to a 2.4GHz WiFi, not a 5GHz WiFi.

* Move the camera and your mobile device closer to your router when connecting.

* Check if the WiFi password you entered was wrong or if there are special symbols in the password.

* Make sure the power of your camera is enough and your router did not disconnect power.

9. Q: Why does the camera disconnect to WiFi sometimes?

A: * Please check the network connection of your mobile device and the router.

* If the camera can't receive a strong signal, please try to move your router closer to the camera, or use a WiFi extender.

* Make sure the power of your camera is enough and your router is connected to power.

10. Q: How many cameras can I connect to the same account?

A: You can add 50 cameras, but we recommend adding up to 10 devices for a better experience.

11. Q: How many accounts can a camera share with?

A: 8 accounts.

Technical Analysis

About batteries and solar power

This camera adopts advanced low-power technology. If no motion is detected, the camera will enter sleep mode. After being fully charged, if the camera contains a 18000mAh battery, it can be awakened 6000 times by detecting human movement. If it works for 15 seconds at a time and is charged by solar energy, when the sun is full, the replenished power can be used for 300 wake-ups per hour.

Tips:

If the camera is woken up frequently or detects the movements of human body for many times, the power of the camera will be consumed quickly. Charging the camera regularly is recommended. The battery in the camera can be charged for 500 times. If we charge the camera once a week, the life span of the battery can extend more than 9 years.

The recommended operating temperature of the camera is 14°F~122°F(~10°C~50°C). Battery performance may drop at low temperatures. At -4°F(~20°C), the battery may drain in short time, or even may not charge. It will work normally as the temperature rises.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Exposure Warning Statements:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.