

Test Plot 1#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2437$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 39.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2437 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.109 W/kg

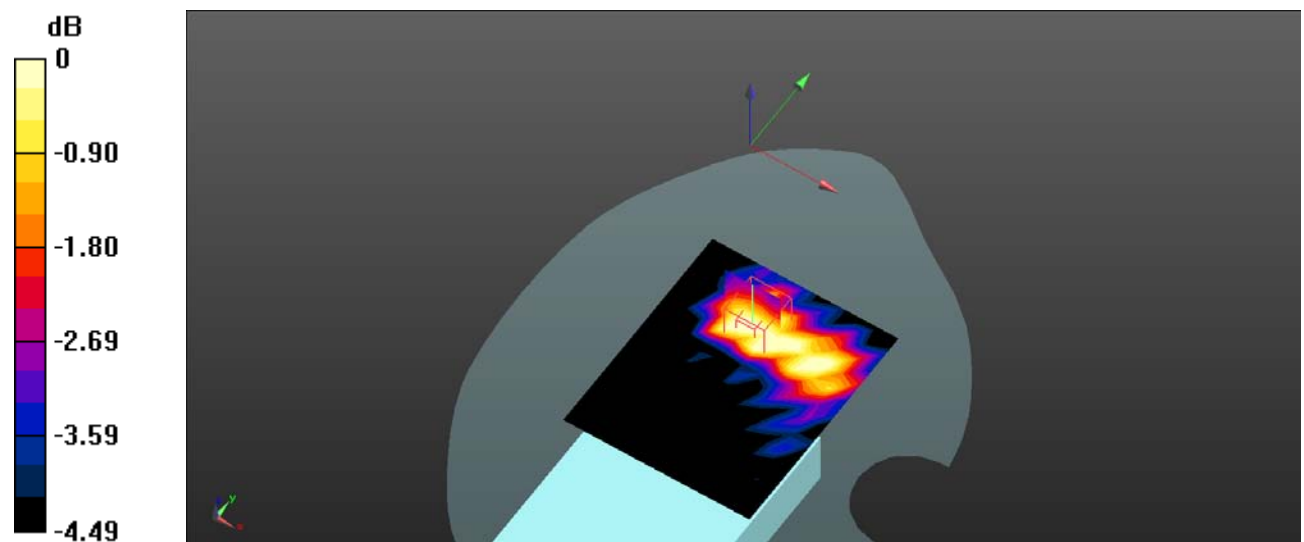
Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.485 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.0861 W/kg



0 dB = 0.0861 W/kg = -10.65 dBW/kg

Test Plot 2#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2437$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 39.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2437 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.223 W/kg

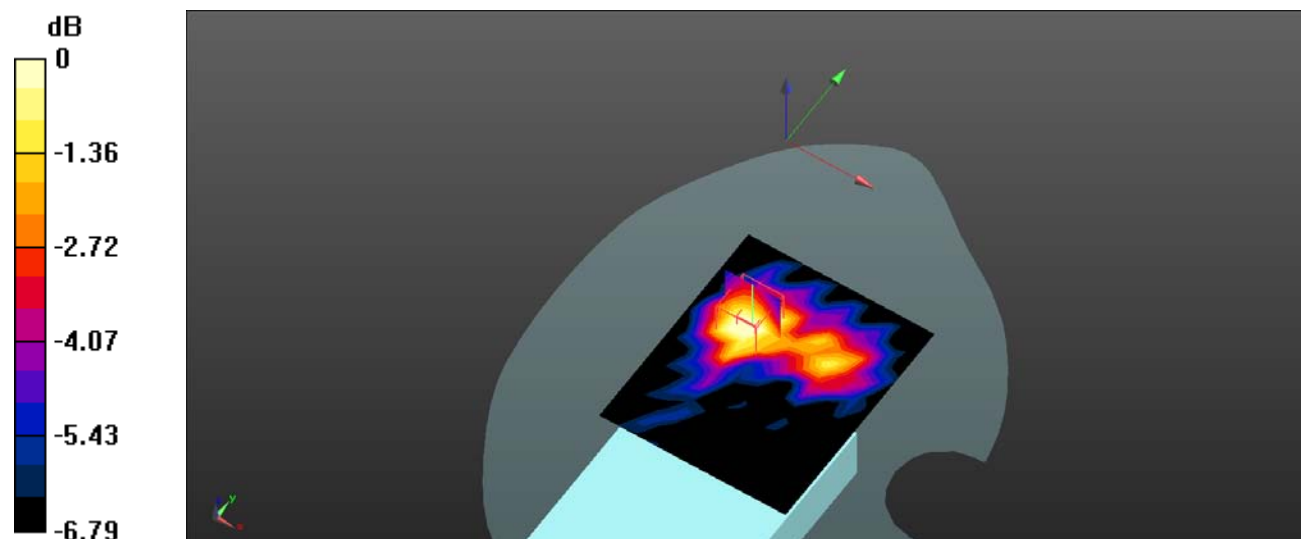
Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.702 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.171 W/kg



0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Plot 3#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2437 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 39.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2437 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.173 W/kg

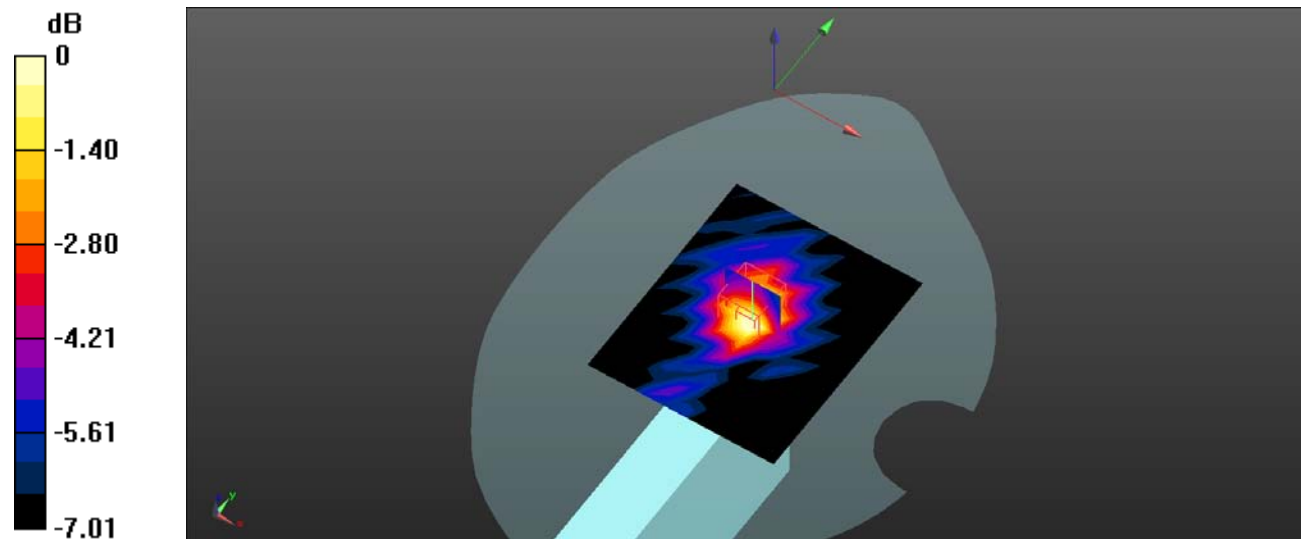
Body Right/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.916 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.139 W/kg



0 dB = 0.139 W/kg = -8.57 dBW/kg

Test Plot 4#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

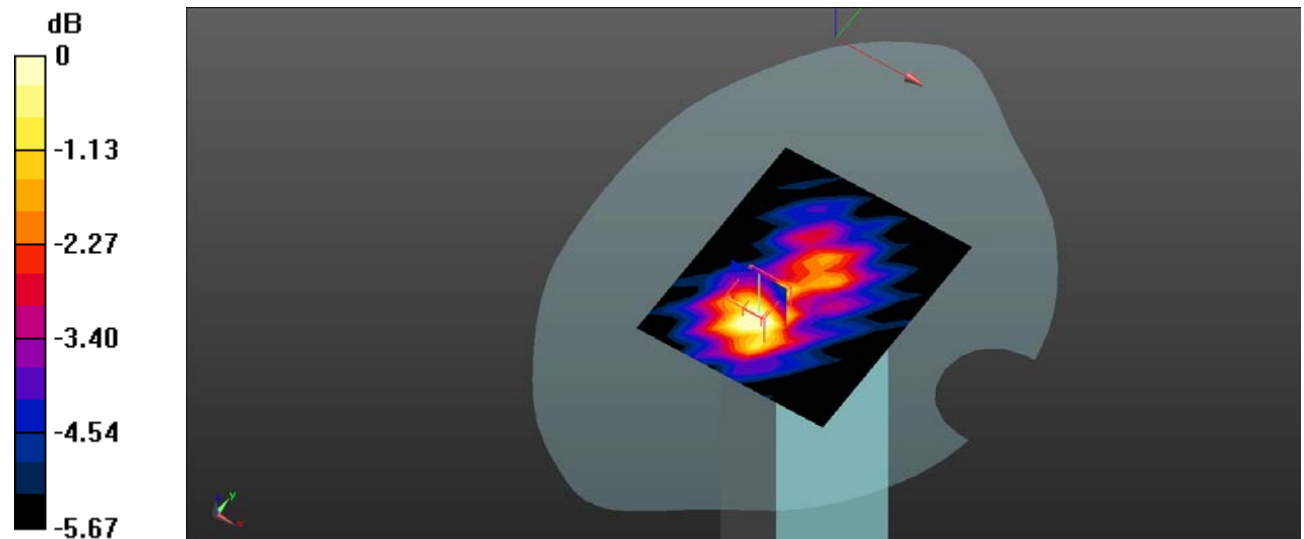
Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2437 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 39.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2437 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.102 W/kg **Body Bottom/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.871 V/m ; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.0870 W/kg **SAR(1 g) = 0.078 W/kg ; SAR(10 g) = 0.057 W/kg** Maximum value of SAR (measured) = 0.0845 W/kg 0 dB = 0.0845 W/kg = -10.73 dBW/kg

Test Plot 5#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

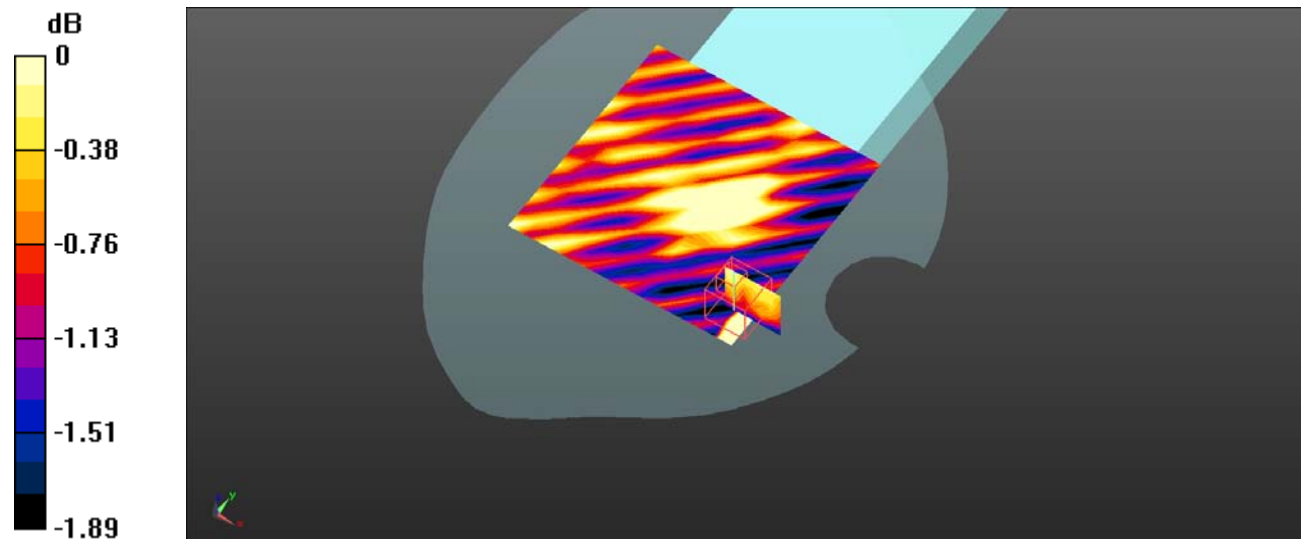
Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2437 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 39.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2437 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 802.11b Mid/Area Scan (13x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.102 W/kg **Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.067 V/m ; Power Drift = -0.18 dB Peak SAR (extrapolated) = 0.0460 W/kg **SAR(1 g) = 0.043 W/kg ; SAR(10 g) = 0.041 W/kg** Maximum value of SAR (measured) = 0.0462 W/kg 0 dB = 0.0462 W/kg = -13.35 dBW/kg

Test Plot 6#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

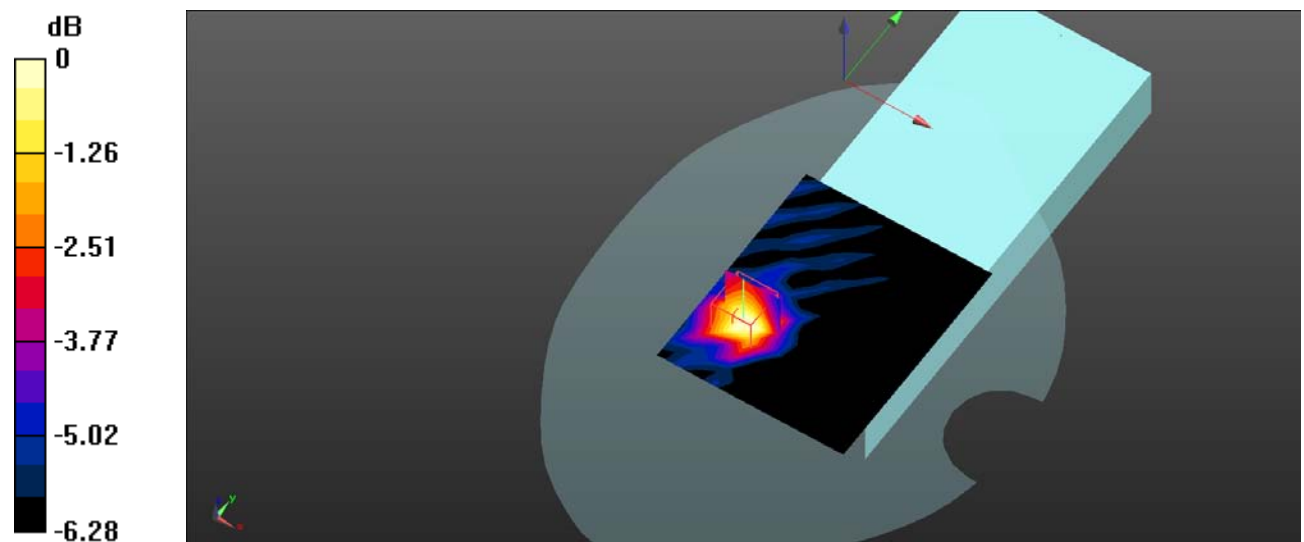
Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2437 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 39.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2437 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b Mid 2/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.143 W/kg **Body Back/WLAN 802.11b Mid 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.583 V/m ; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.143 W/kg **SAR(1 g) = 0.126 W/kg ; SAR(10 g) = 0.091 W/kg** Maximum value of SAR (measured) = 0.136 W/kg  $0 \text{ dB} = 0.136 \text{ W/kg} = -8.66 \text{ dBW/kg}$

Test Plot 7#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

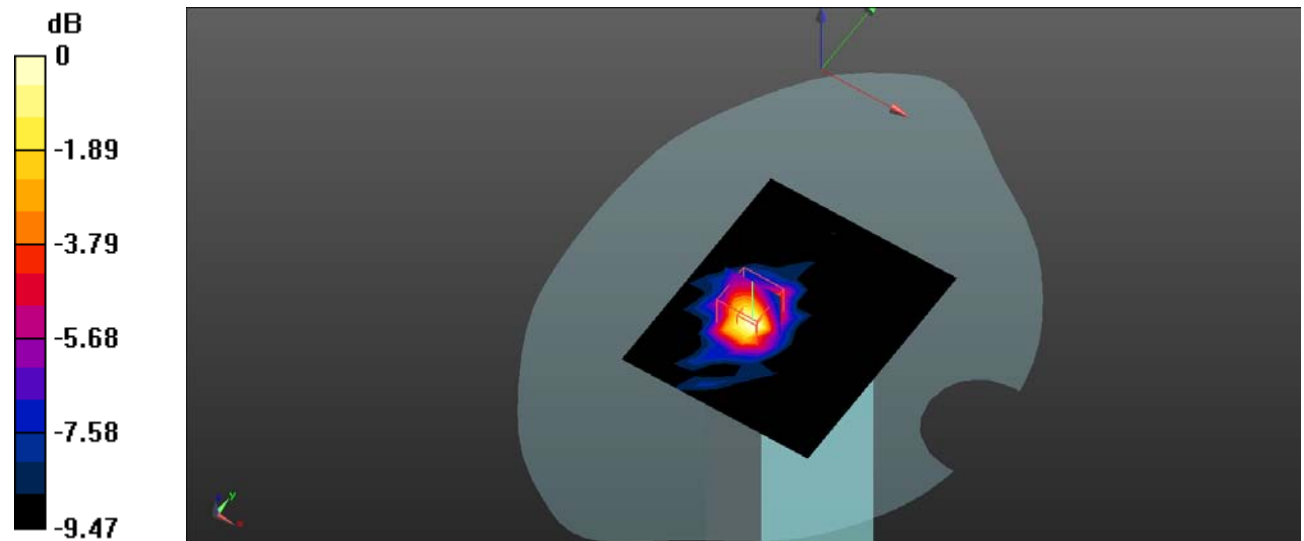
Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2437 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 39.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @ 2437 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.236 W/kg **Body Left/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.440 V/m ; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.202 W/kg **SAR(1 g) = 0.167 W/kg ; SAR(10 g) = 0.100 W/kg** Maximum value of SAR (measured) = 0.194 W/kg  $0 \text{ dB} = 0.194 \text{ W/kg} = -7.12 \text{ dBW/kg}$

Test Plot 8#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

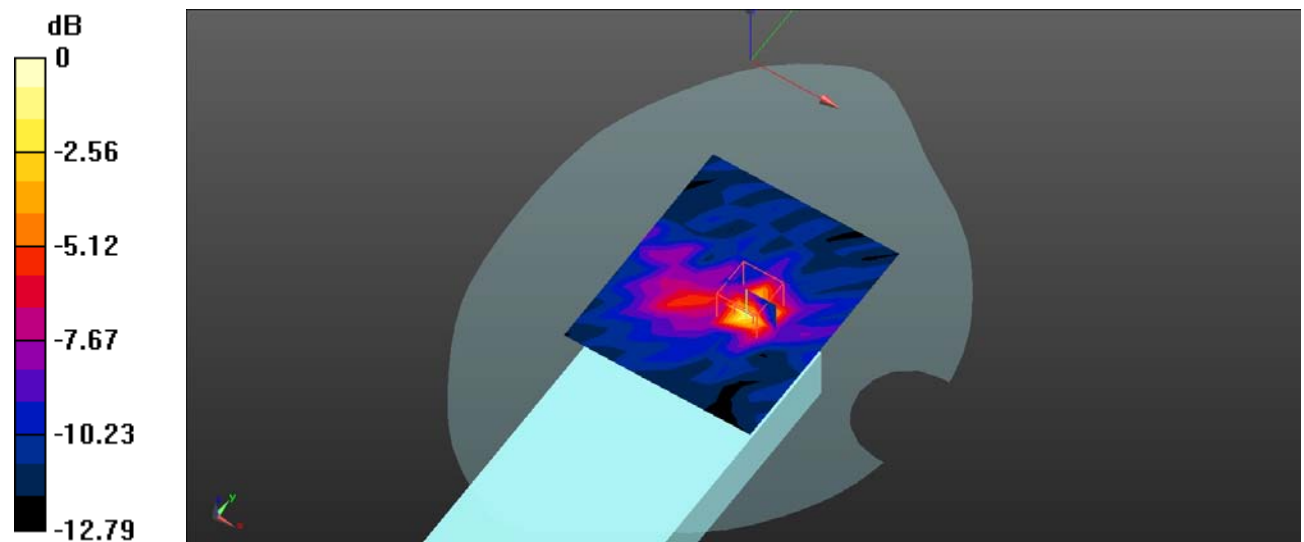
Communication System: UID 0, 5.2G WiFi (0); Frequency: 5210 MHz; Duty Cycle: 1:1.01255

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.811 \text{ S/m}$; $\epsilon_r = 34.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @ 5210 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.2G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.218 W/kg **Body Front/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.024 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.375 W/kg **SAR(1 g) = 0.247 W/kg ; SAR(10 g) = 0.114 W/kg** Maximum value of SAR (measured) = 0.375 W/kg 0 dB = 0.375 W/kg = -4.26 dBW/kg

Test Plot 9#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5210 MHz; Duty Cycle: 1:1.01255

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.811 \text{ S/m}$; $\epsilon_r = 34.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @ 5210 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.472 W/kg

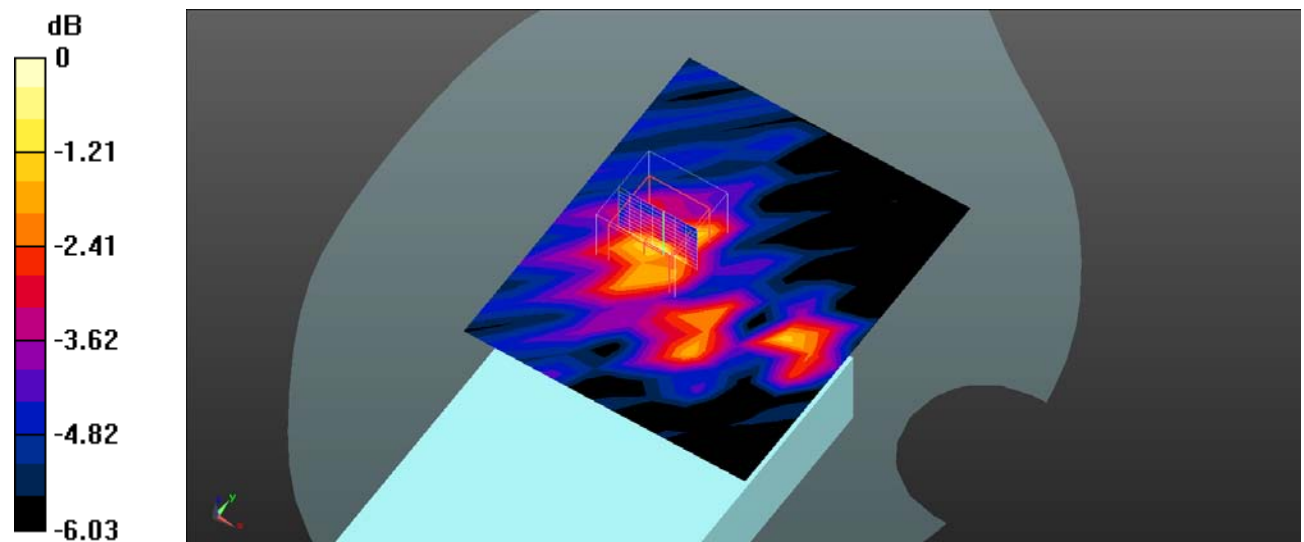
Body Back/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.365 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.553 W/kg



0 dB = 0.553 W/kg = -2.57 dBW/kg

Test Plot 10#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5210 MHz; Duty Cycle: 1:1.01255

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.811 \text{ S/m}$; $\epsilon_r = 34.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @ 5210 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 5.2G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.558 W/kg

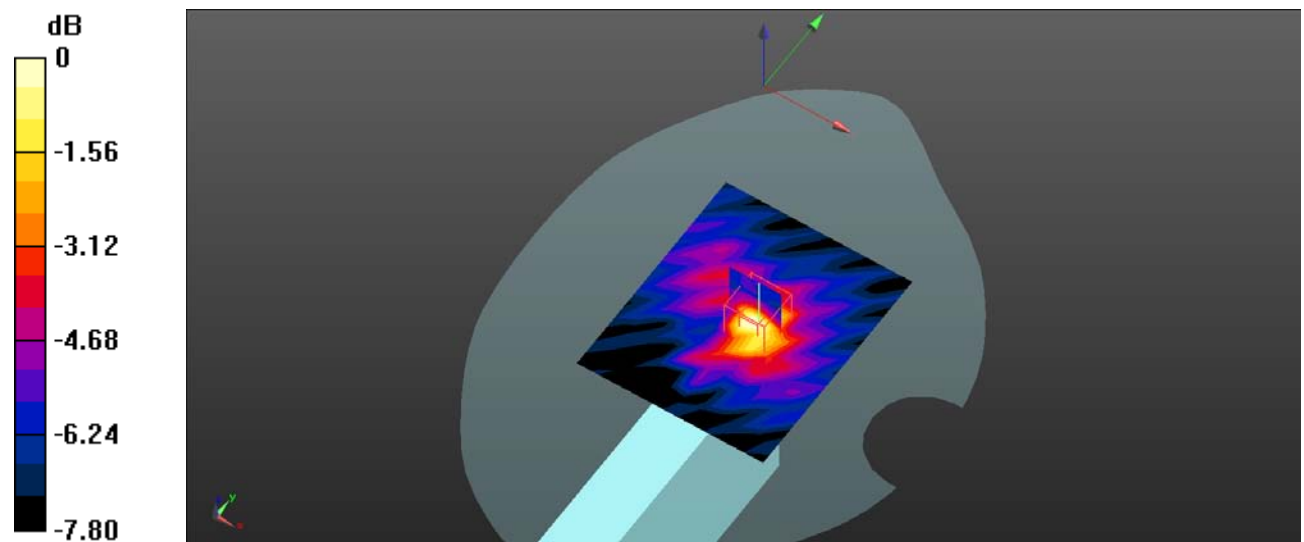
Body Right/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.388 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.525 W/kg



0 dB = 0.525 W/kg = -2.80 dBW/kg

Test Plot 11#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

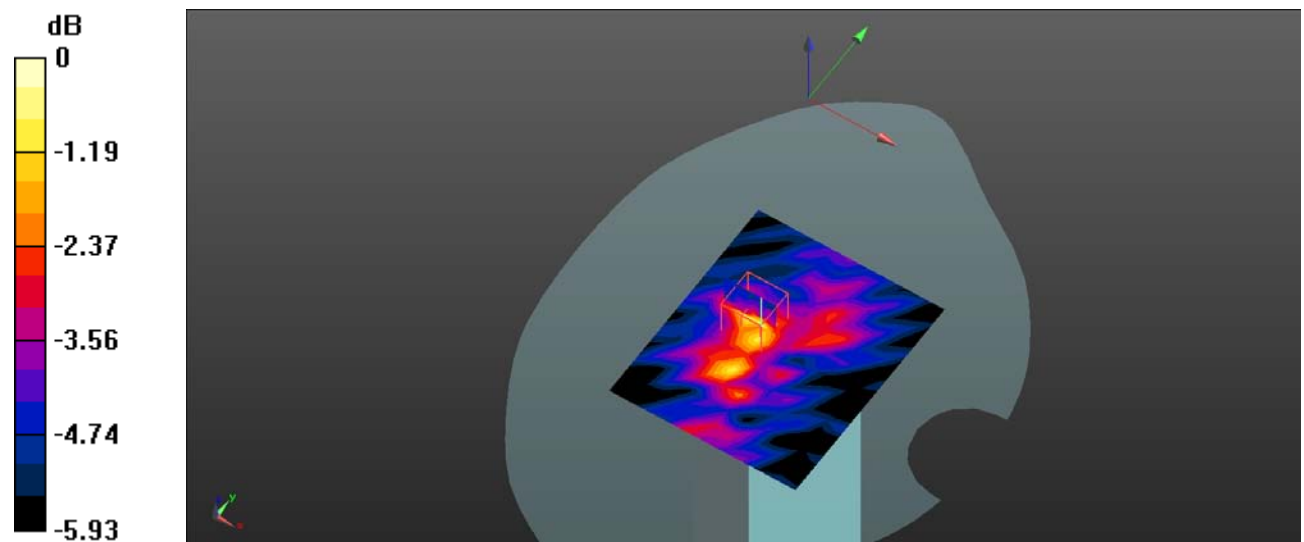
Communication System: UID 0, 5.2G WiFi (0); Frequency: 5210 MHz; Duty Cycle: 1:1.01255

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.811 \text{ S/m}$; $\epsilon_r = 34.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @ 5210 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.2G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.207 W/kg **Body Bottom/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.525 V/m ; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.229 W/kg **SAR(1 g) = 0.153 W/kg ; SAR(10 g) = 0.103 W/kg** Maximum value of SAR (measured) = 0.224 W/kg  $0 \text{ dB} = 0.224 \text{ W/kg} = -6.50 \text{ dBW/kg}$

Test Plot 12#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

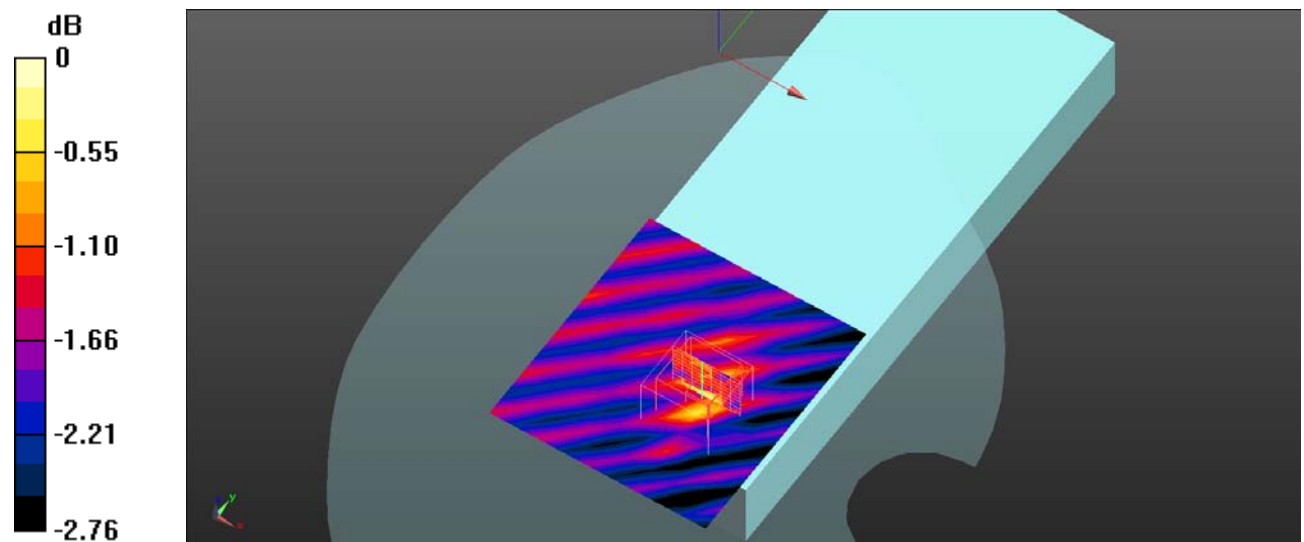
Communication System: UID 0, 5.2G WiFi (0); Frequency: 5210 MHz; Duty Cycle: 1:1.01512

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.811 \text{ S/m}$; $\epsilon_r = 34.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @ 5210 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.2G 802.11ac80 Mid/Area Scan (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.241 W/kg **Body Front/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 5.779 V/m ; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.268 W/kg **SAR(1 g) = 0.223 W/kg ; SAR(10 g) = 0.203 W/kg** Maximum value of SAR (measured) = 0.265 W/kg  $0 \text{ dB} = 0.265 \text{ W/kg} = -5.77 \text{ dBW/kg}$

Test Plot 13#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

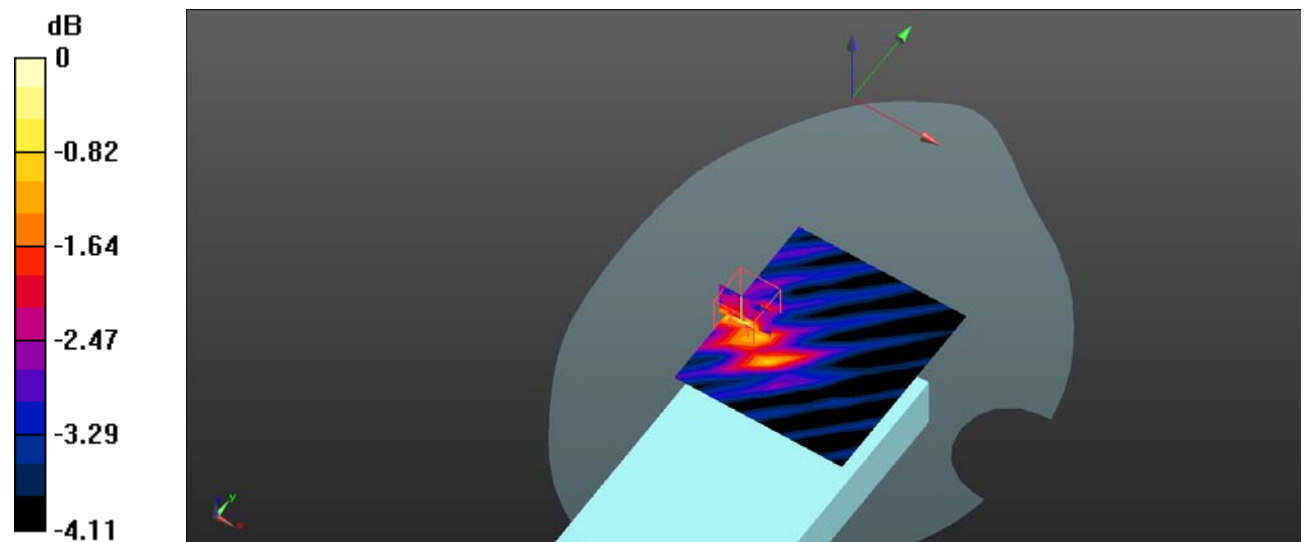
Communication System: UID 0, 5.2G WiFi (0); Frequency: 5210 MHz; Duty Cycle: 1:1.01512

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.811 \text{ S/m}$; $\epsilon_r = 34.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @ 5210 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11ac80 Mid/Area Scan (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.357 W/kg **Body Back/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 6.495 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.464 W/kg **SAR(1 g) = 0.337 W/kg ; SAR(10 g) = 0.269 W/kg** Maximum value of SAR (measured) = 0.434 W/kg 0 dB = 0.434 W/kg = -3.63 dBW/kg

Test Plot 14#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5210 MHz; Duty Cycle: 1:1.01512

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.811 \text{ S/m}$; $\epsilon_r = 34.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @ 5210 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 5.2G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.241 W/kg

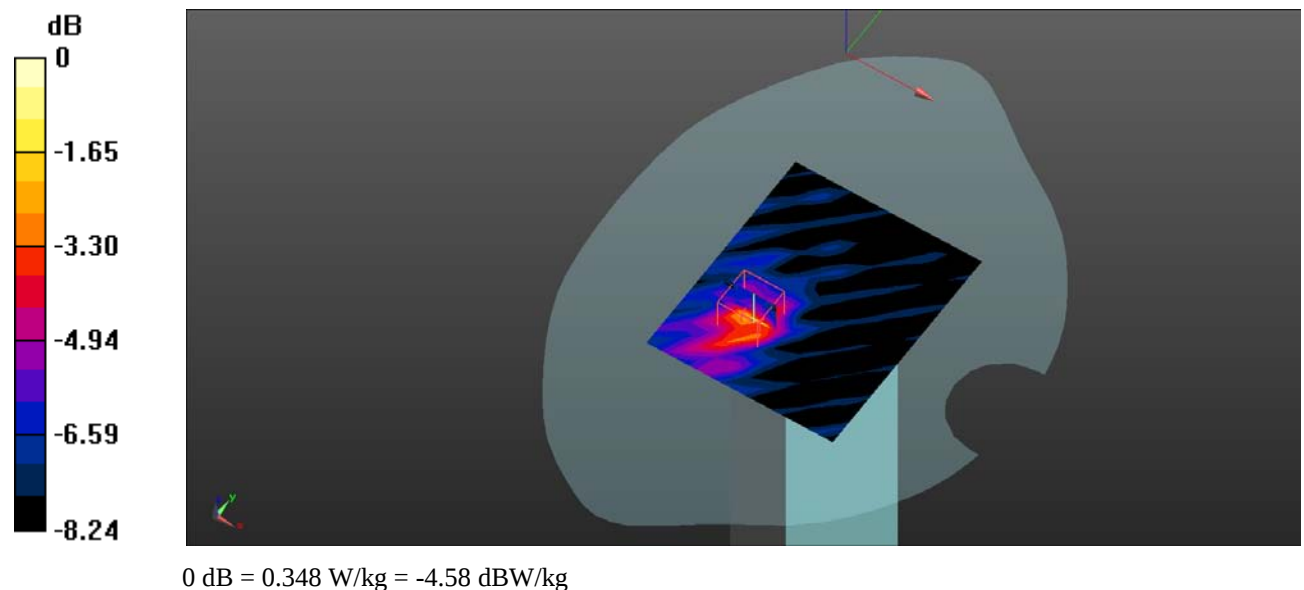
Body Left/WLAN 5.2G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.599 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.348 W/kg



Test Plot 15#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

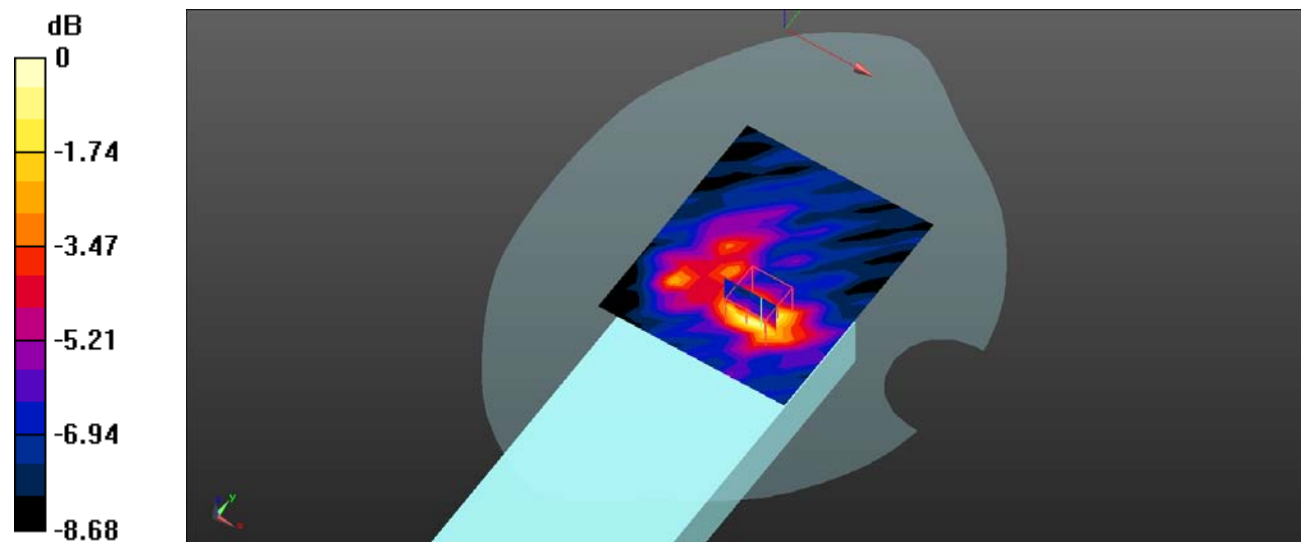
Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1.01512

Medium parameters used : $f = 5775 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 33.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.8G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.277 W/kg **Body Front/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.590 V/m ; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.358 W/kg **SAR(1 g) = 0.188 W/kg ; SAR(10 g) = 0.106 W/kg** Maximum value of SAR (measured) = 0.302 W/kg  $0 \text{ dB} = 0.302 \text{ W/kg} = -5.20 \text{ dBW/kg}$

Test Plot 16#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

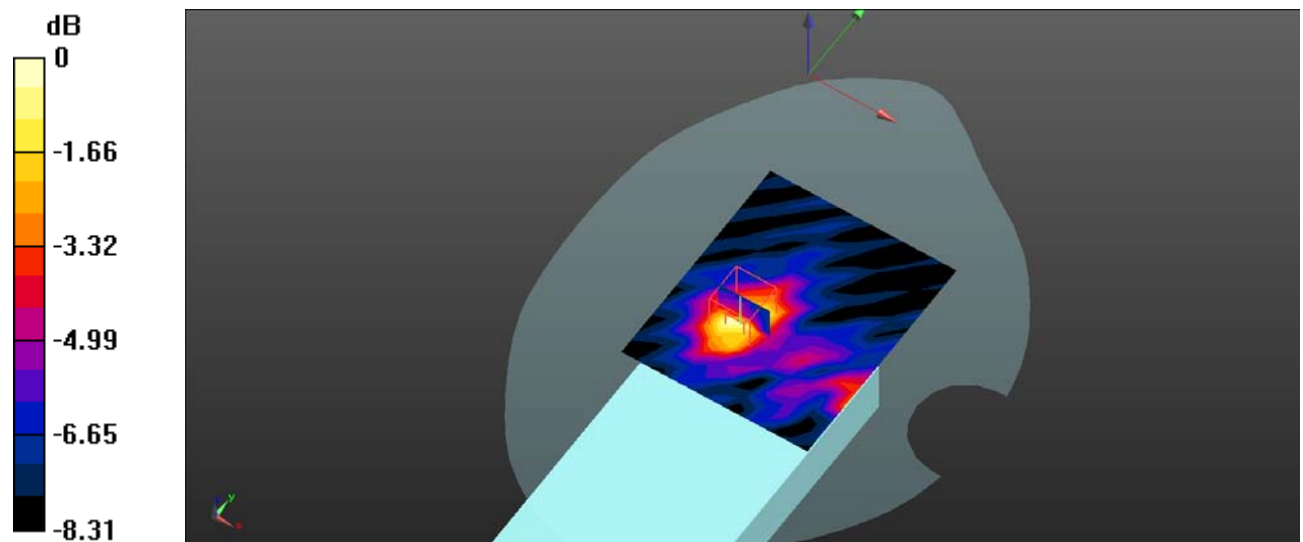
Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1.01512

Medium parameters used : $f = 5775 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 33.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.971 W/kg **Body Back/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 7.996 V/m ; Power Drift = -0.05 dB Peak SAR (extrapolated) = 1.29 W/kg **SAR(1 g) = 0.640 W/kg ; SAR(10 g) = 0.398 W/kg** Maximum value of SAR (measured) = 0.969 W/kg  $0 \text{ dB} = 0.969 \text{ W/kg} = -0.14 \text{ dBW/kg}$

Test Plot 17#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

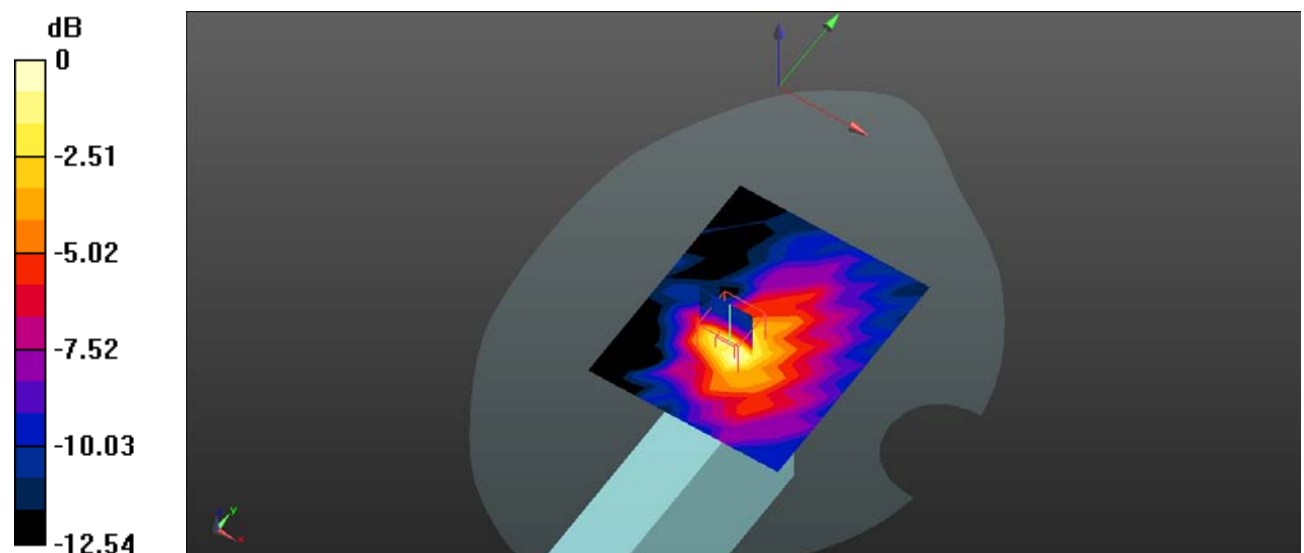
Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1.01512

Medium parameters used : $f = 5775 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 33.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 5.8G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.850 W/kg **Body Right/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 9.470 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.843 W/kg **SAR(1 g) = 0.529 W/kg ; SAR(10 g) = 0.246 W/kg** Maximum value of SAR (measured) = 0.830 W/kg  $0 \text{ dB} = 0.830 \text{ W/kg} = -0.81 \text{ dBW/kg}$

Test Plot 18#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

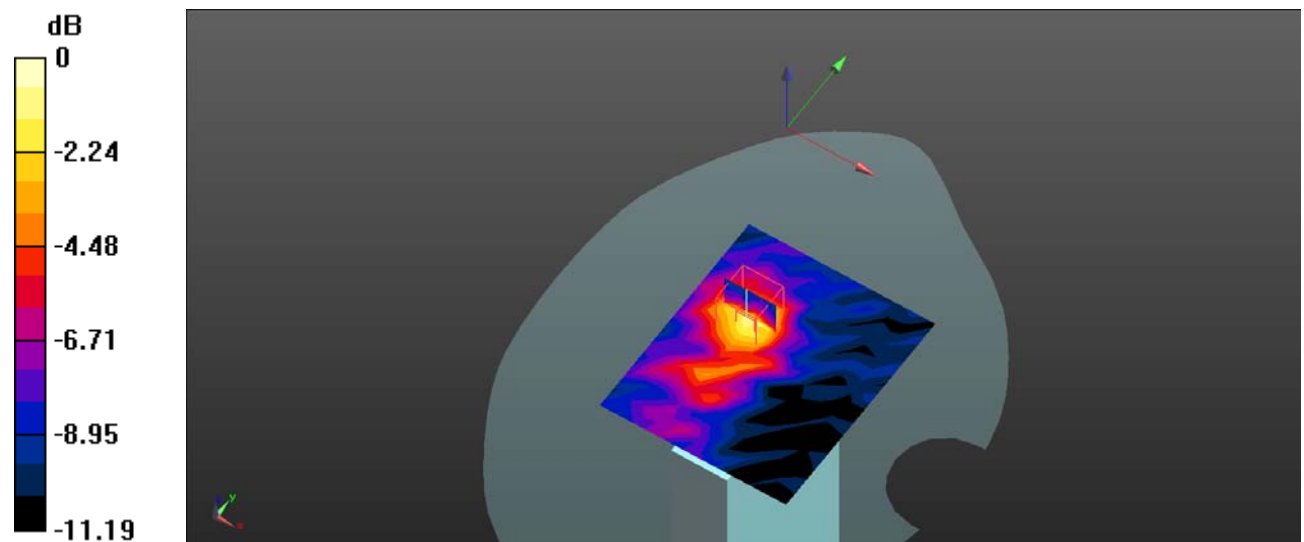
Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1.01512

Medium parameters used : $f = 5775 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 33.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.8G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.508 W/kg **Body Bottom/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.510 V/m ; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.665 W/kg **SAR(1 g) = 0.322 W/kg ; SAR(10 g) = 0.161 W/kg** Maximum value of SAR (measured) = 0.520 W/kg  $0 \text{ dB} = 0.520 \text{ W/kg} = -2.84 \text{ dBW/kg}$

Test Plot 19#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

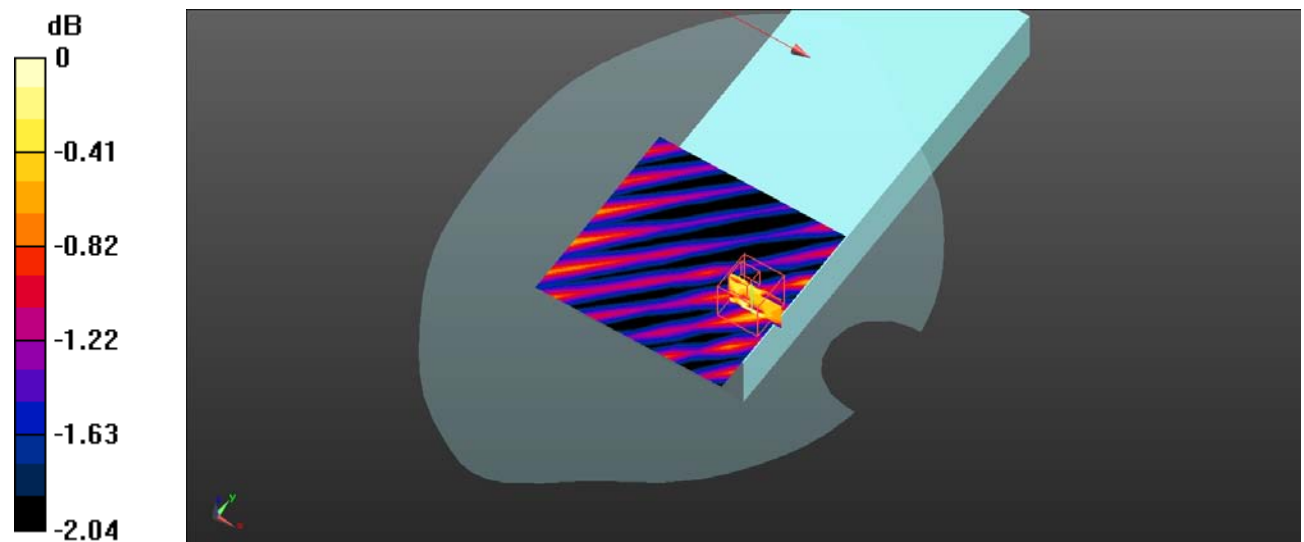
Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1.01255

Medium parameters used : $f = 5775 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 33.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.8G 802.11ac80 Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.384 W/kg **Body Front/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 7.400 V/m ; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.453 W/kg **SAR(1 g) = 0.378 W/kg ; SAR(10 g) = 0.367 W/kg** Maximum value of SAR (measured) = 0.421 W/kg 0 dB = 0.421 W/kg = -3.76 dBW/kg

Test Plot 20#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

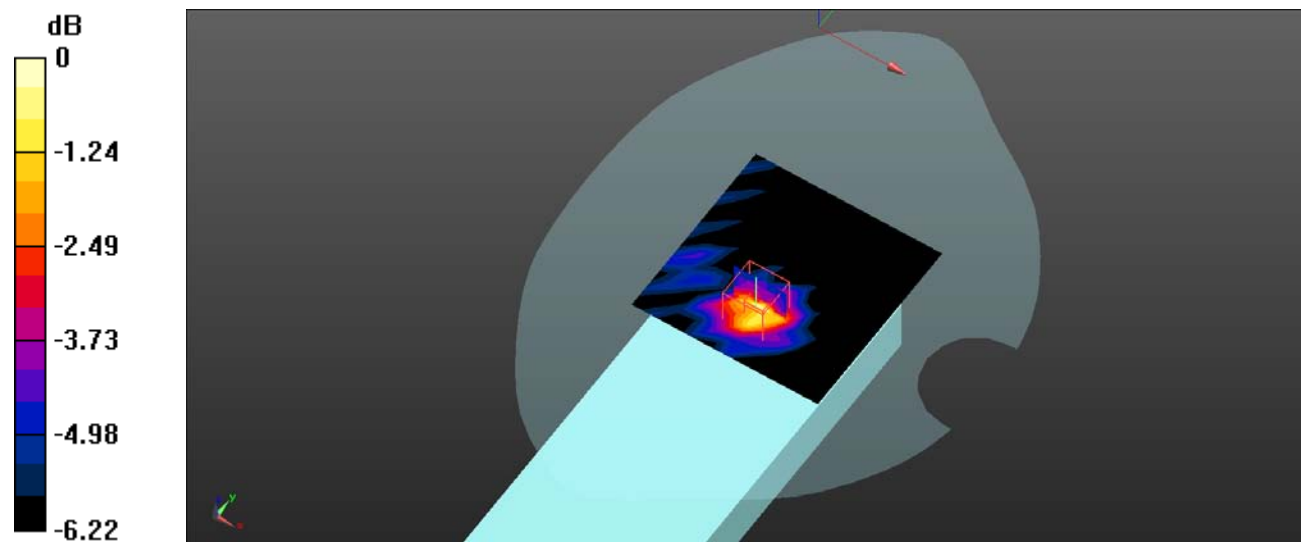
Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1.01255

Medium parameters used : $f = 5775 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 33.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11ac80 Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.15 W/kg **Body Back/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 7.316 V/m ; Power Drift = 0.12 dB Peak SAR (extrapolated) = 1.33 W/kg **SAR(1 g) = 0.693 W/kg ; SAR(10 g) = 0.442 W/kg** Maximum value of SAR (measured) = 1.18 W/kg  $0 \text{ dB} = 1.18 \text{ W/kg} = 0.72 \text{ dBW/kg}$

Test Plot 21#:**DUT: AYANEO AIR Plus; Type: Tablet Computer; Serial: 249A_1;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5775 MHz; Duty Cycle: 1:1.01255

Medium parameters used : $f = 5775 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 33.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 5.8G 802.11ac80 Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.511 W/kg

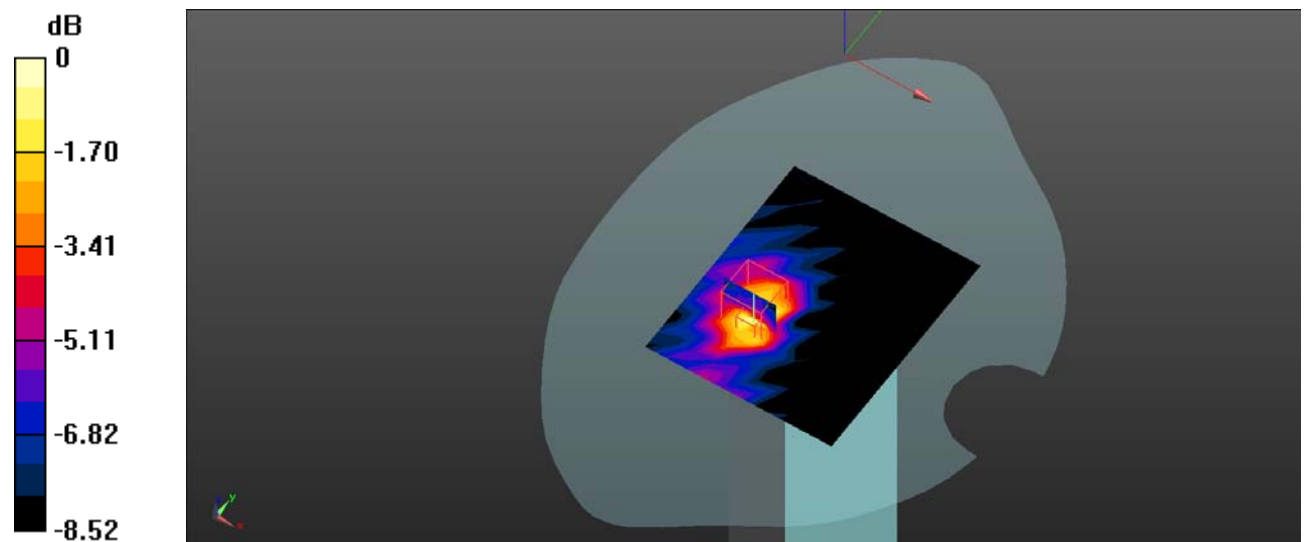
Body Left/WLAN 5.8G 802.11ac80 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.002 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.539 W/kg



0 dB = 0.539 W/kg = -2.68 dBW/kg