

TEST REPORT

Applicant Name : Shenzhen Konkr Technology Co.,Ltd
Address : Room 215, Building 22, Maker Town, No. 4109, Liuxian Avenue, Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen, China
Report Number : RA230331-15912E-RF-00F
FCC ID: 2A233-AYANEOAIRPLUS

Test Standard (s)

FCC Part 15.247

Sample Description

Product: Tablet Computer
Tested Model: AYANEO AIR Plus
Trade Mark: AYANEO
Date Received: 2023-03-31
Date of Test: 2023-05-23 to 2023-07-19
Report Date: 2023-07-20

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger.Ling

Roger.Ling
EMC Engineer

Approved By:

Candy . Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE.....	12
APPLICABLE STANDARD	12
TEST RESULT:	12
FCC §15.203-ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a)-AC LINE CONDUCTED EMISSIONS.....	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CALCULATION	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29

FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(e)-POWER SPECTRAL DENSITY	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	32
APPENDIX Wi-Fi.....	33
APPENDIX A: 6dB EMISSION BANDWIDTH.....	33
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	52
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	71
APPENDIX D: POWER SPECTRAL DENSITY	74
APPENDIX E: BAND EDGE MEASUREMENTS.....	94
APPENDIX F: DUTY CYCLE	106
APPENDIX BLE.....	126
APPENDIX A: 6dB EMISSION BANDWIDTH.....	126
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	130
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER	134
APPENDIX D: POWER SPECTRAL DENSITY	138
APPENDIX E: BAND EDGE MEASUREMENTS.....	142
APPENDIX F: DUTY CYCLE	144

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230331-15912E-RF-00F	Original Report	2023-07-20

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Tablet Computer	
Tested Model	AYANEO AIR Plus	
Frequency Range	BLE 1M/2M: 2402-2480MHz Wi-Fi: 2412-2462MHz	
Maximum Conducted Peak Output Power	BLE: 2.54dBm	
Maximum Conducted Average Output Power	Wi-Fi	
	16.66dBm(802.11b)	11.52dBm(802.11n40)
	17.07dBm(802.11g)	12.59dBm(802.11ax20)
	10.87dBm(802.11n20)	16.43dBm(802.11ax40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM, OFDMA	
Antenna Specification*	Internal Antenna (provided by the applicant)	
	BLE & WIFI ANT1: 1.45dBi	WIFI ANT2: 0.79dBi
Voltage Range	DC 11.55V from battery or DC 5V/9V/12V/15V/20V from adapter	
Sample number	2499-1(CE&RE), 2499-6(RF Conducted Test) (assigned by ATC, Shenzhen)	
Sample/EUT Status	Good condition	
Adapter information	Model: DCTPD65WUS-B1 Input: 100-240V~50/60Hz 1.6A max Output: 5V=3A, 9V=3A, 12V=3A 15V=3A, 20V=3.25A (65W max)	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, and KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.74dB
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g, 802.11n-HT20 and 802.11ax-HE20 mode was tested with Channel 1, 6 and 11.
802.11n-HT40 and 802.11ax-HE40 mode was tested with Channel 3, 6 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
...	...	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Special Accessories

N/A

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“DRTU*” was used during testing and power level as below, which provided by manufacturer.

Mode	Data Rate (Mbps)	Power Level*
802.11 b	1	18
802.11 g	6	17
802.11 n20	MCS0	9.75
802.11 n40	MCS0	9.75
BLE	1M/2M	Default

Mode	Data Rate (Mbps)	RU	Power Level*
802.11 ax20	MCS0	26	2.15
		52	5.25
		106	8.5
		242	12.125
802.11 ax40	MCS0	26	4
		52	7
		106	10
		242	13.375
		484	18

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

EUT have two antennas and support MIMO transmit for Wi-Fi mode, the SISO/MIMO have same parameter setting, the worst case MIMO was recorded in report.

The 802.11 AX mode support difference RU configuration, test the output power for the difference RU configuration, the worst case full RU was the worst select to test.

The two antenna ports have same power level setting.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SCI	Earphone	SCRC-130A	Unknown
Kingston	SD card	32GB	Unknown
Kingston	USB flash disk	Datatraveler G3	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	0.8	EUT	Adapter
Un-shielding Detachable Earphone Cable	0.8	EUT	Earphone

Block Diagram of Test Setup

For Conducted Emission:

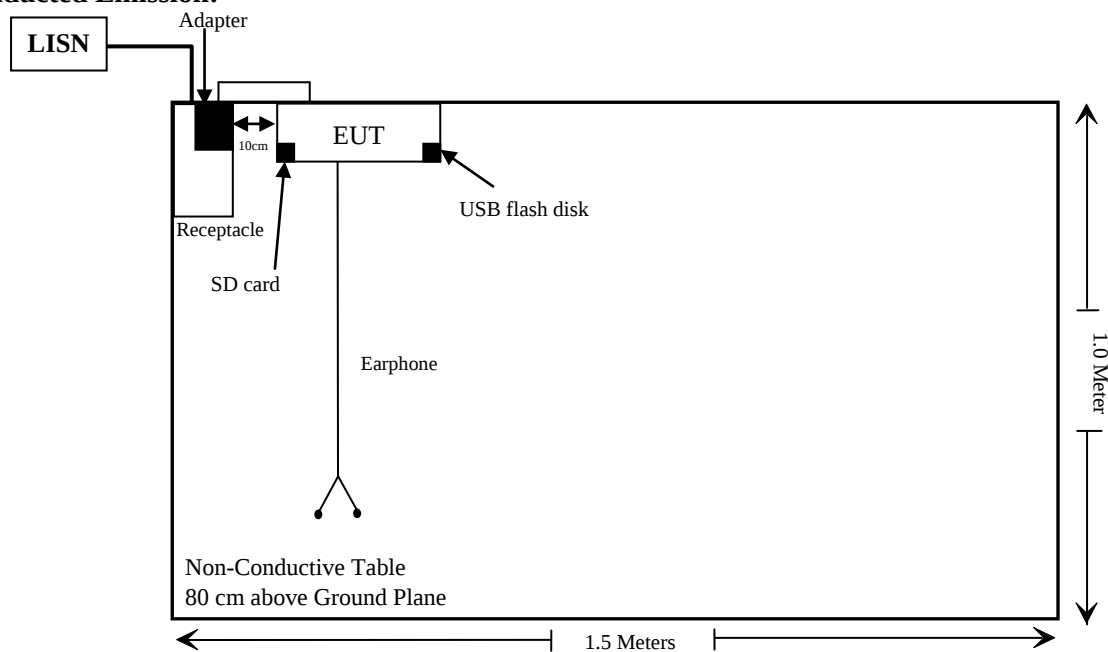

For Radiated Emission:

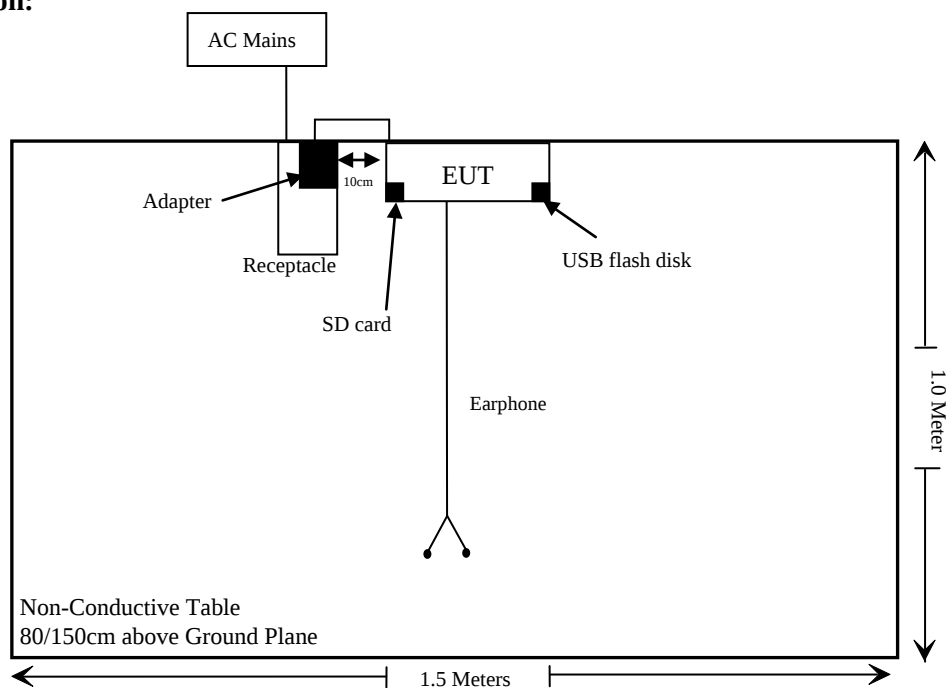

Note: the support table edge was flush with the center of turntable.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

.	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 191218 (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2023/02/14	2026/02/13
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Agilent	Power Sensor	U2021XA	MY5425003	2023/02/25	2024/02/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	
Unknown	RF Coaxial Cable	No.32	RF-02	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Test Result:

For worst case:

Mode	Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BLE	2402-2480	3	2	5	0.6	3.0	Yes

Result: No Standalone SAR test is required.

For Wi-Fi mode, please refer to the SAR report: RA230331-15912E-SA.

FCC §15.203-ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two integral antennas arrangement which were permanently attached to the EUT, one share by the BLE&2.4G Wi-Fi and one antenna only for 2.4G Wi-Fi, fulfill the requirement of this section. Please refer to the EUT photos.

Mode	Antenna gain
BLE&Wi-Fi ANT1	1.45dBi
WIFI ANT2	0.79dBi


Result: Compliant.

FCC §15.207 (a)-AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

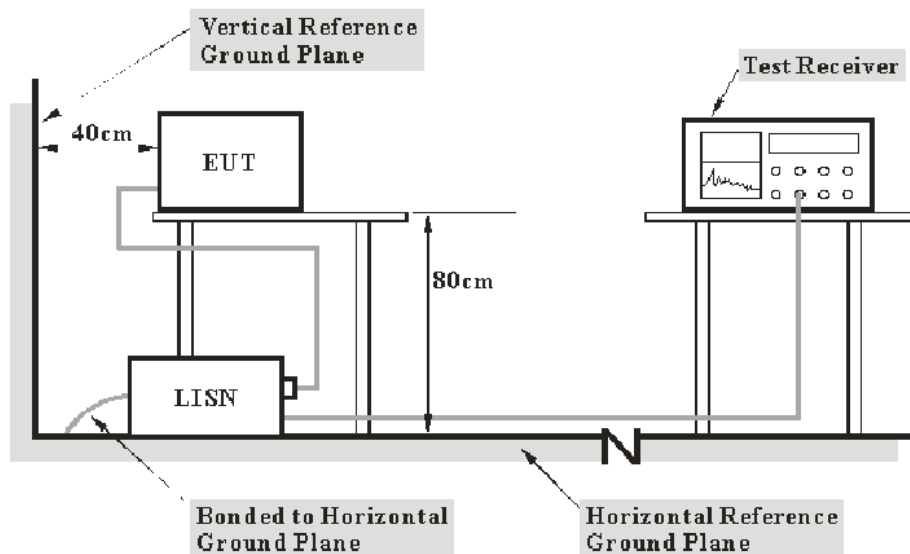

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Jerry Wu on 2023-06-29.

EUT operation mode: Transmitting (worst case 802.11g, high channel)


AC 120V/60 Hz, Line

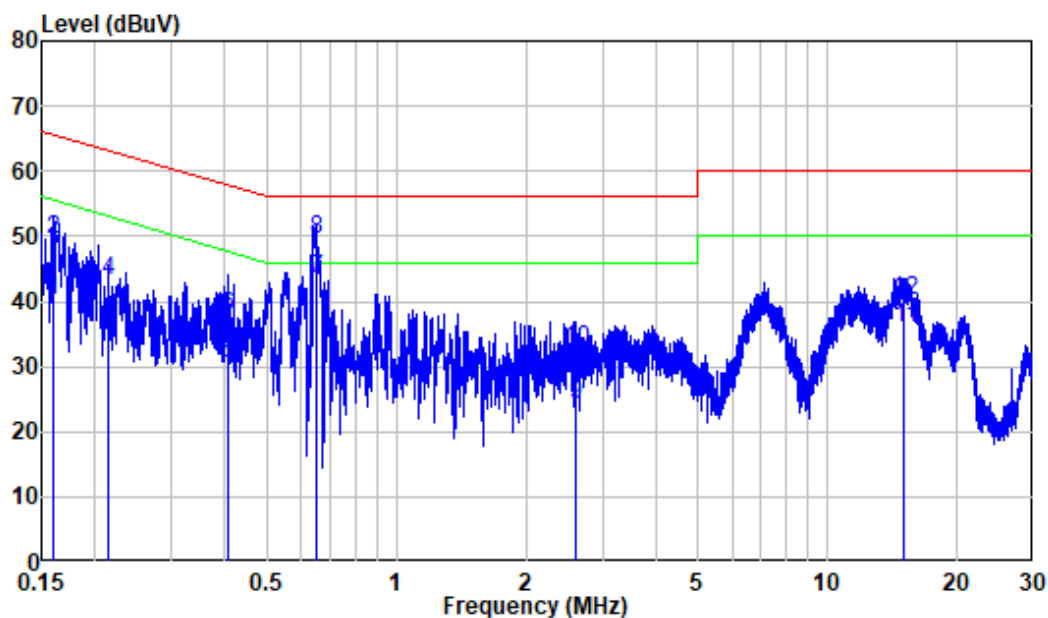

Site : Shielding Room
 Condition: Line
 Job No. : RA230331-15912E-RF
 Mode : 2.4G WIFI Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	10.36	29.64	40.00	55.45	-15.45	Average
2	0.160	10.36	39.01	49.37	65.45	-16.08	QP
3	0.214	10.30	24.77	35.07	53.05	-17.98	Average
4	0.214	10.30	32.92	43.22	63.05	-19.83	QP
5	0.406	10.49	19.90	30.39	47.73	-17.34	Average
6	0.406	10.49	27.11	37.60	57.73	-20.13	QP
7	0.650	10.65	32.80	43.45	46.00	-2.55	Average
8	0.650	10.65	38.92	49.57	56.00	-6.43	QP
9	2.608	10.46	13.76	24.22	46.00	-21.78	Average
10	2.608	10.46	22.17	32.63	56.00	-23.37	QP
11	15.046	10.18	25.60	35.78	50.00	-14.22	Average
12	15.046	10.18	30.04	40.22	60.00	-19.78	QP

AC 120V/60 Hz, Neutral

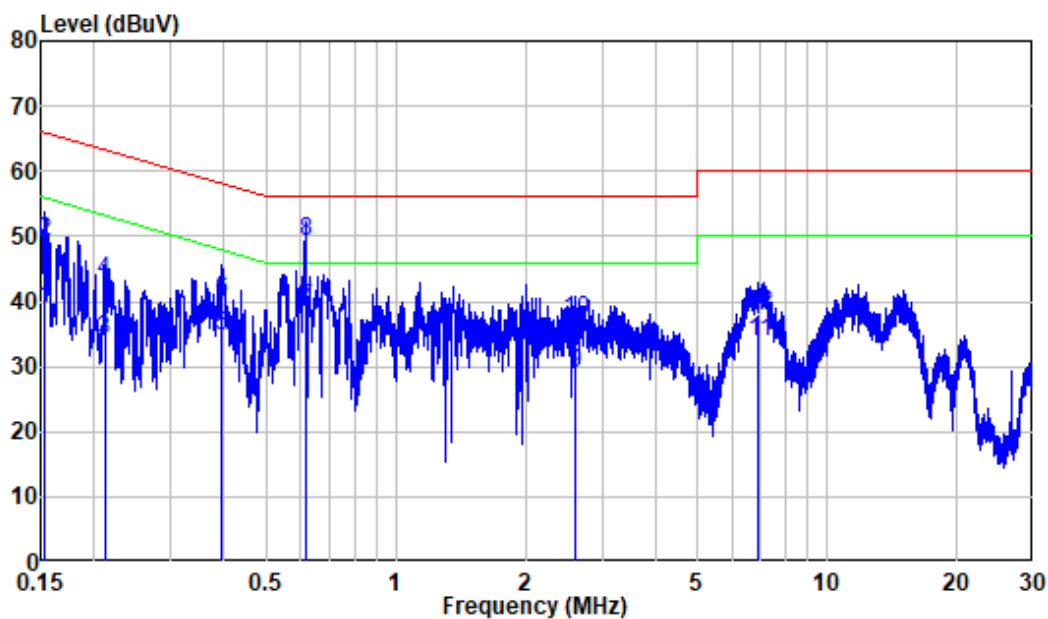

Site : Shielding Room

Condition: Neutral

Job No. : RA230331-15912E-RF

Mode : 2.4G WIFI Transmitting

Power : AC 120V 60Hz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.153	10.27	28.57	38.84	55.84	-17.00	Average
2	0.153	10.27	38.86	49.13	65.84	-16.71	QP
3	0.211	10.30	23.79	34.09	53.17	-19.08	Average
4	0.211	10.30	32.98	43.28	63.17	-19.89	QP
5	0.395	10.41	24.17	34.58	47.96	-13.38	Average
6	0.395	10.41	29.80	40.21	57.96	-17.75	QP
7	0.616	10.47	28.42	38.89	46.00	-7.11	Average
8	0.616	10.47	38.87	49.34	56.00	-6.66	QP
9	2.598	10.52	18.41	28.93	46.00	-17.07	Average
10	2.598	10.52	26.71	37.23	56.00	-18.77	QP
11	6.932	10.52	23.36	33.88	50.00	-16.12	Average
12	6.932	10.52	27.57	38.09	60.00	-21.91	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

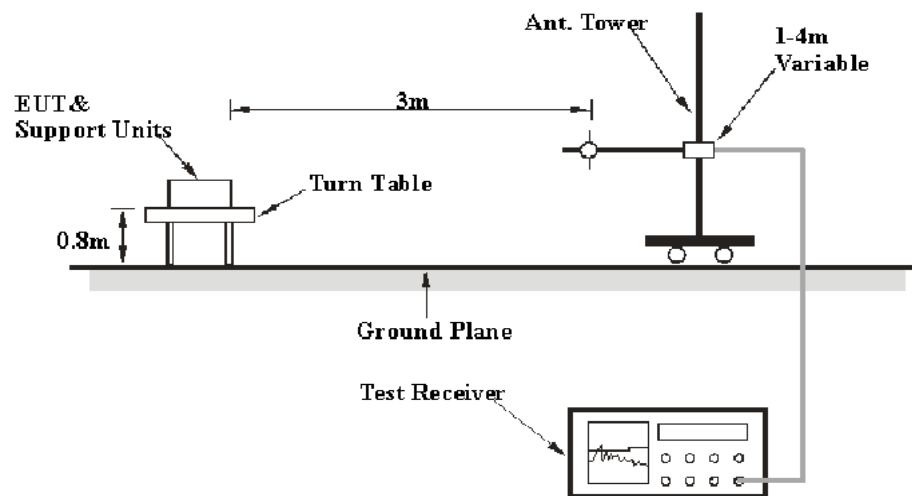

Above 1GHz:

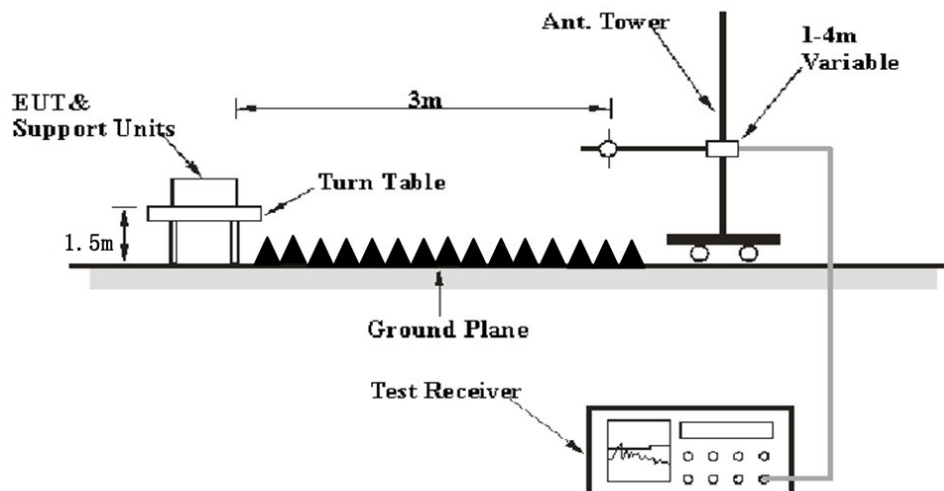

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23-24 °C
Relative Humidity:	51-56 %
ATM Pressure:	101.0 kPa

The Below 1G testing was performed by Jason Liu on 2023-06-29.

The Above 1G testing was performed by Jimi Zheng on 2023-05-23.

EUT operation mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

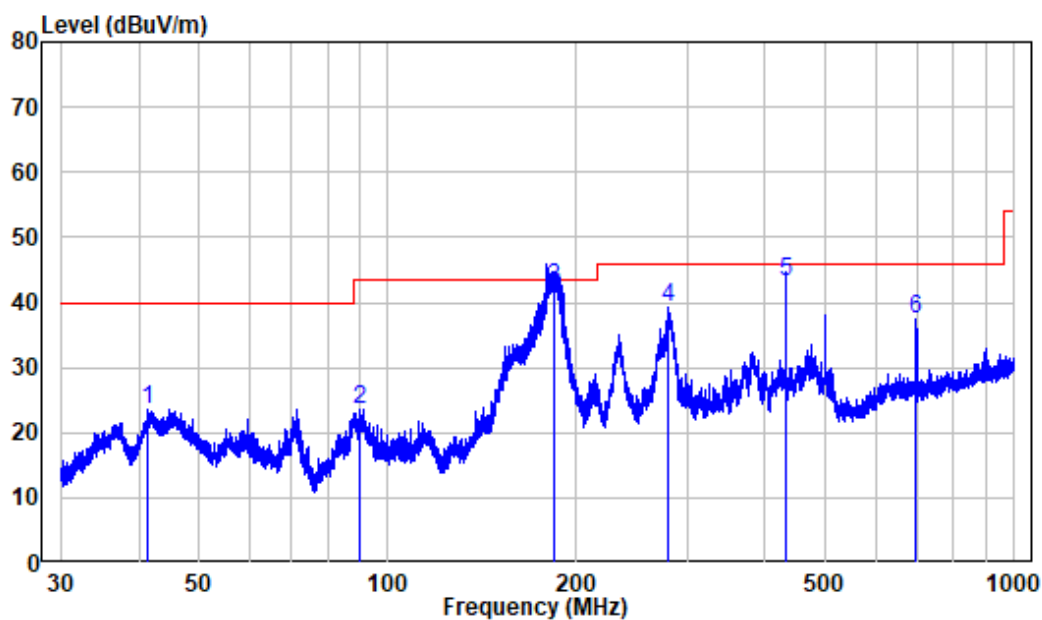30MHz-1GHz:**Worst case 2.4G WIFI 802.11g, high channel****Horizontal**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : RA230331-15912E-RF

Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.240	-10.14	33.63	23.49	40.00	-16.51	Peak
2	89.826	-14.06	37.68	23.62	43.50	-19.88	Peak
3	184.086	-12.28	54.59	42.31	43.50	-1.19	QP
4	279.288	-9.62	49.01	39.39	46.00	-6.61	Peak
5	431.977	-5.75	48.89	43.14	46.00	-2.86	QP
6	697.774	-1.59	39.16	37.57	46.00	-8.43	Peak

Vertical

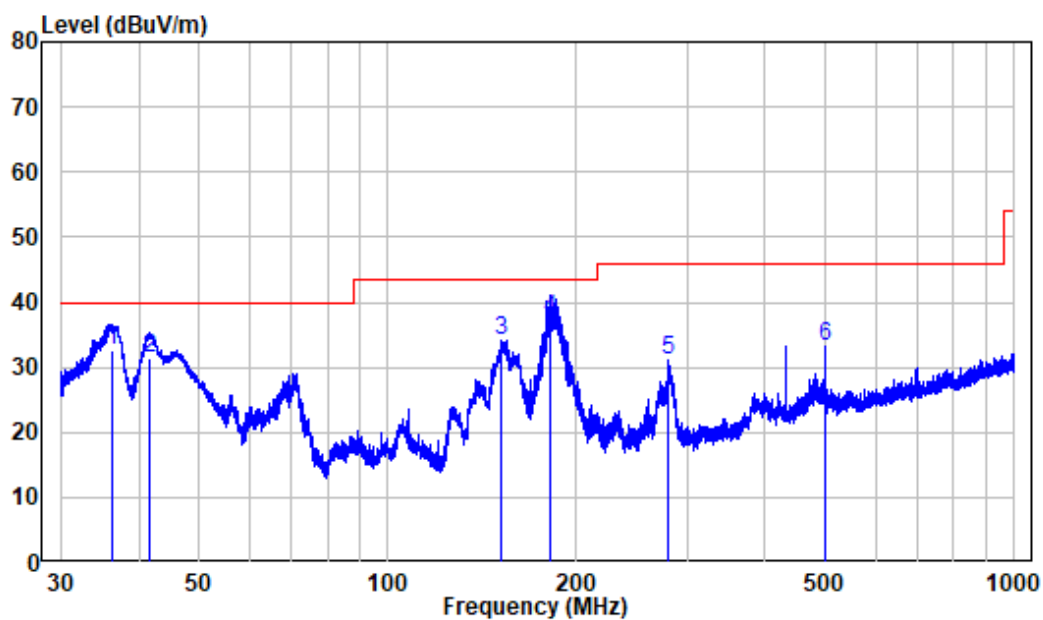

Site : chamber

Condition: 3m VERTICAL

Job No. : RA230331-15912E-RF

Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36.191	-11.16	43.77	32.61	40.00	-7.39	QP
2	41.713	-10.07	41.53	31.46	40.00	-8.54	QP
3	151.531	-15.18	49.35	34.17	43.50	-9.33	Peak
4	181.761	-12.56	49.90	37.34	43.50	-6.16	QP
5	280.761	-9.56	40.65	31.09	46.00	-14.91	Peak
6	499.863	-4.26	37.47	33.21	46.00	-12.79	Peak

1-25 GHz:**BLE:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/ m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
1M, Low Channel									
2310	52.63	PK	186	1.9	H	-10.32	42.31	74	-31.69
2310	51.75	PK	0	1.0	V	-10.32	41.43	74	-32.57
2390	52.01	PK	13	1.9	H	-10.62	41.39	74	-32.61
2390	51.64	PK	349	1.9	V	-10.62	41.02	74	-32.98
4804	50.8	PK	115	1.5	H	-5.58	45.22	74	-28.78
4804	49.29	PK	4	1.8	V	-5.58	43.71	74	-30.29
1M, Middle Channel									
4880	48.23	PK	50	1.2	H	-5.23	43	74	-31
4880	46.53	PK	294	2.1	V	-5.23	41.3	74	-32.7
1M, High Channel									
2483.5	52.4	PK	280	2.0	H	-10.46	41.94	74	-32.06
2483.5	52.07	PK	18	1.5	V	-10.46	41.61	74	-32.39
2500	52.25	PK	32	1.1	H	-10.32	41.93	74	-32.07
2500	52.03	PK	255	2.0	V	-10.32	41.71	74	-32.29
4960	49.28	PK	84	1.4	H	-4.90	44.38	74	-29.62
4960	46.6	PK	98	1.1	V	-4.90	41.7	74	-32.3
2M, Low Channel									
2310	51.45	PK	186	1.9	H	-10.32	41.13	74	-32.87
2310	51.15	PK	0	1.0	V	-10.32	40.83	74	-33.17
2390	52.17	PK	13	1.9	H	-10.62	41.55	74	-32.45
2390	52.74	PK	349	1.9	V	-10.62	42.12	74	-31.88
4804	47.99	PK	115	1.5	H	-5.58	42.41	74	-31.59
4804	49.4	PK	4	1.8	V	-5.58	43.82	74	-30.18
2M, Middle Channel									
4880	48.36	PK	50	1.2	H	-5.23	43.13	74	-30.87
4880	47.53	PK	294	2.1	V	-5.23	42.3	74	-31.7
2M, High Channel									
2483.5	51.75	PK	280	2.0	H	-10.46	41.29	74	-32.71
2483.5	51.53	PK	18	1.5	V	-10.46	41.07	74	-32.93
2500	47.62	PK	32	1.1	H	-10.32	37.3	74	-36.7
2500	48.49	PK	255	2.0	V	-10.32	38.17	74	-35.83
4960	49.08	PK	84	1.4	H	-4.90	44.18	74	-29.82
4960	47.6	PK	98	1.1	V	-4.90	42.7	74	-31.3

Wi-Fi:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	56.3	PK	133	1.9	H	-10.32	45.98	74	-28.02
2310	56.1	PK	258	1.7	V	-10.32	45.78	74	-28.22
2390	57.53	PK	334	2.1	H	-10.62	46.91	74	-27.09
2390	56.36	PK	79	2.0	V	-10.62	45.74	74	-28.26
4824	51.02	PK	216	1.8	H	-5.55	45.47	74	-28.53
4824	50.45	PK	337	1.0	V	-5.55	44.90	74	-29.10
802.11B, Middle Channel									
4874	51.96	PK	41	1.8	H	-5.29	46.67	74	-27.33
4874	48.13	PK	298	2.0	V	-5.29	42.84	74	-31.16
802.11B, High Channel									
2483.5	56.17	PK	302	2.0	H	-10.46	45.71	74	-28.29
2483.5	57.41	PK	211	1.5	V	-10.46	46.95	74	-27.05
2500	56.84	PK	253	1.5	H	-10.32	46.52	74	-27.48
2500	55.3	PK	326	1.9	V	-10.32	44.98	74	-29.02
4924	48.34	PK	92	1.2	H	-5.03	43.31	74	-30.69
4924	49.3	PK	107	1.5	V	-5.03	44.27	74	-29.73
802.11G, Low Channel									
2310	55.52	PK	109	1.2	H	-10.32	45.20	74	-28.80
2310	55.84	PK	240	2.0	V	-10.32	45.52	74	-28.48
2390	58.94	PK	274	2.0	H	-10.62	48.32	74	-25.68
2390	56.46	PK	184	1.8	V	-10.62	45.84	74	-28.16
4824	48.9	PK	189	1.3	H	-5.55	43.35	74	-30.65
4824	47.4	PK	220	2.1	V	-5.55	41.85	74	-32.15
802.11G, Middle Channel									
4874	47.64	PK	255	2.0	H	-5.29	42.35	74	-31.65
4874	47.54	PK	272	1.4	V	-5.29	42.25	74	-31.75
802.11G, High Channel									
2483.5	64.36	PK	272	1.4	H	-10.46	53.90	74	-20.10
2483.5	57.15	PK	146	1.2	V	-10.46	46.69	74	-27.31
2500	56.7	PK	17	1.6	H	-10.32	46.38	74	-27.62
2500	55.64	PK	17	1.6	V	-10.32	45.32	74	-28.68
4924	49.43	PK	180	1.8	H	-5.03	44.40	74	-29.60
4924	48.37	PK	169	1.4	V	-5.03	43.34	74	-30.66
802.11N20, Low Channel									
2310	55.96	PK	52	2.2	H	-10.32	45.64	74	-28.36
2310	55.93	PK	298	2.0	V	-10.32	45.61	74	-28.39
2390	56.18	PK	314	2.0	H	-10.62	45.56	74	-28.44
2390	57.21	PK	302	2.0	V	-10.62	46.59	74	-27.41
4824	47.85	PK	327	1.1	H	-5.55	42.30	74	-31.70
4824	47.04	PK	326	1.9	V	-5.55	41.49	74	-32.51

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N20, Middle Channel									
4874	48.22	PK	107	1.5	H	-5.29	42.93	74	-31.07
4874	48.7	PK	341	1.8	V	-5.29	43.41	74	-30.59
802.11N20, High Channel									
2483.5	74.1	PK	341	1.8	H	-10.46	63.64	74	-10.36
2483.5	46.24	AV	341	1.8	H	-10.46	35.78	54	-18.22
2483.5	64.08	PK	240	2.0	V	-10.46	53.62	74	-20.38
2500	57.04	PK	172	1.1	H	-10.32	46.72	74	-27.28
2500	58.05	PK	172	1.1	V	-10.32	47.73	74	-26.27
4924	49.42	PK	292	1.5	H	-5.03	44.39	74	-29.61
4924	48.16	PK	189	1.3	V	-5.03	43.13	74	-30.87
802.11N40, Low Channel									
2310	56.63	PK	276	1.2	H	-10.32	46.31	74	-27.69
2310	55.64	PK	24	1.8	V	-10.32	45.32	74	-28.68
2390	74.07	PK	276	1.2	H	-10.62	63.45	74	-10.55
2390	52.9	AV	276	1.2	H	-10.62	42.28	54	-11.72
2390	74.4	PK	170	2.0	V	-10.62	63.78	74	-10.22
2390	53.39	AV	170	2.0	V	-10.62	42.77	54	-11.23
4844	48.27	PK	72	1.4	H	-5.52	42.75	74	-31.25
4844	48.32	PK	54	1.0	V	-5.52	42.80	74	-31.20
802.11N40, Middle Channel									
4874	48.03	PK	10	1.8	H	-5.29	42.74	74	-31.26
4874	48.82	PK	40	1.9	V	-5.29	43.53	74	-30.47
802.11N40, High Channel									
2483.5	57.66	PK	336	1.7	H	-10.46	47.20	74	-26.80
2483.5	58.37	PK	283	2.1	V	-10.46	47.91	74	-26.09
2500	56.75	PK	174	1.6	H	-10.32	46.43	74	-27.57
2500	57.83	PK	293	1.7	V	-10.32	47.51	74	-26.49
4904	48.5	PK	293	1.7	H	-5.05	43.45	74	-30.55
4904	48.01	PK	345	1.5	V	-5.05	42.96	74	-31.04
802.11AX20, Low Channel, 242RU									
2310	56.62	PK	184	1.8	H	-10.32	46.30	74	-27.70
2310	55.77	PK	292	1.5	V	-10.32	45.45	74	-28.55
2390	72.92	PK	292	1.5	H	-10.62	62.30	74	-11.70
2390	46.92	AV	292	1.5	H	-10.62	36.30	54	-17.70
2390	58.36	PK	280	1.5	V	-10.62	47.74	74	-26.26
4824	48.14	PK	255	2.0	H	-5.55	42.59	74	-31.41
4824	47.6	PK	142	1.3	V	-5.55	42.05	74	-31.95

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX20, Middle Channel, 242RU									
4874	47.76	PK	132	1.1	H	-5.29	42.47	74	-31.53
4874	48.66	PK	146	1.2	V	-5.29	43.37	74	-30.63
802.11AX20, High Channel, 242RU									
2483.5	59.61	PK	146	1.2	H	-10.46	49.15	74	-24.85
2483.5	58.29	PK	180	1.8	V	-10.46	47.83	74	-26.17
2500	58.4	PK	169	1.4	H	-10.32	48.08	74	-25.92
2500	58.21	PK	169	1.4	V	-10.32	47.89	74	-26.11
4924	47.71	PK	183	1.7	H	-5.03	42.68	74	-31.32
4924	47.36	PK	138	1.9	V	-5.03	42.33	74	-31.67
802.11AX40, Low Channel, 484RU									
2310	55.84	PK	220	2.1	H	-10.32	45.52	74	-28.48
2310	56.47	PK	174	1.6	V	-10.32	46.15	74	-27.85
2390	78.26	PK	220	2.1	H	-10.62	67.64	74	-6.36
2390	54.36	AV	220	2.1	H	-10.62	43.74	54	-10.26
2390	64.18	PK	345	1.5	V	-10.62	53.56	74	-20.44
4844	48.53	PK	16	1.9	H	-5.52	43.01	74	-30.99
4844	48.61	PK	219	1.4	V	-5.52	43.09	74	-30.91
802.11AX40, Middle Channel, 484RU									
4874	48.03	PK	10	1.8	H	-5.29	42.74	74	-31.26
4874	48.82	PK	40	1.9	V	-5.29	43.53	74	-30.47
802.11AX40, High Channel, 484RU									
2483.5	75.07	PK	157	2.0	H	-10.46	64.61	74	-9.39
2483.5	49.25	AV	157	2.0	H	-10.46	38.79	54	-15.21
2483.5	63.12	PK	324	1.7	V	-10.46	52.66	74	-21.34
2500	65.65	PK	227	2.0	H	-10.32	55.33	74	-18.67
2500	43.7	AV	227	2.0	H	-10.32	33.38	54	-20.62
2500	57.47	PK	314	1.6	V	-10.32	47.15	74	-26.85
4904	49.15	PK	216	1.9	H	-5.05	44.10	74	-29.90
4904	48.56	PK	243	2.0	V	-5.05	43.51	74	-30.49

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected Amplitude – Limit

The other spurious emission which is in the noise floor level was not recorded.


For above 1GHz, when the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, just peak value was recorded.

1-18 GHz: (Pre-scan plots)

802.11 b Middle Channel (Worst case)
Horizontal

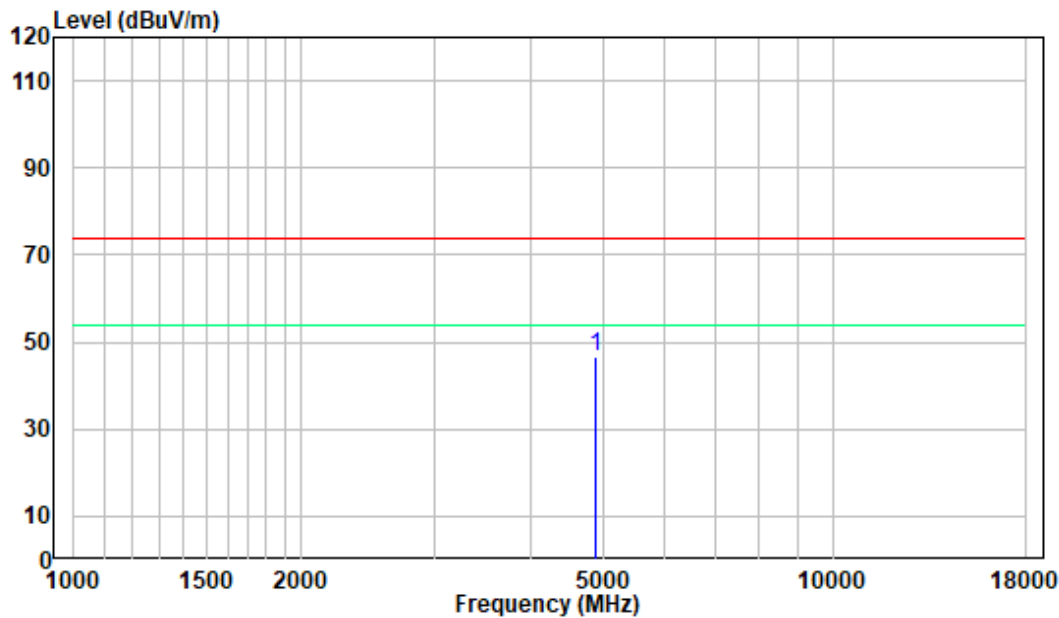


Vertical

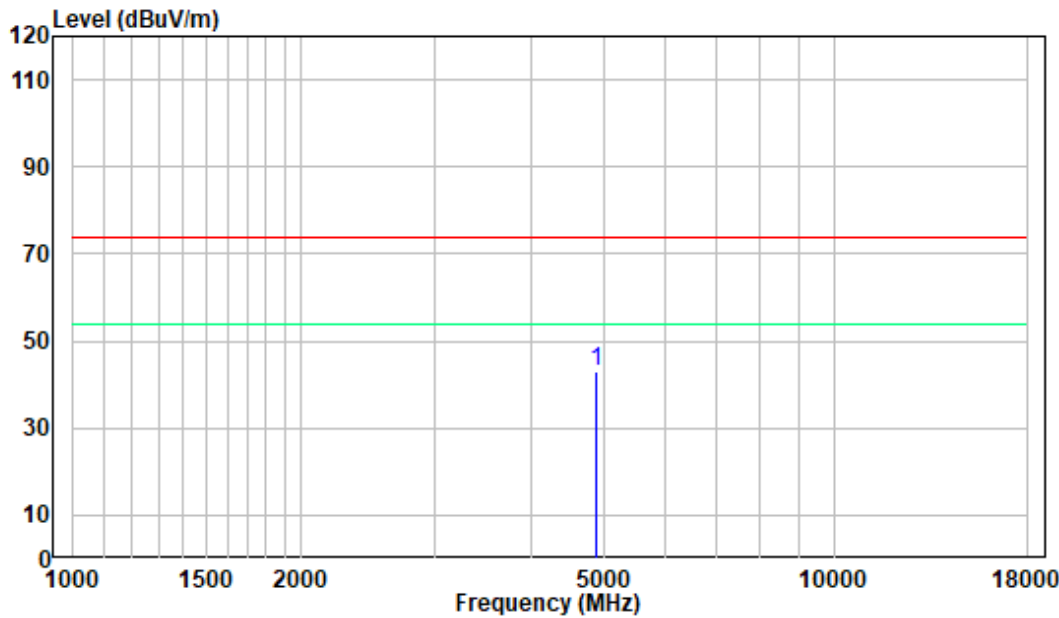


18 -25GHz: (Pre-scan plots)

802.11 b Middle Channel (Worst case)
Horizontal

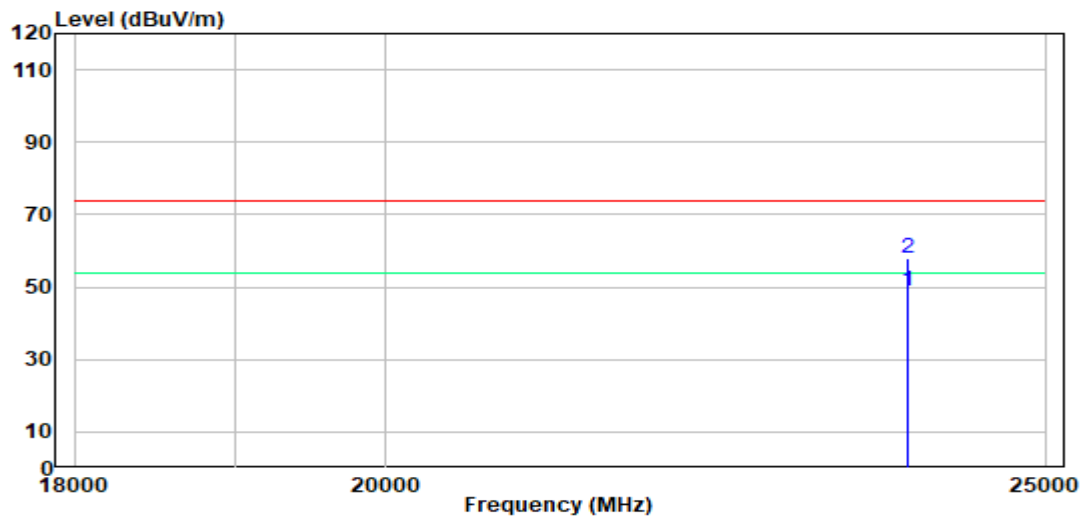

Vertical

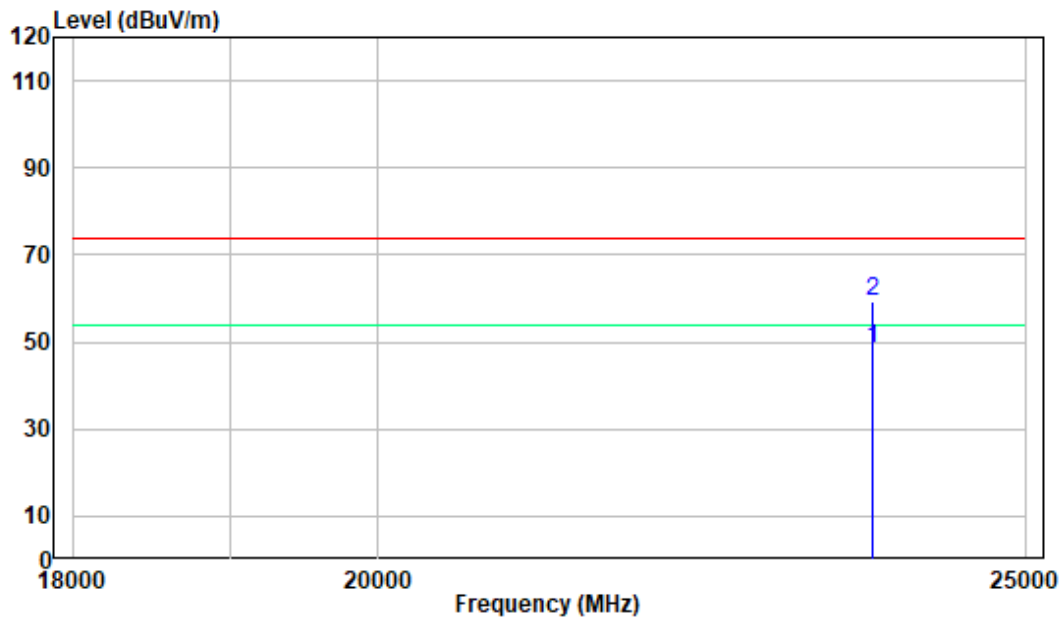

FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013, section 11.8 and section 6.9

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	24-26°C
Relative Humidity:	43-45%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang from 2023-06-09 to 2023-06-14 for Wi-Fi and on 2023-05-29 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure


According to ANSI C63.10-2013, section 11.9.1.1 for BLE mode
According to ANSI C63.10-2013, section 11.9.2.3.2 for Wi-Fi mode

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:



For BLE mode:



Test Data

Environmental Conditions

Temperature:	24-26°C
Relative Humidity:	43-45%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang from 2023-06-09 to 2023-06-14 for Wi-Fi and on 2023-05-29 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013, section 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	24-26°C
Relative Humidity:	42-49%
ATM Pressure:	100.19-101.0 kPa

The testing was performed by Matt Liang from 2023-06-09 to 2023-07-18 for Wi-Fi and on 2023-05-29 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(e)-POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013, section 11.10.2

Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

According to ANSI C63.10-2013, section 11.10.3


Method AVGPSD-1: (for duty cycle $\geq 98\%$)

1. Use this procedure when the maximum conducted average output power in the fundamental emission is used to demonstrate compliance and with continuous transmission (or at least 98% duty cycle).
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to at least 1.5 times the OBW.
5. Detector = power averaging (rms) or sample detector (when rms not available).
6. Sweep time = auto couple.
7. Ensure that the number of measurement points in the sweep $\geq [2 \cdot \text{span} / \text{RBW}]$.
8. Employ trace averaging (rms) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

According to ANSI C63.10-2013, section 11.10.5

Method AVGPSD-2: (for duty cycle < 98% and constant duty cycle)

1. Use this procedure when the maximum conducted average output power in the fundamental emission is used to demonstrate compliance and the continuous transmission (or at least 98% duty cycle) cannot be achieved but exhibit a constant duty cycle during the measurement duration.
2. Measure the duty cycle (D) of the transmitter output signal as described in C63.10-2013 Clause 11.6.
3. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Set the span to at least 1.5 times the OBW.
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Sweep time = auto couple.
8. Ensure that the number of measurement points in the sweep $\geq [2 * \text{span} / \text{RBW}]$.
9. Do not use sweep triggering; allow sweep to “free run.”
10. Employ trace averaging (rms) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step 2), to the measured PSD to compute the average PSD during the actual transmission time.
13. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).



Test Data

Environmental Conditions

Temperature:	24-26°C
Relative Humidity:	42-50%
ATM Pressure:	100.19-101.0 kPa

The testing was performed by Matt Liang from 2023-06-09 to 2023-07-19 for Wi-Fi and on 2023-05-29 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


APPENDIX Wi-Fi

Appendix A: 6dB Emission Bandwidth


Test Result

Test Mode	Channel	Antenna	DTS BW [MHz]	Limit[MHz]	Verdict
11B MIMO	2412	Ant1	10.08	0.5	PASS
		Ant2	10.08	0.5	PASS
	2437	Ant1	10.08	0.5	PASS
		Ant2	10.12	0.5	PASS
	2462	Ant1	10.12	0.5	PASS
		Ant2	10.12	0.5	PASS
11G MIMO	2412	Ant1	16.00	0.5	PASS
		Ant2	16.00	0.5	PASS
	2437	Ant1	15.12	0.5	PASS
		Ant2	13.44	0.5	PASS
	2462	Ant1	13.20	0.5	PASS
		Ant2	16.32	0.5	PASS
11N20 MIMO	2412	Ant1	17.52	0.5	PASS
		Ant2	17.60	0.5	PASS
	2437	Ant1	13.48	0.5	PASS
		Ant2	17.56	0.5	PASS
	2462	Ant1	16.56	0.5	PASS
		Ant2	16.64	0.5	PASS
11N40 MIMO	2422	Ant1	32.56	0.5	PASS
		Ant2	33.84	0.5	PASS
	2437	Ant1	33.84	0.5	PASS
		Ant2	35.12	0.5	PASS
	2452	Ant1	35.12	0.5	PASS
		Ant2	35.12	0.5	PASS
11AX20 MIMO	2412	Ant1	15.44	0.5	PASS
		Ant2	15.12	0.5	PASS
	2437	Ant1	17.96	0.5	PASS
		Ant2	16.92	0.5	PASS
	2462	Ant1	18.16	0.5	PASS
		Ant2	16.32	0.5	PASS
11AX40 MIMO	2422	Ant1	35.12	0.5	PASS
		Ant2	33.92	0.5	PASS
	2437	Ant1	35.92	0.5	PASS
		Ant2	36.00	0.5	PASS
	2452	Ant1	35.76	0.5	PASS
		Ant2	35.92	0.5	PASS


Test Graphs

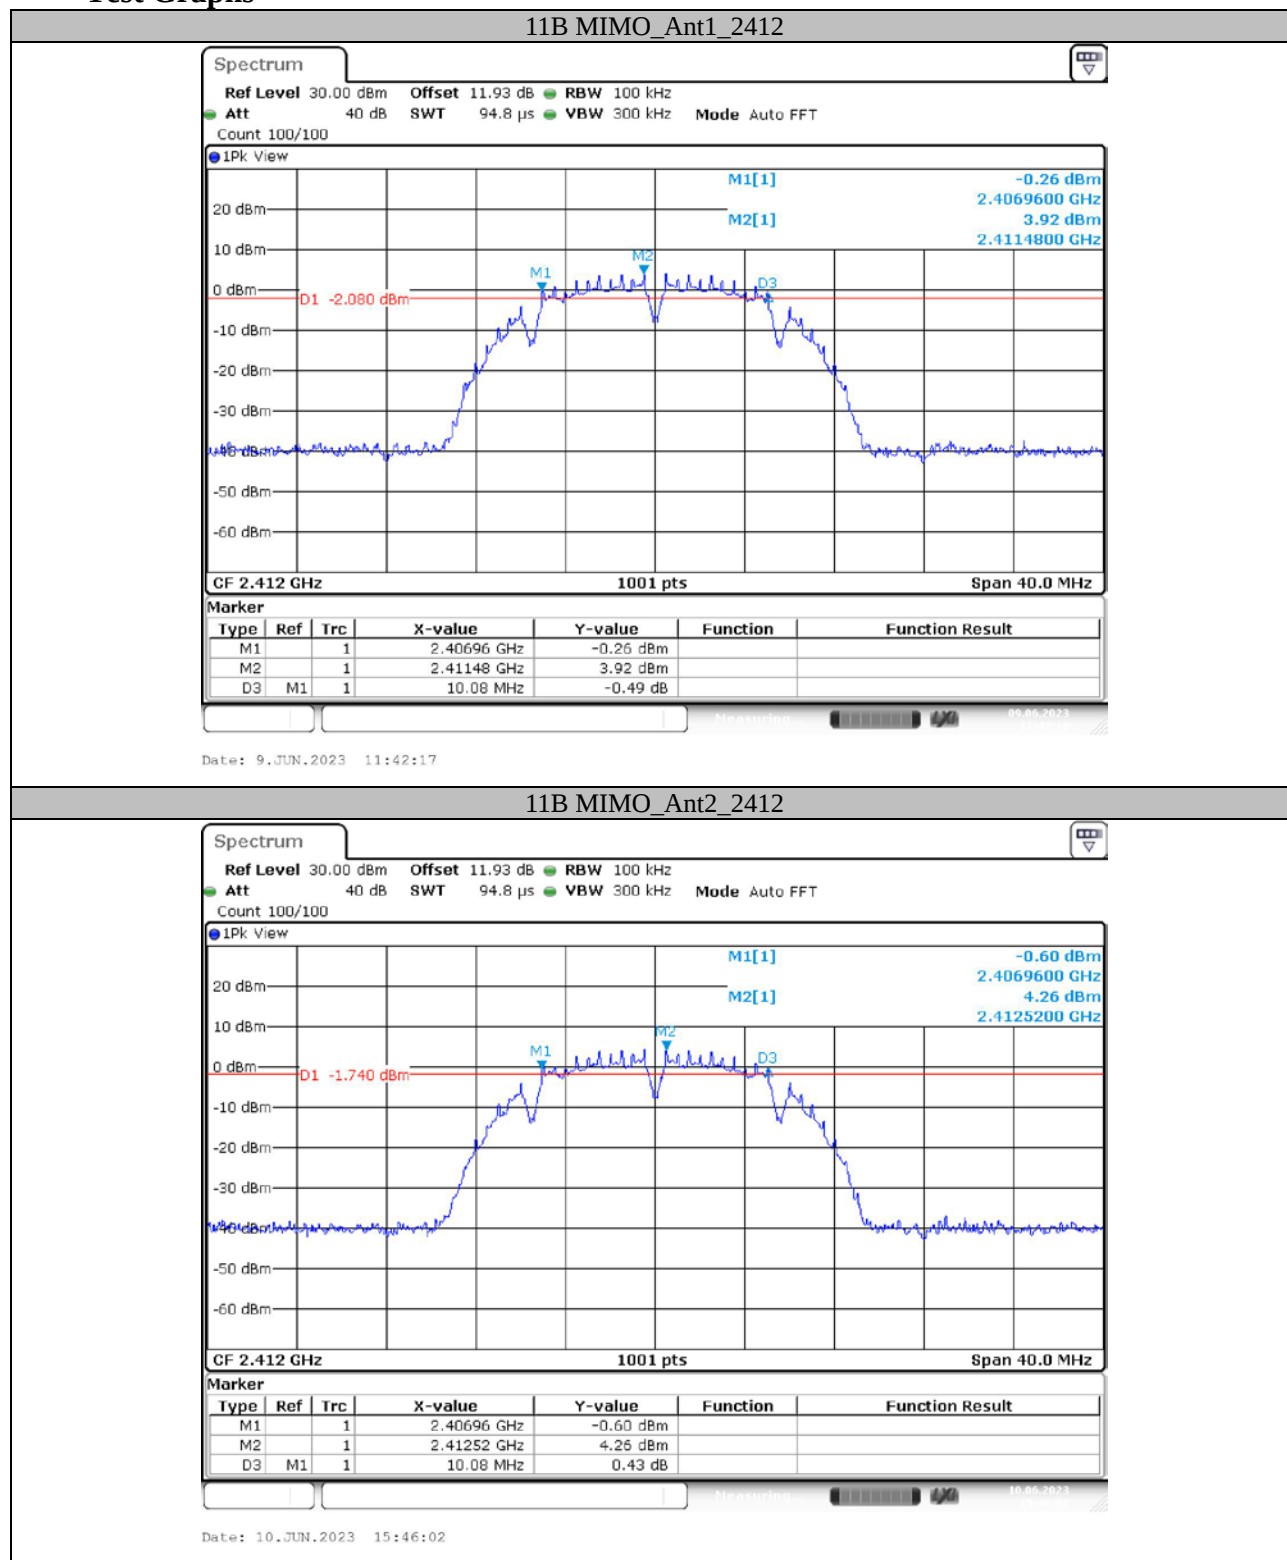


11B MIMO_Ant1_2437

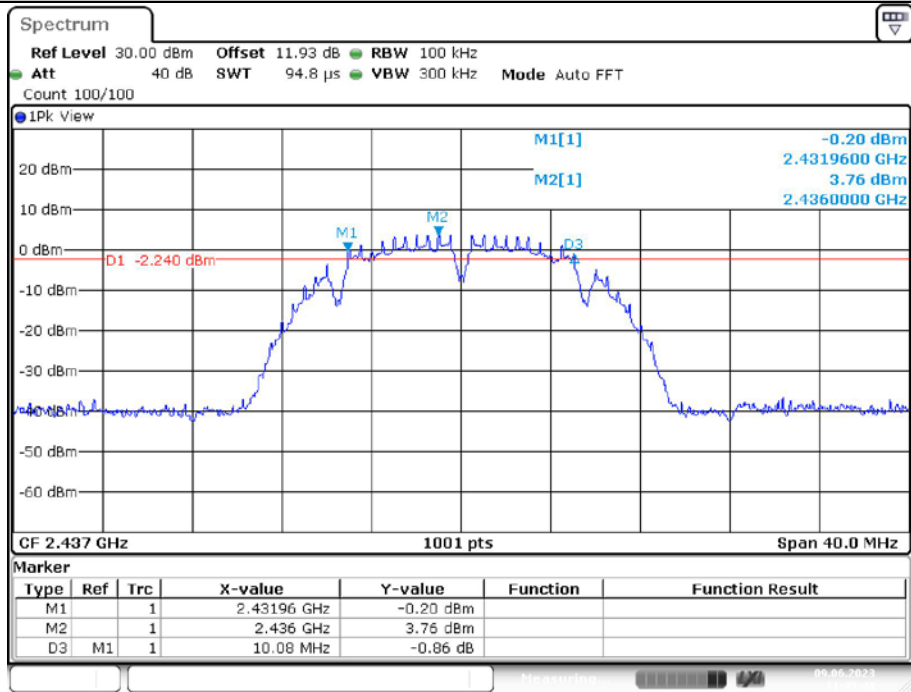

11B MIMO_Ant2_2437

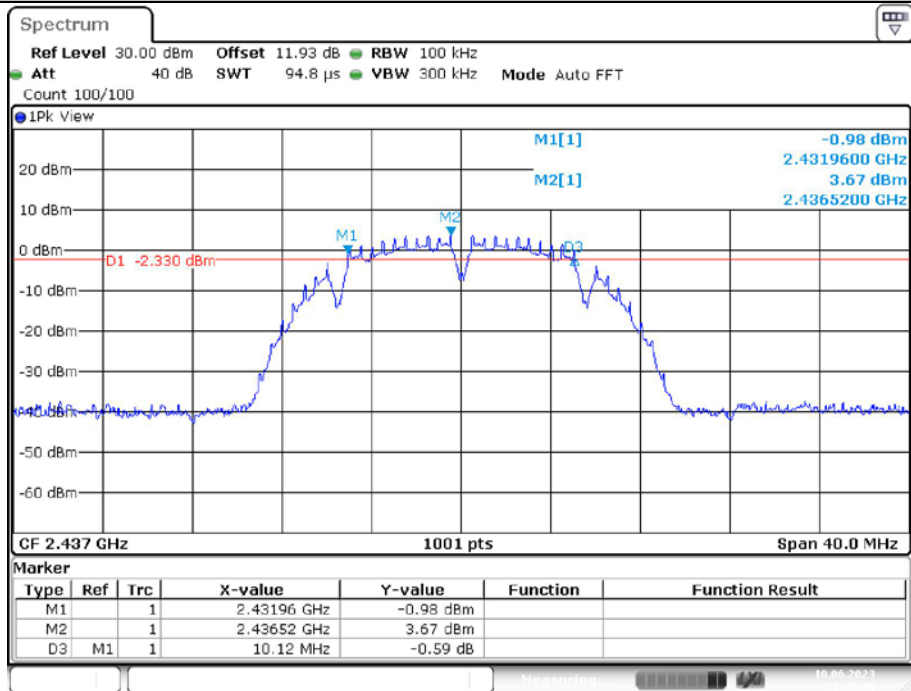


11B MIMO_Ant1_2462

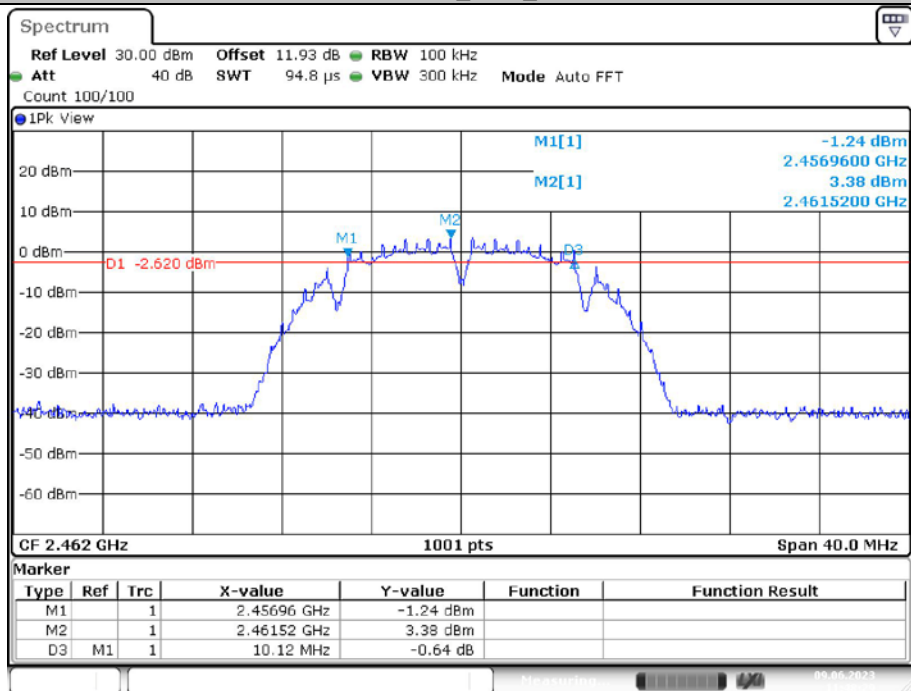


Date: 9.JUN.2023 11:48:30

11B MIMO_Ant2_2462

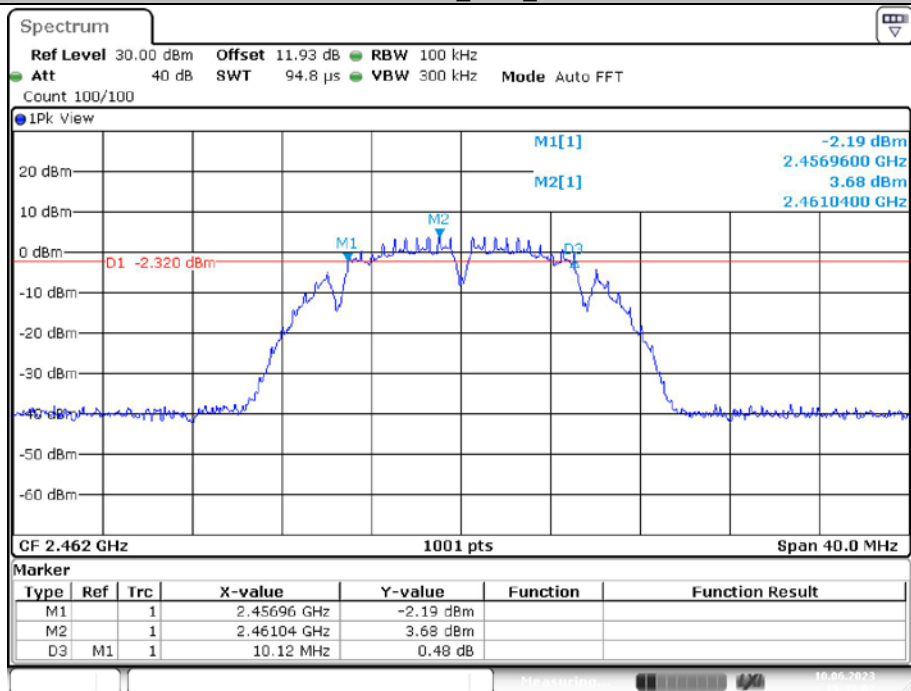


Date: 10.JUN.2023 15:49:03


11G MIMO_Ant1_2412

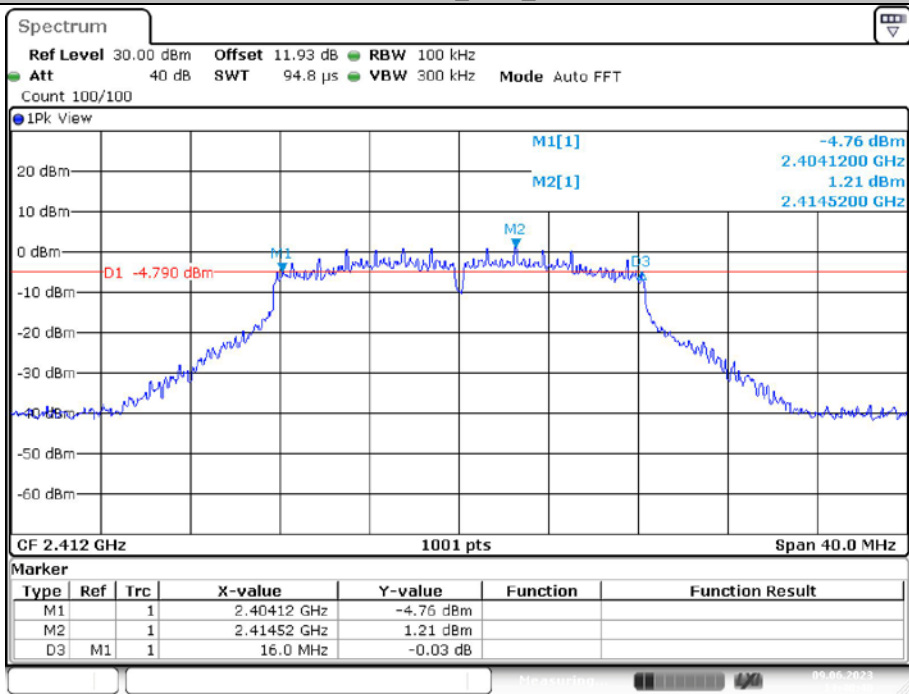


11G MIMO_Ant2_2412

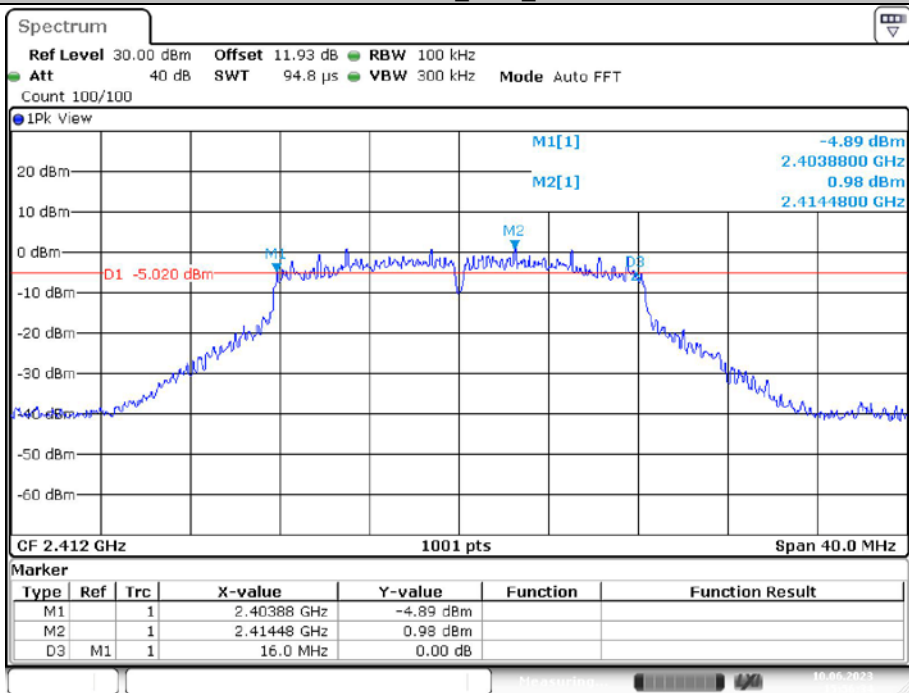


11G MIMO_Ant1_2437

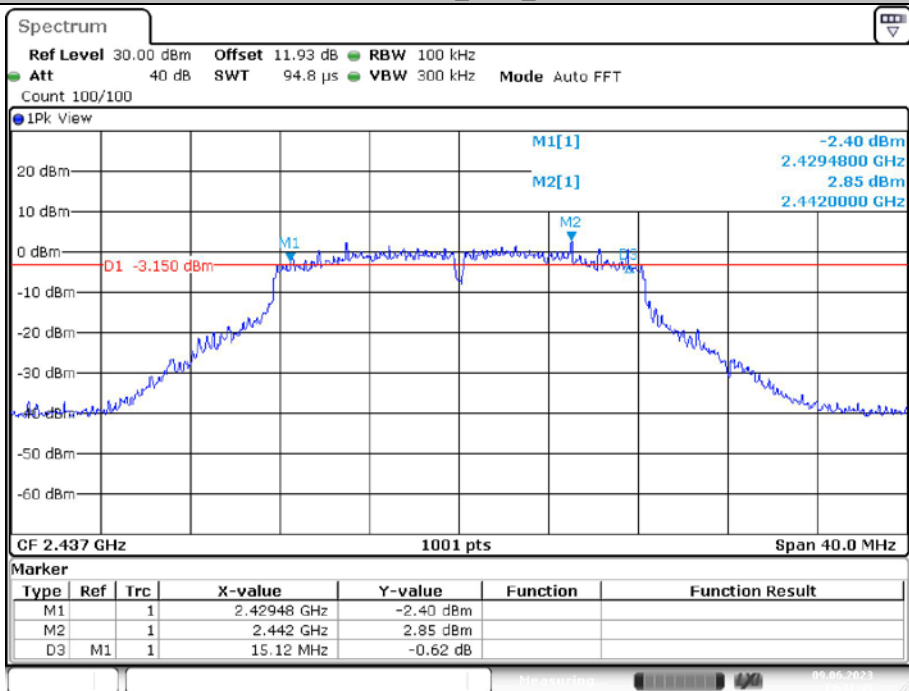

11G MIMO_Ant2_2437

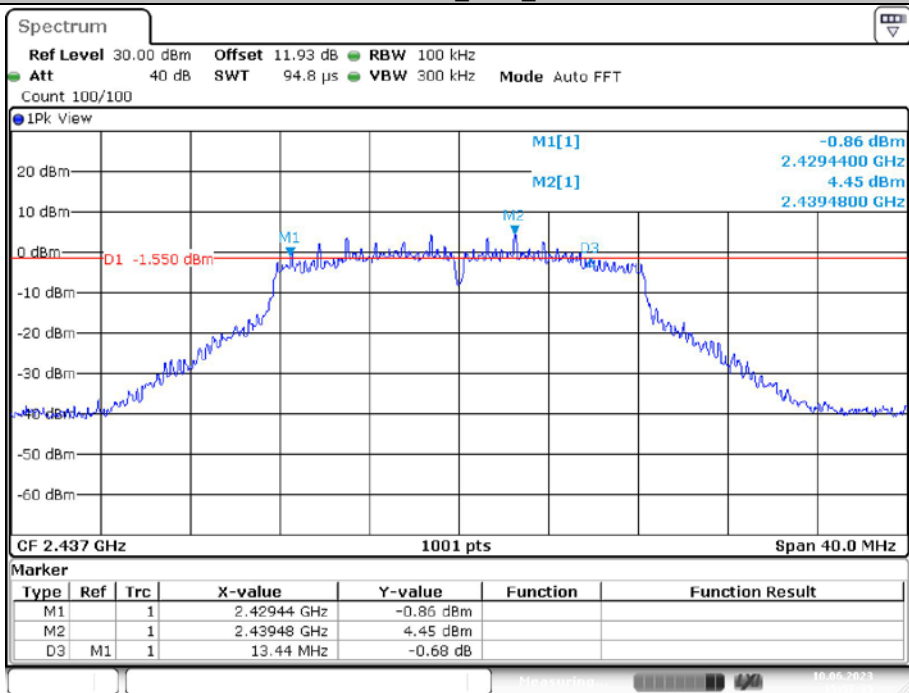


11G MIMO_Ant1_2462

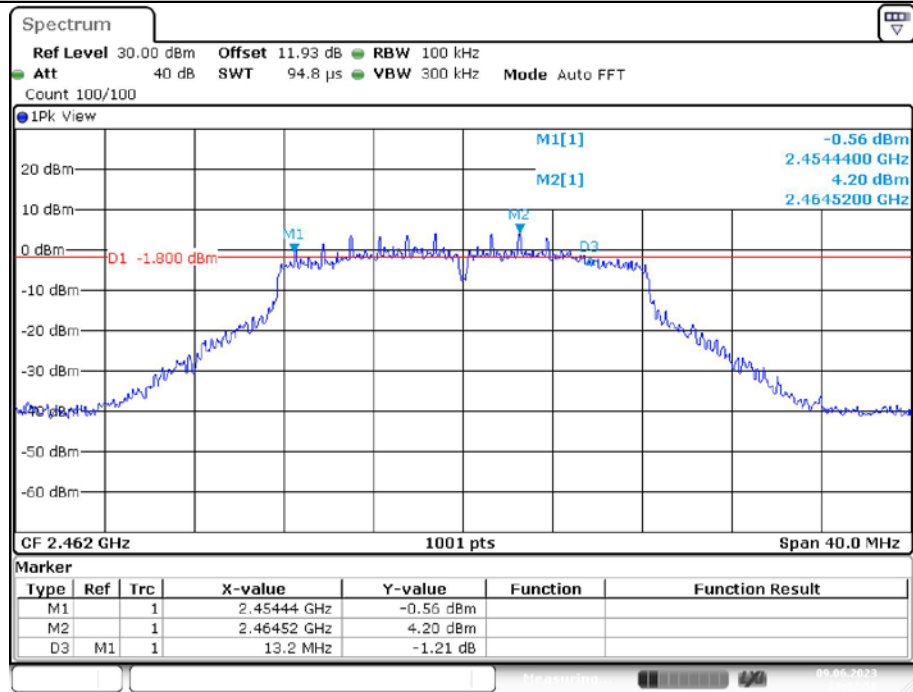


Date: 9.JUN.2023 13:42:59

11G MIMO_Ant2_2462

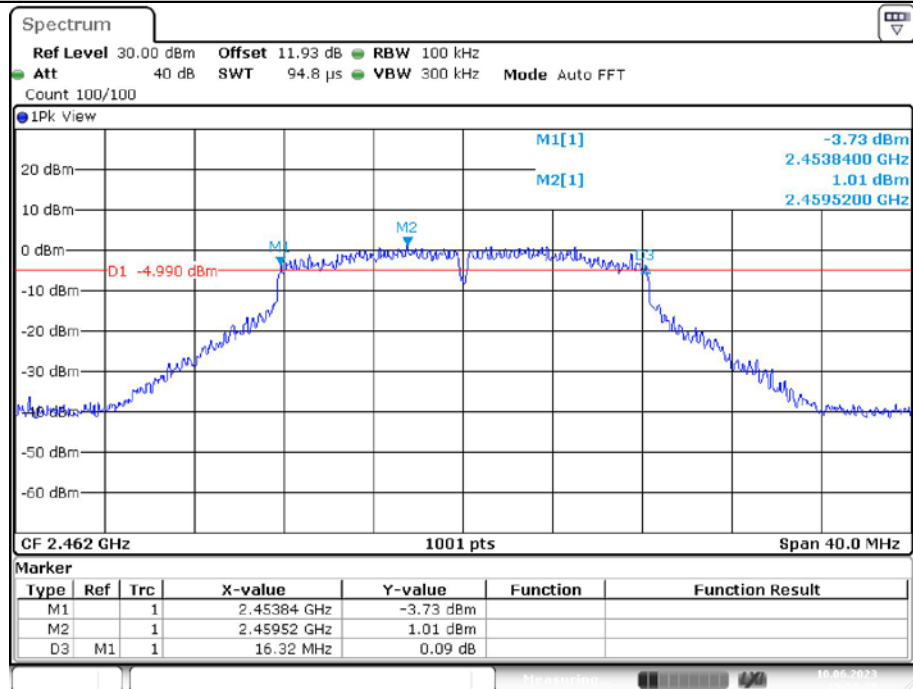



Date: 10.JUN.2023 15:58:28

11N20 MIMO_Ant1_2412

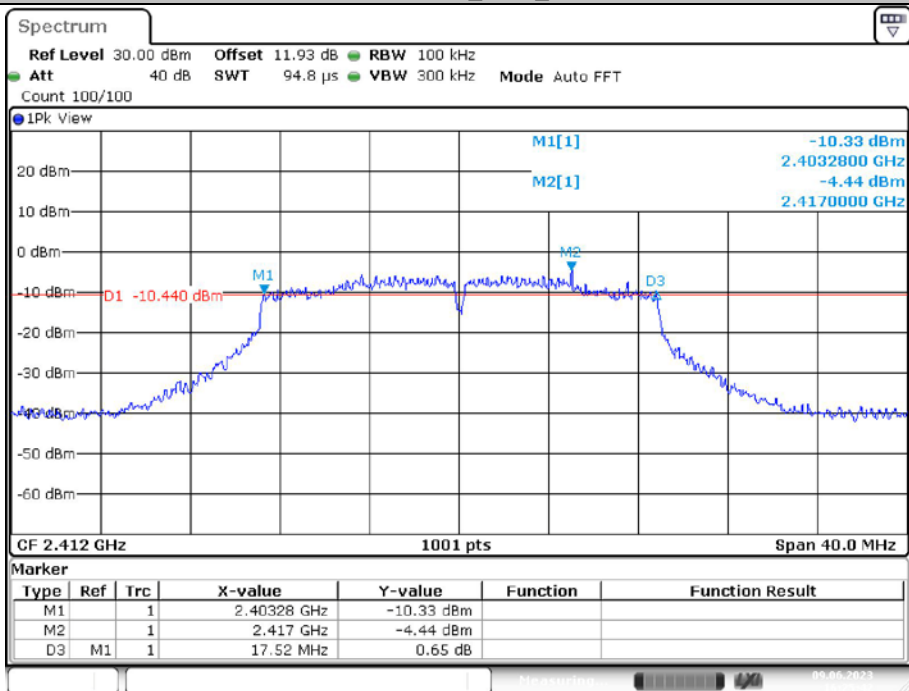


11N20 MIMO_Ant2_2412

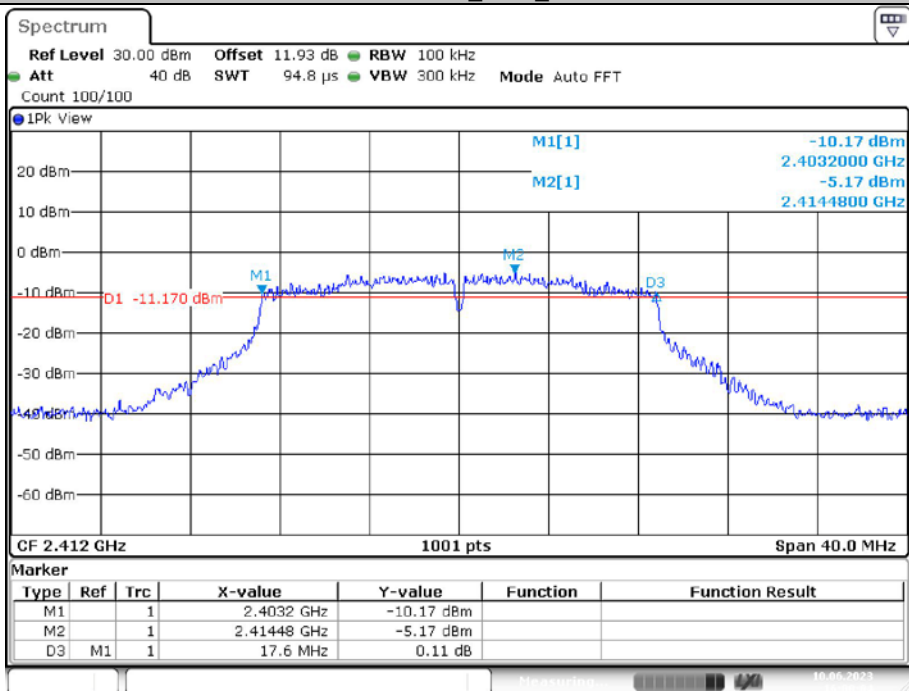


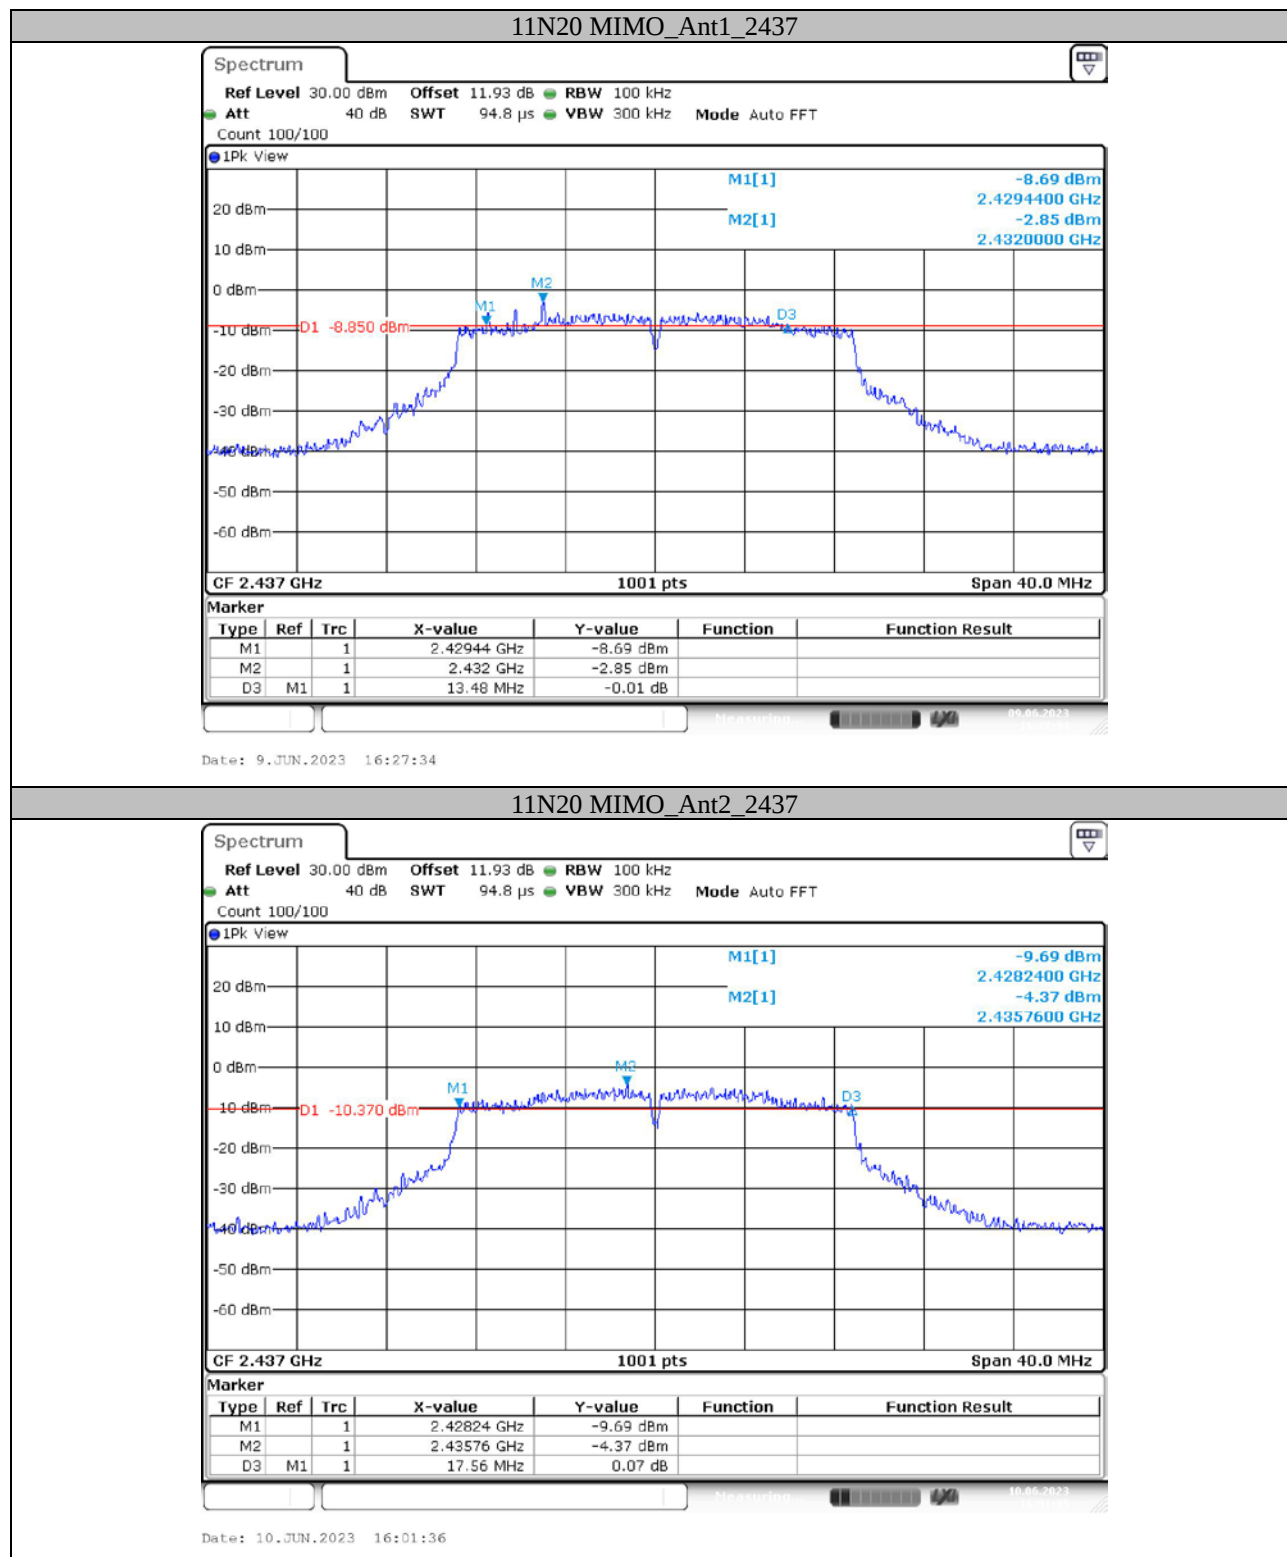


11N20 MIMO_Ant1_2462

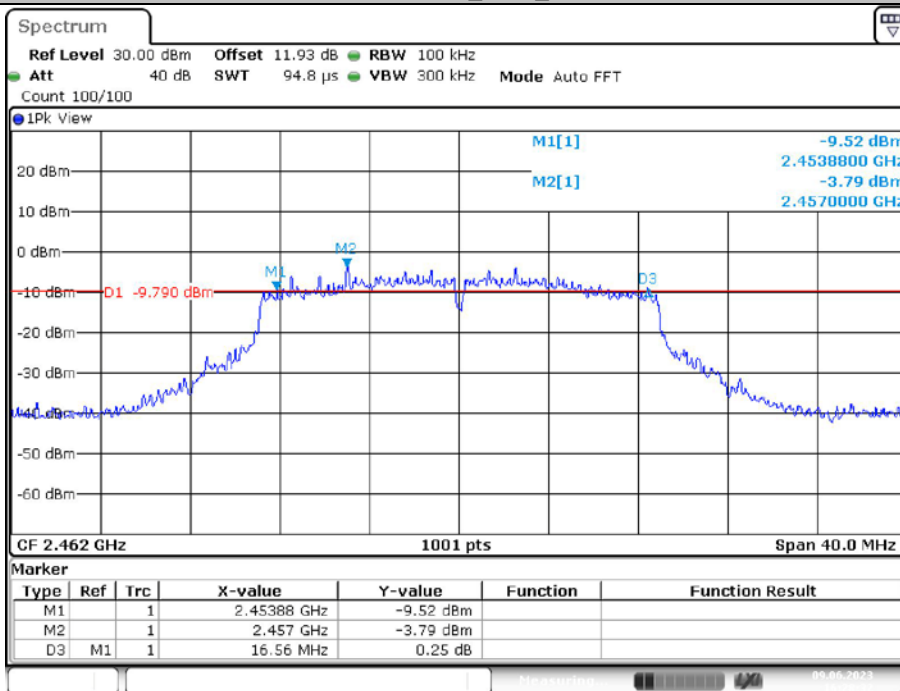


11N20 MIMO_Ant2_2462

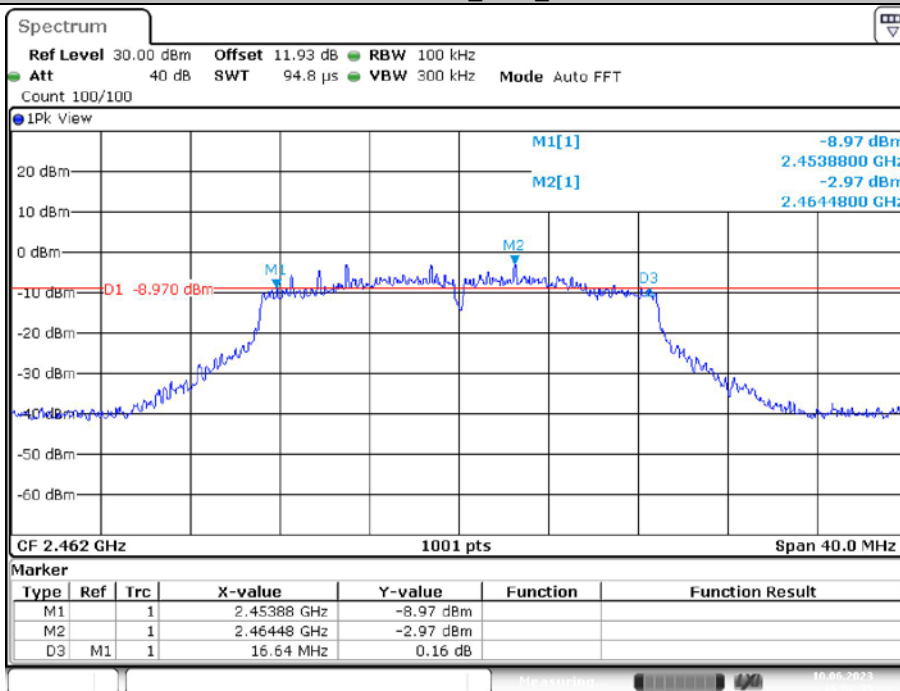


11N40 MIMO_Ant1_2422

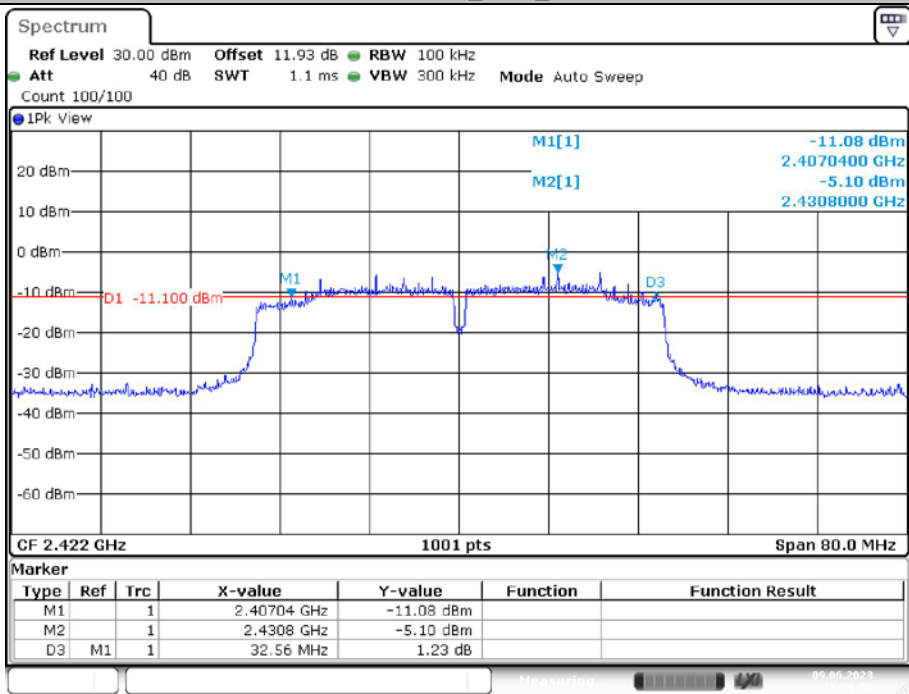

11N40 MIMO_Ant2_2422

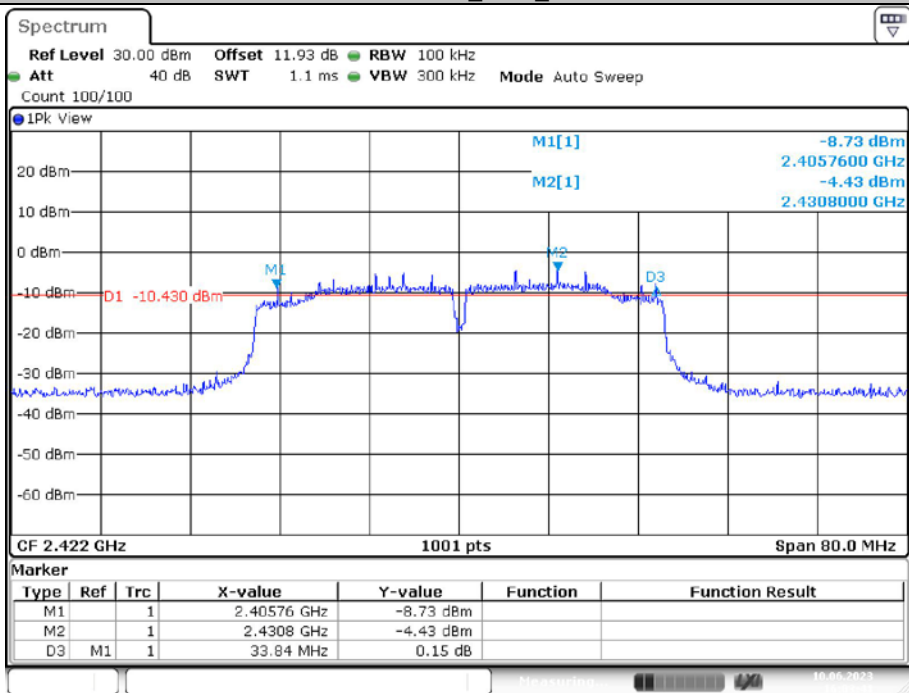


11N40 MIMO_Ant1_2437

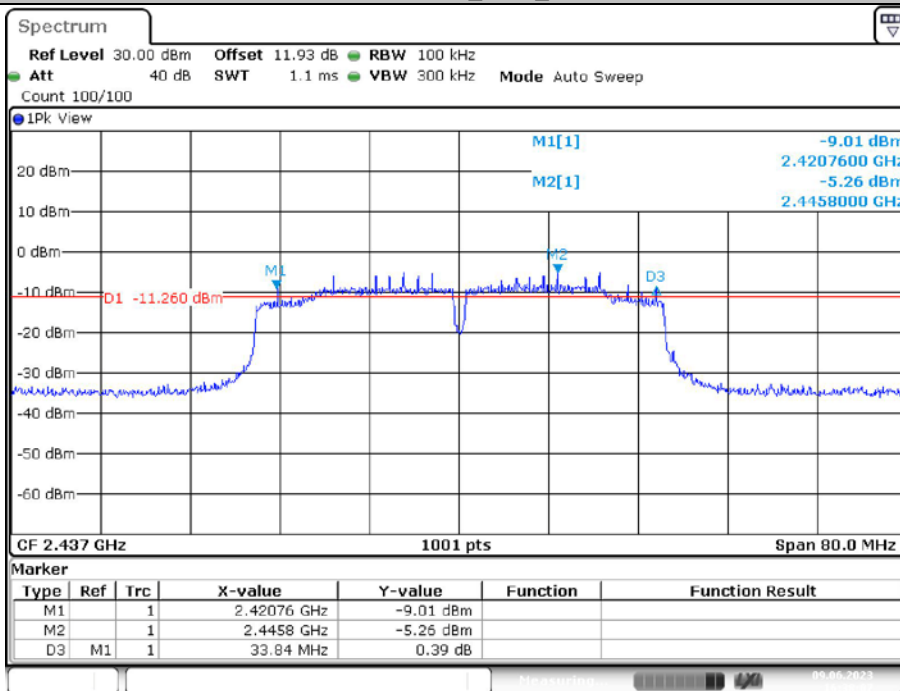


Date: 9.JUN.2023 16:38:07

11N40 MIMO_Ant2_2437

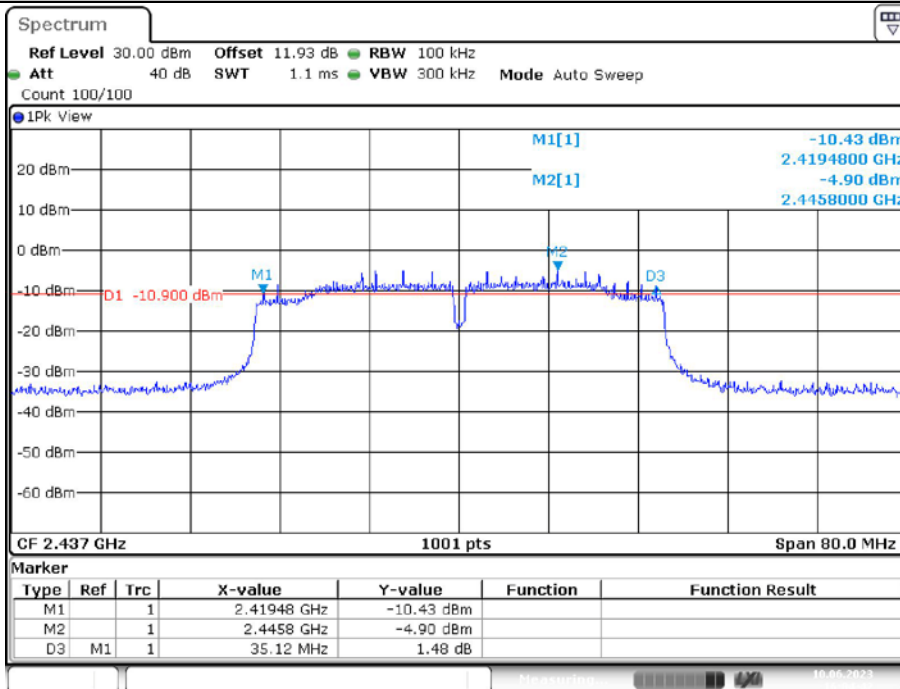



Date: 10.JUN.2023 16:04:43


11N40 MIMO_Ant1_2452

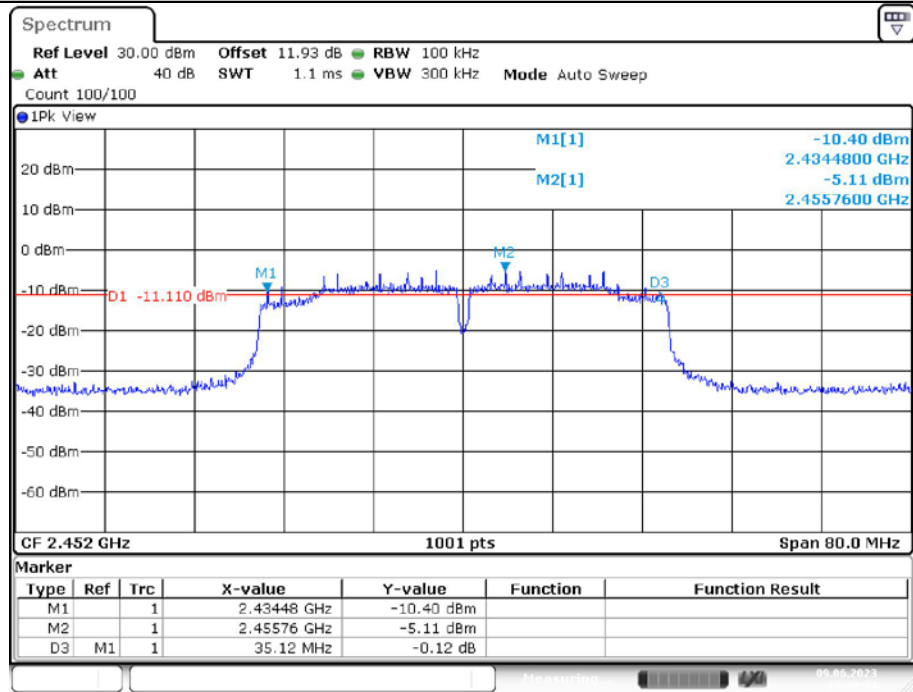


11N40 MIMO_Ant2_2452

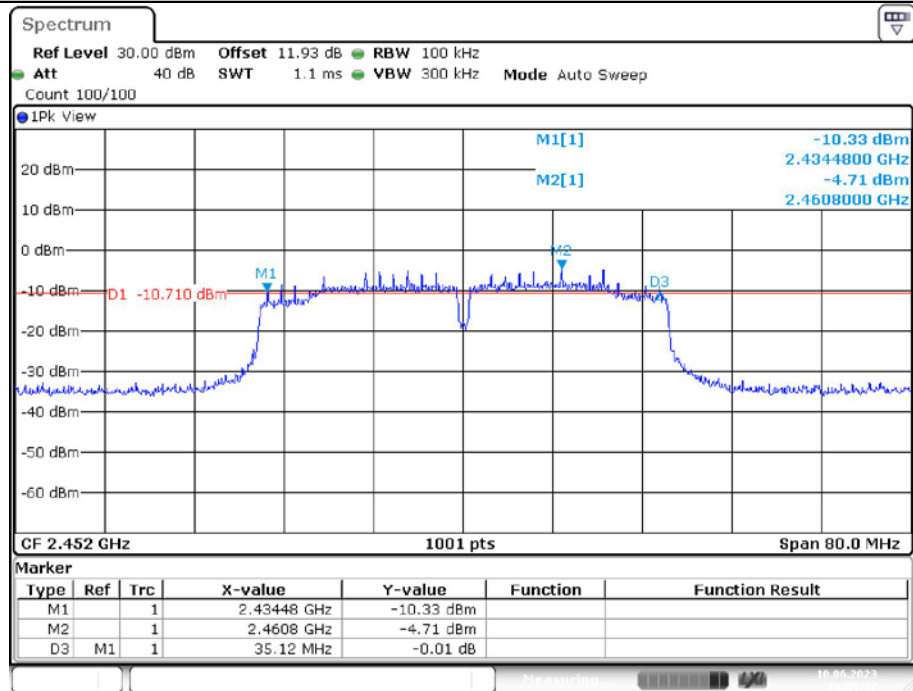

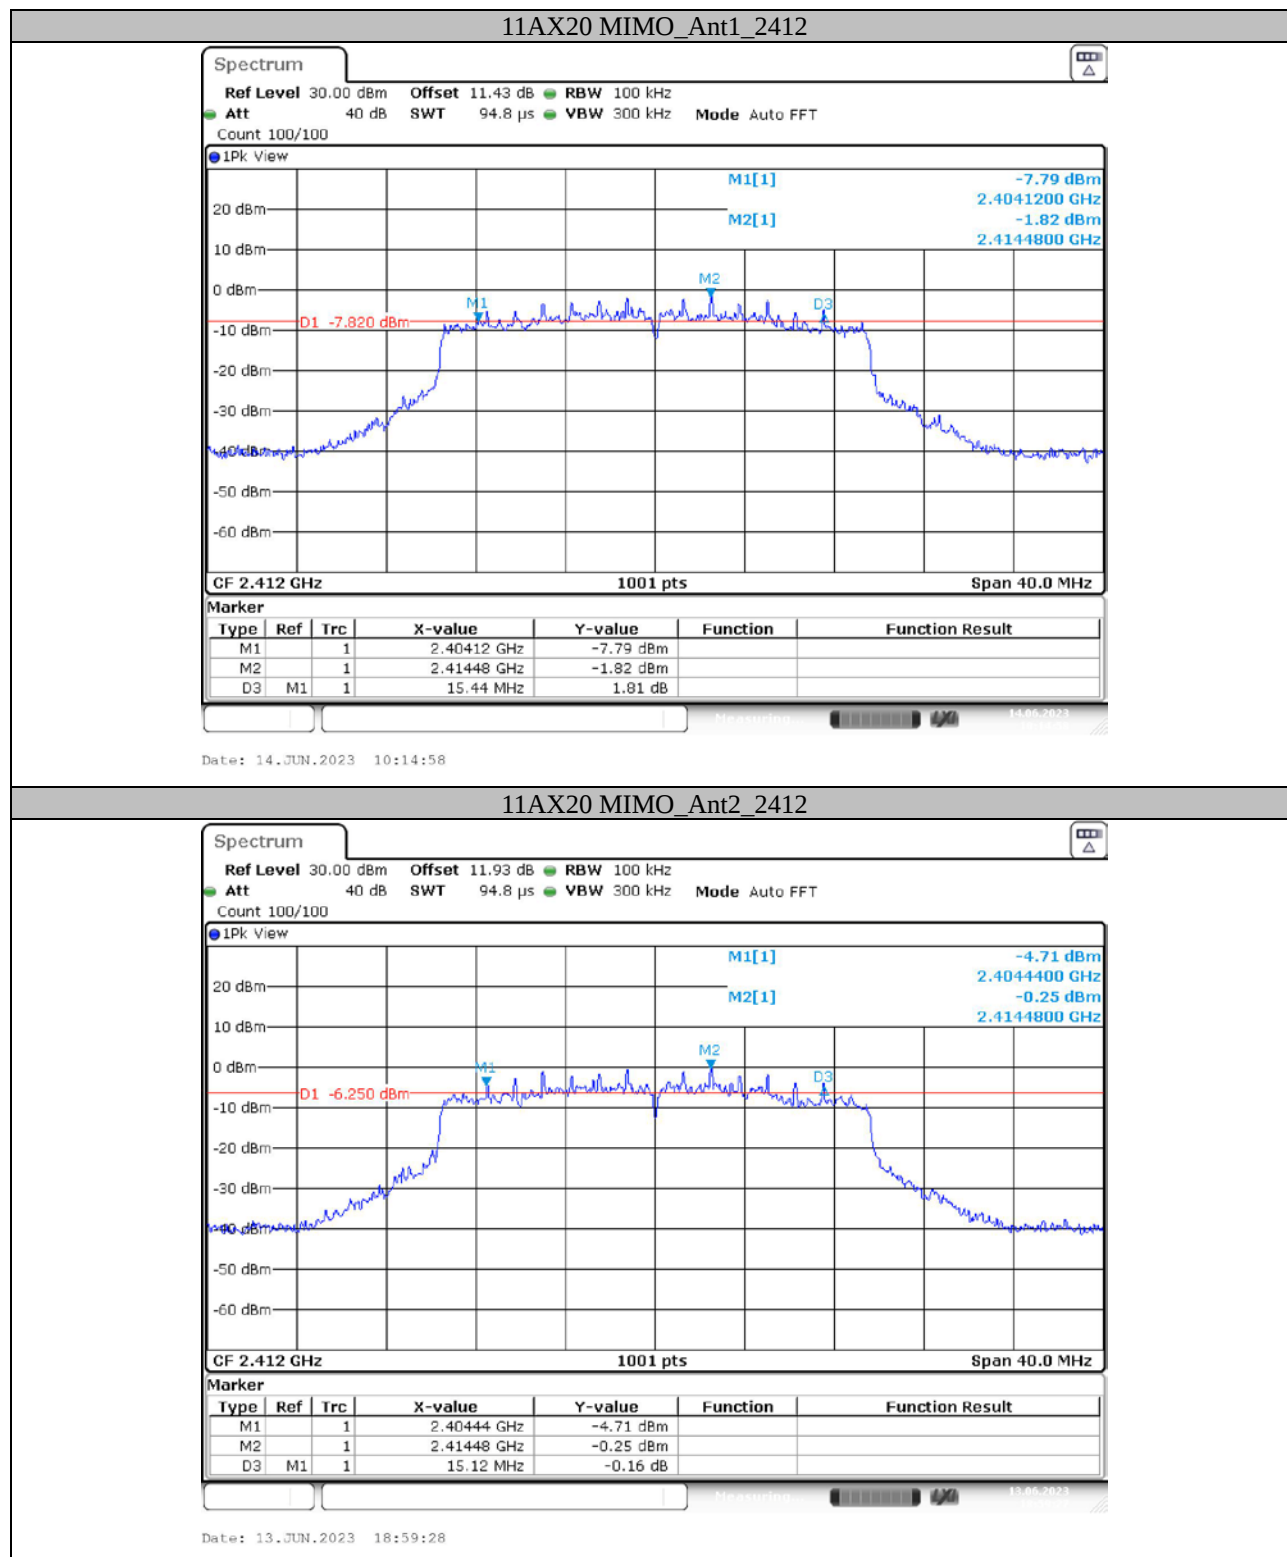

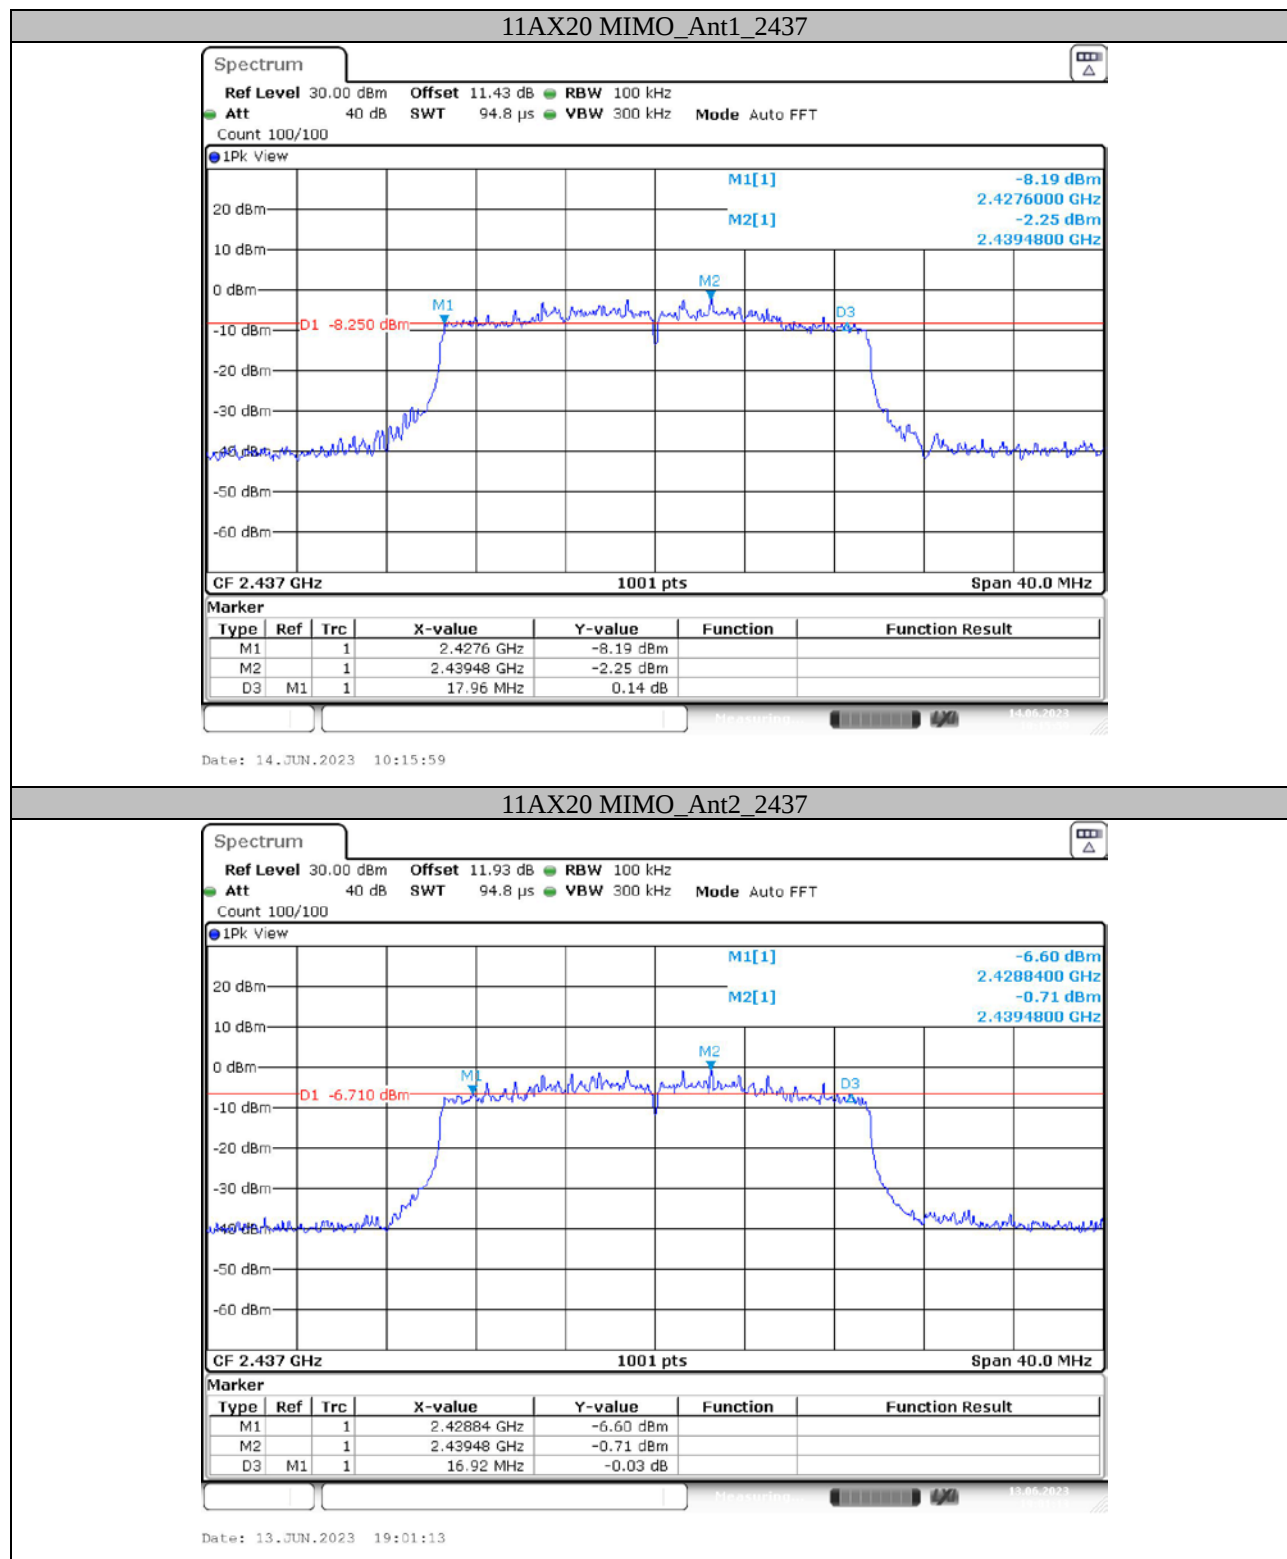


11AX20 MIMO_Ant1_2462

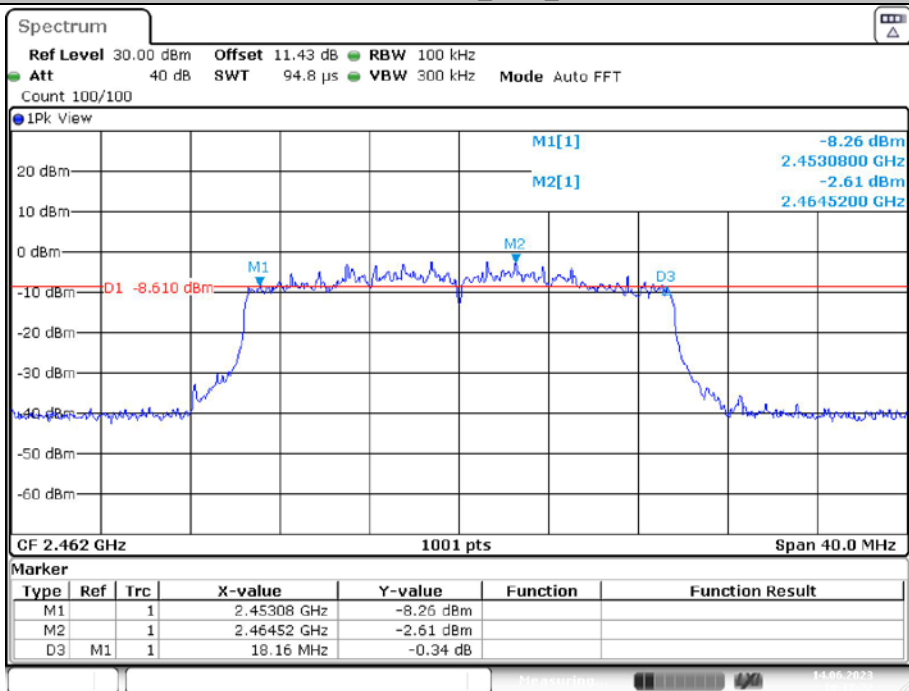

Date: 14.JUN.2023 10:17:23

11AX20 MIMO_Ant2_2462

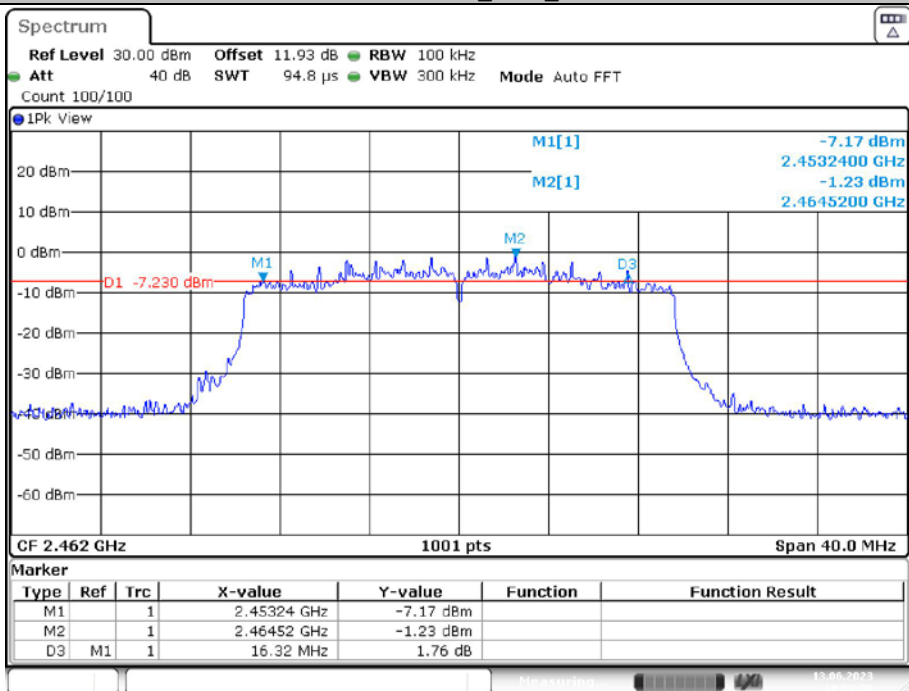

Date: 13.JUN.2023 19:02:38

