


5.2G:


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	Ant1	97.82	0.1
NVNT	a	5200	Ant1	97.8	0.1
NVNT	a	5240	Ant1	97.82	0.1
NVNT	ac20	5180	Ant1	97.66	0.1
NVNT	ac20	5200	Ant1	97.7	0.1
NVNT	ac20	5240	Ant1	97.65	0.1
NVNT	ac40	5190	Ant1	95.46	0.2
NVNT	ac40	5230	Ant1	95.71	0.19
NVNT	ac80	5210	Ant1	91.39	0.39
NVNT	n20	5180	Ant1	97.66	0.1
NVNT	n20	5200	Ant1	97.67	0.1
NVNT	n20	5240	Ant1	97.69	0.1
NVNT	n40	5190	Ant1	95.45	0.2
NVNT	n40	5230	Ant1	95.41	0.2


Duty Cycle NVNT a 5180MHz Ant1

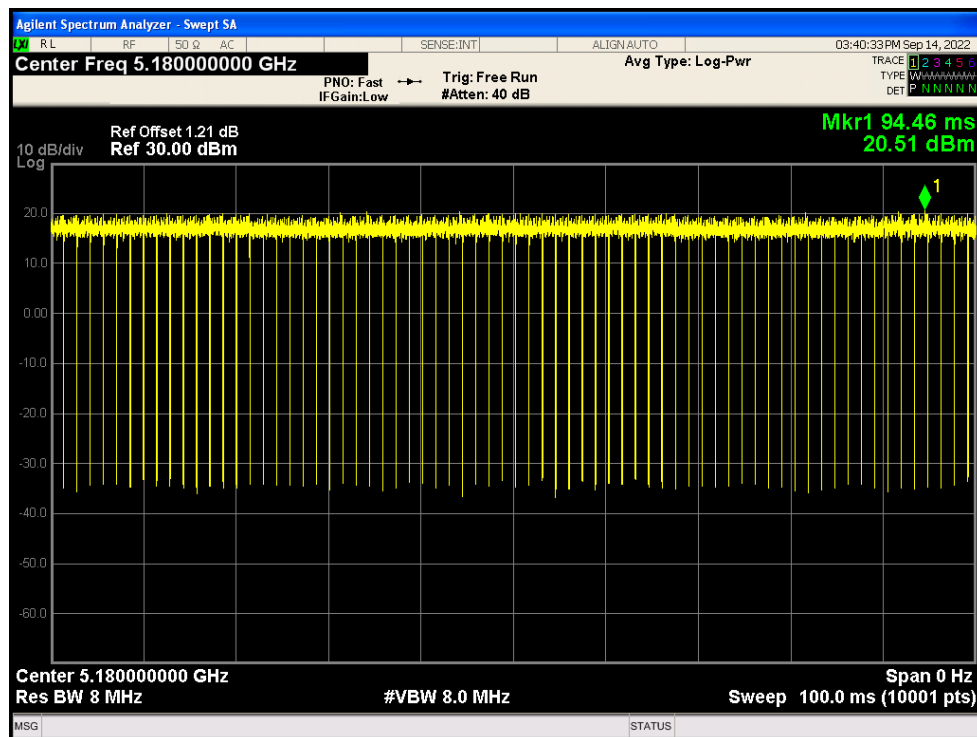


Duty Cycle NVNT a 5200MHz Ant1

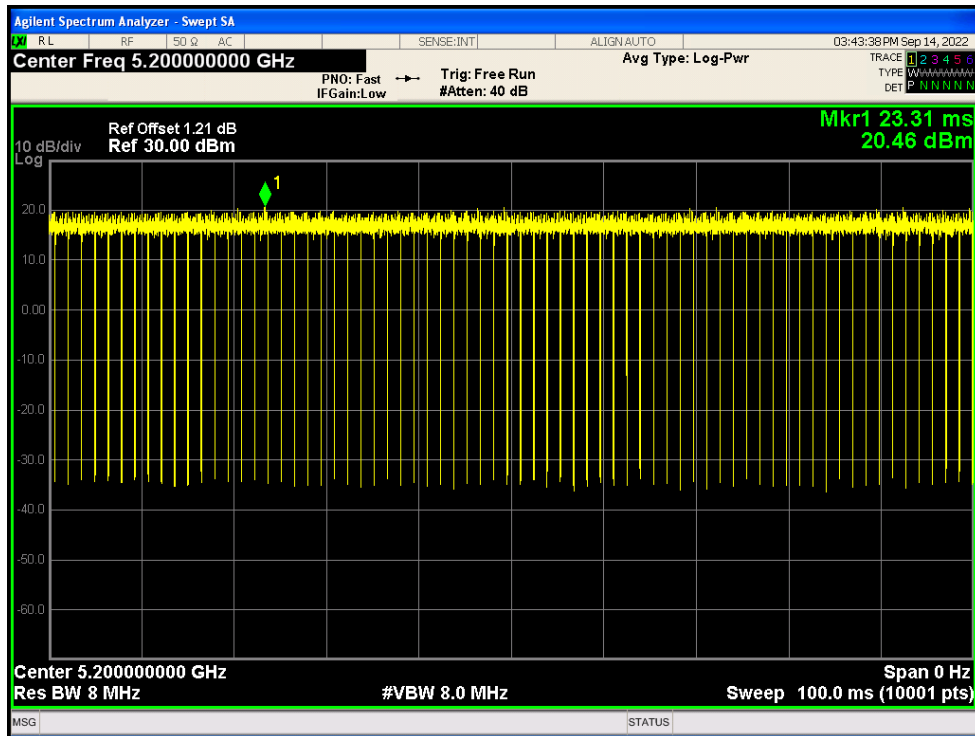


Duty Cycle NVNT a 5240MHz Ant1

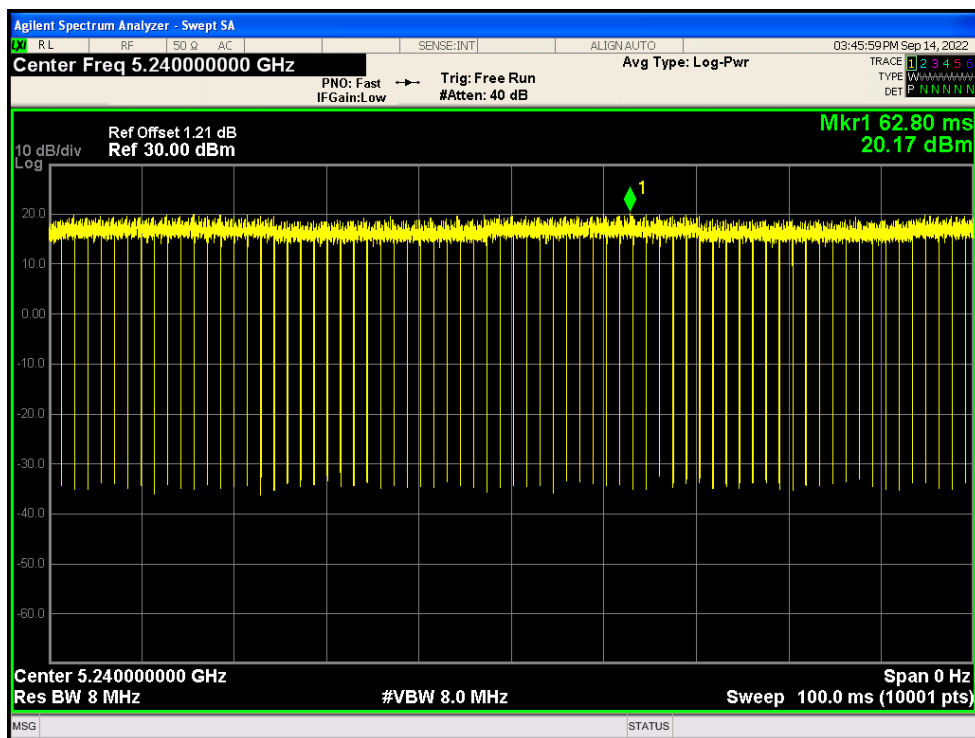


Duty Cycle NVNT ac20 5180MHz Ant1

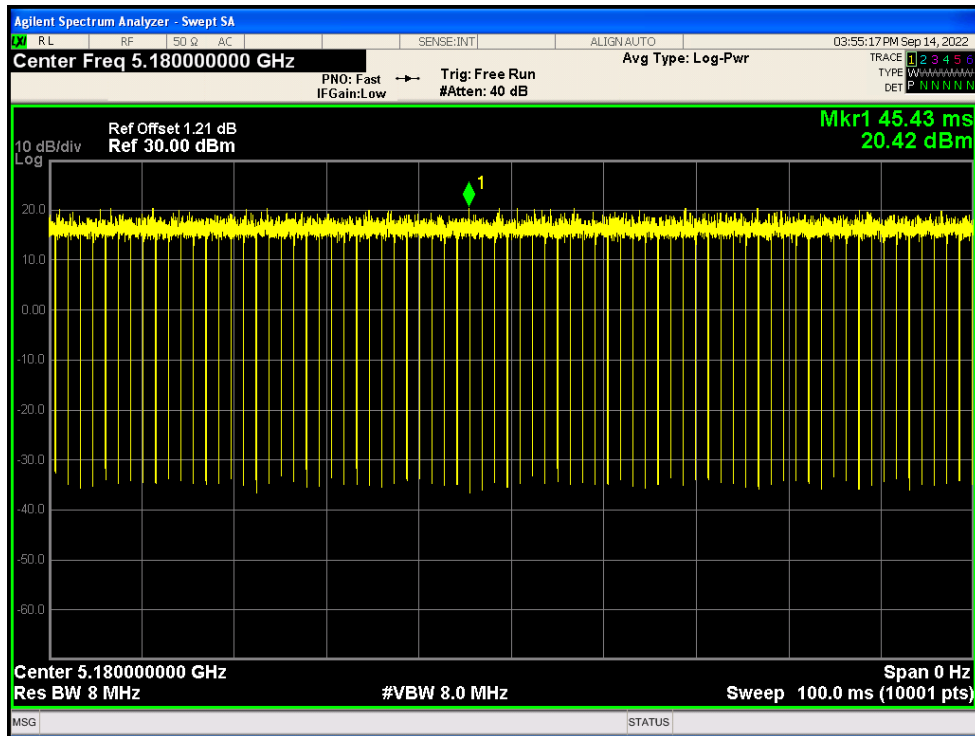


Duty Cycle NVNT ac20 5200MHz Ant1

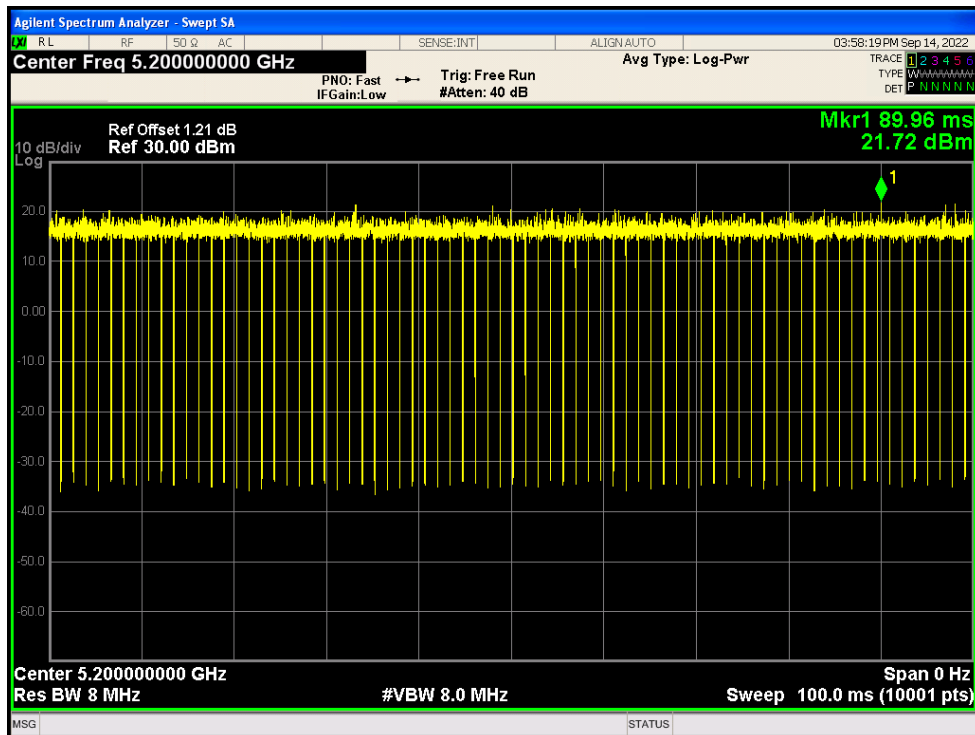


Duty Cycle NVNT ac20 5240MHz Ant1

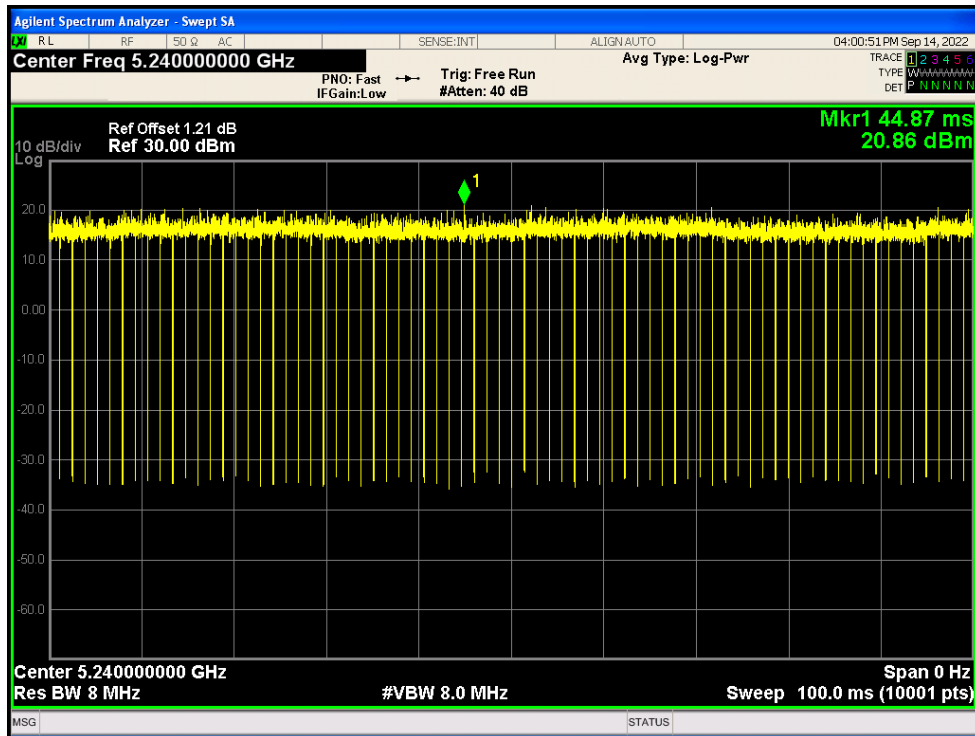


Duty Cycle NVNT ac40 5190MHz Ant1

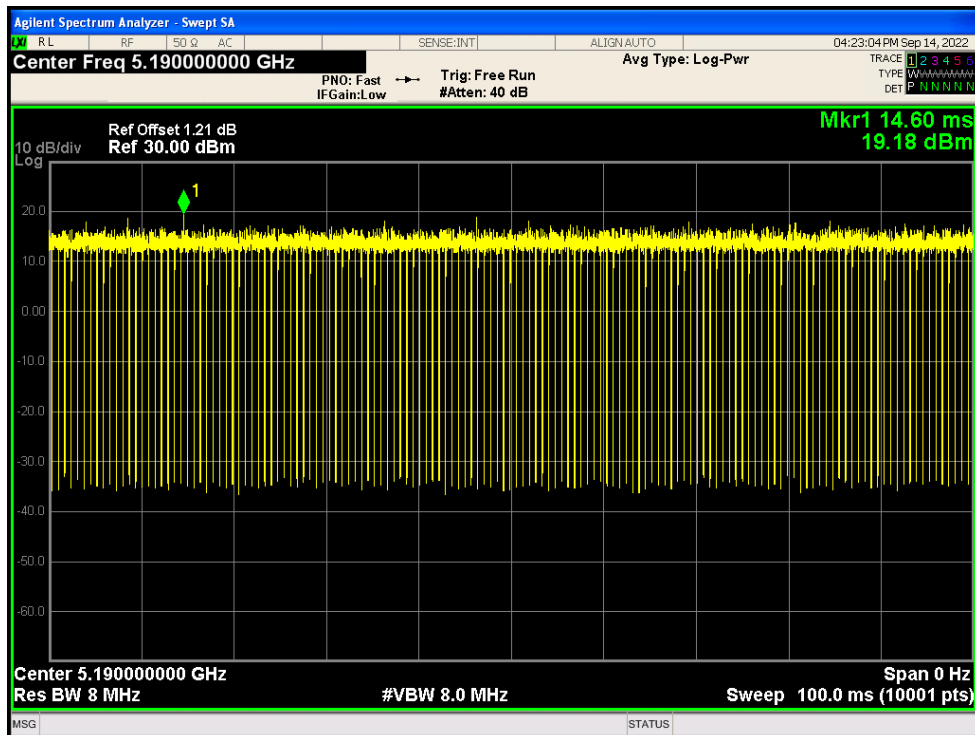


Duty Cycle NVNT ac40 5230MHz Ant1

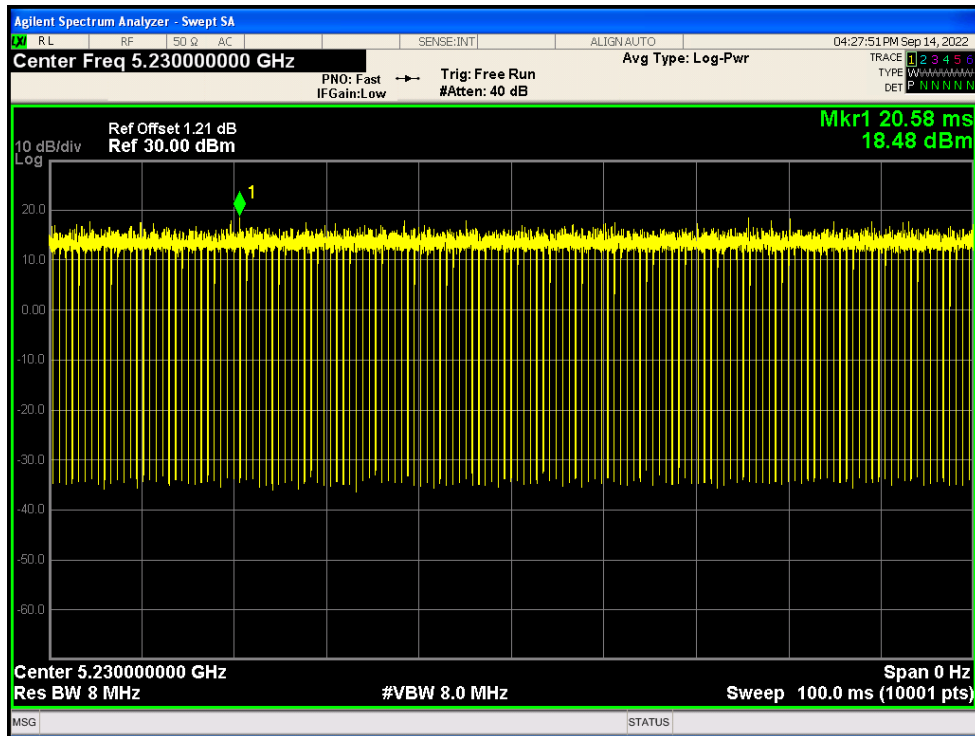


Duty Cycle NVNT ac80 5210MHz Ant1

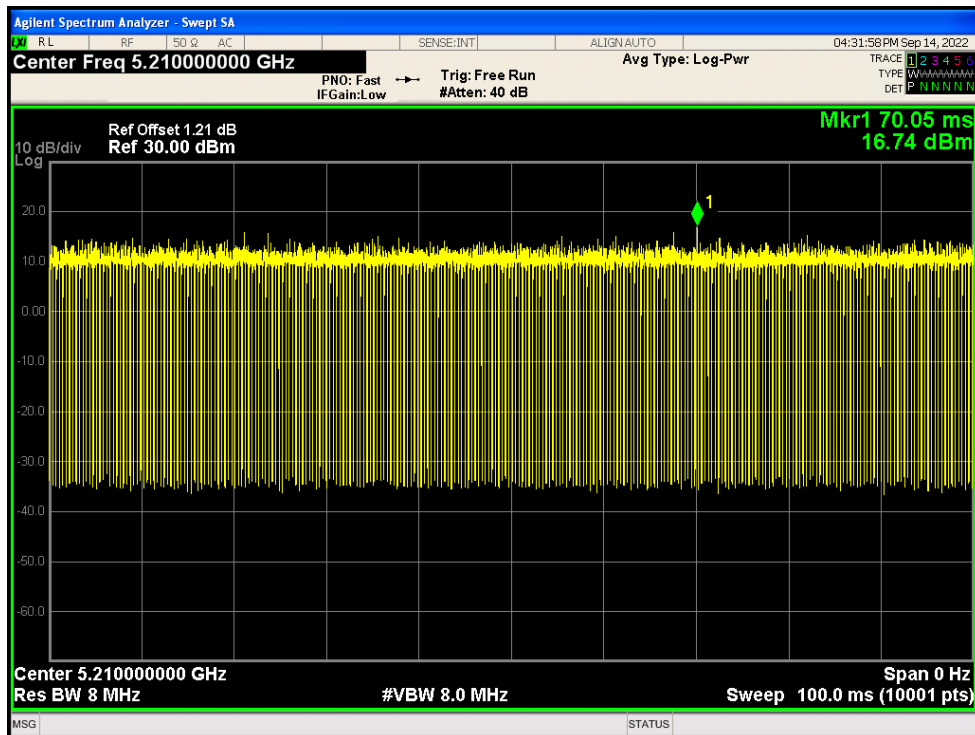


Duty Cycle NVNT n20 5180MHz Ant1

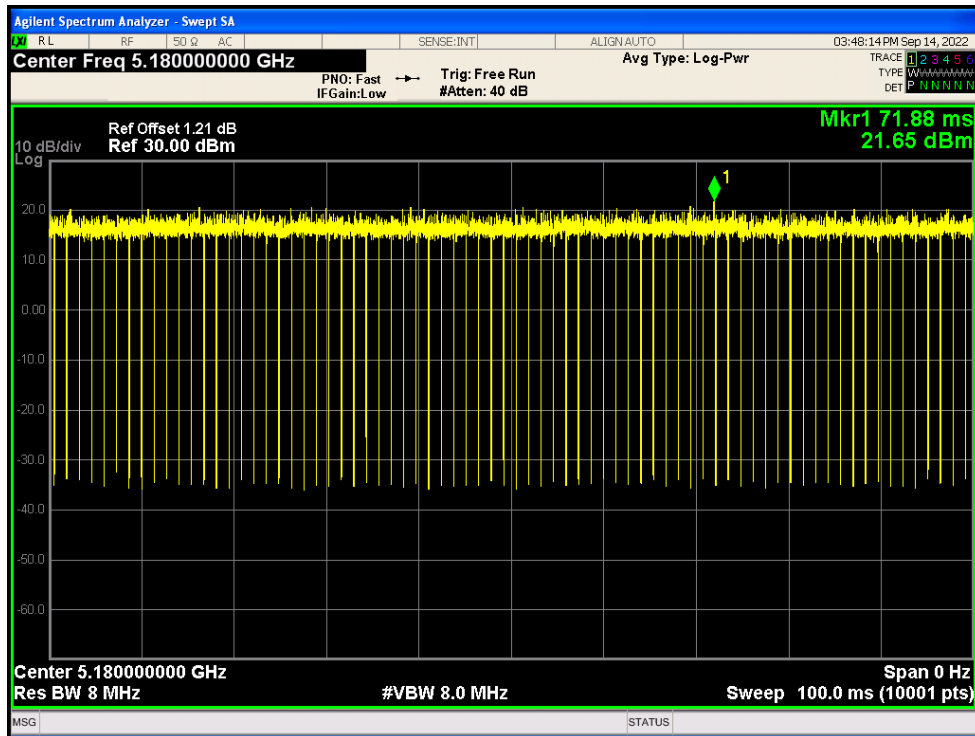


Duty Cycle NVNT n20 5200MHz Ant1

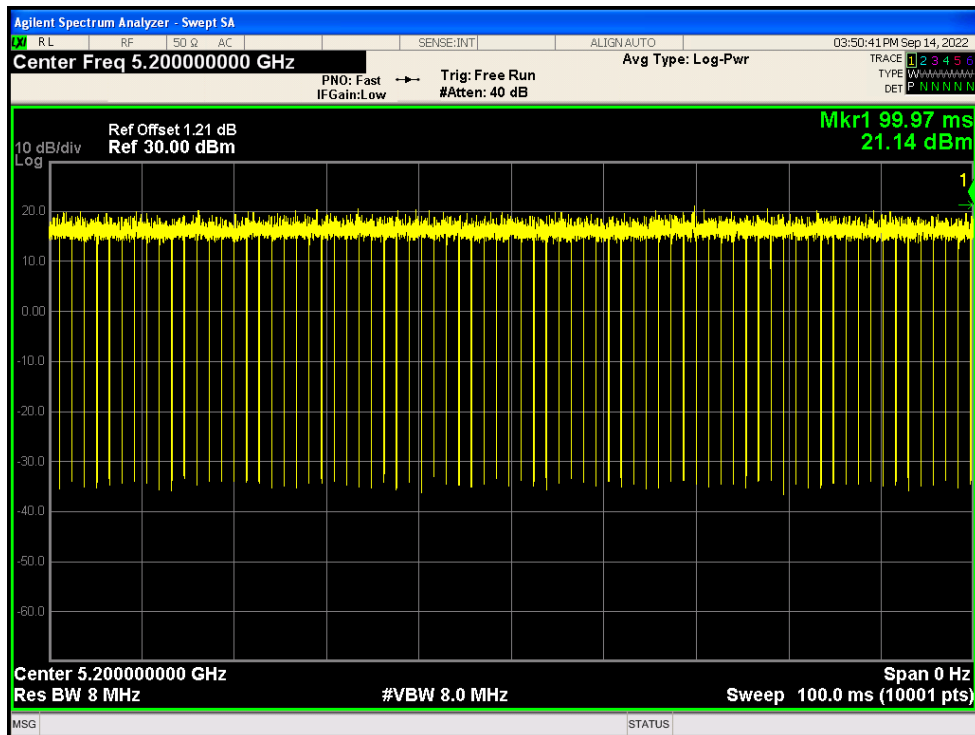


Duty Cycle NVNT n20 5240MHz Ant1

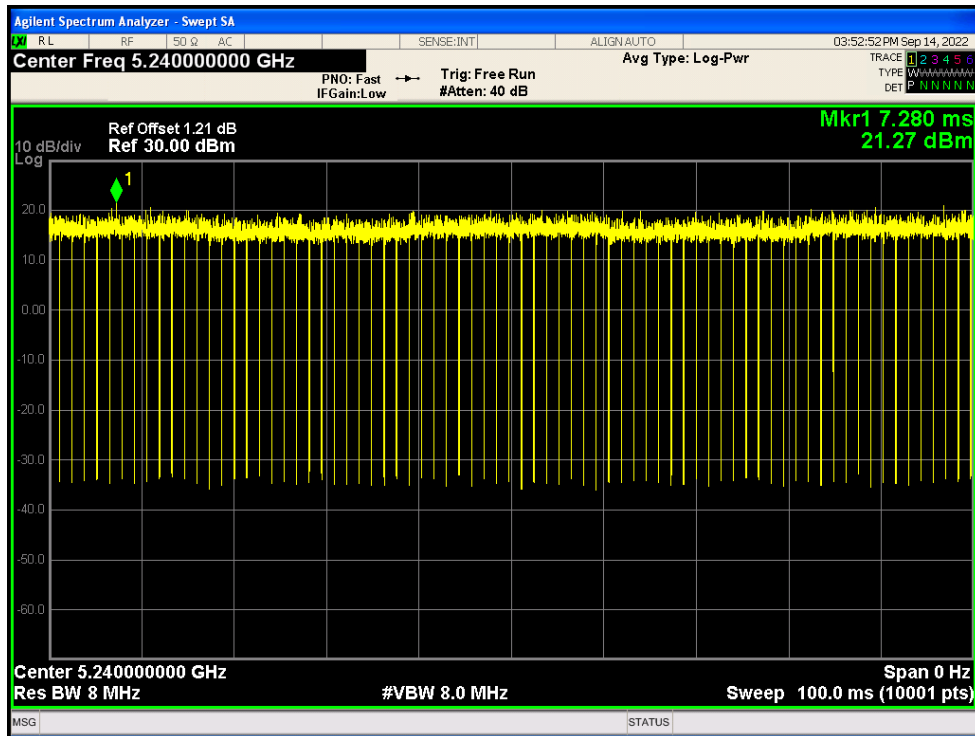

Duty Cycle NVNT n40 5190MHz Ant1

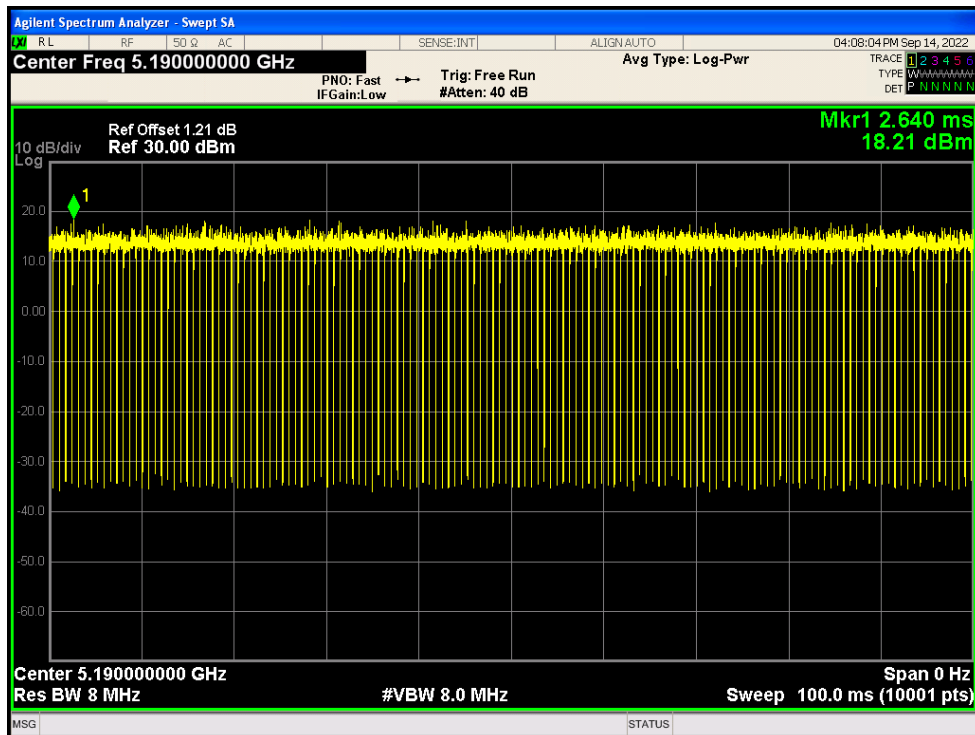

Duty Cycle NVNT n40 5230MHz Ant1

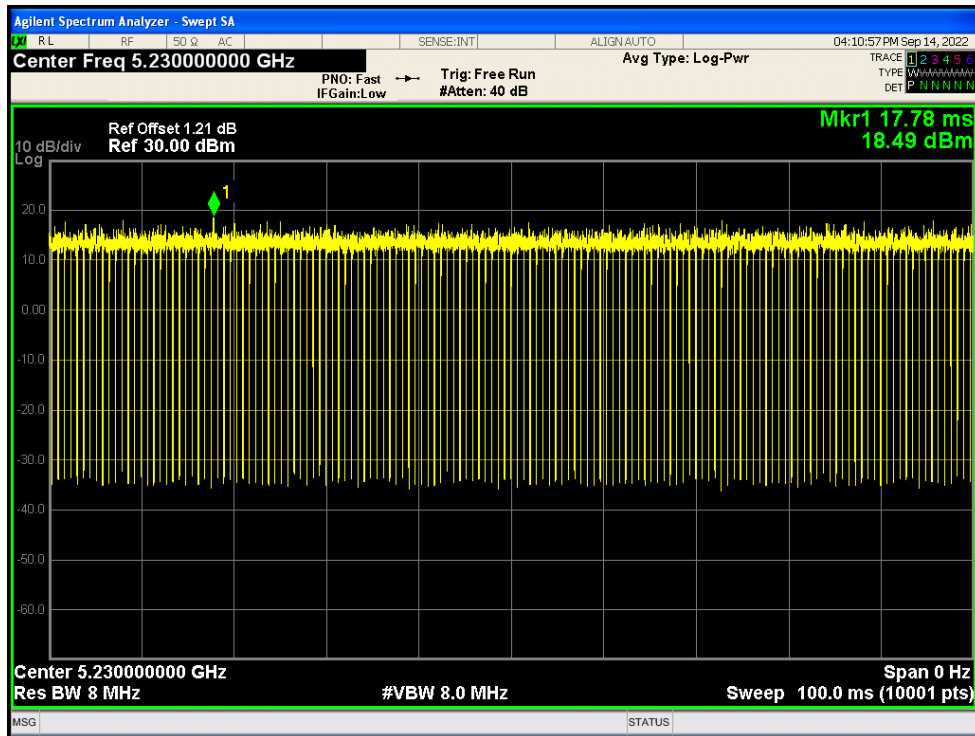


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	11.769	0.1	11.869	24	Pass
NVNT	a	5200	Ant1	11.784	0.1	11.884	24	Pass
NVNT	a	5240	Ant1	11.335	0.1	11.435	24	Pass
NVNT	ac20	5180	Ant1	11.393	0.1	11.493	24	Pass
NVNT	ac20	5200	Ant1	11.427	0.1	11.527	24	Pass
NVNT	ac20	5240	Ant1	11.001	0.1	11.101	24	Pass
NVNT	ac40	5190	Ant1	11.064	0.2	11.264	24	Pass
NVNT	ac40	5230	Ant1	10.836	0.19	11.026	24	Pass
NVNT	ac80	5210	Ant1	10.762	0.39	11.152	24	Pass
NVNT	n20	5180	Ant1	11.483	0.1	11.583	24	Pass
NVNT	n20	5200	Ant1	11.297	0.1	11.397	24	Pass
NVNT	n20	5240	Ant1	10.963	0.1	11.063	24	Pass
NVNT	n40	5190	Ant1	11.12	0.2	11.32	24	Pass
NVNT	n40	5230	Ant1	10.855	0.2	11.055	24	Pass


-26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	20.763	Pass
NVNT	a	5200	Ant1	20.606	Pass
NVNT	a	5240	Ant1	20.674	Pass
NVNT	ac20	5180	Ant1	20.882	Pass
NVNT	ac20	5200	Ant1	21.104	Pass
NVNT	ac20	5240	Ant1	20.825	Pass
NVNT	ac40	5190	Ant1	39.075	Pass
NVNT	ac40	5230	Ant1	39.557	Pass
NVNT	ac80	5210	Ant1	80.355	Pass
NVNT	n20	5180	Ant1	21.182	Pass
NVNT	n20	5200	Ant1	21.02	Pass
NVNT	n20	5240	Ant1	21.269	Pass
NVNT	n40	5190	Ant1	39.186	Pass
NVNT	n40	5230	Ant1	39.196	Pass


-26dB Bandwidth NVNT a 5180MHz Ant1

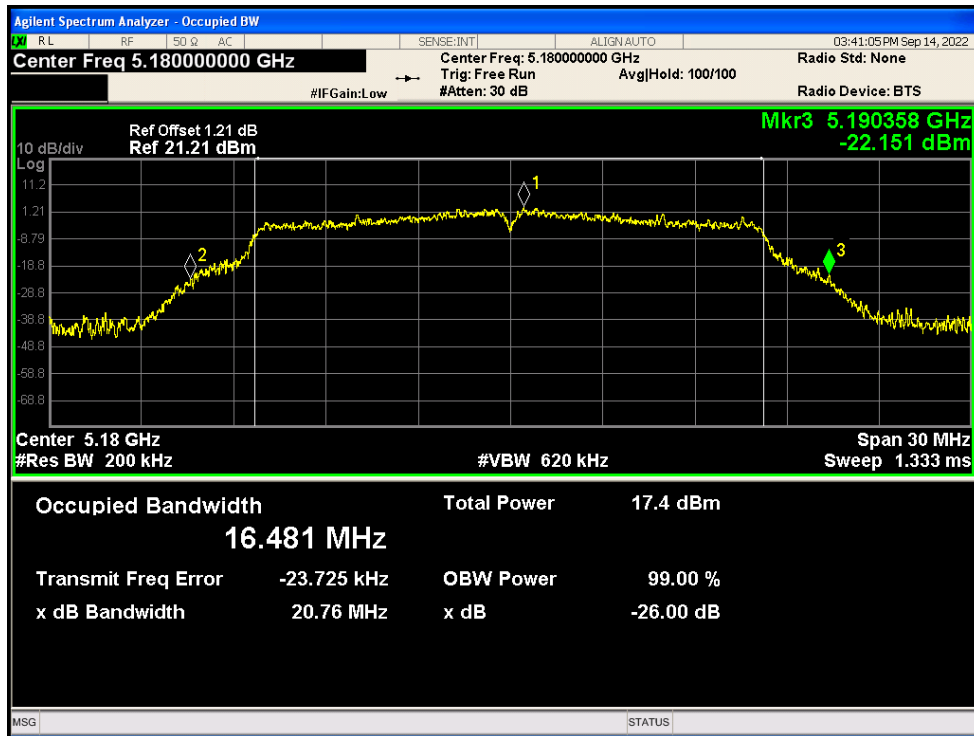


-26dB Bandwidth NVNT a 5200MHz Ant1

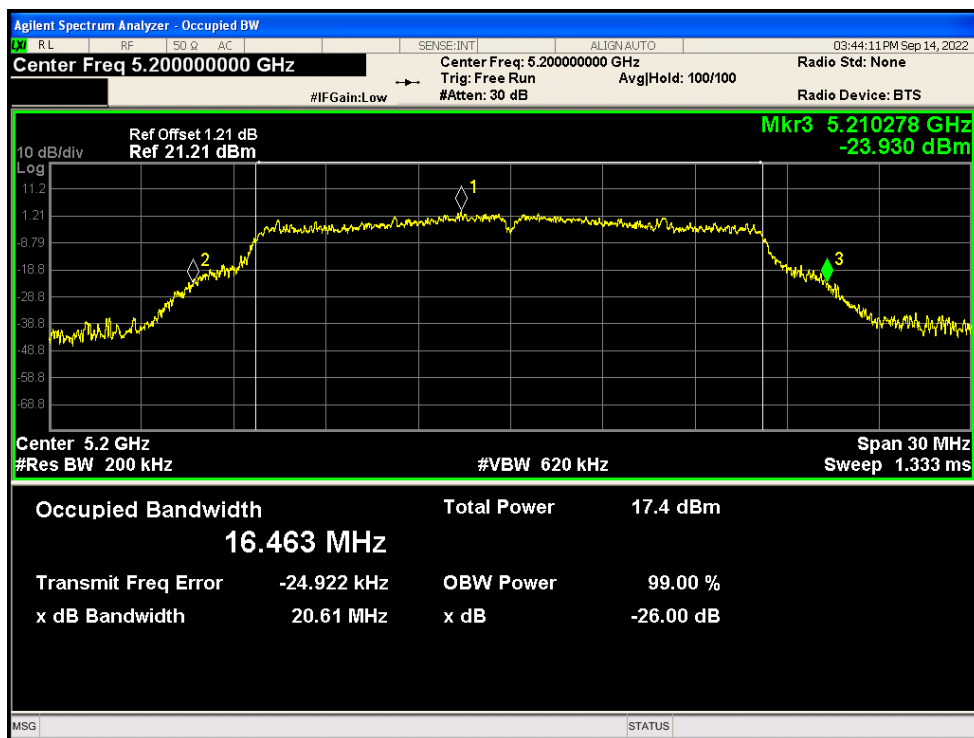


-26dB Bandwidth NVNT a 5240MHz Ant1

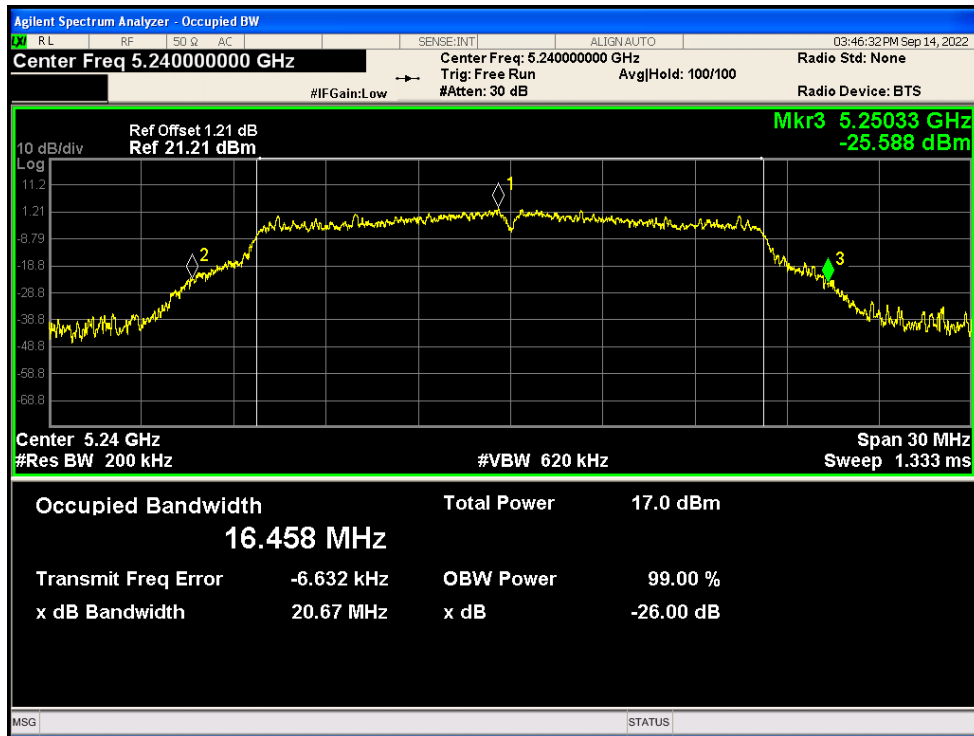


-26dB Bandwidth NVNT ac20 5180MHz Ant1

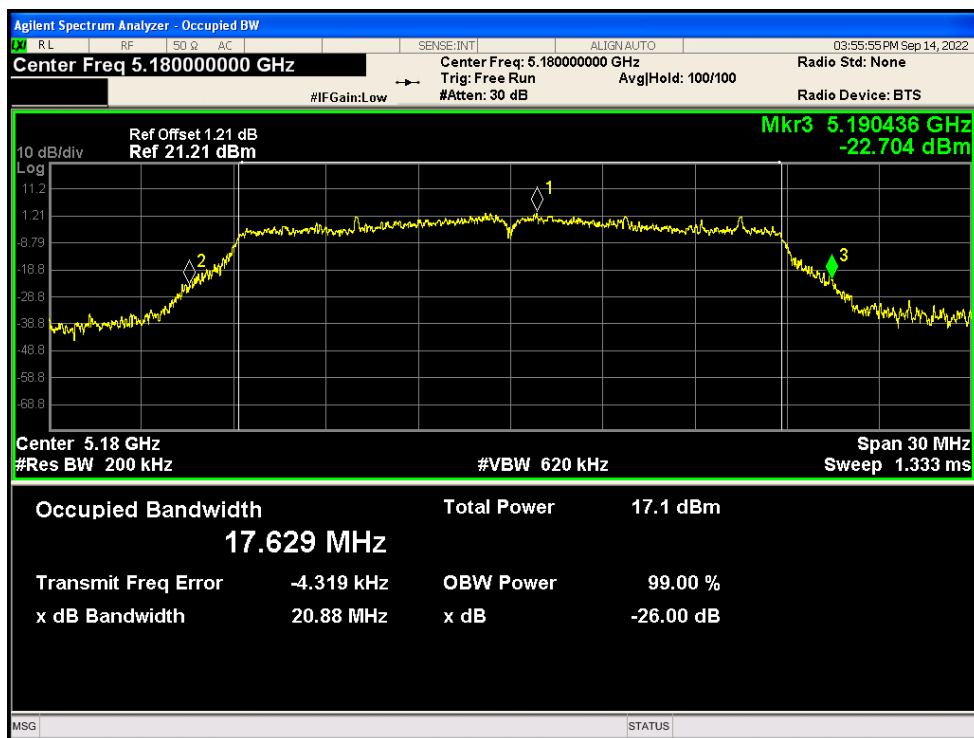


-26dB Bandwidth NVNT ac20 5200MHz Ant1

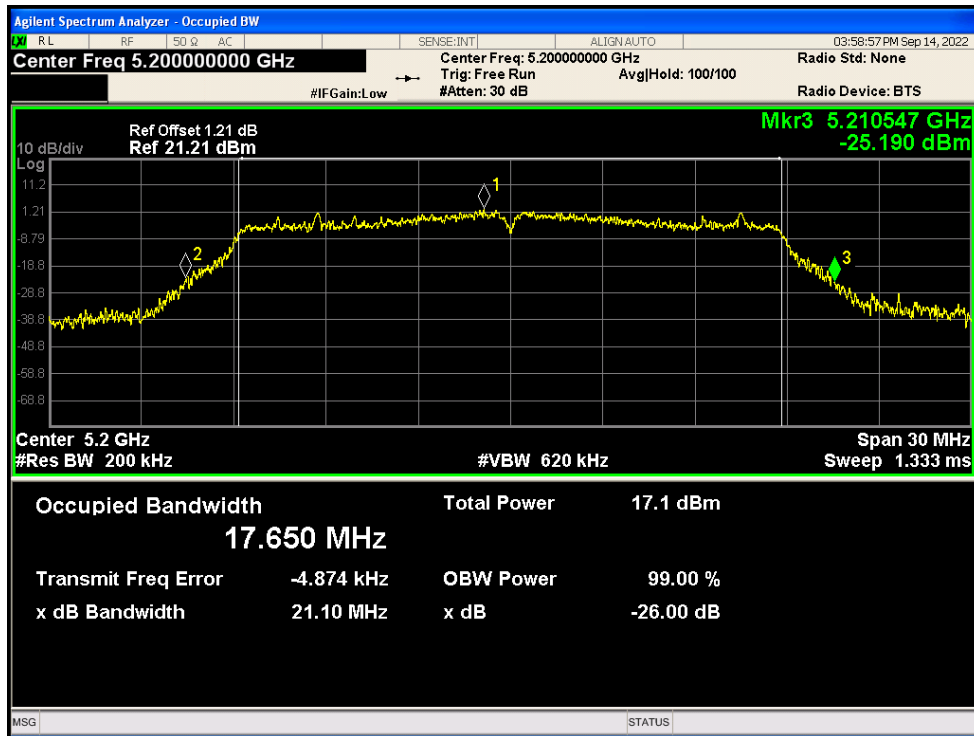


-26dB Bandwidth NVNT ac20 5240MHz Ant1

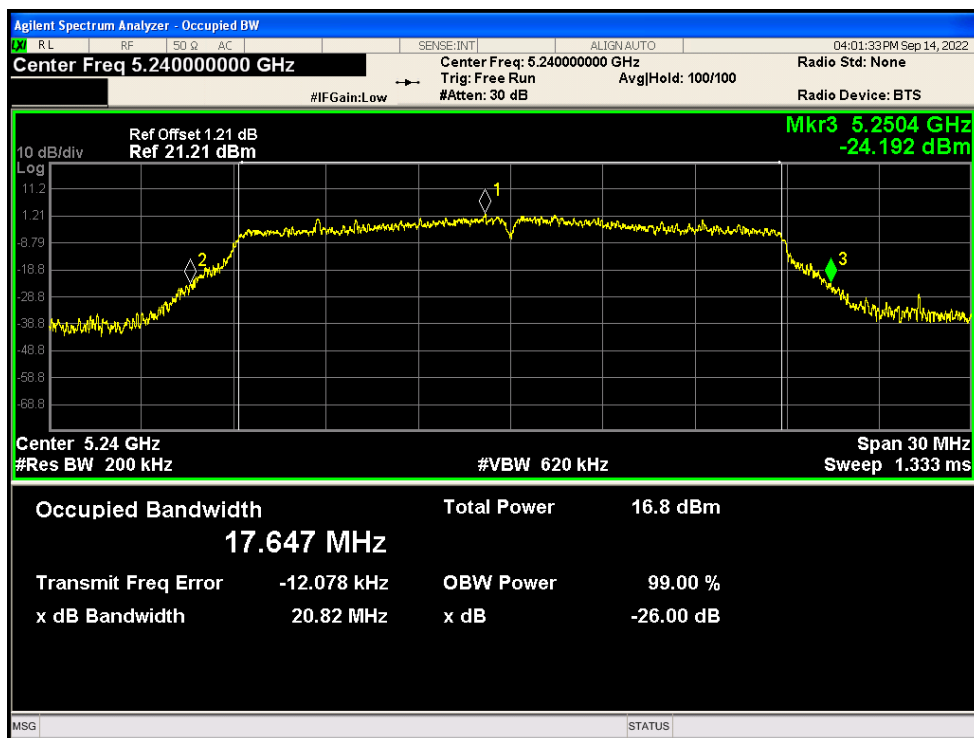


-26dB Bandwidth NVNT ac40 5190MHz Ant1

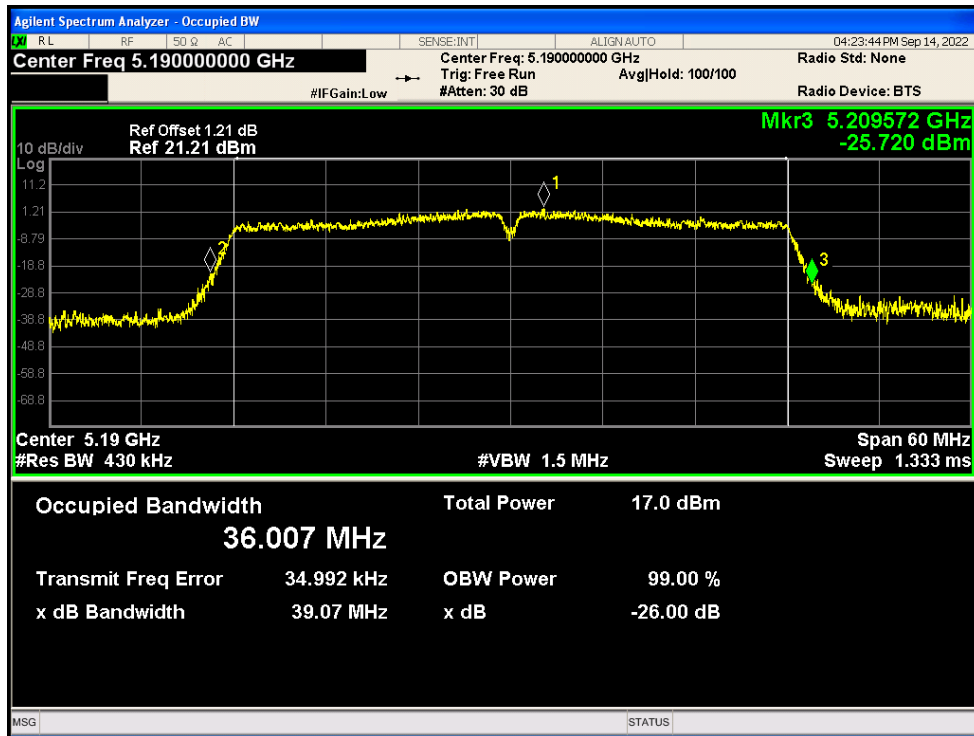


-26dB Bandwidth NVNT ac40 5230MHz Ant1

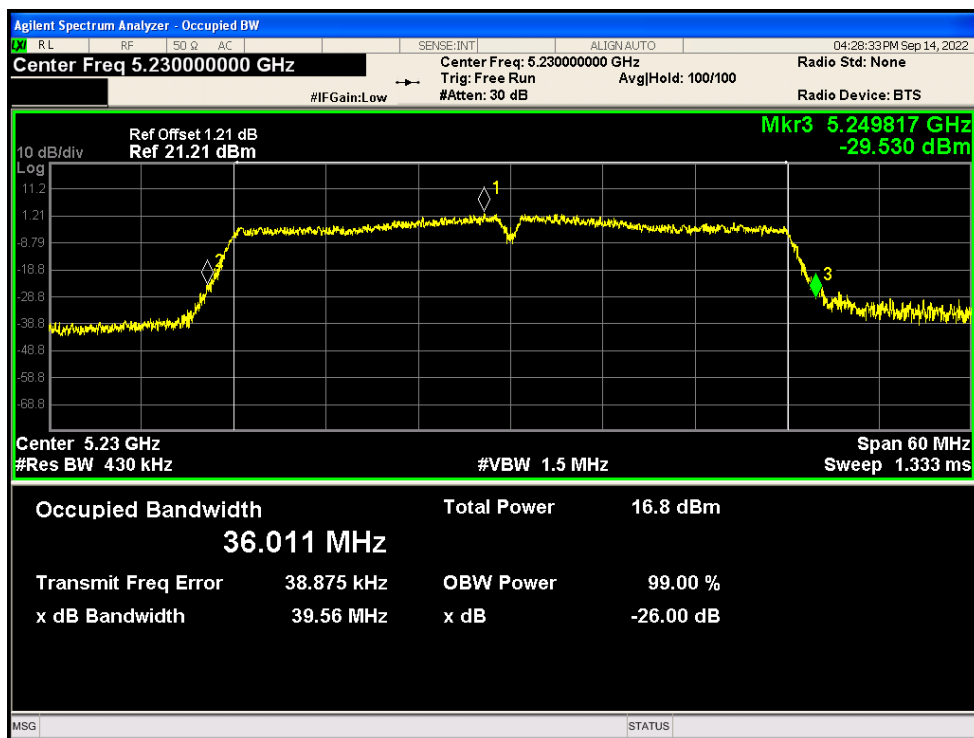


-26dB Bandwidth NVNT ac80 5210MHz Ant1

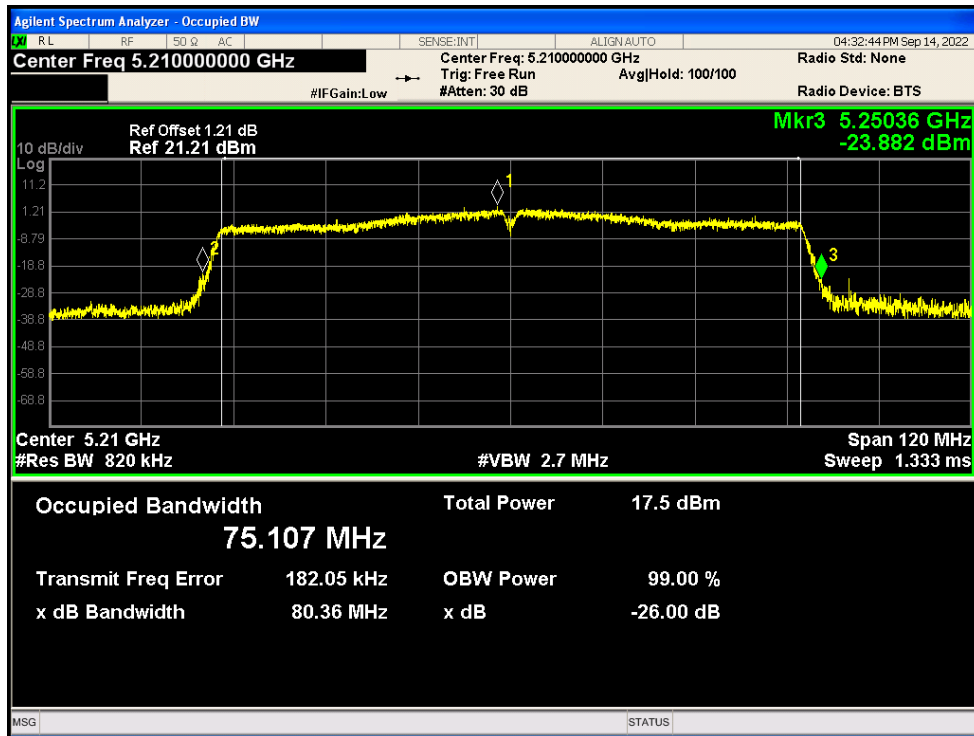


-26dB Bandwidth NVNT n20 5180MHz Ant1

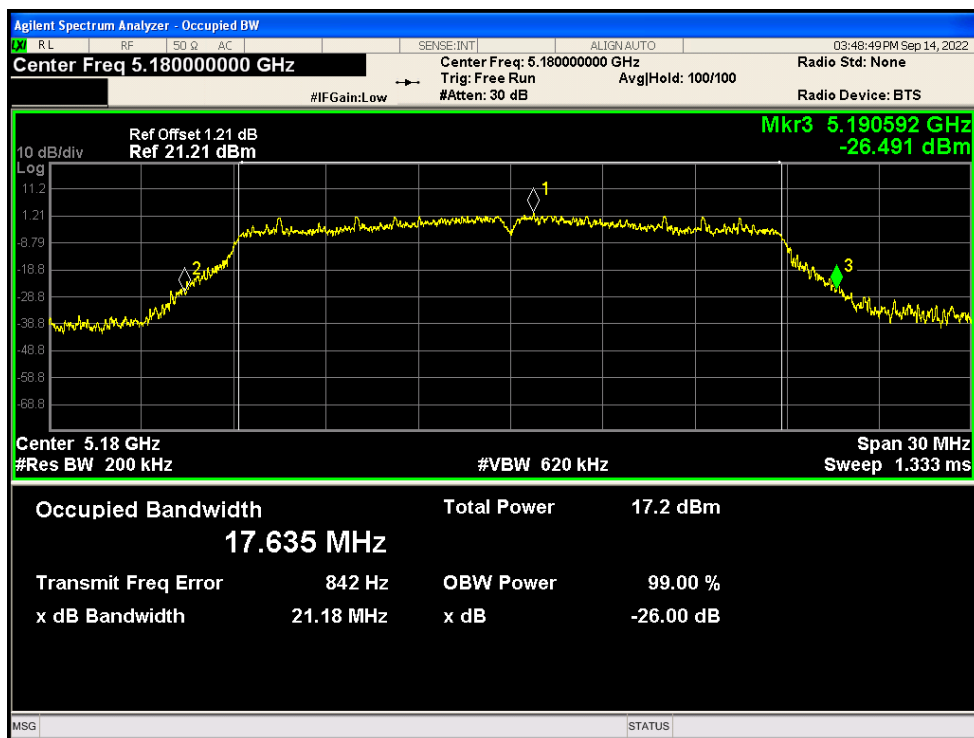


-26dB Bandwidth NVNT n20 5200MHz Ant1

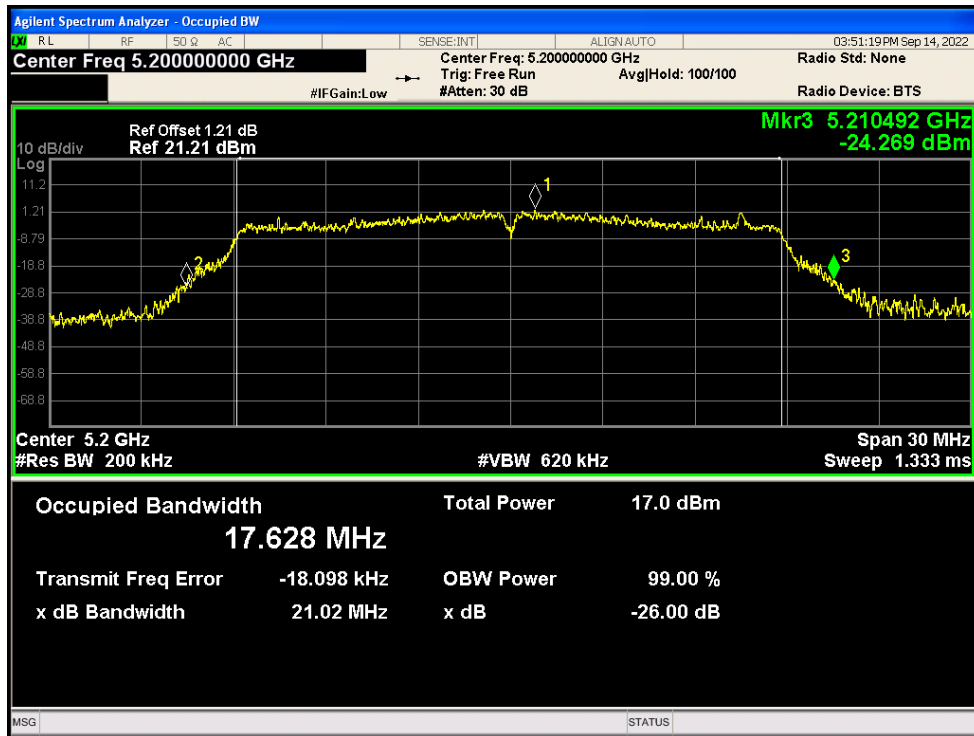


-26dB Bandwidth NVNT n20 5240MHz Ant1

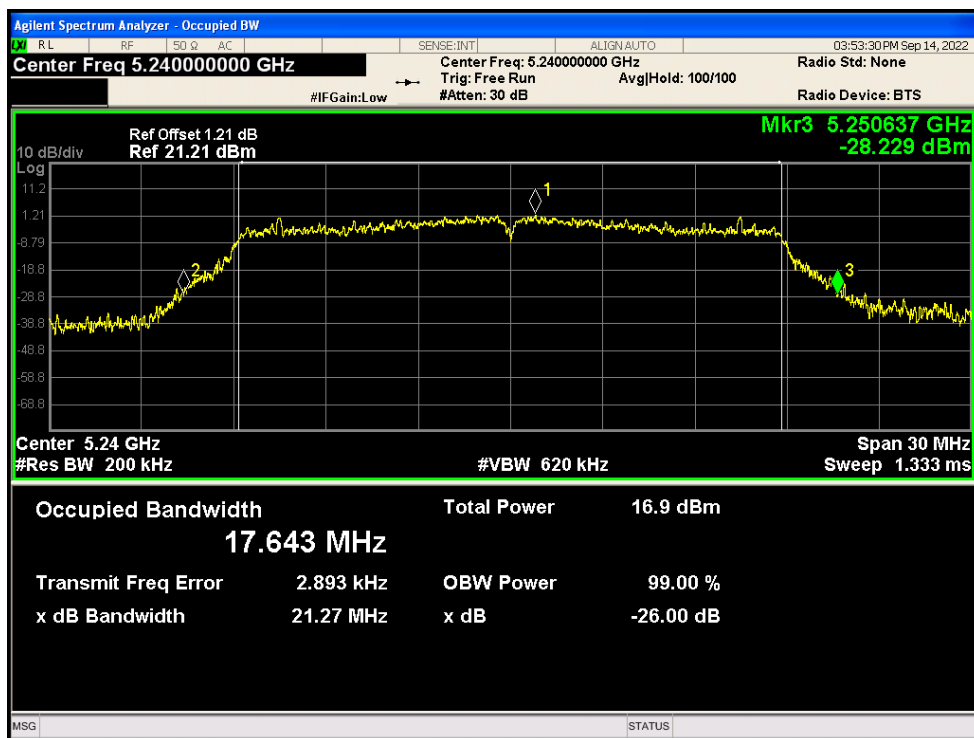

-26dB Bandwidth NVNT n40 5190MHz Ant1

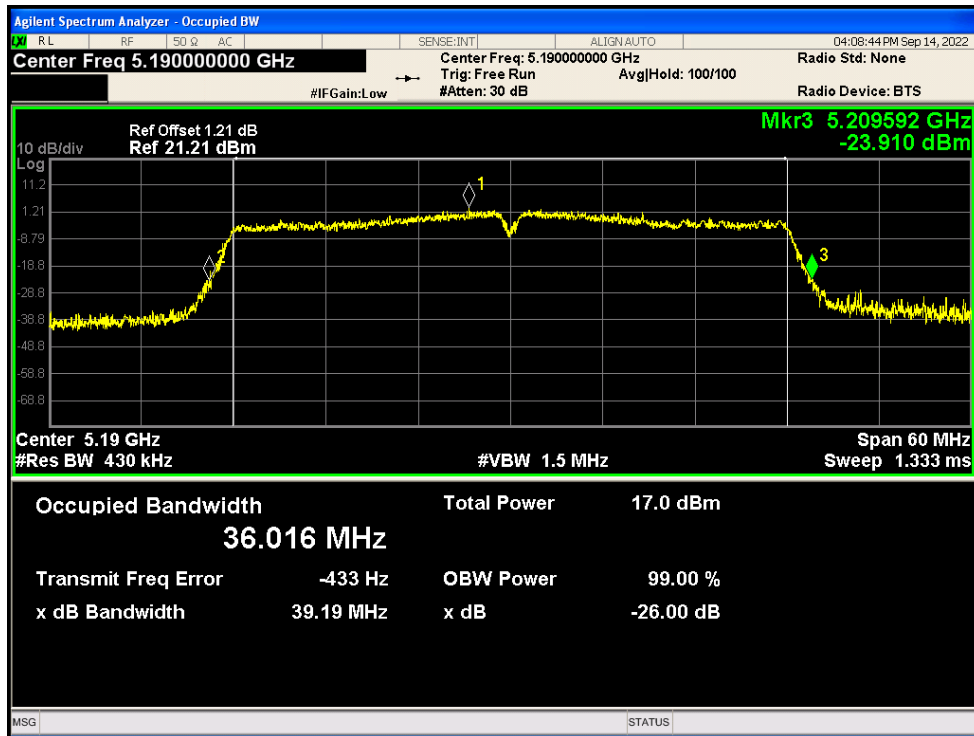


-26dB Bandwidth NVNT n40 5230MHz Ant1

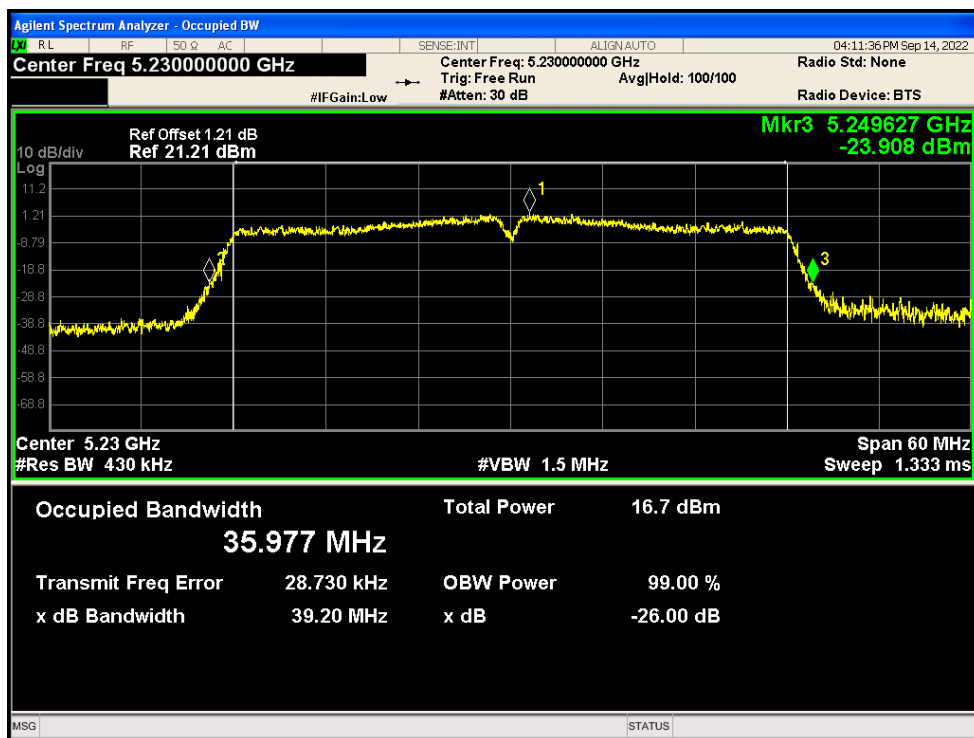


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.474
NVNT	a	5200	Ant1	16.461
NVNT	a	5240	Ant1	16.475
NVNT	ac20	5180	Ant1	17.644
NVNT	ac20	5200	Ant1	17.62
NVNT	ac20	5240	Ant1	17.634
NVNT	ac40	5190	Ant1	35.988
NVNT	ac40	5230	Ant1	36.07
NVNT	ac80	5210	Ant1	75.138
NVNT	n20	5180	Ant1	17.622
NVNT	n20	5200	Ant1	17.632
NVNT	n20	5240	Ant1	17.635
NVNT	n40	5190	Ant1	36.057
NVNT	n40	5230	Ant1	36.034


OBW NVNT a 5180MHz Ant1

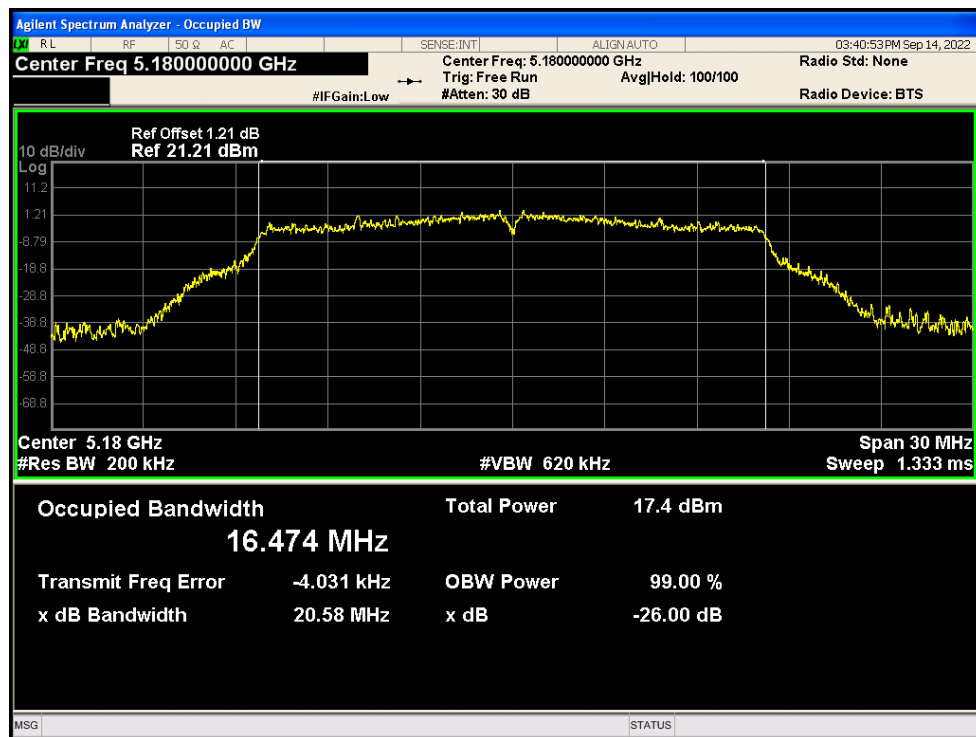


OBW NVNT a 5200MHz Ant1

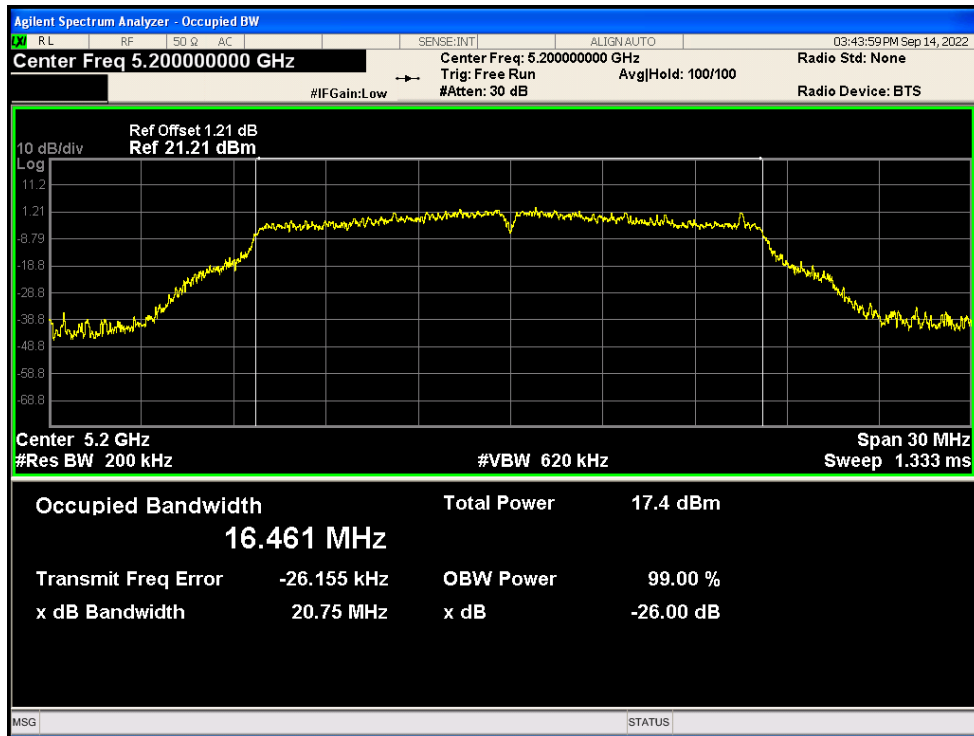


OBW NVNT a 5240MHz Ant1

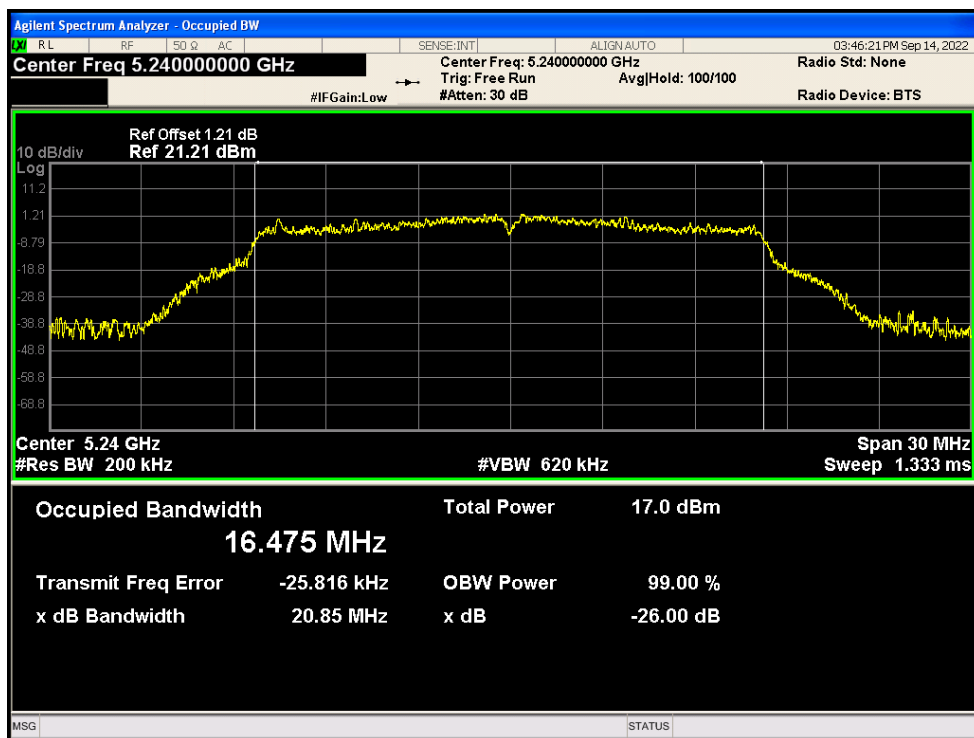


OBW NVNT ac20 5180MHz Ant1

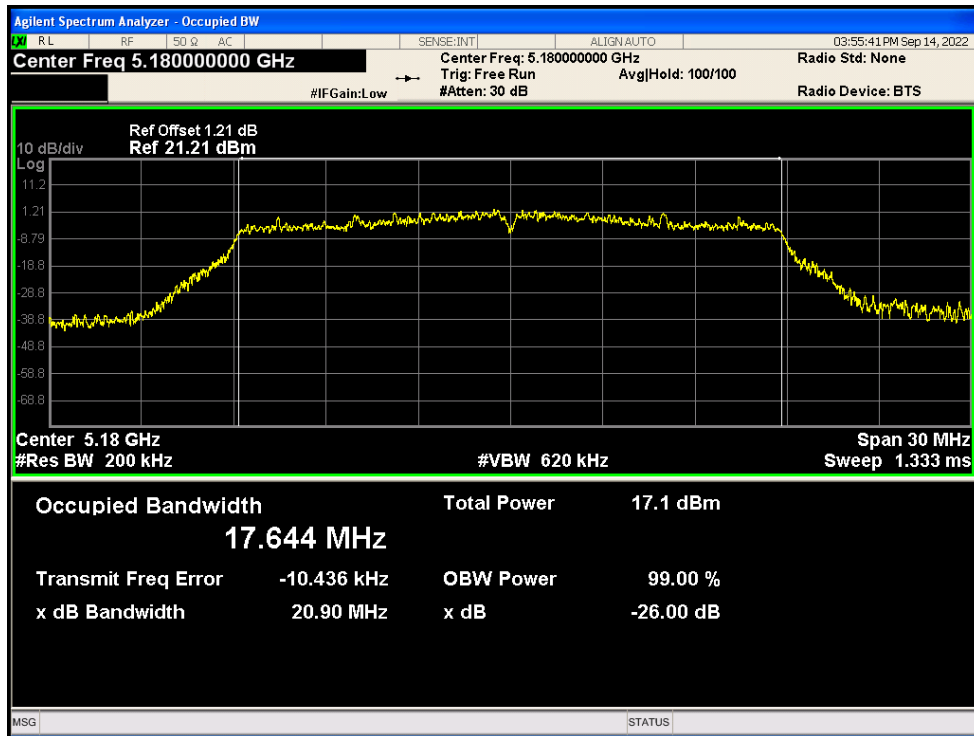


OBW NVNT ac20 5200MHz Ant1

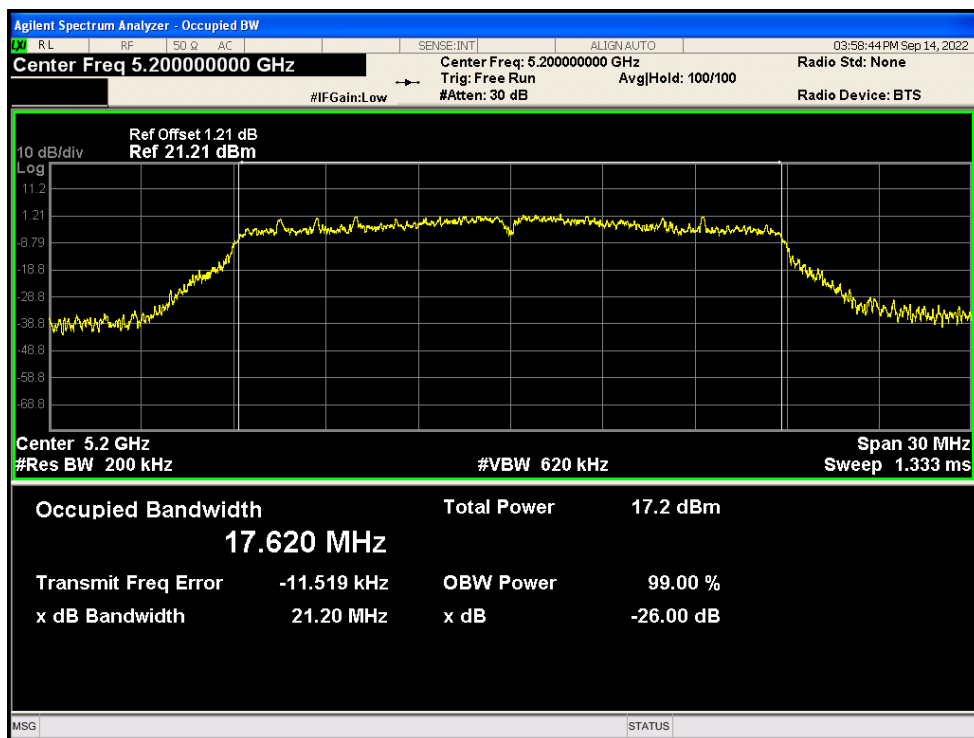


OBW NVNT ac20 5240MHz Ant1

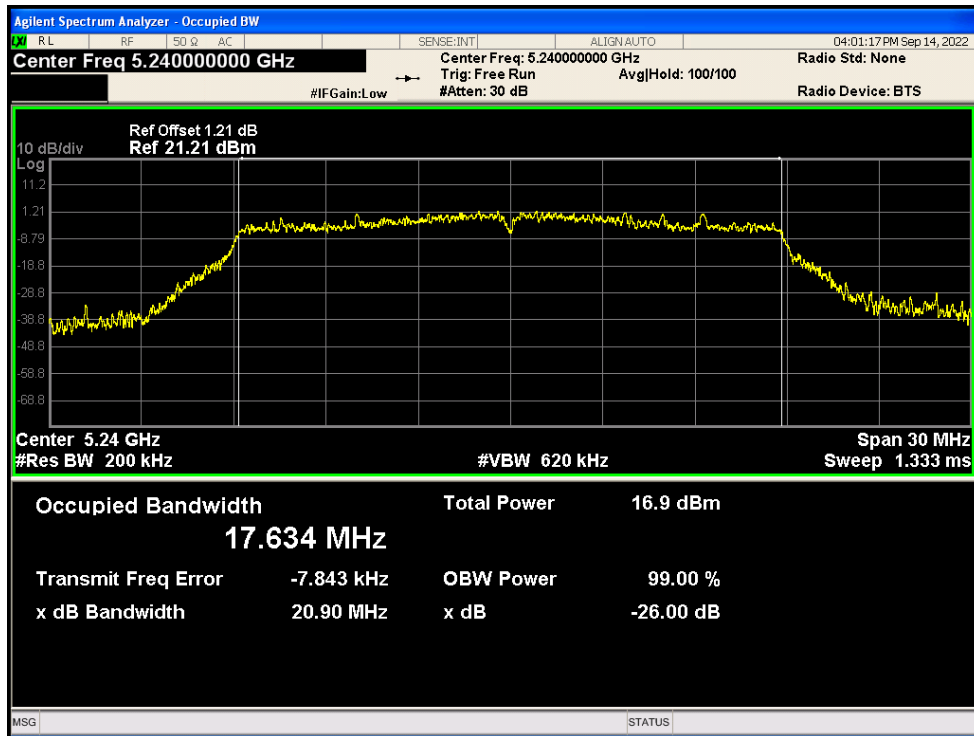


OBW NVNT ac40 5190MHz Ant1

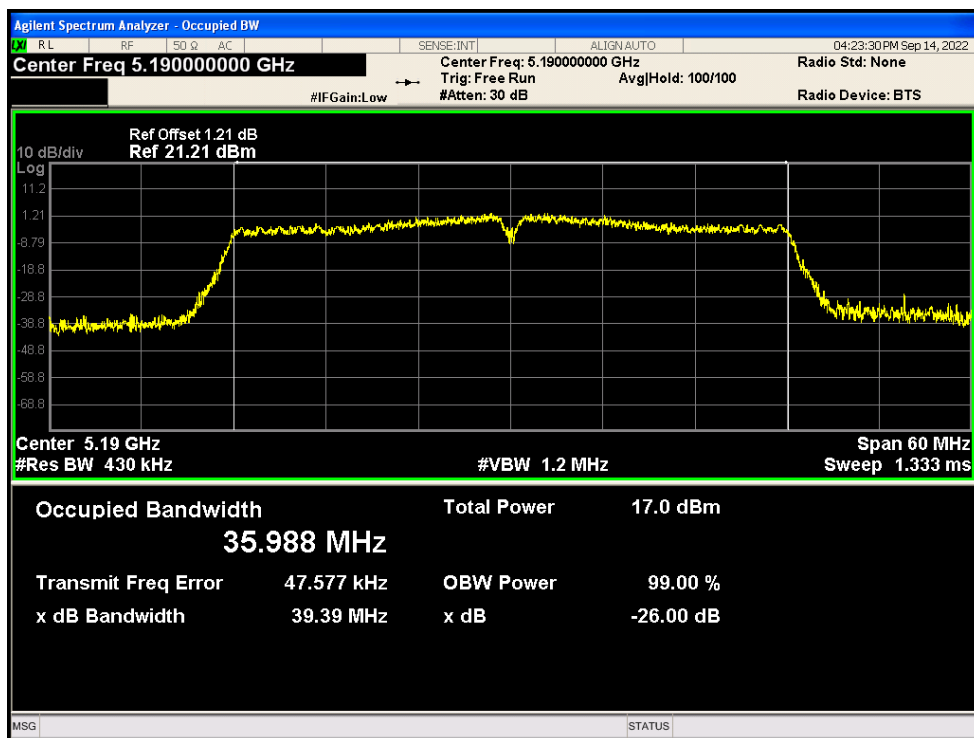


OBW NVNT ac40 5230MHz Ant1

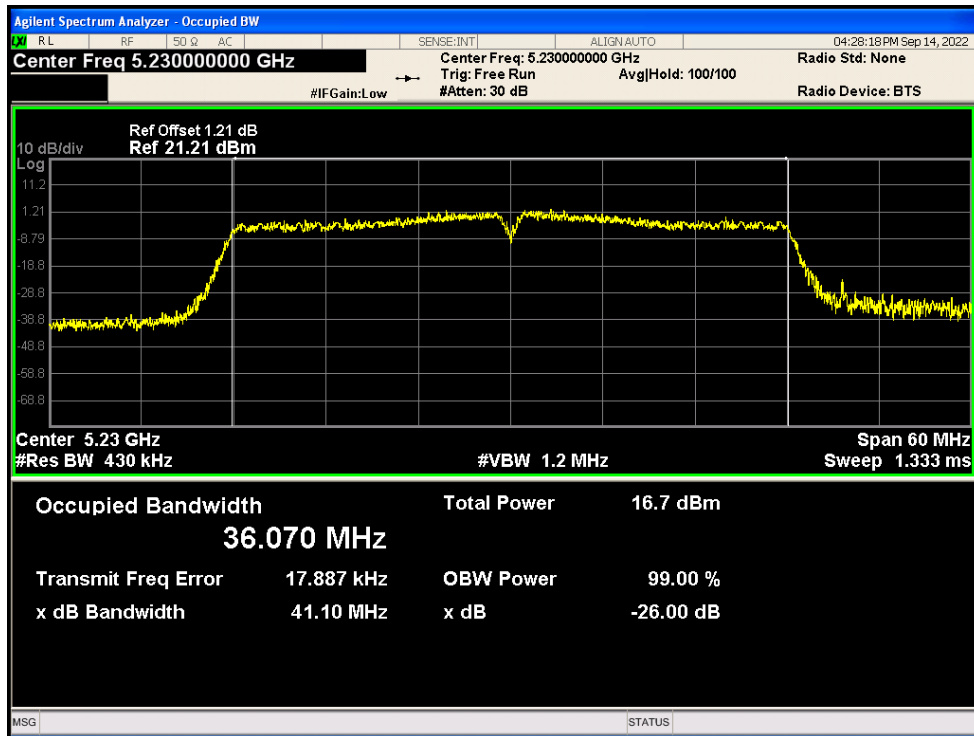


OBW NVNT ac80 5210MHz Ant1

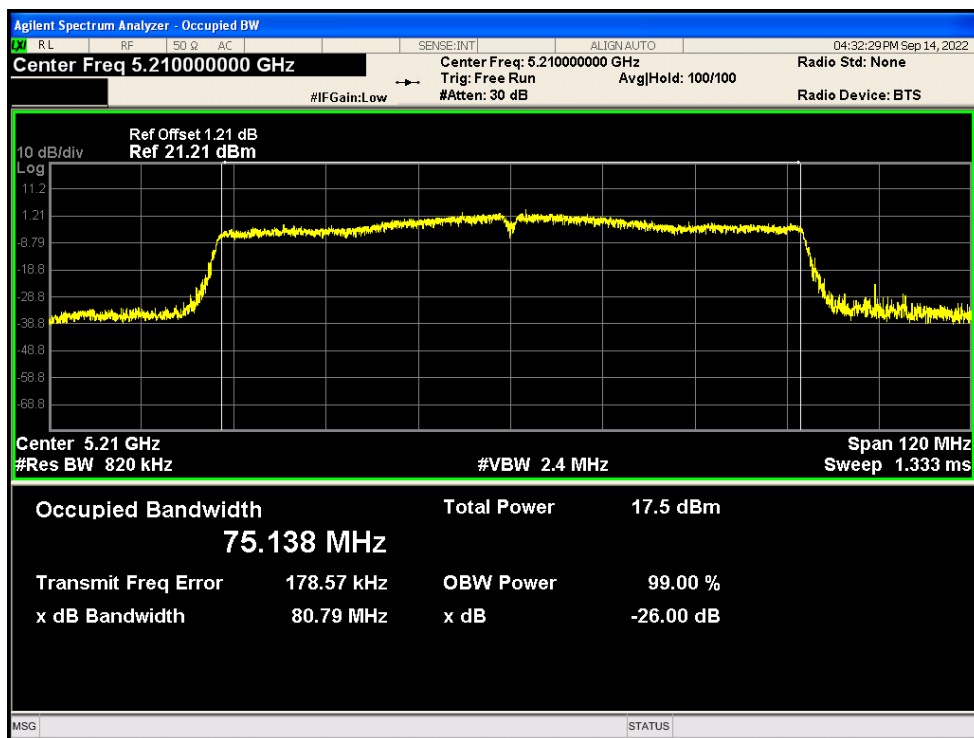


OBW NVNT n20 5180MHz Ant1

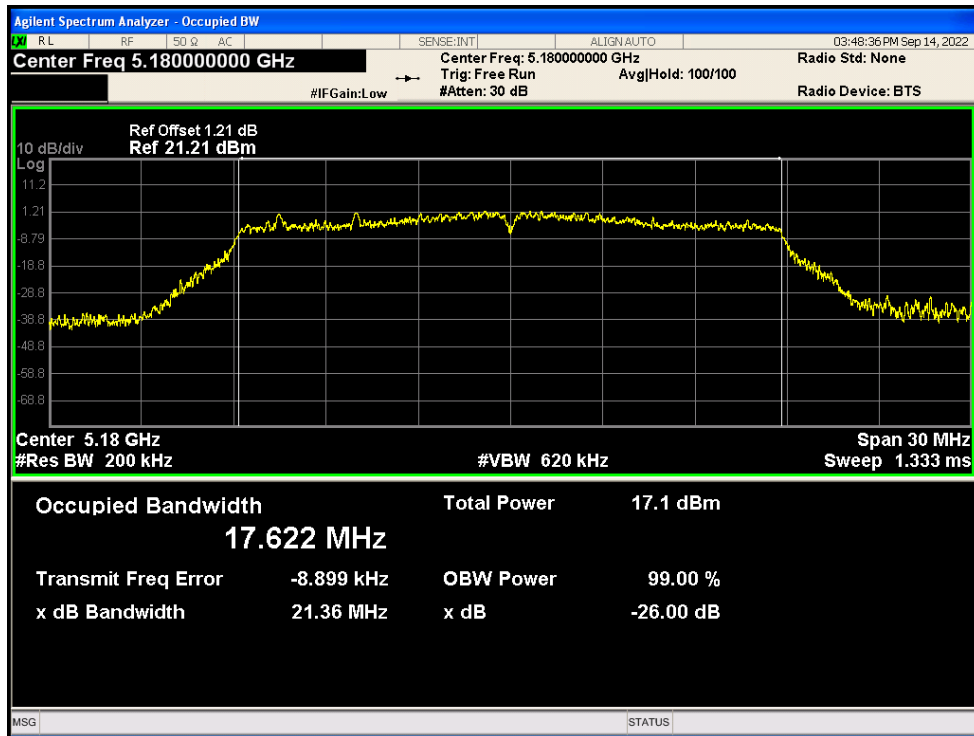


OBW NVNT n20 5200MHz Ant1

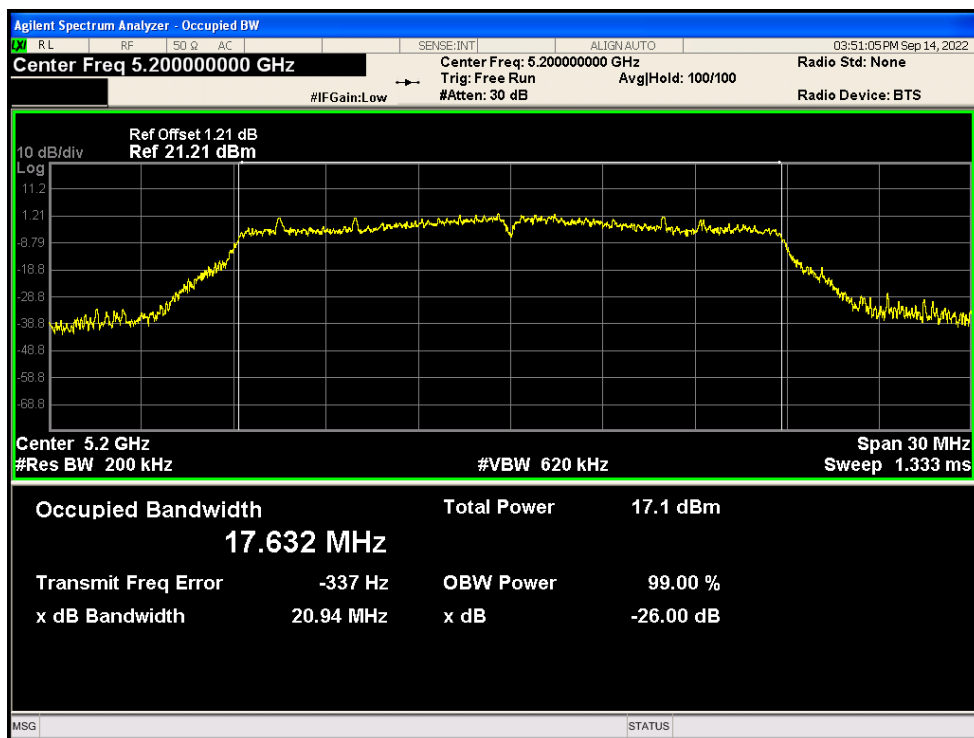


OBW NVNT n20 5240MHz Ant1

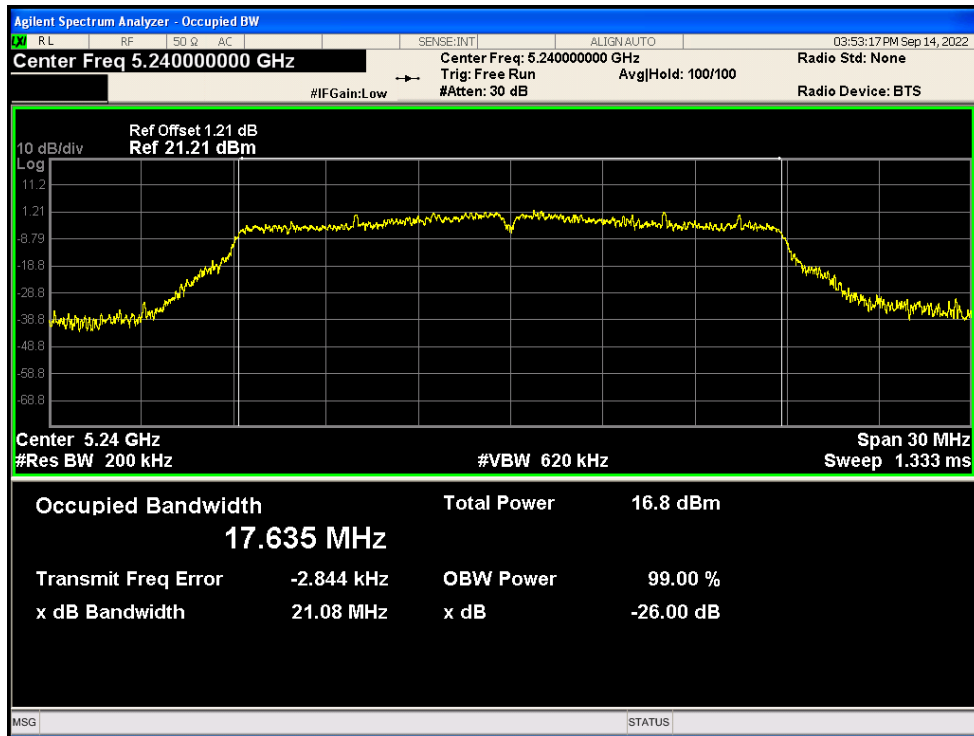

OBW NVNT n40 5190MHz Ant1

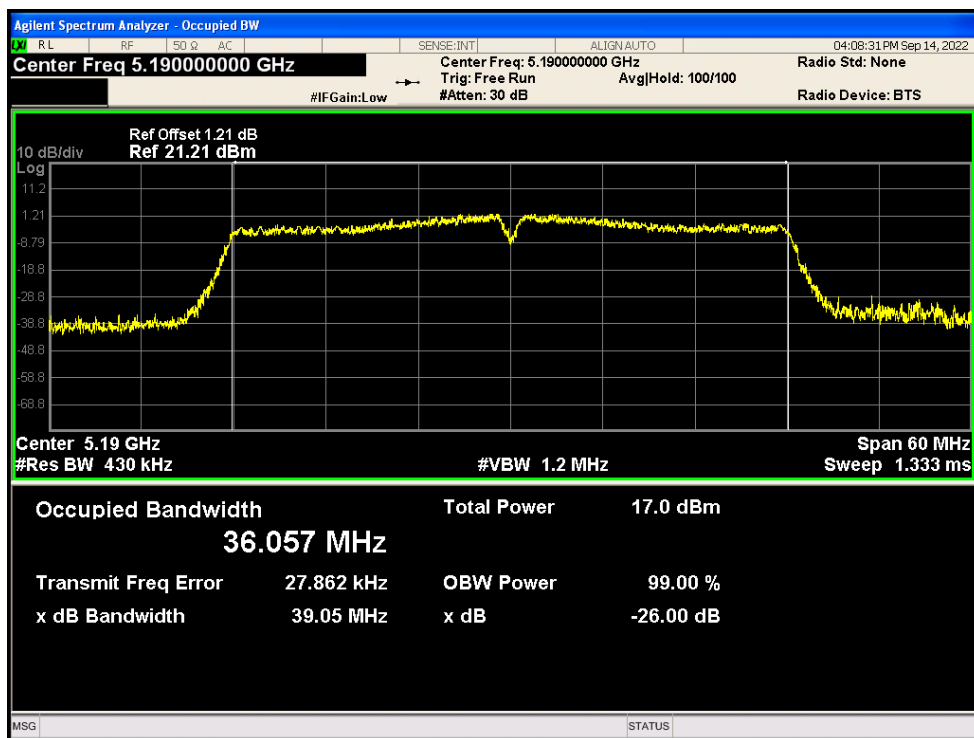


OBW NVNT n40 5230MHz Ant1

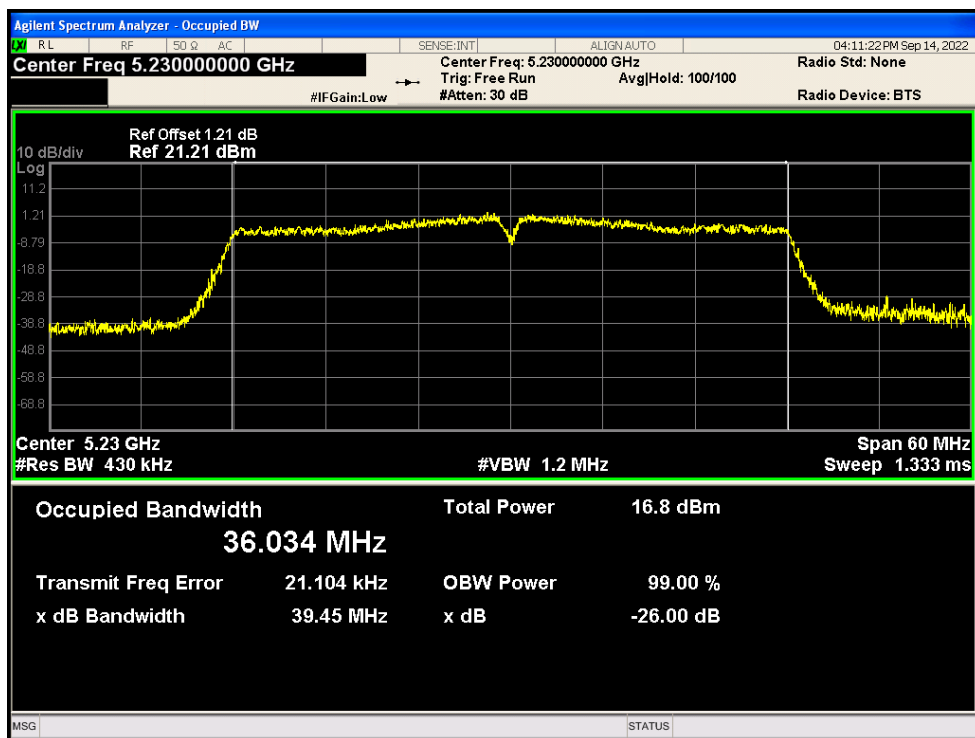


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	3.208	0.1	3.308	11	Pass
NVNT	a	5200	Ant1	2.911	0.1	3.011	11	Pass
NVNT	a	5240	Ant1	2.693	0.1	2.793	11	Pass
NVNT	ac20	5180	Ant1	2.342	0.1	2.442	11	Pass
NVNT	ac20	5200	Ant1	2.575	0.1	2.675	11	Pass
NVNT	ac20	5240	Ant1	2.253	0.1	2.353	11	Pass
NVNT	ac40	5190	Ant1	-1.067	0.2	-0.867	11	Pass
NVNT	ac40	5230	Ant1	-1.223	0.19	-1.033	11	Pass
NVNT	ac80	5210	Ant1	-4.231	0.39	-3.841	11	Pass
NVNT	n20	5180	Ant1	2.585	0.1	2.685	11	Pass
NVNT	n20	5200	Ant1	2.145	0.1	2.245	11	Pass
NVNT	n20	5240	Ant1	2.091	0.1	2.191	11	Pass
NVNT	n40	5190	Ant1	-1.201	0.2	-1.001	11	Pass
NVNT	n40	5230	Ant1	-1.394	0.2	-1.194	11	Pass


PSD NVNT a 5180MHz Ant1

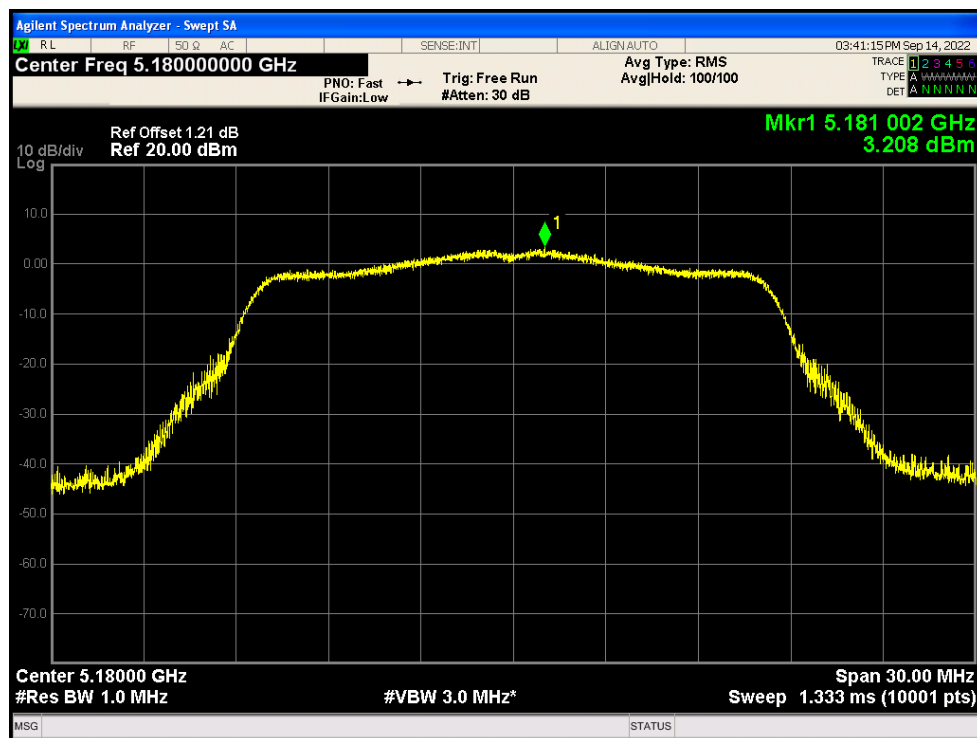


PSD NVNT a 5200MHz Ant1

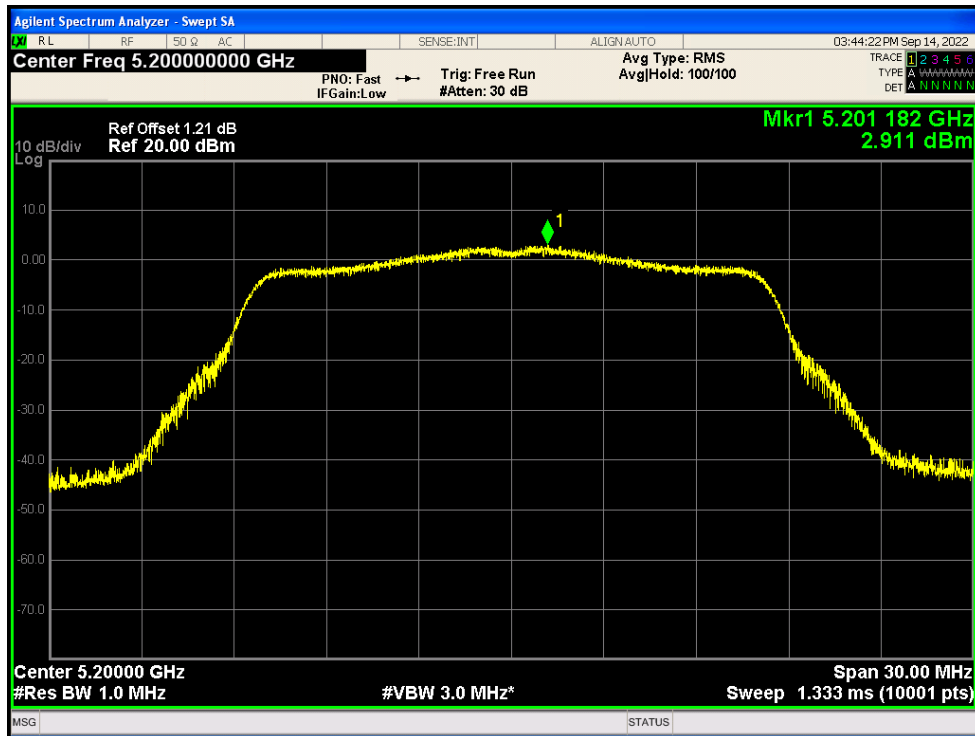


PSD NVNT a 5240MHz Ant1

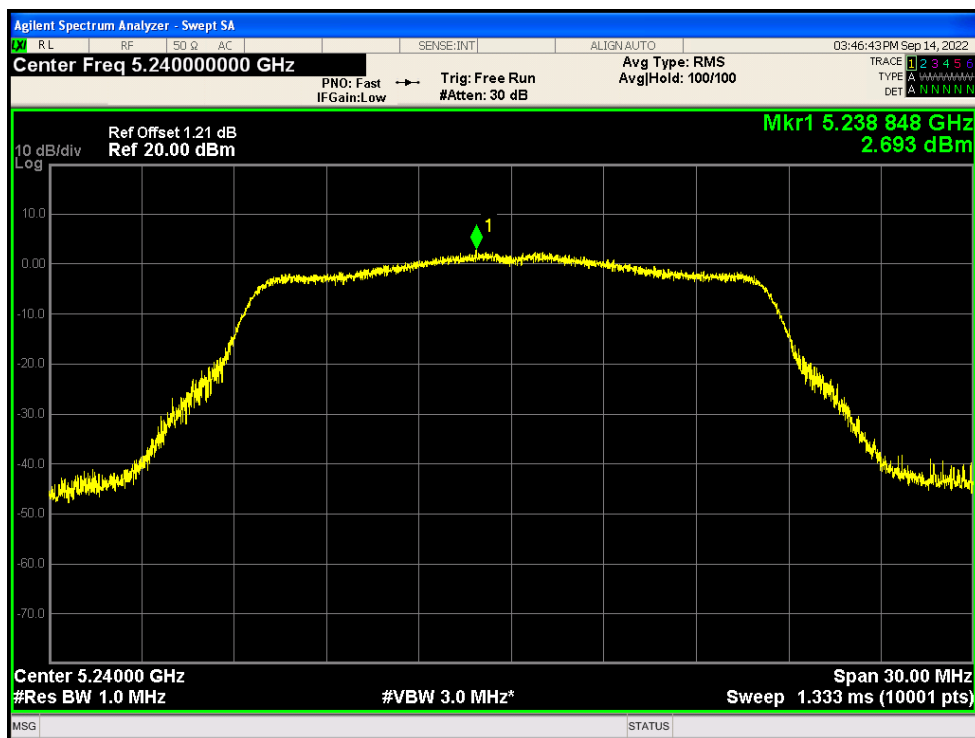


PSD NVNT ac20 5180MHz Ant1

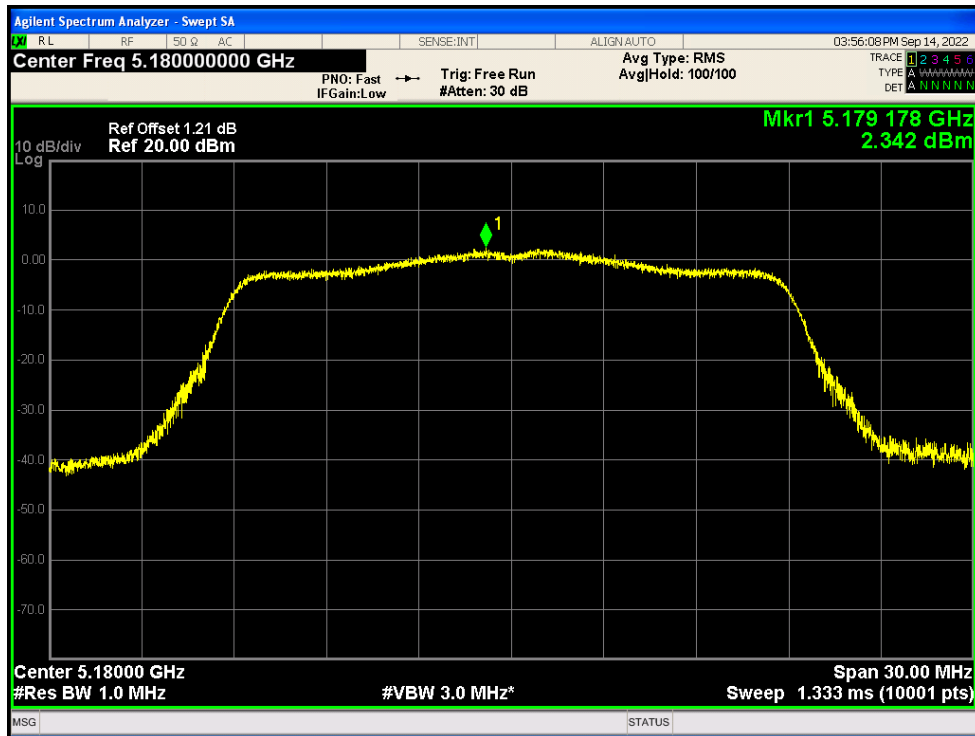


PSD NVNT ac20 5200MHz Ant1

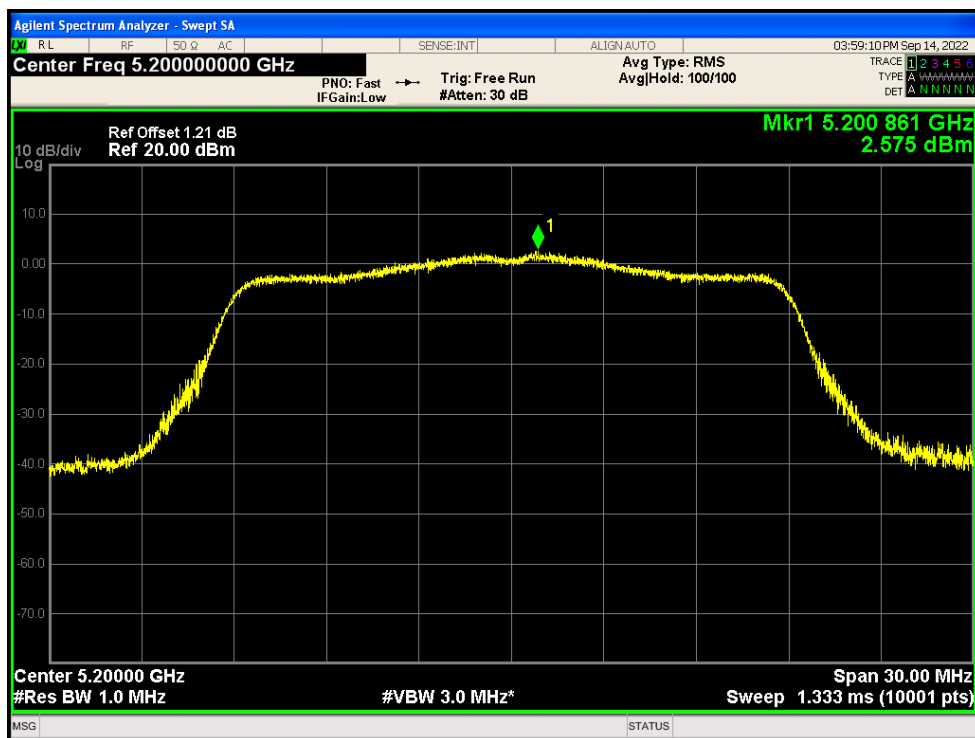


PSD NVNT ac20 5240MHz Ant1

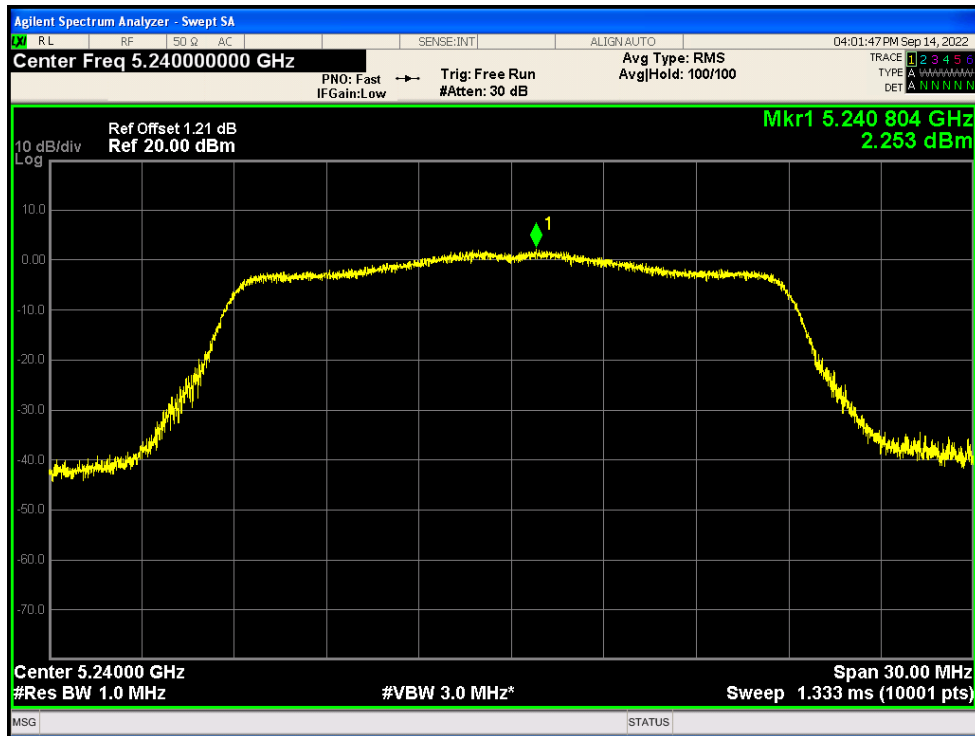


PSD NVNT ac40 5190MHz Ant1

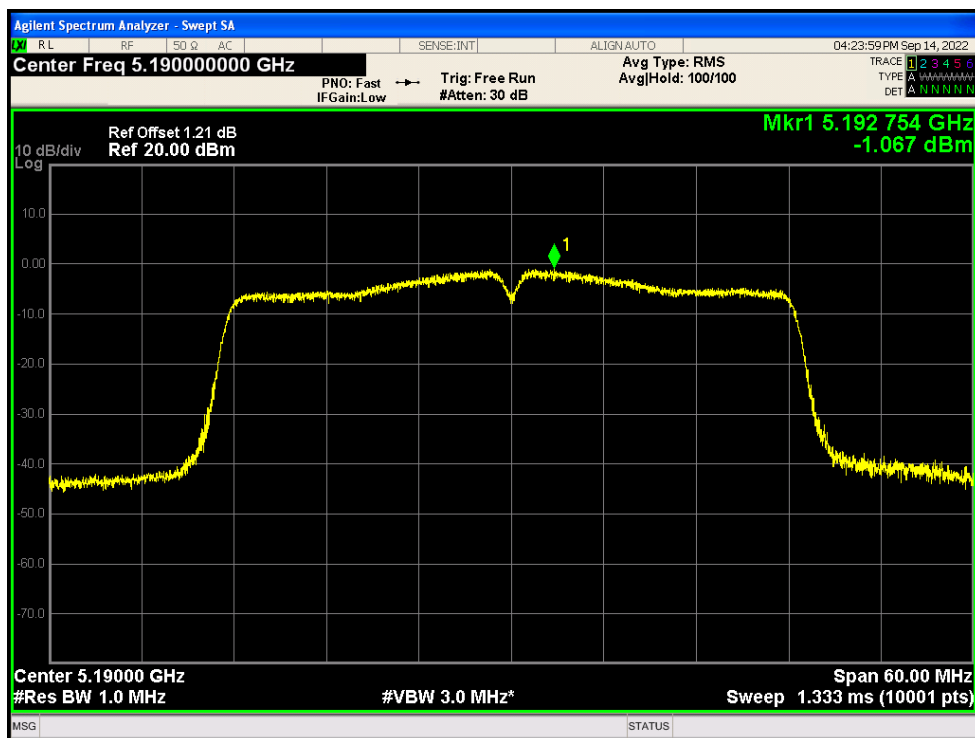


PSD NVNT ac40 5230MHz Ant1

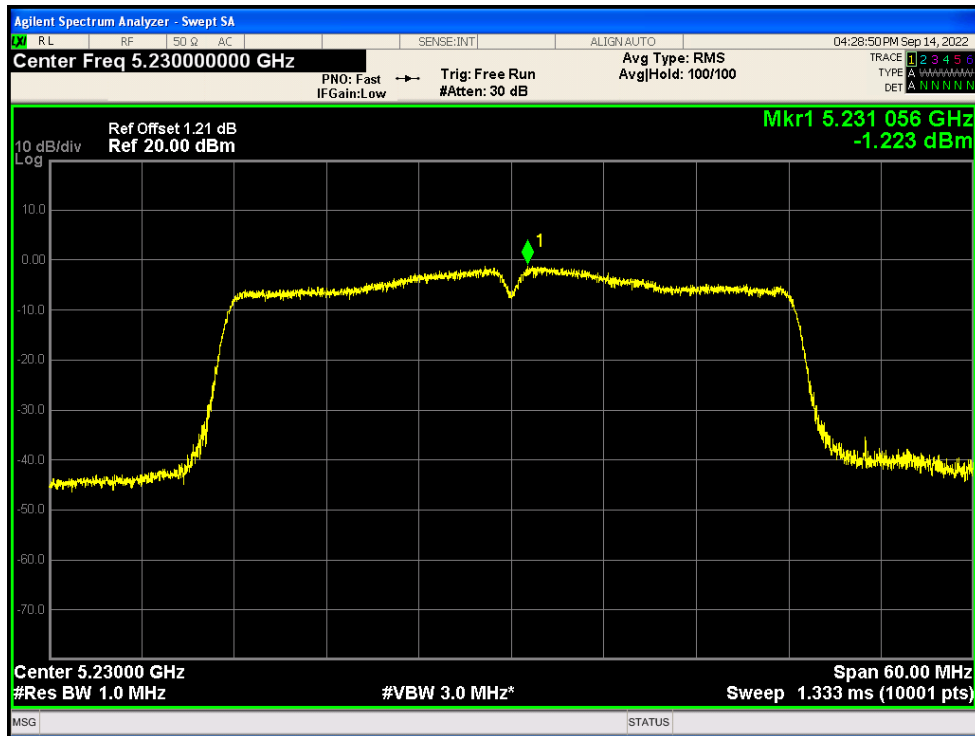


PSD NVNT ac80 5210MHz Ant1

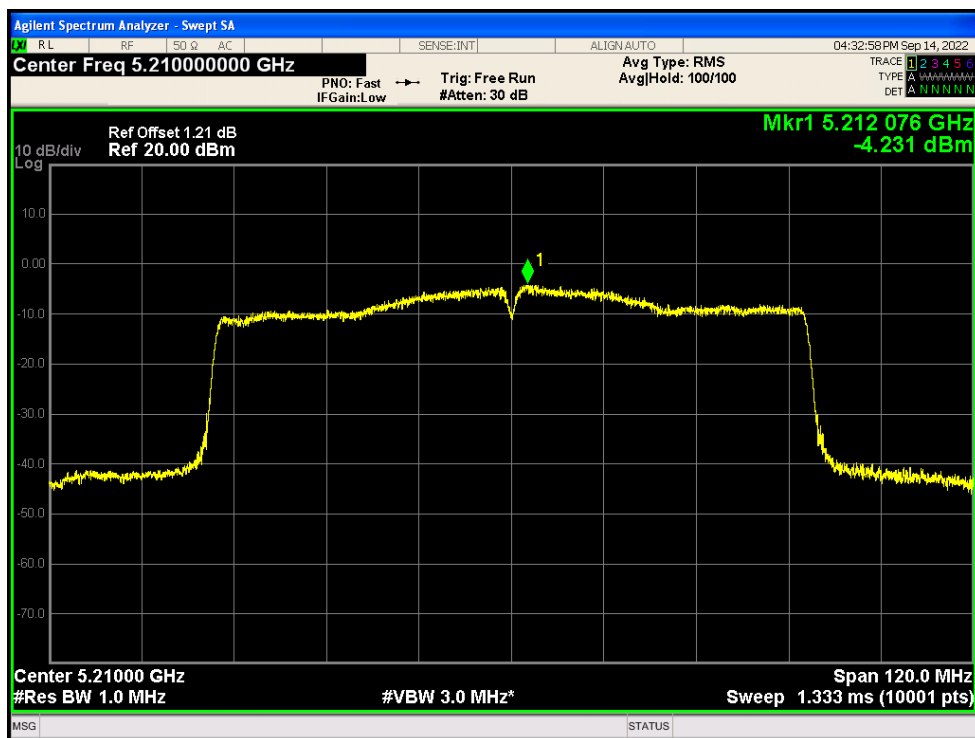


PSD NVNT n20 5180MHz Ant1

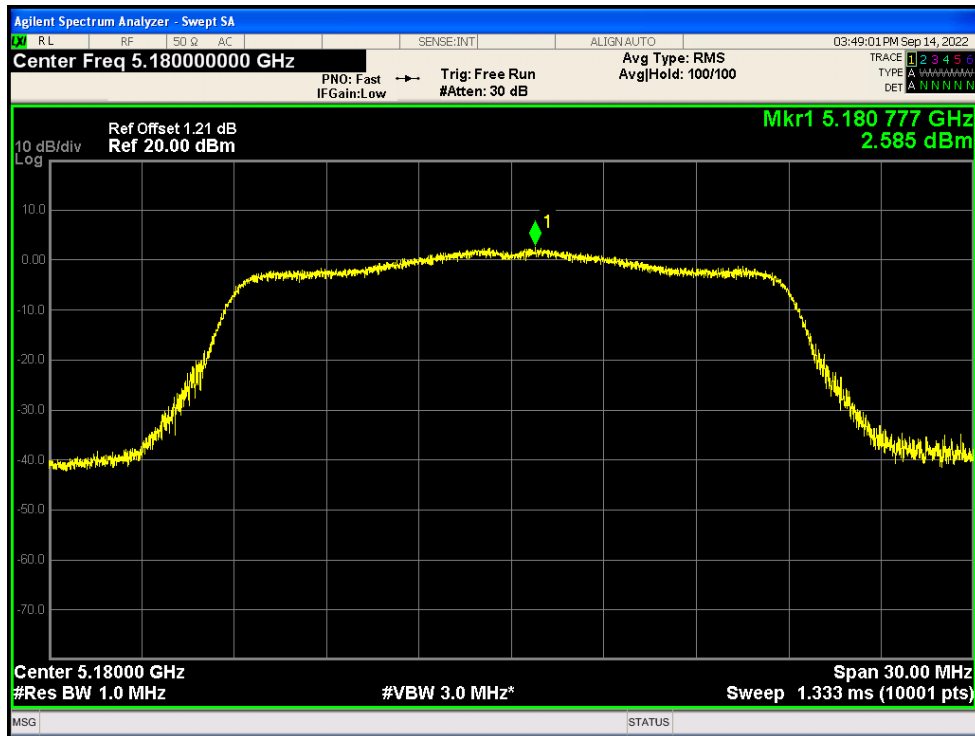


PSD NVNT n20 5200MHz Ant1

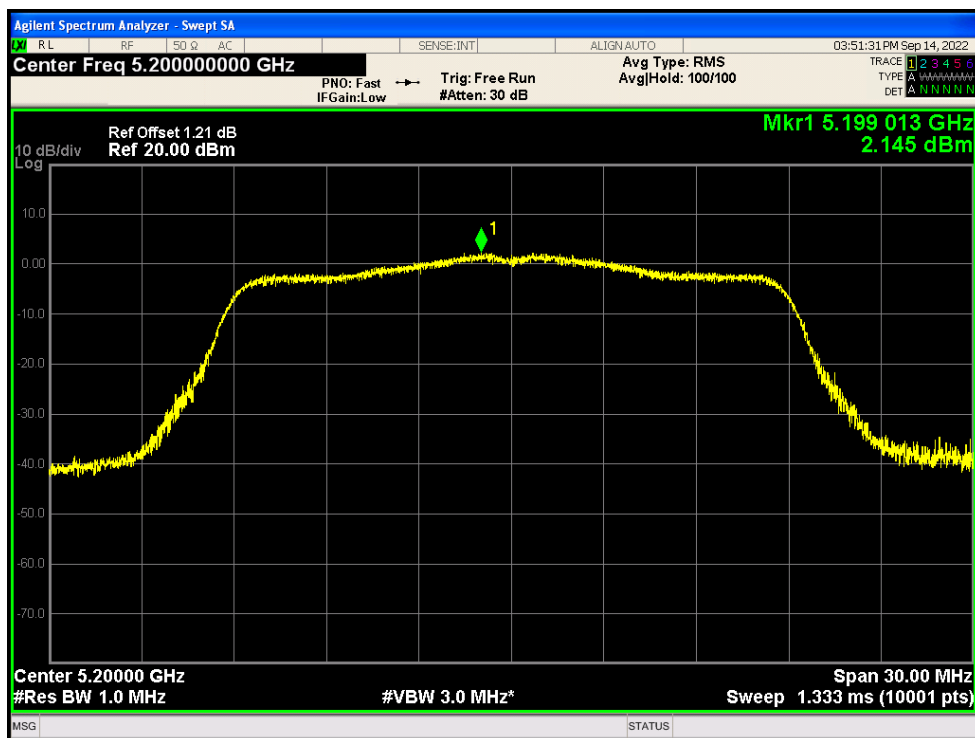


PSD NVNT n20 5240MHz Ant1

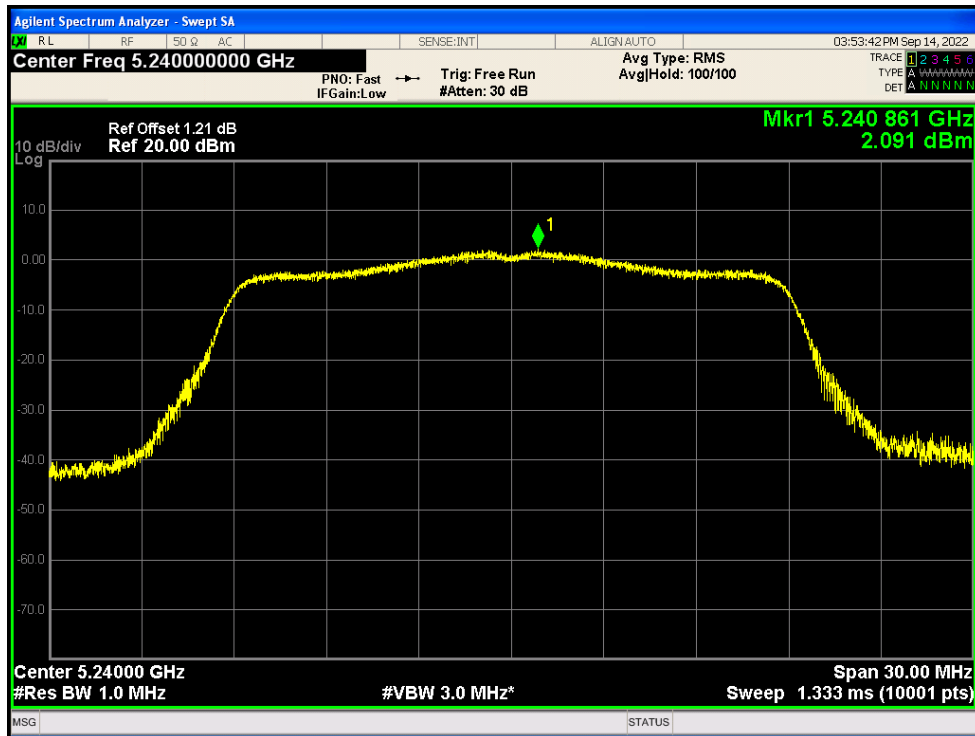

PSD NVNT n40 5190MHz Ant1

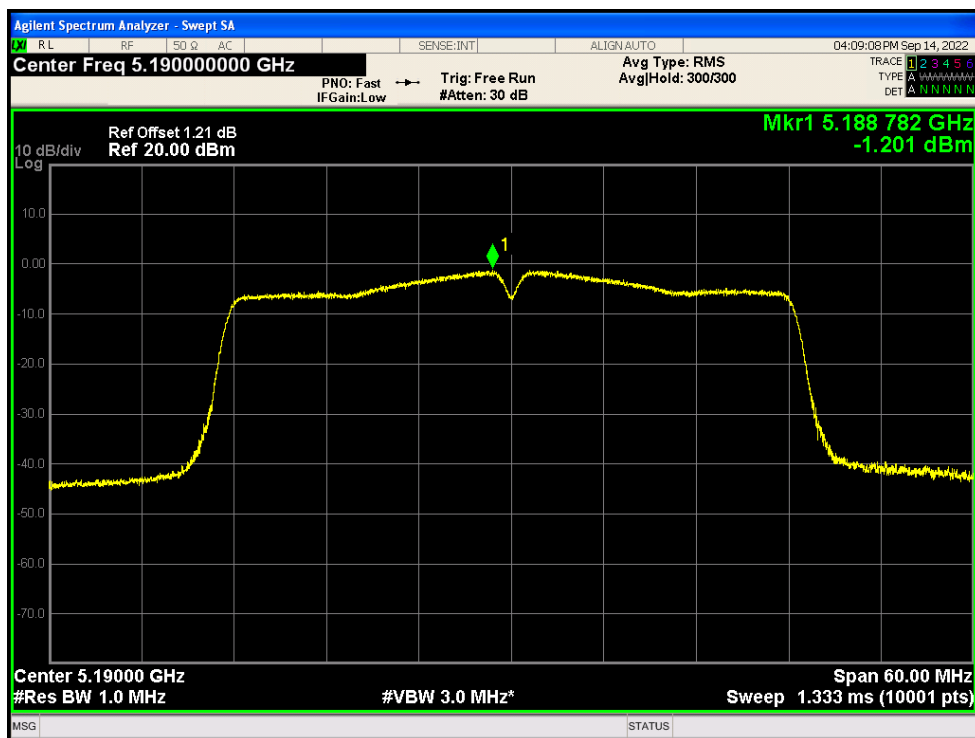


PSD NVNT n40 5230MHz Ant1

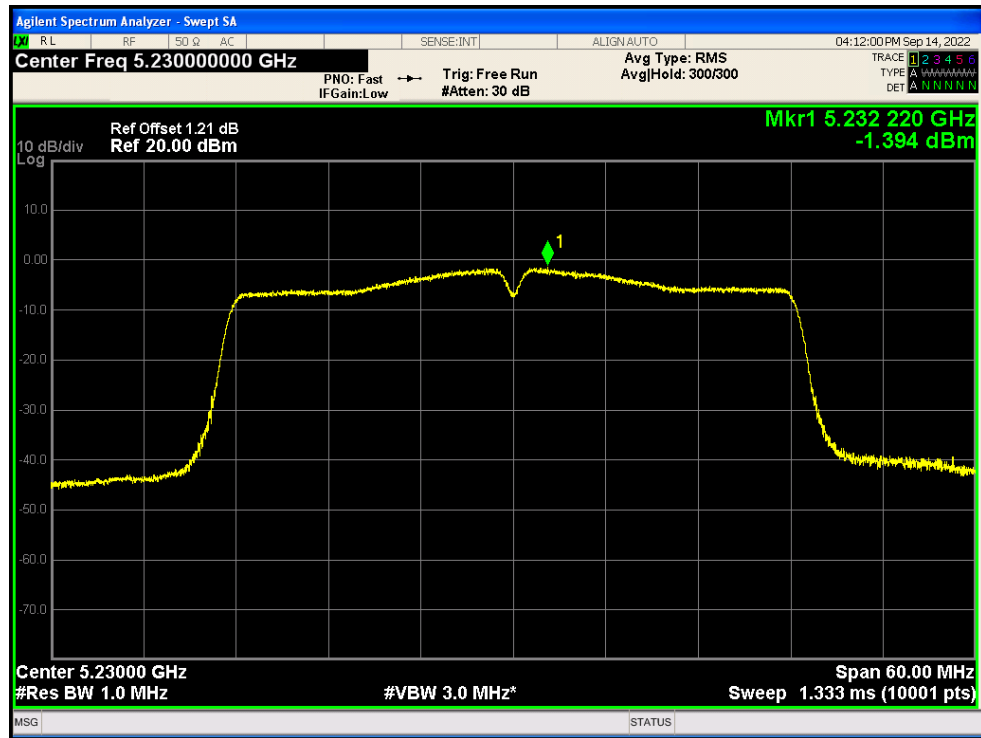


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-27.26	-27	Pass
NVNT	a	5240	Ant1	-41.66	-27	Pass
NVNT	ac20	5180	Ant1	-29.72	-27	Pass
NVNT	ac20	5240	Ant1	-41.91	-27	Pass
NVNT	ac40	5190	Ant1	-27.19	-27	Pass
NVNT	ac40	5230	Ant1	-42.74	-27	Pass
NVNT	ac80	5210	Ant1	-36.1	-27	Pass
NVNT	n20	5180	Ant1	-31.96	-27	Pass
NVNT	n20	5240	Ant1	-42.29	-27	Pass
NVNT	n40	5190	Ant1	-28.21	-27	Pass
NVNT	n40	5230	Ant1	-40.61	-27	Pass


Band Edge NVNT a 5180MHz Low Ant1

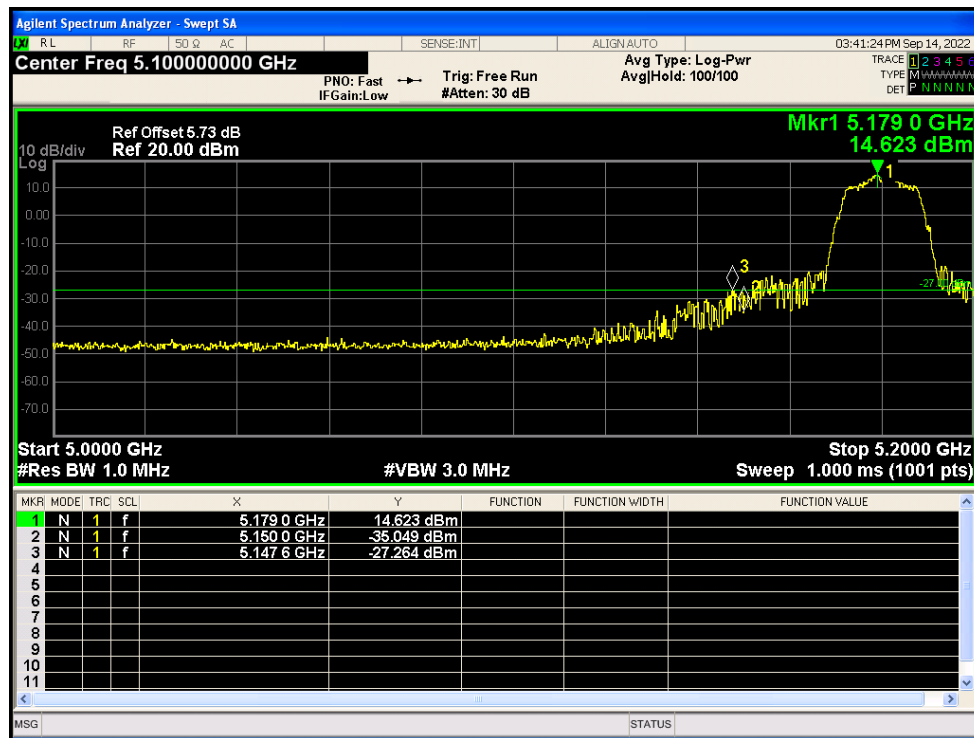

Band Edge NVNT a 5240MHz High Ant1

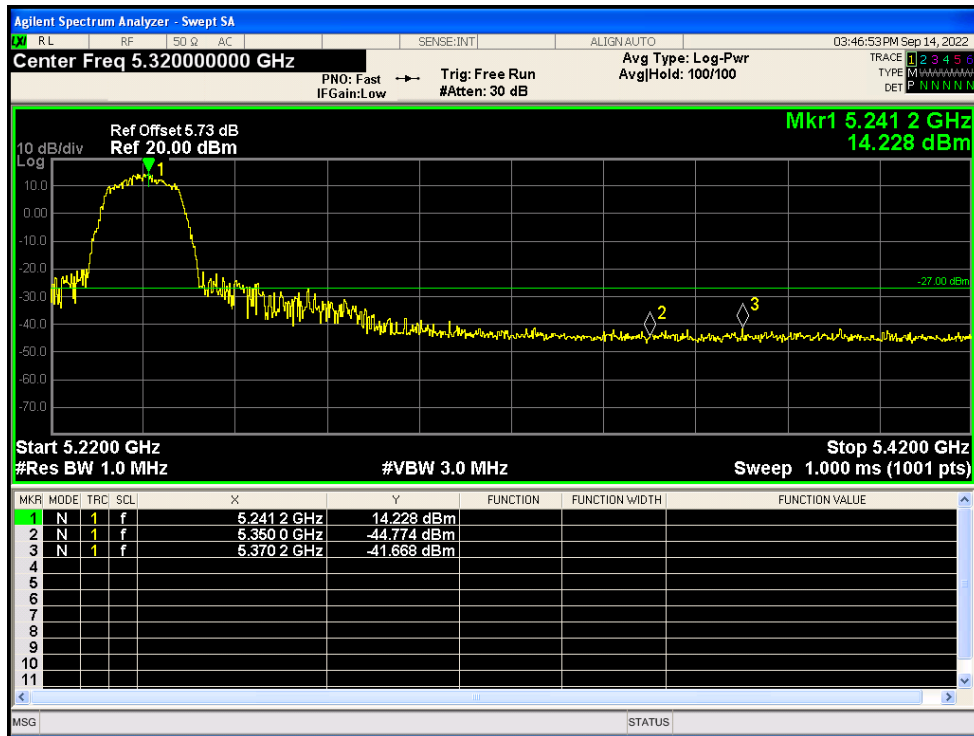


Band Edge NVNT ac20 5180MHz Low Ant1

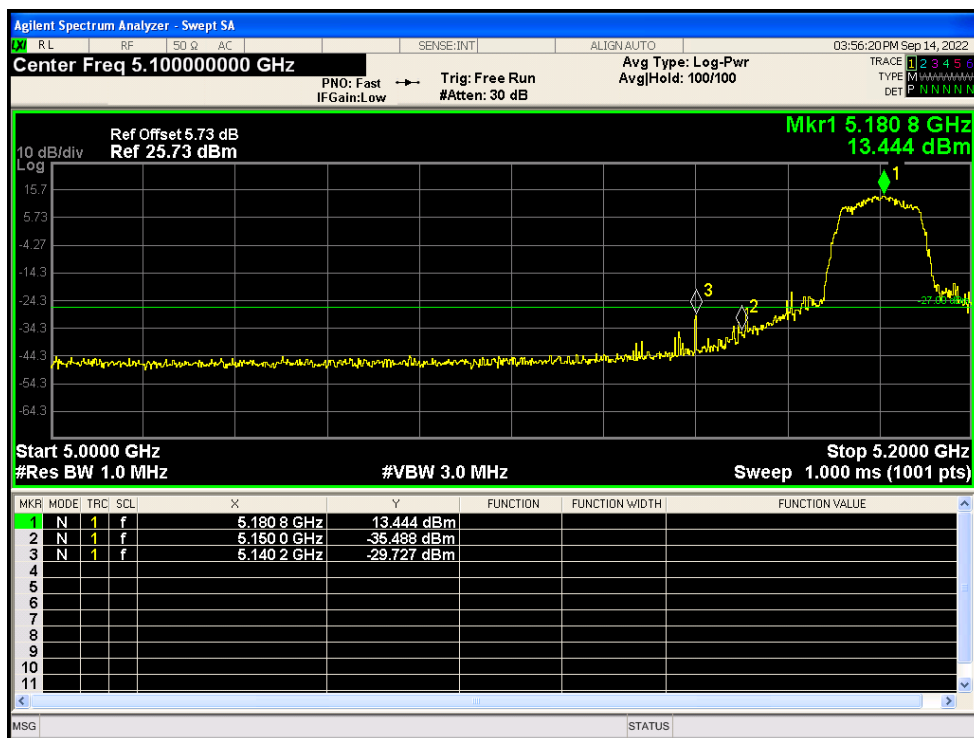

Band Edge NVNT ac20 5240MHz High Ant1



Band Edge NVNT ac40 5190MHz Low Ant1

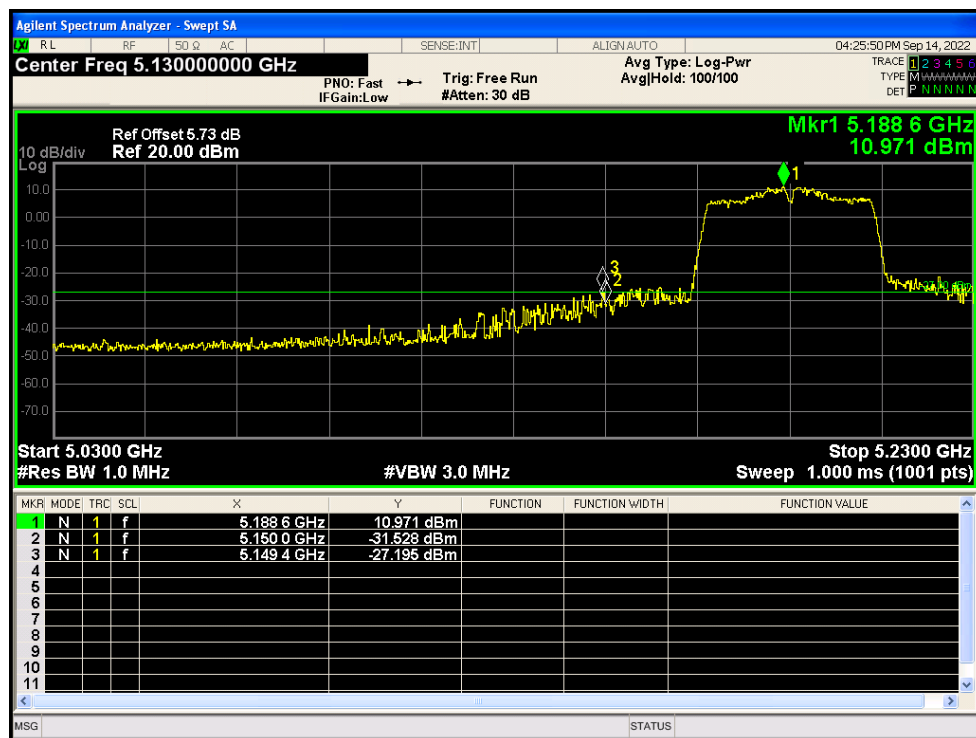


Band Edge NVNT ac40 5230MHz High Ant1




Band Edge NVNT ac80 5210MHz High Ant1




Band Edge NVNT n20 5180MHz Low Ant1

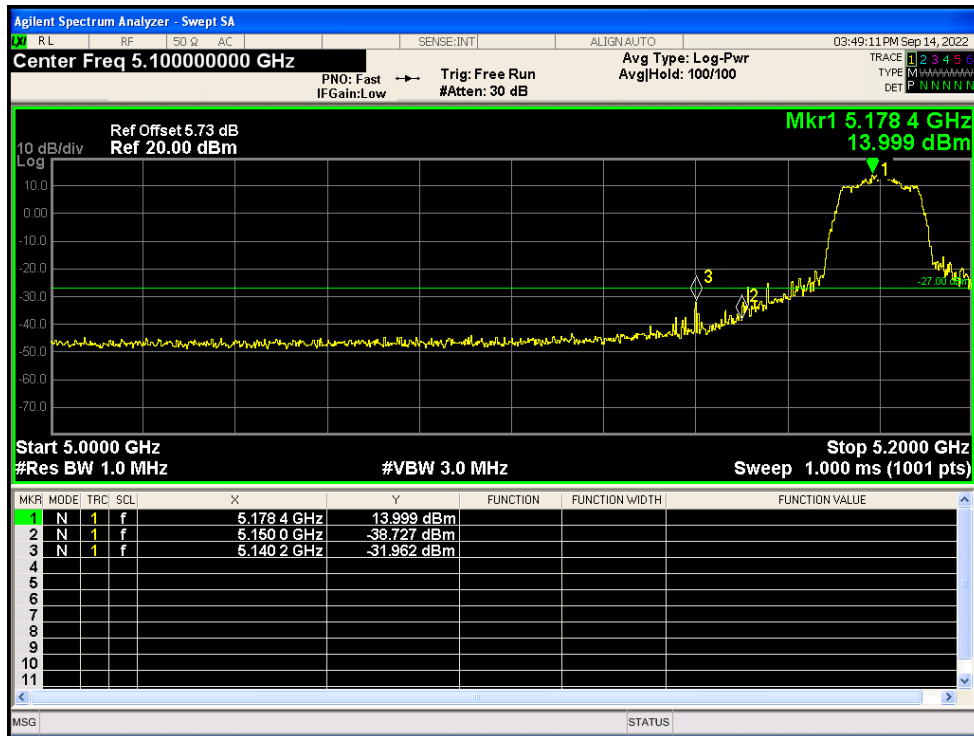


Band Edge NVNT n20 5240MHz High Ant1

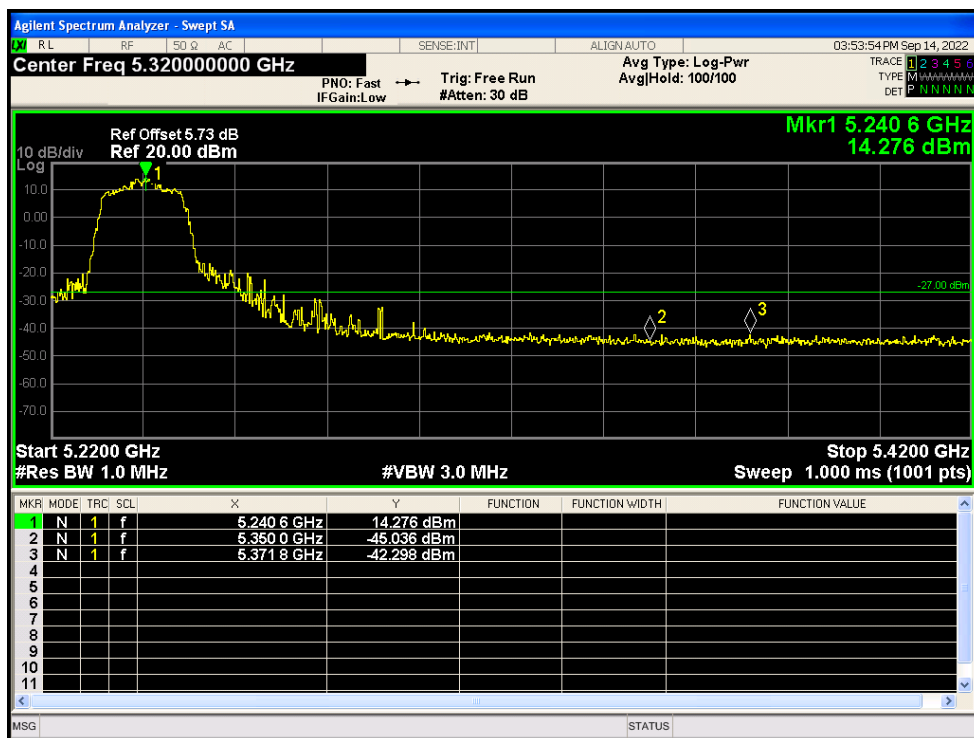

Band Edge NVNT n40 5190MHz Low Ant1

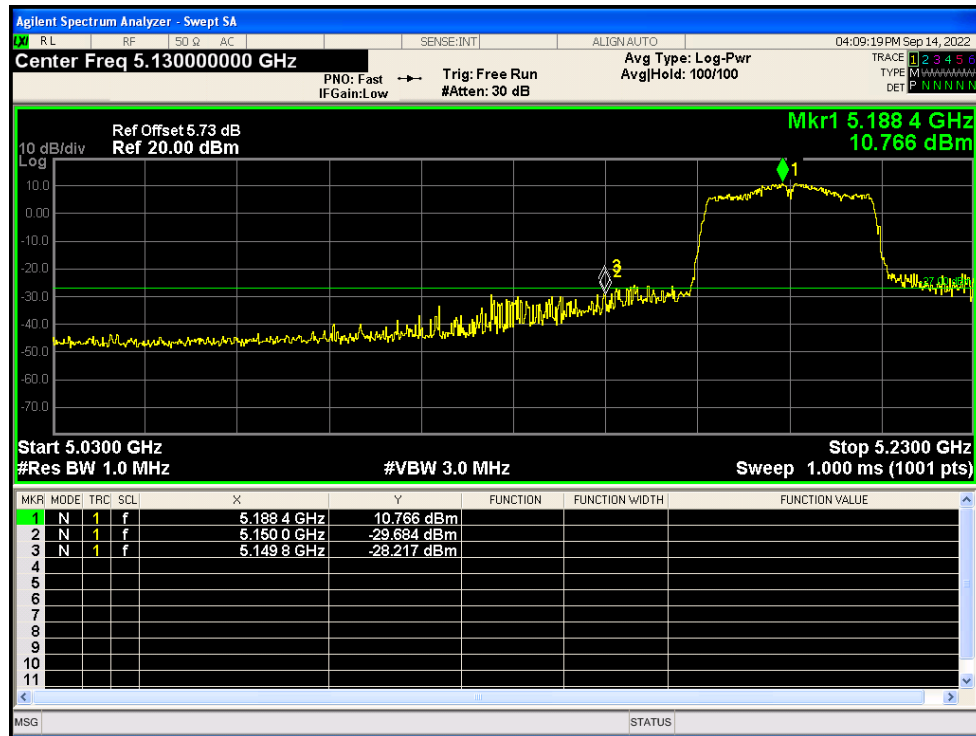


Band Edge NVNT n40 5230MHz High Ant1

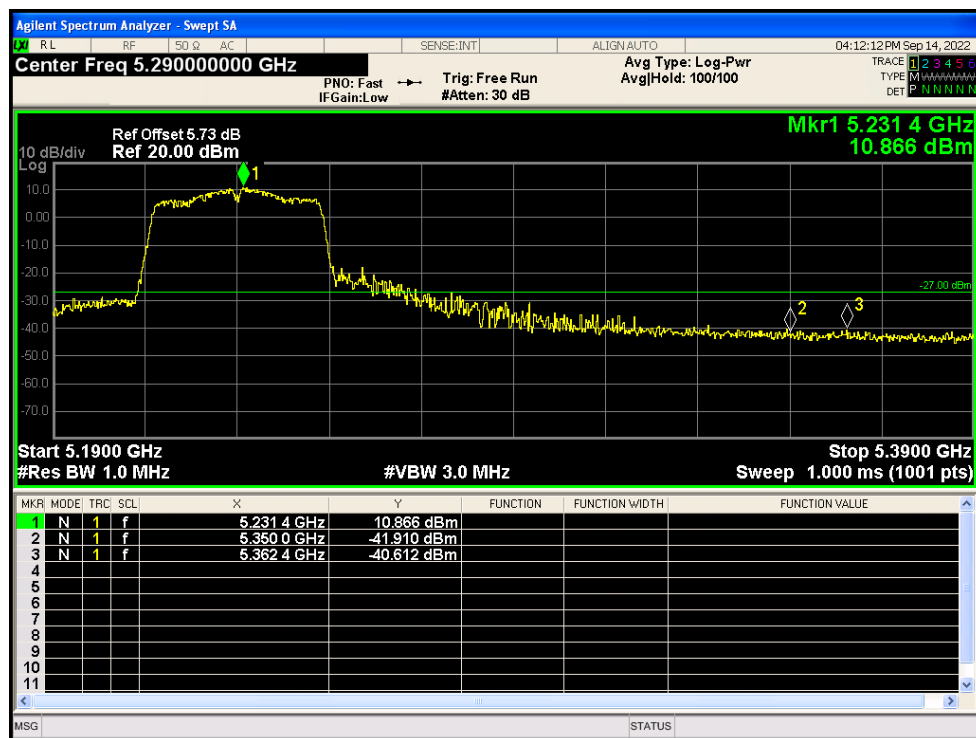


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-32.89	-27	Pass
NVNT	a	5200	Ant1	-32.26	-27	Pass
NVNT	a	5240	Ant1	-32.47	-27	Pass
NVNT	ac20	5180	Ant1	-39.16	-27	Pass
NVNT	ac20	5200	Ant1	-42.74	-27	Pass
NVNT	ac20	5240	Ant1	-42.57	-27	Pass
NVNT	ac40	5190	Ant1	-38.38	-27	Pass
NVNT	ac40	5230	Ant1	-38.42	-27	Pass
NVNT	ac80	5210	Ant1	-40.85	-27	Pass
NVNT	n20	5180	Ant1	-32.33	-27	Pass
NVNT	n20	5200	Ant1	-32.49	-27	Pass
NVNT	n20	5240	Ant1	-31.51	-27	Pass
NVNT	n40	5190	Ant1	-32.41	-27	Pass
NVNT	n40	5230	Ant1	-32.84	-27	Pass


Tx. Spurious NVNT a 5180MHz Ant1 Emission

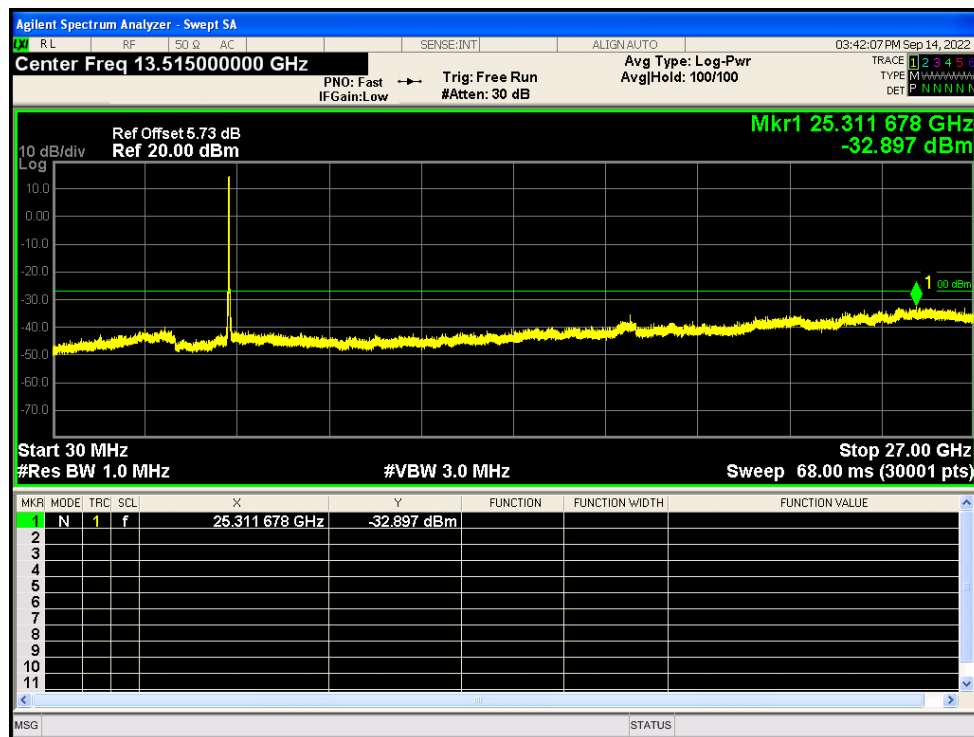


Tx. Spurious NVNT a 5200MHz Ant1 Emission

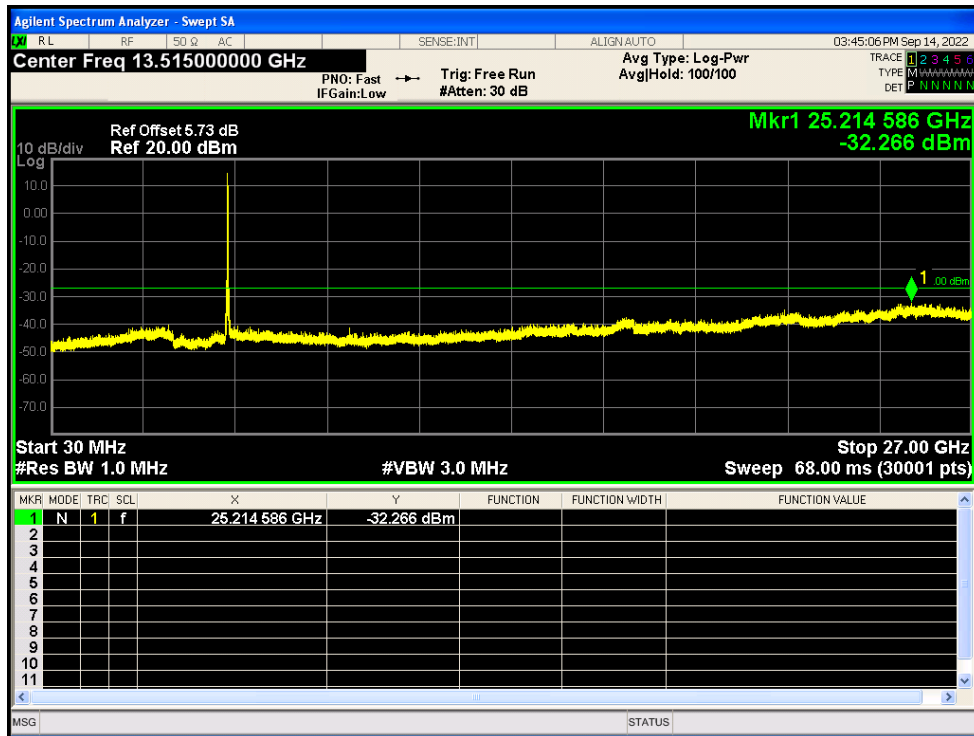


Tx. Spurious NVNT a 5240MHz Ant1 Emission

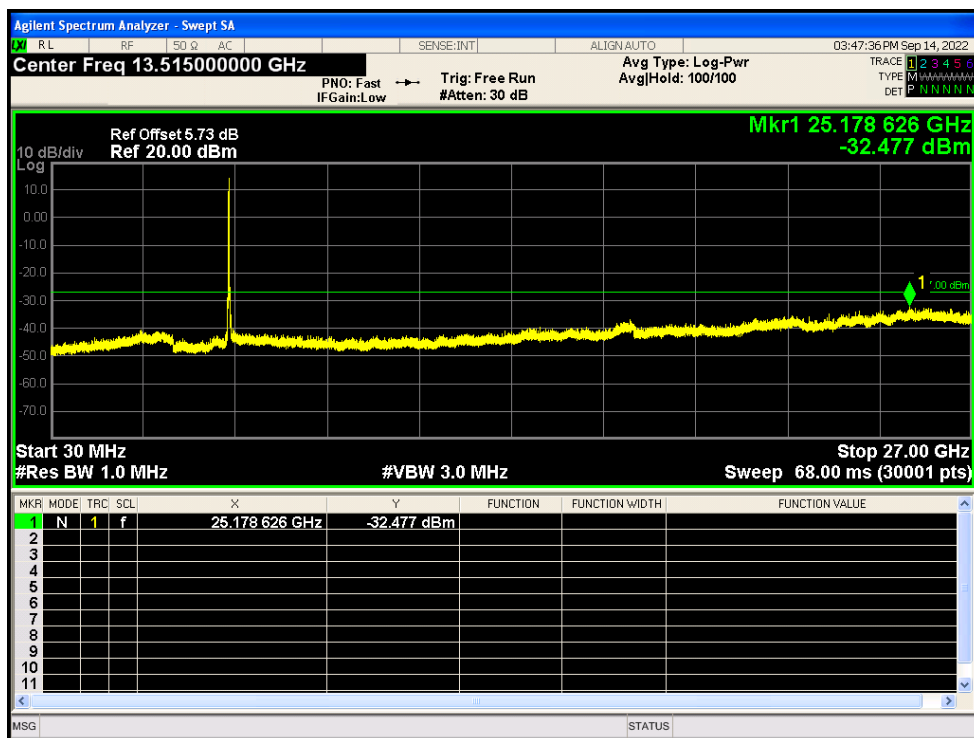


Tx. Spurious NVNT ac20 5180MHz Ant1 Emission

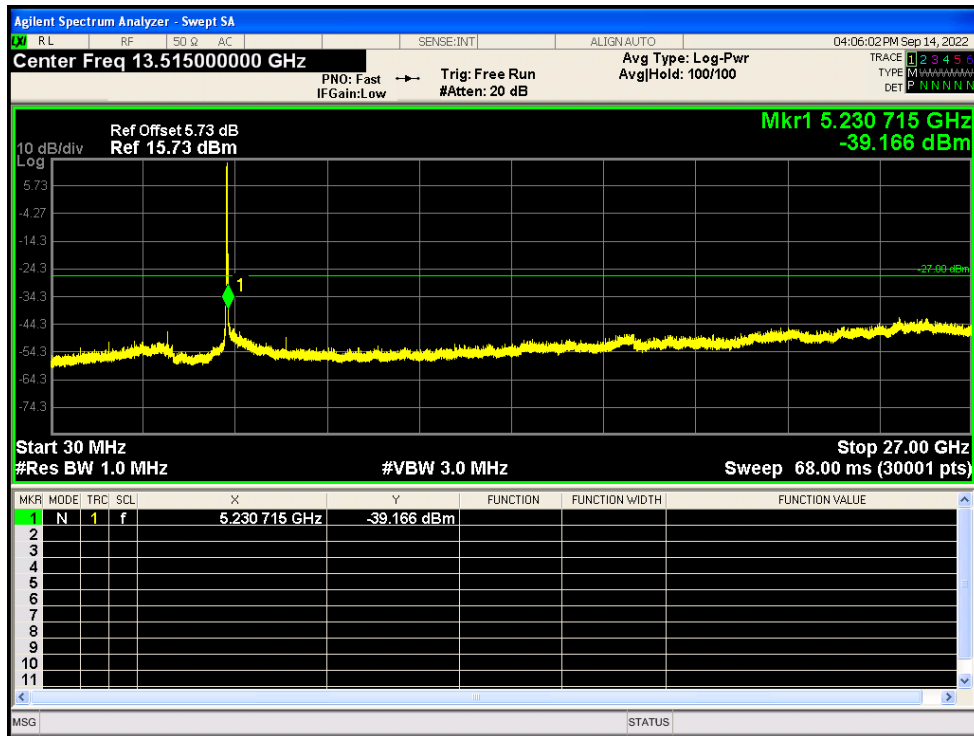


Tx. Spurious NVNT ac20 5200MHz Ant1 Emission

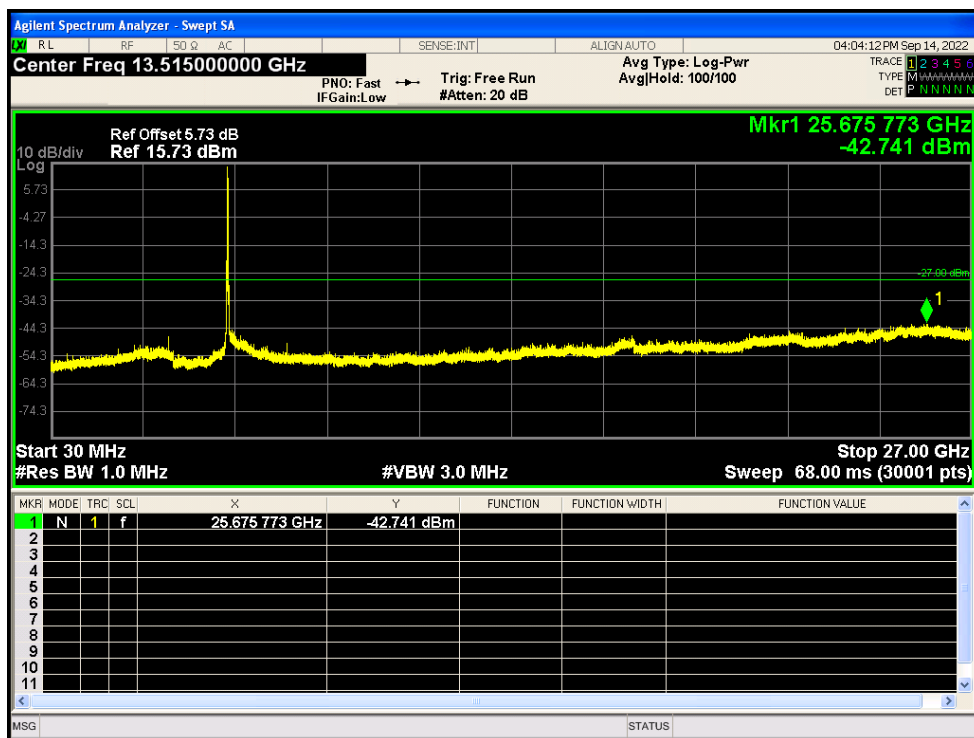


Tx. Spurious NVNT ac20 5240MHz Ant1 Emission

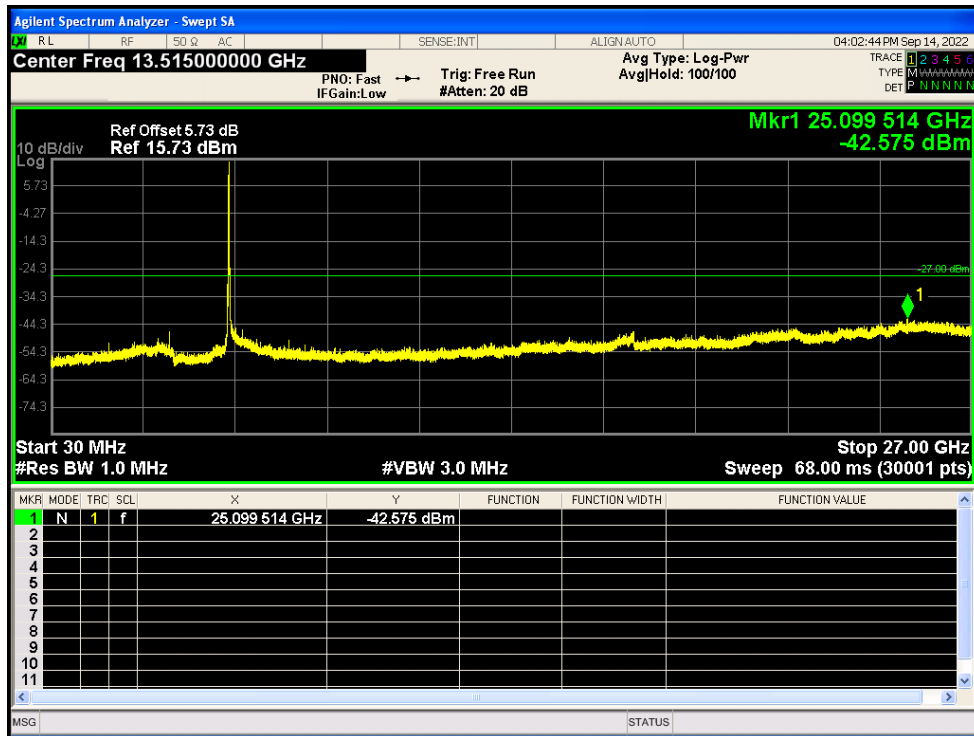


Tx. Spurious NVNT ac40 5190MHz Ant1 Emission

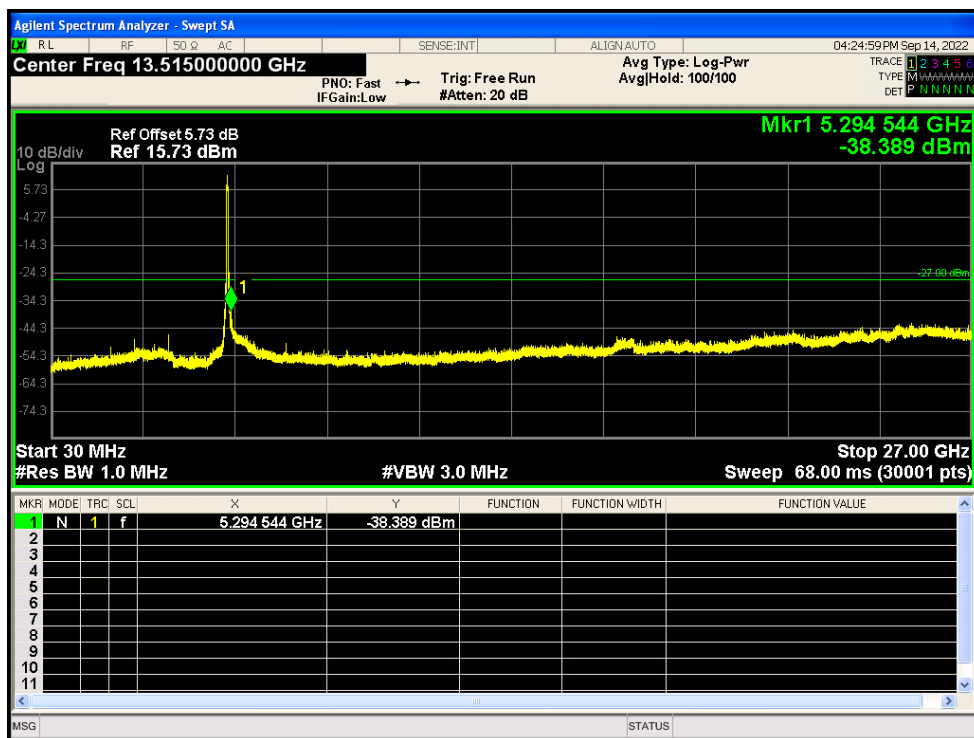


Tx. Spurious NVNT ac40 5230MHz Ant1 Emission

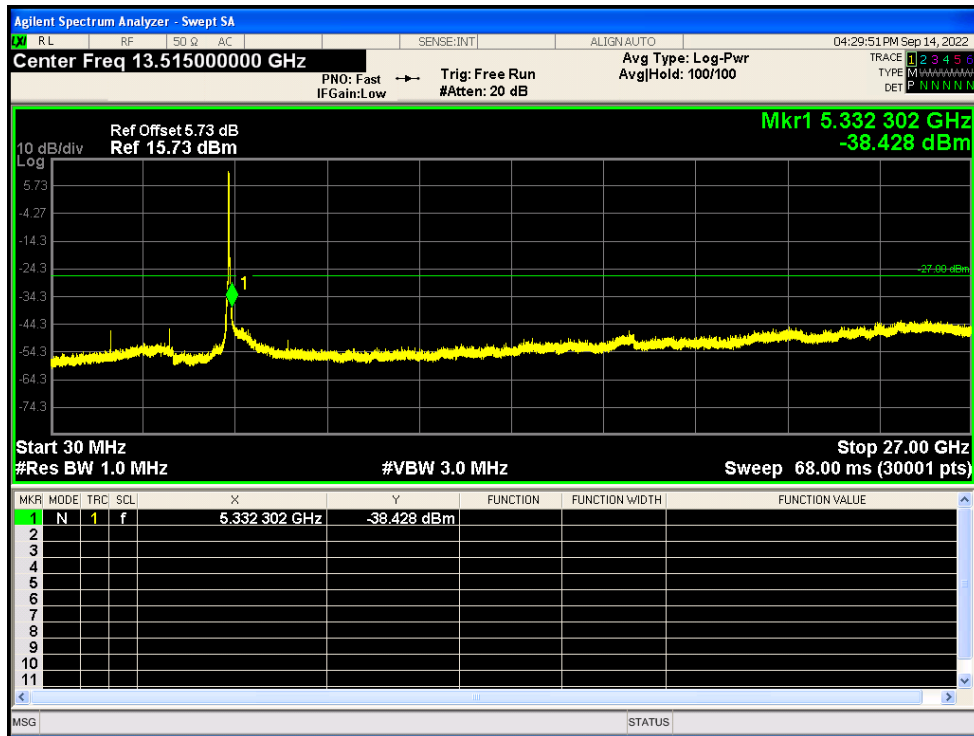


Tx. Spurious NVNT ac80 5210MHz Ant1 Emission

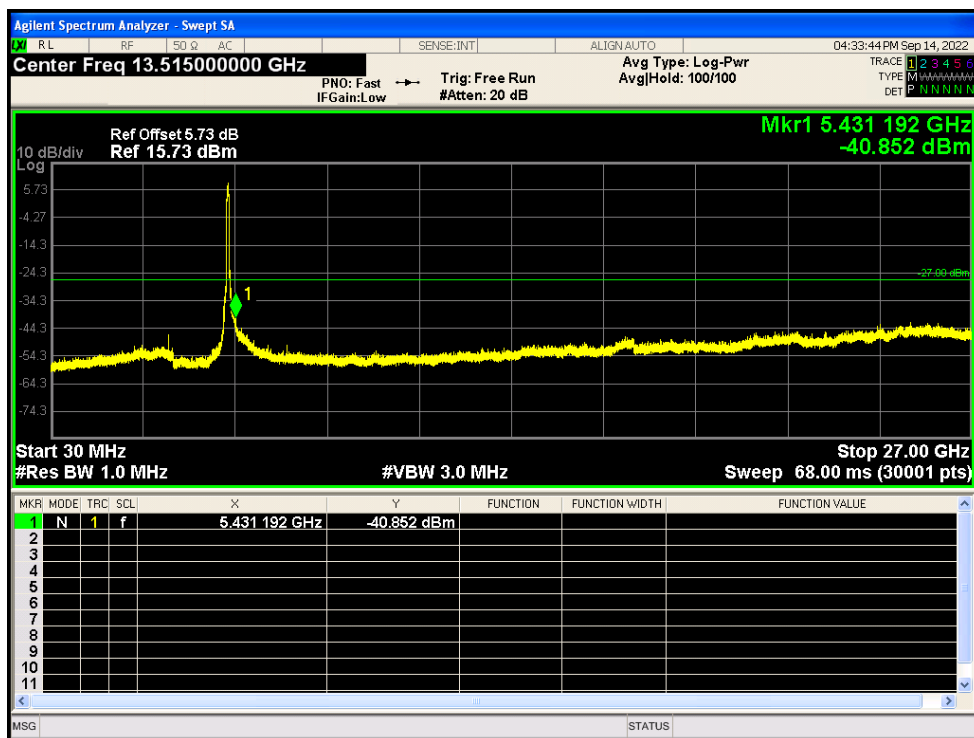


Tx. Spurious NVNT n20 5180MHz Ant1 Emission

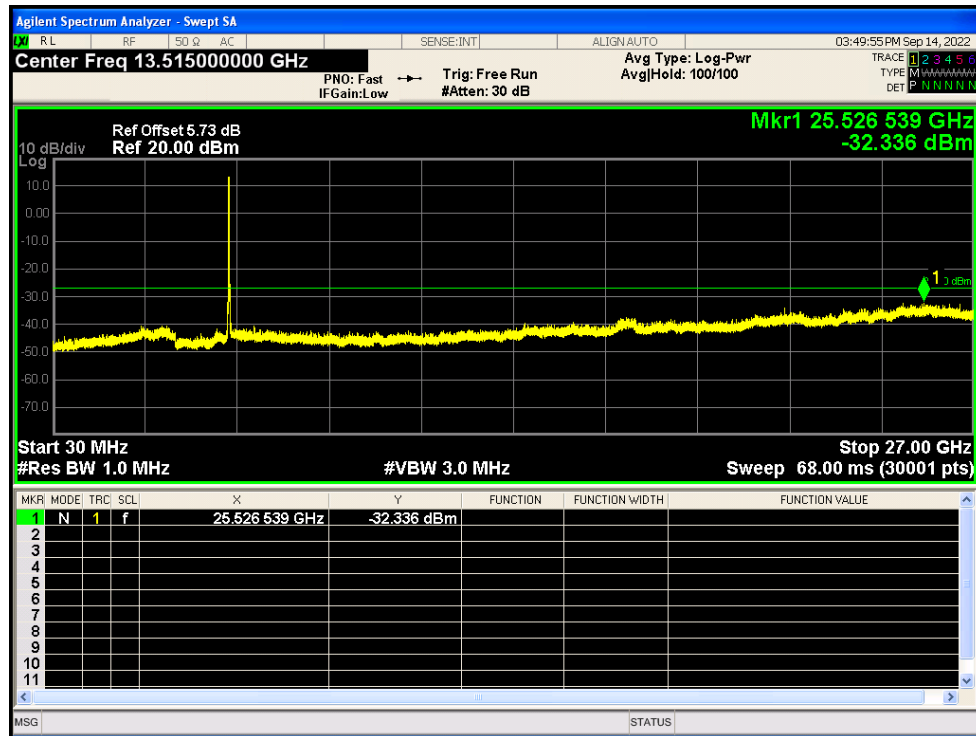


Tx. Spurious NVNT n20 5200MHz Ant1 Emission

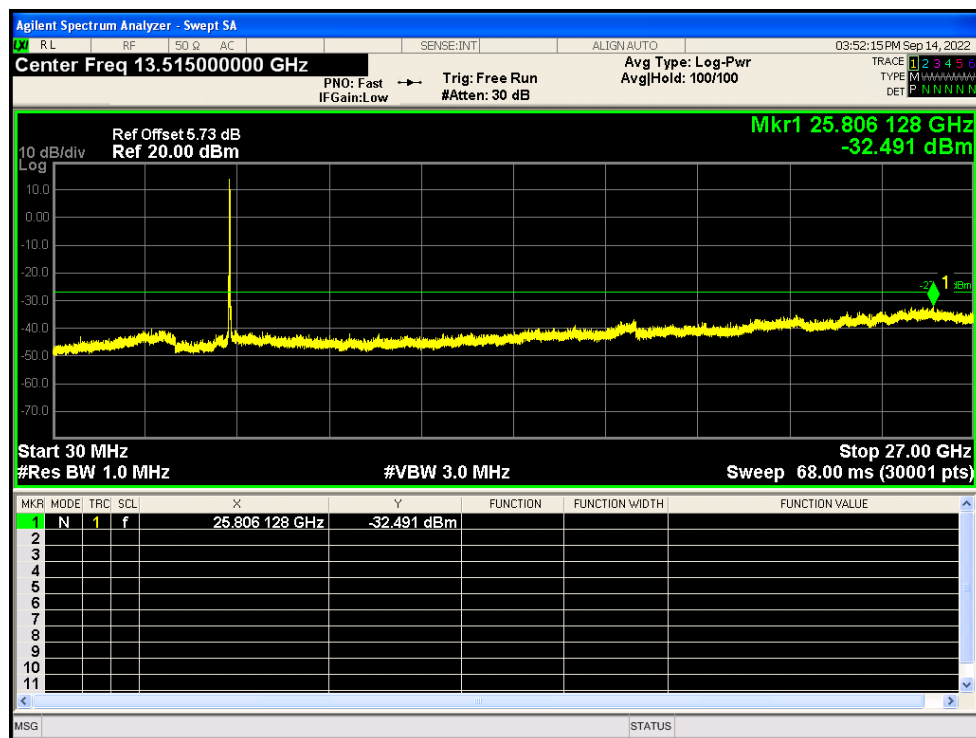


Tx. Spurious NVNT n20 5240MHz Ant1 Emission

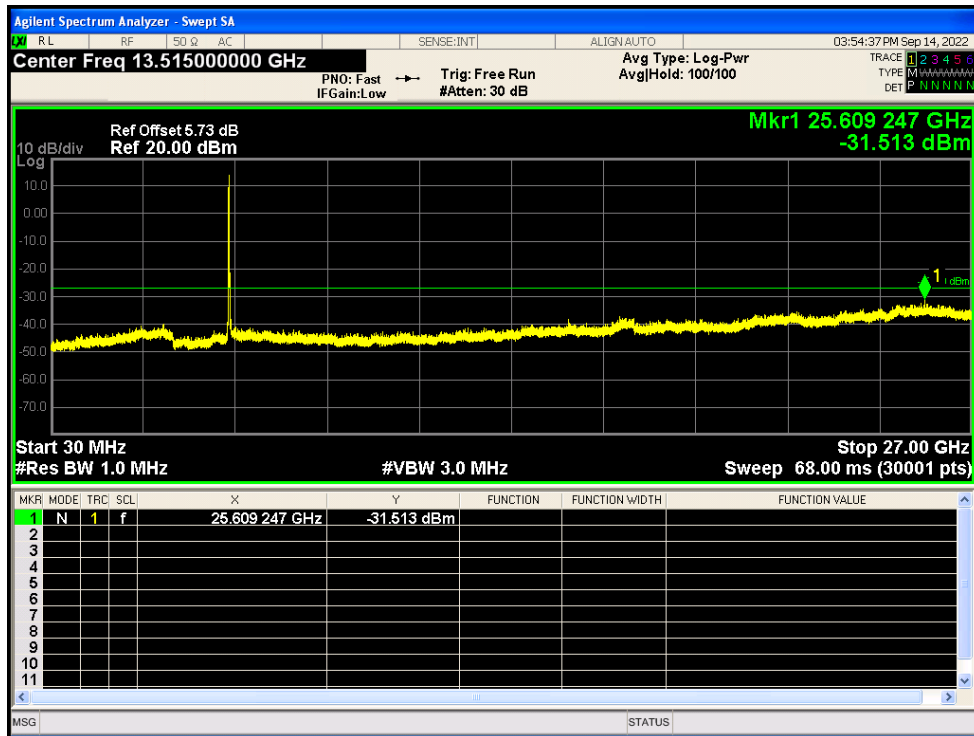

Tx. Spurious NVNT n40 5190MHz Ant1 Emission

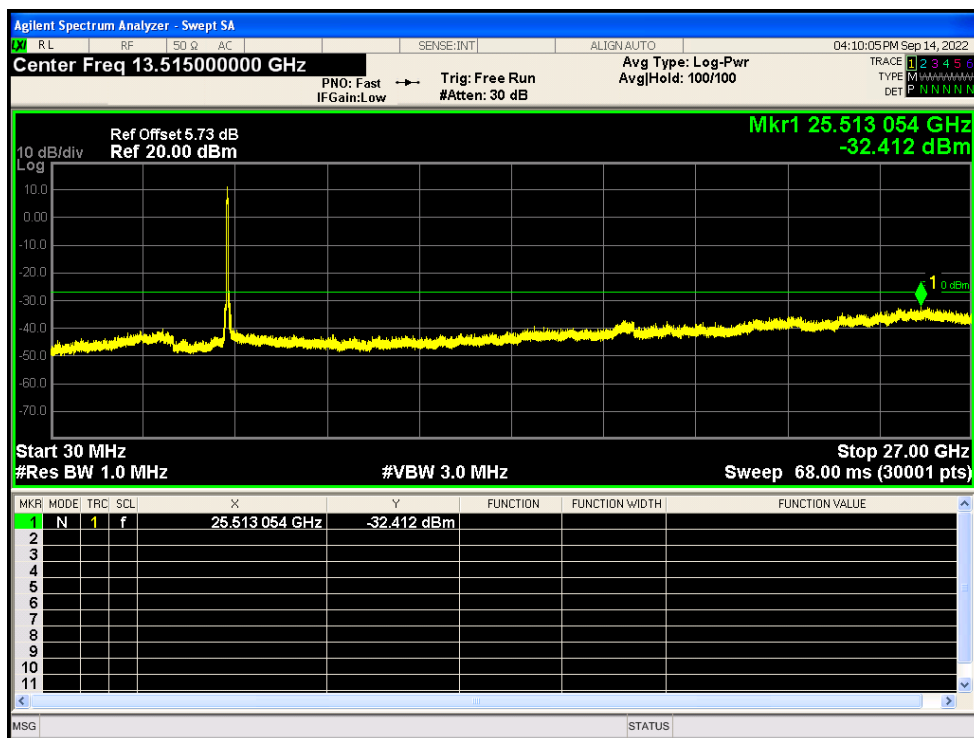

Tx. Spurious NVNT n40 5230MHz Ant1 Emission

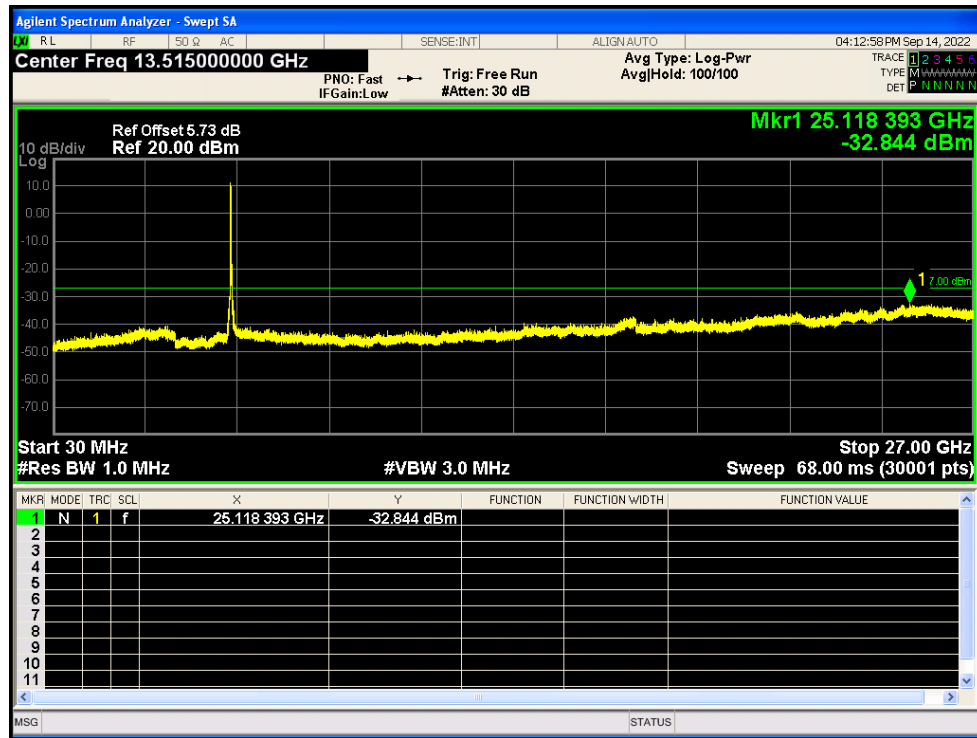


5.8G:


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5745	Ant1	97.79	0.1
NVNT	a	5785	Ant1	97.81	0.1
NVNT	a	5825	Ant1	97.79	0.1
NVNT	ac20	5745	Ant1	97.69	0.1
NVNT	ac20	5785	Ant1	97.66	0.1
NVNT	ac20	5825	Ant1	97.69	0.1
NVNT	ac40	5755	Ant1	95.71	0.19
NVNT	ac40	5795	Ant1	95.61	0.19
NVNT	ac80	5775	Ant1	84.89	0.71
NVNT	n20	5745	Ant1	97.68	0.1
NVNT	n20	5785	Ant1	97.69	0.1
NVNT	n20	5825	Ant1	97.67	0.1
NVNT	n40	5755	Ant1	95.42	0.2
NVNT	n40	5795	Ant1	95.45	0.2


Duty Cycle NVNT a 5745MHz Ant1

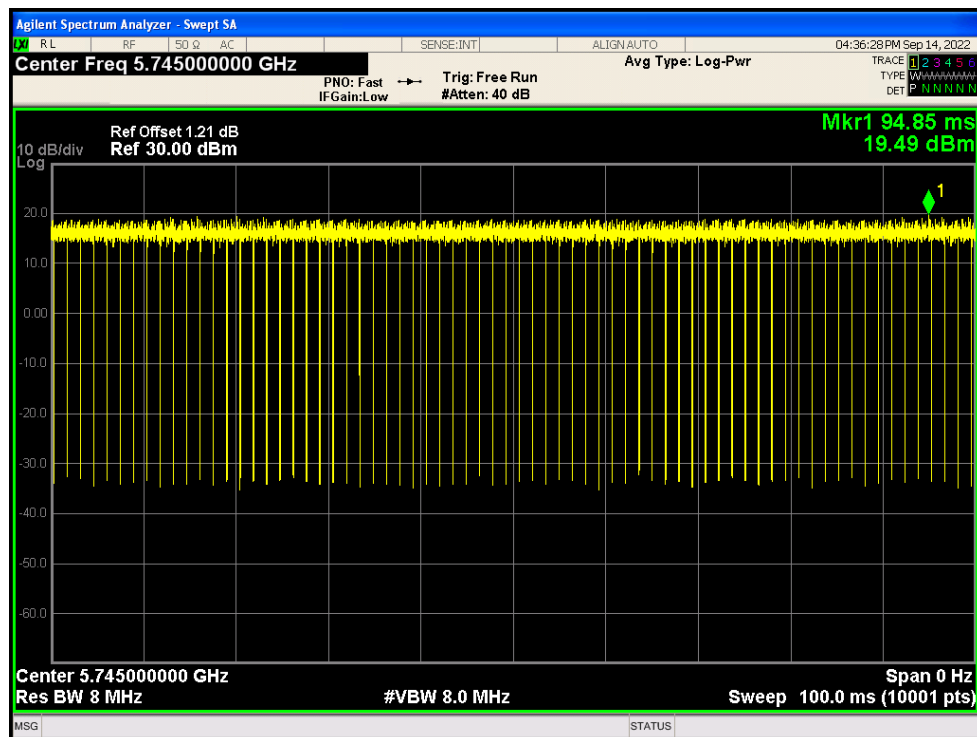


Duty Cycle NVNT a 5785MHz Ant1

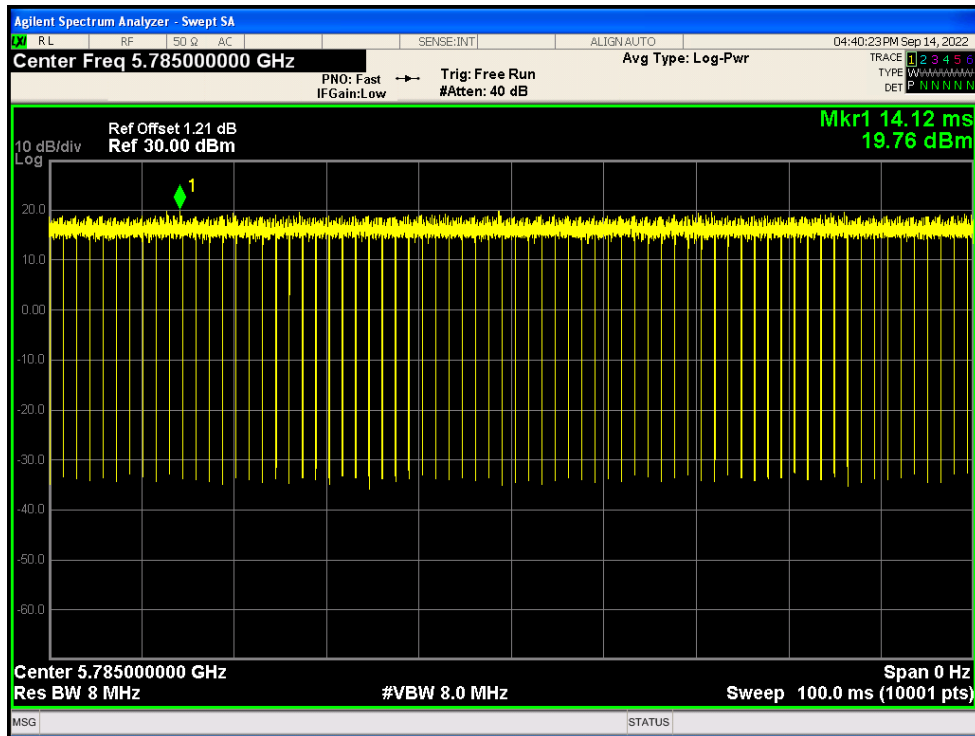


Duty Cycle NVNT a 5825MHz Ant1

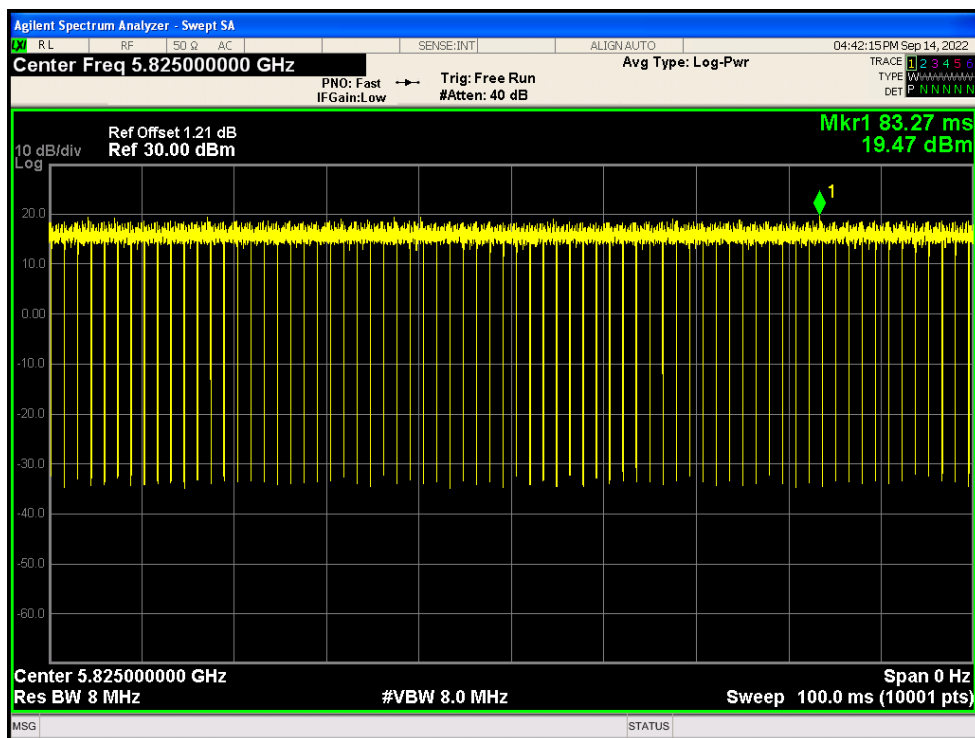


Duty Cycle NVNT ac20 5745MHz Ant1

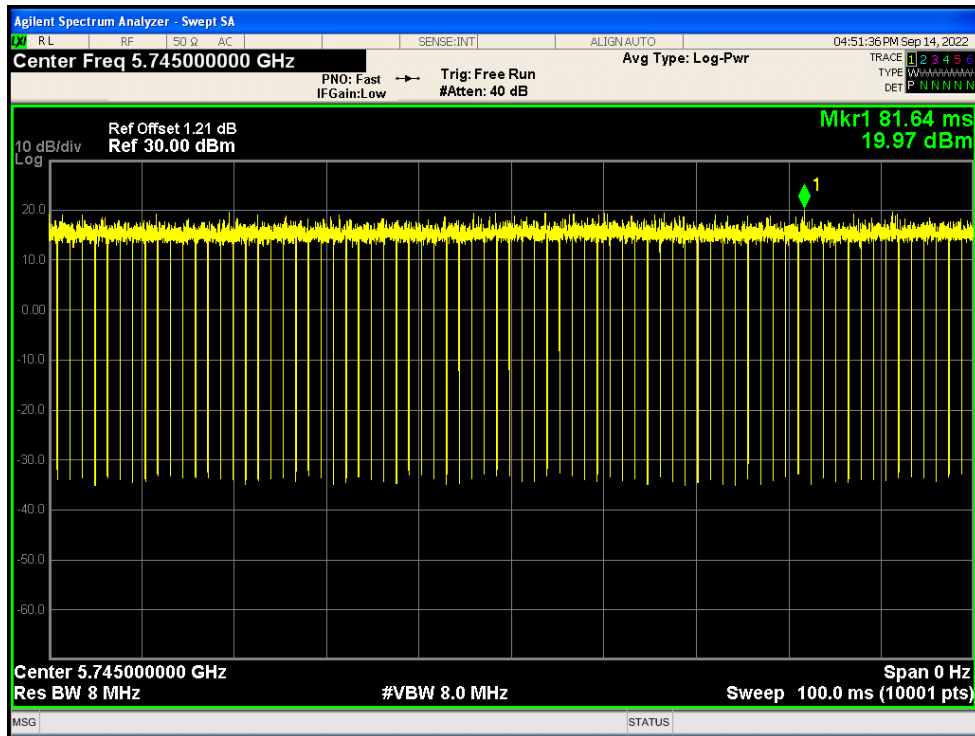


Duty Cycle NVNT ac20 5785MHz Ant1

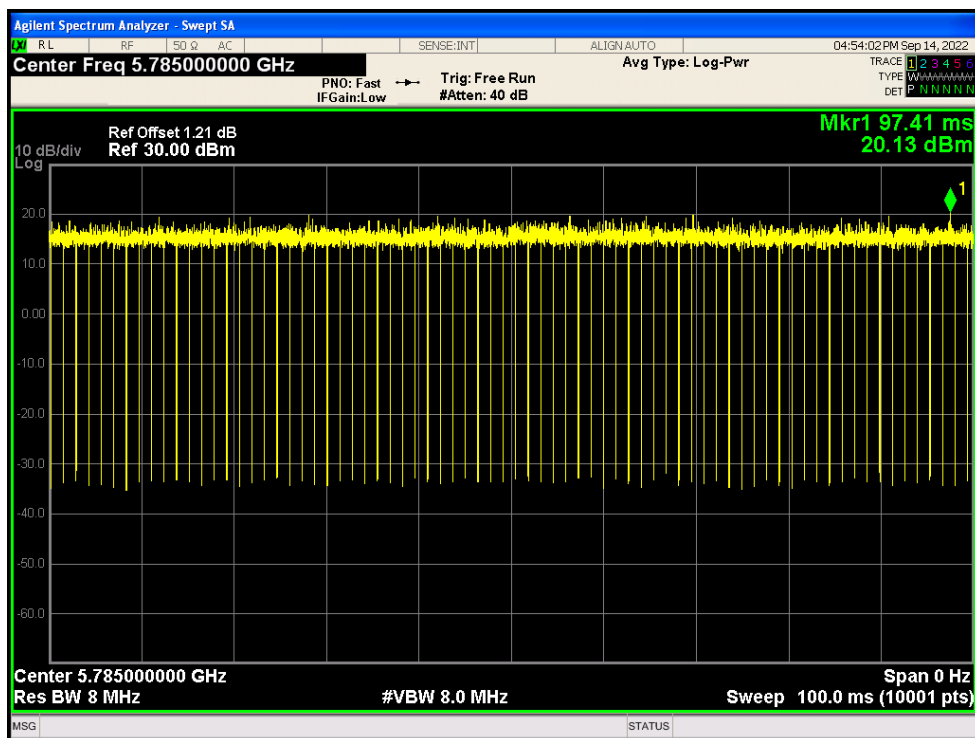


Duty Cycle NVNT ac20 5825MHz Ant1

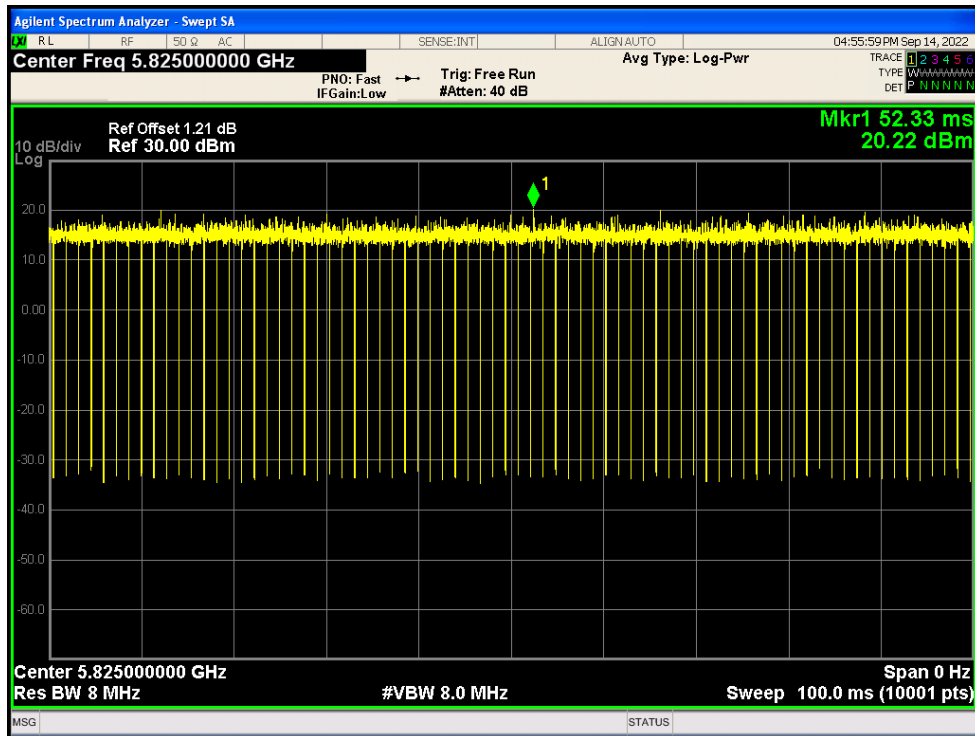


Duty Cycle NVNT ac40 5755MHz Ant1

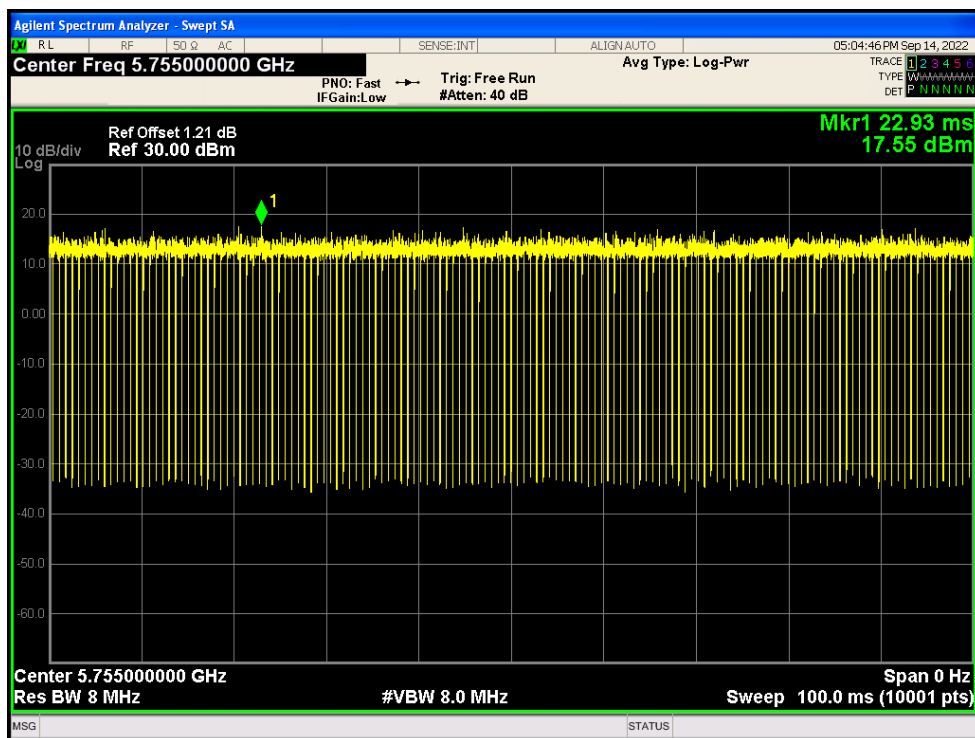


Duty Cycle NVNT ac40 5795MHz Ant1

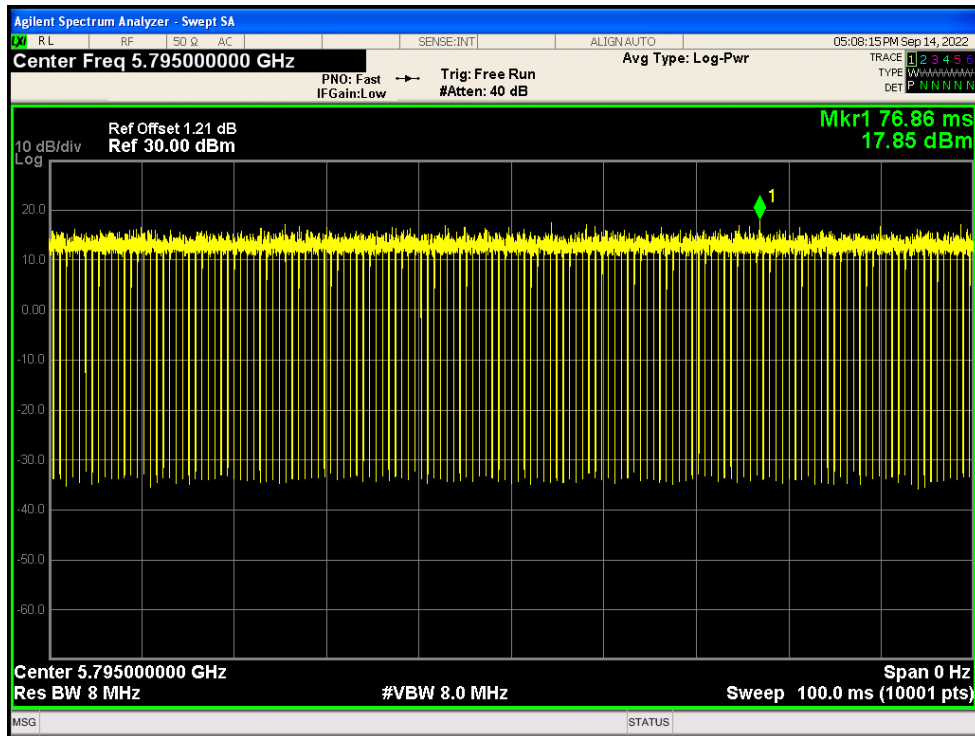


Duty Cycle NVNT ac80 5775MHz Ant1

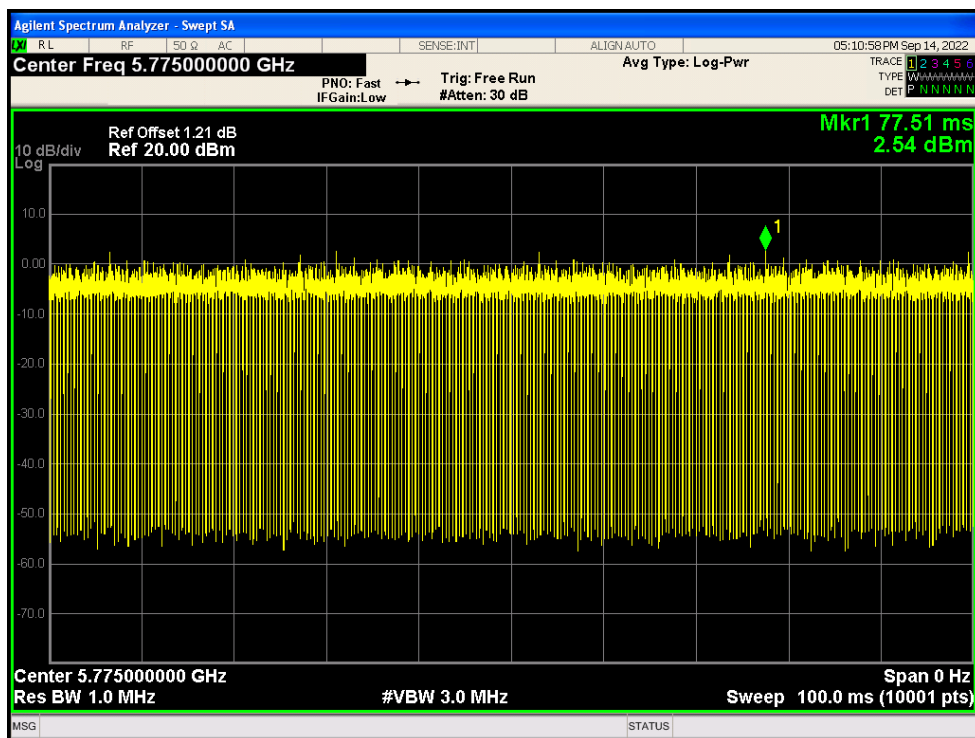


Duty Cycle NVNT n20 5745MHz Ant1

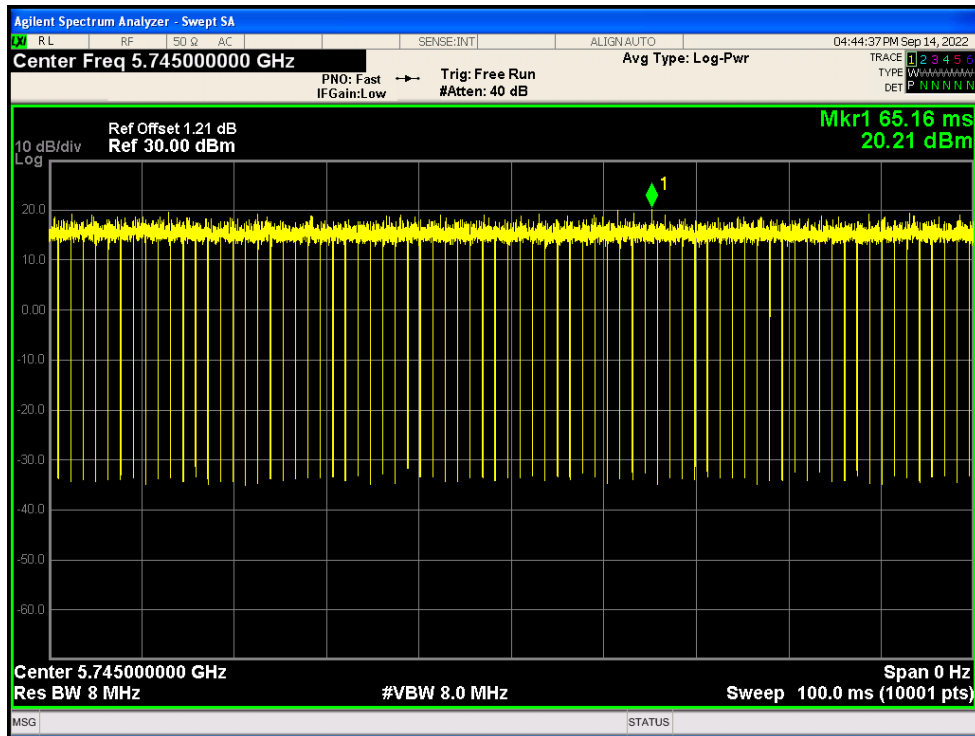


Duty Cycle NVNT n20 5785MHz Ant1

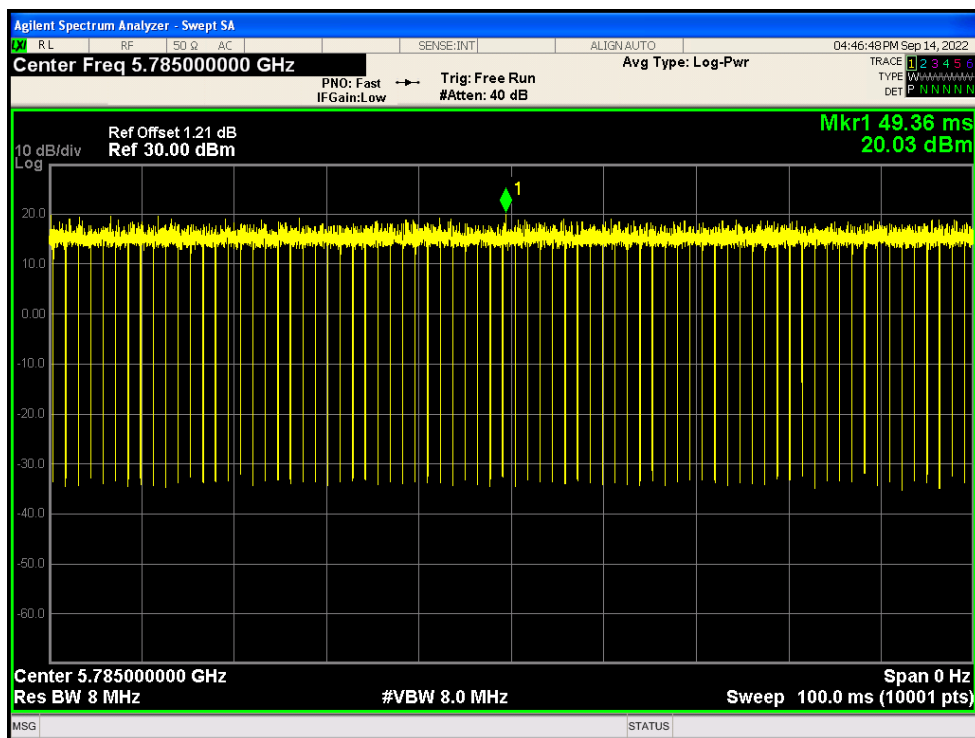


Duty Cycle NVNT n20 5825MHz Ant1

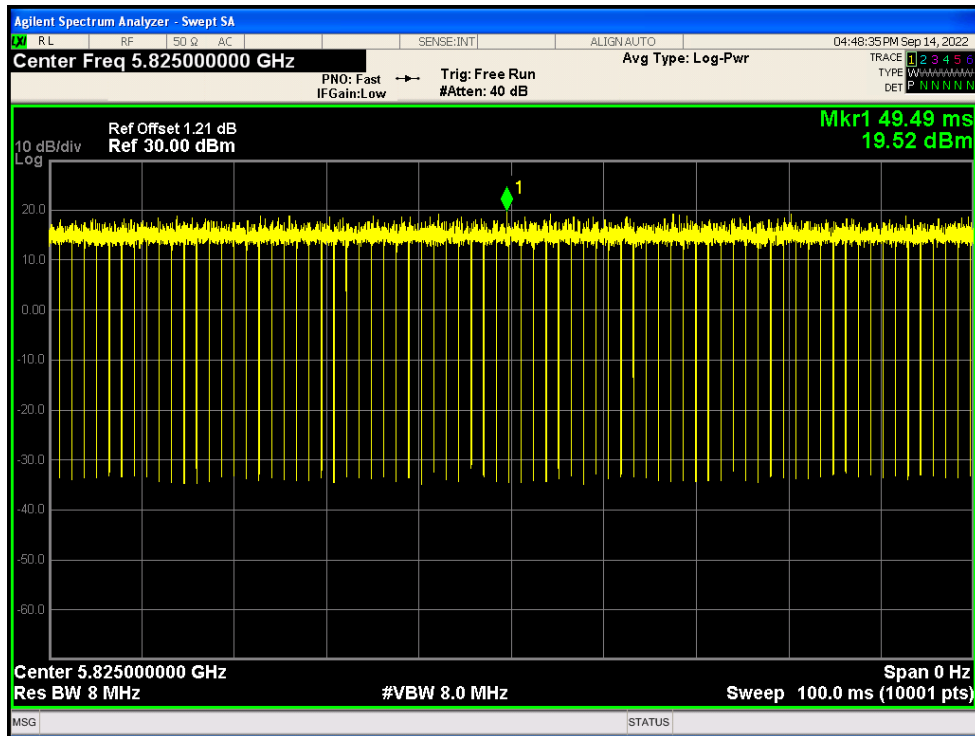

Duty Cycle NVNT n40 5755MHz Ant1

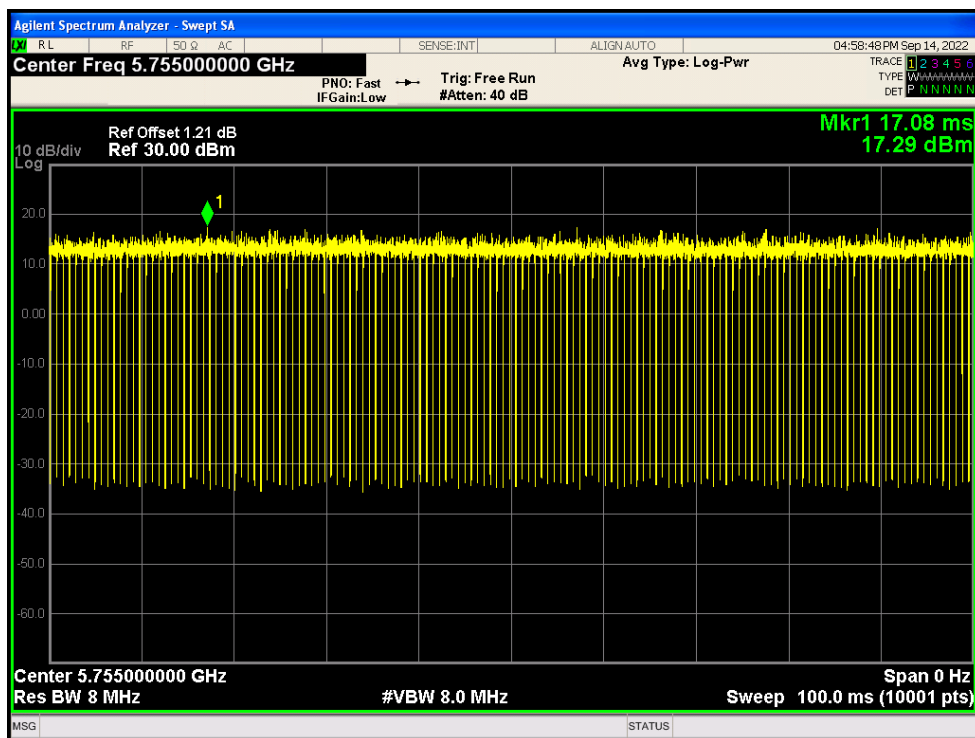

Duty Cycle NVNT n40 5795MHz Ant1

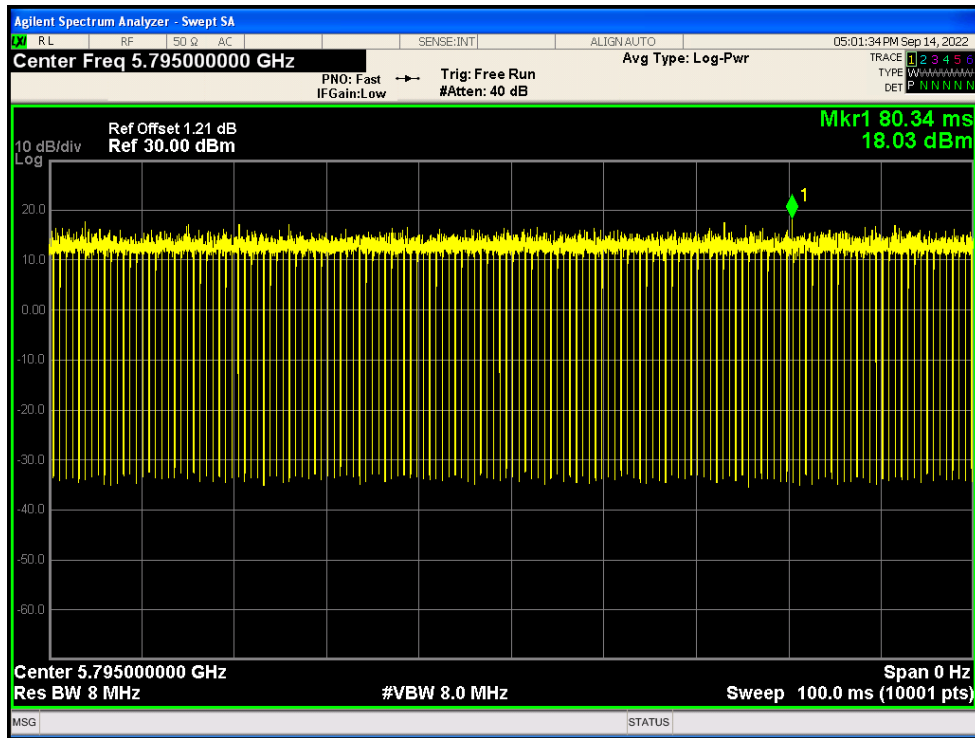


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	10.999	0.1	11.099	30	Pass
NVNT	a	5785	Ant1	10.982	0.1	11.082	30	Pass
NVNT	a	5825	Ant1	10.626	0.1	10.726	30	Pass
NVNT	ac20	5745	Ant1	10.526	0.1	10.626	30	Pass
NVNT	ac20	5785	Ant1	10.473	0.1	10.573	30	Pass
NVNT	ac20	5825	Ant1	10.22	0.1	10.32	30	Pass
NVNT	ac40	5755	Ant1	10.481	0.19	10.671	30	Pass
NVNT	ac40	5795	Ant1	10.399	0.19	10.589	30	Pass
NVNT	ac80	5775	Ant1	10.076	0.71	10.786	30	Pass
NVNT	n20	5745	Ant1	10.514	0.1	10.614	30	Pass
NVNT	n20	5785	Ant1	10.353	0.1	10.453	30	Pass
NVNT	n20	5825	Ant1	10.064	0.1	10.164	30	Pass
NVNT	n40	5755	Ant1	10.402	0.2	10.602	30	Pass
NVNT	n40	5795	Ant1	10.311	0.2	10.511	30	Pass


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.724	0.5	Pass
NVNT	a	5785	Ant1	16.042	0.5	Pass
NVNT	a	5825	Ant1	14.675	0.5	Pass
NVNT	ac20	5745	Ant1	17.166	0.5	Pass
NVNT	ac20	5785	Ant1	16.251	0.5	Pass
NVNT	ac20	5825	Ant1	17.098	0.5	Pass
NVNT	ac40	5755	Ant1	35.966	0.5	Pass
NVNT	ac40	5795	Ant1	35.861	0.5	Pass
NVNT	ac80	5775	Ant1	75.159	0.5	Pass
NVNT	n20	5745	Ant1	17.172	0.5	Pass
NVNT	n20	5785	Ant1	15.883	0.5	Pass
NVNT	n20	5825	Ant1	15.907	0.5	Pass
NVNT	n40	5755	Ant1	35.265	0.5	Pass
NVNT	n40	5795	Ant1	35.547	0.5	Pass


-6dB Bandwidth NVNT a 5745MHz Ant1

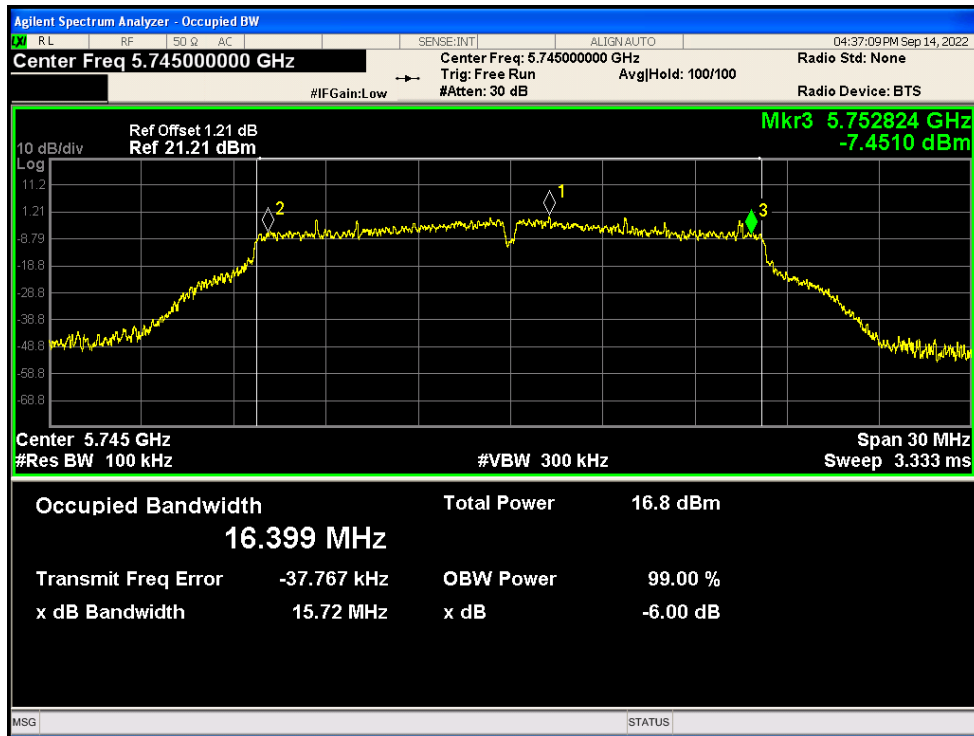


-6dB Bandwidth NVNT a 5785MHz Ant1

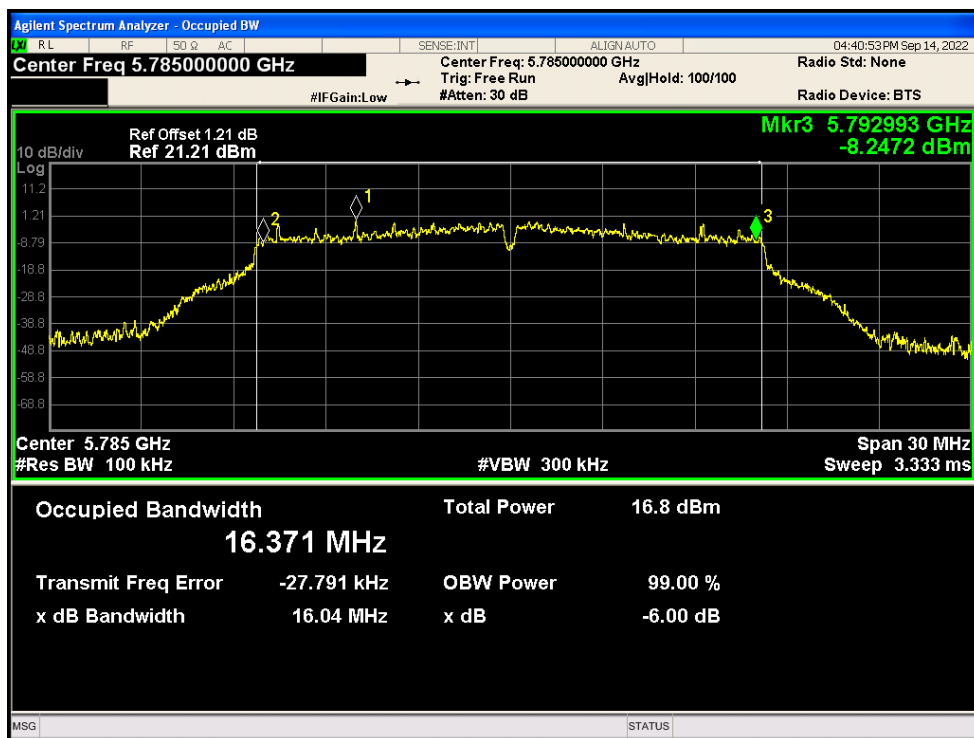


-6dB Bandwidth NVNT a 5825MHz Ant1

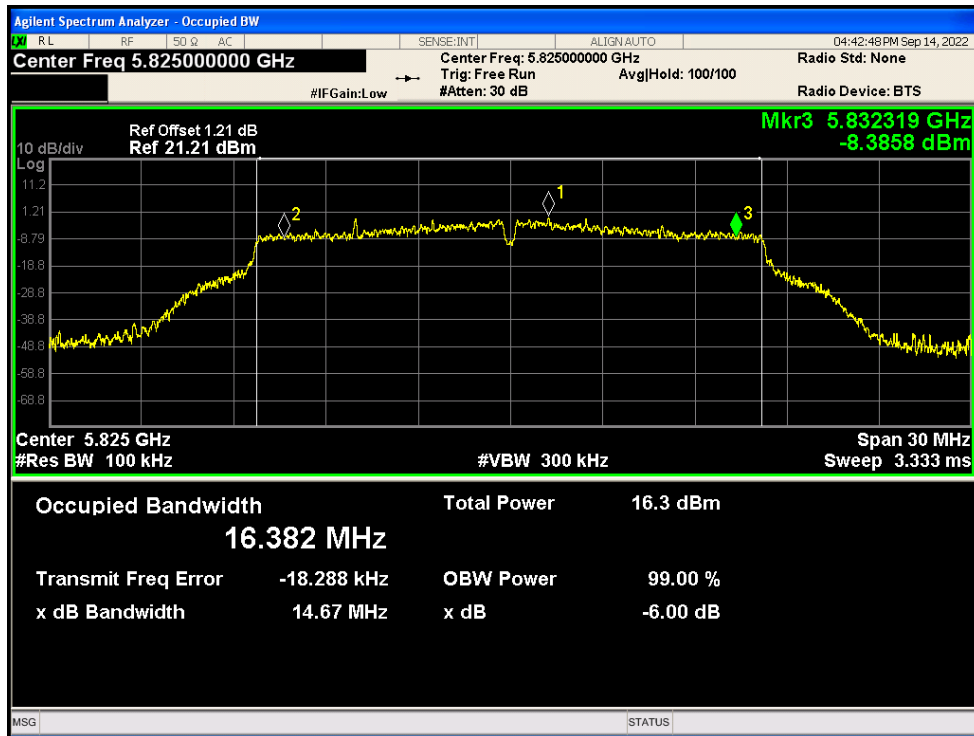


-6dB Bandwidth NVNT ac20 5745MHz Ant1

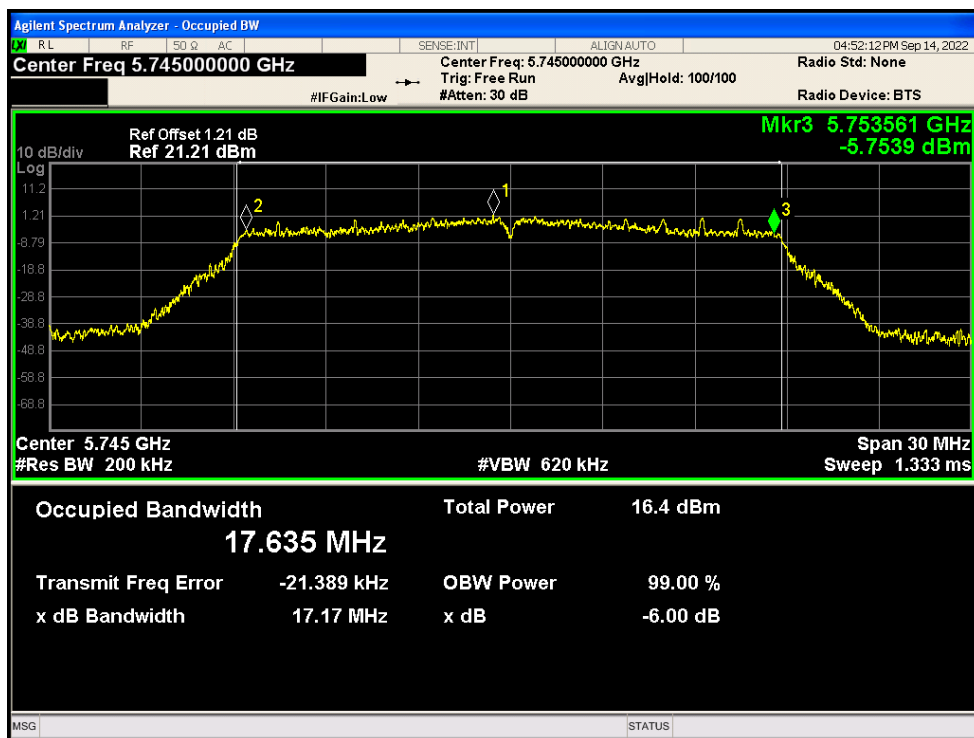


-6dB Bandwidth NVNT ac20 5785MHz Ant1

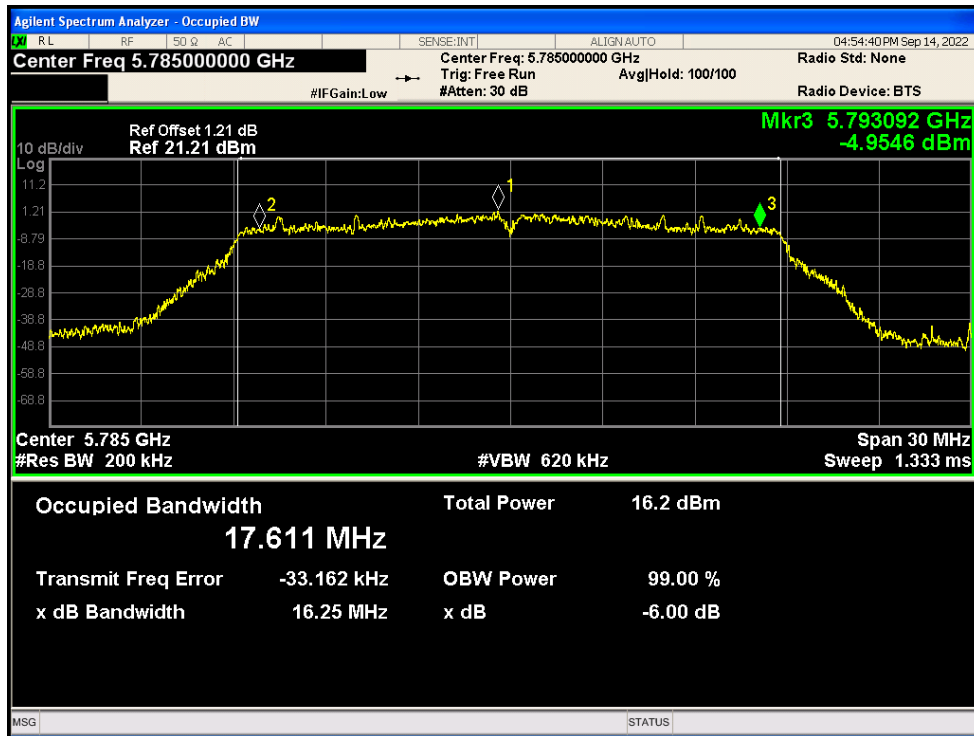


-6dB Bandwidth NVNT ac20 5825MHz Ant1

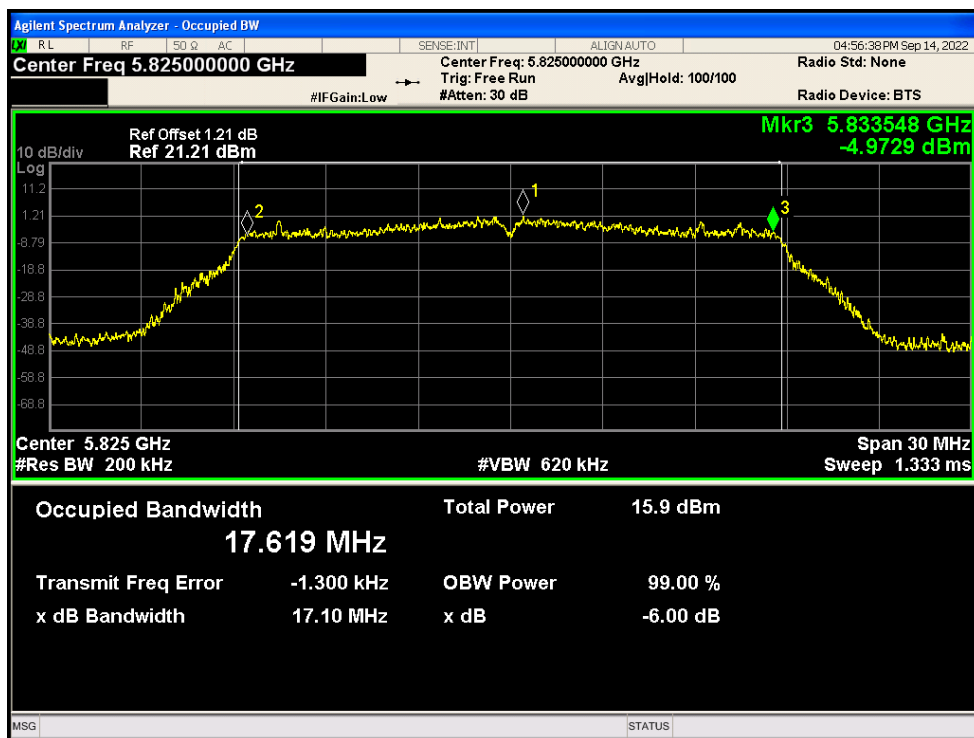


-6dB Bandwidth NVNT ac40 5755MHz Ant1

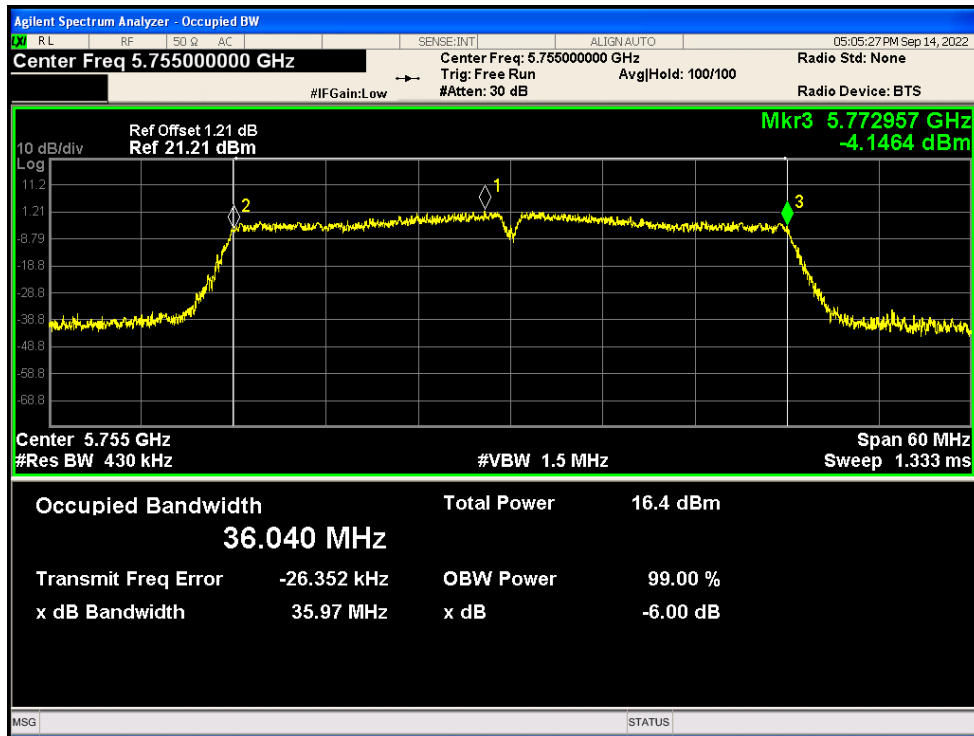


-6dB Bandwidth NVNT ac40 5795MHz Ant1

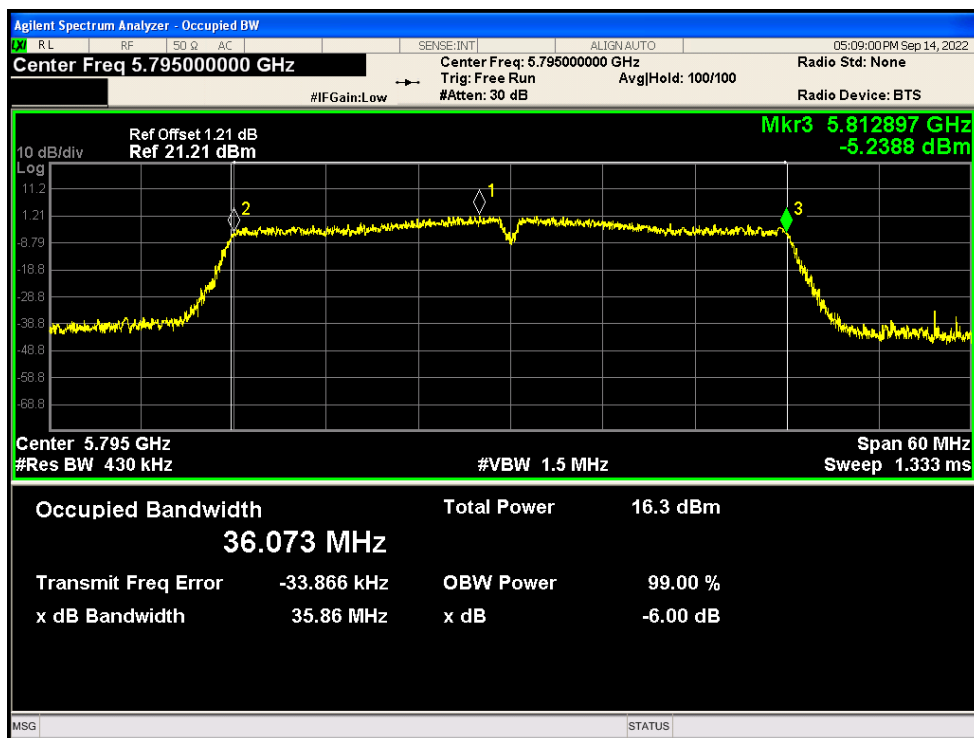


-6dB Bandwidth NVNT ac80 5775MHz Ant1

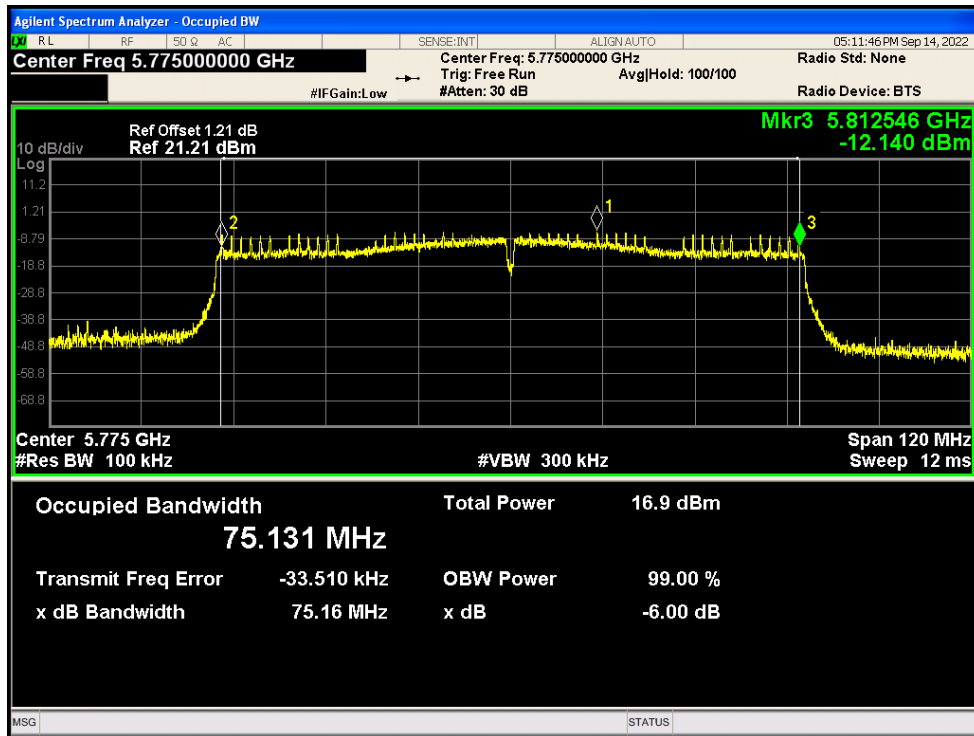


-6dB Bandwidth NVNT n20 5745MHz Ant1

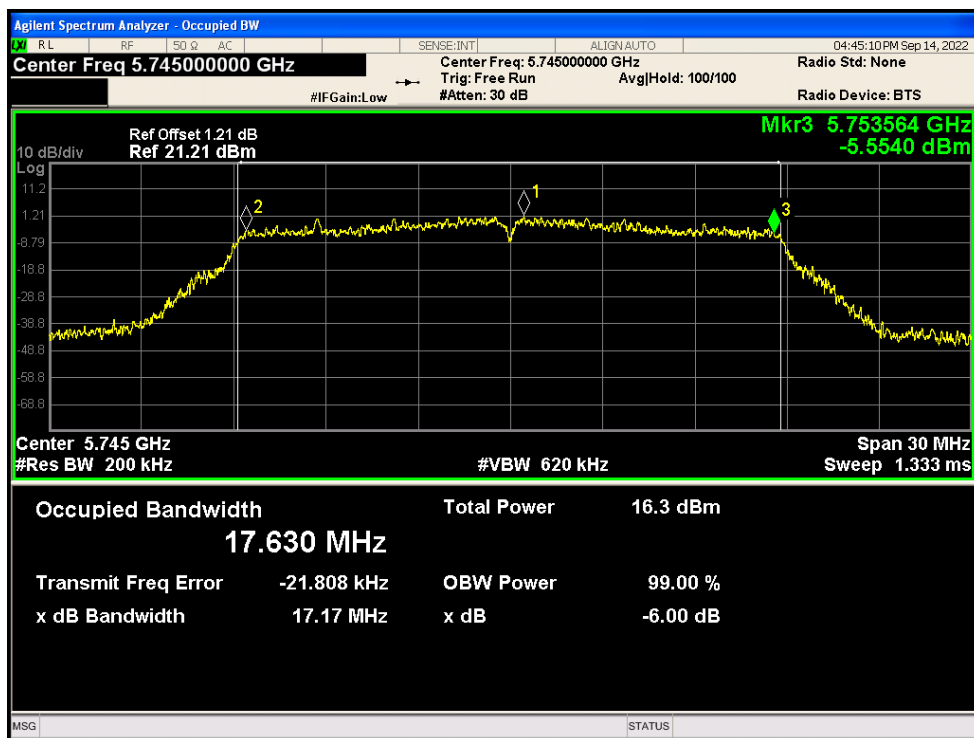


-6dB Bandwidth NVNT n20 5785MHz Ant1

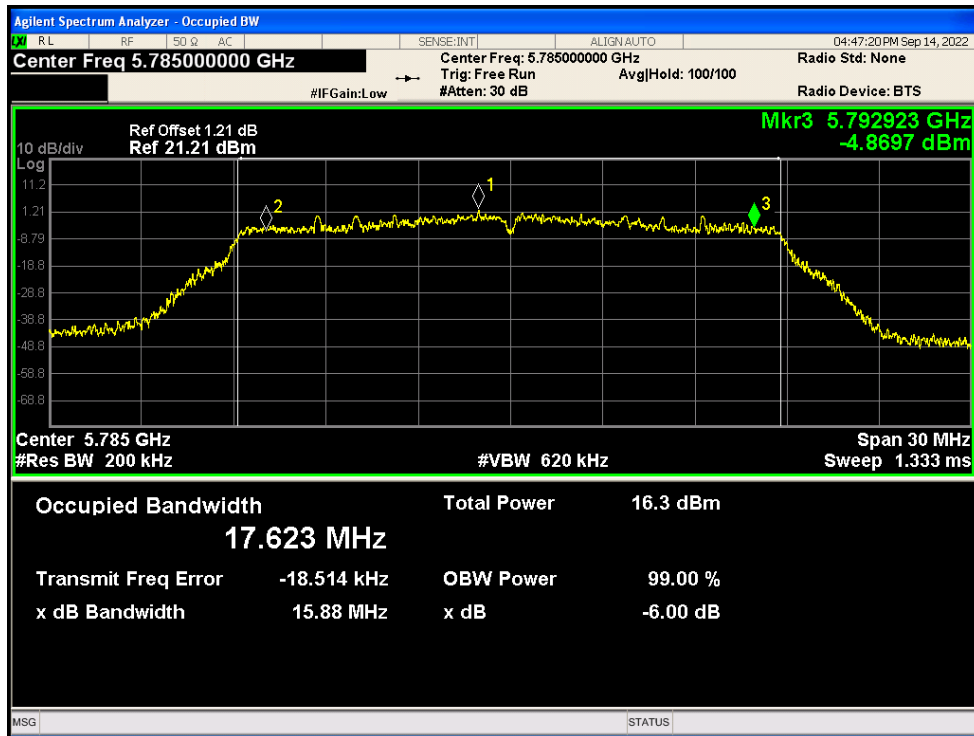


-6dB Bandwidth NVNT n20 5825MHz Ant1

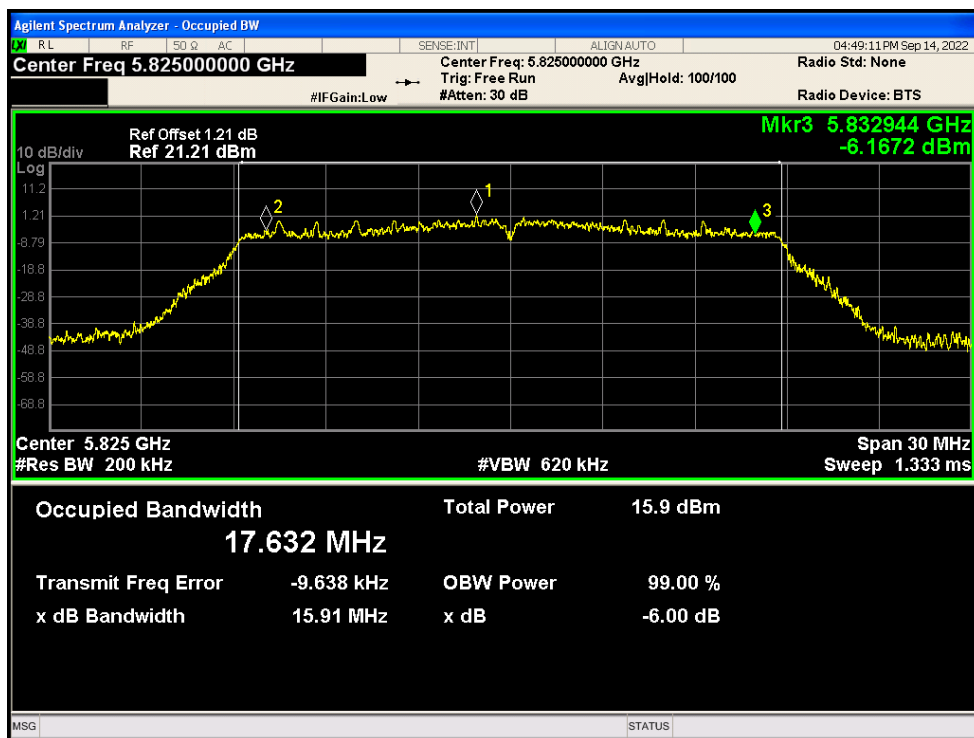

-6dB Bandwidth NVNT n40 5755MHz Ant1

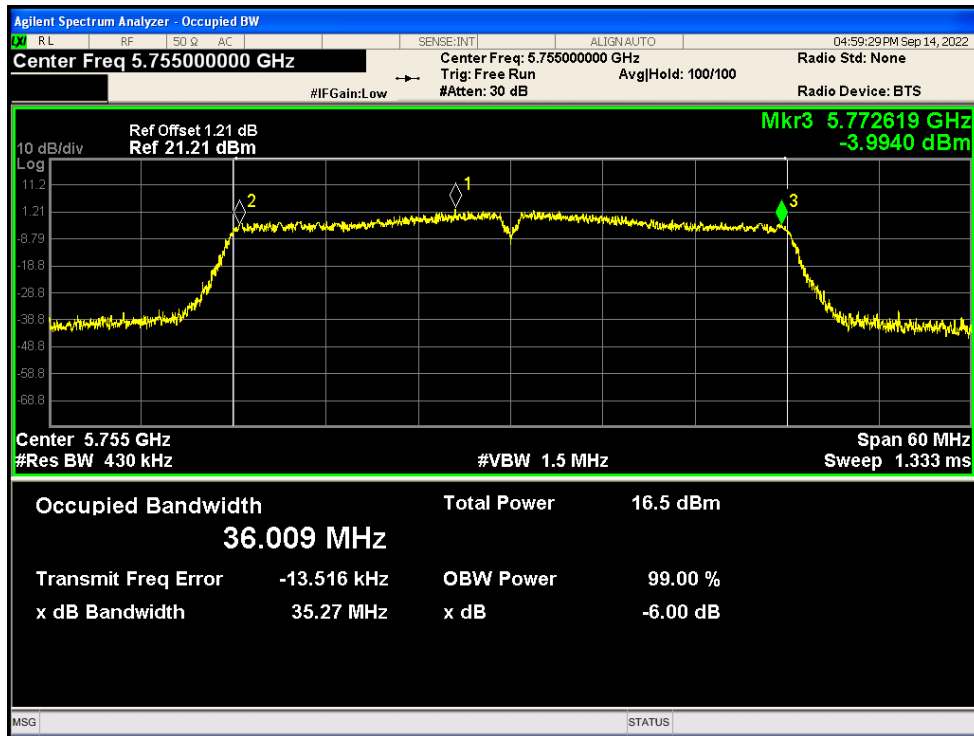


-6dB Bandwidth NVNT n40 5795MHz Ant1

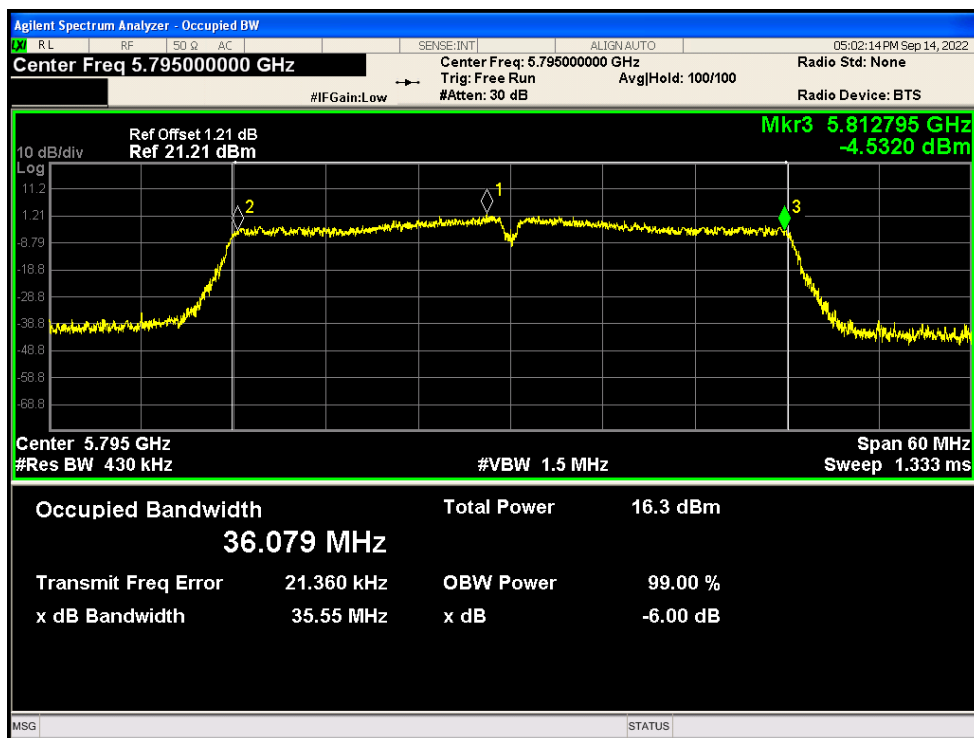


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.46
NVNT	a	5785	Ant1	16.478
NVNT	a	5825	Ant1	16.46
NVNT	ac20	5745	Ant1	17.636
NVNT	ac20	5785	Ant1	17.642
NVNT	ac20	5825	Ant1	17.65
NVNT	ac40	5755	Ant1	36.051
NVNT	ac40	5795	Ant1	36.01
NVNT	ac80	5775	Ant1	75.236
NVNT	n20	5745	Ant1	17.636
NVNT	n20	5785	Ant1	17.646
NVNT	n20	5825	Ant1	17.61
NVNT	n40	5755	Ant1	36.028
NVNT	n40	5795	Ant1	36.036


OBW NVNT a 5745MHz Ant1

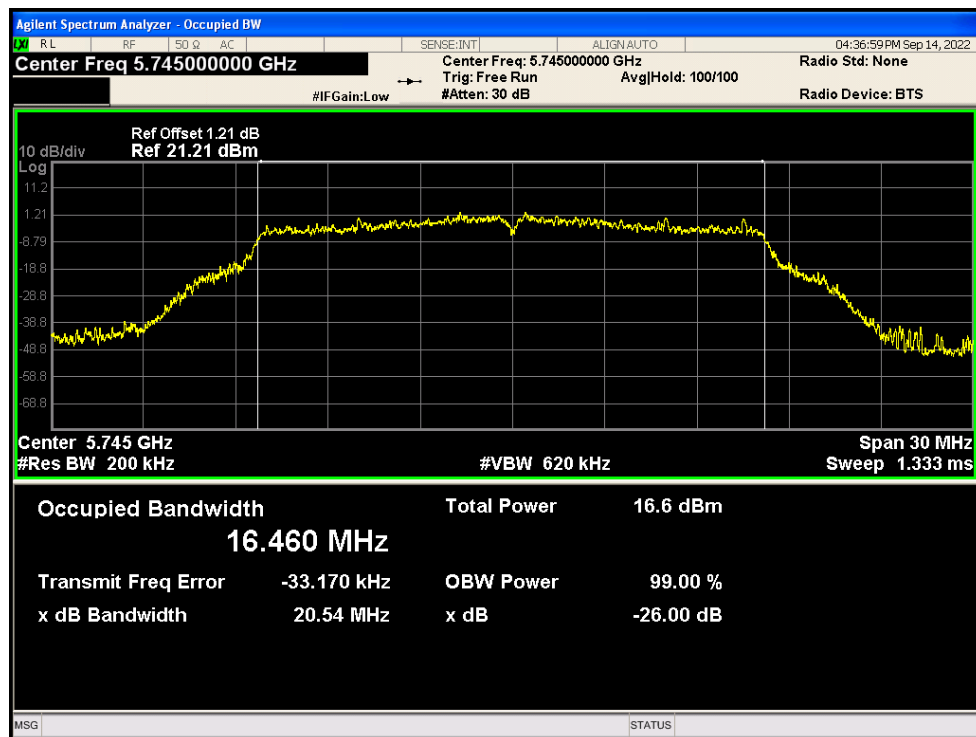


OBW NVNT a 5785MHz Ant1

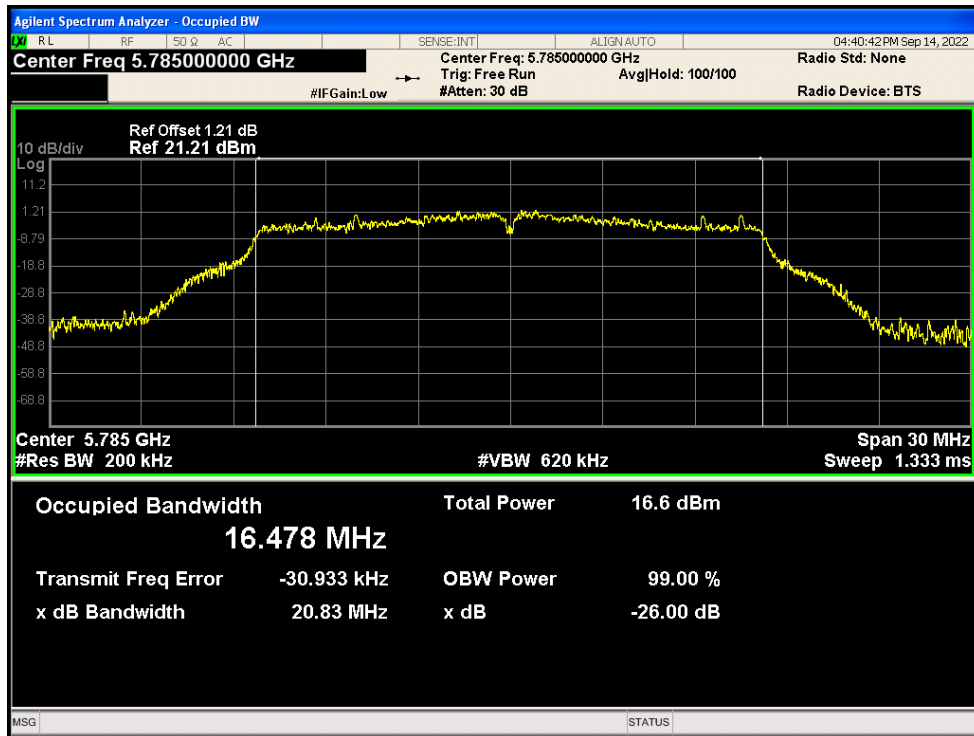


OBW NVNT a 5825MHz Ant1

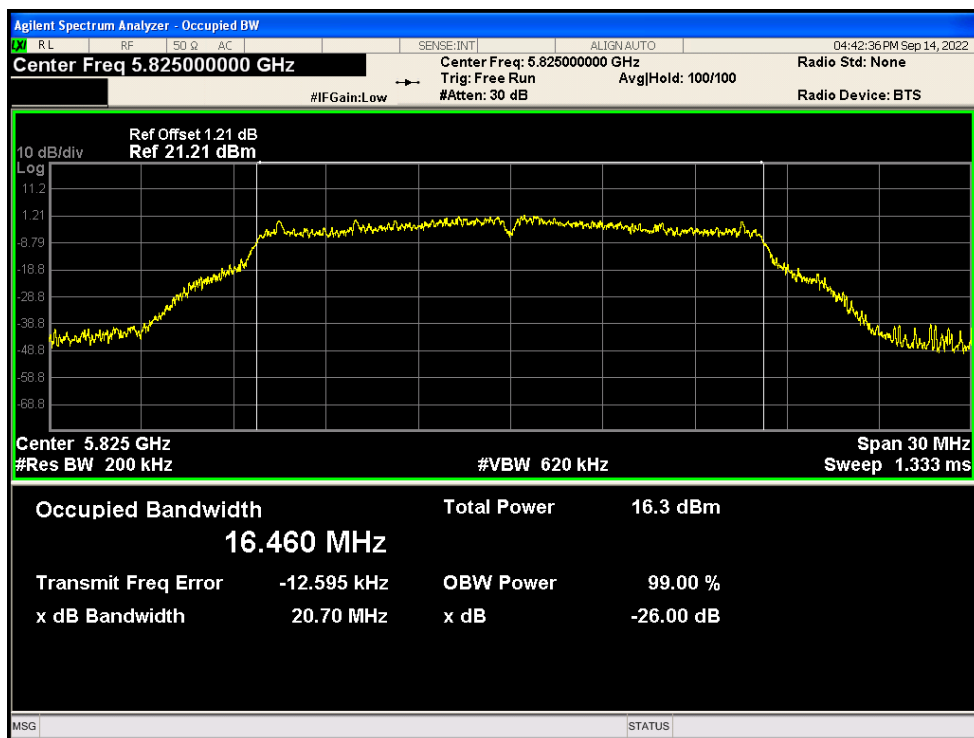


OBW NVNT ac20 5745MHz Ant1

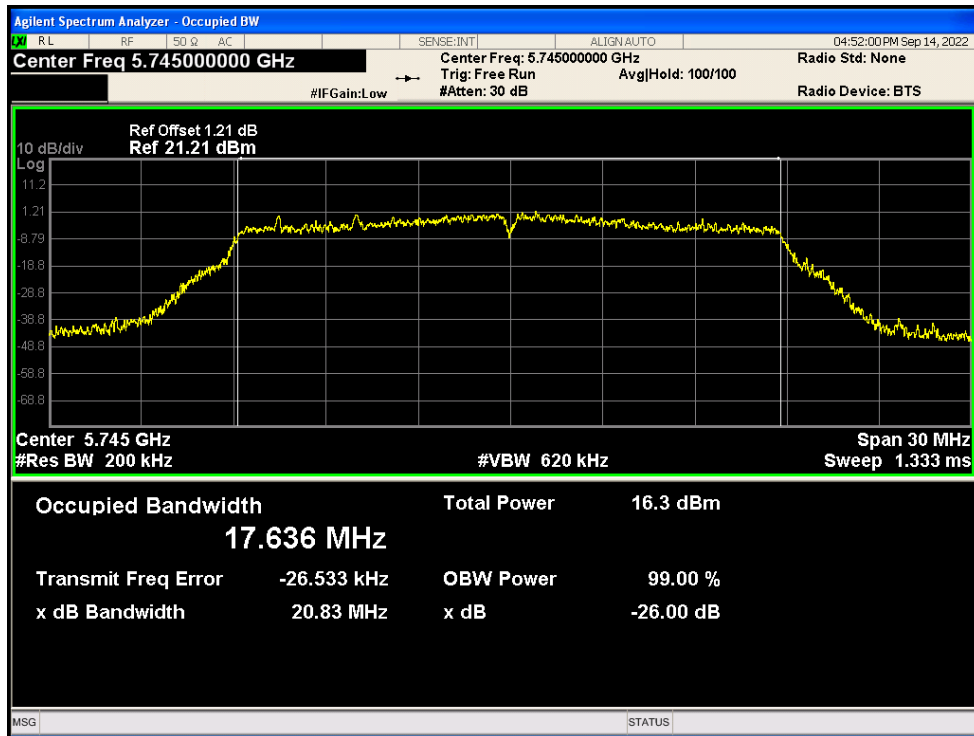


OBW NVNT ac20 5785MHz Ant1

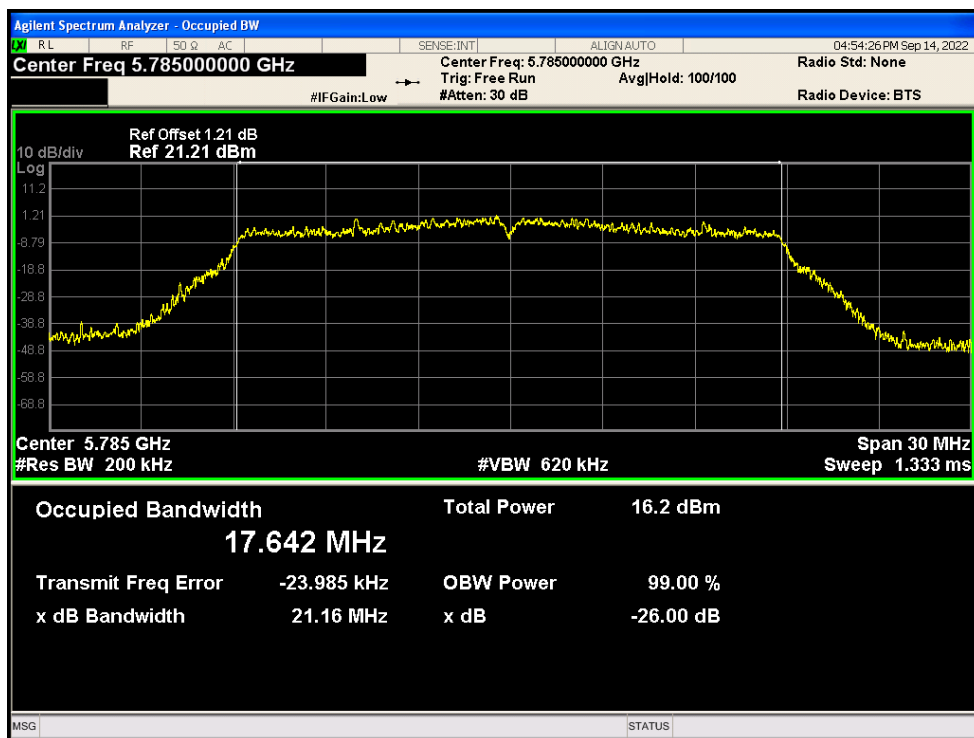


OBW NVNT ac20 5825MHz Ant1

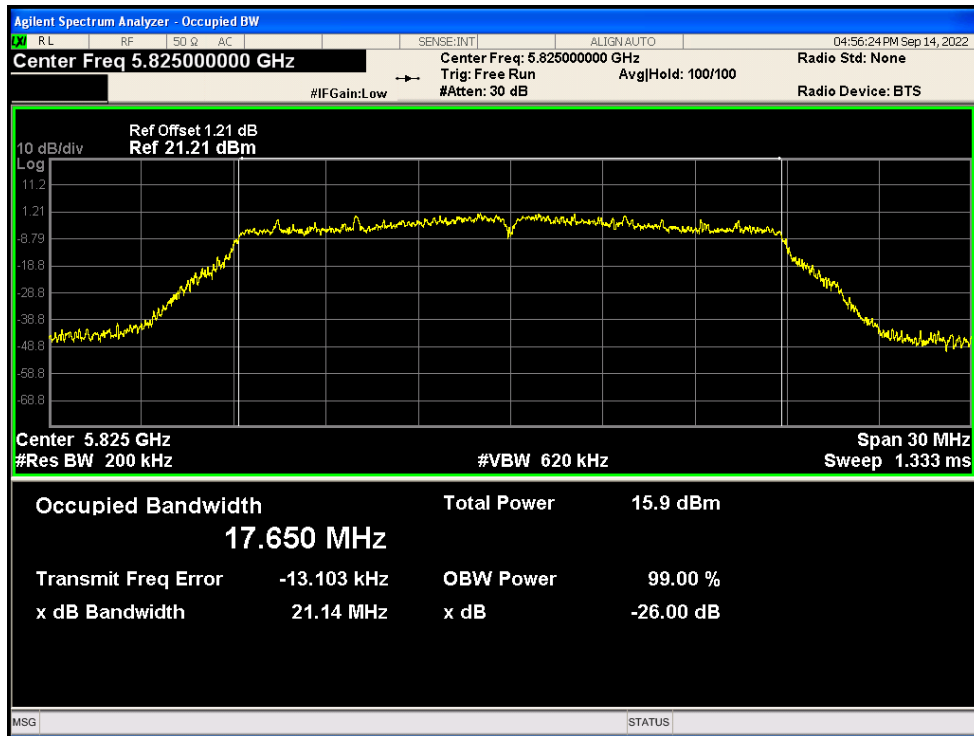


OBW NVNT ac40 5755MHz Ant1

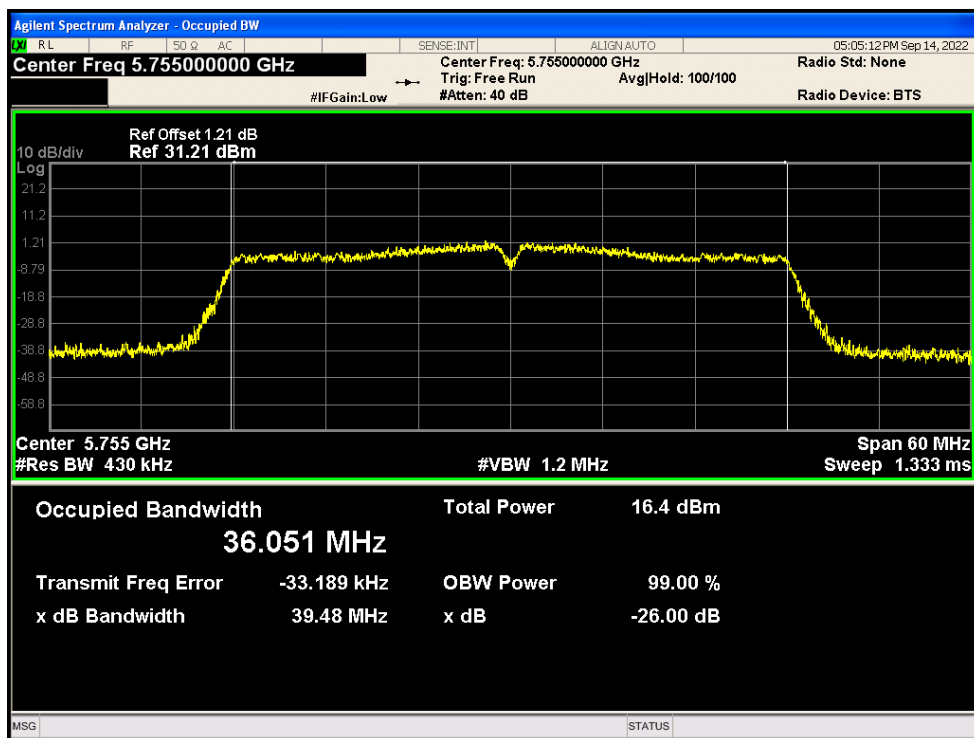


OBW NVNT ac40 5795MHz Ant1

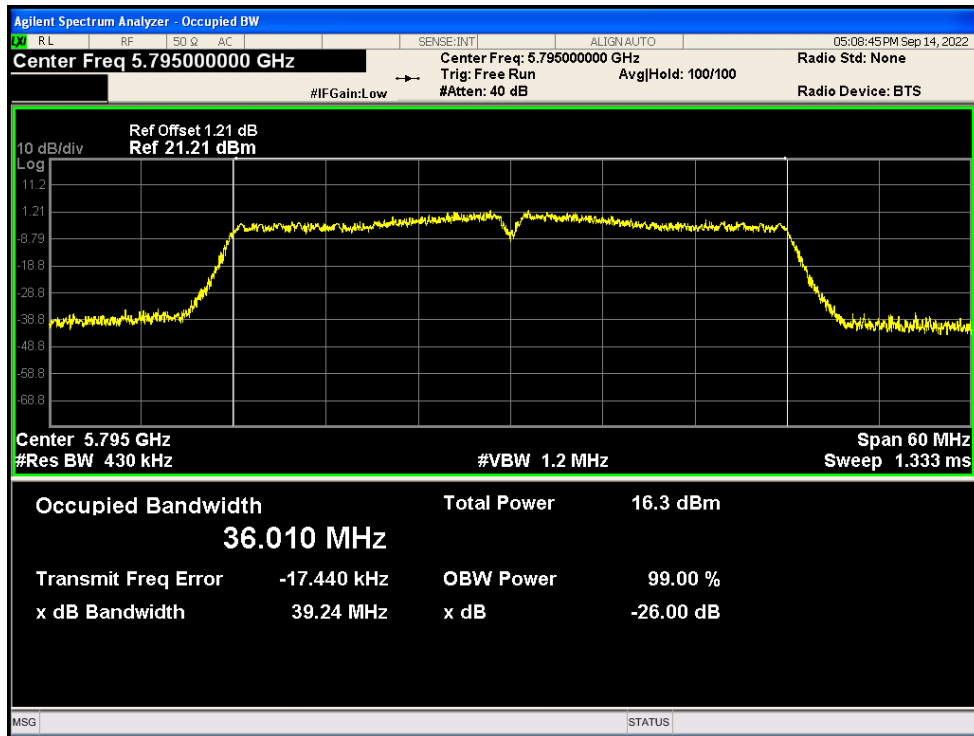


OBW NVNT ac80 5775MHz Ant1

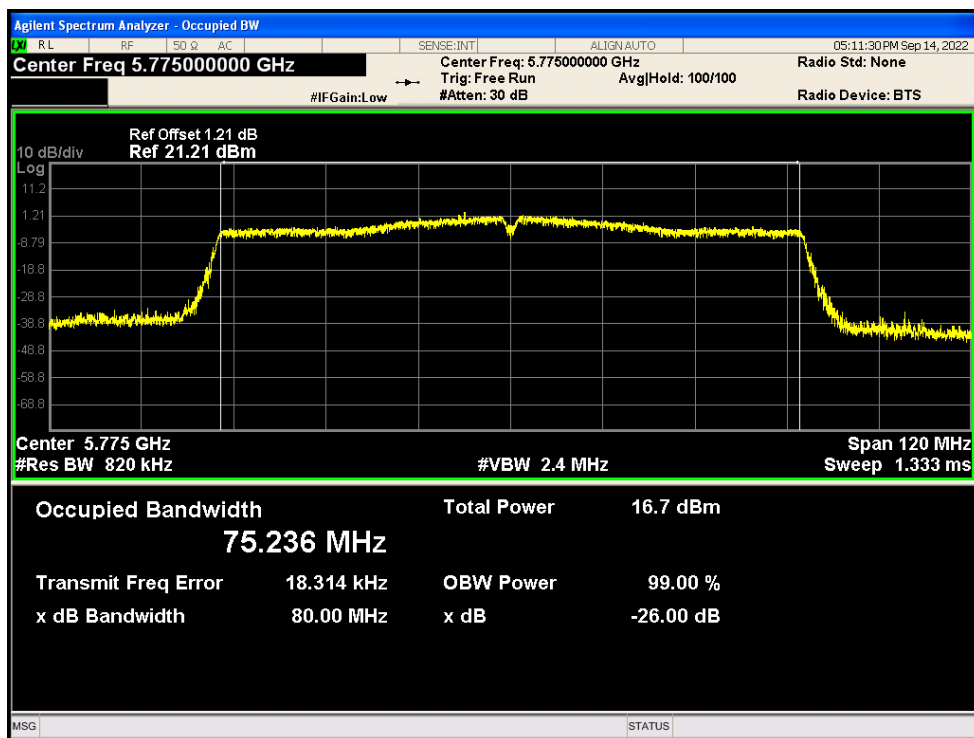


OBW NVNT n20 5745MHz Ant1

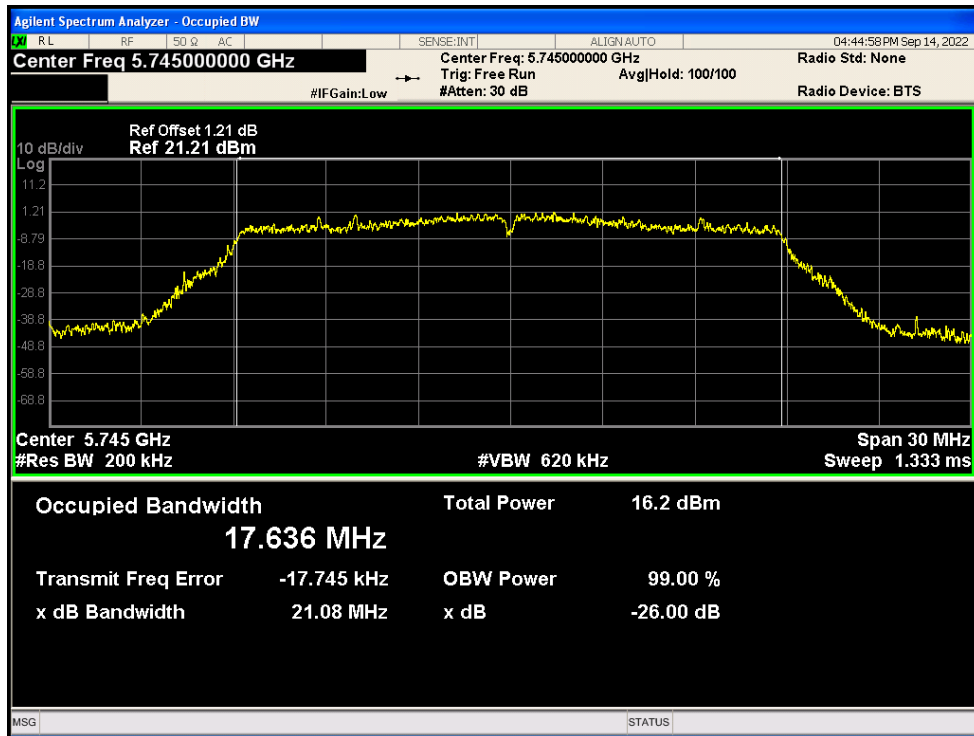


OBW NVNT n20 5785MHz Ant1

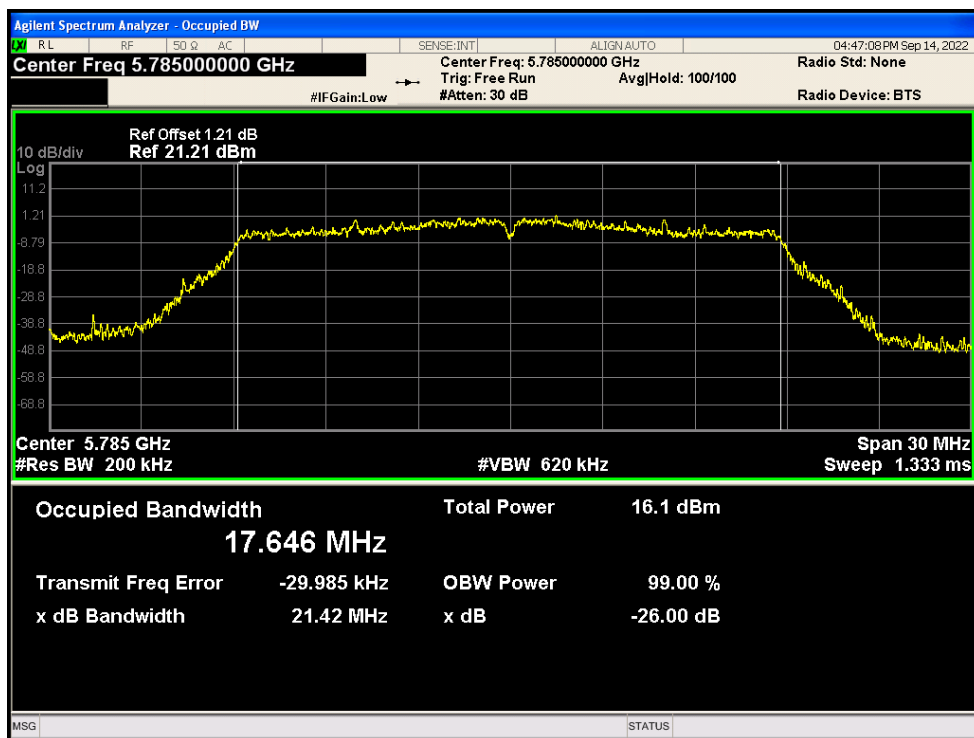


OBW NVNT n20 5825MHz Ant1

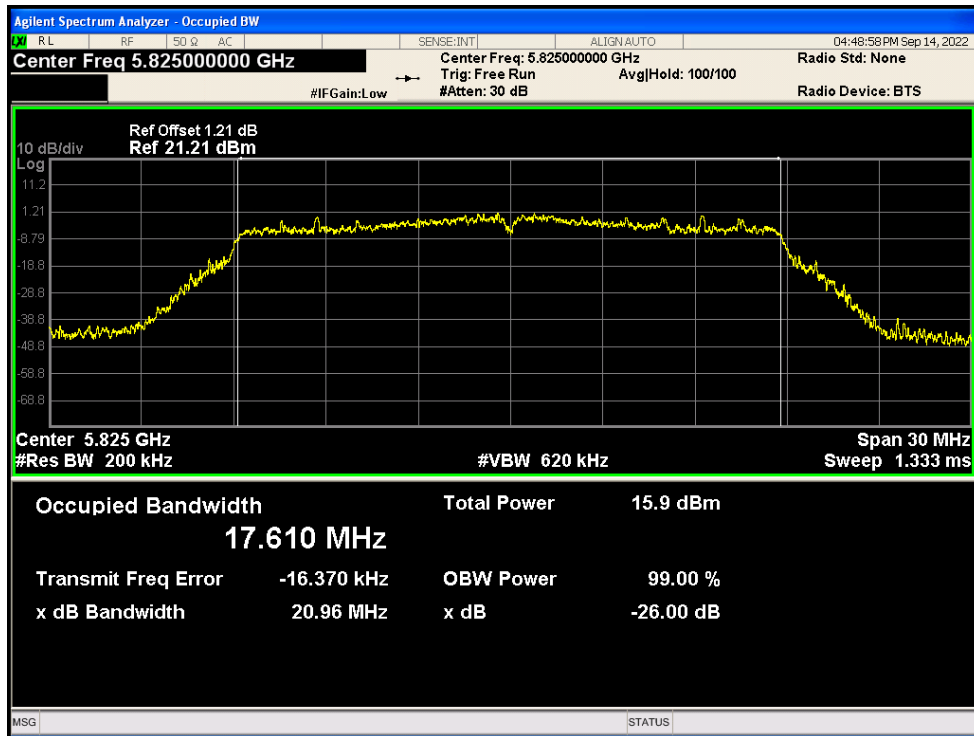

OBW NVNT n40 5755MHz Ant1

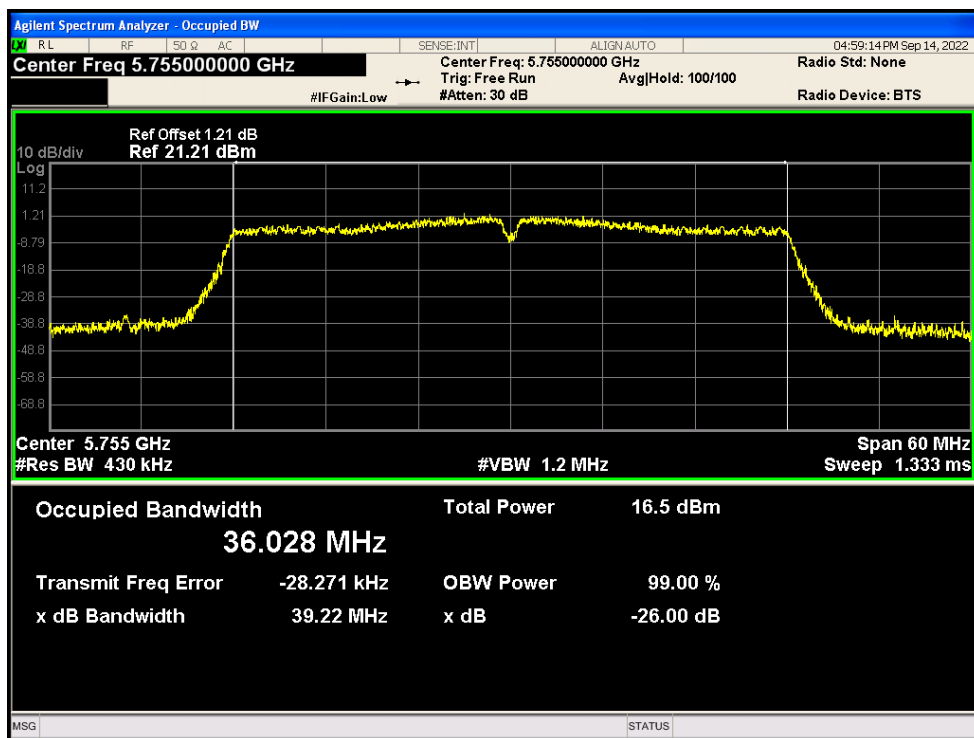


OBW NVNT n40 5795MHz Ant1

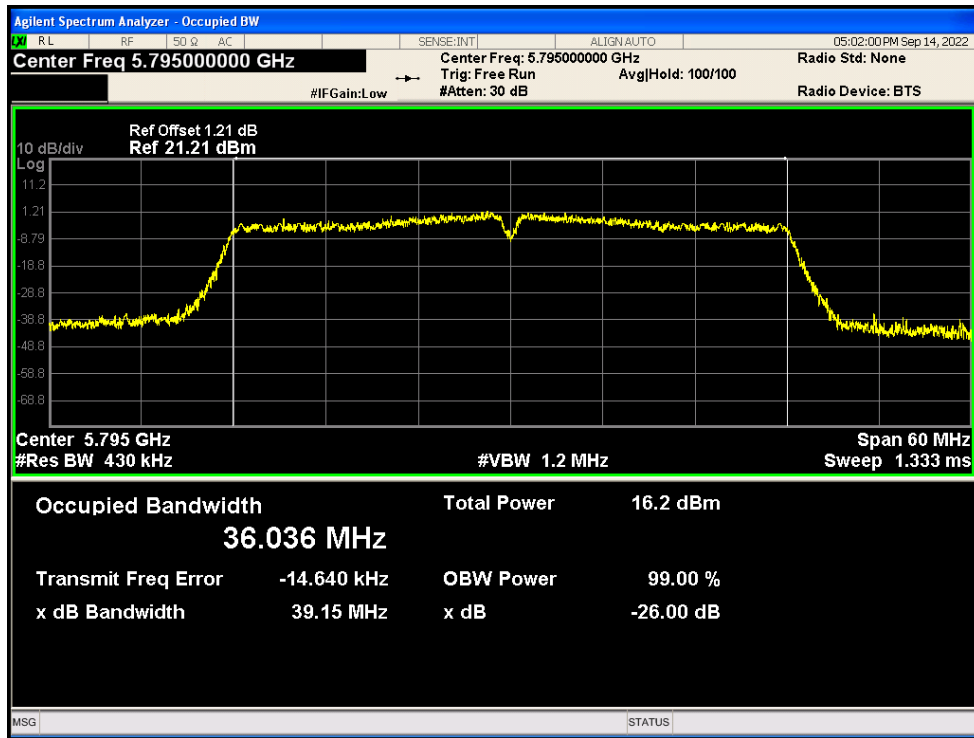


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-0.82	0.1	-0.72	30	Pass
NVNT	a	5785	Ant1	-0.613	0.1	-0.513	30	Pass
NVNT	a	5825	Ant1	-0.942	0.1	-0.842	30	Pass
NVNT	ac20	5745	Ant1	-1.206	0.1	-1.106	30	Pass
NVNT	ac20	5785	Ant1	-1.455	0.1	-1.355	30	Pass
NVNT	ac20	5825	Ant1	-1.414	0.1	-1.314	30	Pass
NVNT	ac40	5755	Ant1	-4.255	0.19	-4.065	30	Pass
NVNT	ac40	5795	Ant1	-4.66	0.19	-4.47	30	Pass
NVNT	ac80	5775	Ant1	-7.778	0.71	-7.068	30	Pass
NVNT	n20	5745	Ant1	-1.284	0.1	-1.184	30	Pass
NVNT	n20	5785	Ant1	-1.634	0.1	-1.534	30	Pass
NVNT	n20	5825	Ant1	-1.945	0.1	-1.845	30	Pass
NVNT	n40	5755	Ant1	-4.246	0.2	-4.046	30	Pass
NVNT	n40	5795	Ant1	-4.581	0.2	-4.381	30	Pass


PSD NVNT a 5745MHz Ant1

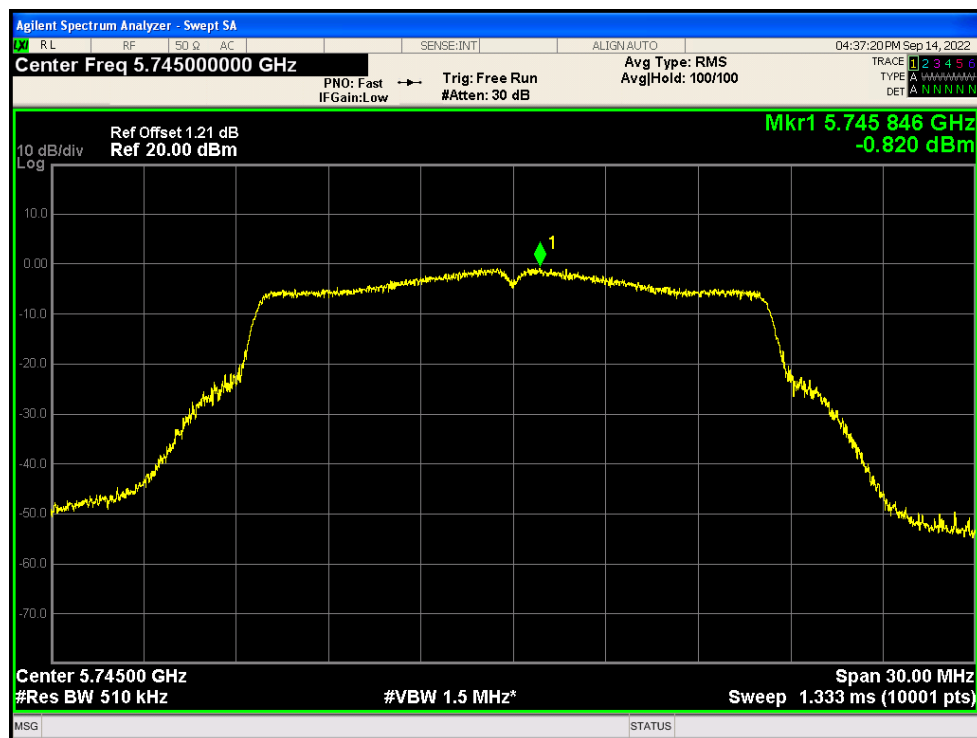


PSD NVNT a 5785MHz Ant1

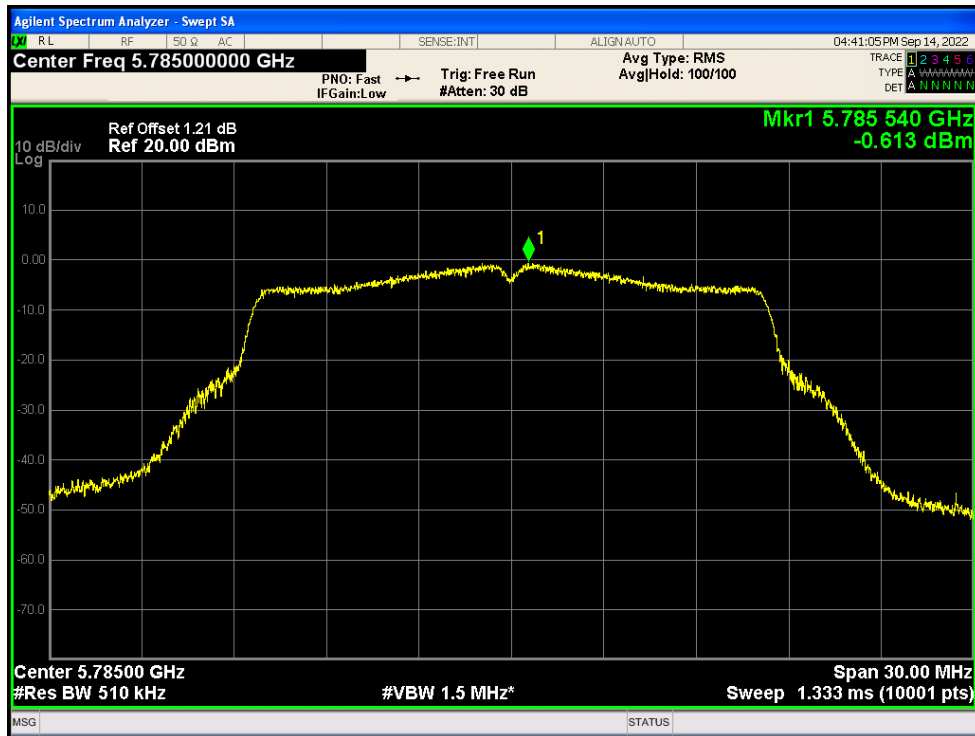


PSD NVNT a 5825MHz Ant1

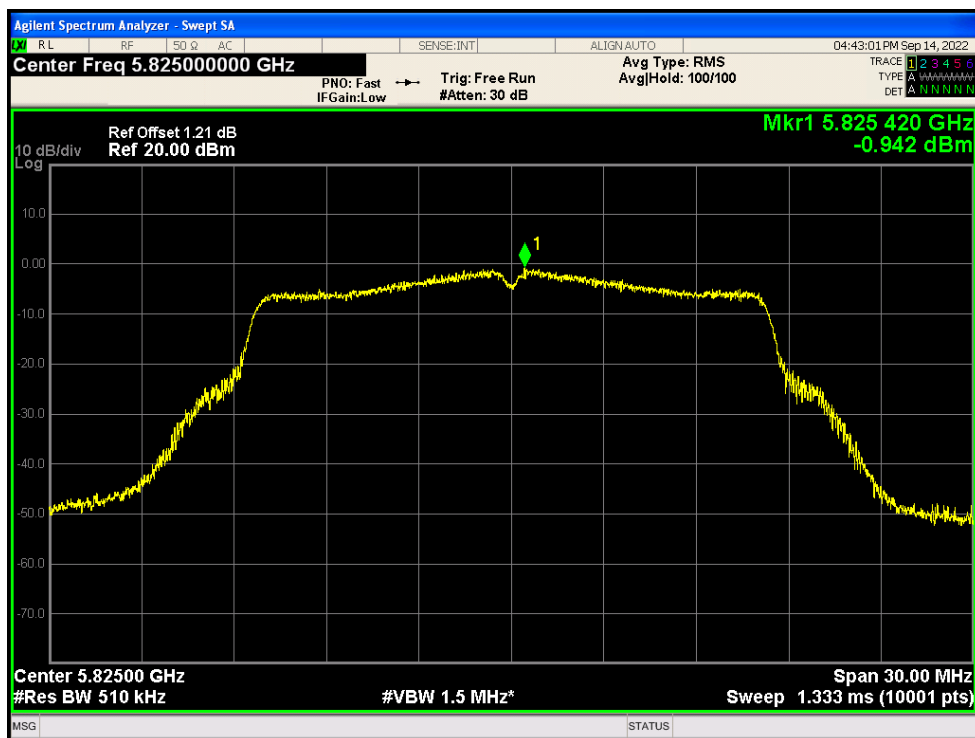


PSD NVNT ac20 5745MHz Ant1

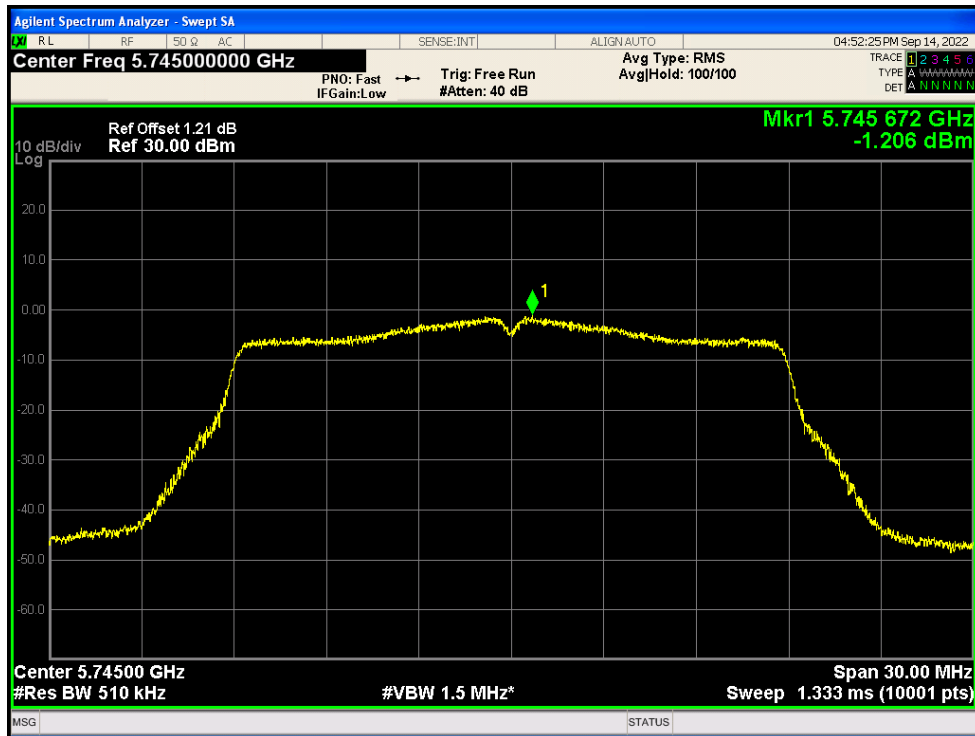


PSD NVNT ac20 5785MHz Ant1

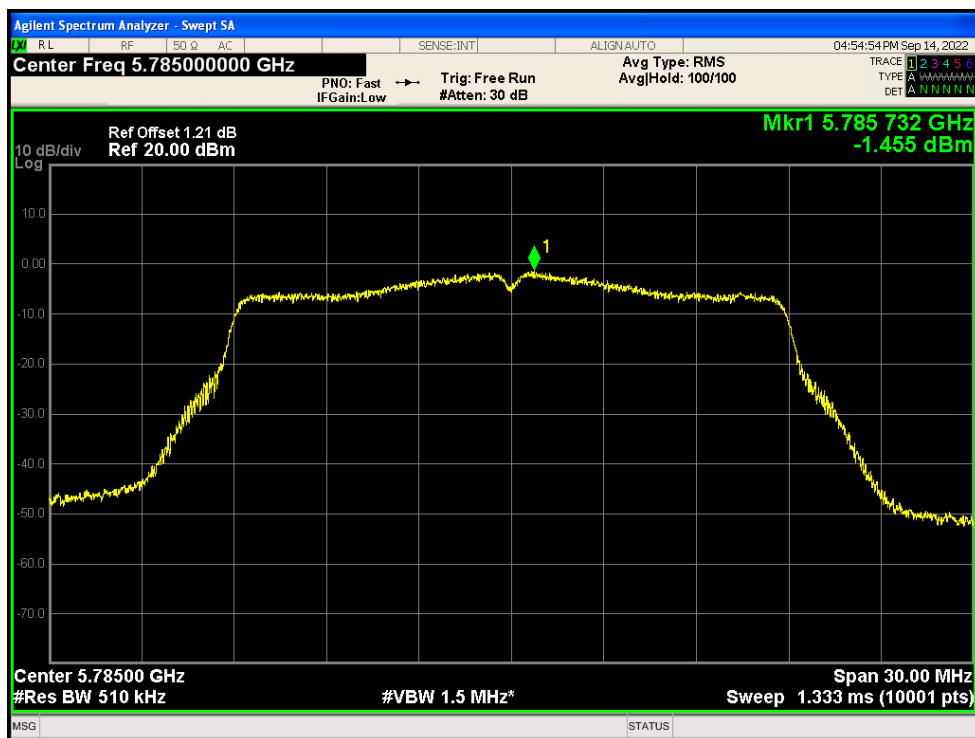


PSD NVNT ac20 5825MHz Ant1

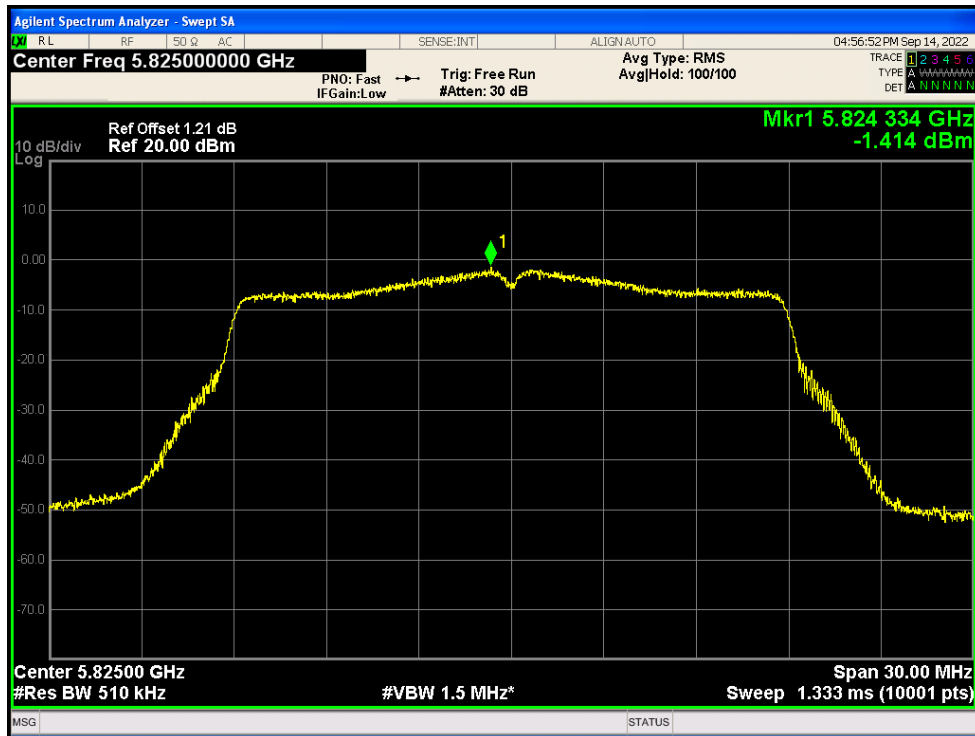


PSD NVNT ac40 5755MHz Ant1

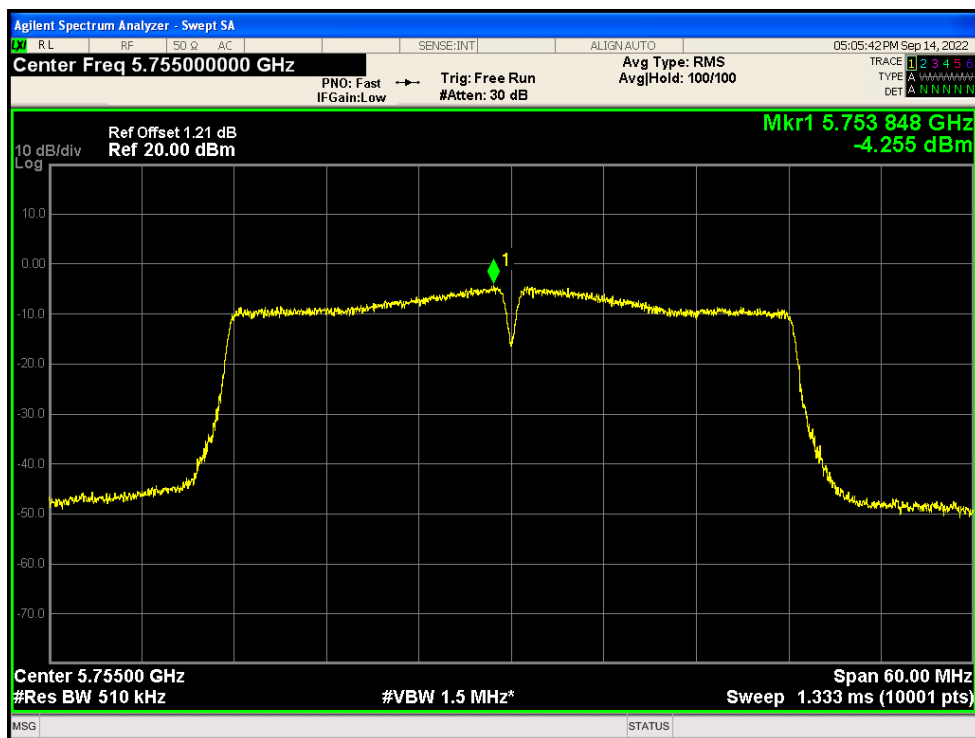


PSD NVNT ac40 5795MHz Ant1

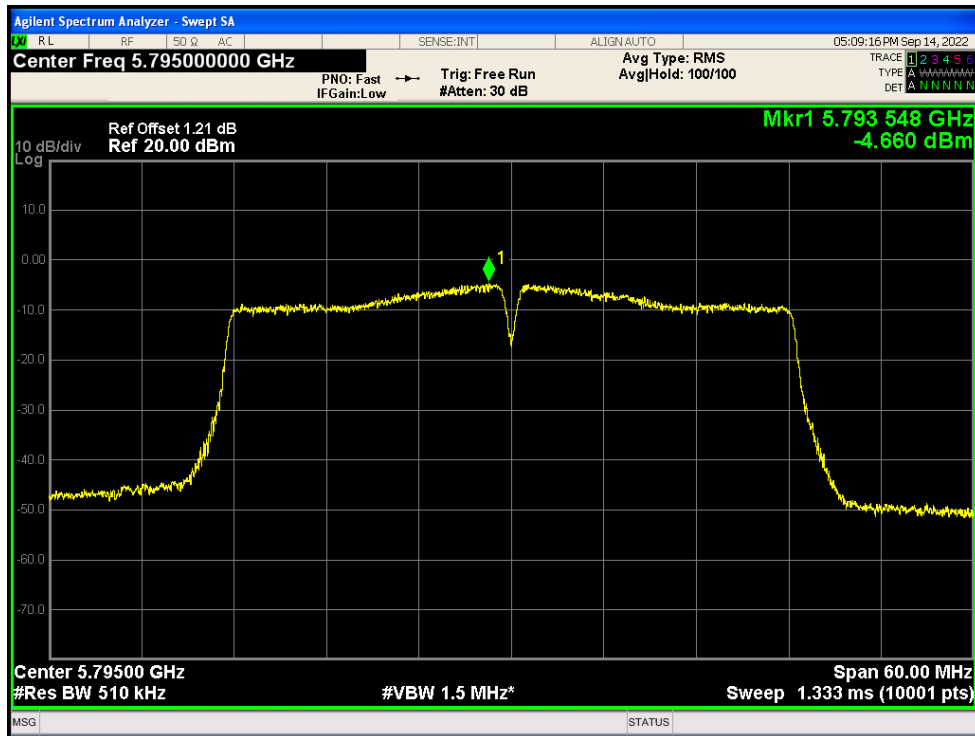


PSD NVNT ac80 5775MHz Ant1

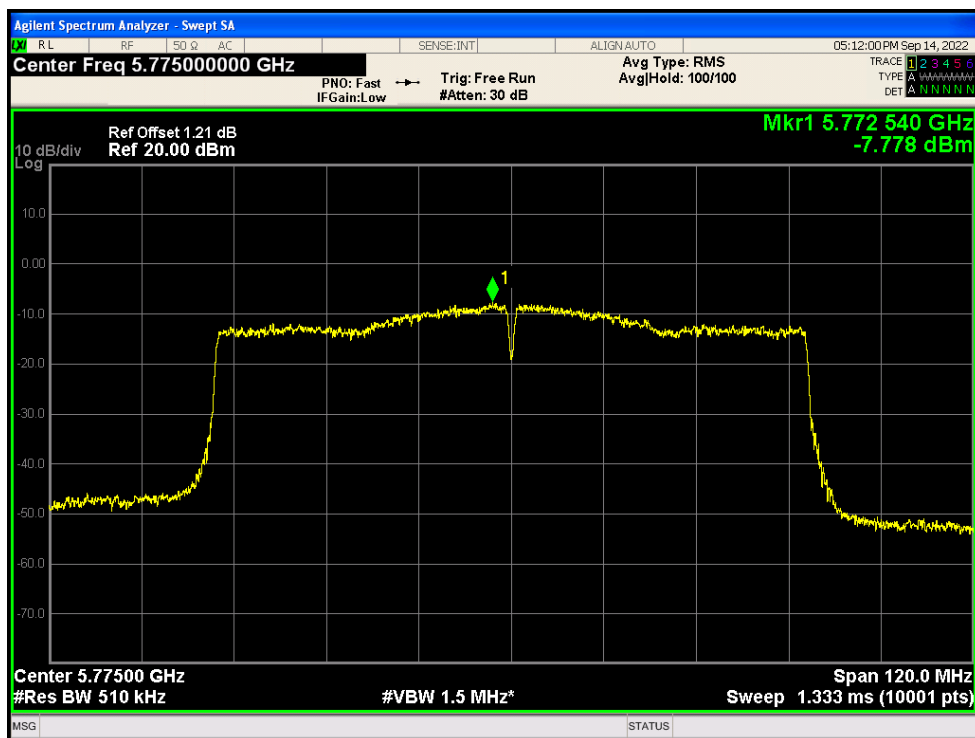


PSD NVNT n20 5745MHz Ant1

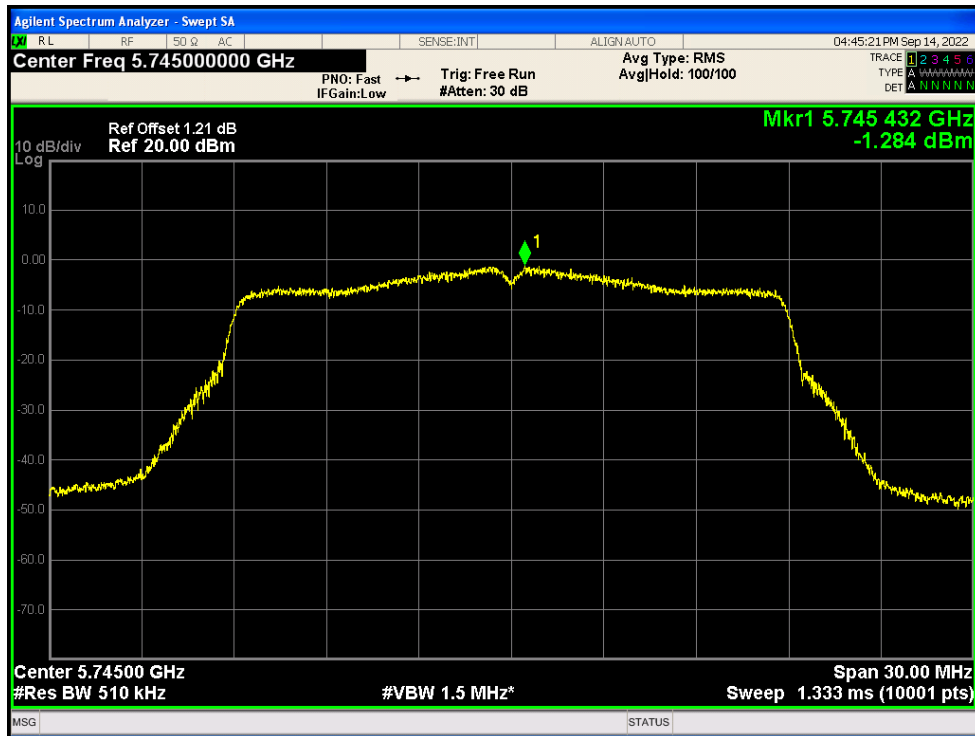


PSD NVNT n20 5785MHz Ant1

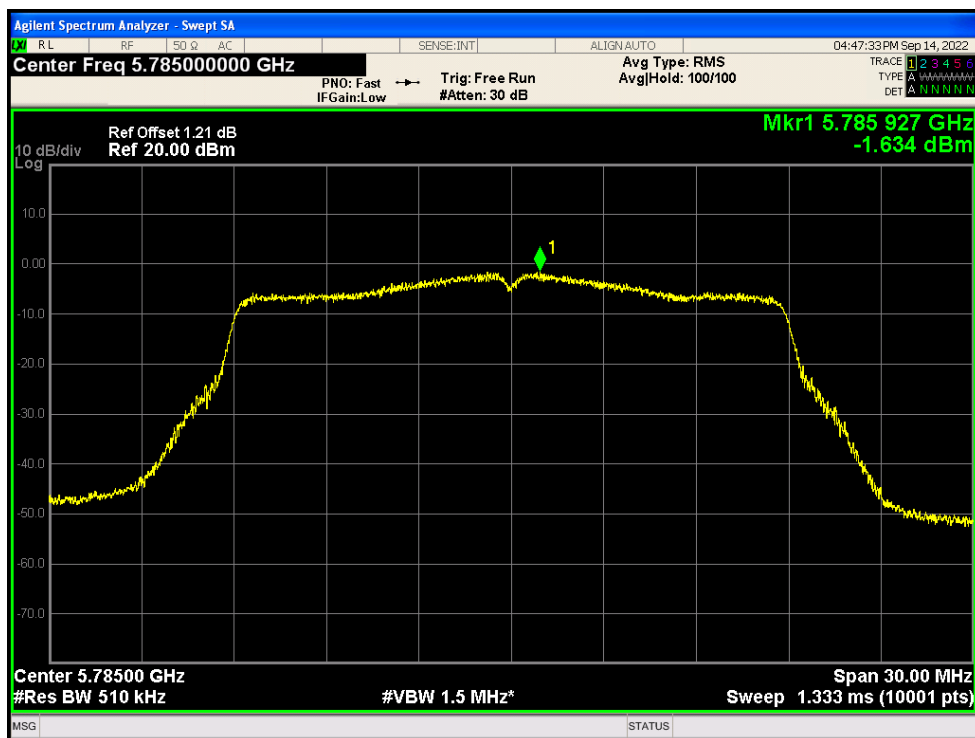


PSD NVNT n20 5825MHz Ant1

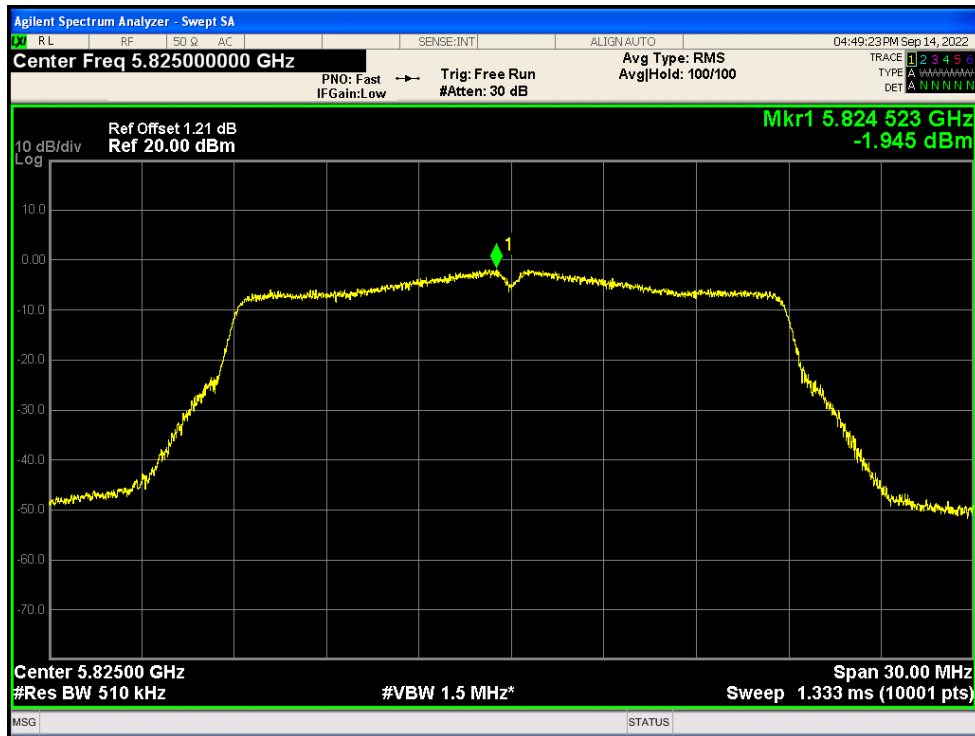

PSD NVNT n40 5755MHz Ant1

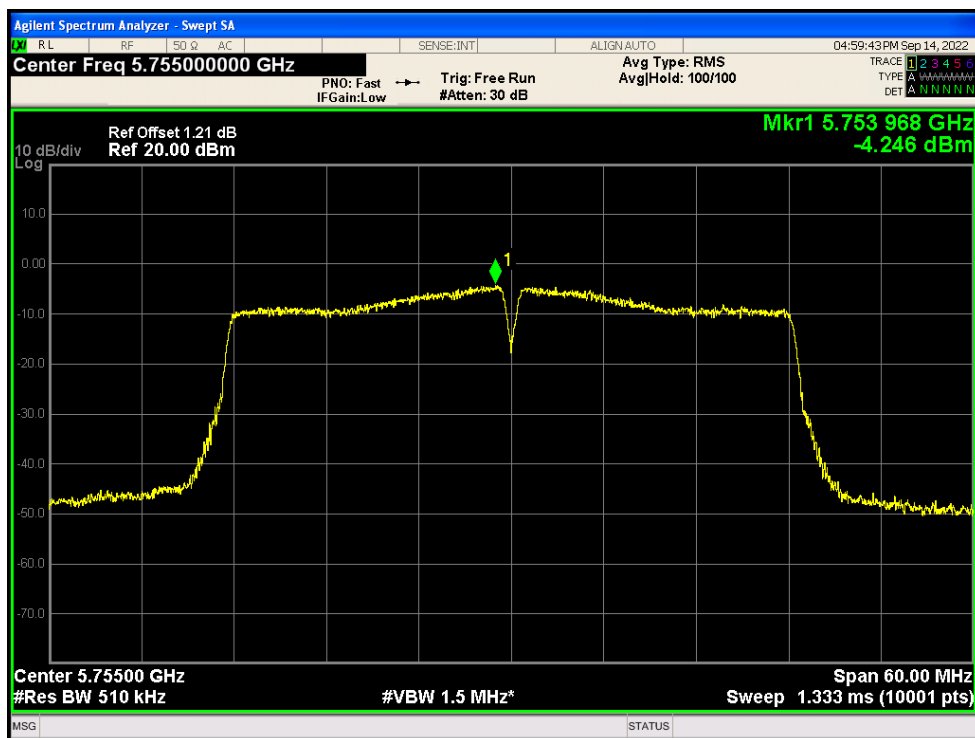


PSD NVNT n40 5795MHz Ant1

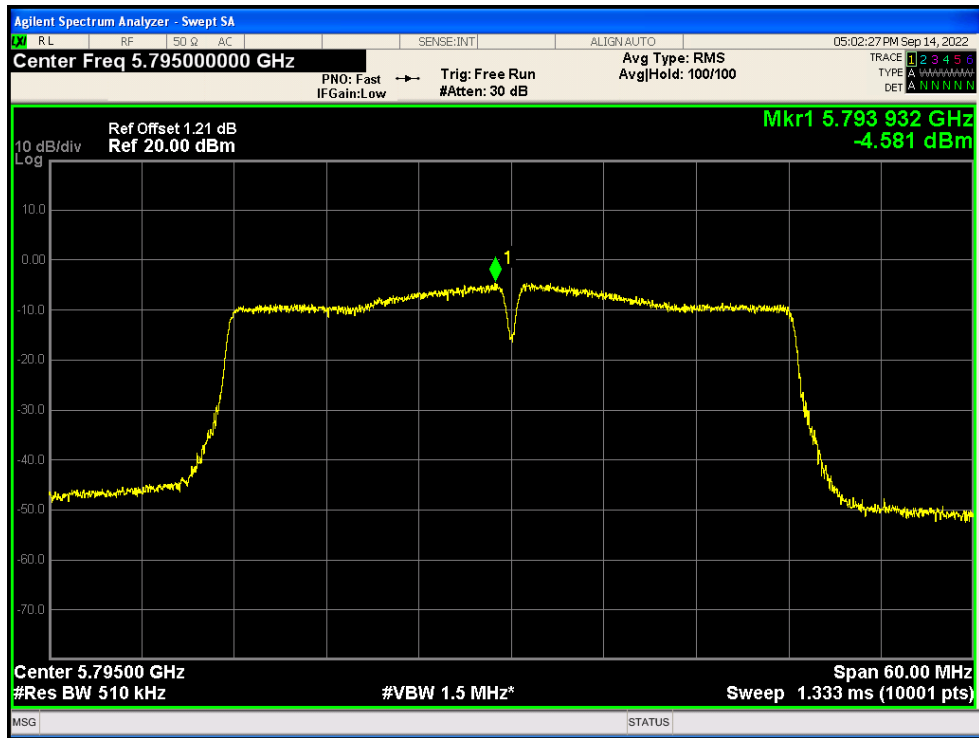

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Verdict
NVNT	a	5745	Ant1	-30.72	Pass
NVNT	a	5825	Ant1	-30.89	Pass
NVNT	ac20	5745	Ant1	-31.71	Pass
NVNT	ac20	5825	Ant1	-32.64	Pass
NVNT	ac40	5755	Ant1	-27.75	Pass
NVNT	ac40	5795	Ant1	-33.04	Pass
NVNT	ac80	5775	Ant1	-35.86	Pass
NVNT	n20	5745	Ant1	-31.71	Pass
NVNT	n20	5825	Ant1	-38.11	Pass
NVNT	n40	5755	Ant1	-29.09	Pass
NVNT	n40	5795	Ant1	-38.3	Pass


Band Edge NVNT a 5745MHz Low Ant1

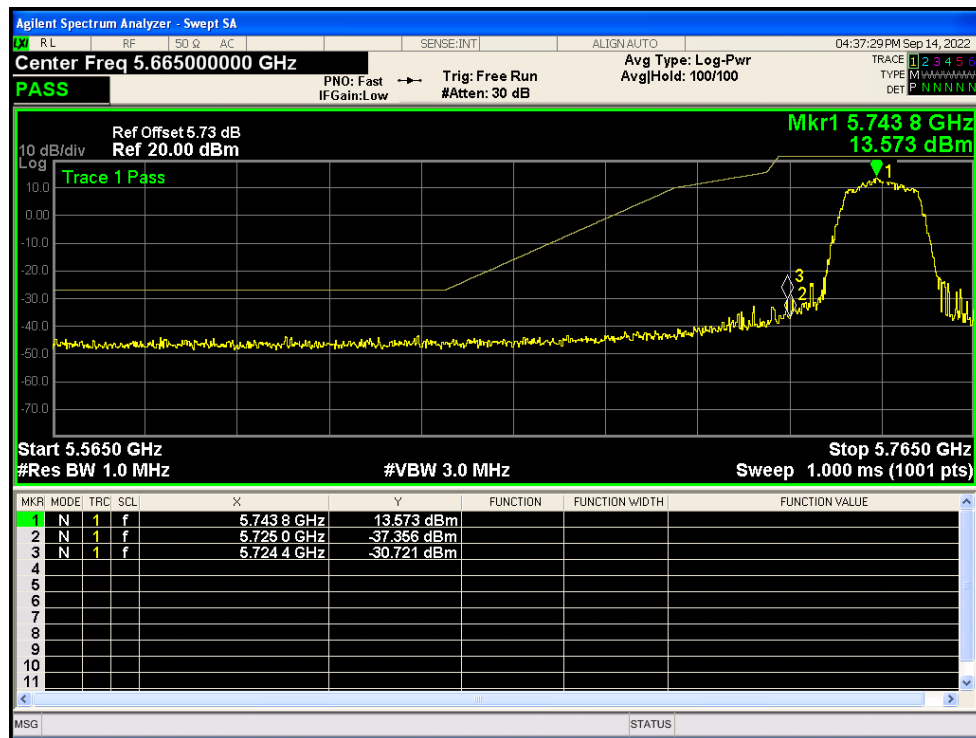


Band Edge NVNT a 5825MHz High Ant1




Band Edge NVNT ac20 5745MHz Low Ant1

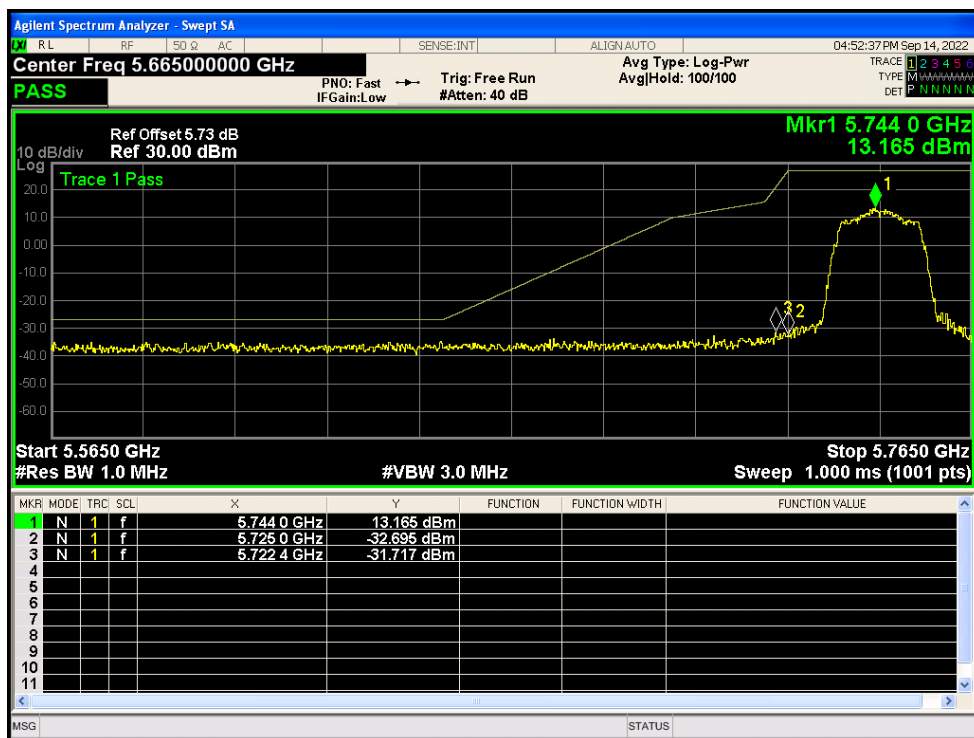


Band Edge NVNT ac20 5825MHz High Ant1

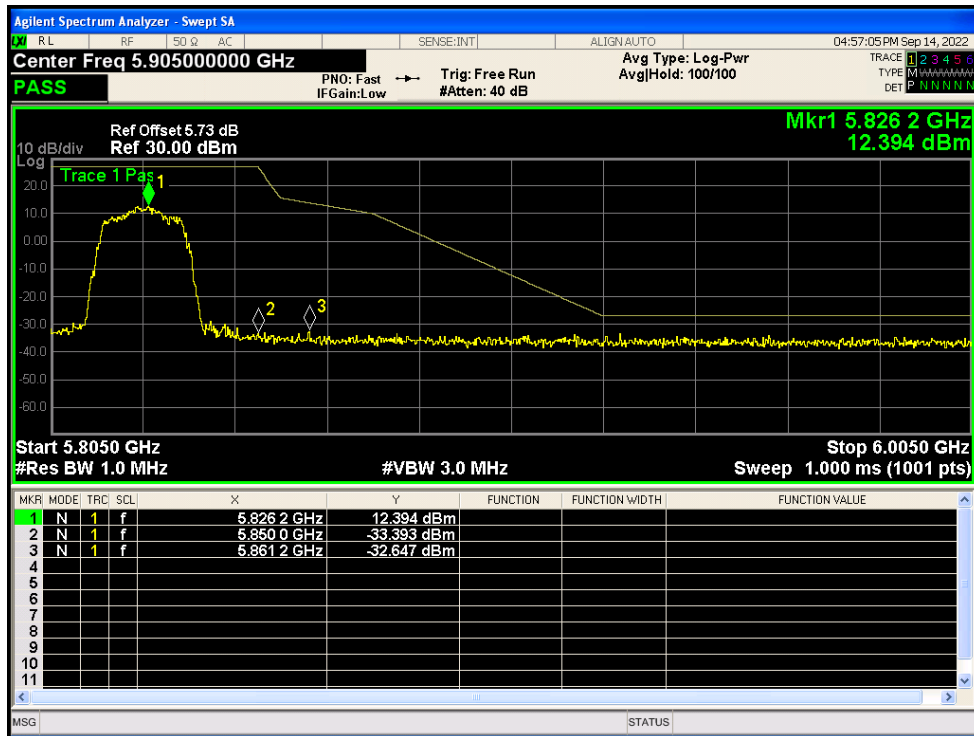


Band Edge NVNT ac40 5755MHz Low Ant1

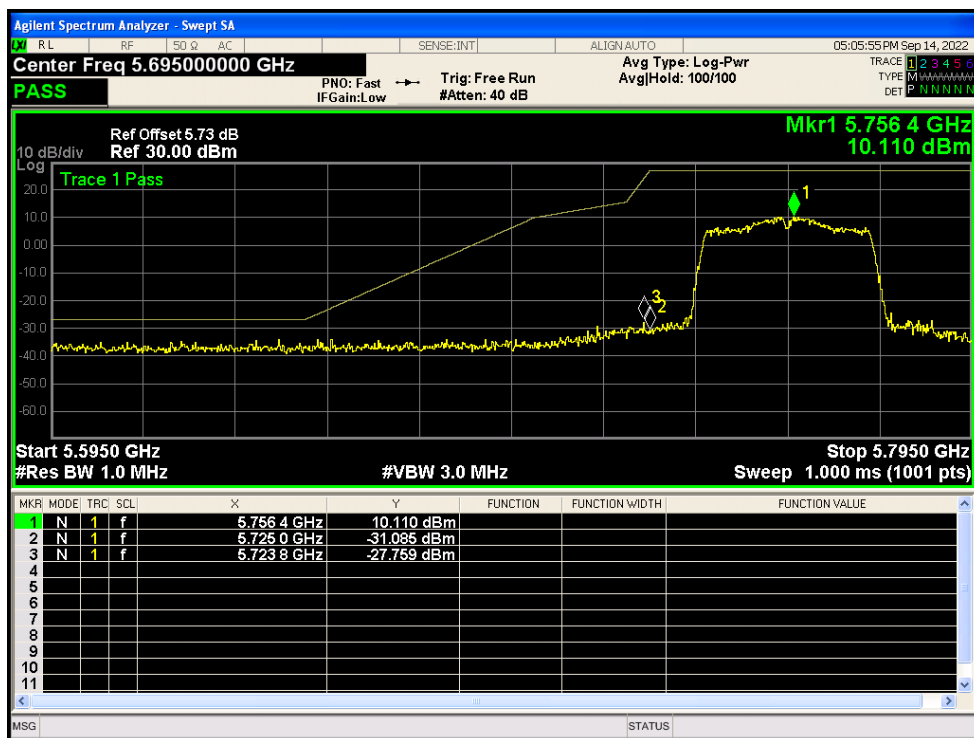


Band Edge NVNT ac40 5795MHz High Ant1

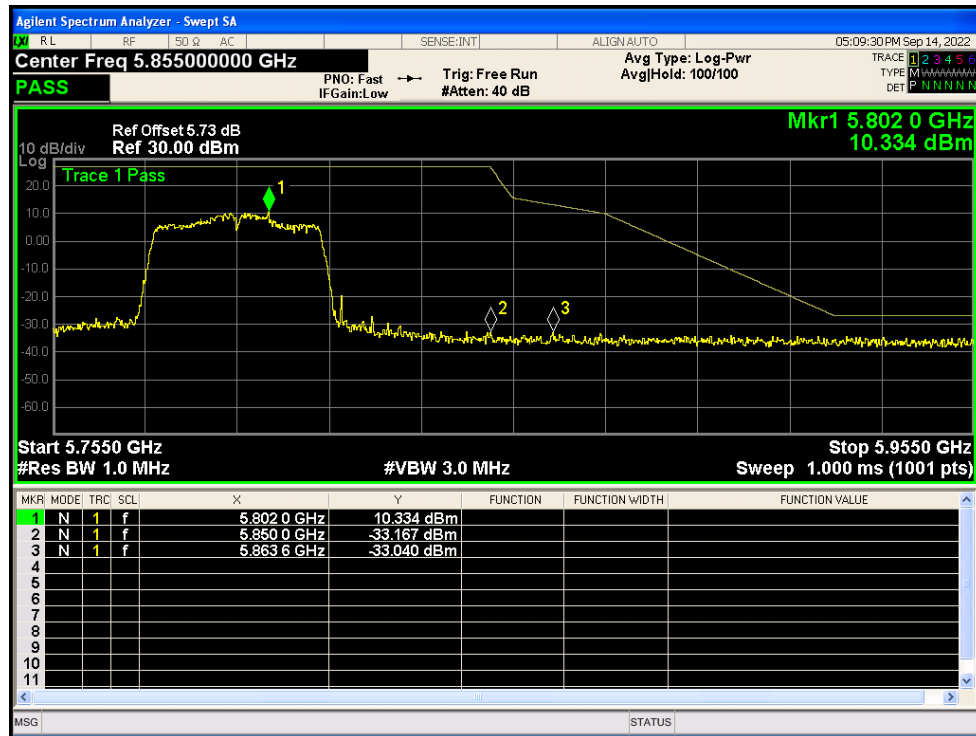


Band Edge NVNT ac80 5775MHz High Ant1

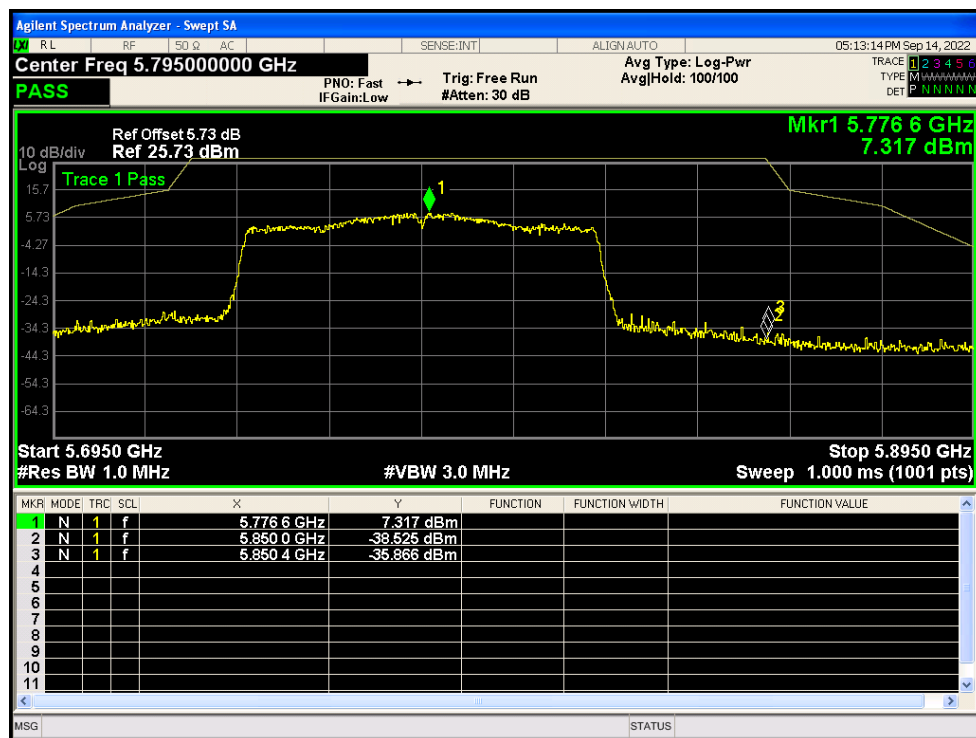


Band Edge NVNT n20 5745MHz Low Ant1

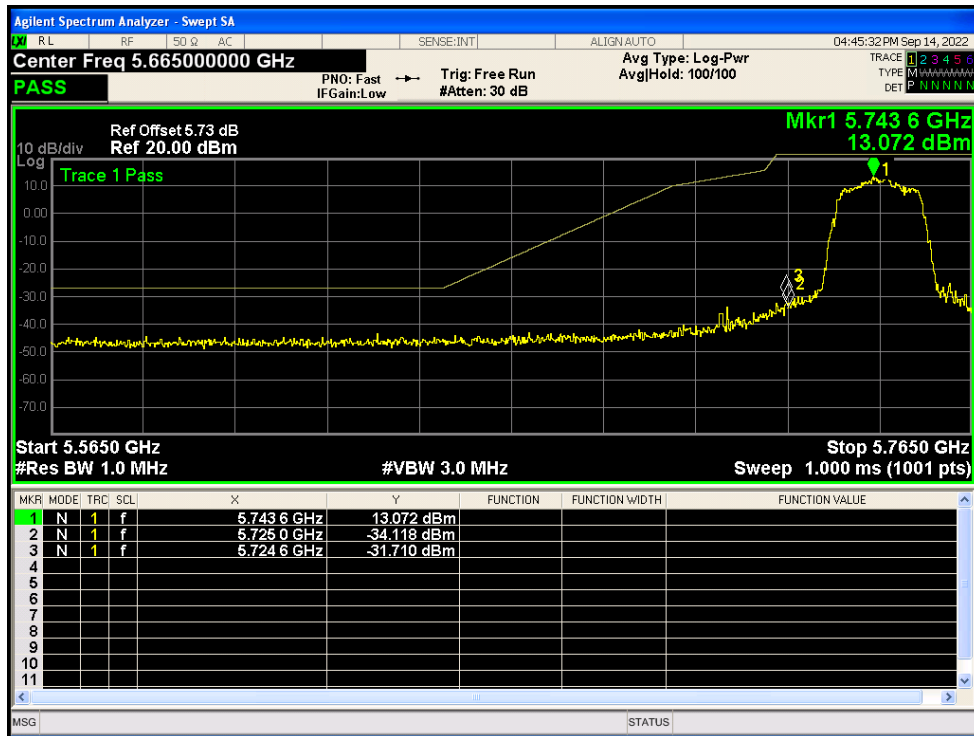

Band Edge NVNT n20 5825MHz High Ant1

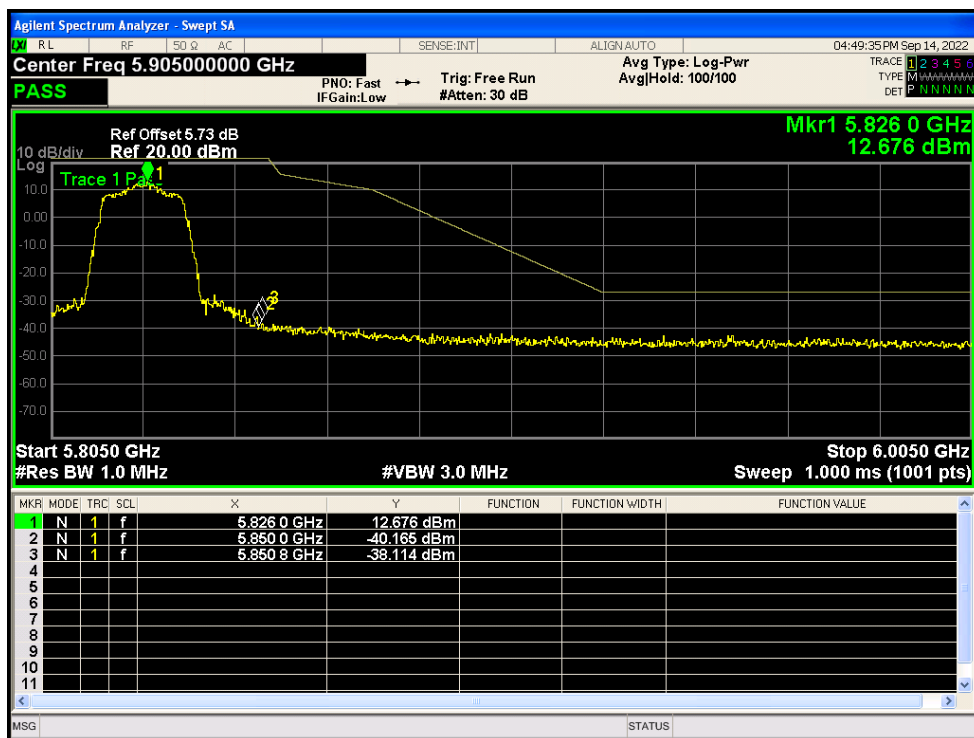

Band Edge NVNT n40 5755MHz Low Ant1

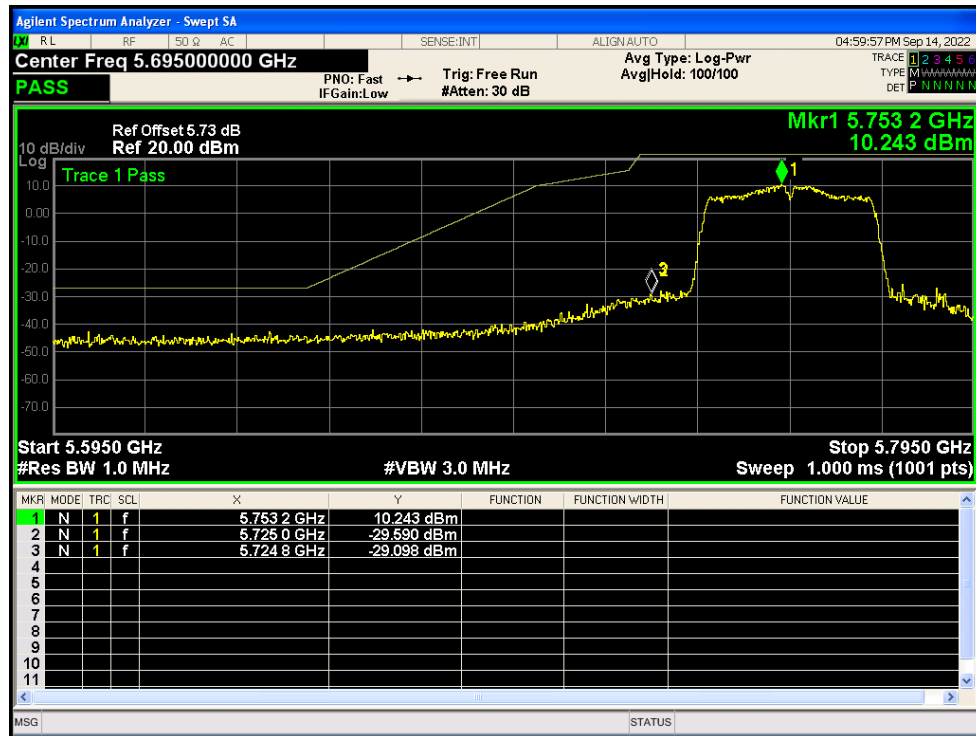


Band Edge NVNT n40 5795MHz High Ant1




Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5745	Ant1	-32.52	-27	Pass
NVNT	a	5785	Ant1	-32.43	-27	Pass
NVNT	a	5825	Ant1	-32.84	-27	Pass
NVNT	ac20	5745	Ant1	-32.42	-27	Pass
NVNT	ac20	5785	Ant1	-31.85	-27	Pass
NVNT	ac20	5825	Ant1	-32.12	-27	Pass
NVNT	ac40	5755	Ant1	-31.65	-27	Pass
NVNT	ac40	5795	Ant1	-32	-27	Pass
NVNT	ac80	5775	Ant1	-32.48	-27	Pass
NVNT	n20	5745	Ant1	-31.89	-27	Pass
NVNT	n20	5785	Ant1	-32.29	-27	Pass
NVNT	n20	5825	Ant1	-32.83	-27	Pass
NVNT	n40	5755	Ant1	-32.63	-27	Pass
NVNT	n40	5795	Ant1	-32.27	-27	Pass


Tx. Spurious NVNT a 5745MHz Ant1 Emission

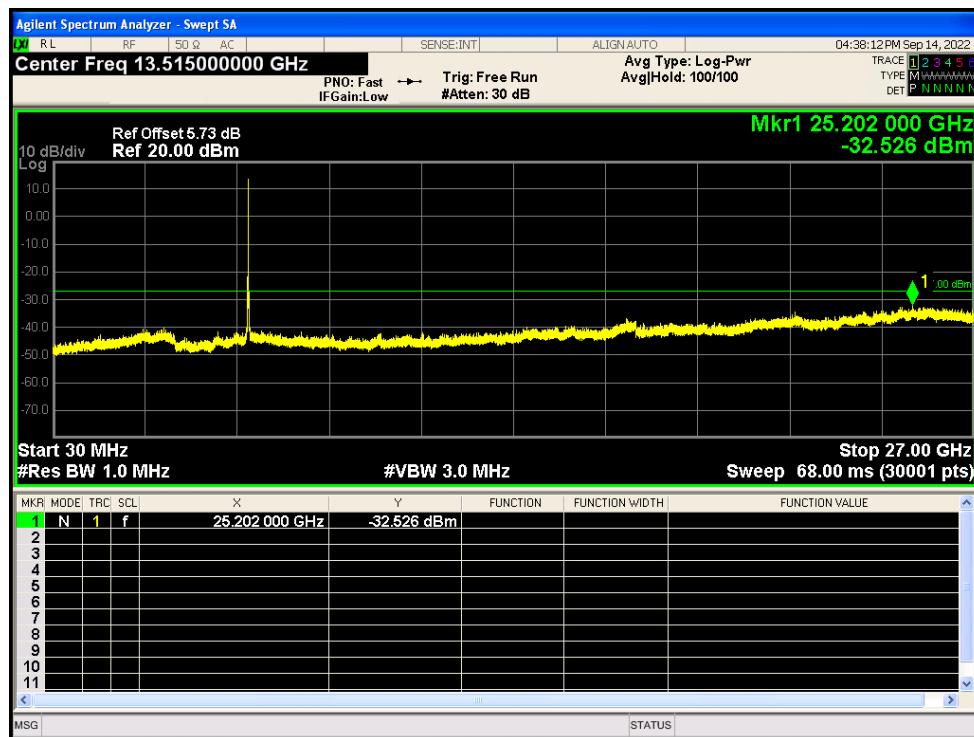


Tx. Spurious NVNT a 5785MHz Ant1 Emission

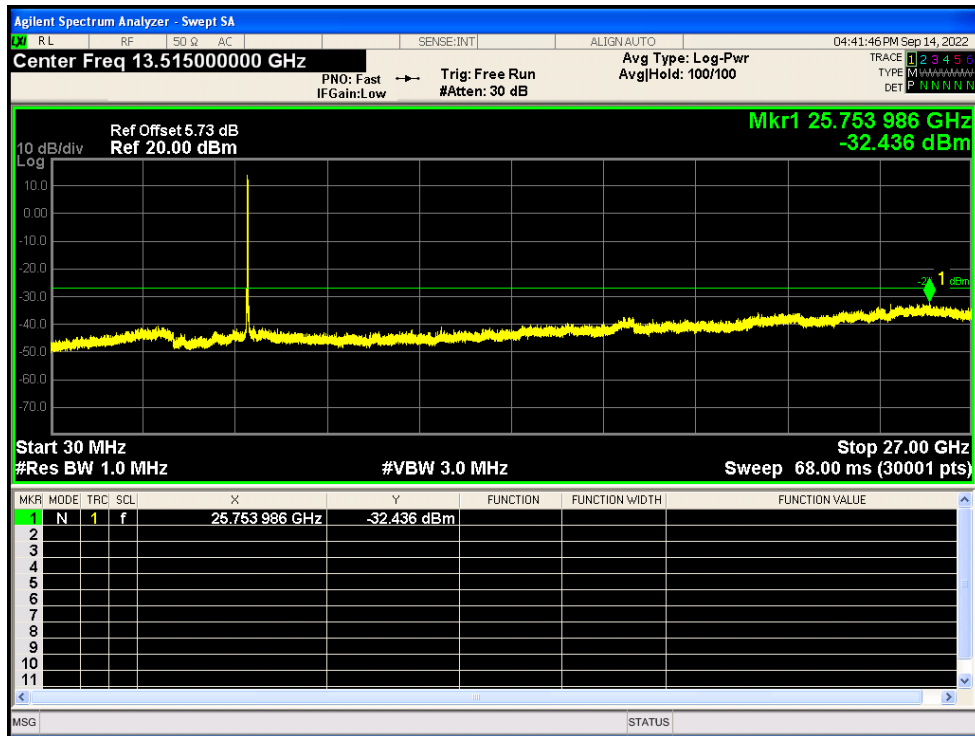


Tx. Spurious NVNT a 5825MHz Ant1 Emission

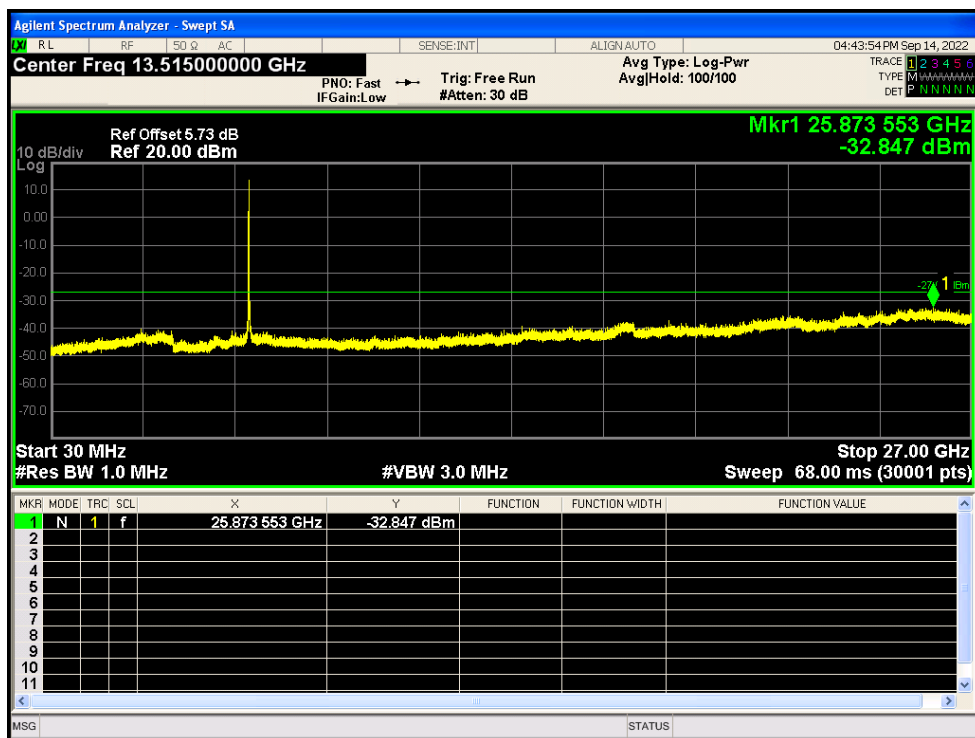


Tx. Spurious NVNT ac20 5745MHz Ant1 Emission

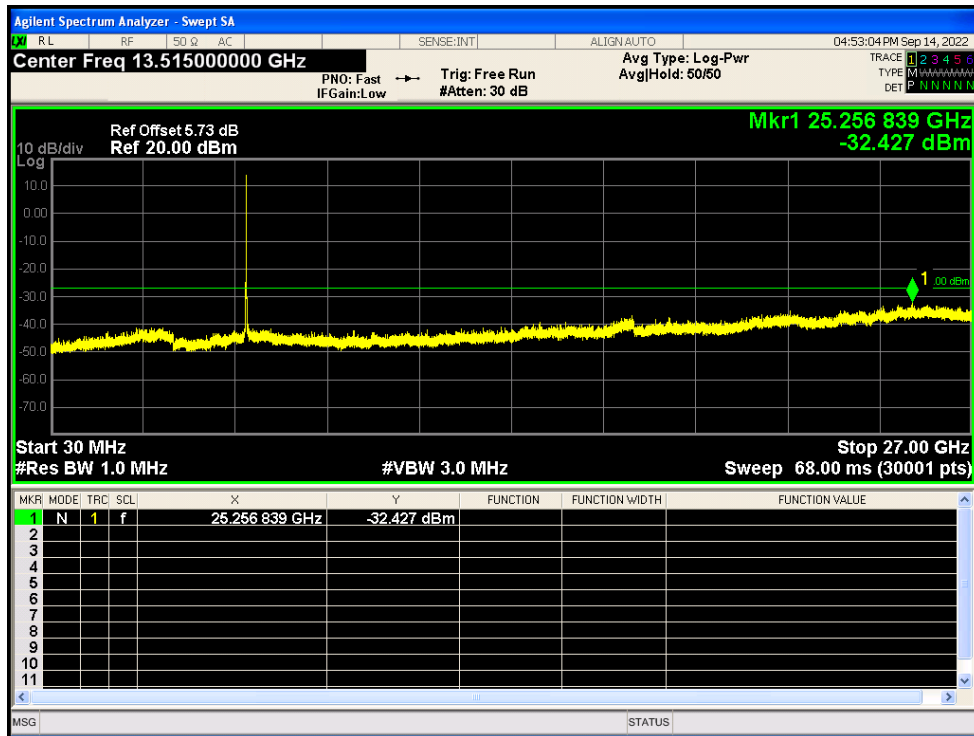


Tx. Spurious NVNT ac20 5785MHz Ant1 Emission

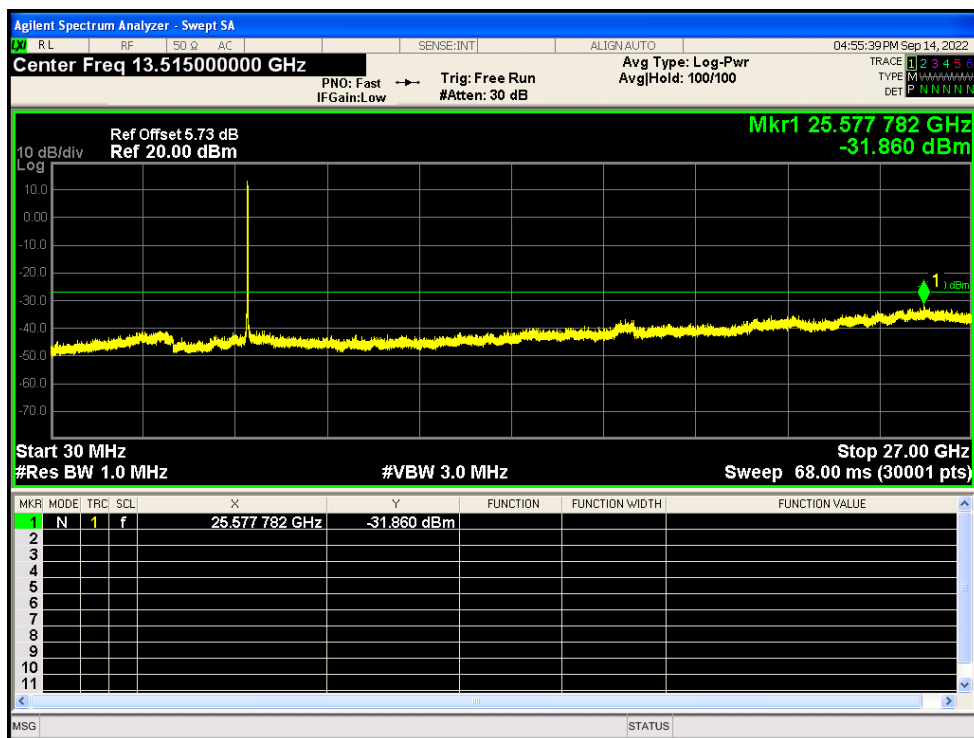


Tx. Spurious NVNT ac20 5825MHz Ant1 Emission

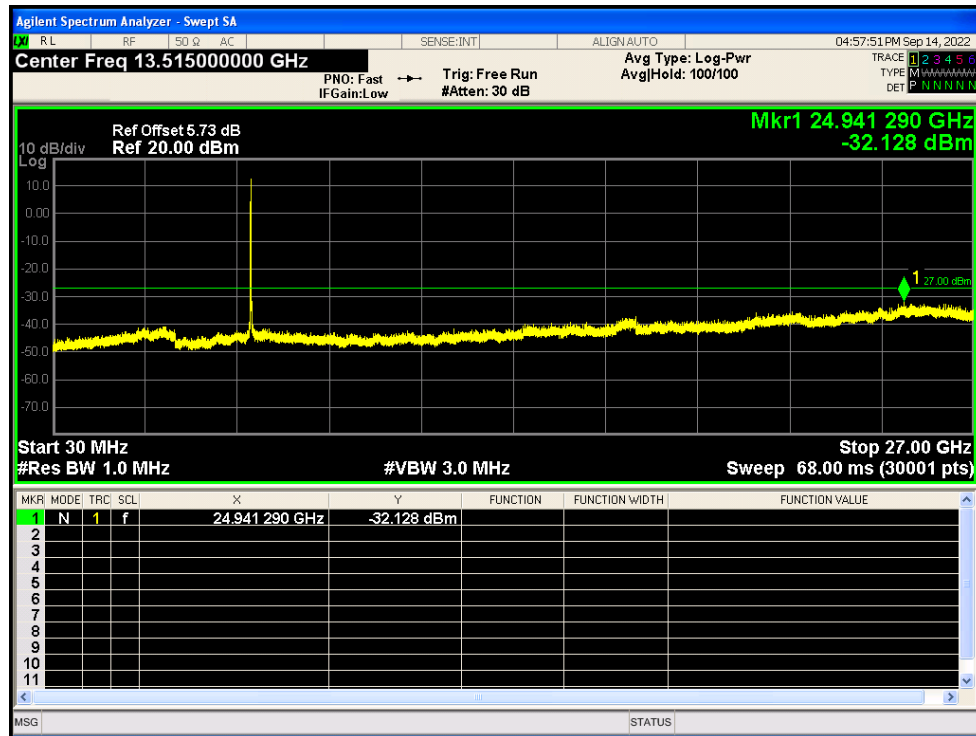


Tx. Spurious NVNT ac40 5755MHz Ant1 Emission

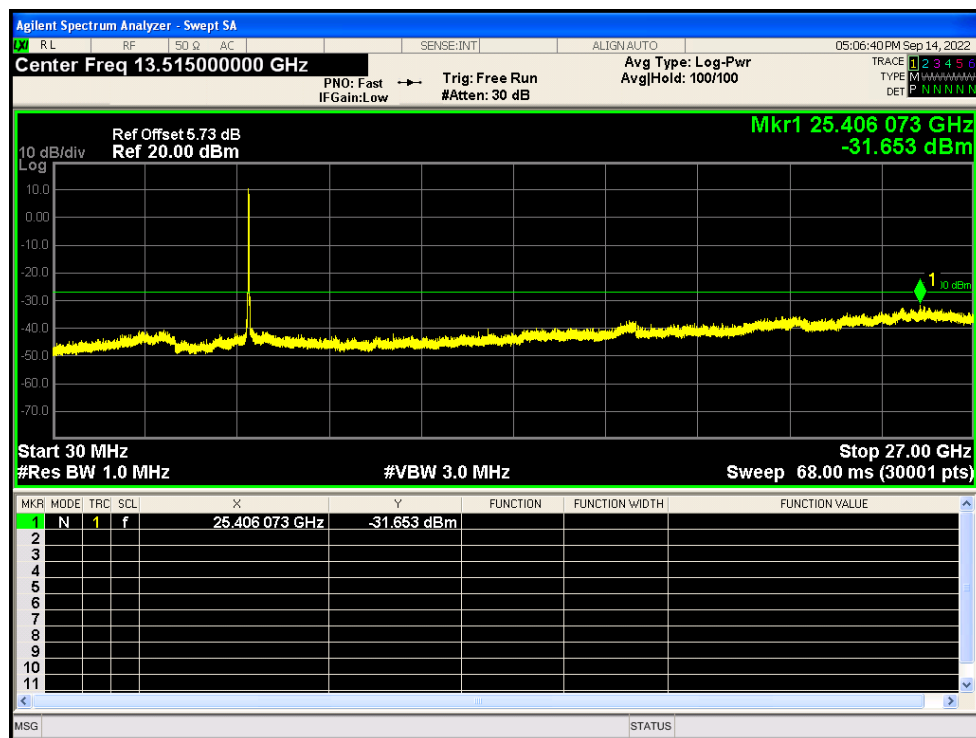


Tx. Spurious NVNT ac40 5795MHz Ant1 Emission

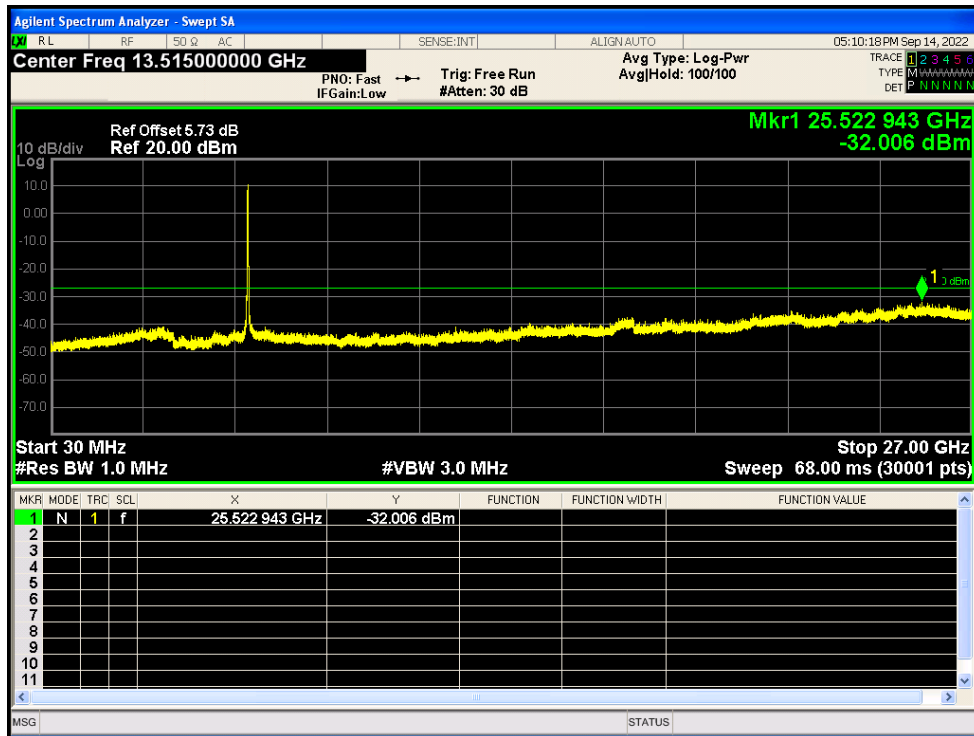


Tx. Spurious NVNT ac80 5775MHz Ant1 Emission

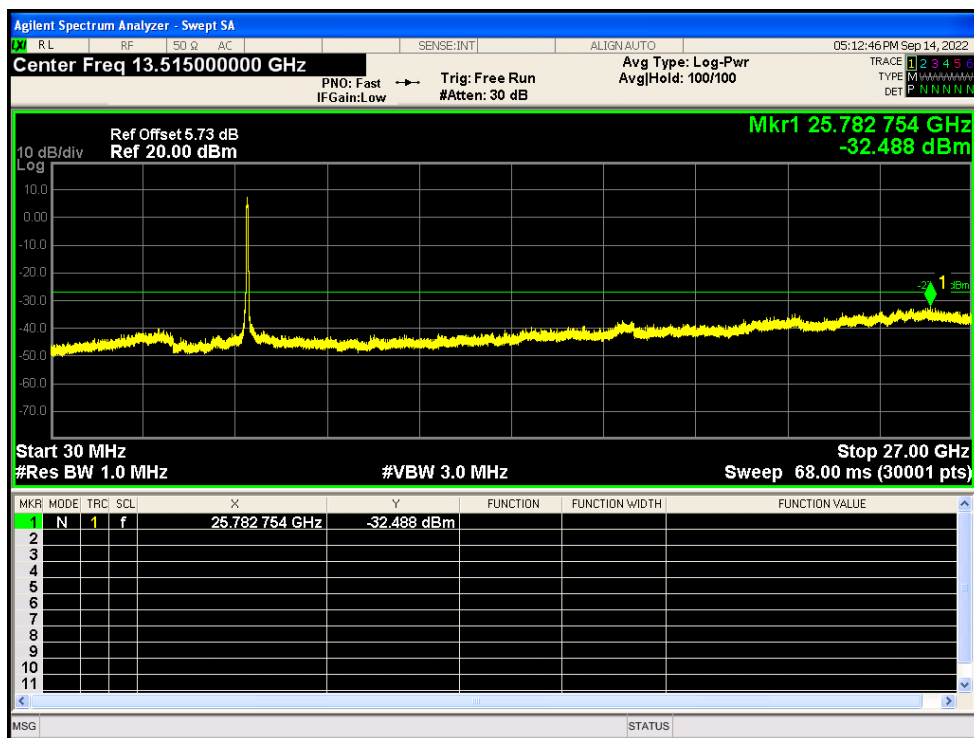


Tx. Spurious NVNT n20 5745MHz Ant1 Emission

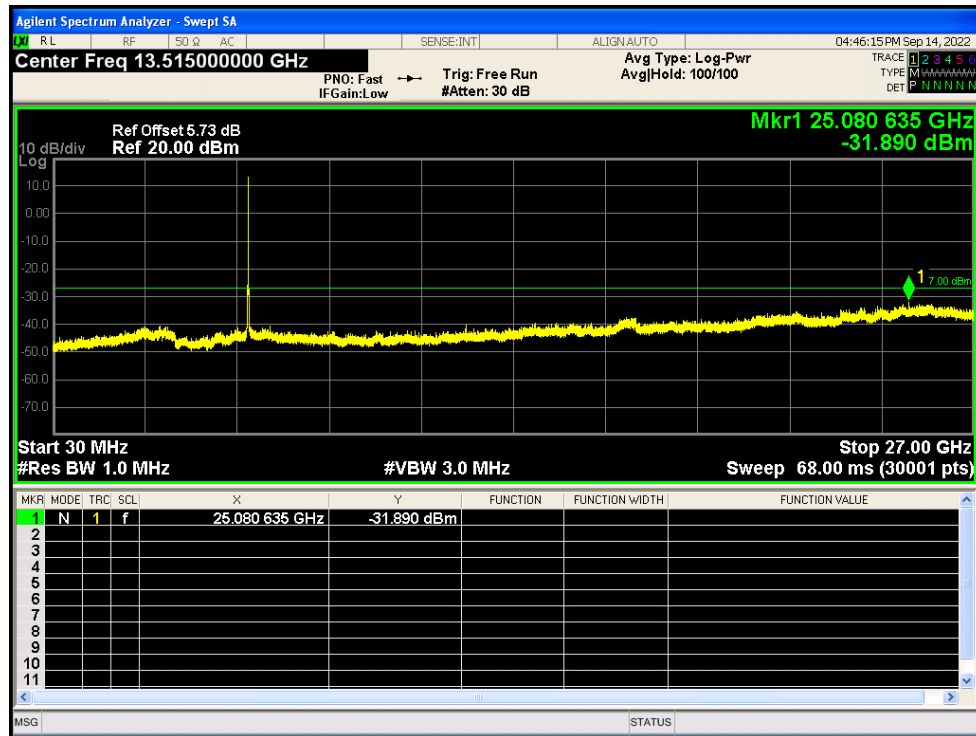


Tx. Spurious NVNT n20 5785MHz Ant1 Emission

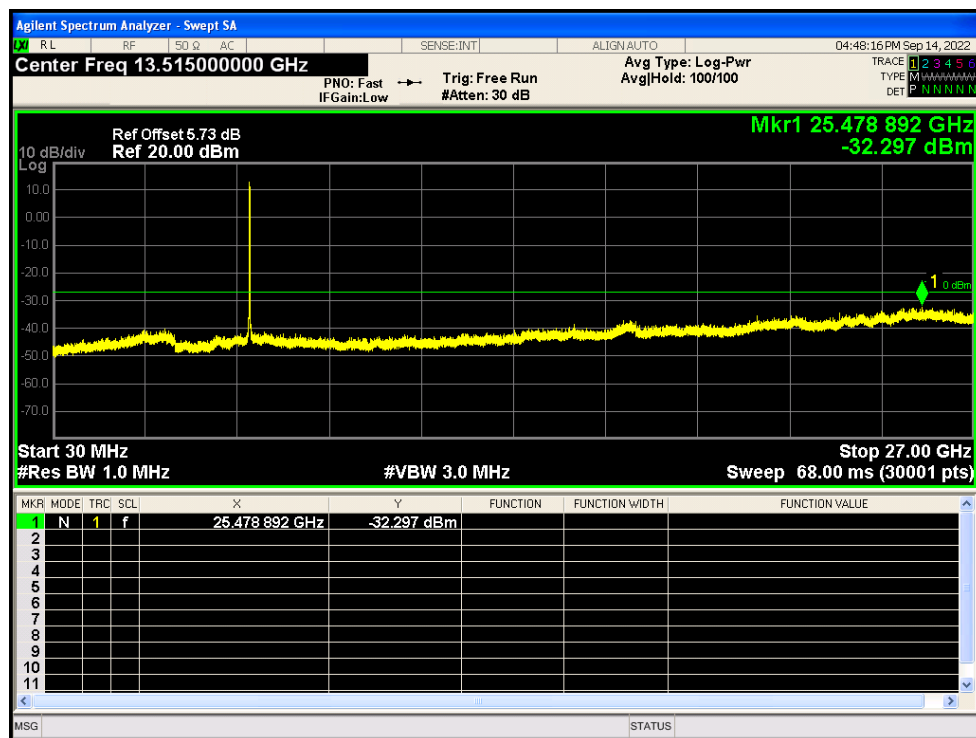

Tx. Spurious NVNT n20 5825MHz Ant1 Emission

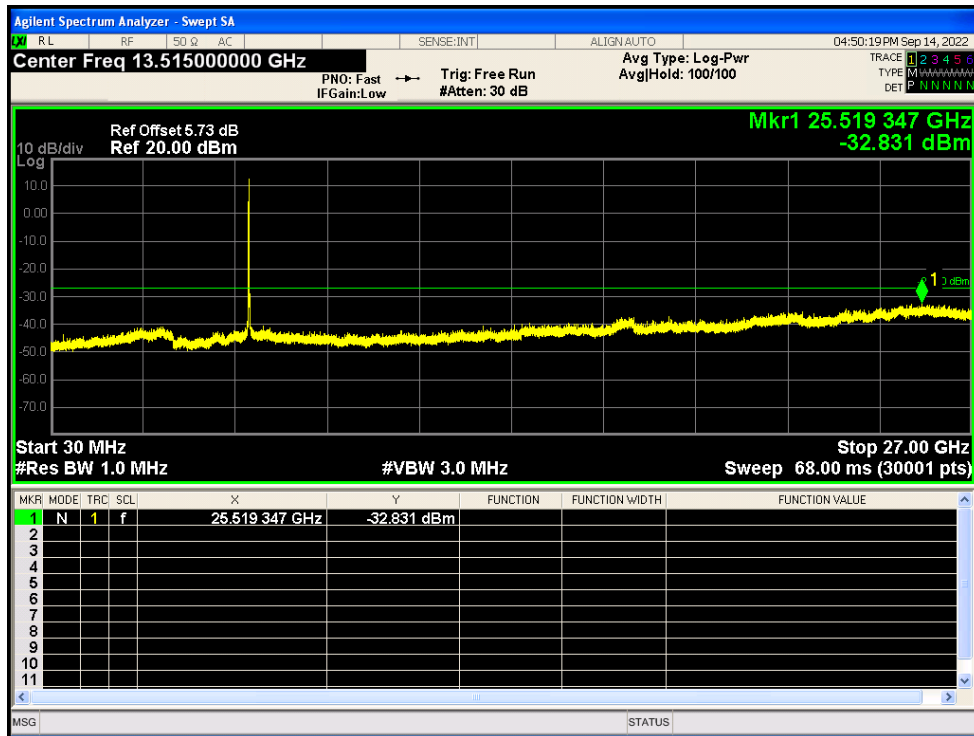

Tx. Spurious NVNT n40 5755MHz Ant1 Emission

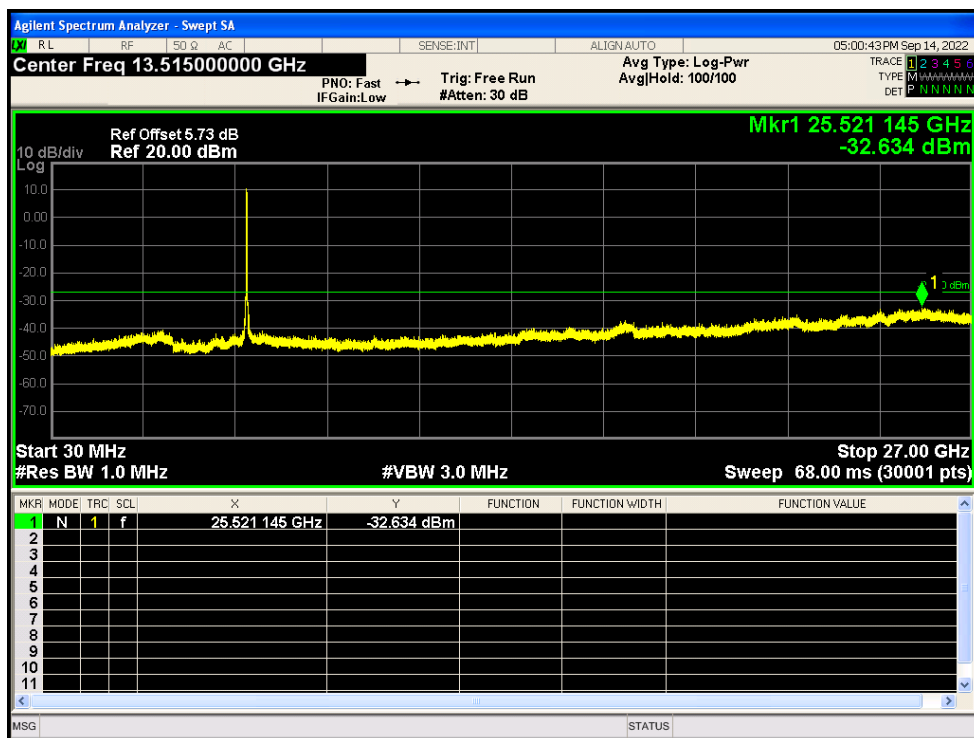

Tx. Spurious NVNT n40 5795MHz Ant1 Emission

