

RF Test Data for Bluetooth LE

(Conducted Measurements)


General Description of EUT	
Product Name:	tablet computer
Test Model:	AYANEO NEXT Pro, AYANEO NEXT
Sample ID:	RW-C-202204-0125-1-2#
Environmental Conditions	
Temperature:	23.8℃
Relative Humidity:	48%
Test Voltage:	DC 11.55V
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TBR-C-202204-0125-111. All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name (AYANEO NEXT Pro for test only).	

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	63.19	1.99	2.56
NVNT	BLE 1Mbps	2440	Ant1	63.2	1.99	2.63
NVNT	BLE 1Mbps	2480	Ant1	63.04	2	2.63
NVNT	BLE 2Mbps	2402	Ant1	57.59	2.4	0.93
NVNT	BLE 2Mbps	2440	Ant1	57.71	2.39	0.93
NVNT	BLE 2Mbps	2480	Ant1	57.85	2.38	0.93

Test Graphs


Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

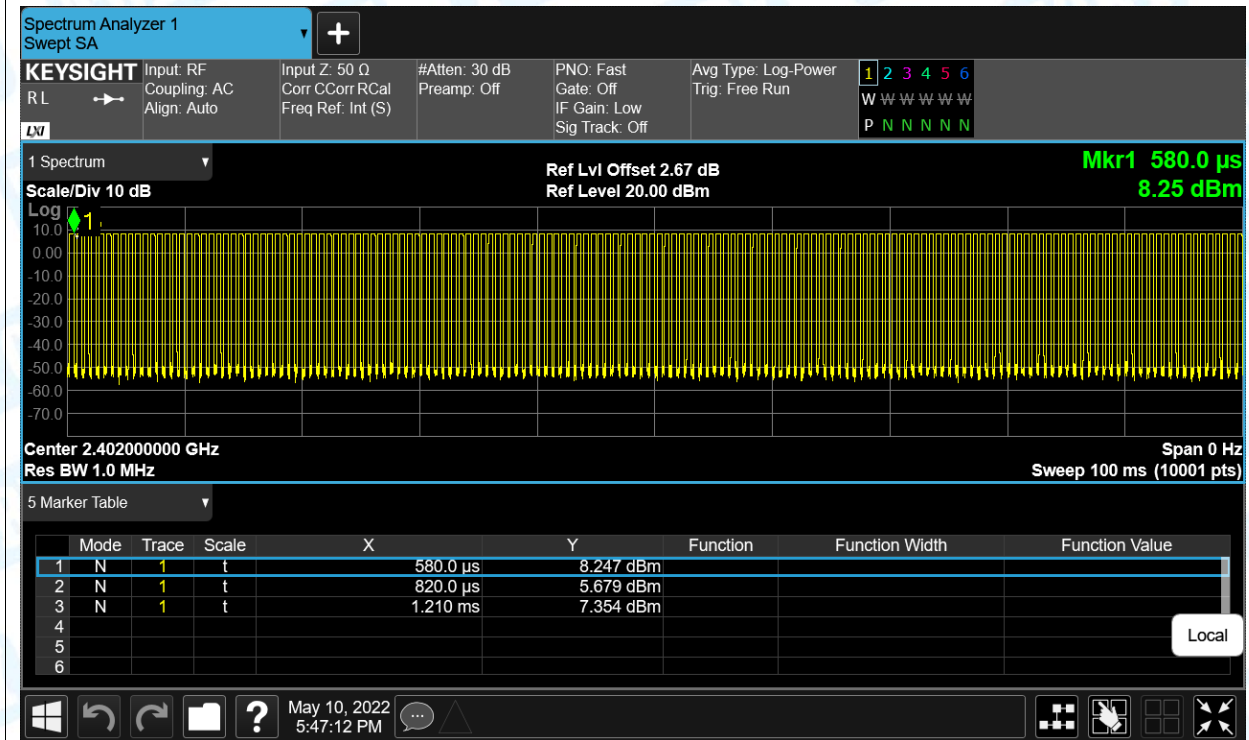


Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

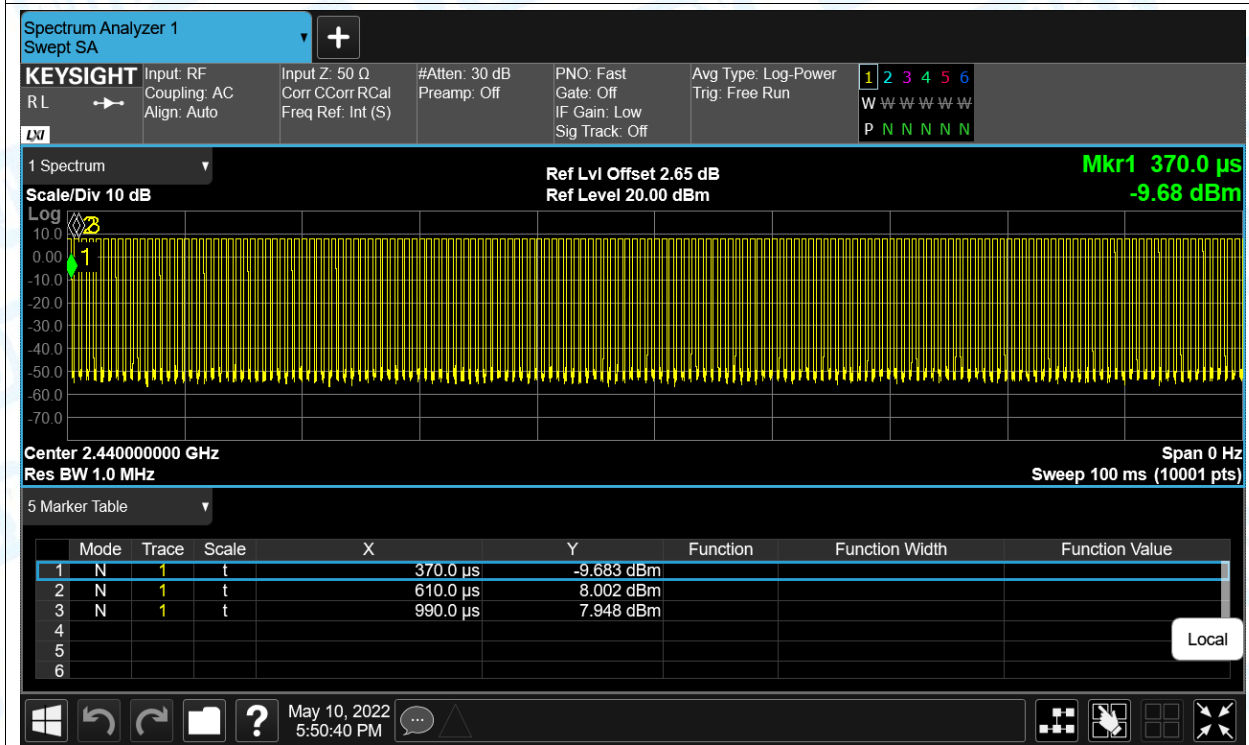


Duty Cycle NVNT BLE 1Mbps 2480MHz Ant1

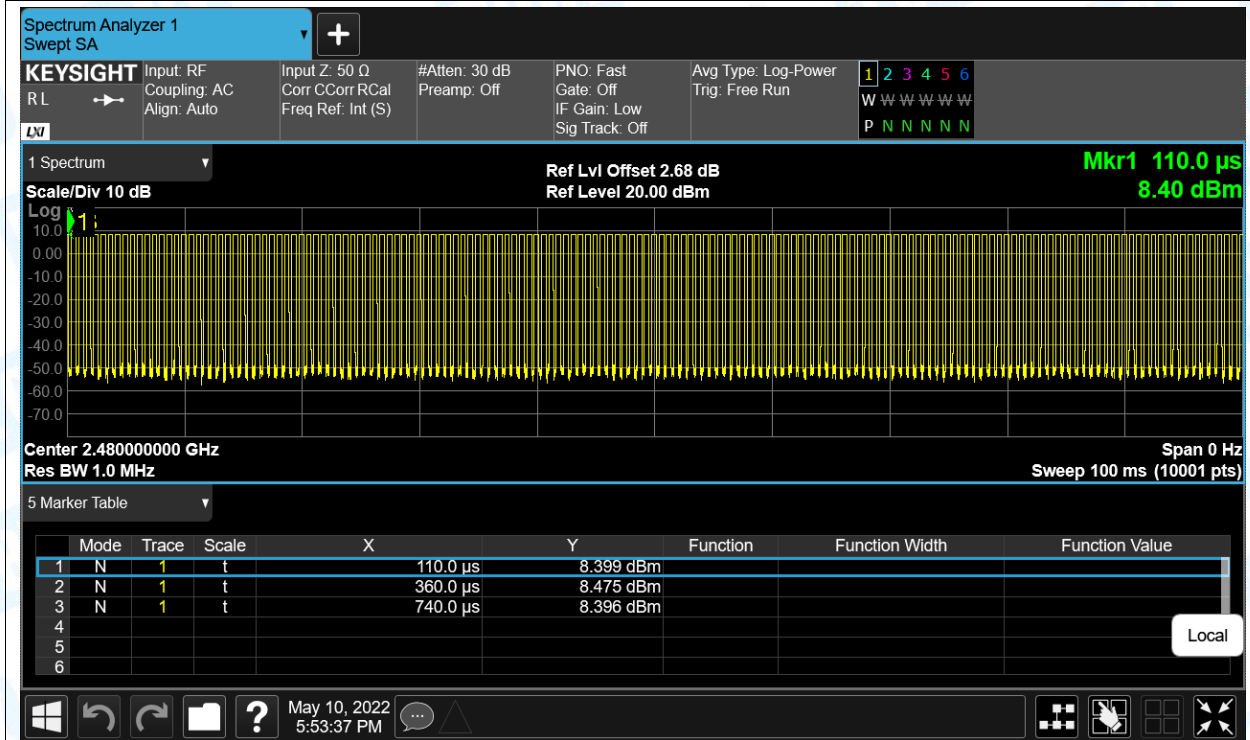


Duty Cycle NVNT BLE 2Mbps 2402MHz Ant1

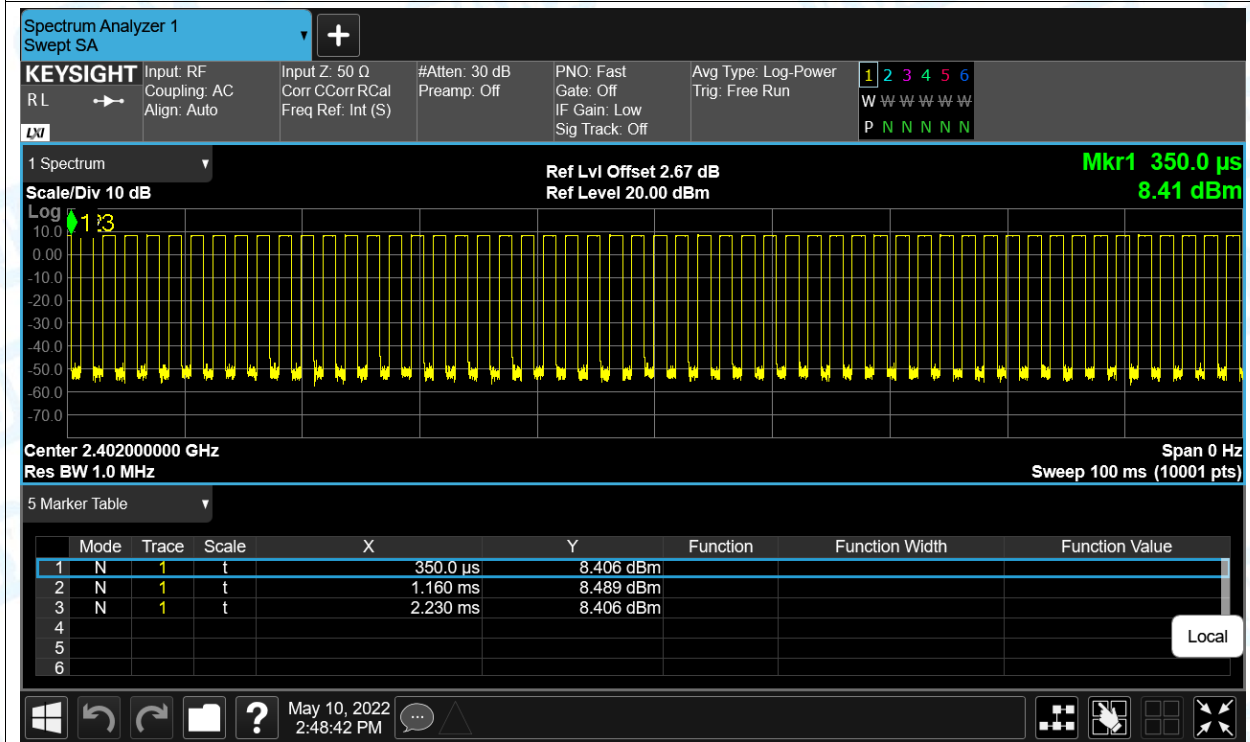

Duty Cycle NVNT BLE 2Mbps 2440MHz Ant1

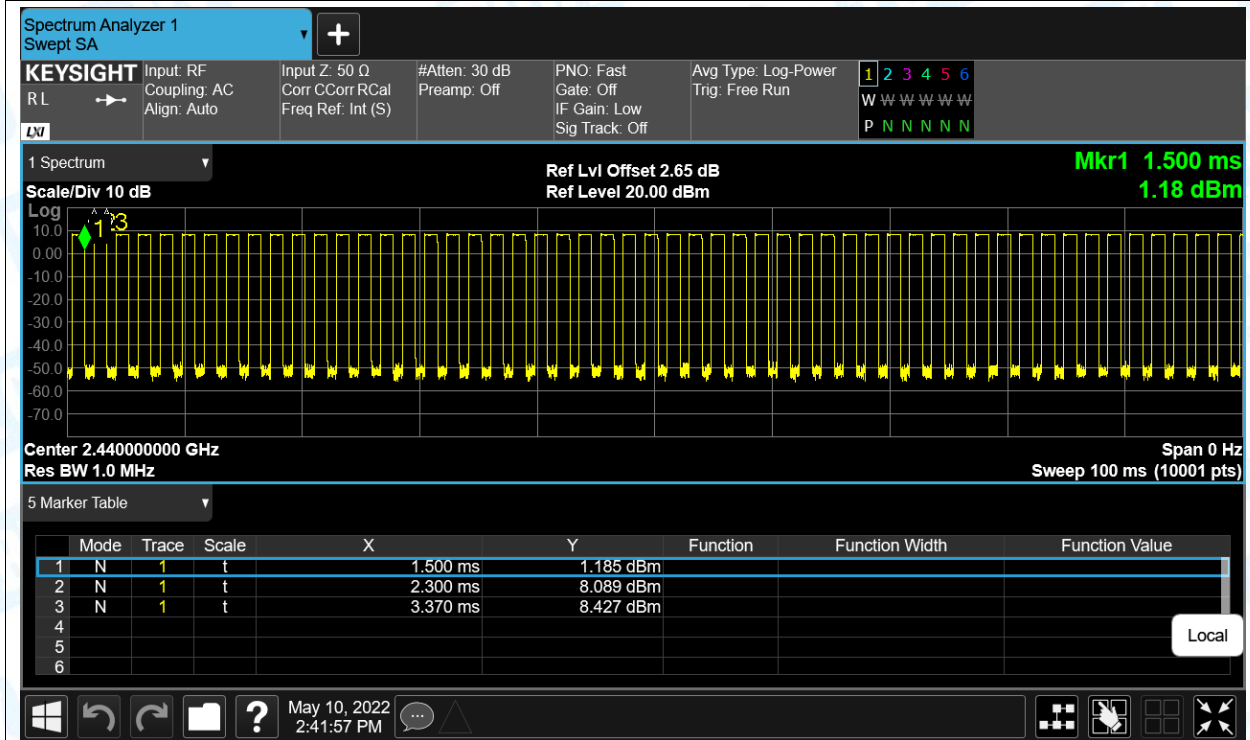




Duty Cycle NVNT BLE 2Mbps 2480MHz Ant1

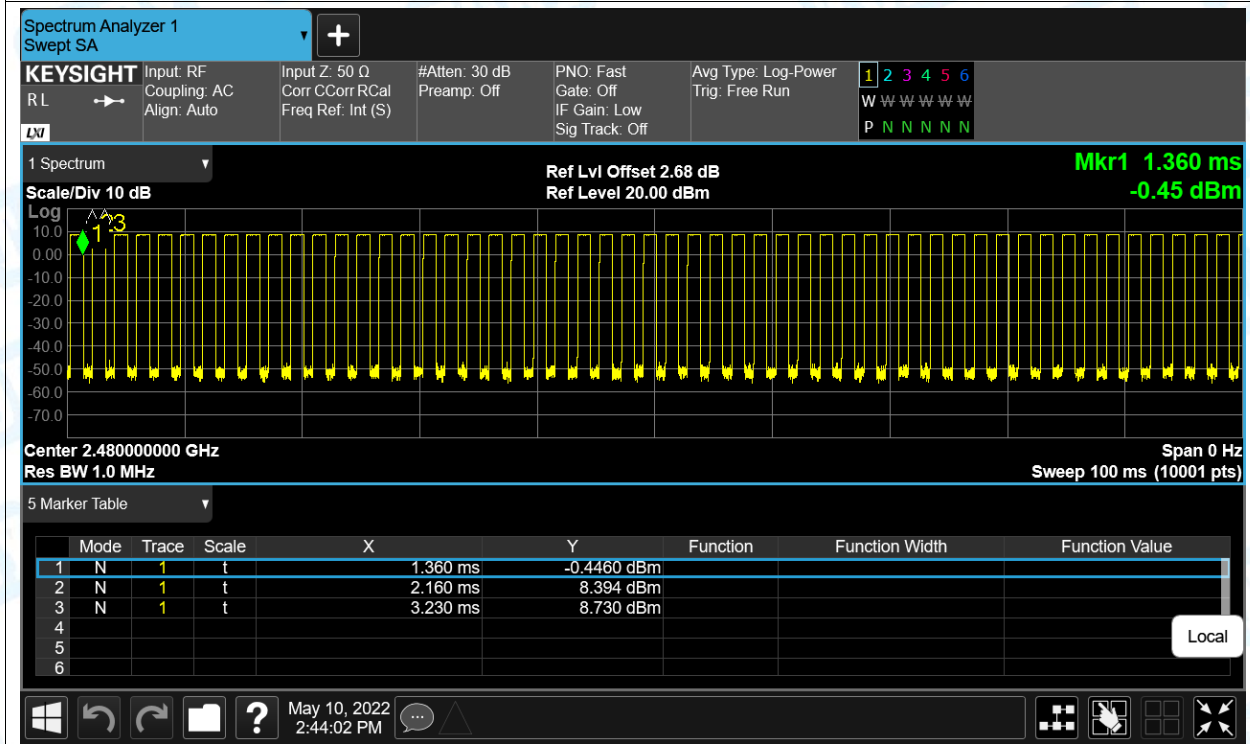


2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	8.51	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	8.16	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	8.64	30	Pass
NVNT	BLE 2Mbps	2402	Ant1	8.85	30	Pass
NVNT	BLE 2Mbps	2440	Ant1	8.89	30	Pass
NVNT	BLE 2Mbps	2480	Ant1	9.37	30	Pass

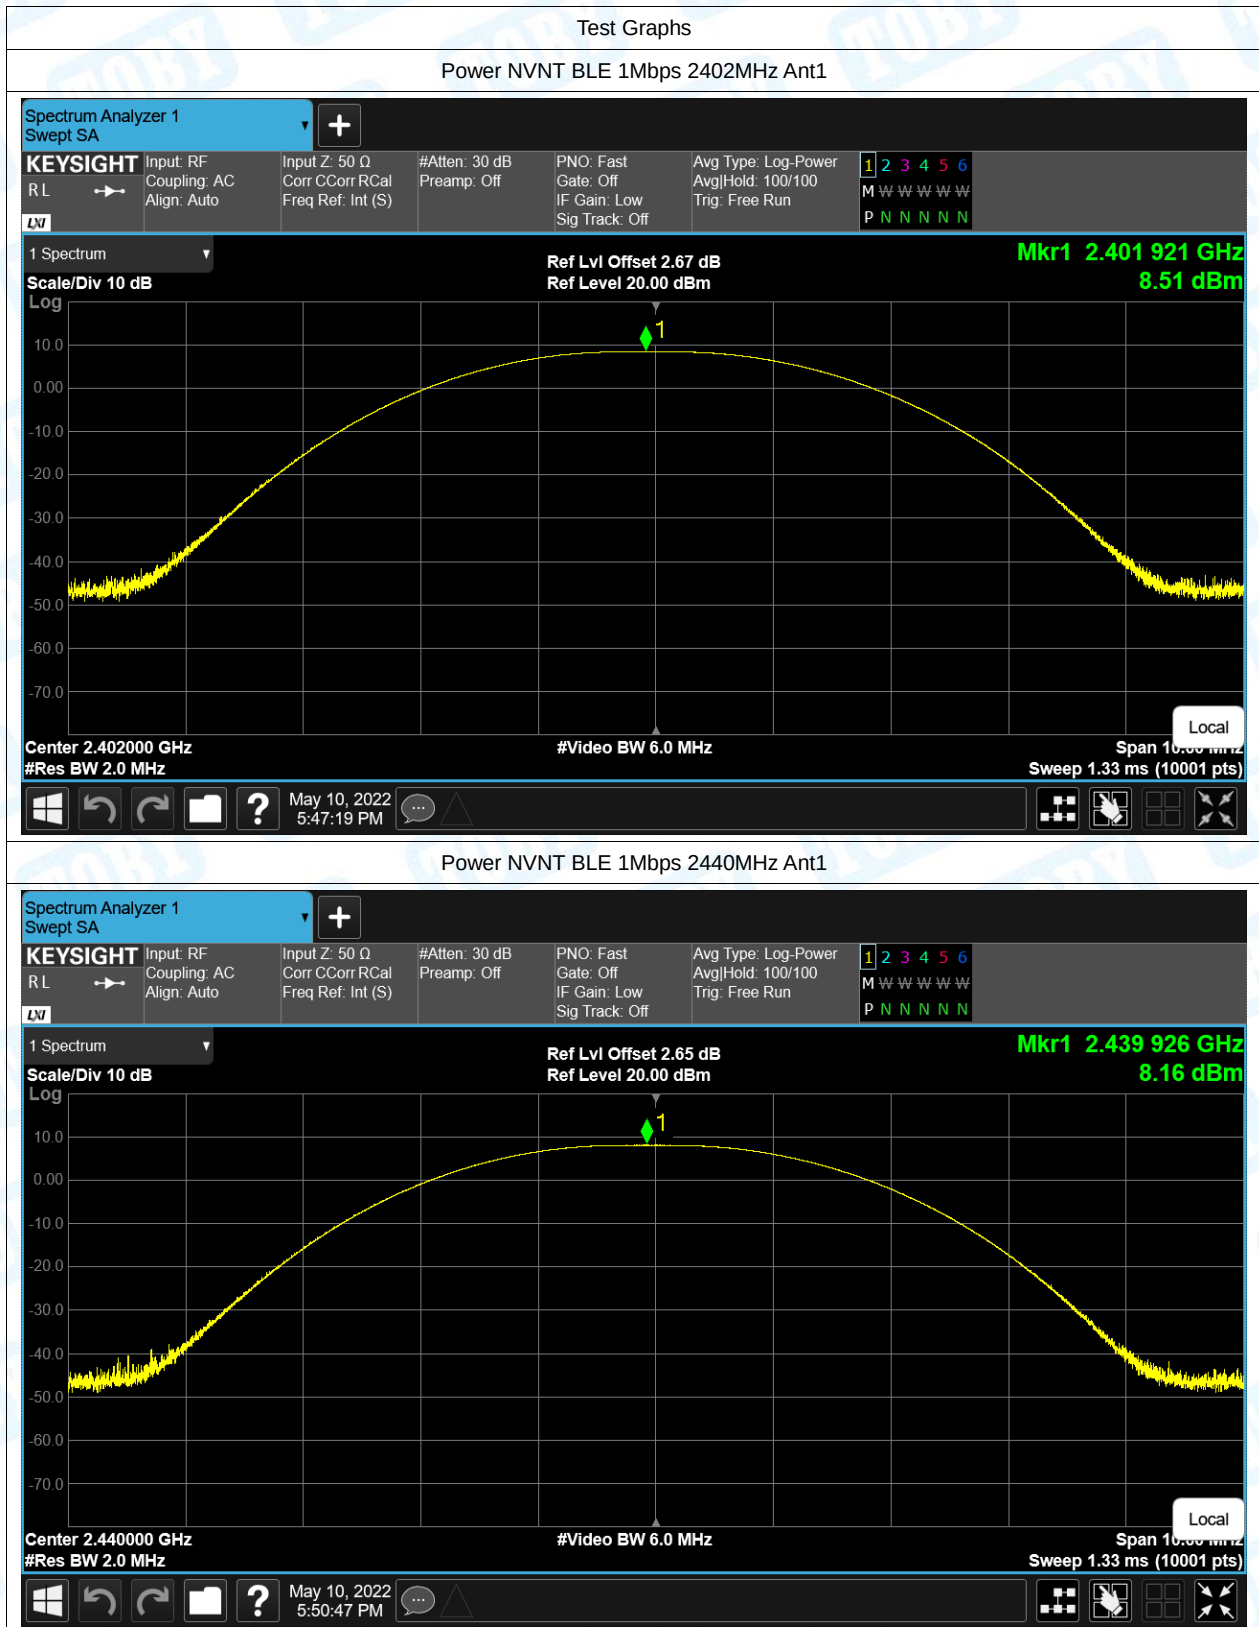


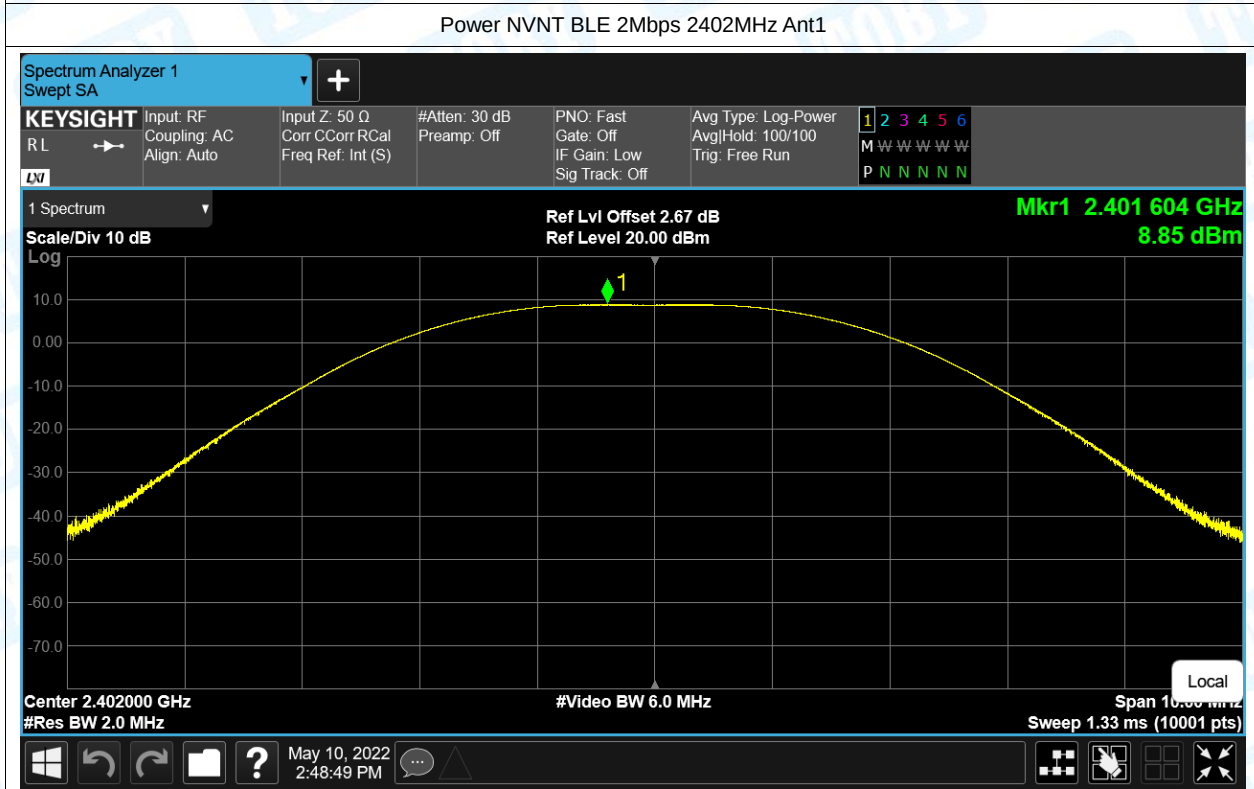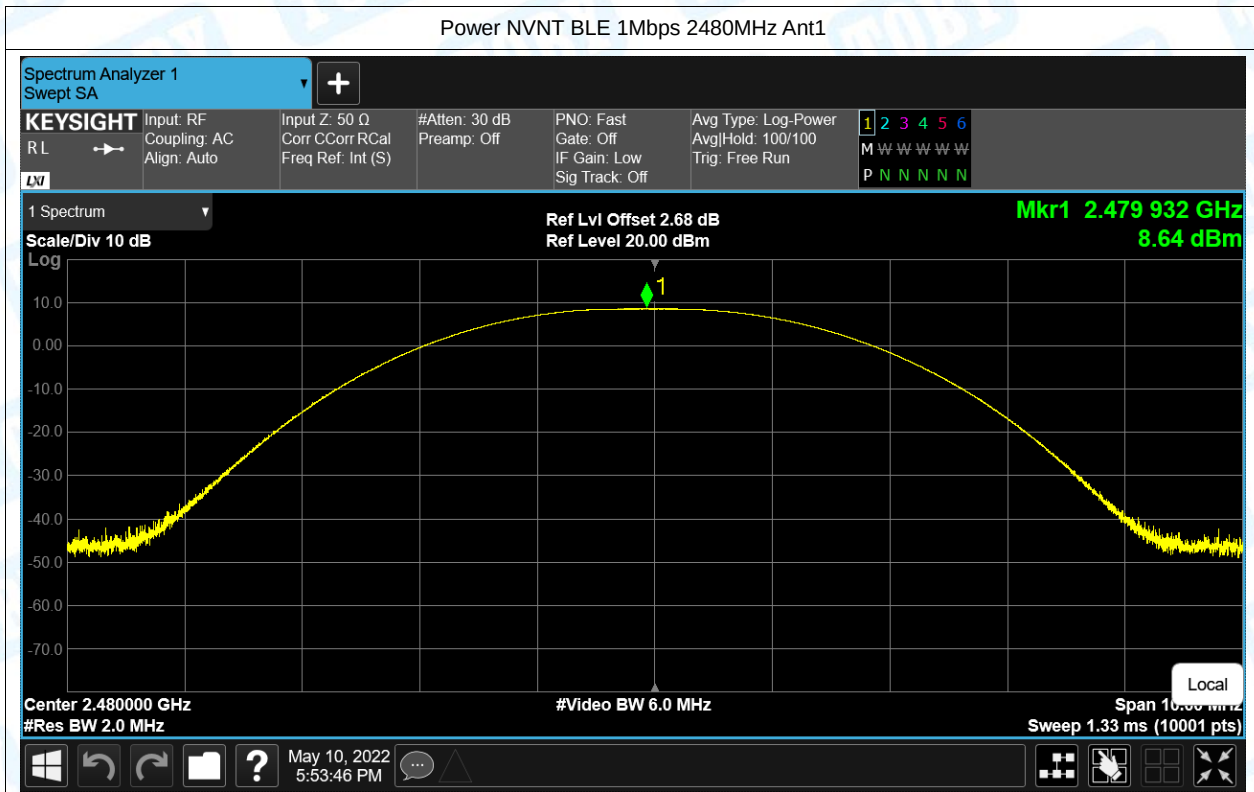

Power NVNT BLE 2Mbps 2440MHz Ant1

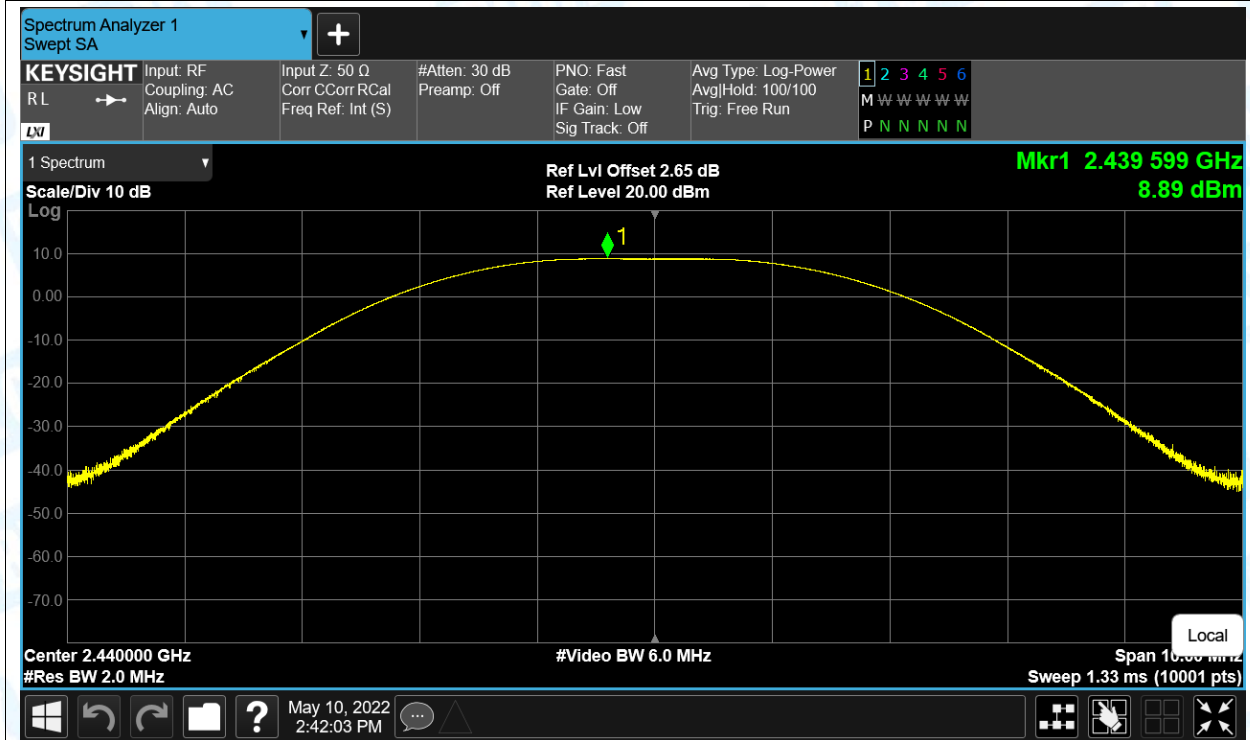

Power NVNT BLE 2Mbps 2480MHz Ant1

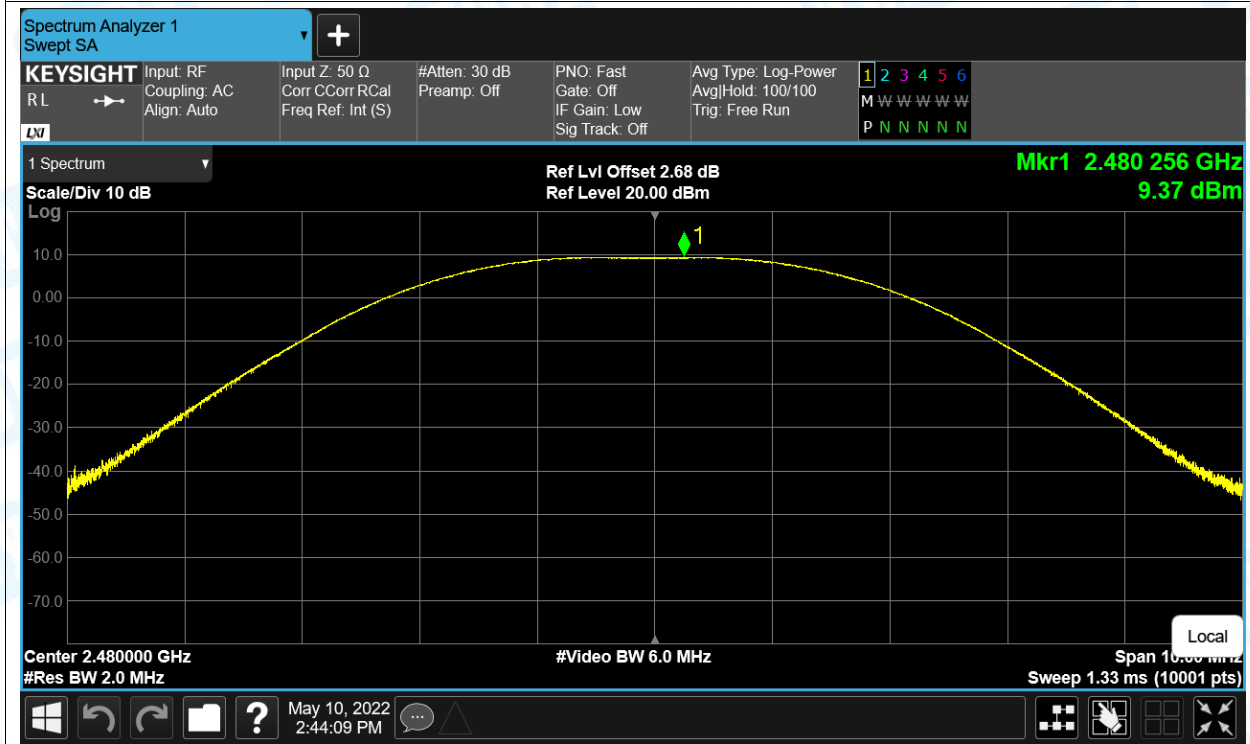


3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.7	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.69	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.7	0.5	Pass
NVNT	BLE 2Mbps	2402	Ant1	1.24	0.5	Pass
NVNT	BLE 2Mbps	2440	Ant1	1.22	0.5	Pass
NVNT	BLE 2Mbps	2480	Ant1	1.19	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

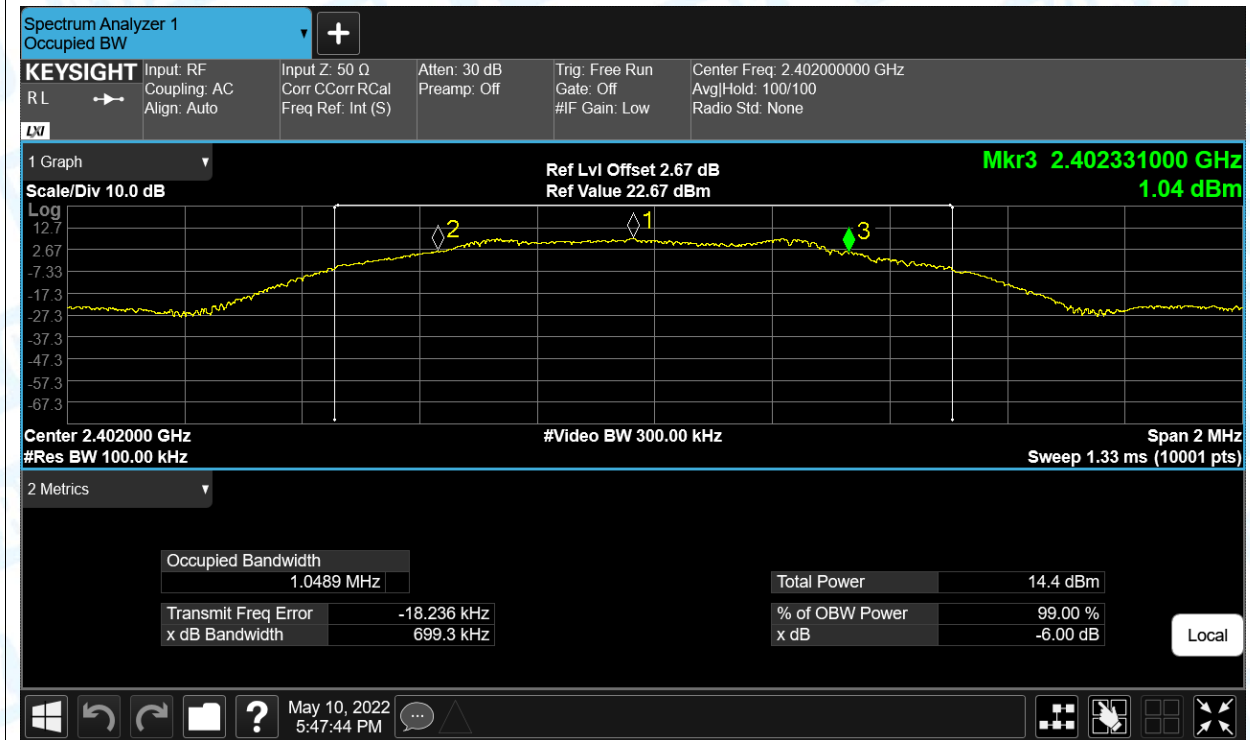


-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

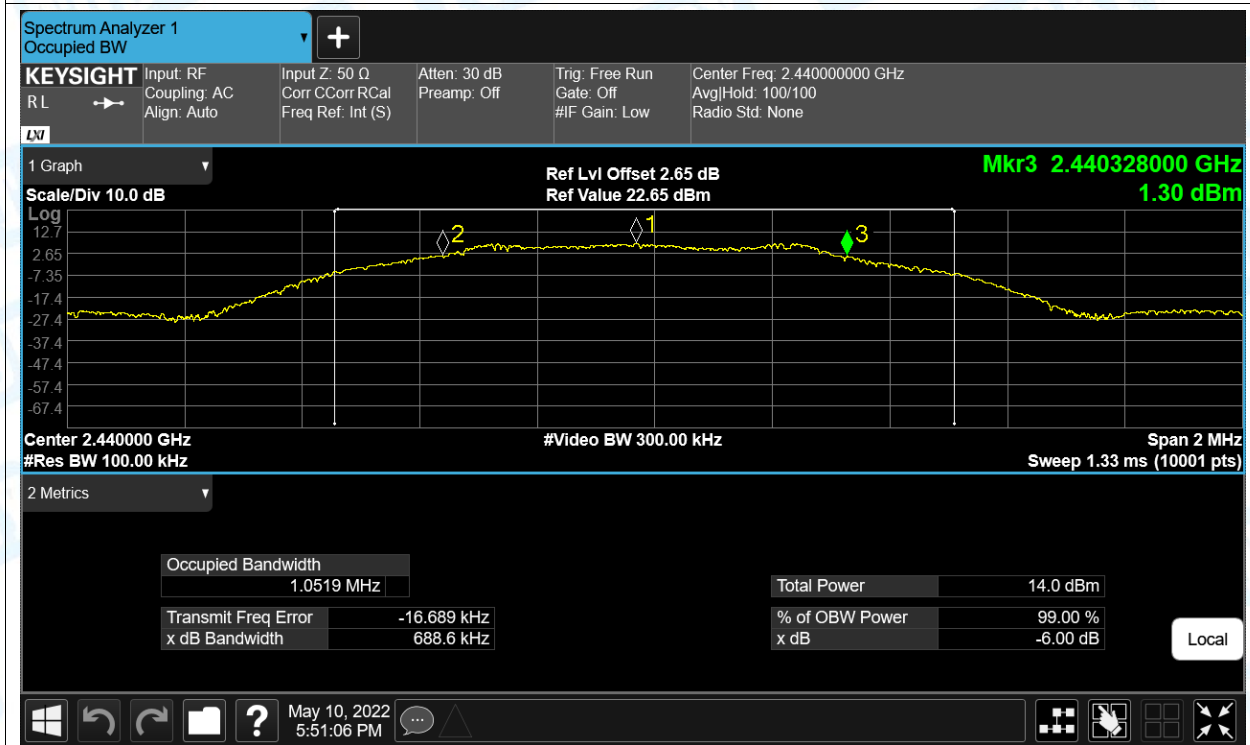


-6dB Bandwidth NVNT BLE 1Mbps 2480MHz Ant1

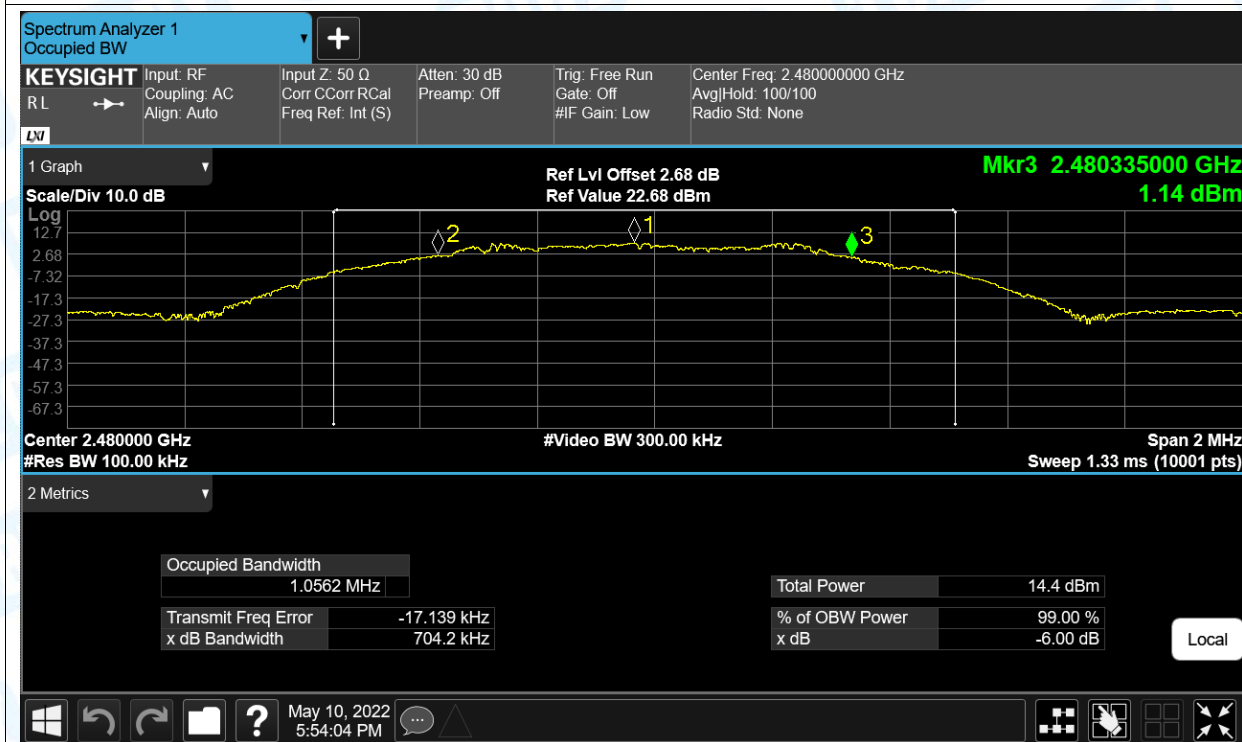


-6dB Bandwidth NVNT BLE 2Mbps 2402MHz Ant1

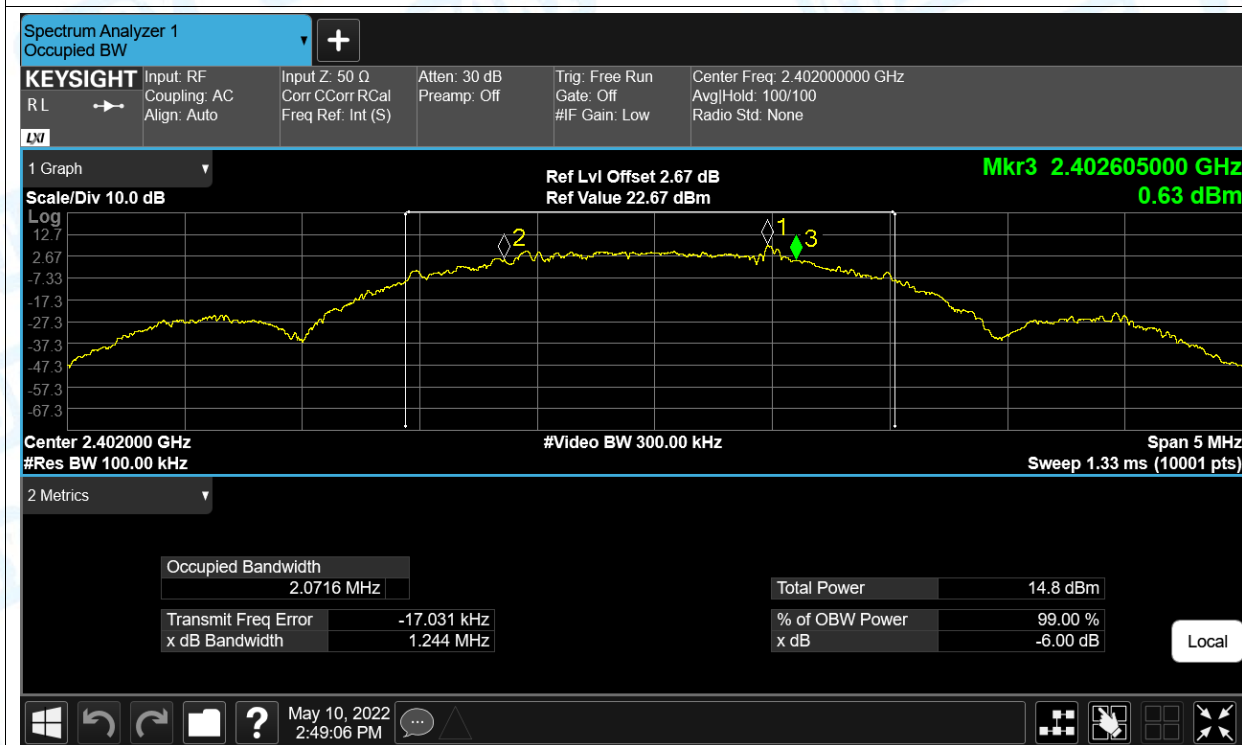

-6dB Bandwidth NVNT BLE 2Mbps 2440MHz Ant1

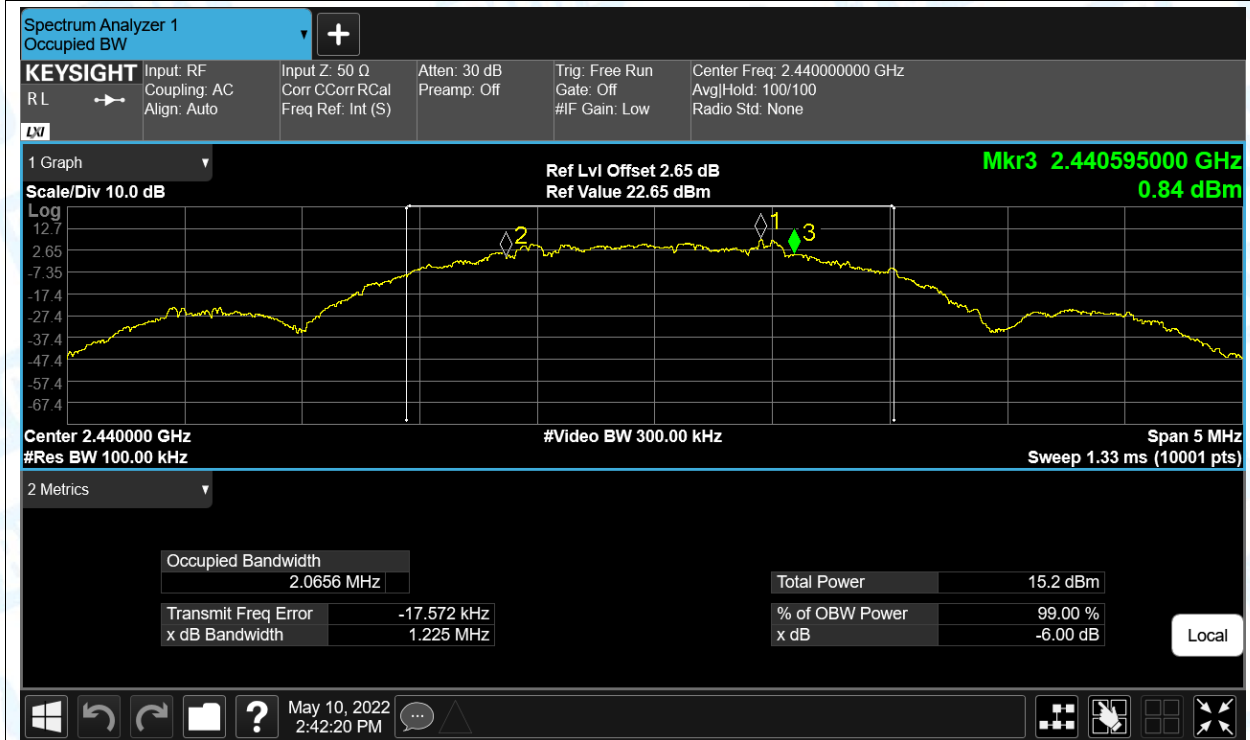

-6dB Bandwidth NVNT BLE 2Mbps 2480MHz Ant1

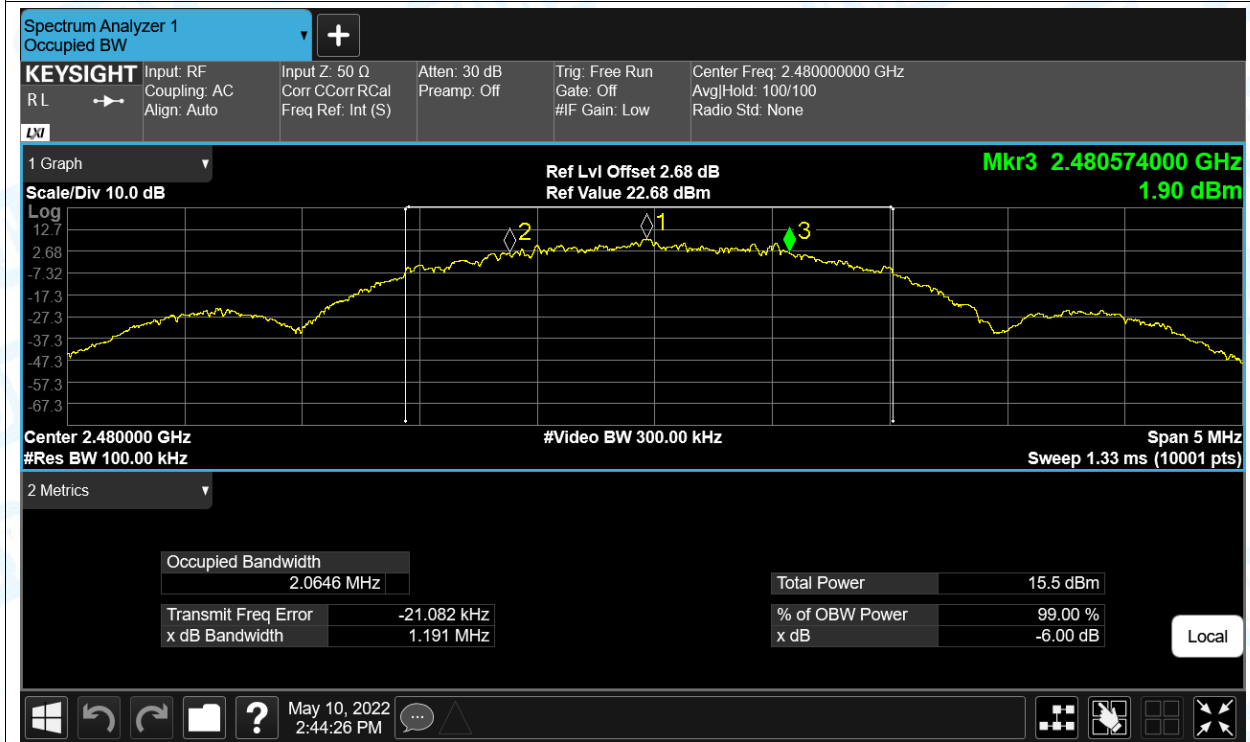


4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.042
NVNT	BLE 1Mbps	2440	Ant1	1.046
NVNT	BLE 1Mbps	2480	Ant1	1.043
NVNT	BLE 2Mbps	2402	Ant1	2.074
NVNT	BLE 2Mbps	2440	Ant1	2.074
NVNT	BLE 2Mbps	2480	Ant1	2.081

Test Graphs


OBW NVNT BLE 1Mbps 2402MHz Ant1

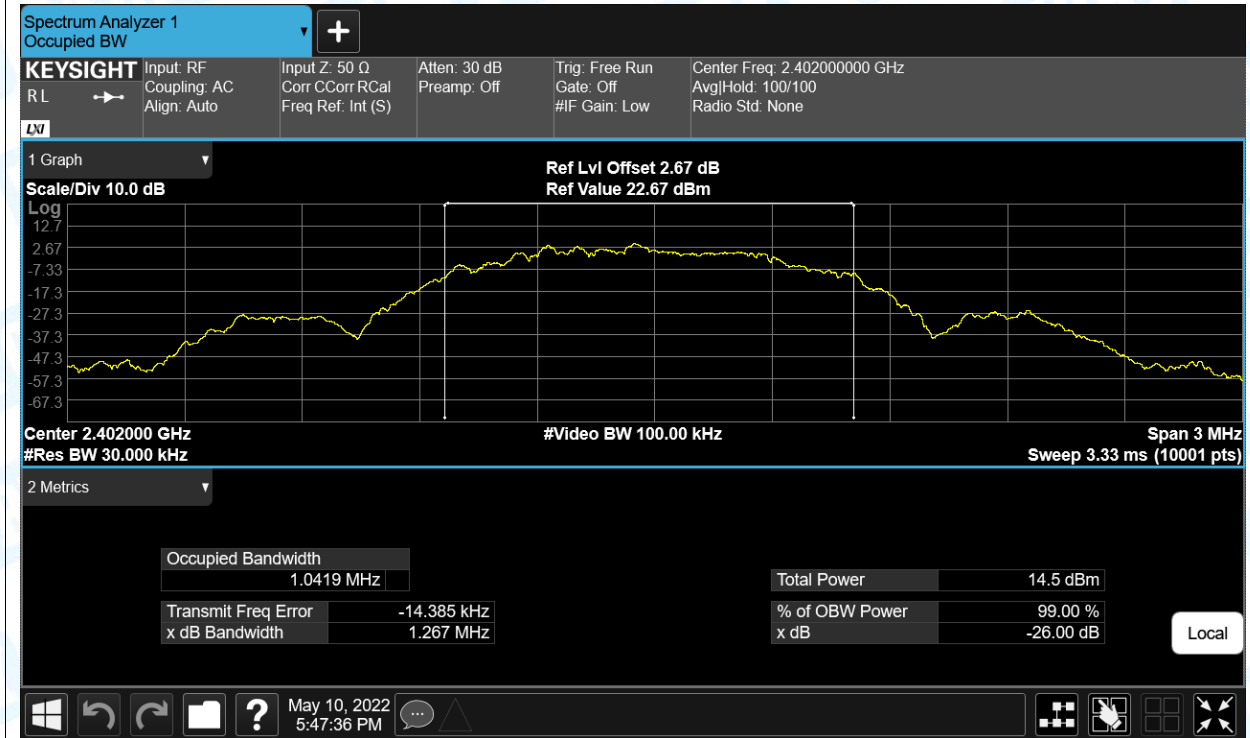


OBW NVNT BLE 1Mbps 2440MHz Ant1

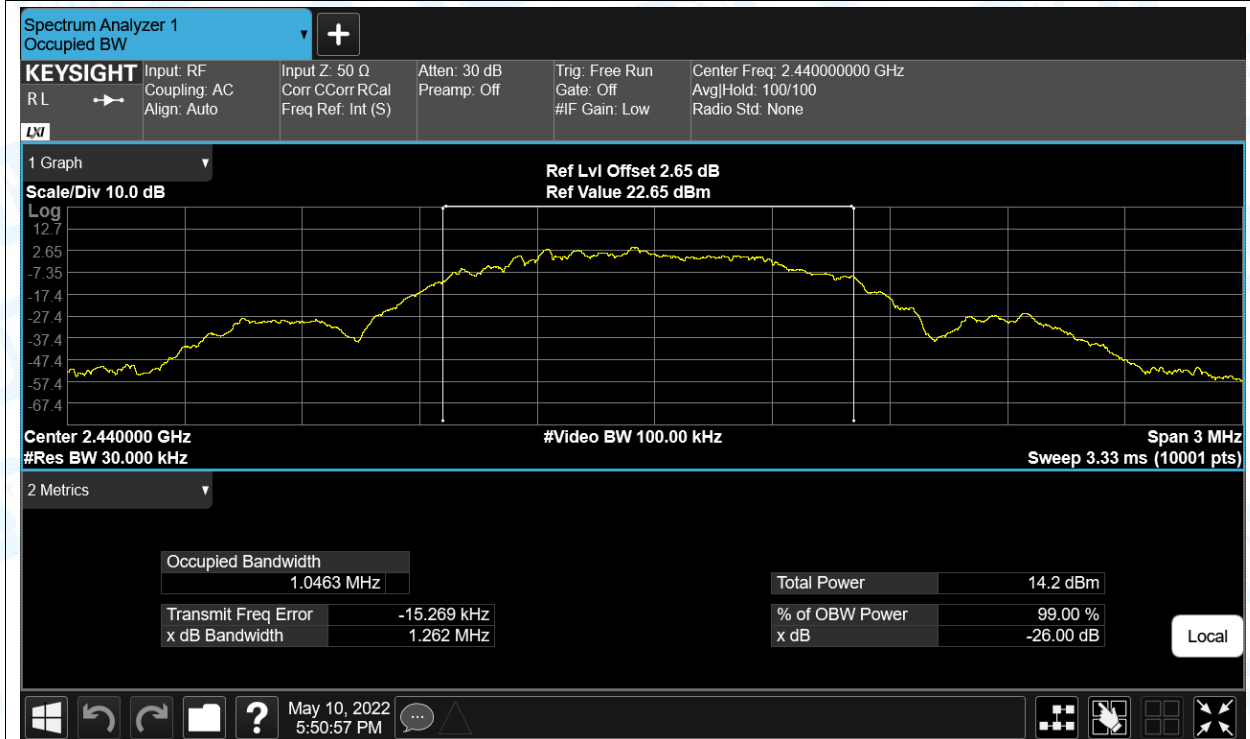


OBW NVNT BLE 1Mbps 2480MHz Ant1

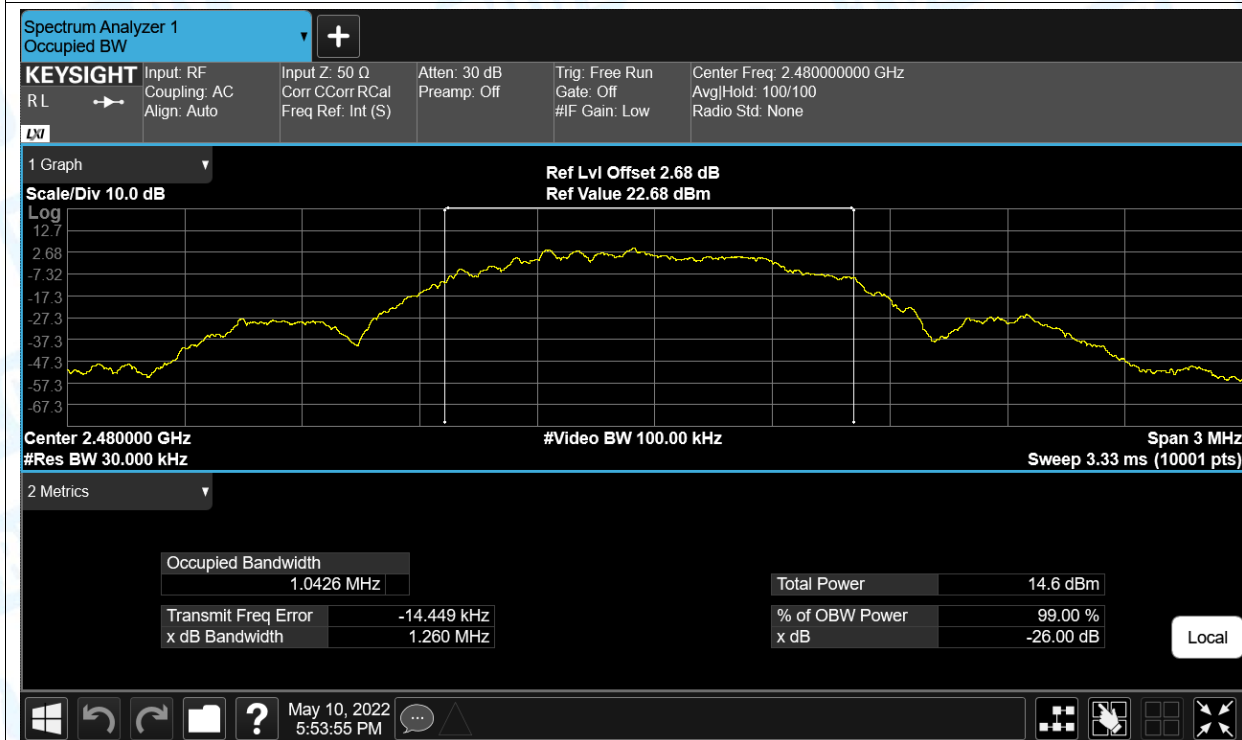


OBW NVNT BLE 2Mbps 2402MHz Ant1

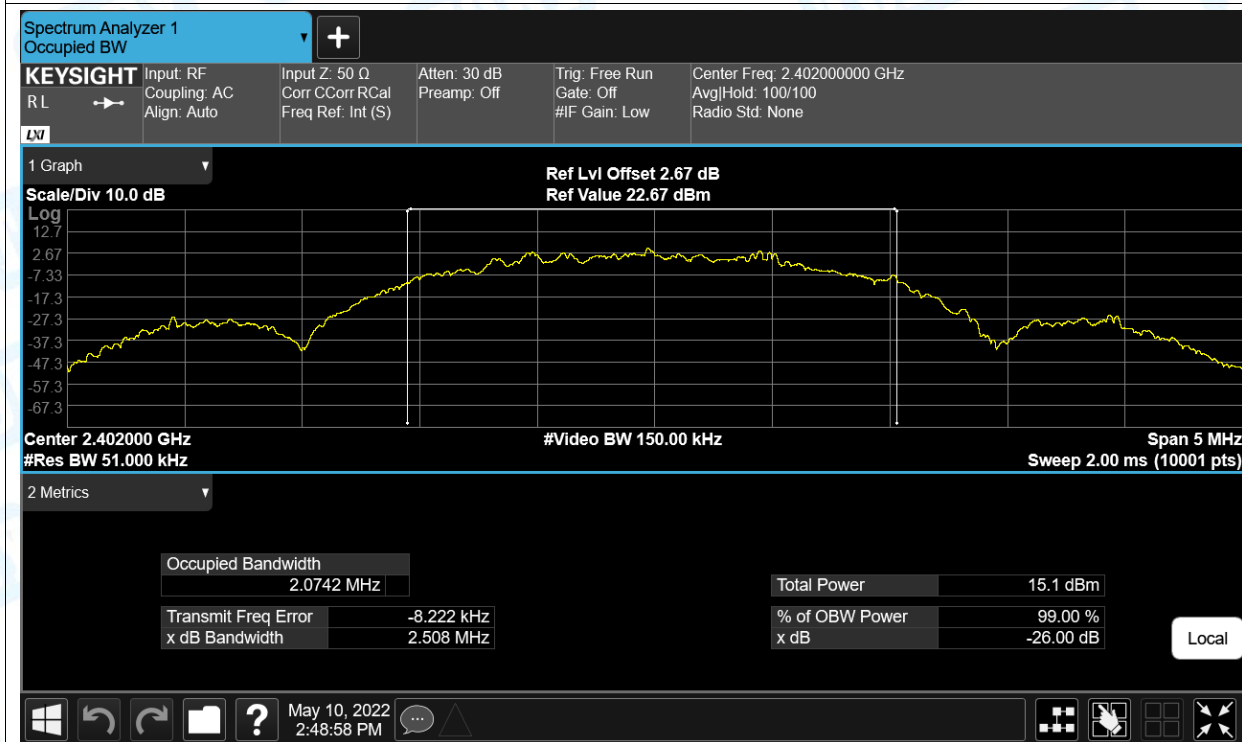

OBW NVNT BLE 2Mbps 2440MHz Ant1

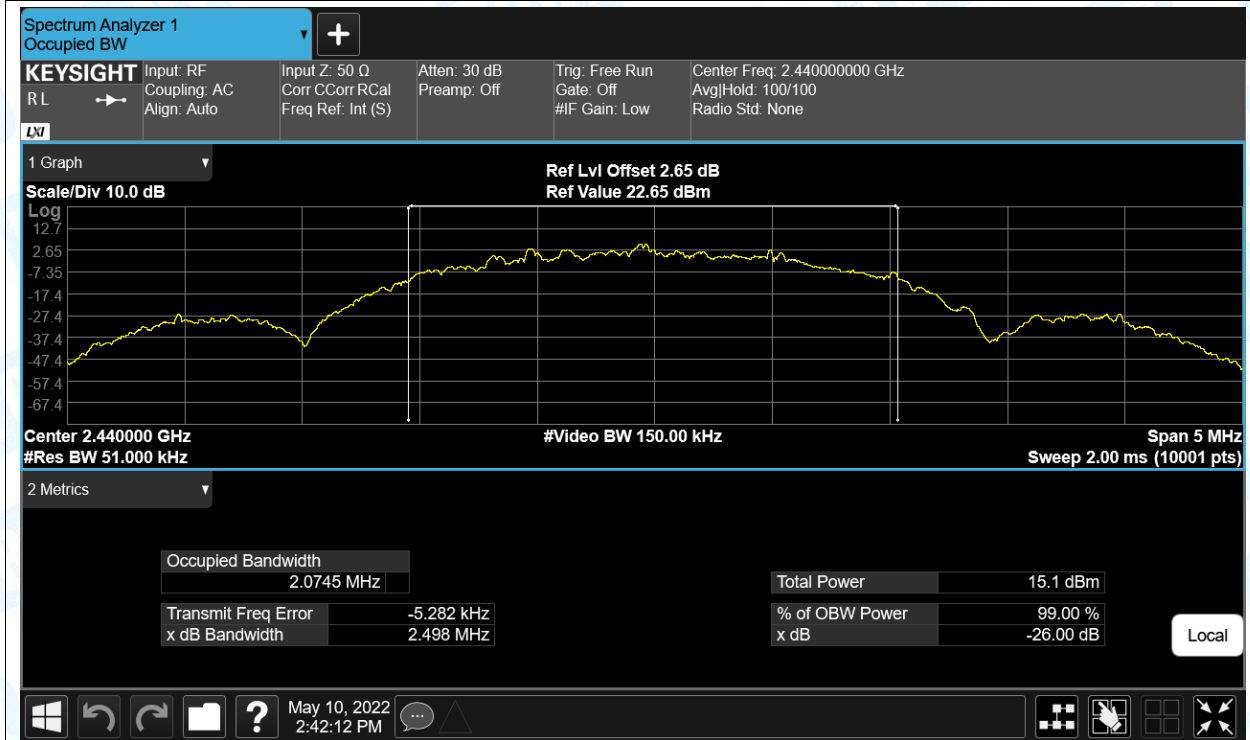

OBW NVNT BLE 2Mbps 2480MHz Ant1

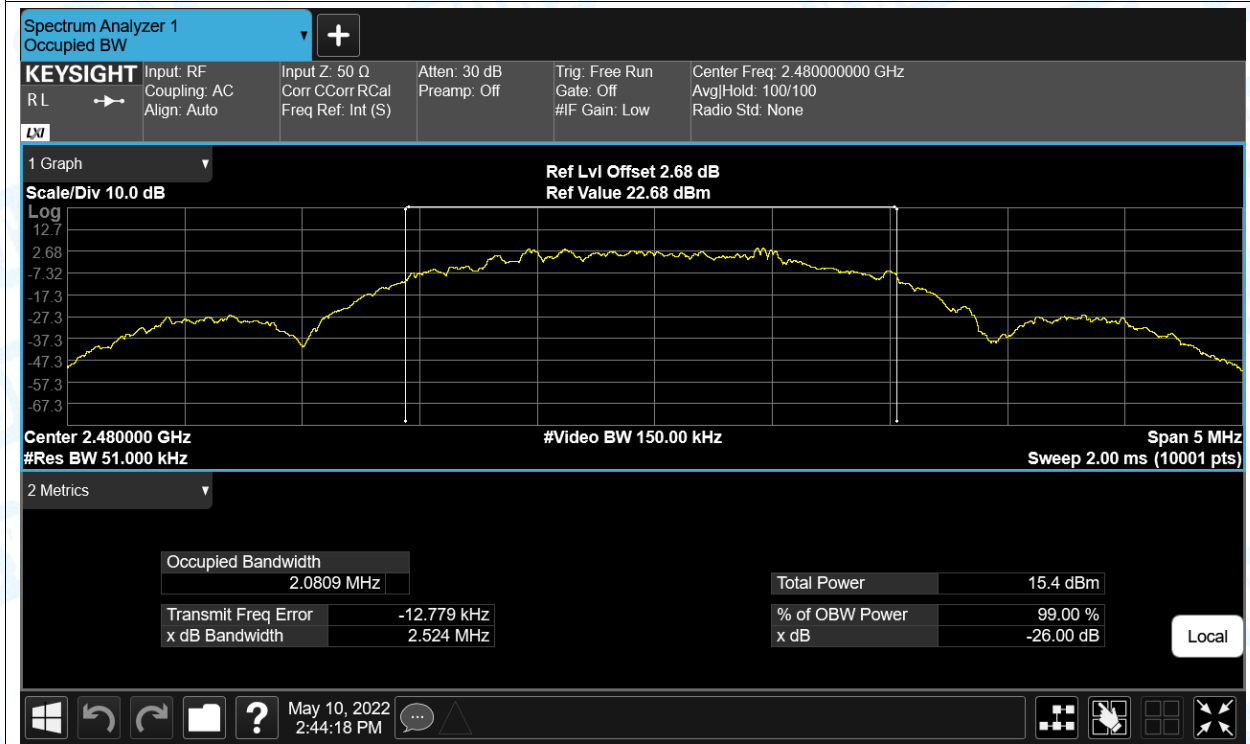


5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-6.364	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-6.72	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-6.306	8	Pass
NVNT	BLE 2Mbps	2402	Ant1	-9.708	8	Pass
NVNT	BLE 2Mbps	2440	Ant1	-10.081	8	Pass
NVNT	BLE 2Mbps	2480	Ant1	-9.34	8	Pass



Test Graphs



PSD NVNT BLE 1Mbps 2402MHz Ant1

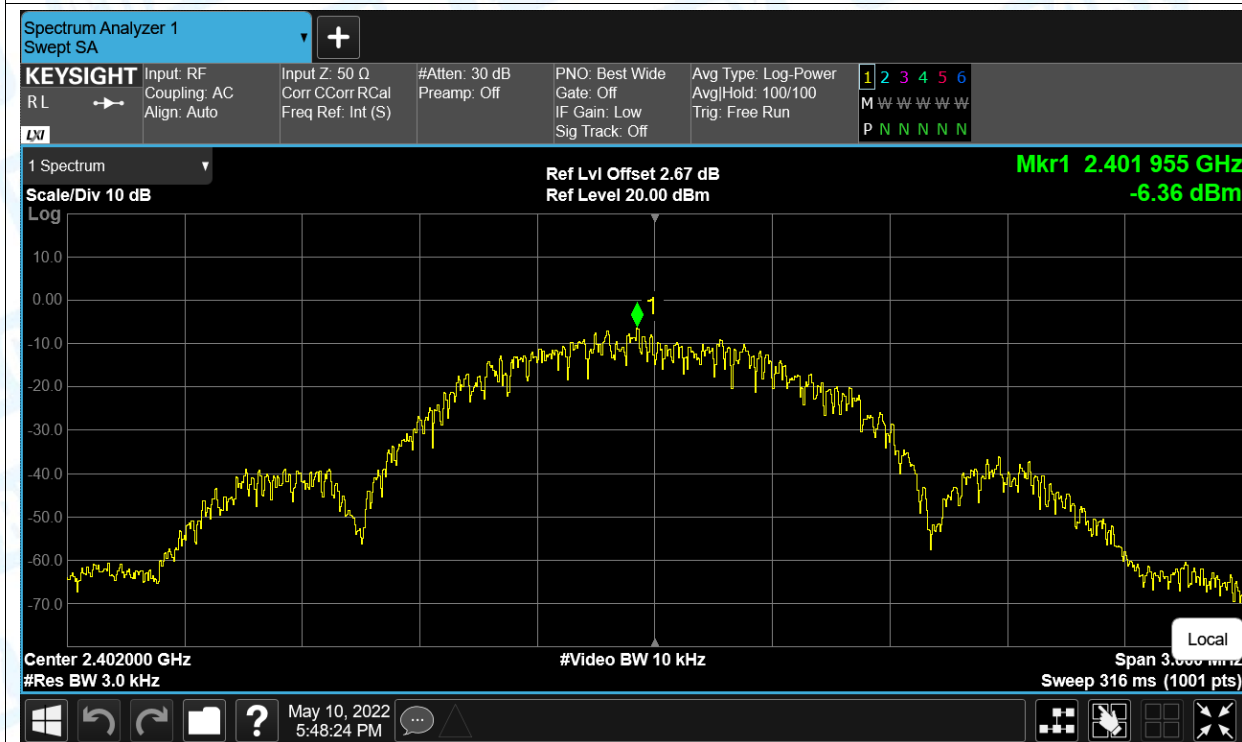

PSD NVNT BLE 1Mbps 2440MHz Ant1

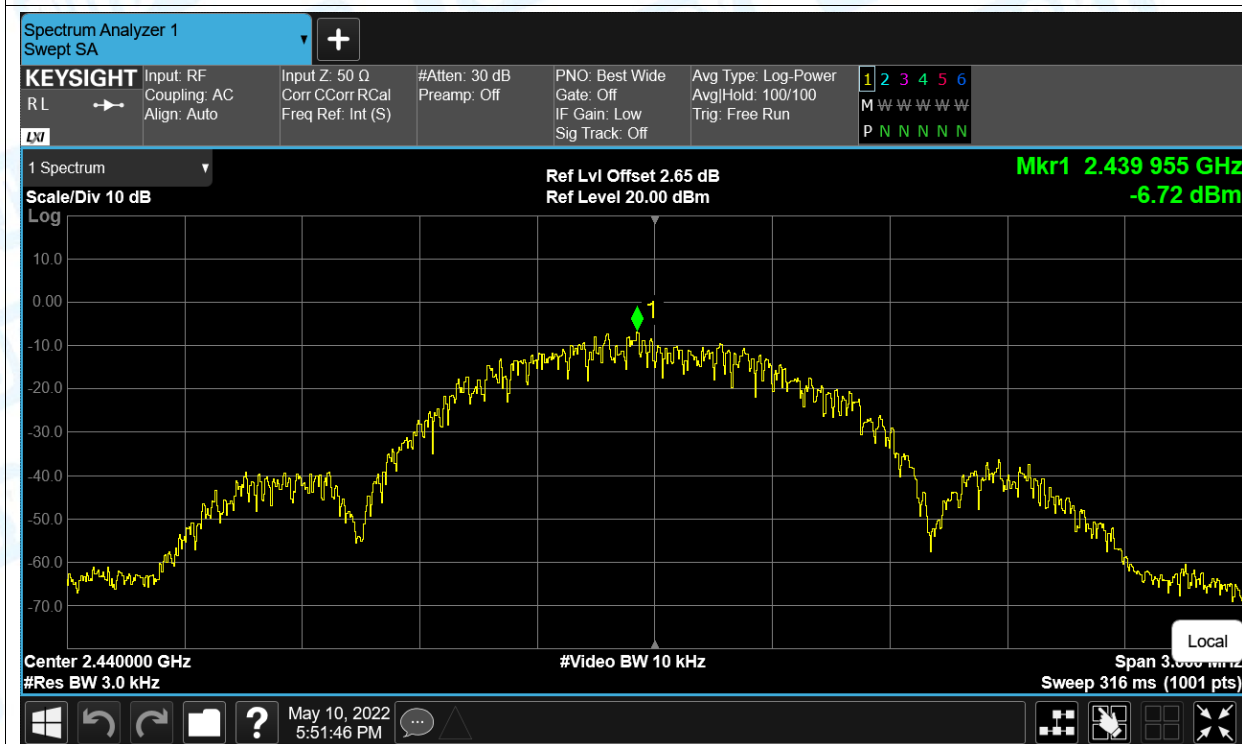


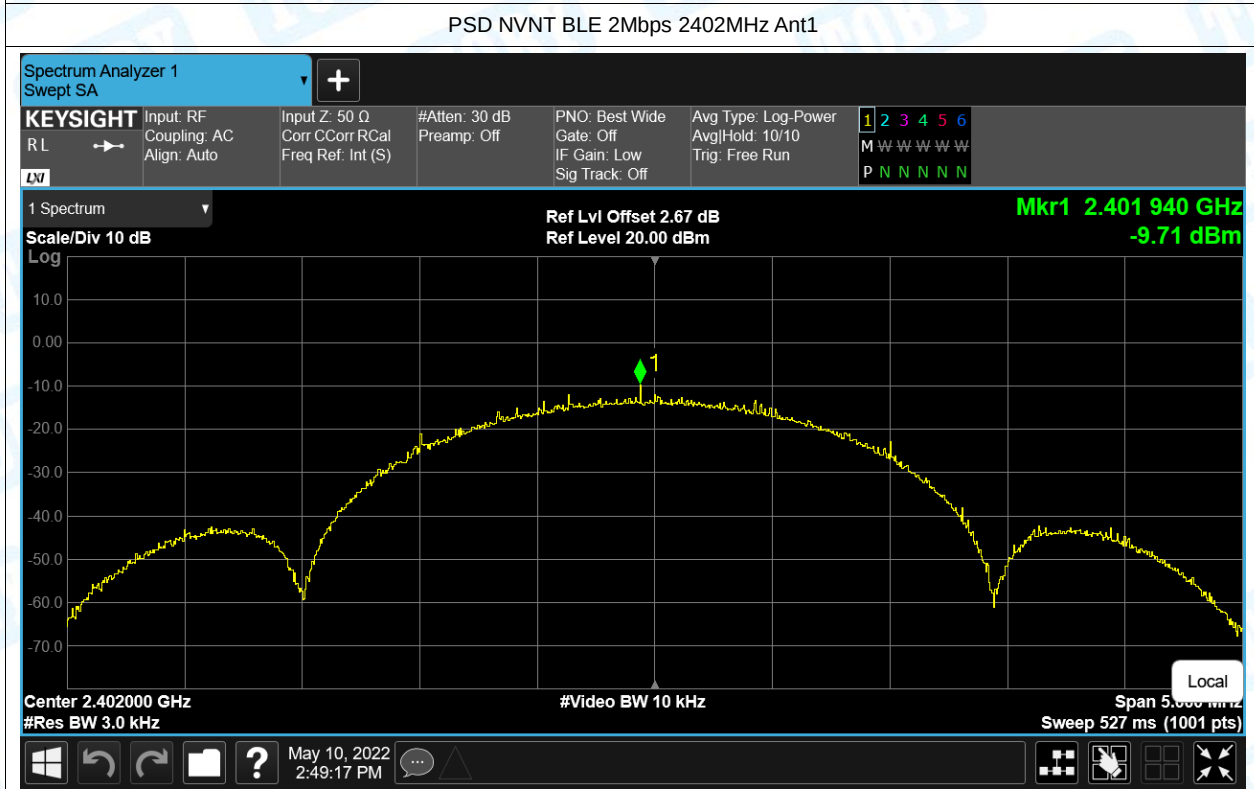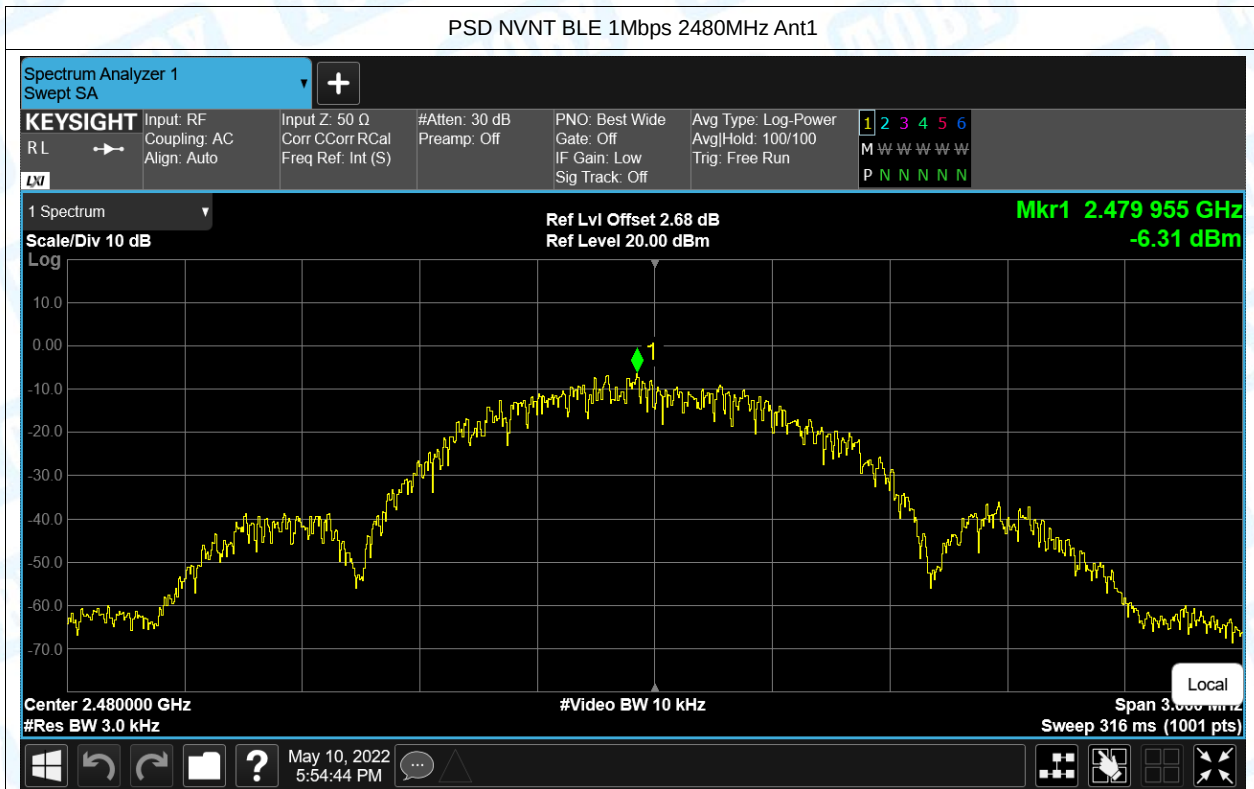

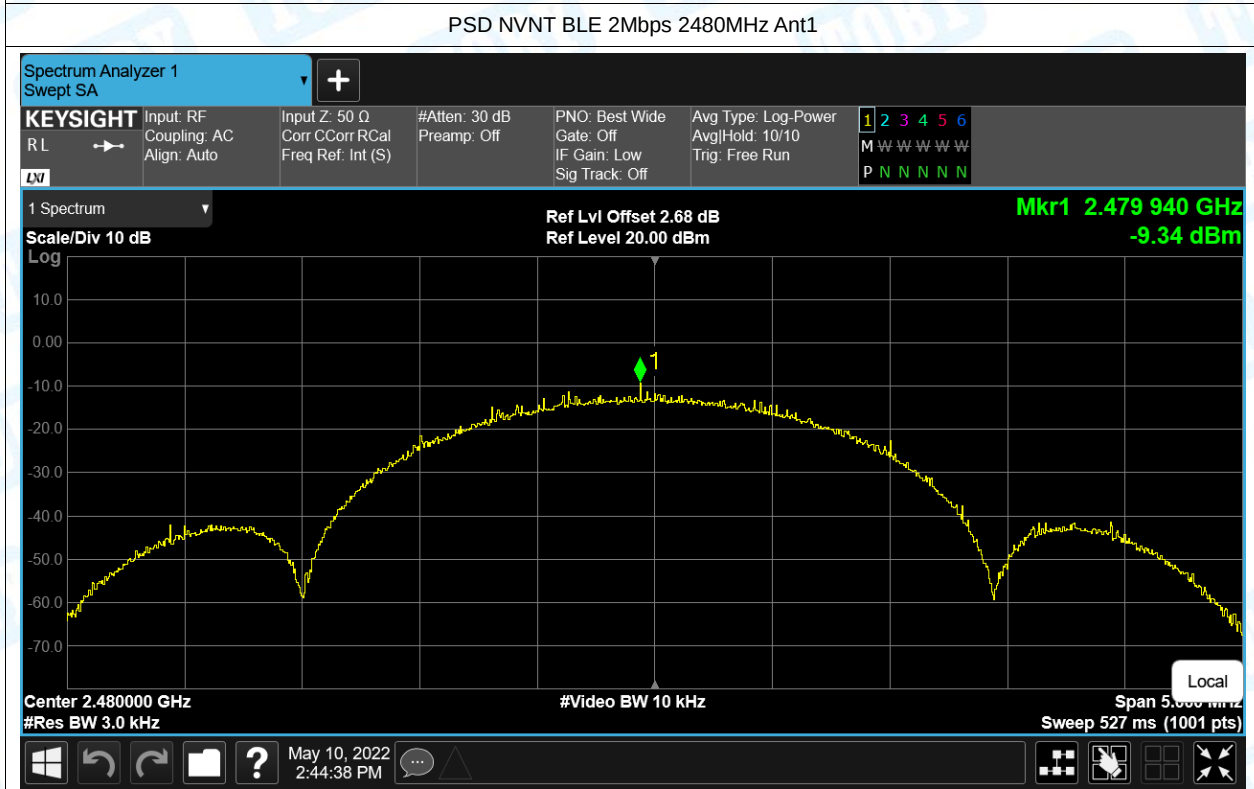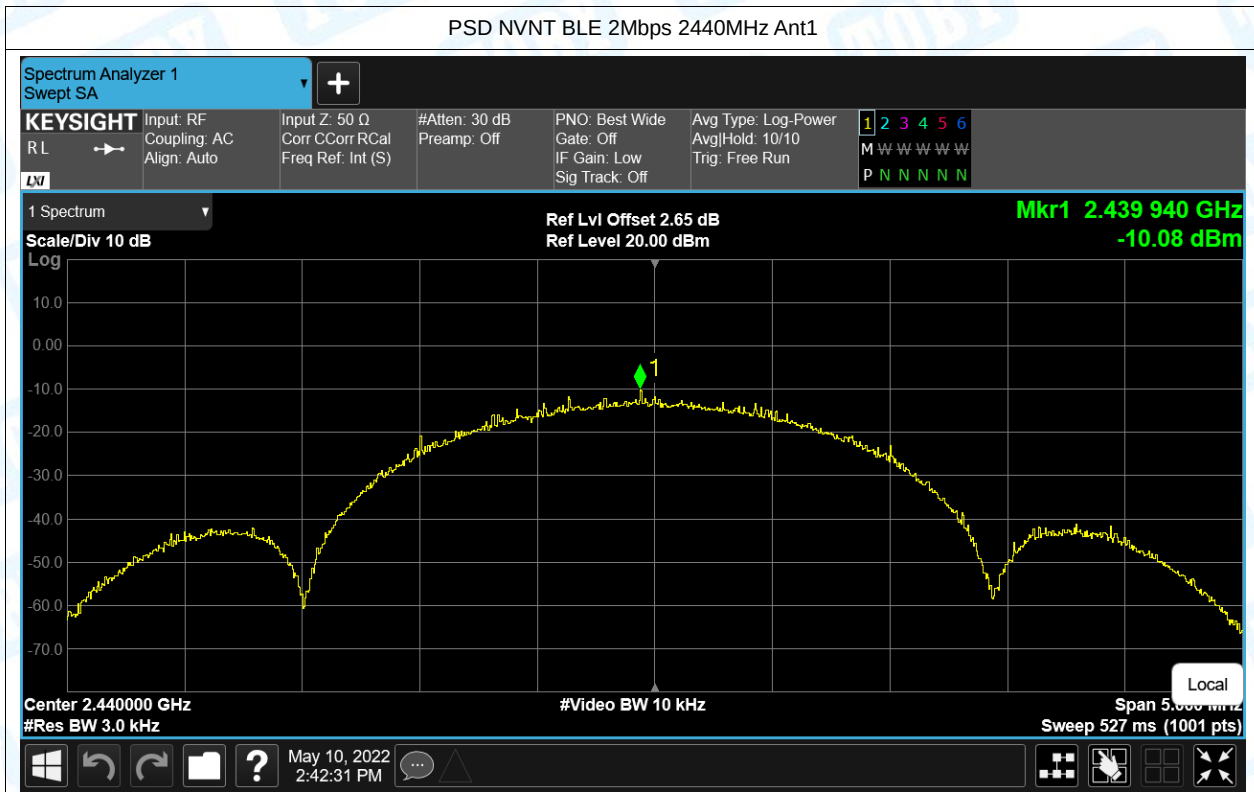


6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-63.82	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-63.69	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-62.75	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-59.65	-20	Pass


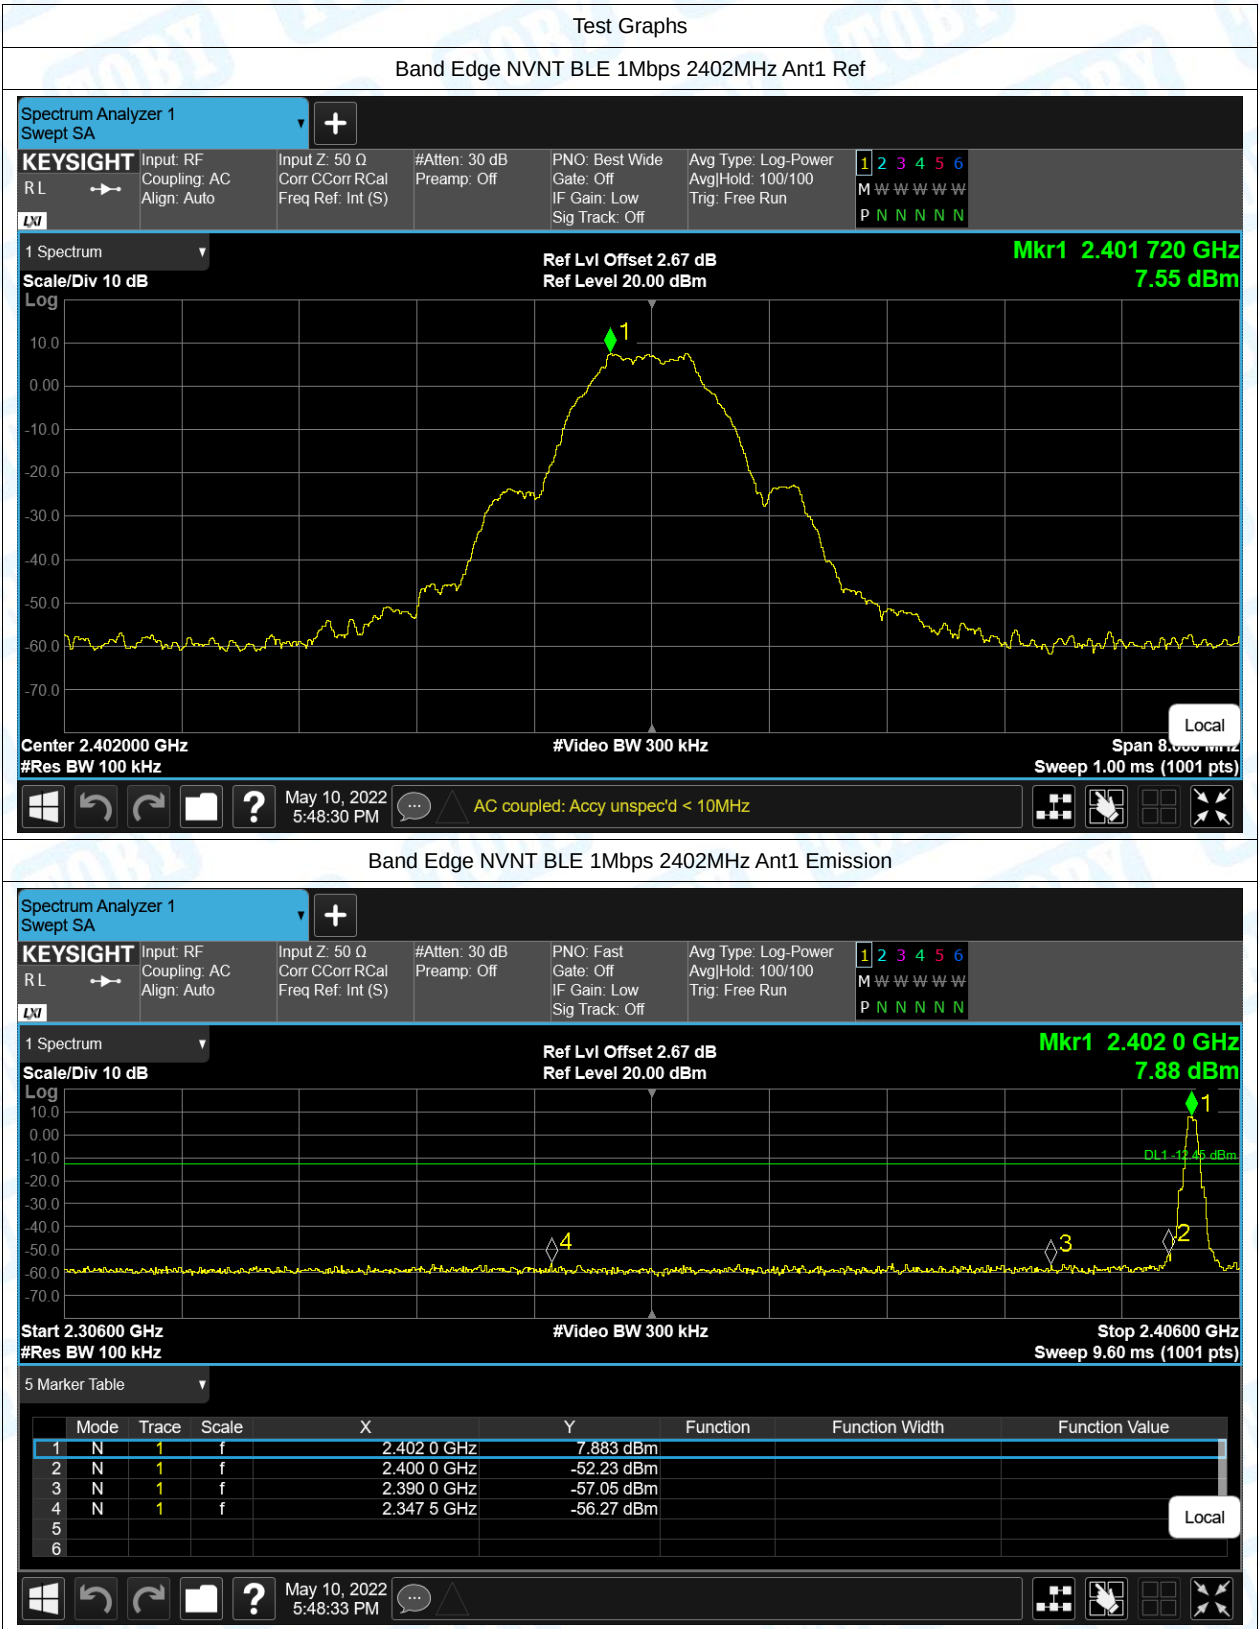




Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref

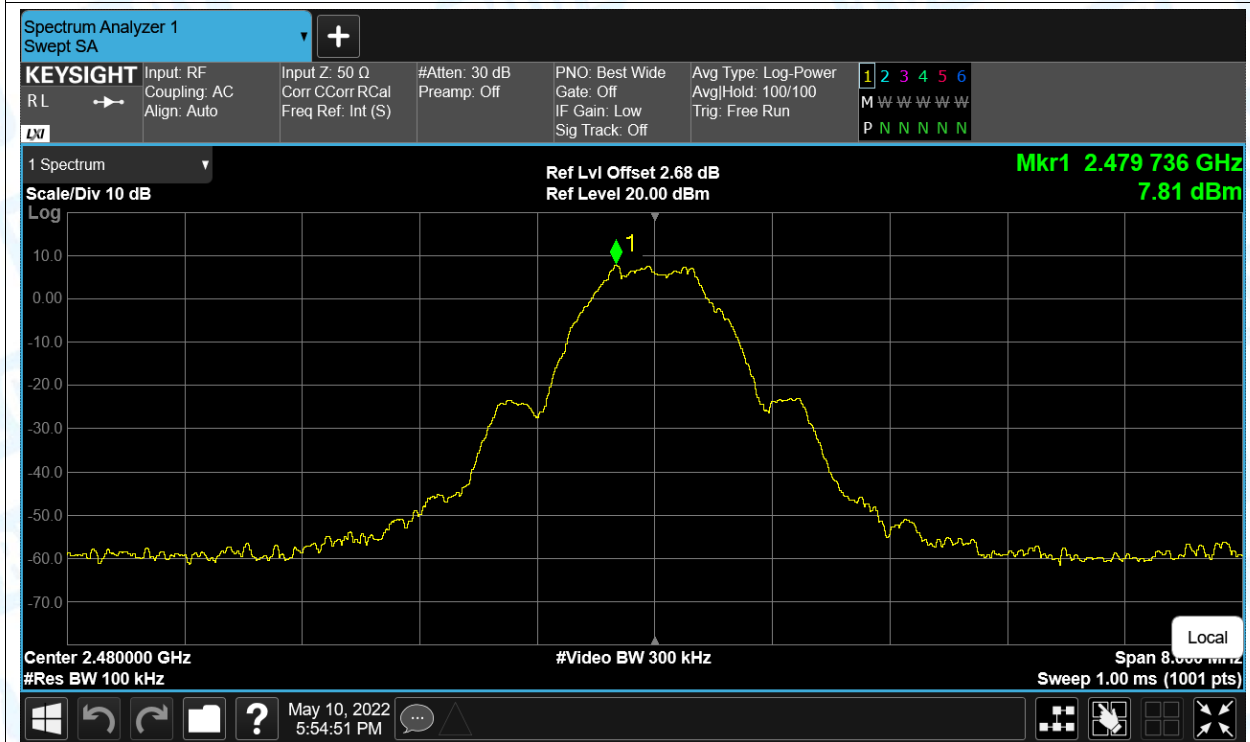

Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

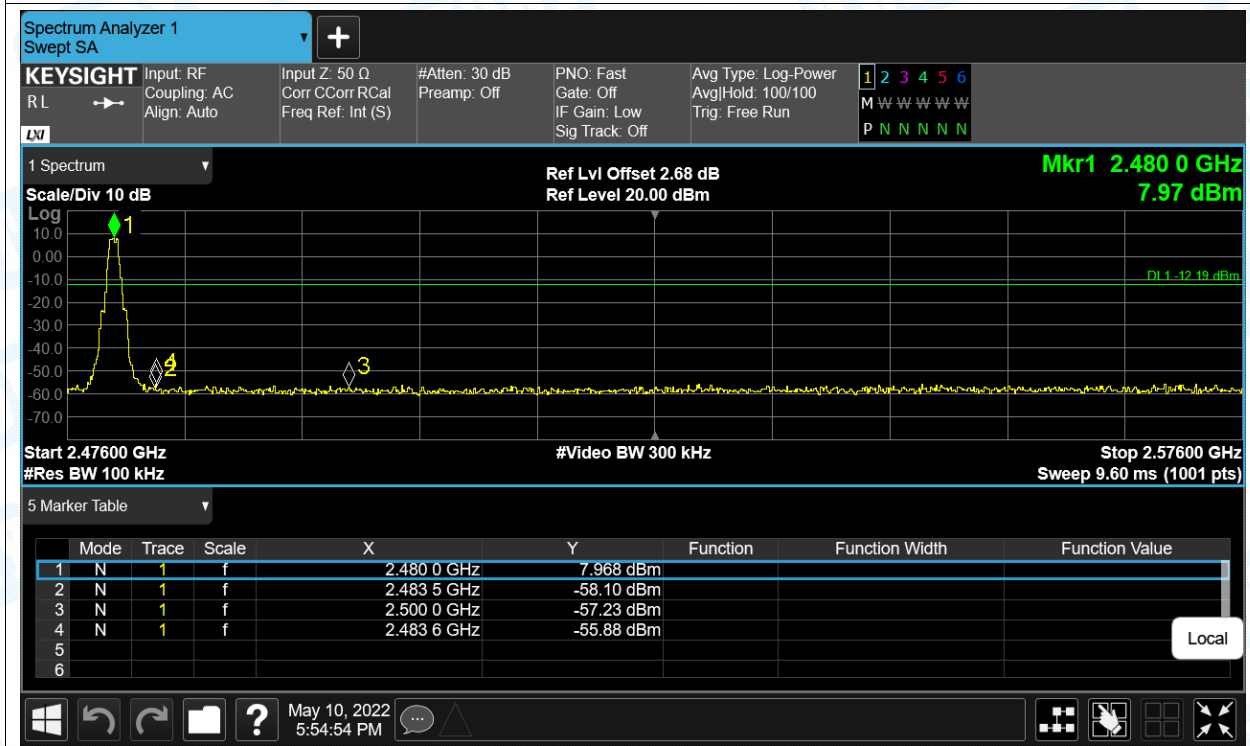


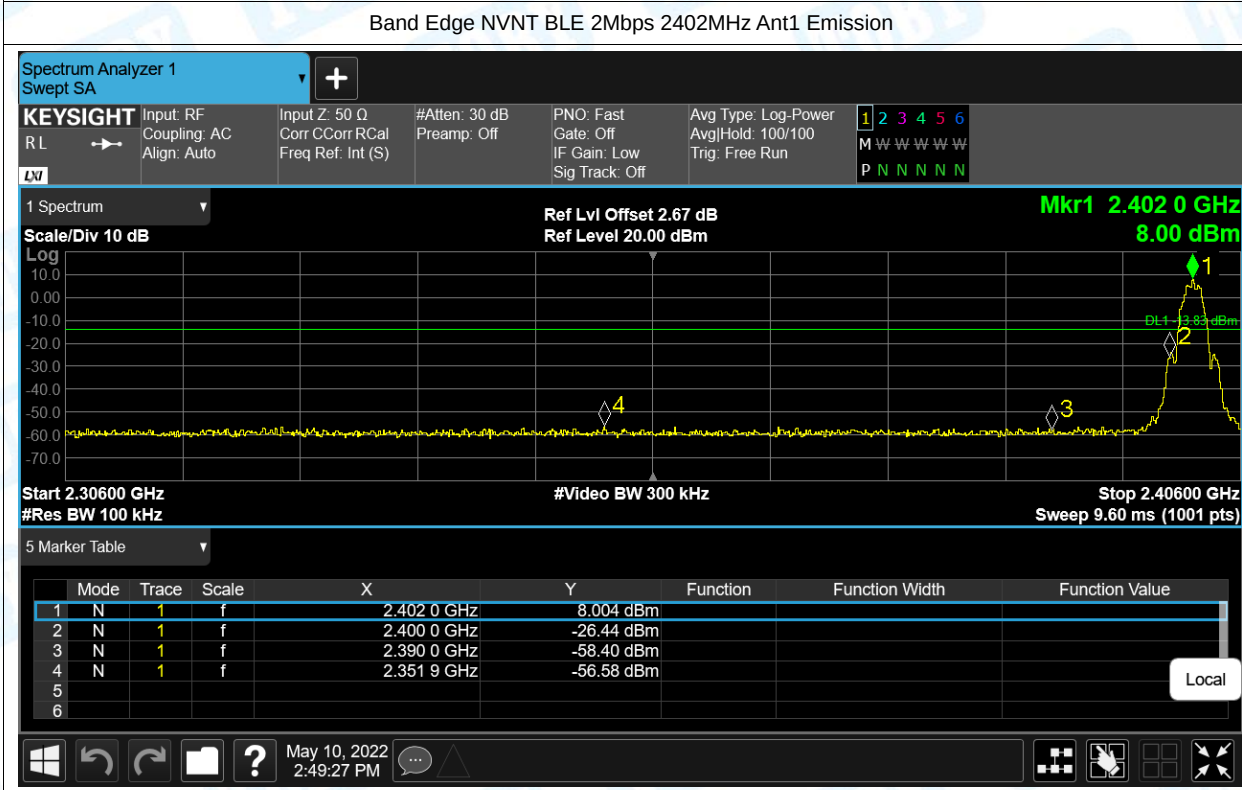
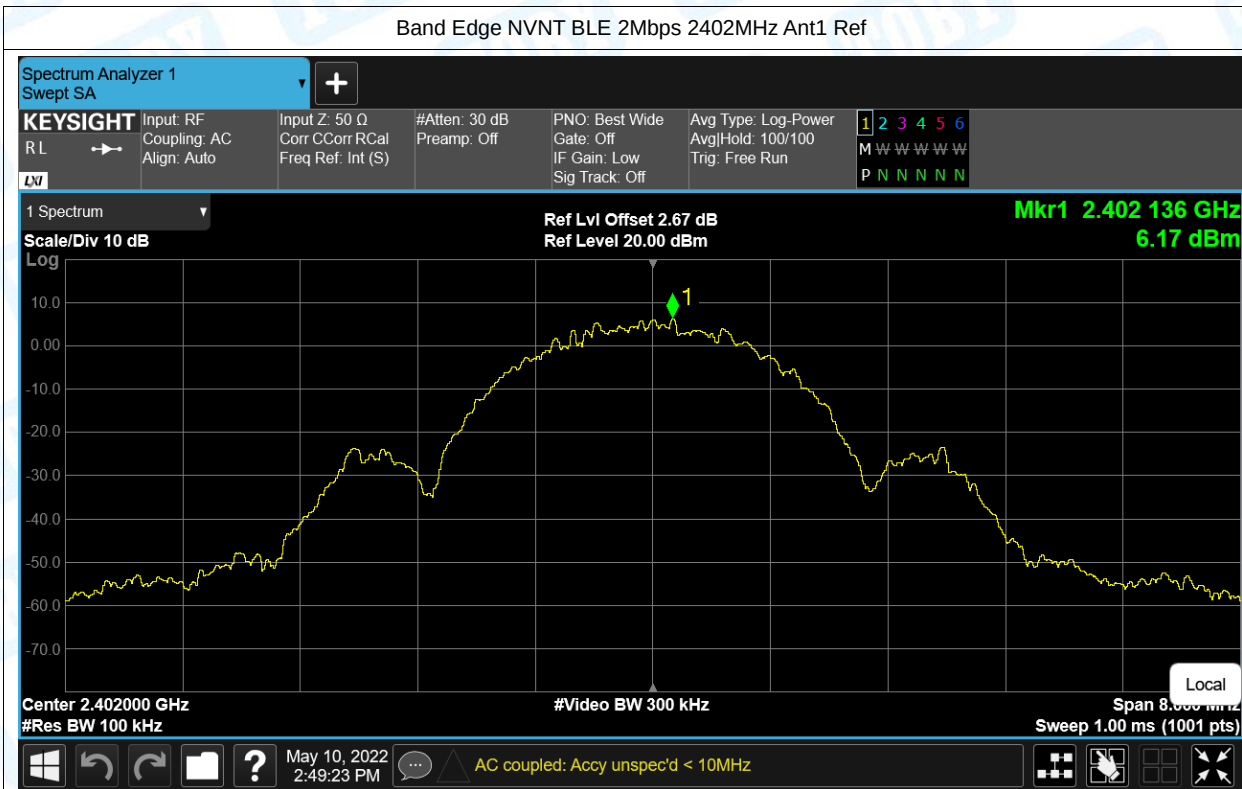


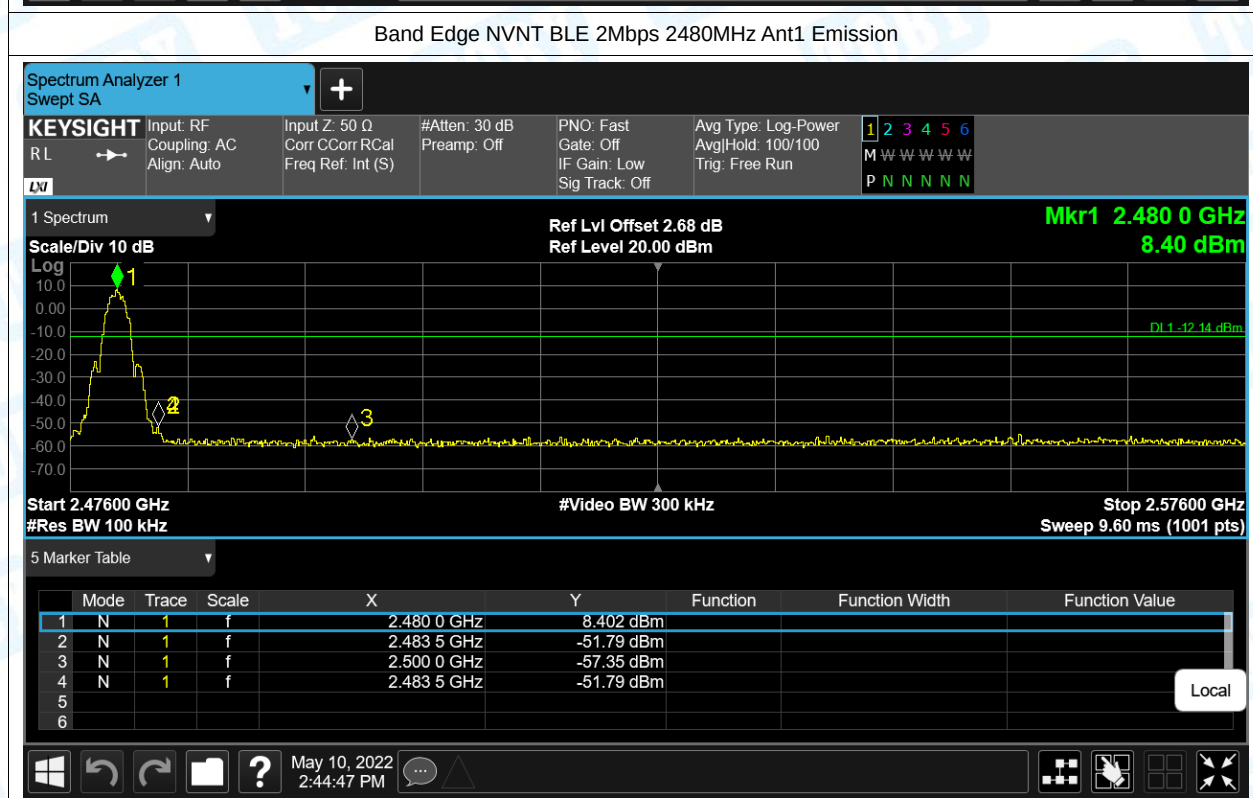
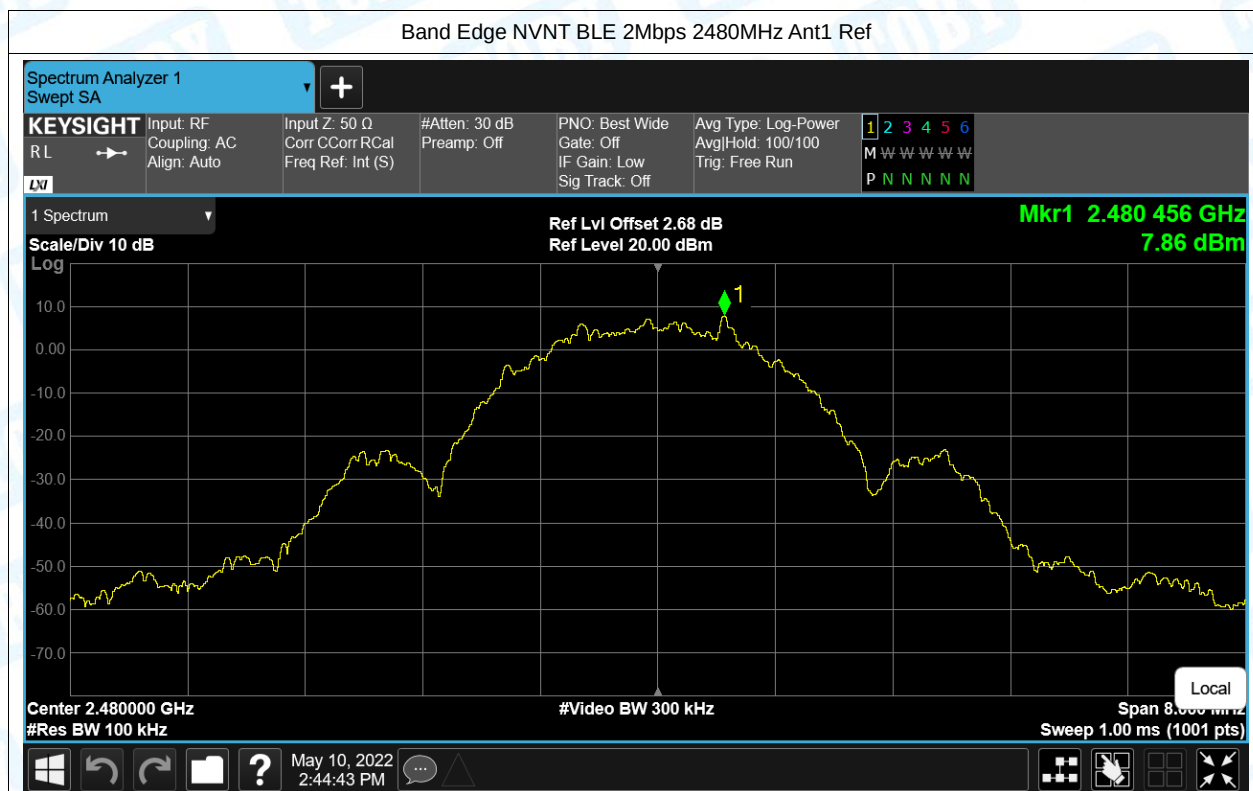




7. Conducted RF Spurious Emission



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-49.67	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-49.68	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-49.72	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-49.58	-20	Pass
NVNT	BLE 2Mbps	2440	Ant1	-49.8	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-49.31	-20	Pass

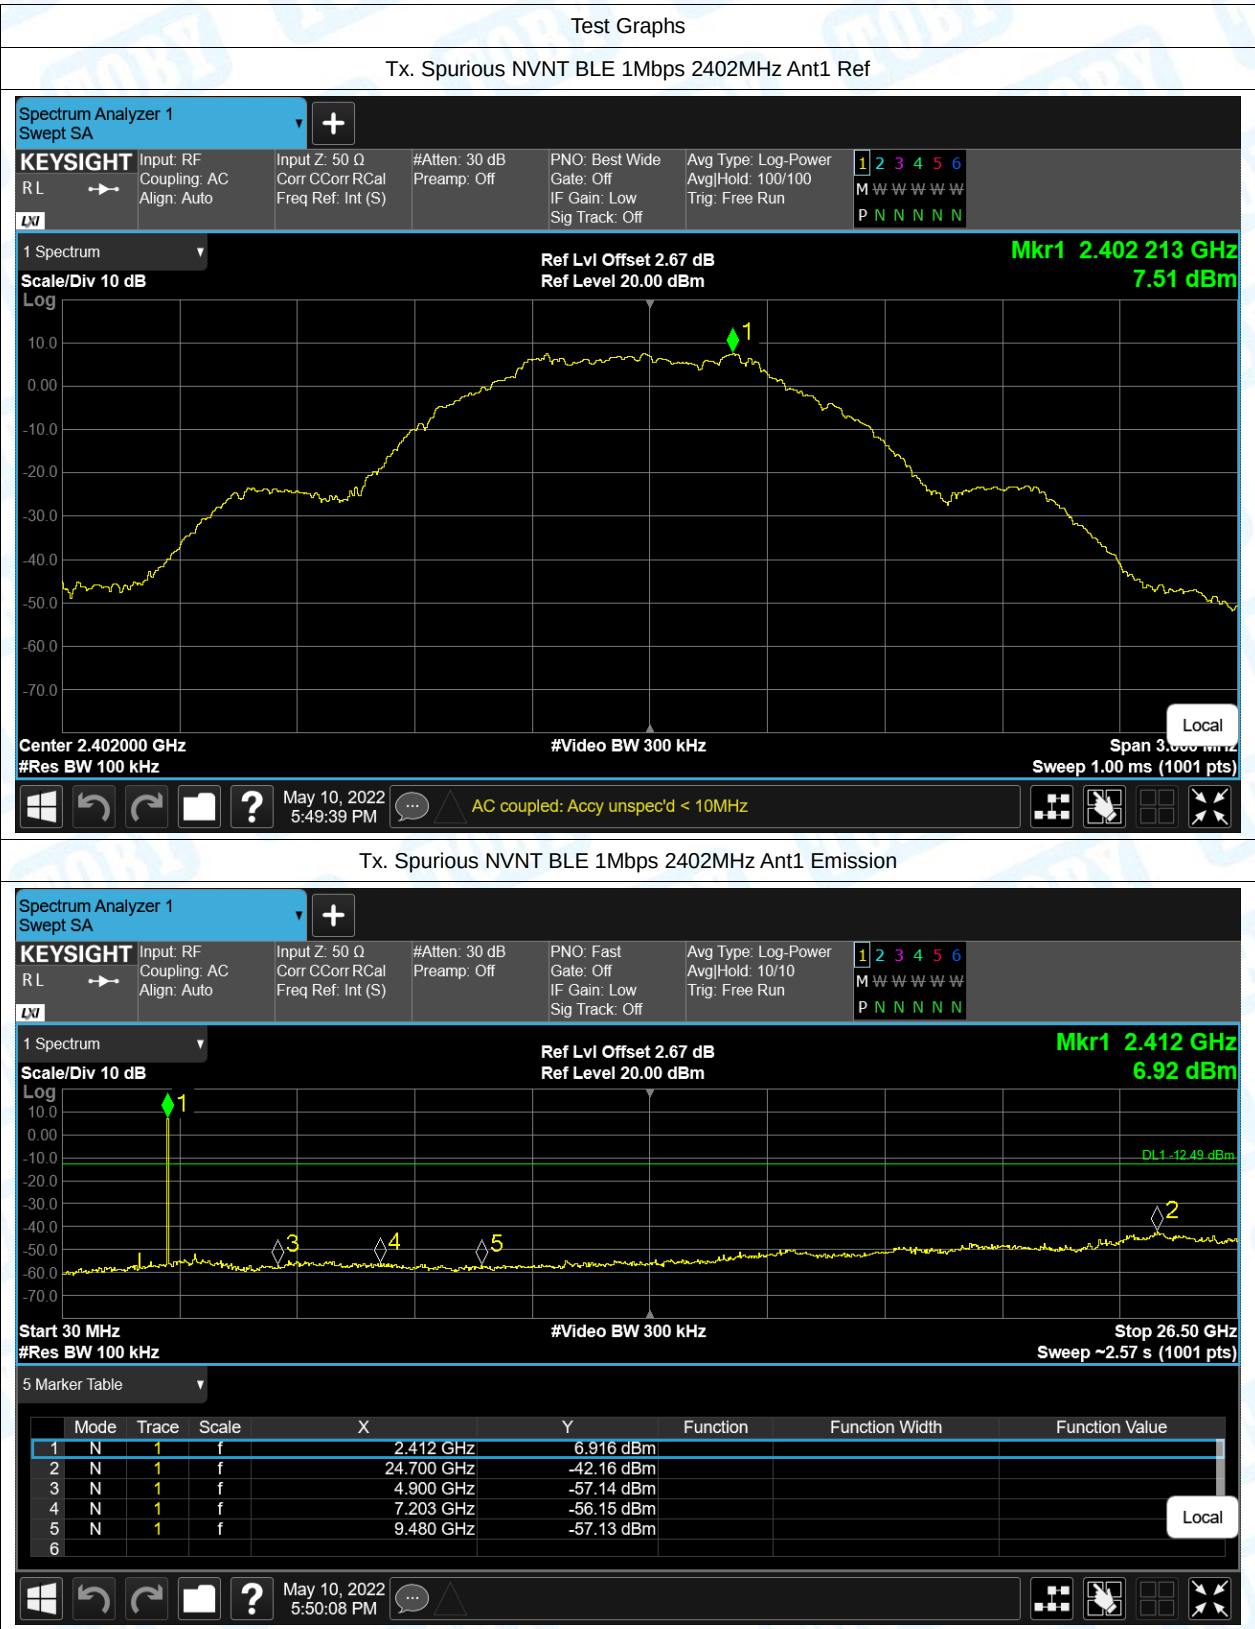

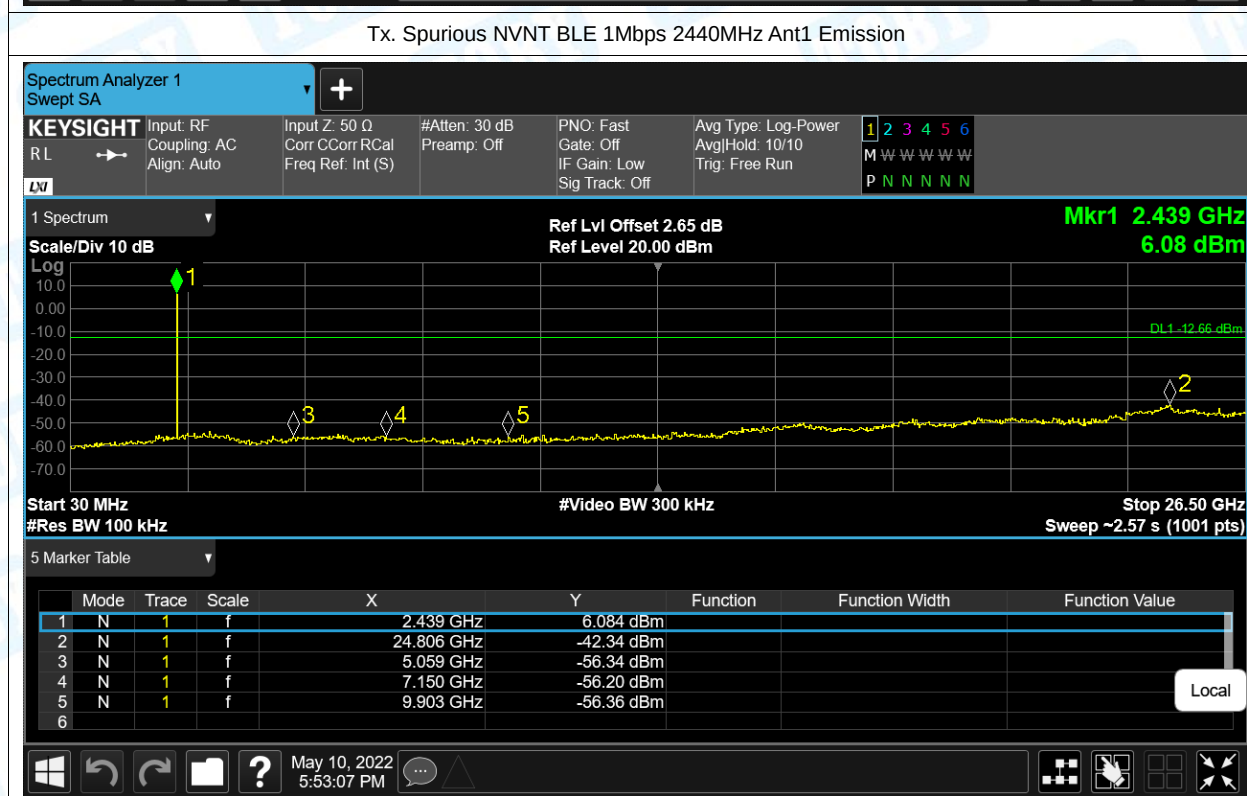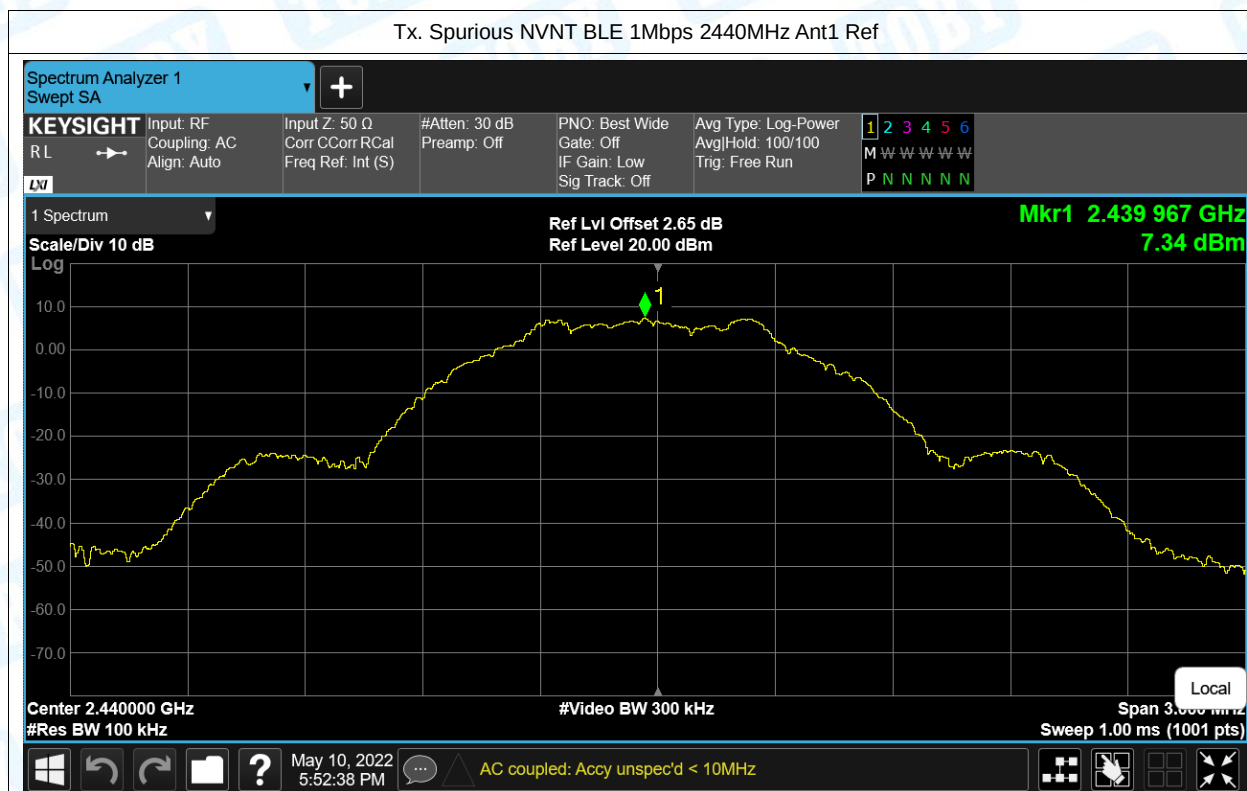


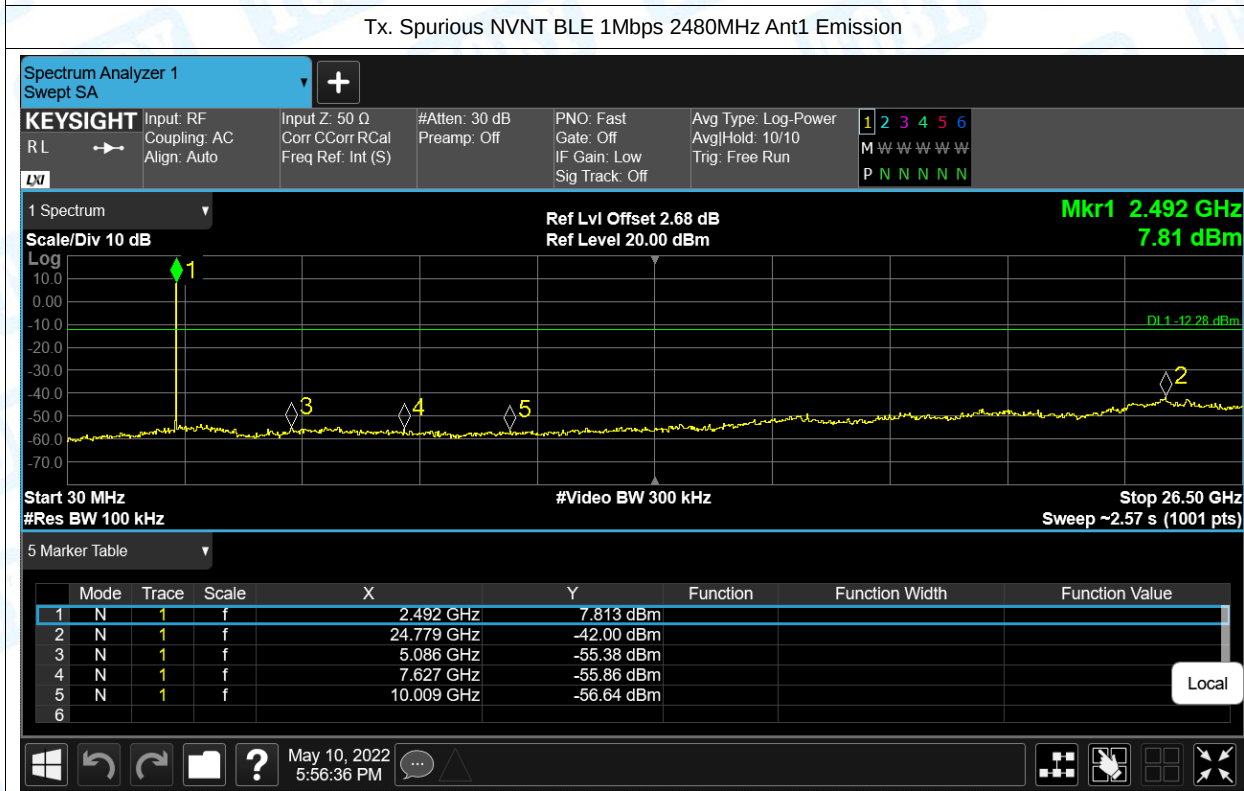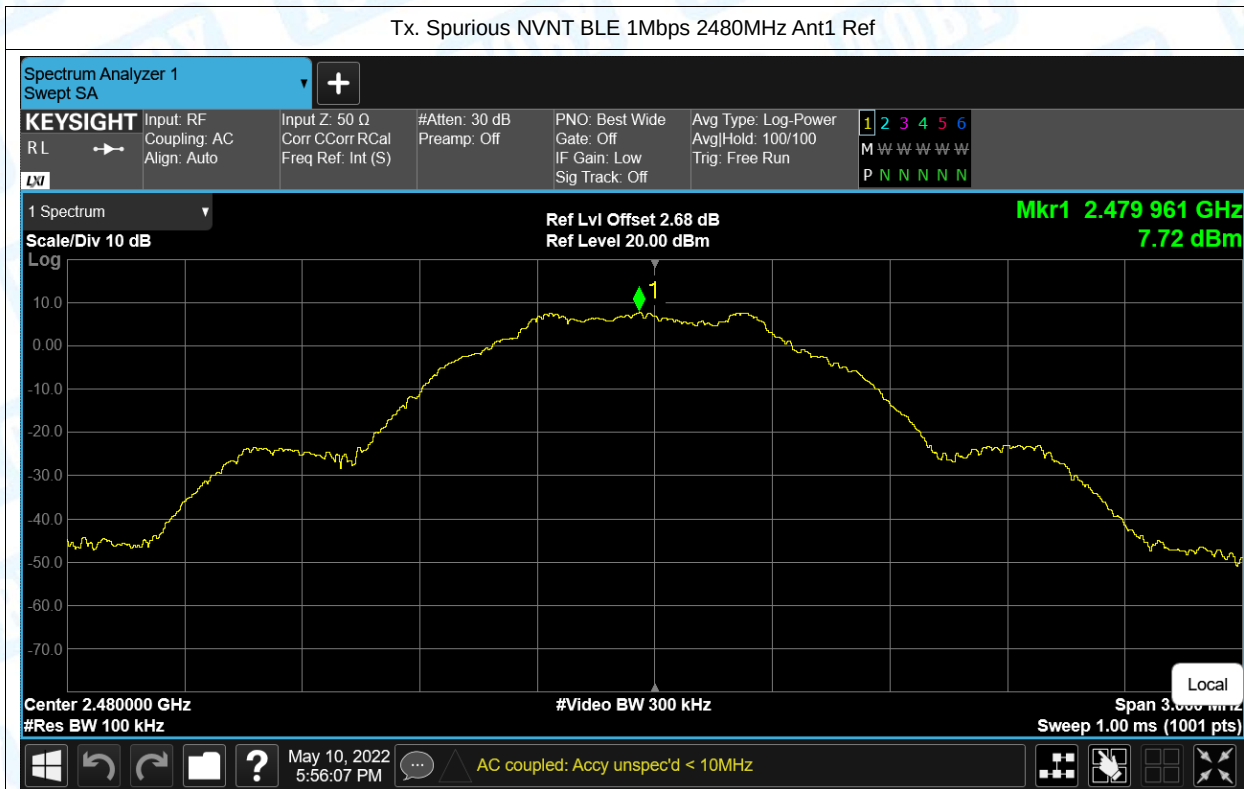

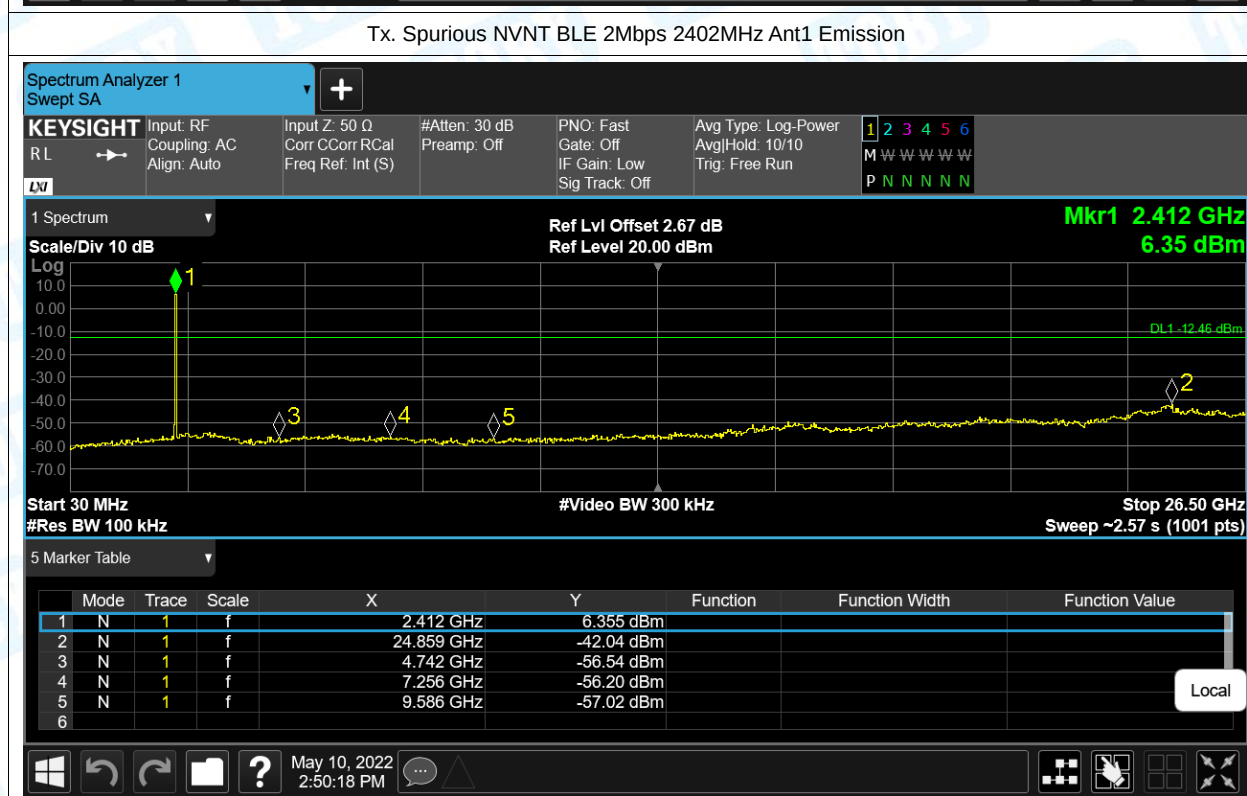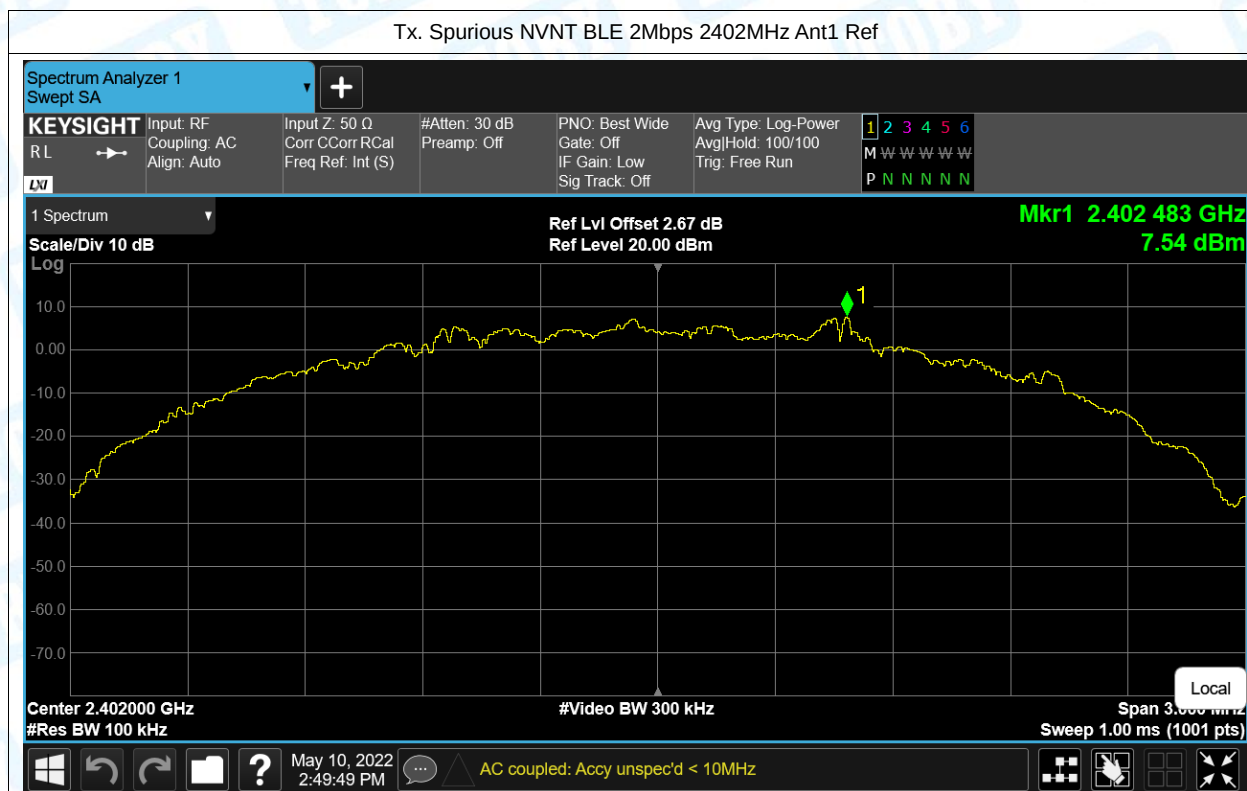


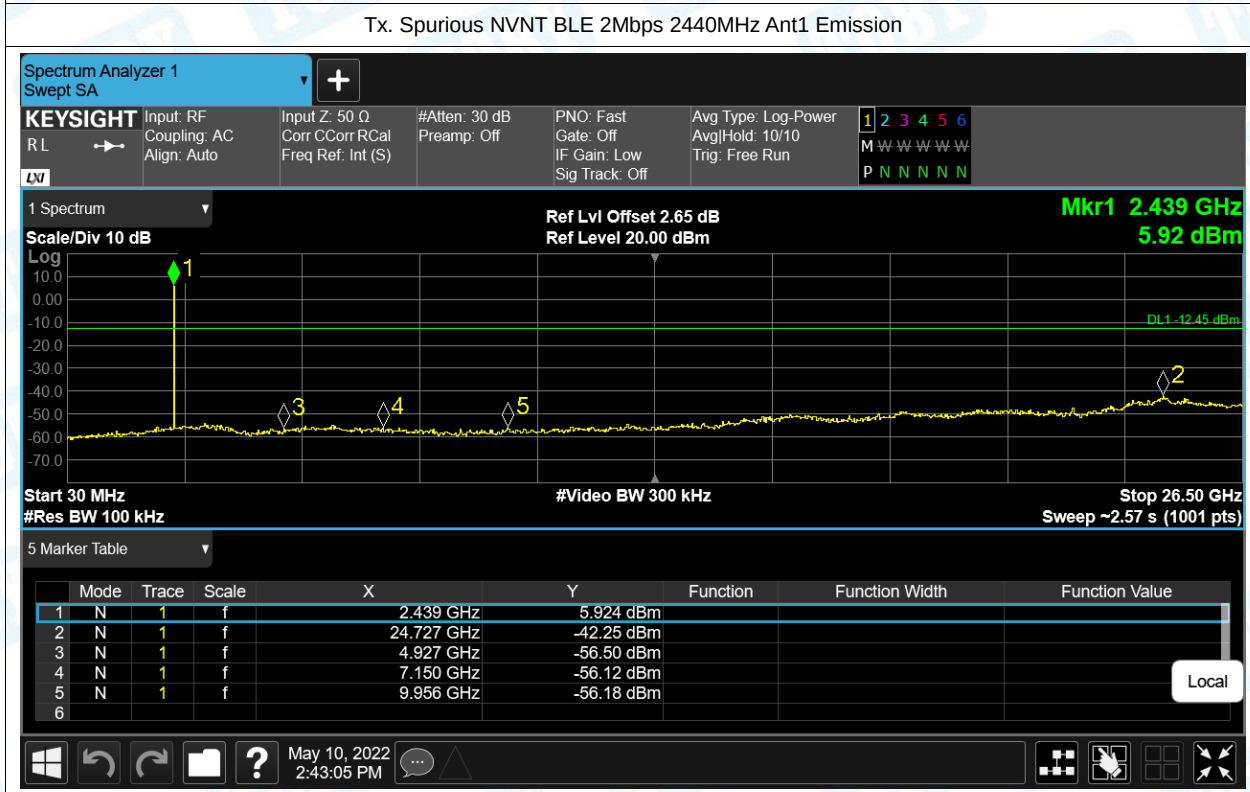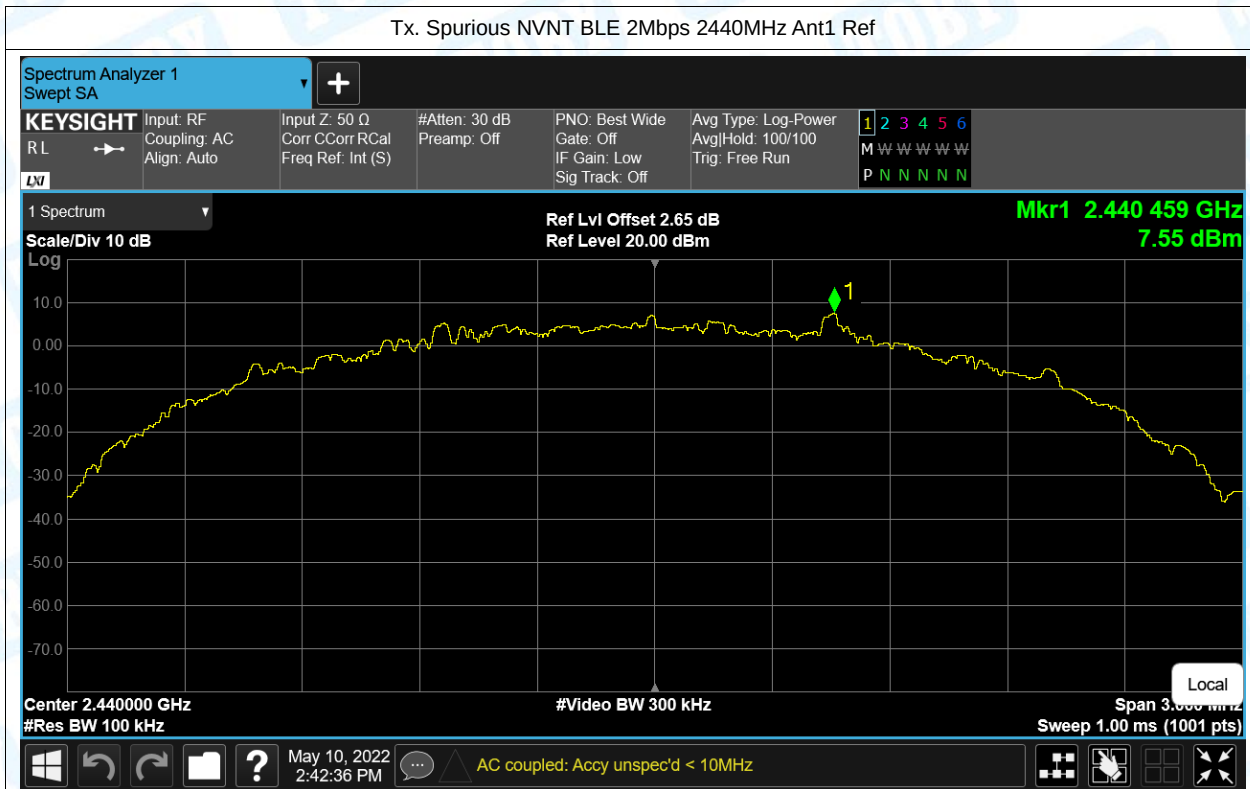

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Ref

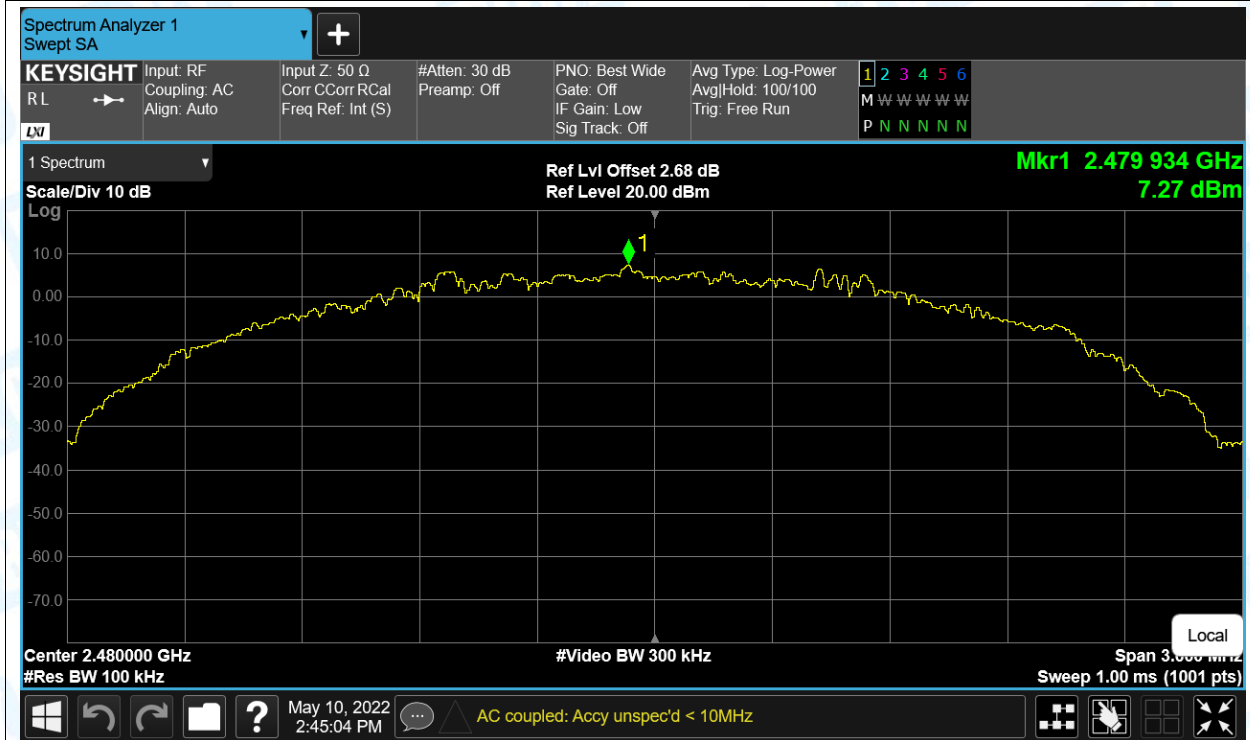

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Emission

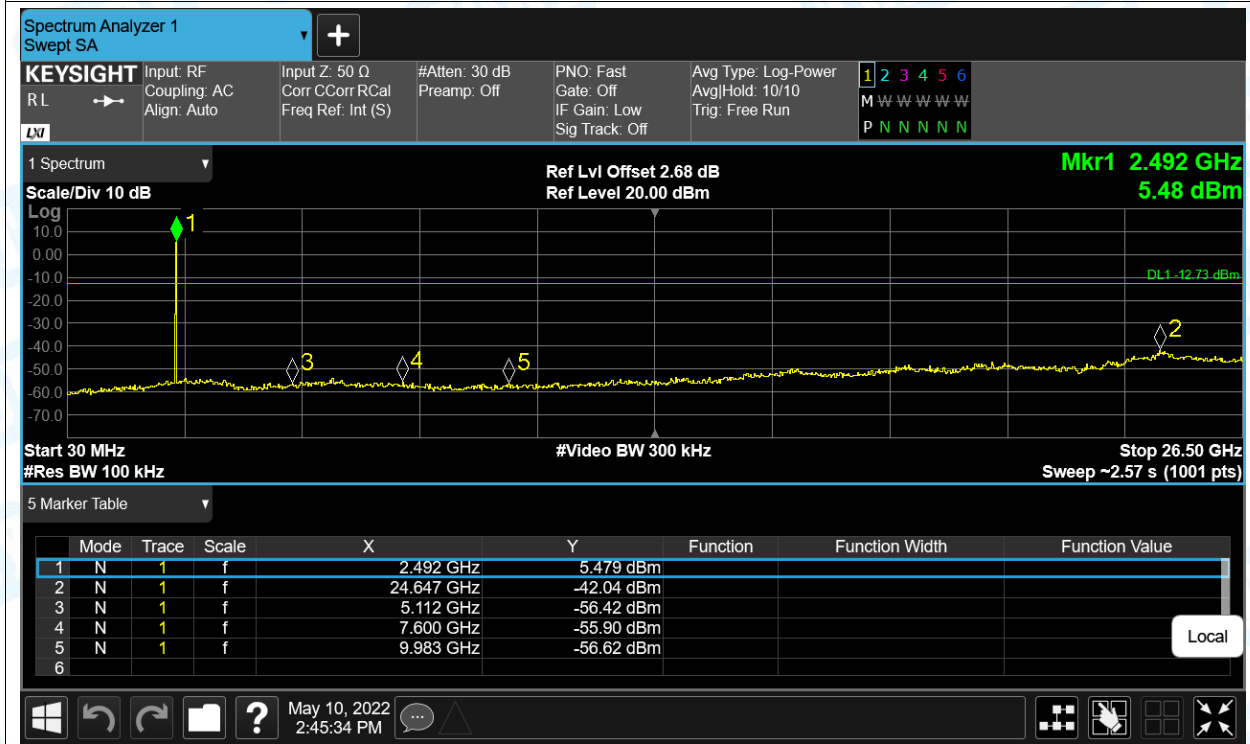


8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-47.6	2	49.66	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-57.53	2	39.73	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2365.296	-45.66	2	51.6	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2383.824	-56.77	2	40.49	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-48.87	2	48.39	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-57.1	2	40.16	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-47.84	2	49.42	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-56.14	2	41.12	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2484.208	-44.6	2	52.66	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.728	-55.99	2	41.27	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-47.98	2	49.28	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-57.17	2	40.09	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-49.12	2	48.14	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-57.93	2	39.33	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2349.264	-44.8	2	52.46	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2386.704	-57.29	2	39.97	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-48.02	2	49.24	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-57.55	2	39.71	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-40.89	2	56.37	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-49.58	2	47.68	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.512	-40.89	2	56.37	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.512	-49.58	2	47.68	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-48.8	2	48.46	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-57.6	2	39.66	Average	54	Pass

Test Graphs


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

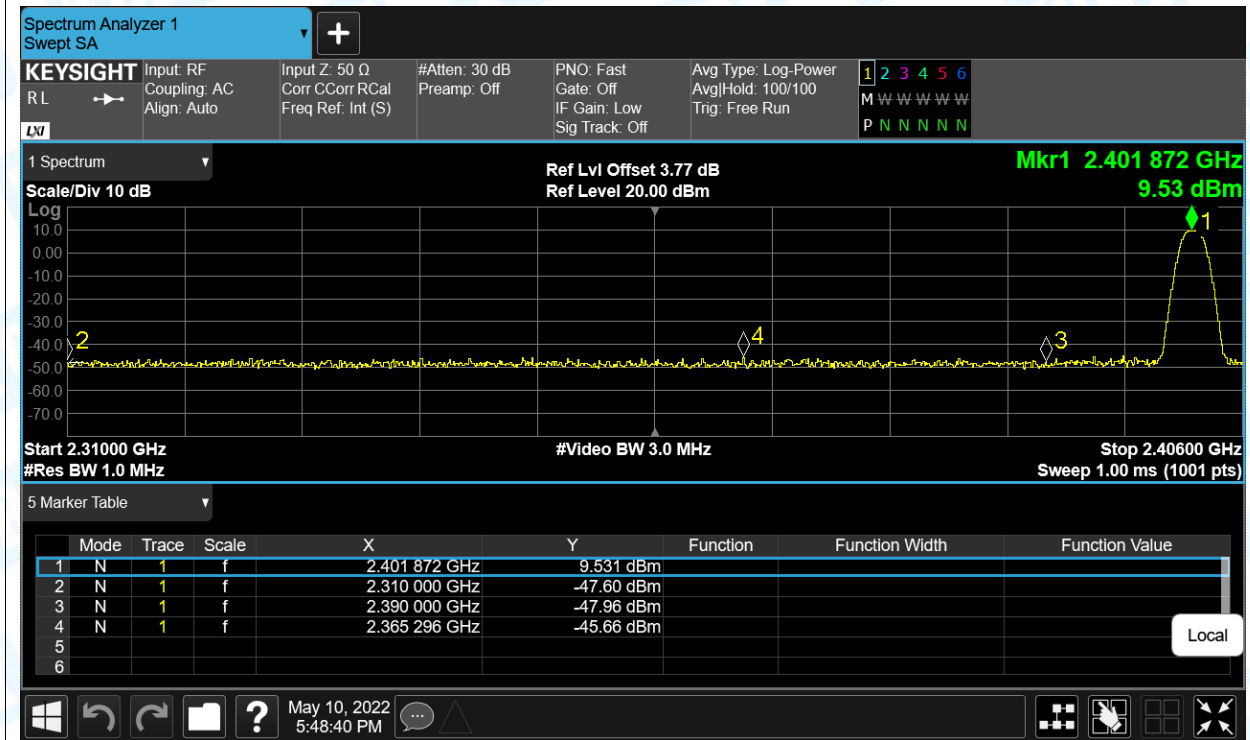


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

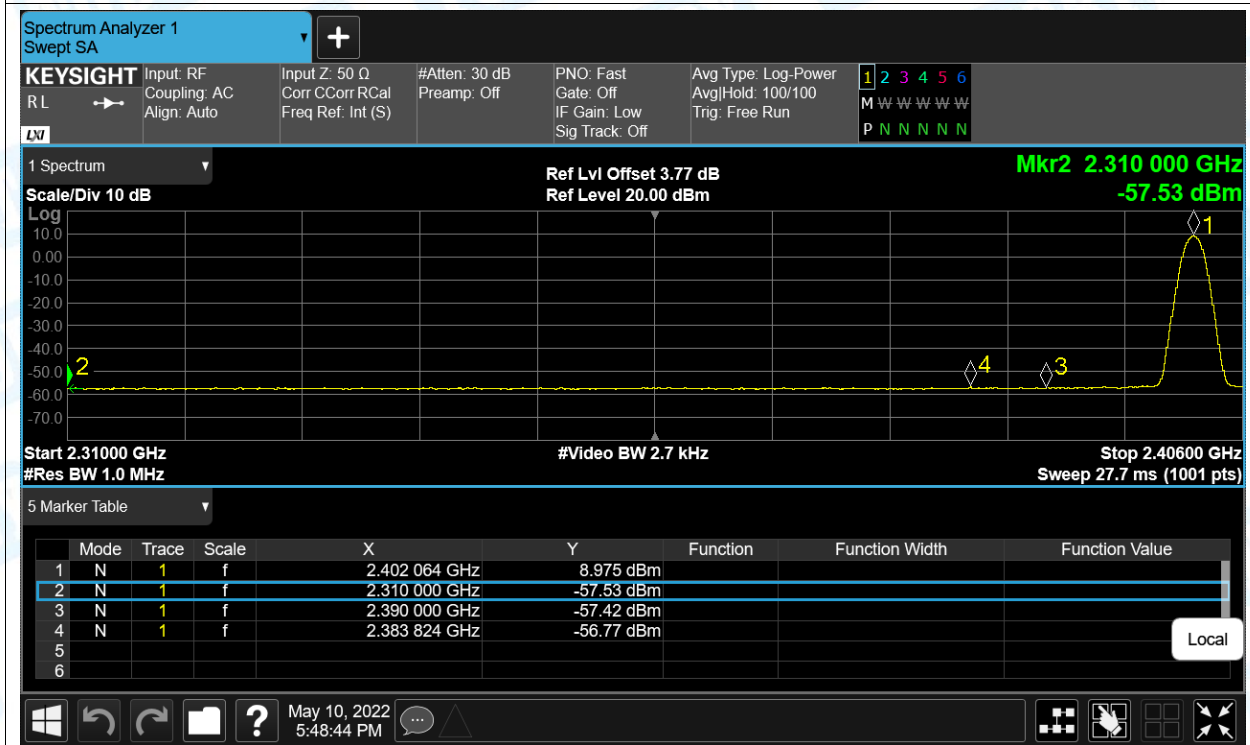


Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

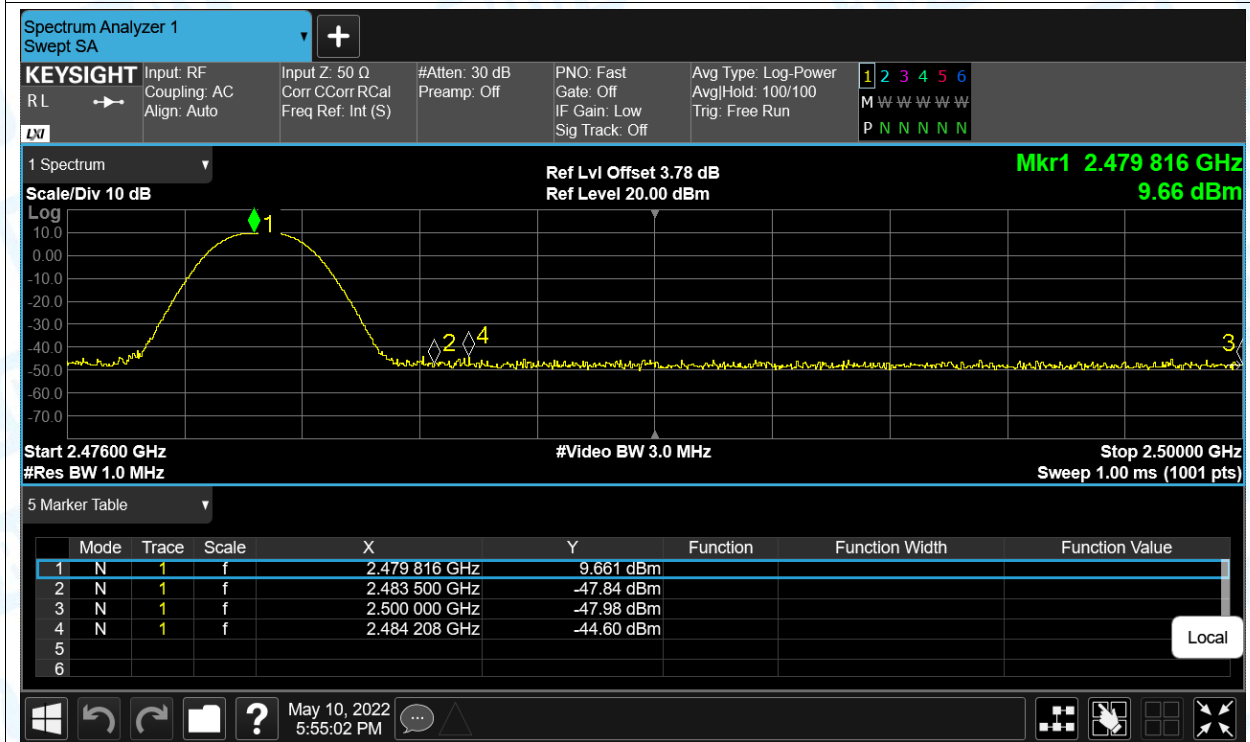


Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

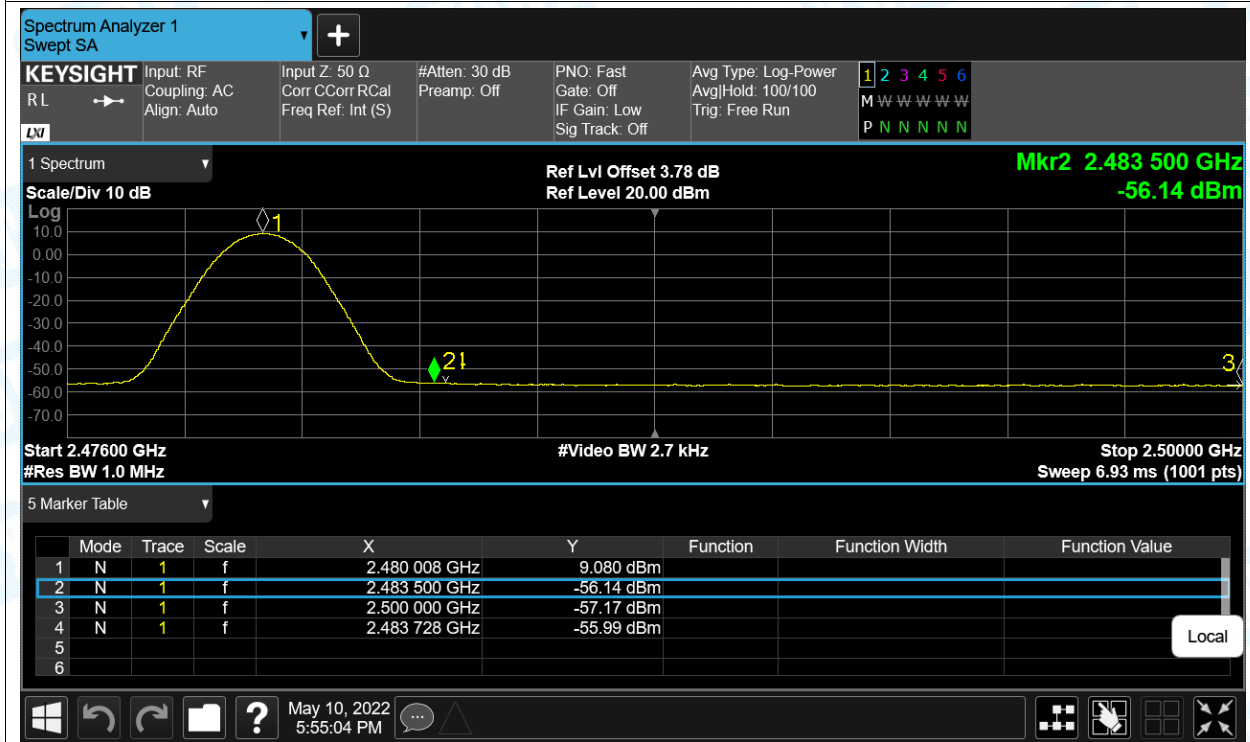


Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Peak

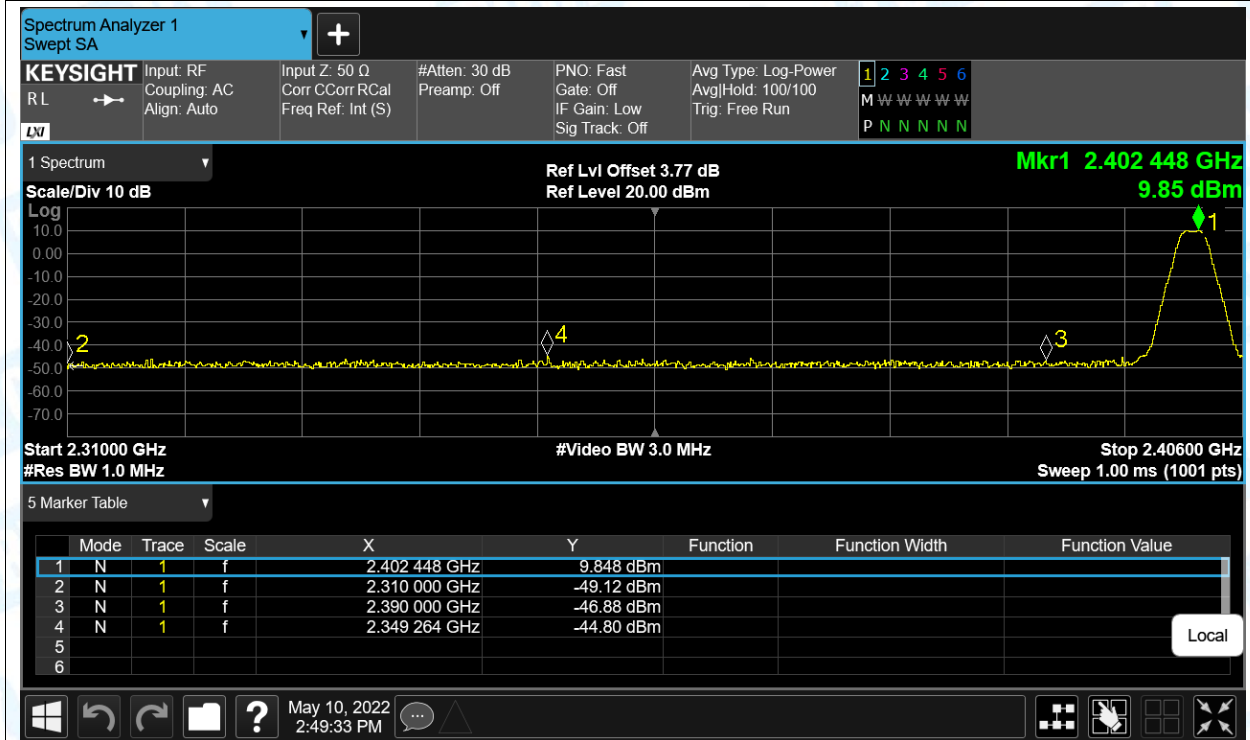


Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Average

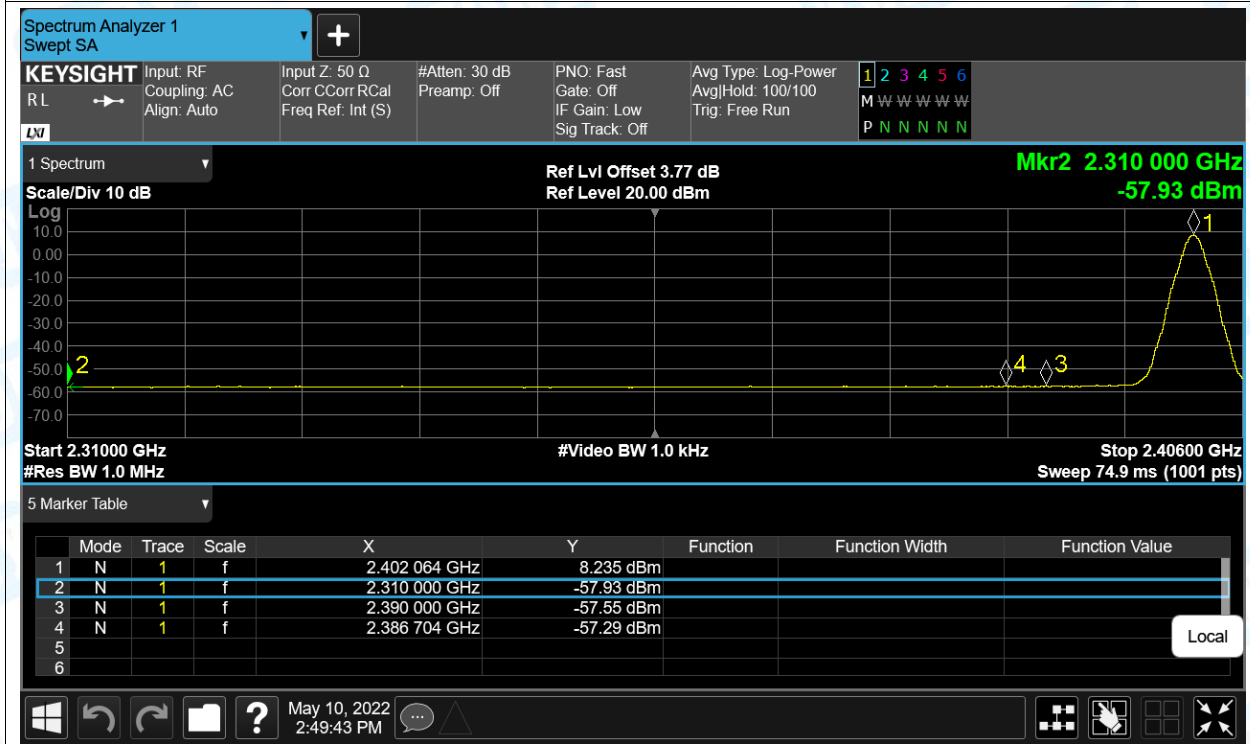

Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Peak

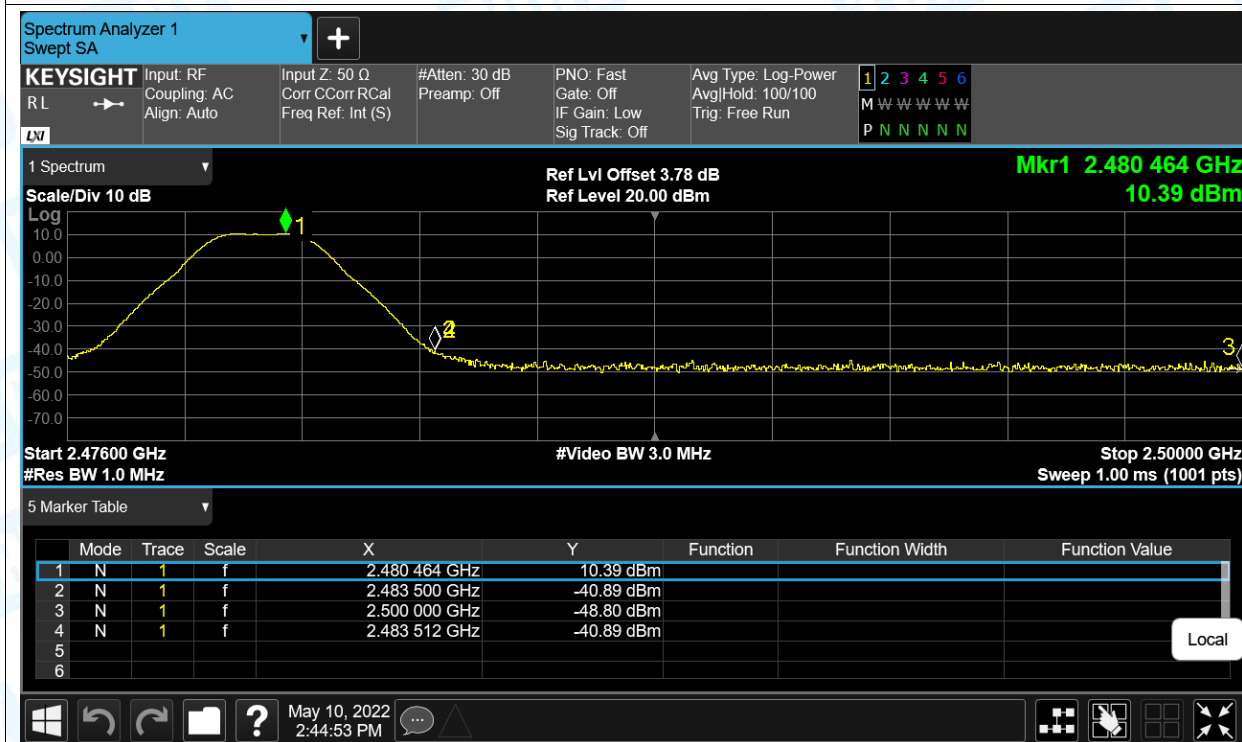

Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Average

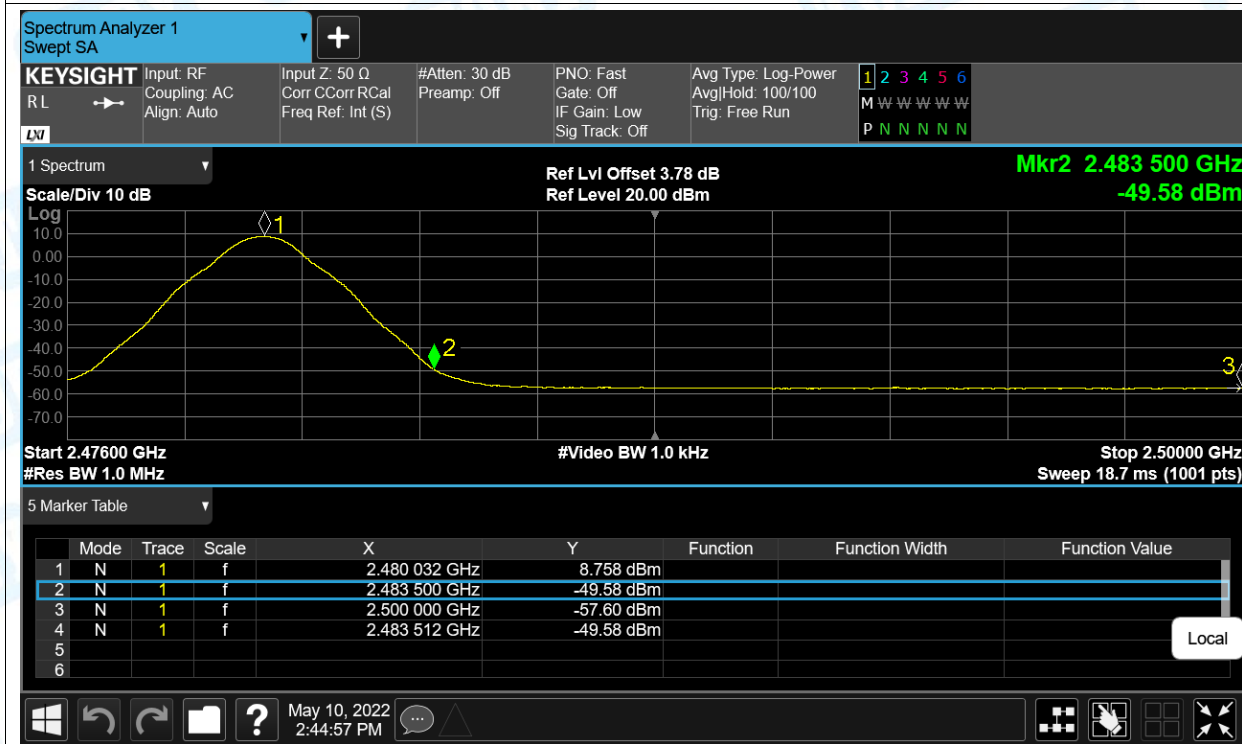

-----End of the report-----