

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G--Horizontal-TX

Test result

Project Number: Test

Test Time: 2024-08-12_13.35.14

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

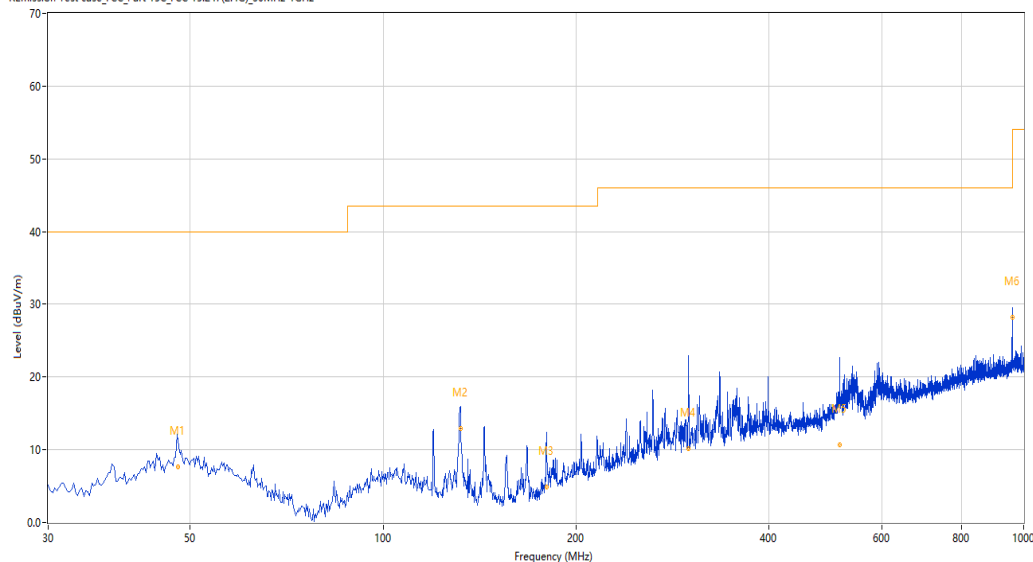

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.798	13.88	-24.72	40.0	26.12	Peak	223.10	121	Horizontal	Pass
1*	47.798	7.63	-24.72	40.0	32.37	QP	223.10	121	Horizontal	Pass
2	132.004	29.05	-29.62	43.5	14.45	Peak	166.80	228	Horizontal	Pass
2*	132.004	12.91	-29.62	43.5	30.59	QP	166.80	228	Horizontal	Pass
3	180.014	21.15	-28.88	43.5	22.35	Peak	0.00	288	Horizontal	Pass
3*	180.014	4.88	-28.88	43.5	38.62	QP	0.00	288	Horizontal	Pass
4	300.081	26.56	-24.05	46.0	19.44	Peak	26.20	210	Horizontal	Pass
4*	300.081	10.21	-24.05	46.0	35.79	QP	26.20	210	Horizontal	Pass
5	516.103	22.01	-18.79	46.0	23.99	Peak	0.00	101	Horizontal	Pass
5*	516.103	10.73	-18.79	46.0	35.27	QP	0.00	101	Horizontal	Pass
6	959.673	33.15	-10.48	46.0	12.85	Peak	0.00	222	Horizontal	Pass
6*	959.673	28.15	-10.48	46.0	17.85	QP	0.00	222	Horizontal	Pass

Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-12_13.45.30

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

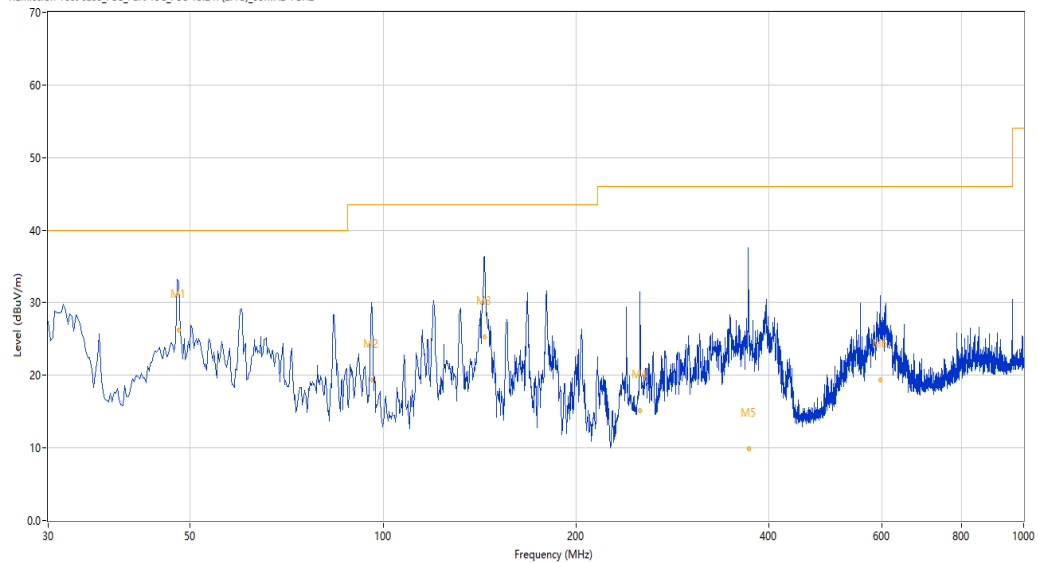

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.948	41.31	-24.72	40.0	-1.31	Peak	30.70	102	Vertical	N/A
1*	47.948	26.23	-24.72	40.0	13.77	QP	30.70	102	Vertical	Pass
2	95.926	34.21	-27.05	43.5	9.29	Peak	38.30	163	Vertical	Pass
2*	95.926	19.35	-27.05	43.5	24.15	QP	38.30	163	Vertical	Pass
3	143.938	43.17	-30.20	43.5	0.33	Peak	255.60	103	Vertical	Pass
3*	143.938	25.26	-30.20	43.5	18.24	QP	255.60	103	Vertical	Pass
4	251.700	24.77	-24.78	46.0	21.23	Peak	257.30	291	Vertical	Pass
4*	251.700	15.17	-24.78	46.0	30.83	QP	257.30	291	Vertical	Pass
5	372.054	23.79	-22.28	46.0	22.21	Peak	360.00	101	Vertical	Pass
5*	372.054	9.87	-22.28	46.0	36.13	QP	360.00	101	Vertical	Pass
6	597.655	28.56	-16.01	46.0	17.44	Peak	25.30	102	Vertical	Pass
6*	597.655	19.41	-16.01	46.0	26.59	QP	25.30	102	Vertical	Pass

1-18G

2404MHz-Horizontal-TX

Test result

Project Number: Test

Test Time: 2024-08-12_14.37.42

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

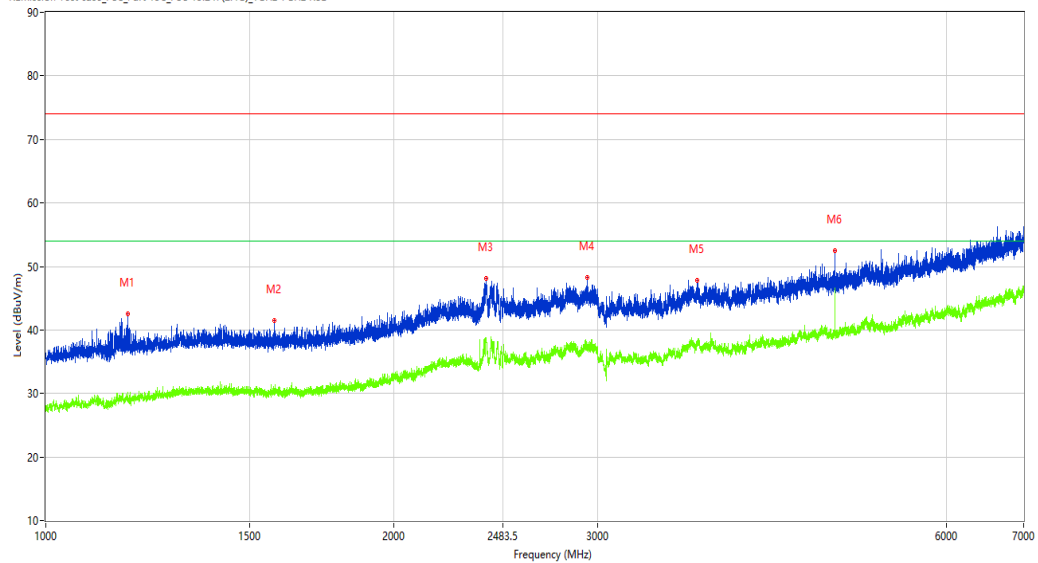

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1177.500	42.51	-13.59	74.0	31.49	Peak	231.90	100	Horizontal	Pass
1**	1177.500	30.25	-13.59	54.0	23.75	AV	231.90	100	Horizontal	Pass
2	1576.750	41.42	-13.05	74.0	32.58	Peak	129.70	100	Horizontal	Pass
2**	1576.750	29.75	-13.05	54.0	24.25	AV	129.70	100	Horizontal	Pass
3	2401.250	48.09	-4.69	74.0	25.91	Peak	190.40	100	Horizontal	Pass
3**	2401.250	38.65	-4.69	54.0	15.35	AV	190.40	100	Horizontal	Pass
4	2939.750	48.31	-4.36	74.0	25.69	Peak	174.80	100	Horizontal	Pass
4**	2939.750	37.51	-4.36	54.0	16.49	AV	174.80	100	Horizontal	Pass
5	3657.000	47.85	-2.24	74.0	26.15	Peak	158.80	100	Horizontal	Pass
5**	3657.000	37.67	-2.24	54.0	16.33	AV	158.80	100	Horizontal	Pass
6	4808.000	52.53	-1.36	74.0	21.47	Peak	94.30	100	Horizontal	Pass
6**	4808.000	46.63	-1.36	54.0	7.37	AV	94.30	100	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_15.46.54

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

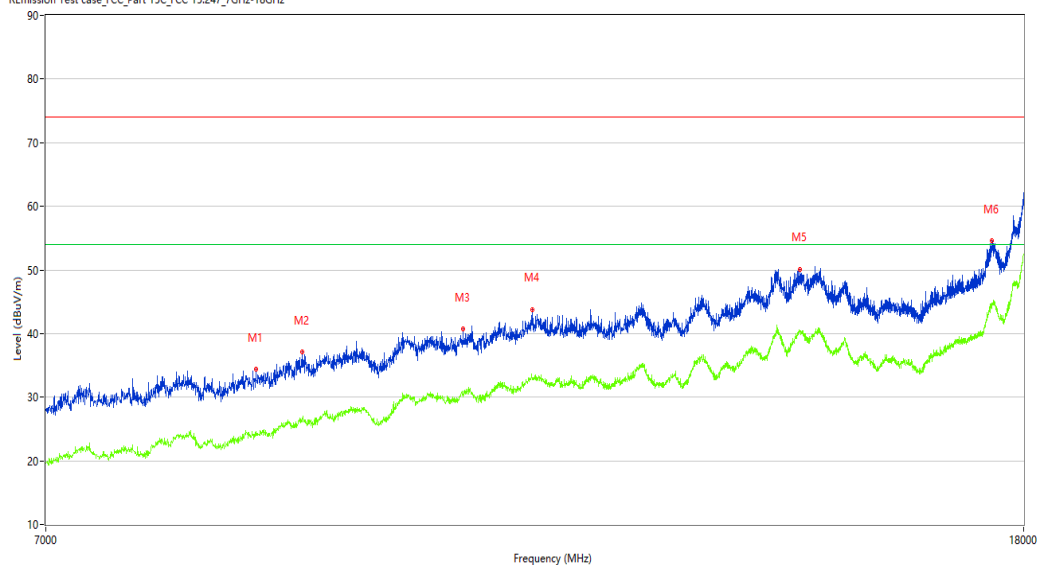

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8573.000	34.34	3.20	74.0	39.66	Peak	289.90	100	Horizontal	Pass
1**	8573.000	24.08	3.20	54.0	29.92	AV	289.90	100	Horizontal	Pass
2	8969.000	37.07	6.88	74.0	36.93	Peak	259.90	100	Horizontal	Pass
2**	8969.000	26.70	6.88	54.0	27.30	AV	259.90	100	Horizontal	Pass
3	10473.250	40.67	8.96	74.0	33.33	Peak	53.50	100	Horizontal	Pass
3**	10473.250	30.43	8.96	54.0	23.57	AV	53.50	100	Horizontal	Pass
4	11196.500	43.81	10.40	74.0	30.19	Peak	289.90	100	Horizontal	Pass
4**	11196.500	32.69	10.40	54.0	21.31	AV	289.90	100	Horizontal	Pass
5	14504.750	50.13	16.77	74.0	23.87	Peak	0.00	100	Horizontal	Pass
5**	14504.750	40.41	16.77	54.0	13.59	AV	0.00	100	Horizontal	Pass
6	17458.250	54.60	21.11	74.0	19.40	Peak	199.80	100	Horizontal	Pass
6**	17458.250	44.48	21.11	54.0	9.52	AV	199.80	100	Horizontal	Pass

2404MHz-Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-12_15.30.50

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.7

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

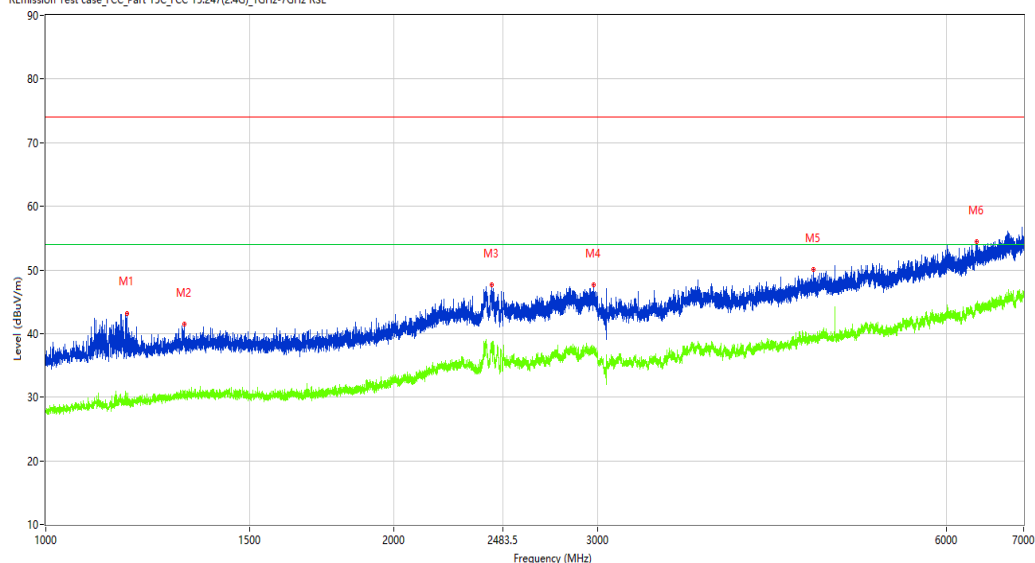

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1175.750	43.20	-13.53	74.0	30.80	Peak	110.50	100	Vertical	Pass
1**	1175.750	28.86	-13.53	54.0	25.14	AV	110.50	100	Vertical	Pass
2	1316.500	41.46	-12.92	74.0	32.54	Peak	360.00	100	Vertical	Pass
2**	1316.500	30.82	-12.92	54.0	23.18	AV	360.00	100	Vertical	Pass
3	2427.750	47.62	-5.22	74.0	26.38	Peak	207.10	100	Vertical	Pass
3**	2427.750	37.90	-5.22	54.0	16.10	AV	207.10	100	Vertical	Pass
4	2975.500	47.60	-3.68	74.0	26.40	Peak	143.50	100	Vertical	Pass
4**	2975.500	37.16	-3.68	54.0	16.84	AV	143.50	100	Vertical	Pass
5	4609.500	50.10	-1.32	74.0	23.90	Peak	283.10	100	Vertical	Pass
5**	4609.500	39.58	-1.32	54.0	14.42	AV	283.10	100	Vertical	Pass
6	6371.500	54.49	2.60	74.0	19.51	Peak	268.10	100	Vertical	Pass
6**	6371.500	44.09	2.60	54.0	9.91	AV	268.10	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_15.34.32

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A


Work Addition: TX

Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

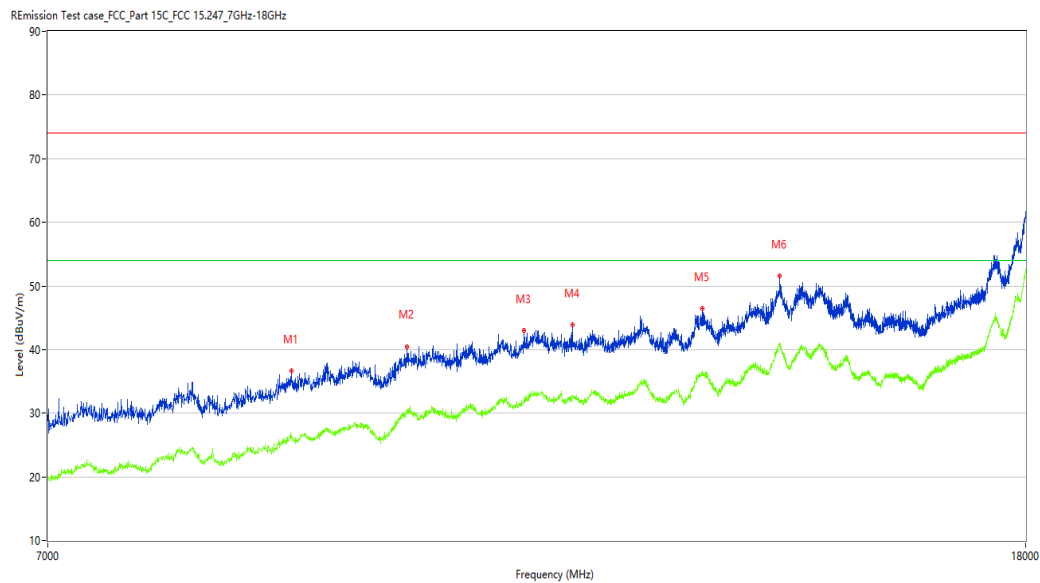

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8856.250	36.67	4.42	74.0	37.33	Peak	232.00	100	Vertical	Pass
1**	8856.250	26.65	4.42	54.0	27.35	AV	232.00	100	Vertical	Pass
2	9901.250	40.51	8.77	74.0	33.49	Peak	0.00	100	Vertical	Pass
2**	9901.250	30.65	8.77	54.0	23.35	AV	0.00	100	Vertical	Pass
3	11086.500	43.00	9.49	74.0	31.00	Peak	164.30	100	Vertical	Pass
3**	11086.500	32.15	9.49	54.0	21.85	AV	164.30	100	Vertical	Pass
4	11617.250	43.93	10.41	74.0	30.07	Peak	0.40	100	Vertical	Pass
4**	11617.250	32.93	10.41	54.0	21.07	AV	0.40	100	Vertical	Pass
5	13168.250	46.46	13.14	74.0	27.54	Peak	124.80	100	Vertical	Pass
5**	13168.250	36.63	13.14	54.0	17.37	AV	124.80	100	Vertical	Pass
6	14196.750	51.51	18.48	74.0	22.49	Peak	209.80	100	Vertical	Pass
6**	14196.750	40.86	18.48	54.0	13.14	AV	209.80	100	Vertical	Pass

2442MHz-Horizontal-TX

Test result

Project Number: Test

Test Time: 2024-08-12_14.45.28

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.7

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

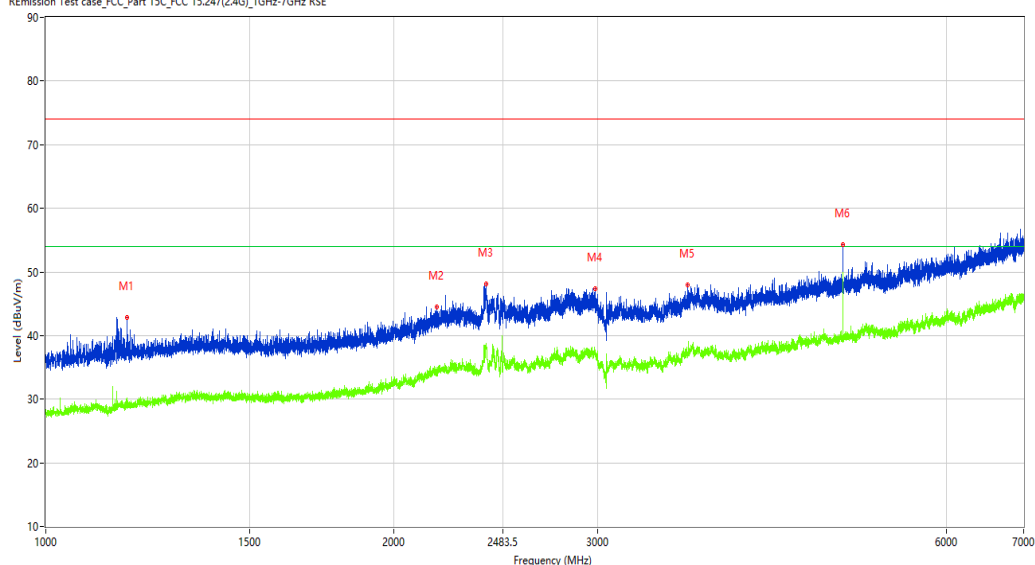

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1175.000	42.85	-13.51	74.0	31.15	Peak	241.10	100	Horizontal	Pass
1**	1175.000	30.14	-13.51	54.0	23.86	AV	241.10	100	Horizontal	Pass
2	2175.500	44.44	-8.41	74.0	29.56	Peak	257.40	100	Horizontal	Pass
2**	2175.500	33.82	-8.41	54.0	20.18	AV	257.40	100	Horizontal	Pass
3	2401.500	48.10	-4.70	74.0	25.90	Peak	8.50	100	Horizontal	Pass
3**	2401.500	38.44	-4.70	54.0	15.56	AV	8.50	100	Horizontal	Pass
4	2983.500	47.33	-3.61	74.0	26.67	Peak	356.90	100	Horizontal	Pass
4**	2983.500	37.40	-3.61	54.0	16.60	AV	356.90	100	Horizontal	Pass
5	3586.000	47.94	-3.04	74.0	26.06	Peak	216.50	100	Horizontal	Pass
5**	3586.000	37.24	-3.04	54.0	16.76	AV	216.50	100	Horizontal	Pass
6	4885.000	54.34	-0.83	74.0	19.66	Peak	341.60	100	Horizontal	Pass
6**	4885.000	46.67	-0.83	54.0	7.33	AV	341.60	100	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_15.45.04

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

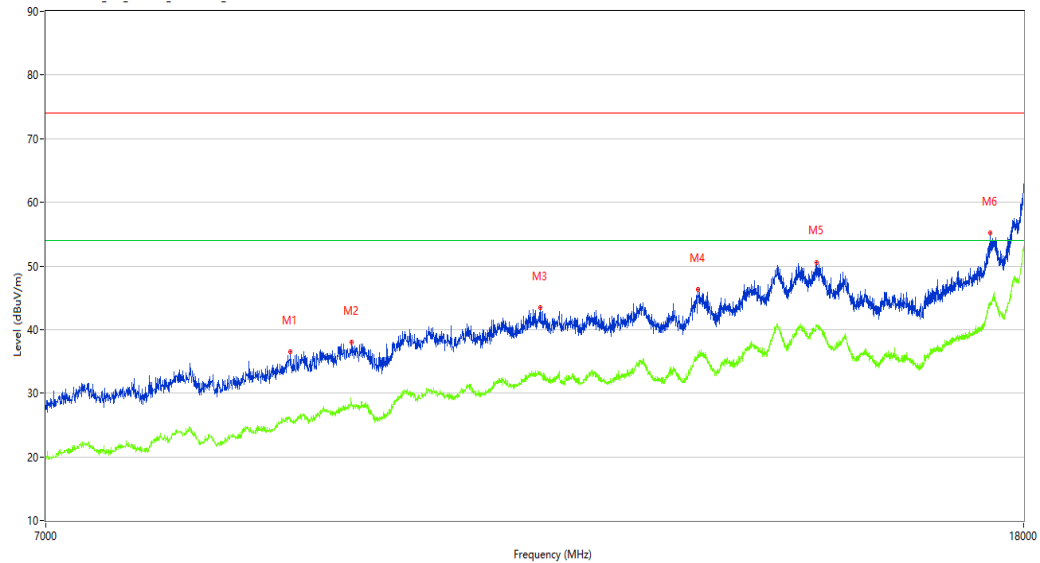

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8867.250	36.46	4.43	74.0	37.54	Peak	302.50	100	Horizontal	Pass
1**	8867.250	26.15	4.43	54.0	27.85	AV	302.50	100	Horizontal	Pass
2	9406.250	38.04	6.71	74.0	35.96	Peak	103.10	100	Horizontal	Pass
2**	9406.250	28.15	6.71	54.0	25.85	AV	103.10	100	Horizontal	Pass
3	11284.500	43.42	11.52	74.0	30.58	Peak	279.10	100	Horizontal	Pass
3**	11284.500	32.76	11.52	54.0	21.24	AV	279.10	100	Horizontal	Pass
4	13143.500	46.31	13.08	74.0	27.69	Peak	42.80	100	Horizontal	Pass
4**	13143.500	36.02	13.08	54.0	17.98	AV	42.80	100	Horizontal	Pass
5	14733.000	50.59	17.62	74.0	23.41	Peak	231.70	100	Horizontal	Pass
5**	14733.000	40.38	17.62	54.0	13.62	AV	231.70	100	Horizontal	Pass
6	17422.500	55.23	20.38	74.0	18.77	Peak	42.80	100	Horizontal	Pass
6**	17422.500	44.27	20.38	54.0	9.73	AV	42.80	100	Horizontal	Pass

2442MHz-Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-12_15.21.44

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.7

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

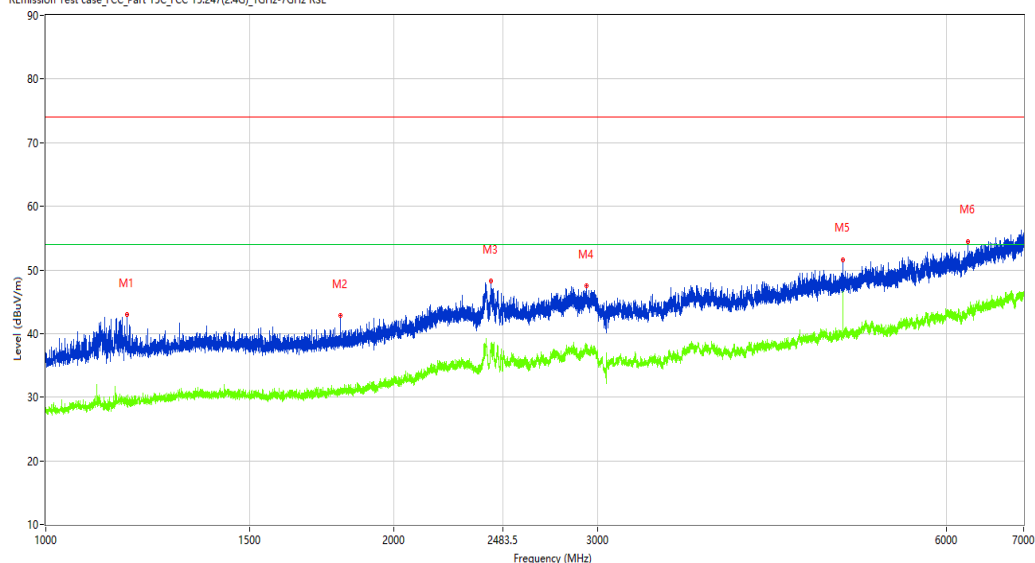

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1176.000	43.01	-13.54	74.0	30.99	Peak	154.60	100	Vertical	Pass
1**	1176.000	29.38	-13.54	54.0	24.62	AV	154.60	100	Vertical	Pass
2	1797.500	42.81	-12.47	74.0	31.19	Peak	271.70	100	Vertical	Pass
2**	1797.500	30.60	-12.47	54.0	23.40	AV	271.70	100	Vertical	Pass
3	2426.750	48.25	-5.20	74.0	25.75	Peak	108.40	100	Vertical	Pass
3**	2426.750	38.24	-5.20	54.0	15.76	AV	108.40	100	Vertical	Pass
4	2930.500	47.50	-4.65	74.0	26.50	Peak	325.20	100	Vertical	Pass
4**	2930.500	37.43	-4.65	54.0	16.57	AV	325.20	100	Vertical	Pass
5	4884.000	51.61	-0.83	74.0	22.39	Peak	30.10	100	Vertical	Pass
5**	4884.000	46.50	-0.83	54.0	7.50	AV	30.10	100	Vertical	Pass
6	6265.000	54.51	2.06	74.0	19.49	Peak	100.40	100	Vertical	Pass
6**	6265.000	44.22	2.06	54.0	9.78	AV	100.40	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_15.37.21

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

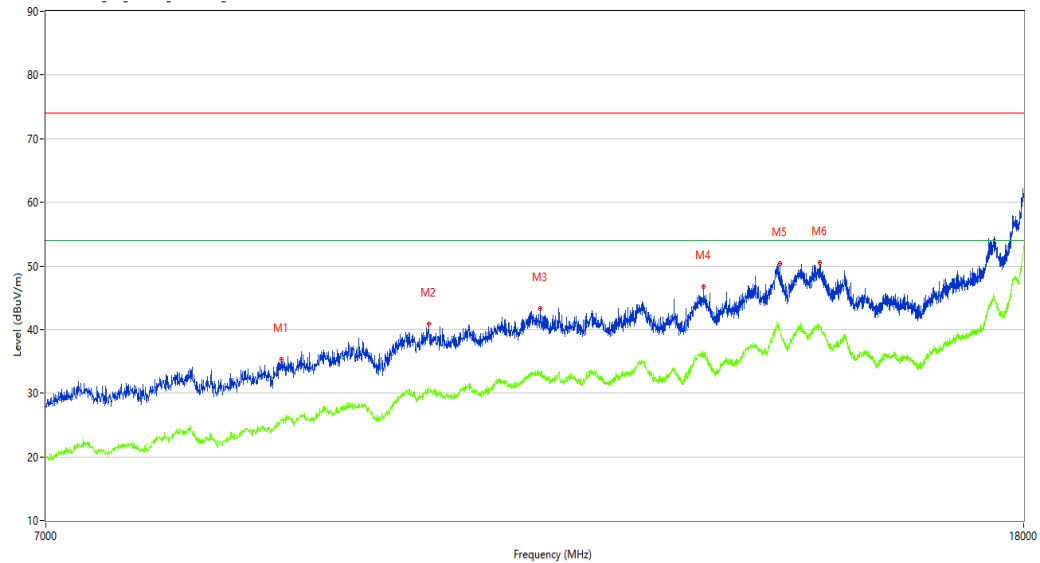

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8790.250	35.30	4.08	74.0	38.70	Peak	222.30	100	Vertical	Pass
1**	8790.250	25.81	4.08	54.0	28.19	AV	222.30	100	Vertical	Pass
2	10132.250	40.87	8.51	74.0	33.13	Peak	222.30	100	Vertical	Pass
2**	10132.250	30.67	8.51	54.0	23.33	AV	222.30	100	Vertical	Pass
3	11287.250	43.28	11.53	74.0	30.72	Peak	348.00	100	Vertical	Pass
3**	11287.250	32.76	11.53	54.0	21.24	AV	348.00	100	Vertical	Pass
4	13215.000	46.69	13.25	74.0	27.31	Peak	287.00	100	Vertical	Pass
4**	13215.000	36.12	13.25	54.0	17.88	AV	287.00	100	Vertical	Pass
5	14224.250	50.36	17.91	74.0	23.64	Peak	98.40	100	Vertical	Pass
5**	14224.250	40.04	17.91	54.0	13.96	AV	98.40	100	Vertical	Pass
6	14788.000	50.53	17.64	74.0	23.47	Peak	0.00	100	Vertical	Pass
6**	14788.000	40.38	17.64	54.0	13.62	AV	0.00	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_14.50.06

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.7

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

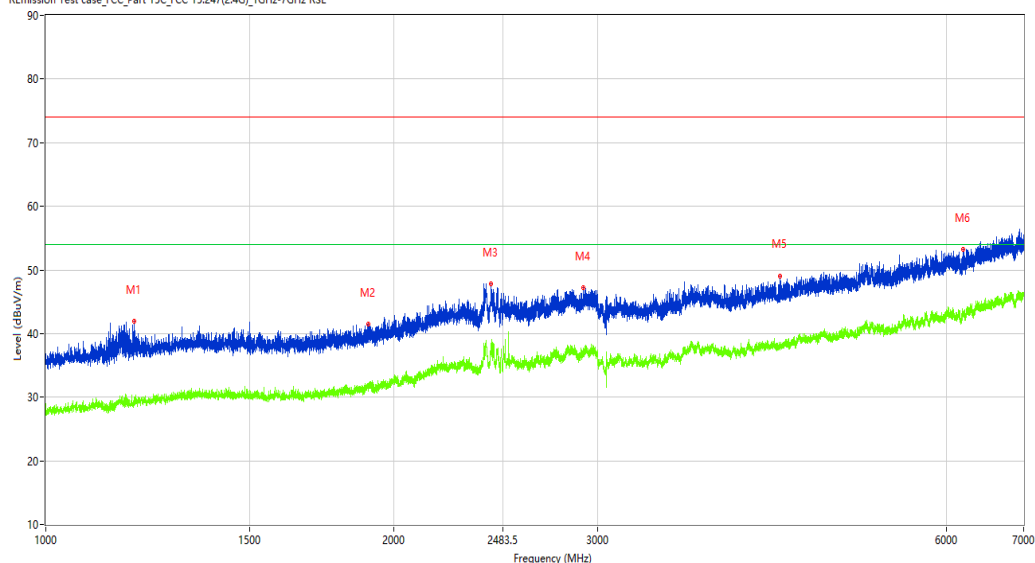

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1192.250	41.89	-13.66	74.0	32.11	Peak	192.50	100	Horizontal	Pass
1**	1192.250	30.07	-13.66	54.0	23.93	AV	192.50	100	Horizontal	Pass
2	1899.500	41.48	-11.76	74.0	32.52	Peak	324.60	100	Horizontal	Pass
2**	1899.500	30.99	-11.76	54.0	23.01	AV	324.60	100	Horizontal	Pass
3	2426.000	47.85	-5.18	74.0	26.15	Peak	132.60	100	Horizontal	Pass
3**	2426.000	38.51	-5.18	54.0	15.49	AV	132.60	100	Horizontal	Pass
4	2914.500	47.26	-4.51	74.0	26.74	Peak	192.50	100	Horizontal	Pass
4**	2914.500	36.89	-4.51	54.0	17.11	AV	192.50	100	Horizontal	Pass
5	4313.500	49.08	-2.17	74.0	24.92	Peak	45.70	100	Horizontal	Pass
5**	4313.500	38.07	-2.17	54.0	15.93	AV	45.70	100	Horizontal	Pass
6	6206.500	53.24	1.57	74.0	20.76	Peak	175.00	100	Horizontal	Pass
6**	6206.500	43.01	1.57	54.0	10.99	AV	175.00	100	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_15.43.03

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A


Work Addition: TX

Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

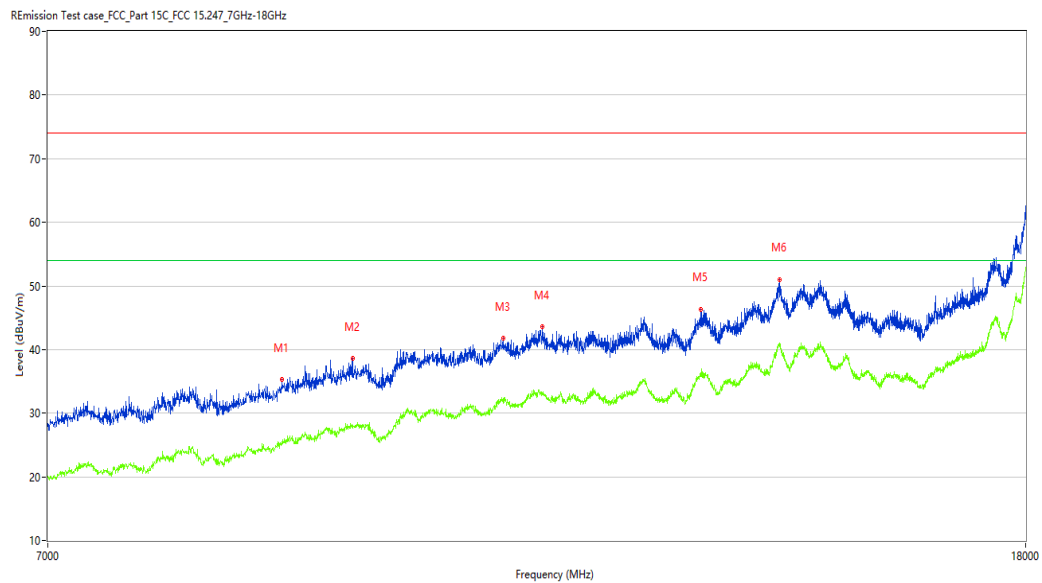

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8776.500	35.29	3.99	74.0	38.71	Peak	0.00	100	Horizontal	Pass
1**	8776.500	25.04	3.99	54.0	28.96	AV	0.00	100	Horizontal	Pass
2	9395.250	38.60	6.72	74.0	35.40	Peak	331.60	100	Horizontal	Pass
2**	9395.250	27.87	6.72	54.0	26.13	AV	331.60	100	Horizontal	Pass
3	10869.250	41.81	10.20	74.0	32.19	Peak	243.20	100	Horizontal	Pass
3**	10869.250	32.20	10.20	54.0	21.80	AV	243.20	100	Horizontal	Pass
4	11287.250	43.59	11.53	74.0	30.41	Peak	83.60	100	Horizontal	Pass
4**	11287.250	32.90	11.53	54.0	21.10	AV	83.60	100	Horizontal	Pass
5	13154.500	46.25	13.11	74.0	27.75	Peak	243.20	100	Horizontal	Pass
5**	13154.500	36.33	13.11	54.0	17.67	AV	243.20	100	Horizontal	Pass
6	14188.500	51.04	18.65	74.0	22.96	Peak	301.80	100	Horizontal	Pass
6**	14188.500	40.92	18.65	54.0	13.08	AV	301.80	100	Horizontal	Pass

2480MHz-Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-12_15.17.37

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.7

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

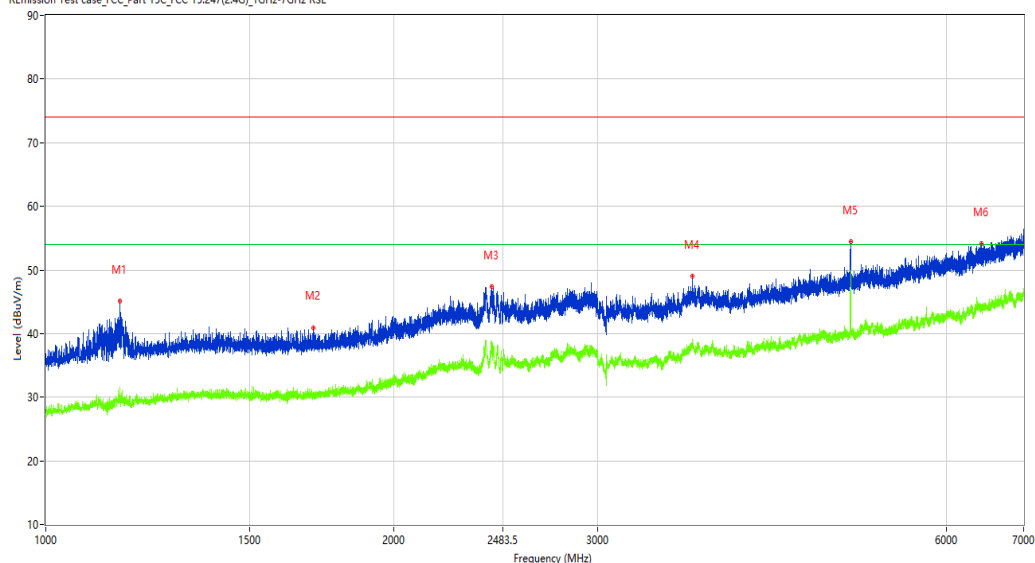

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1159.000	45.13	-13.96	74.0	28.87	Peak	170.60	100	Vertical	Pass
1**	1159.000	31.61	-13.96	54.0	22.39	AV	170.60	100	Vertical	Pass
2	1703.750	40.93	-12.87	74.0	33.07	Peak	318.90	100	Vertical	Pass
2**	1703.750	30.36	-12.87	54.0	23.64	AV	318.90	100	Vertical	Pass
3	2427.500	47.36	-5.22	74.0	26.64	Peak	302.20	100	Vertical	Pass
3**	2427.500	37.91	-5.22	54.0	16.09	AV	302.20	100	Vertical	Pass
4	3623.000	48.96	-2.26	74.0	25.04	Peak	229.00	100	Vertical	Pass
4**	3623.000	38.32	-2.26	54.0	15.68	AV	229.00	100	Vertical	Pass
5	4960.500	54.39	-0.63	74.0	19.61	Peak	0.00	100	Vertical	Pass
5**	4960.500	49.87	-0.63	54.0	4.13	AV	0.00	100	Vertical	Pass
6	6431.500	54.17	2.84	74.0	19.83	Peak	360.00	100	Vertical	Pass
6**	6431.500	44.01	2.84	54.0	9.99	AV	360.00	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_15.40.15

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

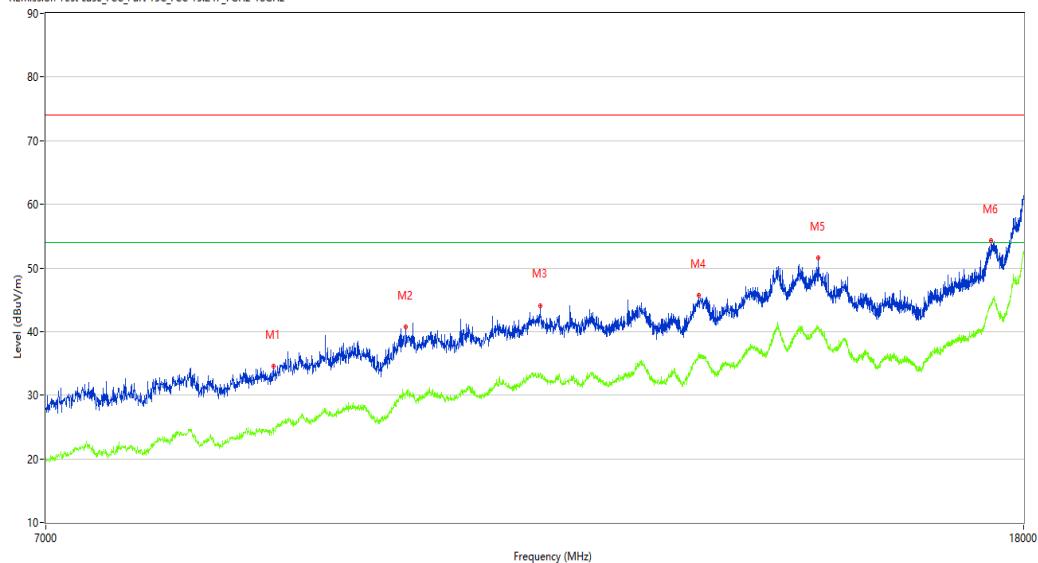

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8721.500	34.54	3.68	74.0	39.46	Peak	33.20	100	Vertical	Pass
1**	8721.500	23.87	3.68	54.0	30.13	AV	33.20	100	Vertical	Pass
2	9912.250	40.72	8.94	74.0	33.28	Peak	33.20	100	Vertical	Pass
2**	9912.250	30.05	8.94	54.0	23.95	AV	33.20	100	Vertical	Pass
3	11284.500	44.10	11.52	74.0	29.90	Peak	102.40	100	Vertical	Pass
3**	11284.500	33.34	11.52	54.0	20.66	AV	102.40	100	Vertical	Pass
4	13154.500	45.75	13.11	74.0	28.25	Peak	252.40	100	Vertical	Pass
4**	13154.500	36.63	13.11	54.0	17.37	AV	252.40	100	Vertical	Pass
5	14755.000	51.56	17.88	74.0	22.44	Peak	156.80	100	Vertical	Pass
5**	14755.000	40.71	17.88	54.0	13.29	AV	156.80	100	Vertical	Pass
6	17441.749	54.27	20.75	74.0	19.73	Peak	311.80	100	Vertical	Pass
6**	17441.749	44.42	20.75	54.0	9.58	AV	311.80	100	Vertical	Pass

Bandedge-2404MHz- Horizontal –TX

Test result

Project Number: Test

Test Time: 2024-08-12_14.34.55

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A


Work Addition: TX

Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

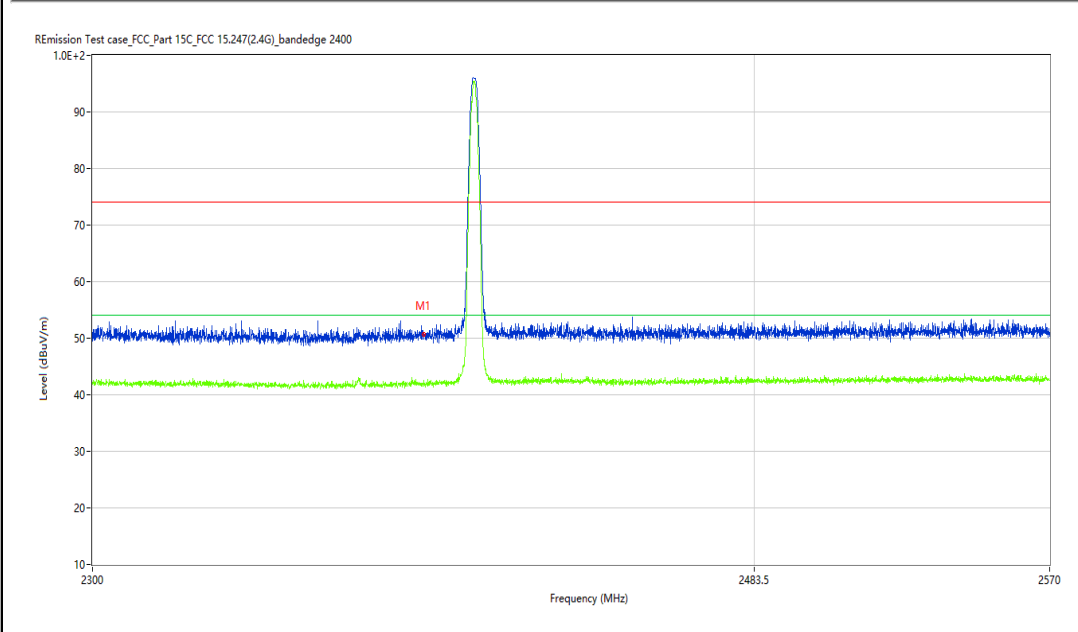

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.74	-10.27	74.0	23.26	Peak	340.00	100	Horizontal	Pass
1**	2390.000	42.01	-10.27	54.0	11.99	AV	340.00	100	Horizontal	Pass

Bandedge-2404MHz- Vertical -TX

Test result

Project Number: Test

Test Time: 2024-08-12_13.58.04

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A


Work Addition: TX

Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

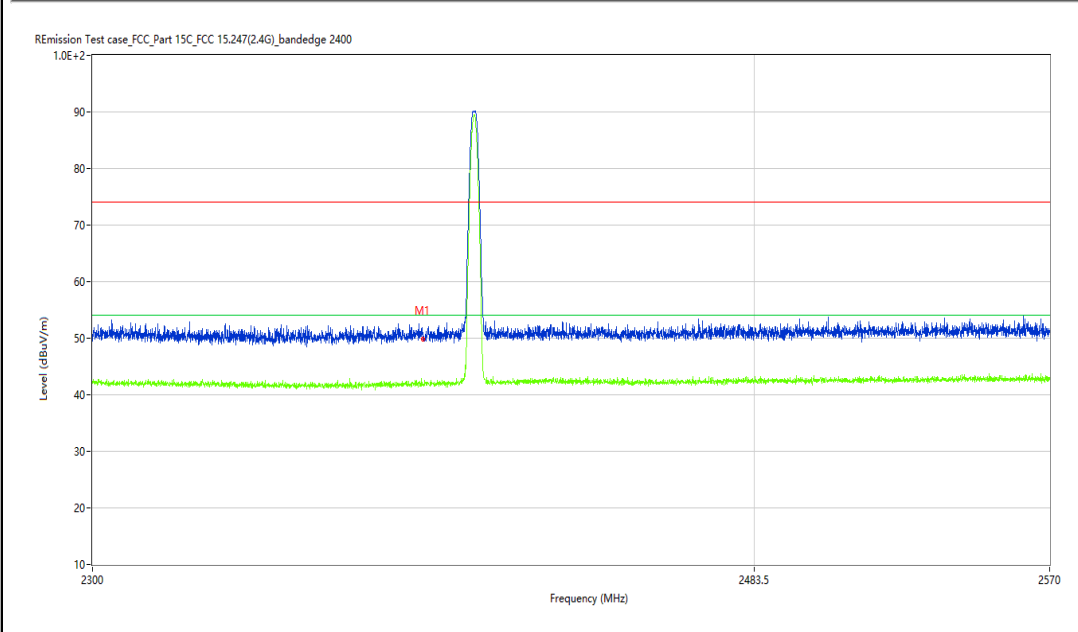

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.85	-10.27	74.0	24.15	Peak	91.91	100	Vertical	Pass
1**	2390.000	41.80	-10.27	54.0	12.20	AV	91.91	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-12_14.32.15

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A


Work Addition: TX

Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

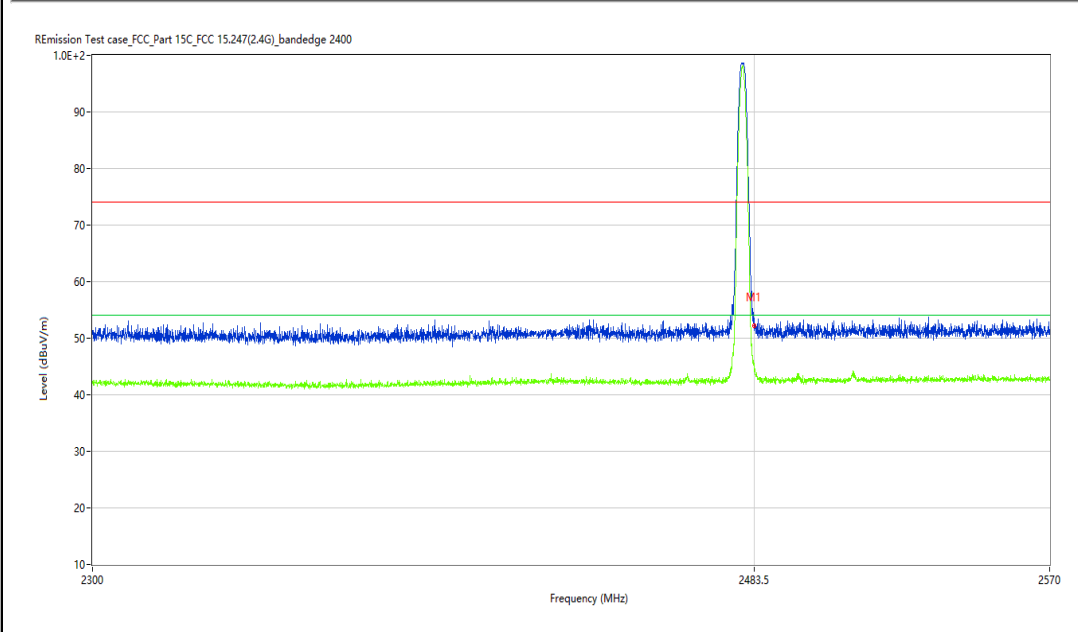

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.05	-9.82	74.0	21.95	Peak	179.43	100	Horizontal	Pass
1**	2483.500	44.21	-9.82	54.0	9.79	AV	179.43	100	Horizontal	Pass

Bandedge-2480MHz- Vertical –TX

Test result

Project Number: Test

Test Time: 2024-08-12_14.04.08

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 22.7

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-03#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

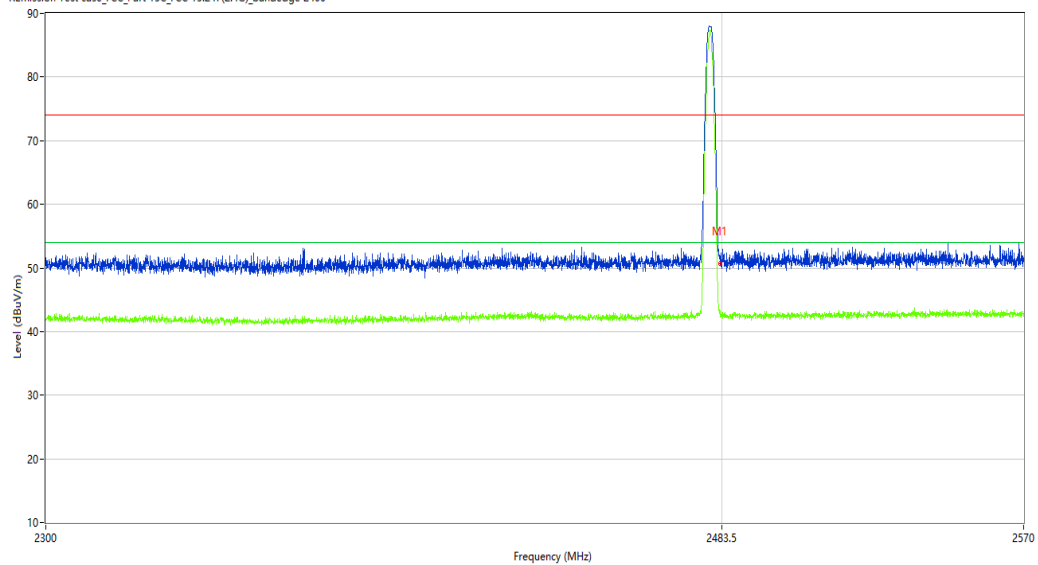

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.75	-9.82	74.0	23.25	Peak	316.71	100	Vertical	Pass
1**	2483.500	42.42	-9.82	54.0	11.58	AV	316.71	100	Vertical	Pass