

**Model: HTSM1-Control Pack**

2\*AA batteries, QCC3040, No Clone

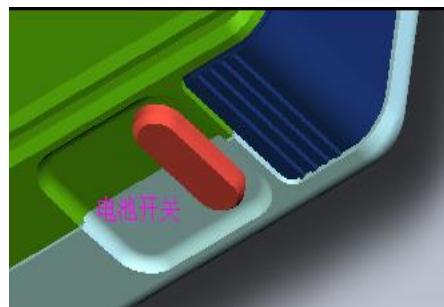
Front:



Back:



Battery switch:

**【KHz Frequency table in KHz】**

{ 174000,195500,217000,177000,178000,179000,180000 }

{ 175000,195500,216000,187000,188000,189000,190000 }

{ 480000,490000,500000,481000,482000,483000,484000 }

{ 470000,539000,608000,491000,492000,493000,494000 }

**【Key Function】:**

Round knob: Power on/off, wired earphone volume control

MENU

UP

Down

SELECT

Normally, press Menu to enter the main Menu. Then press Menu to exit the main Menu.

On the main menu, press Sel to select

Frequency band: B0/B1/B2/B3

Channel: CH 01/CH02/CH03

The middle is the frequency value

RF: Signal Strength

AF: Audio Level

M: Mute

Bottom Bluetooth status bar: B0= No connection. B\*= Pairing. B1= Connect one, B2= Connect two.

Battery low voltage 2.0V, low voltage automatically shut down in 3 minutes.

**【LED light Status】**

NO	Power off		Power On,LCD show on charging		
	On charging	Full charge	Low Battery voltage	Normal battery voltage	
1	Red/Green light off		LCD Show	Have signal	No signal
	LCD show it is on charging	LCD show it is fully charged	Red light flash,green light off	Red light off,Green light on.	Red light on,Green light off.

**【MENU】**

If there is no button for 60 seconds, the screen will turn off.

**【lock the keyboard】**

When the menu setting lock=ON, the keyboard will be locked when the LCD screen is off.

When the keyboard is locked, press and hold Menu for 1 second to unlock it.

**【Band Switch】**

Freq(MHz)	Band	V1(CK_VC1_A)	V2(DA_VC2_A)	V3(VC3_A)
<300	RF2	0	0	1
<520	RF3	0	1	0
<570	RF6	1	0	1
>=570	RF4	0	1	1

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

<over>