



TEST REPORT

FCC ID: 2BOG4-WWF001

Applicant: Ecommerce Ventures LLC

Address: 1500 Southland Cir NW, Suite H #1019, Atlanta, GA 30318 United States

Manufacturer: Ecommerce Ventures LLC

Address: 1500 Southland Cir NW, Suite H #1019, Atlanta, GA 30318 United States

EUT: EverMount Battery-operated Pet Water Fountain

Trade Mark: Whiskertons

Model Number: WWF001

Date of Receipt: Mar. 03, 2025

Test Date: Mar. 03, 2025 - Mar. 19, 2025

Date of Report: Mar. 19, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 Subpart C
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250305001R

Prepared (Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY.....	3
3. GENERAL INFORMATION.....	4
4. TEST INSTRUMENT USED.....	5
5. CONDUCTED EMISSION TEST.....	6
6. RADIATION EMISSION TEST.....	10
7. BANDWIDTH TEST.....	16
8. ANTENNA REQUIREMENT.....	17
9. SETUP PHOTOGRAPHS.....	17
10. EUT PHOTOGRAPHS.....	17

**1. VERSION**

Version No.	Date	Description
00	Mar. 19, 2025	Original

2. TEST SUMMARY

EMC Emission			
Test Item	Section in CFR 47	Result	Remark
AC Power Line Conducted Emission	15.207	PASS	
Spurious Emission	15.209(a)(f)	PASS	
20dB Bandwidth	15.215	PASS	
Antenna requirement	15.203	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test Lab: Shenzhen DL Testing Technology Co., Ltd.

101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1

Address: Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



3. GENERAL INFORMATION


3.1 Description of Device (EUT)

Product Name: EverMount Battery-operated Pet Water Fountain
Trade Mark: Whiskertons
Model No.: WWF001
Model Difference: N/A
Serial No.: N/A
Hardware version: H1.0
Software version: S1.0
Operation Frequency: 115kHz ~ 205KHz
Modulation type: MSK
Antenna Type: Inductive loop coil Antenna
Antenna gain: 0dBi
Power supply: DC 5V from adapter
DC 3.7V from battery
Wireless charge output: 5W(Max)
Model No.: PLH-A928
Adapter: Input: AC 100-240V~ 50/60Hz 0.28A
Output: 5V $\overline{\sim}$ 2A

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up



3.4 Test Mode Description

Mode1. Wireless Output Mode(5W)

Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode (99%) is showed in this report.

3.5 Test Auxiliary Equipment

None.

3.6 Test Uncertainty

Conducted Emission Uncertainty(150KHz-30MHz)	: $\pm 2.56\text{dB}$
20dB Bandwidth	: $\pm 0.5\text{kHz}$
Radiated Emission Uncertainty(9KHz-1GHz)	: $\pm 3.24\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
Clamp	COM-POWER	CLA-050	431071	Nov. 02, 2024	Nov. 01, 2025
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 02, 2024	Nov. 01, 2025
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 01, 2024	Oct. 31, 2025
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	002	Nov. 01, 2024	Oct. 31, 2025

For Radiated Emission Test (966 chamber)


Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
EMI Receiver	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
Amplifier	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
Loop Antenna	ZHINAN	ZN30900A	/	Nov. 01, 2024	Oct. 31, 2025
966 Cable 1#	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
966 Cable 2#	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025



5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

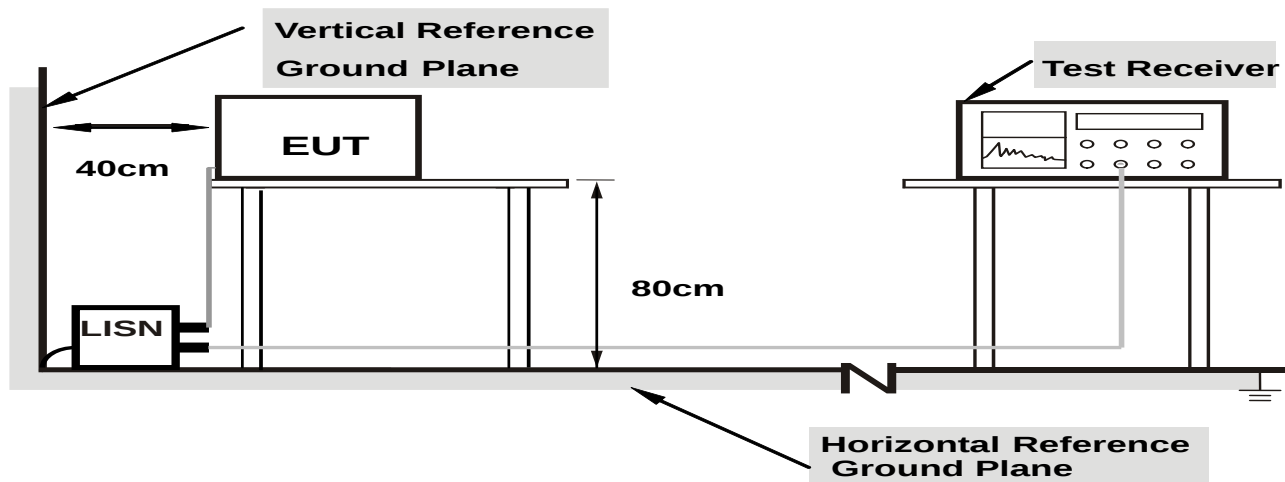

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

FCC Part 15 Subpart C

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC Part 15 Subpart C requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.10** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor

5.6 Test Result


PASS

Please refer to the following page.



Conducted Emission Test Data


Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

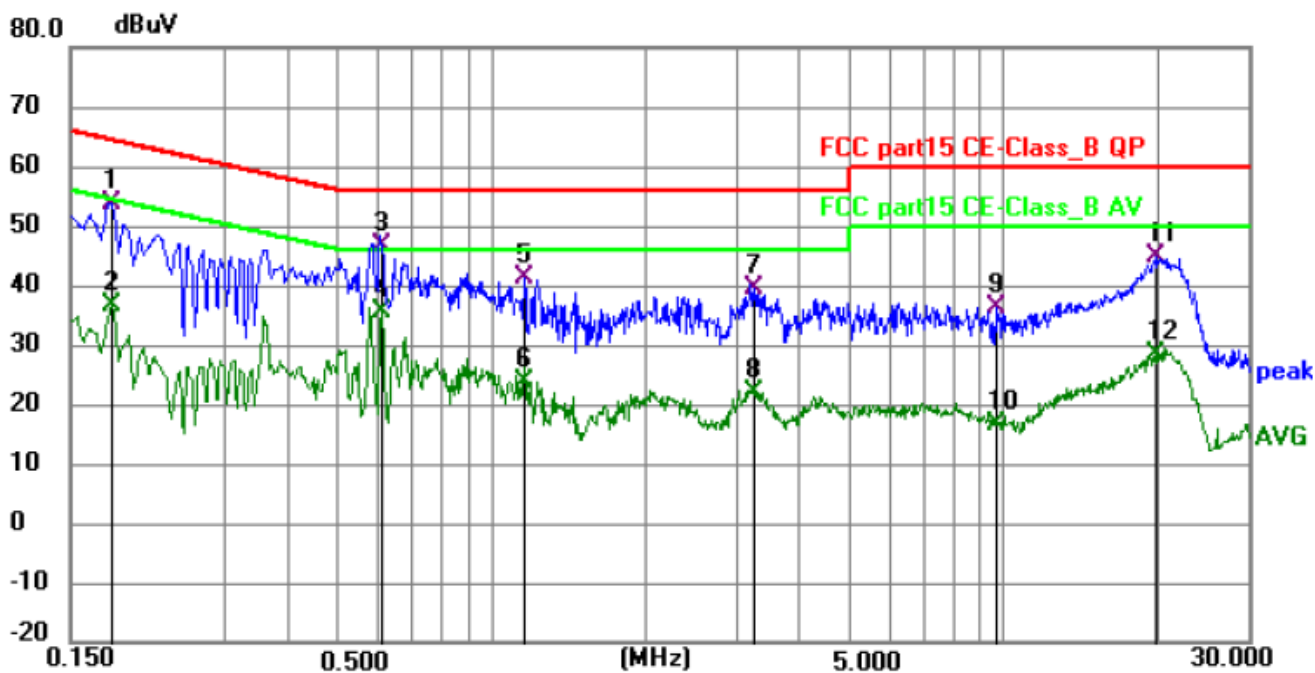

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1815	43.55	10.05	53.60	64.42	-10.82	QP	P	
2	0.1815	26.71	10.05	36.76	54.42	-17.66	AVG	P	
3 *	0.6090	36.49	10.13	46.62	56.00	-9.38	QP	P	
4	0.6090	25.33	10.13	35.46	46.00	-10.54	AVG	P	
5	1.1625	31.23	10.04	41.27	56.00	-14.73	QP	P	
6	1.1625	13.75	10.04	23.79	46.00	-22.21	AVG	P	
7	3.2595	29.22	10.15	39.37	56.00	-16.63	QP	P	
8	3.2595	11.97	10.15	22.12	46.00	-23.88	AVG	P	
9	9.6585	25.12	11.21	36.33	60.00	-23.67	QP	P	
10	9.6585	5.46	11.21	16.67	50.00	-33.33	AVG	P	
11	19.9320	32.91	12.06	44.97	60.00	-15.03	QP	P	
12	19.9320	16.19	12.06	28.25	50.00	-21.75	AVG	P	



Conducted Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

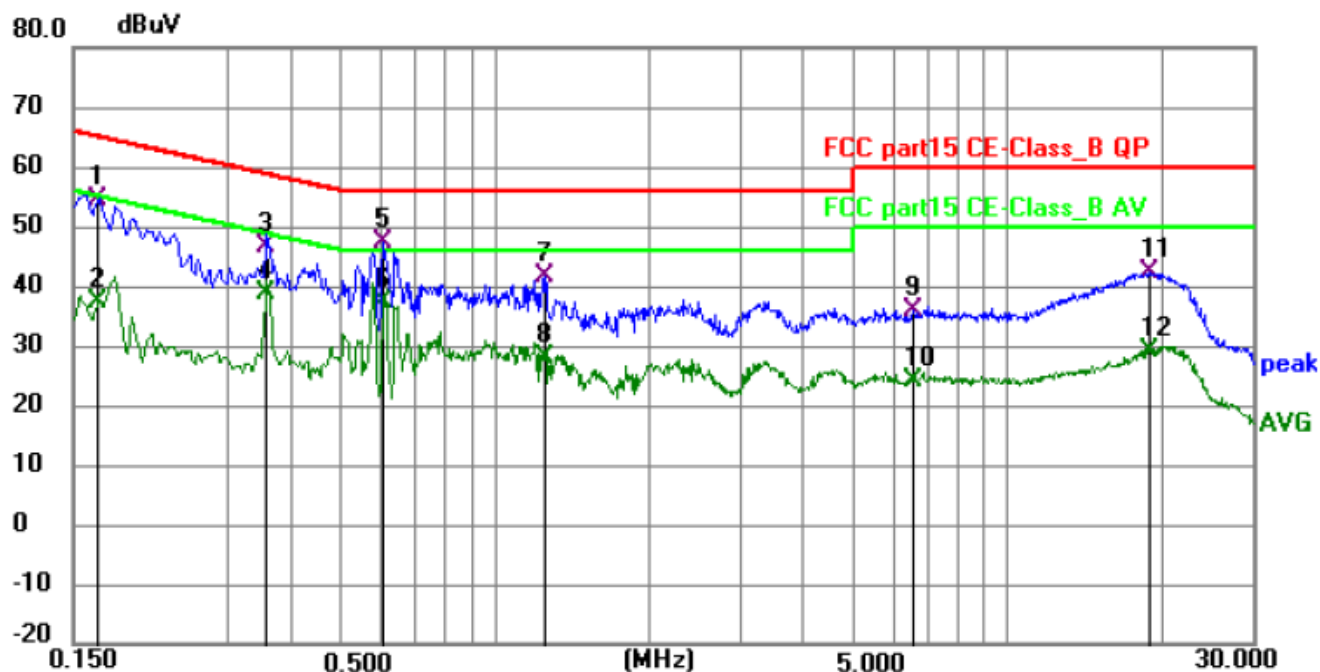


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	44.42	10.15	54.57	65.06	-10.49	QP	P	
2	0.1680	27.21	10.15	37.36	55.06	-17.70	AVG	P	
3	0.3570	36.41	10.26	46.67	58.80	-12.13	QP	P	
4	0.3570	28.39	10.26	38.65	48.80	-10.15	AVG	P	
5	0.6045	37.12	10.17	47.29	56.00	-8.71	QP	P	
6 *	0.6045	27.19	10.17	37.36	46.00	-8.64	AVG	P	
7	1.2480	31.36	10.10	41.46	56.00	-14.54	QP	P	
8	1.2480	17.86	10.10	27.96	46.00	-18.04	AVG	P	
9	6.5445	25.13	10.63	35.76	60.00	-24.24	QP	P	
10	6.5445	13.56	10.63	24.19	50.00	-25.81	AVG	P	
11	18.8745	30.40	11.85	42.25	60.00	-17.75	QP	P	
12	18.8745	17.09	11.85	28.94	50.00	-21.06	AVG	P	




6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

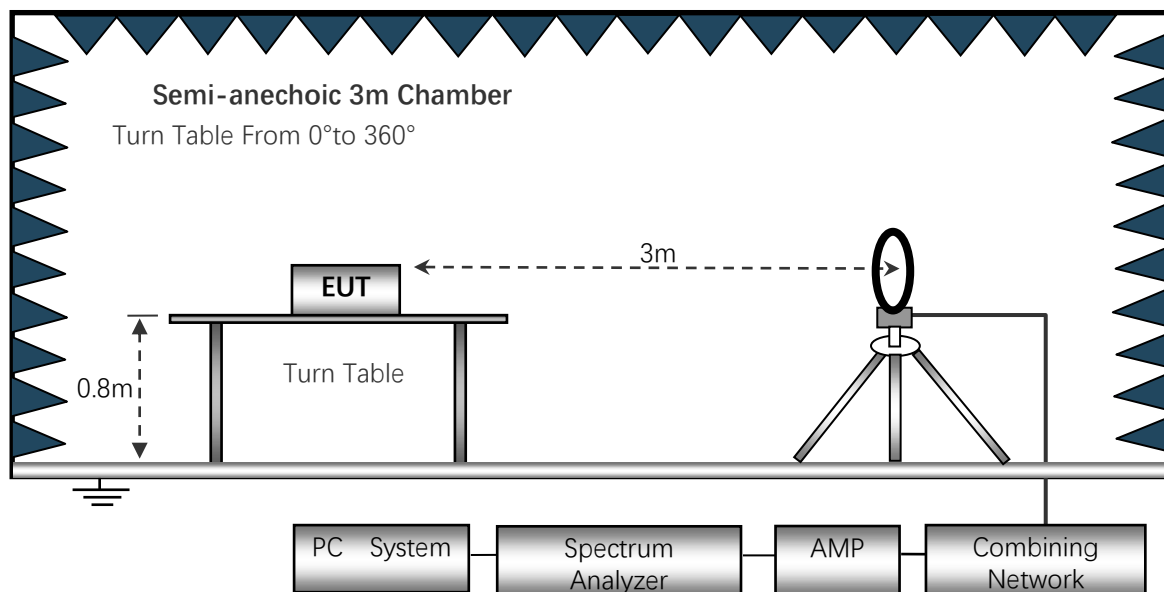

Below 1GHz

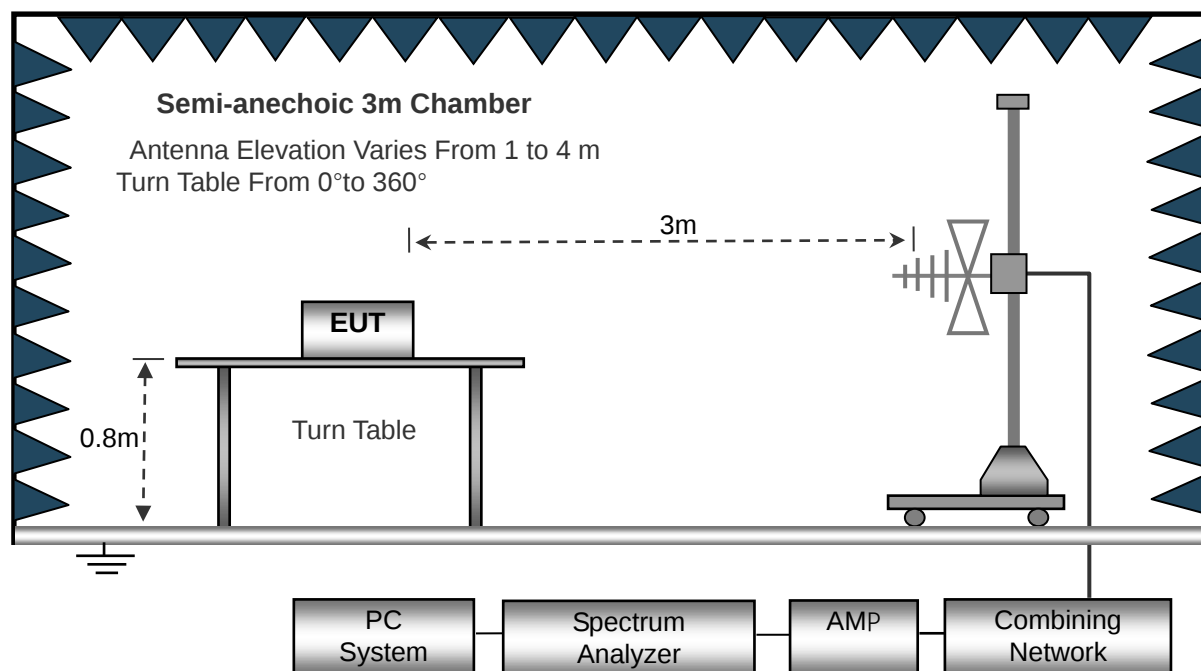

6.2 Test Standard and Limit

FCC Part 15 Subpart C



Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.090	2400/F(kHz)	300	AVERAGE
0.090-0.110	2400/F(kHz)	300	Quasi-peak Value
0.110-0.490	2400/F(kHz)	300	AVERAGE
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Above 30MHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)	Remark
30 ~ 88	3	40.0	Quasi-peak Value
88 ~ 216	3	43.5	Quasi-peak Value
216 ~ 960	3	46.0	Quasi-peak Value
960 ~ 1000	3	54.0	Quasi-peak Value
Above 1000	3	74.0	PEAK
		54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC Part 15 Subpart C regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.


6) The frequency range from 9KHz to 1000MHz is checked.

6.6 Test Result

PASS, Please refer to the following page.



Radiation Emission Test Data 9 kHz~0.15MHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

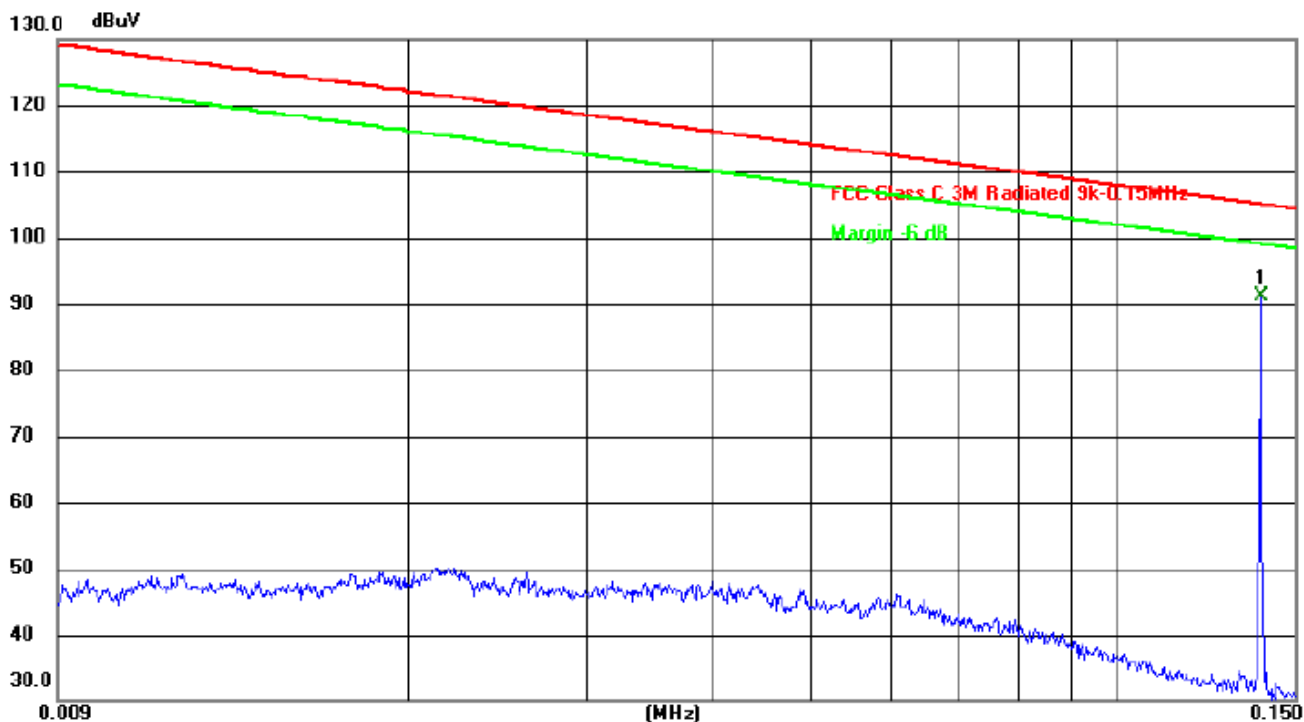

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.1386	90.71	9.13	99.84	105.04	-5.2	AVERAGE

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data 0.15MHz~30 MHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

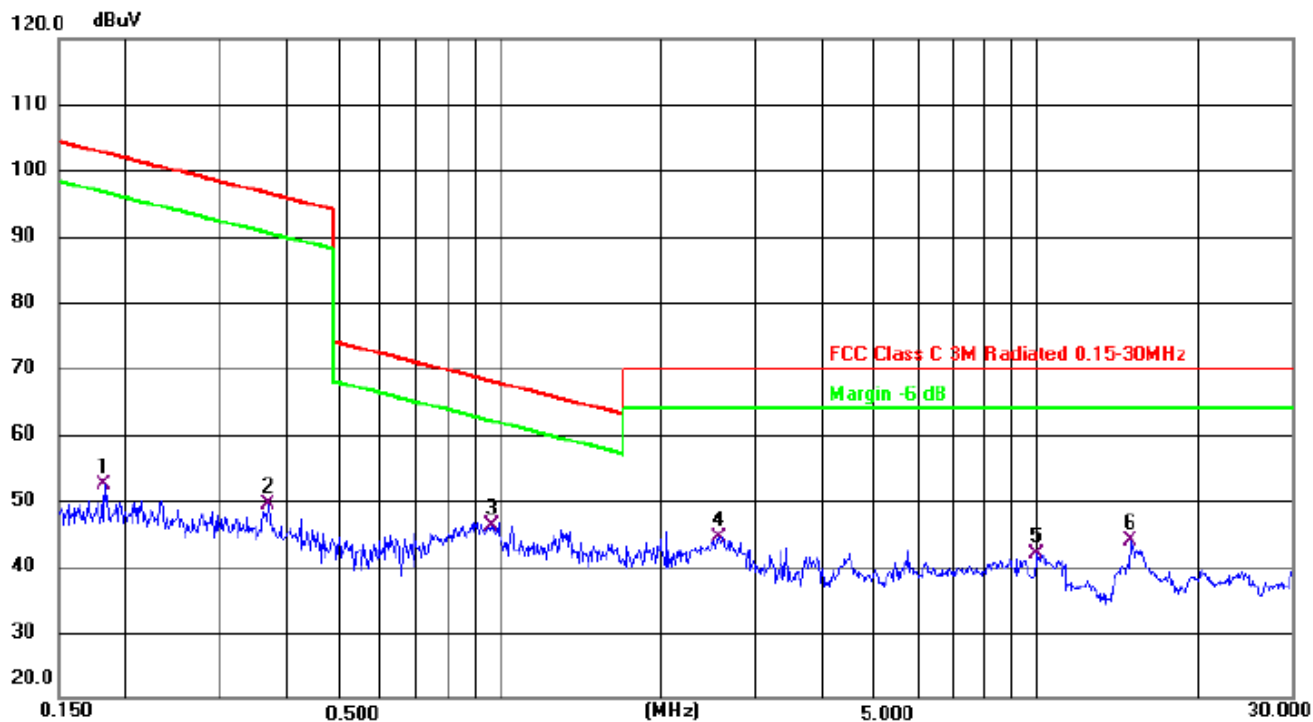

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
0.1833	51.82	9.15	60.97	102.6	-41.63	AVG
0.3689	49.42	9.72	59.14	96.48	-37.34	AVG
0.9629	46.62	9.31	55.93	68.04	-12.11	QP
2.5535	45.71	9.36	55.07	70	-14.93	QP
10.0183	42.08	8.44	50.52	70	-19.48	QP
14.9068	44.11	9.52	53.63	70	-16.37	QP

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.




Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

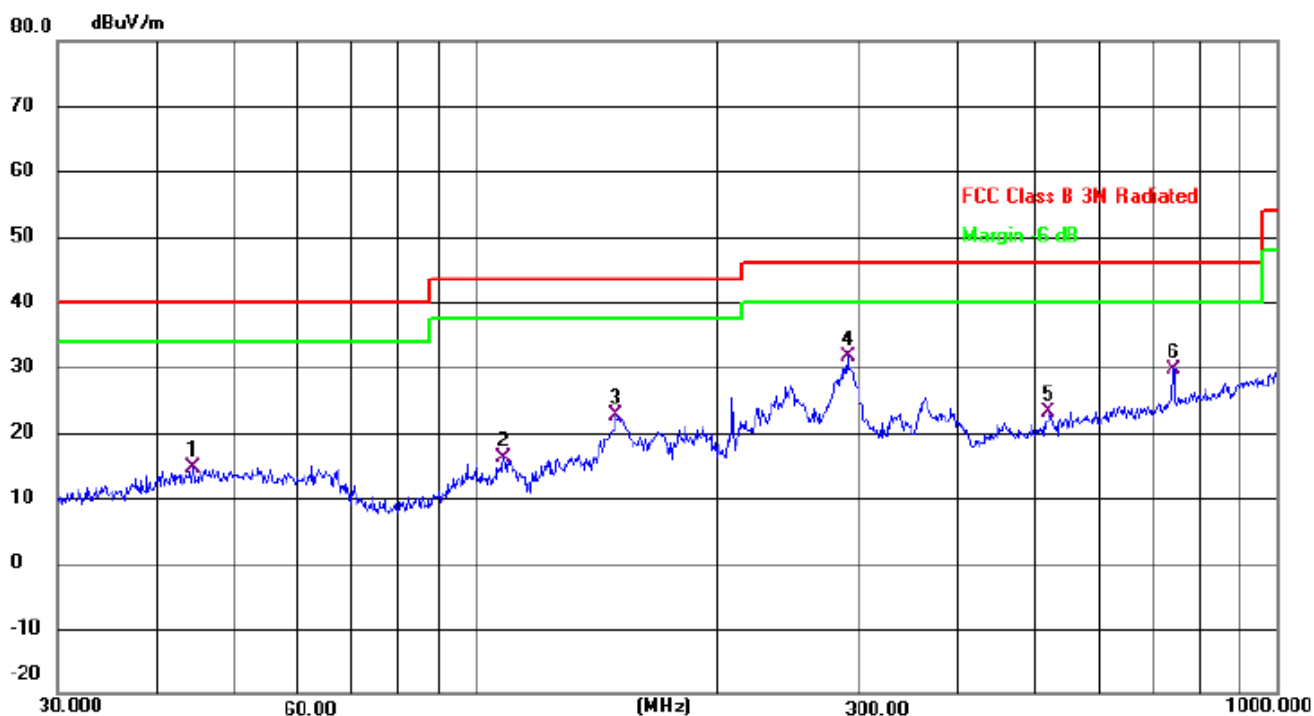

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		44.2752	27.68	-13.15	14.53	40.00	-25.47	QP
2		108.2667	30.99	-14.85	16.14	43.50	-27.36	QP
3		149.4857	40.95	-18.25	22.70	43.50	-20.80	QP
4	*	291.0360	43.89	-12.24	31.65	46.00	-14.35	QP
5		519.0649	30.20	-7.14	23.06	46.00	-22.94	QP
6		742.2587	32.89	-3.17	29.72	46.00	-16.28	QP



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

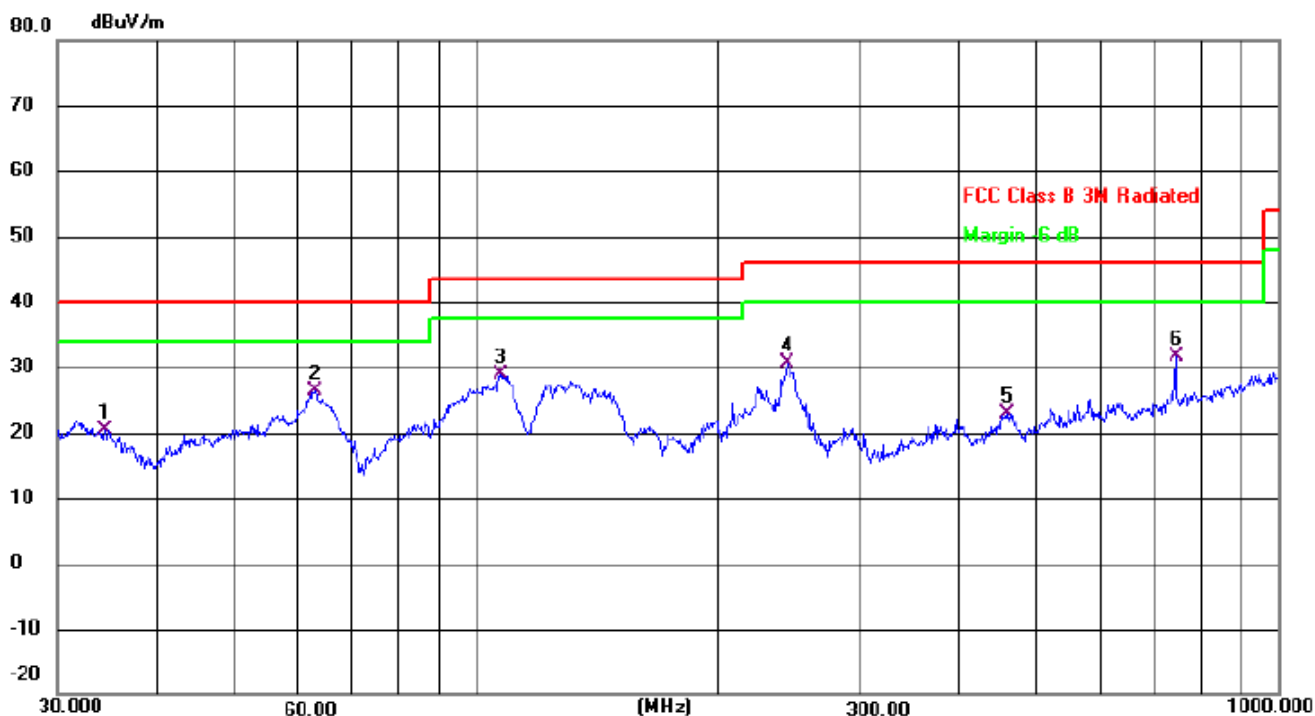

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1	34.3964	35.95	-15.50	20.45	40.00	-19.55	QP
2 *	62.8708	40.93	-14.47	26.46	40.00	-13.54	QP
3	107.1337	43.65	-14.69	28.96	43.50	-14.54	QP
4	244.2321	43.88	-13.28	30.60	46.00	-15.40	QP
5	459.1144	31.17	-8.19	22.98	46.00	-23.02	QP
6	744.8661	34.78	-3.25	31.53	46.00	-14.47	QP

Remarks:

- 1.Final Level =Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Preamplifier Factor)
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



7. BANDWIDTH TEST

7.1 TEST SETUP


1. Set RBW = 3kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.2 TEST SETUP



7.3 TEST Result

Frequency (KHz)	20dB bandwidth (KHz)	Result
138	0.815	Pass

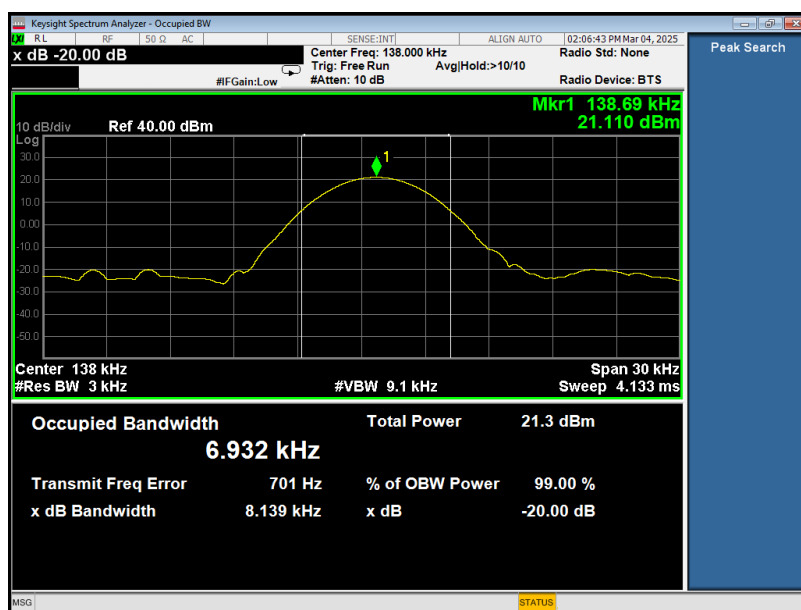

Note: The measured signal is Cw-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 3kHz to perform the occupied bandwidth test.



8. ANTENNA REQUIREMENT

a) STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

b) EUT ANTENNA

The EUT antenna is Inductive loop coil Antenna. It comply with the standard requirement.

9. SETUP PHOTOGRAPHS

Reference to the setup photo for details.

10. EUT PHOTOGRAPHS

Reference to the external and internal photo for details.

***** END OF REPORT *****