

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-07-07_14.58.58

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 49%

Remark: DR-RE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

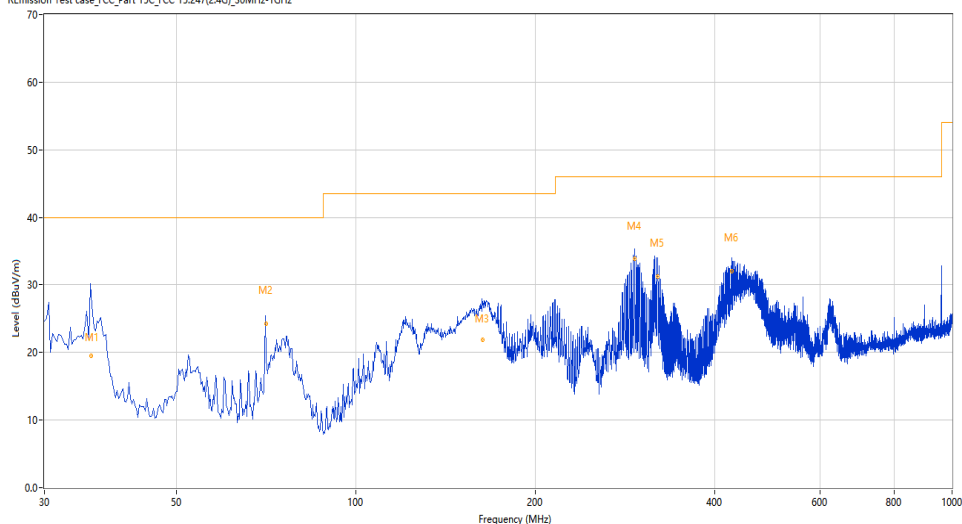

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.970	35.23	-27.95	40.0	4.77	Peak	214.40	150	Horizontal	Pass
1*	35.970	19.54	-27.95	40.0	20.46	QP	214.40	150	Horizontal	Pass
2	70.634	26.85	-29.47	40.0	13.15	Peak	120.70	235	Horizontal	Pass
2*	70.634	24.24	-29.47	40.0	15.76	QP	120.70	235	Horizontal	Pass
3	162.893	27.20	-29.10	43.5	16.30	Peak	0.00	100	Horizontal	Pass
3*	162.893	21.93	-29.10	43.5	21.57	QP	0.00	100	Horizontal	Pass
4	293.544	35.62	-23.51	46.0	10.38	Peak	65.80	166	Horizontal	Pass
4*	293.544	33.85	-23.51	46.0	12.15	QP	65.80	166	Horizontal	Pass
5	320.532	34.88	-22.75	46.0	11.12	Peak	72.70	166	Horizontal	Pass
5*	320.532	31.27	-22.75	46.0	14.73	QP	72.70	166	Horizontal	Pass
6	427.574	35.56	-19.78	46.0	10.44	Peak	265.50	110	Horizontal	Pass
6*	427.574	32.04	-19.78	46.0	13.96	QP	265.50	110	Horizontal	Pass

BLE-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-07-07_14.16.06

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.2

Hum.: 49%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z4G)_30MHz-1GHz

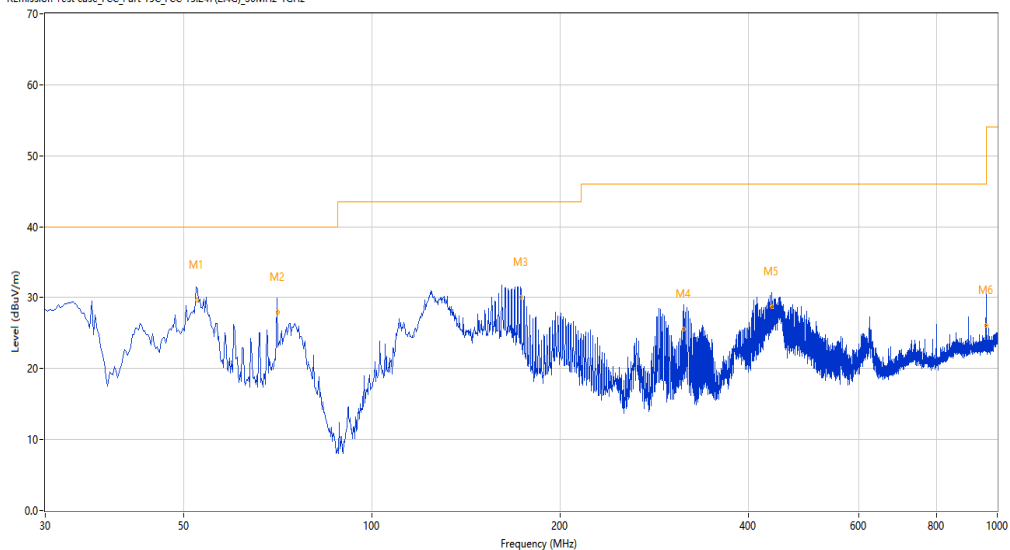

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	52.498	32.47	-25.28	40.0	7.53	Peak	294.00	103	Vertical	Pass
1*	52.498	29.69	-25.28	40.0	10.31	QP	294.00	103	Vertical	Pass
2	70.632	30.52	-29.47	40.0	9.48	Peak	360.00	101	Vertical	Pass
2*	70.632	27.96	-29.47	40.0	12.04	QP	360.00	101	Vertical	Pass
3	173.001	33.65	-28.54	43.5	9.85	Peak	193.40	178	Vertical	Pass
3*	173.001	30.05	-28.54	43.5	13.45	QP	193.40	178	Vertical	Pass
4	314.938	29.15	-23.01	46.0	16.85	Peak	201.30	107	Vertical	Pass
4*	314.938	25.62	-23.01	46.0	20.38	QP	201.30	107	Vertical	Pass
5	435.456	31.72	-19.59	46.0	14.28	Peak	42.90	243	Vertical	Pass
5*	435.456	28.74	-19.59	46.0	17.26	QP	42.90	243	Vertical	Pass
6	959.757	32.10	-8.94	46.0	13.90	Peak	358.00	173	Vertical	Pass
6*	959.757	26.10	-8.94	46.0	19.90	QP	358.00	173	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.47.26

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

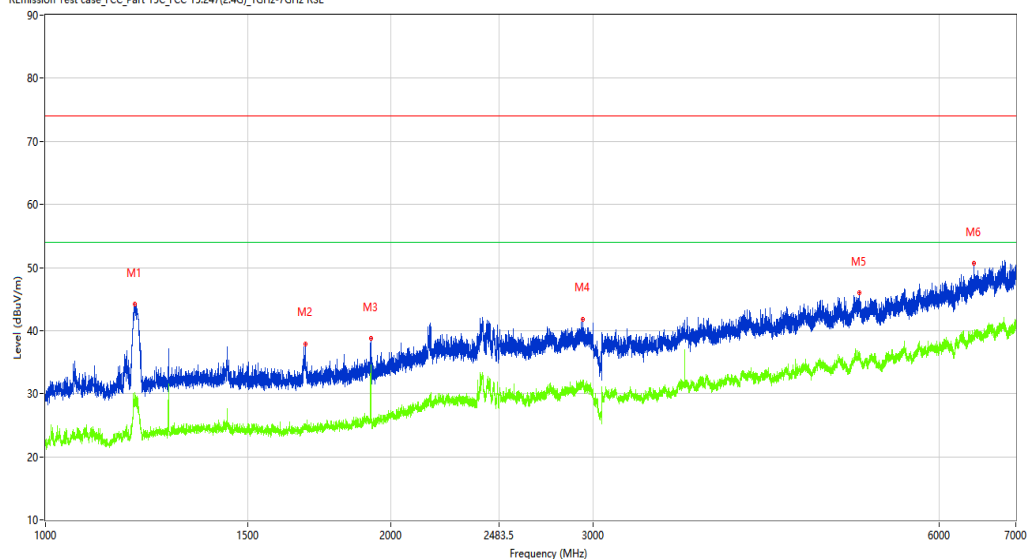

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.500	44.16	-14.43	74.0	29.84	Peak	360.00	100	Horizontal	Pass
1**	1195.500	30.13	-14.43	54.0	23.87	AV	360.00	100	Horizontal	Pass
2	1683.250	37.92	-13.67	74.0	36.08	Peak	45.90	100	Horizontal	Pass
2**	1683.250	25.11	-13.67	54.0	28.89	AV	45.90	100	Horizontal	Pass
3	1920.750	38.75	-12.40	74.0	35.25	Peak	45.90	100	Horizontal	Pass
3**	1920.750	32.54	-12.40	54.0	21.46	AV	45.90	100	Horizontal	Pass
4	2939.000	41.85	-5.12	74.0	32.15	Peak	0.00	100	Horizontal	Pass
4**	2939.000	31.75	-5.12	54.0	22.25	AV	0.00	100	Horizontal	Pass
5	5115.500	45.98	0.22	74.0	28.02	Peak	173.10	100	Horizontal	Pass
5**	5115.500	36.30	0.22	54.0	17.70	AV	173.10	100	Horizontal	Pass
6	6432.000	50.62	2.79	74.0	23.38	Peak	97.30	100	Horizontal	Pass
6**	6432.000	38.49	2.79	54.0	15.51	AV	97.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-07-04_16.17.38

EUT Name: N.A

Manufacturer: N.A

Model: TX

Temp.(oC): 24.8

Hum.: 45%

Test Engineer: CJY

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7979.000	27.82	1.08	74.0	46.18	Peak	141.10	100	Horizontal	Pass
1**	7979.000	16.97	1.08	54.0	37.03	AV	141.10	100	Horizontal	Pass
2	9967.250	30.25	3.65	74.0	43.75	Peak	81.30	100	Horizontal	Pass
2**	9967.250	19.93	3.65	54.0	34.07	AV	81.30	100	Horizontal	Pass
3	11070.000	32.27	4.59	74.0	41.73	Peak	69.60	100	Horizontal	Pass
3**	11070.000	21.75	4.59	54.0	32.25	AV	69.60	100	Horizontal	Pass
4	14625.750	38.84	10.53	74.0	35.16	Peak	35.30	100	Horizontal	Pass
4**	14625.750	29.10	10.53	54.0	24.90	AV	35.30	100	Horizontal	Pass
5	16834.000	41.89	12.88	74.0	32.11	Peak	0.00	100	Horizontal	Pass
5**	16834.000	31.97	12.88	54.0	22.03	AV	0.00	100	Horizontal	Pass
6	17813.000	45.67	15.41	74.0	28.33	Peak	153.70	100	Horizontal	Pass
6**	17813.000	35.32	15.41	54.0	18.68	AV	153.70	100	Horizontal	Pass

BLE-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.39.00

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

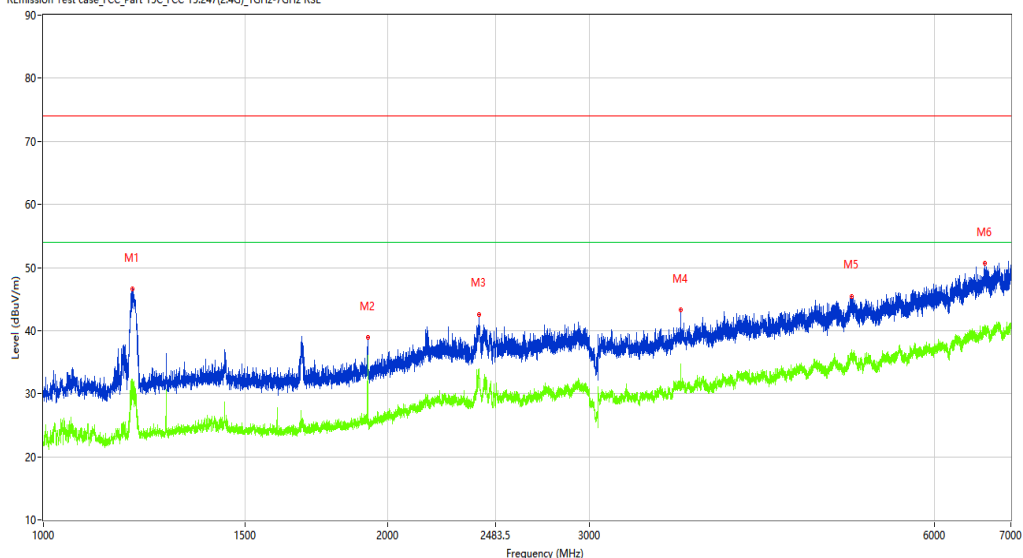

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.500	46.58	-14.43	74.0	27.42	Peak	331.90	100	Vertical	Pass
1**	1196.500	31.44	-14.43	54.0	22.56	AV	331.90	100	Vertical	Pass
2	1920.000	38.96	-12.39	74.0	35.04	Peak	297.50	100	Vertical	Pass
2**	1920.000	36.04	-12.39	54.0	17.96	AV	297.50	100	Vertical	Pass
3	2401.000	42.61	-4.93	74.0	31.39	Peak	180.60	100	Vertical	Pass
3**	2401.000	33.89	-4.93	54.0	20.11	AV	180.60	100	Vertical	Pass
4	3603.000	43.26	-2.99	74.0	30.74	Peak	295.70	100	Vertical	Pass
4**	3603.000	34.66	-2.99	54.0	19.34	AV	295.70	100	Vertical	Pass
5	5079.500	45.47	0.68	74.0	28.53	Peak	285.80	100	Vertical	Pass
5**	5079.500	36.94	0.68	54.0	17.06	AV	285.80	100	Vertical	Pass
6	6644.000	50.61	3.83	74.0	23.39	Peak	85.40	100	Vertical	Pass
6**	6644.000	40.21	3.83	54.0	13.79	AV	85.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-07-04_16.04.40

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX


Work Addition: TX

Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

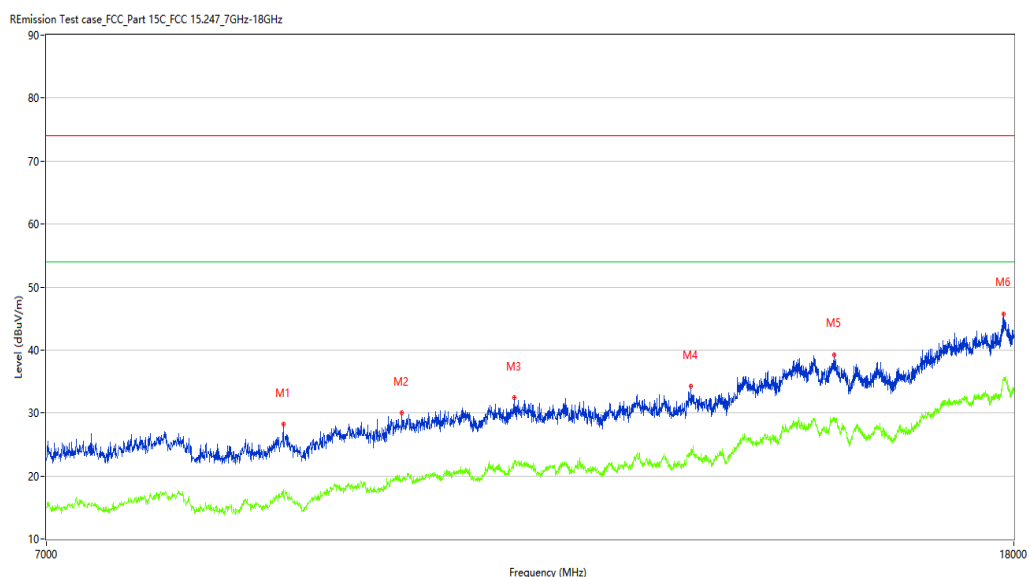

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8820.500	28.18	0.43	74.0	45.82	Peak	265.90	100	Vertical	Pass
1**	8820.500	17.79	0.43	54.0	36.21	AV	265.90	100	Vertical	Pass
2	9904.000	30.02	3.04	74.0	43.98	Peak	360.00	100	Vertical	Pass
2**	9904.000	19.27	3.04	54.0	34.73	AV	360.00	100	Vertical	Pass
3	11050.750	32.42	4.61	74.0	41.58	Peak	49.90	100	Vertical	Pass
3**	11050.750	22.44	4.61	54.0	31.56	AV	49.90	100	Vertical	Pass
4	13129.750	34.24	5.95	74.0	39.76	Peak	339.10	100	Vertical	Pass
4**	13129.750	23.53	5.95	54.0	30.47	AV	339.10	100	Vertical	Pass
5	15101.500	39.29	9.87	74.0	34.71	Peak	49.90	100	Vertical	Pass
5**	15101.500	29.24	9.87	54.0	24.76	AV	49.90	100	Vertical	Pass
6	17815.751	45.78	15.49	74.0	28.22	Peak	360.00	100	Vertical	Pass
6**	17815.751	35.17	15.49	54.0	18.83	AV	360.00	100	Vertical	Pass

BLE-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.50.42

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

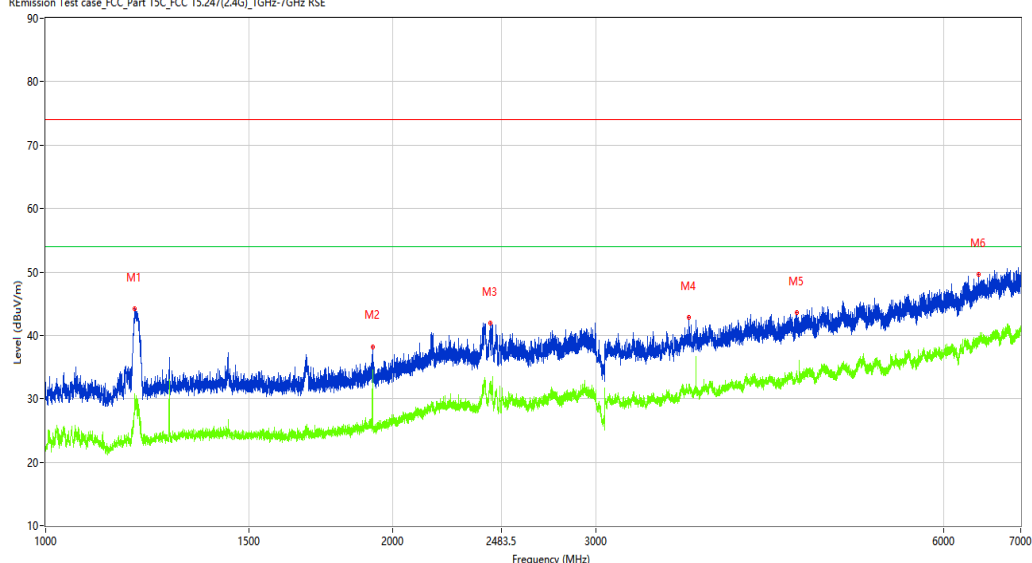

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.750	44.20	-14.44	74.0	29.80	Peak	360.00	100	Horizontal	Pass
1**	1194.750	28.60	-14.44	54.0	25.40	AV	360.00	100	Horizontal	Pass
2	1920.250	38.25	-12.39	74.0	35.75	Peak	295.50	100	Horizontal	Pass
2**	1920.250	34.54	-12.39	54.0	19.46	AV	295.50	100	Horizontal	Pass
3	2427.750	41.96	-5.88	74.0	32.04	Peak	34.10	100	Horizontal	Pass
3**	2427.750	32.18	-5.88	54.0	21.82	AV	34.10	100	Horizontal	Pass
4	3609.500	42.83	-2.93	74.0	31.17	Peak	27.30	100	Horizontal	Pass
4**	3609.500	31.70	-2.93	54.0	22.30	AV	27.30	100	Horizontal	Pass
5	4480.000	43.60	-2.13	74.0	30.40	Peak	172.60	100	Horizontal	Pass
5**	4480.000	32.98	-2.13	54.0	21.02	AV	172.60	100	Horizontal	Pass
6	6441.000	49.69	3.03	74.0	24.31	Peak	253.70	100	Horizontal	Pass
6**	6441.000	39.79	3.03	54.0	14.21	AV	253.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-07-04_16.20.15

EUT Name: N.A

Manufacturer: N.A

Model: TX

Temp.(oC): 24.8

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

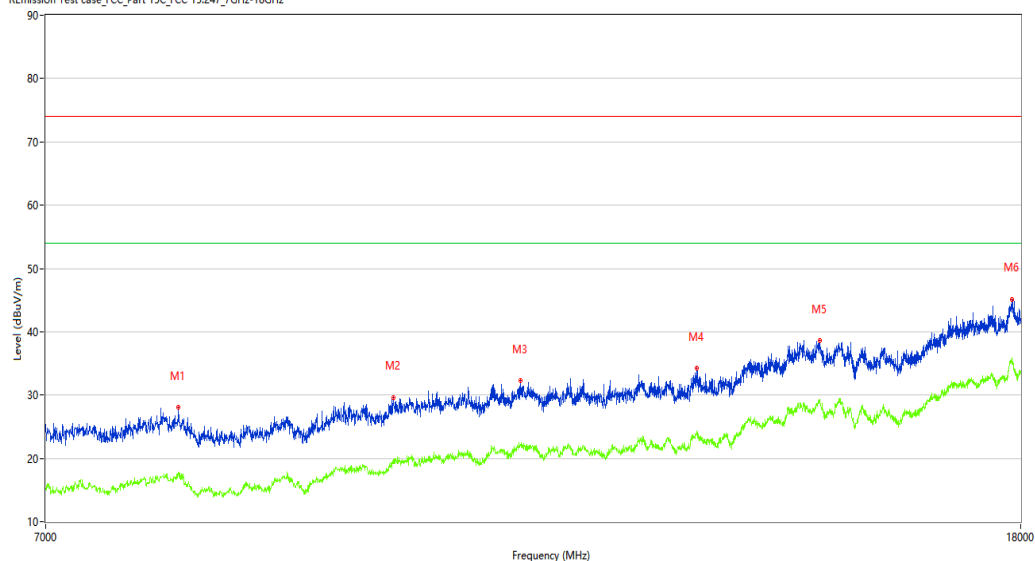

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7959.750	28.01	1.13	74.0	45.99	Peak	360.00	100	Horizontal	Pass
1**	7959.750	17.79	1.13	54.0	36.21	AV	360.00	100	Horizontal	Pass
2	9802.250	29.65	3.41	74.0	44.35	Peak	358.20	100	Horizontal	Pass
2**	9802.250	19.75	3.41	54.0	34.25	AV	358.20	100	Horizontal	Pass
3	11083.750	32.29	4.69	74.0	41.71	Peak	0.00	100	Horizontal	Pass
3**	11083.750	22.20	4.69	54.0	31.80	AV	0.00	100	Horizontal	Pass
4	13151.750	34.23	5.96	74.0	39.77	Peak	0.00	100	Horizontal	Pass
4**	13151.750	24.30	5.96	54.0	29.70	AV	0.00	100	Horizontal	Pass
5	14818.250	38.66	11.51	74.0	35.34	Peak	182.90	100	Horizontal	Pass
5**	14818.250	29.06	11.51	54.0	24.94	AV	182.90	100	Horizontal	Pass
6	17848.750	45.17	15.91	74.0	28.83	Peak	182.90	100	Horizontal	Pass
6**	17848.750	35.33	15.91	54.0	18.67	AV	182.90	100	Horizontal	Pass

BLE-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.34.11

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

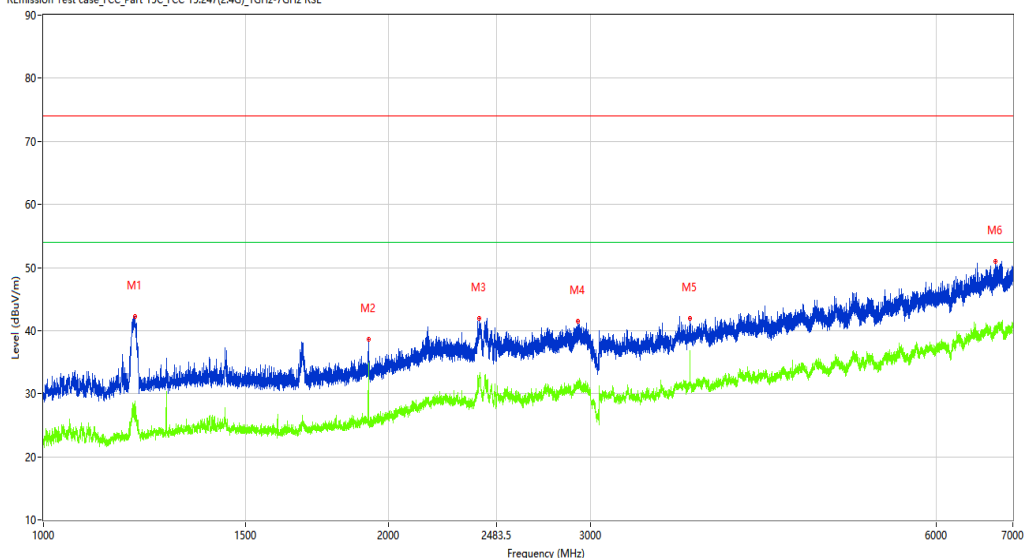

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1201.000	42.22	-14.42	74.0	31.78	Peak	73.60	100	Vertical	Pass
1**	1201.000	26.70	-14.42	54.0	27.30	AV	73.60	100	Vertical	Pass
2	1920.000	38.60	-12.39	74.0	35.40	Peak	61.50	100	Vertical	Pass
2**	1920.000	34.78	-12.39	54.0	19.22	AV	61.50	100	Vertical	Pass
3	2399.750	41.97	-4.93	74.0	32.03	Peak	360.00	100	Vertical	Pass
3**	2399.750	32.62	-4.93	54.0	21.38	AV	360.00	100	Vertical	Pass
4	2922.250	41.53	-5.29	74.0	32.47	Peak	202.10	100	Vertical	Pass
4**	2922.250	31.16	-5.29	54.0	22.84	AV	202.10	100	Vertical	Pass
5	3660.000	41.97	-3.03	74.0	32.03	Peak	20.90	100	Vertical	Pass
5**	3660.000	36.77	-3.03	54.0	17.23	AV	20.90	100	Vertical	Pass
6	6760.000	50.92	3.47	74.0	23.08	Peak	31.30	100	Vertical	Pass
6**	6760.000	40.80	3.47	54.0	13.20	AV	31.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-07-04_16.07.07

EUT Name: N.A

Manufacturer: N.A

Model: TX

Temp.(oC): 24.8

Hum.: 45%


Test Engineer: CJY

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25060038-01#01

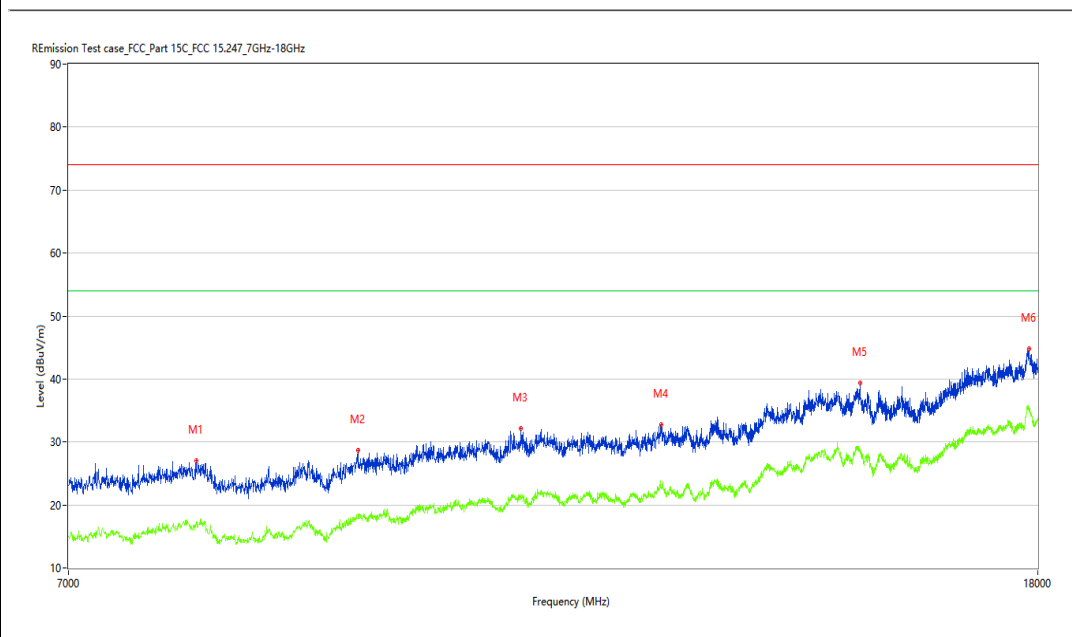

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7926.750	26.96	0.54	74.0	47.04	Peak	261.50	100	Vertical	Pass
1**	7926.750	17.31	0.54	54.0	36.69	AV	261.50	100	Vertical	Pass
2	9279.750	28.65	1.75	74.0	45.35	Peak	81.80	100	Vertical	Pass
2**	9279.750	18.59	1.75	54.0	35.41	AV	81.80	100	Vertical	Pass
3	10877.500	32.13	4.49	74.0	41.87	Peak	360.00	100	Vertical	Pass
3**	10877.500	21.23	4.49	54.0	32.77	AV	360.00	100	Vertical	Pass
4	12469.750	32.72	4.80	74.0	41.28	Peak	129.50	100	Vertical	Pass
4**	12469.750	22.69	4.80	54.0	31.31	AV	129.50	100	Vertical	Pass
5	15137.250	39.41	9.10	74.0	34.59	Peak	45.00	100	Vertical	Pass
5**	15137.250	28.85	9.10	54.0	25.15	AV	45.00	100	Vertical	Pass
6	17851.501	44.82	15.69	74.0	29.18	Peak	332.00	100	Vertical	Pass
6**	17851.501	35.15	15.69	54.0	18.85	AV	332.00	100	Vertical	Pass

BLE-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.53.33

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

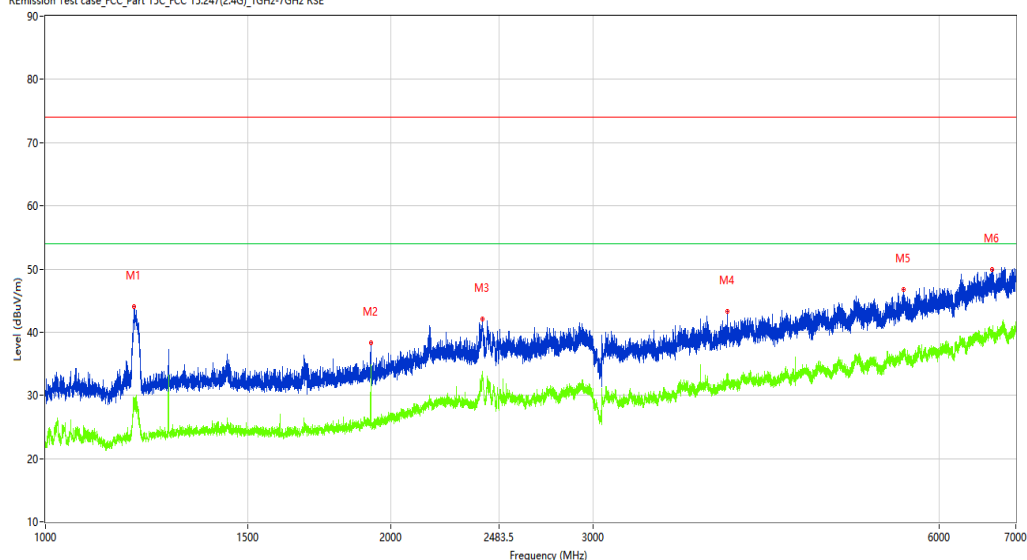

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.750	44.05	-14.44	74.0	29.95	Peak	0.00	100	Horizontal	Pass
1**	1194.750	29.57	-14.44	54.0	24.43	AV	0.00	100	Horizontal	Pass
2	1920.500	38.27	-12.39	74.0	35.73	Peak	234.50	100	Horizontal	Pass
2**	1920.500	31.36	-12.39	54.0	22.64	AV	234.50	100	Horizontal	Pass
3	2402.750	42.08	-4.93	74.0	31.92	Peak	170.50	100	Horizontal	Pass
3**	2402.750	32.77	-4.93	54.0	21.23	AV	170.50	100	Horizontal	Pass
4	3927.500	43.24	-2.87	74.0	30.76	Peak	319.40	100	Horizontal	Pass
4**	3927.500	32.05	-2.87	54.0	21.95	AV	319.40	100	Horizontal	Pass
5	5586.000	46.82	0.89	74.0	27.18	Peak	261.10	100	Horizontal	Pass
5**	5586.000	36.33	0.89	54.0	17.67	AV	261.10	100	Horizontal	Pass
6	6676.000	49.89	3.57	74.0	24.11	Peak	308.30	100	Horizontal	Pass
6**	6676.000	39.90	3.57	54.0	14.10	AV	308.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-07-04_16.23.21

EUT Name: N.A

Manufacturer: N.A

Model: TX

Temp.(oC): 24.8

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

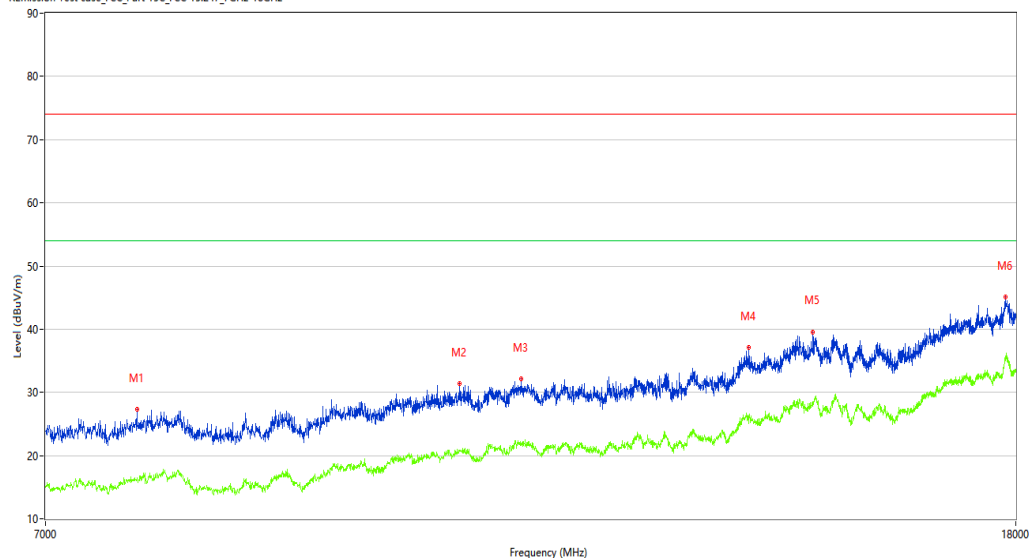

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7651.750	27.36	0.48	74.0	46.64	Peak	215.20	100	Horizontal	Pass
1**	7651.750	16.41	0.48	54.0	37.59	AV	215.20	100	Horizontal	Pass
2	10476.000	31.37	4.01	74.0	42.63	Peak	177.80	100	Horizontal	Pass
2**	10476.000	20.75	4.01	54.0	33.25	AV	177.80	100	Horizontal	Pass
3	11119.500	32.10	4.14	74.0	41.90	Peak	49.80	100	Horizontal	Pass
3**	11119.500	21.93	4.14	54.0	32.07	AV	49.80	100	Horizontal	Pass
4	13883.250	37.14	7.75	74.0	36.86	Peak	177.80	100	Horizontal	Pass
4**	13883.250	25.94	7.75	54.0	28.06	AV	177.80	100	Horizontal	Pass
5	14777.000	39.60	10.77	74.0	34.40	Peak	333.30	100	Horizontal	Pass
5**	14777.000	28.53	10.77	54.0	25.47	AV	333.30	100	Horizontal	Pass
6	17821.250	45.08	15.56	74.0	28.92	Peak	215.20	100	Horizontal	Pass
6**	17821.250	35.37	15.56	54.0	18.63	AV	215.20	100	Horizontal	Pass

BLE-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.31.39

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

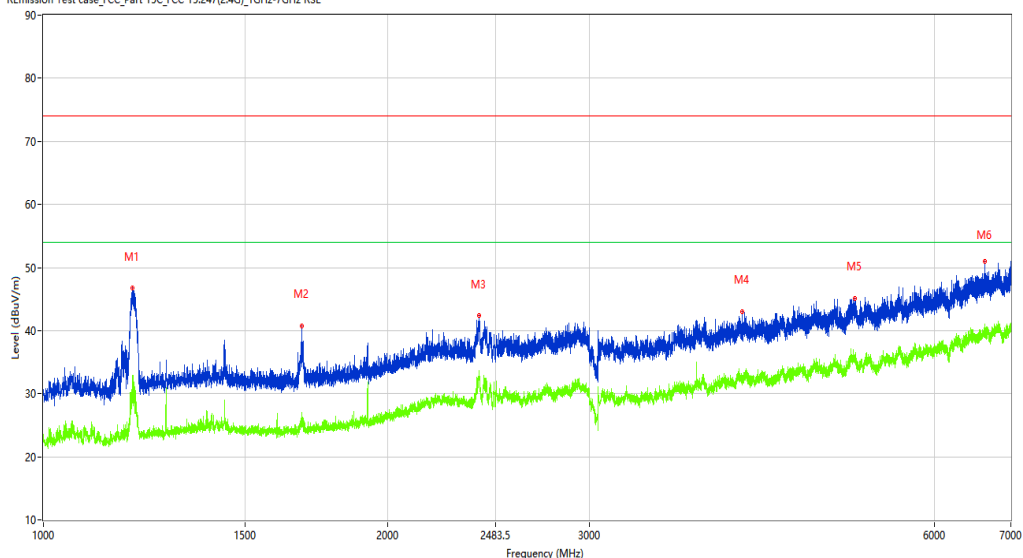

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.250	46.71	-14.43	74.0	27.29	Peak	329.60	100	Vertical	Pass
1**	1196.250	32.85	-14.43	54.0	21.15	AV	329.60	100	Vertical	Pass
2	1682.750	40.81	-13.68	74.0	33.19	Peak	139.60	100	Vertical	Pass
2**	1682.750	26.92	-13.68	54.0	27.08	AV	139.60	100	Vertical	Pass
3	2401.250	42.32	-4.93	74.0	31.68	Peak	203.80	100	Vertical	Pass
3**	2401.250	33.30	-4.93	54.0	20.70	AV	203.80	100	Vertical	Pass
4	4075.500	43.00	-1.34	74.0	31.00	Peak	318.40	100	Vertical	Pass
4**	4075.500	32.63	-1.34	54.0	21.37	AV	318.40	100	Vertical	Pass
5	5112.000	45.09	0.25	74.0	28.91	Peak	318.40	100	Vertical	Pass
5**	5112.000	35.54	0.25	54.0	18.46	AV	318.40	100	Vertical	Pass
6	6645.500	51.03	3.87	74.0	22.97	Peak	252.20	100	Vertical	Pass
6**	6645.500	40.41	3.87	54.0	13.59	AV	252.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-07-04_16.12.31

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

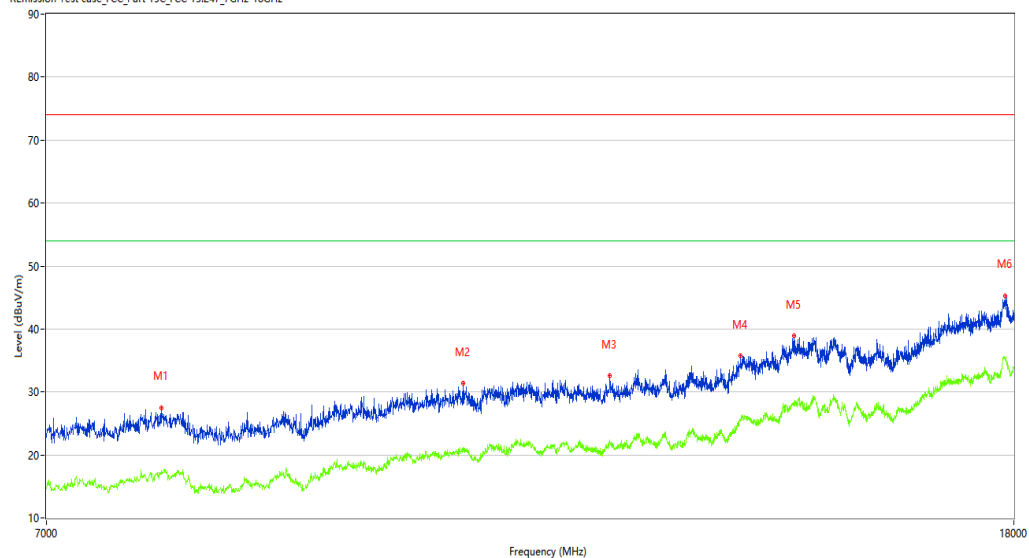

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7833.250	27.54	0.98	74.0	46.46	Peak	77.90	100	Vertical	Pass
1**	7833.250	17.55	0.98	54.0	36.45	AV	77.90	100	Vertical	Pass
2	10511.750	31.34	3.94	74.0	42.66	Peak	101.10	100	Vertical	Pass
2**	10511.750	20.69	3.94	54.0	33.31	AV	101.10	100	Vertical	Pass
3	12134.250	32.58	4.92	74.0	41.42	Peak	360.00	100	Vertical	Pass
3**	12134.250	22.29	4.92	54.0	31.71	AV	360.00	100	Vertical	Pass
4	13784.250	35.81	7.49	74.0	38.19	Peak	182.40	100	Vertical	Pass
4**	13784.250	25.68	7.49	54.0	28.32	AV	182.40	100	Vertical	Pass
5	14518.500	38.91	9.45	74.0	35.09	Peak	216.70	100	Vertical	Pass
5**	14518.500	28.09	9.45	54.0	25.91	AV	216.70	100	Vertical	Pass
6	17843.249	45.33	15.69	74.0	28.67	Peak	137.20	100	Vertical	Pass
6**	17843.249	35.13	15.69	54.0	18.87	AV	137.20	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.59.40

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX


Work Addition: TX

Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

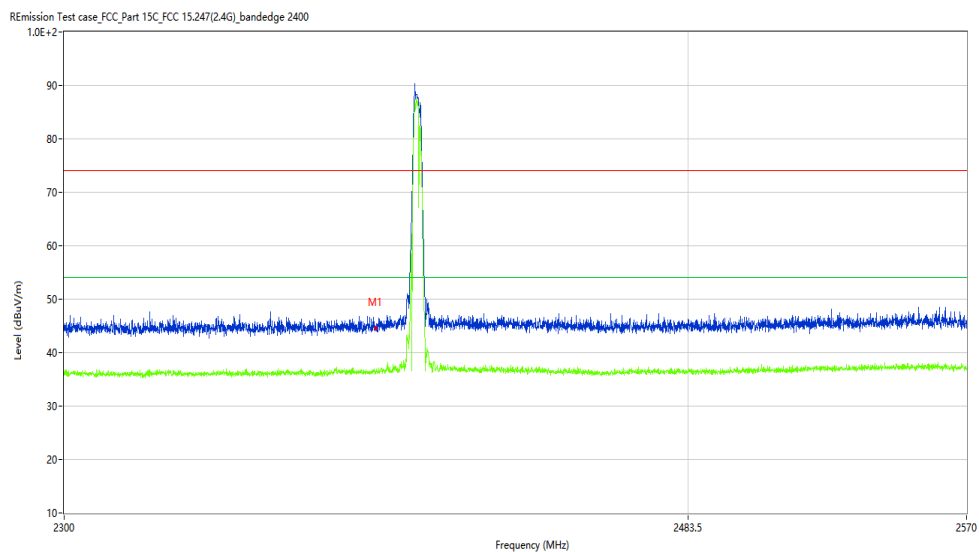

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	44.56	-10.74	74.0	29.44	Peak	323.84	100	Horizontal	Pass
1**	2390.000	36.72	-10.74	54.0	17.28	AV	323.84	100	Horizontal	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.26.04

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX


Work Addition: TX

Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

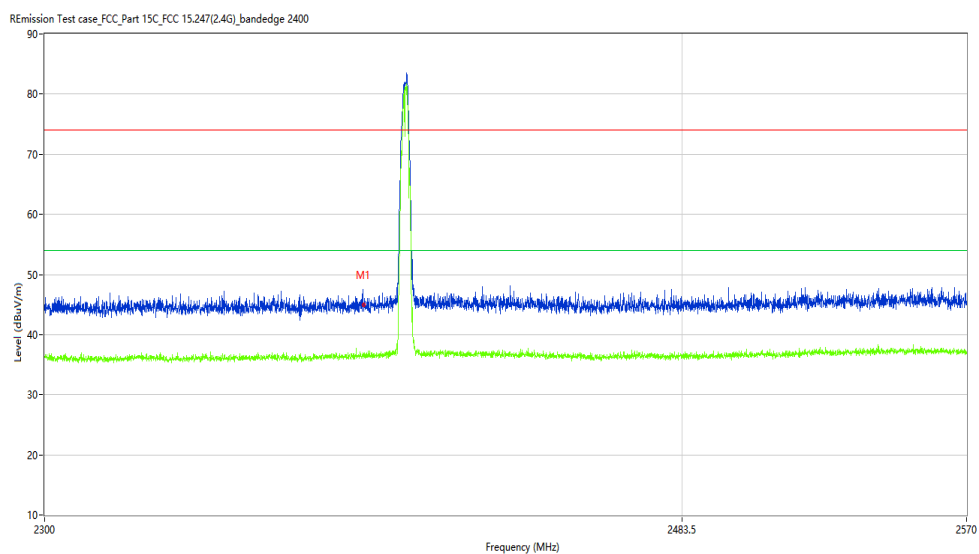

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	44.98	-10.74	74.0	29.02	Peak	185.72	100	Vertical	Pass
1**	2390.000	36.44	-10.74	54.0	17.56	AV	185.72	100	Vertical	Pass

BLE-Bandedge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.57.59

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX


Work Addition: TX

Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

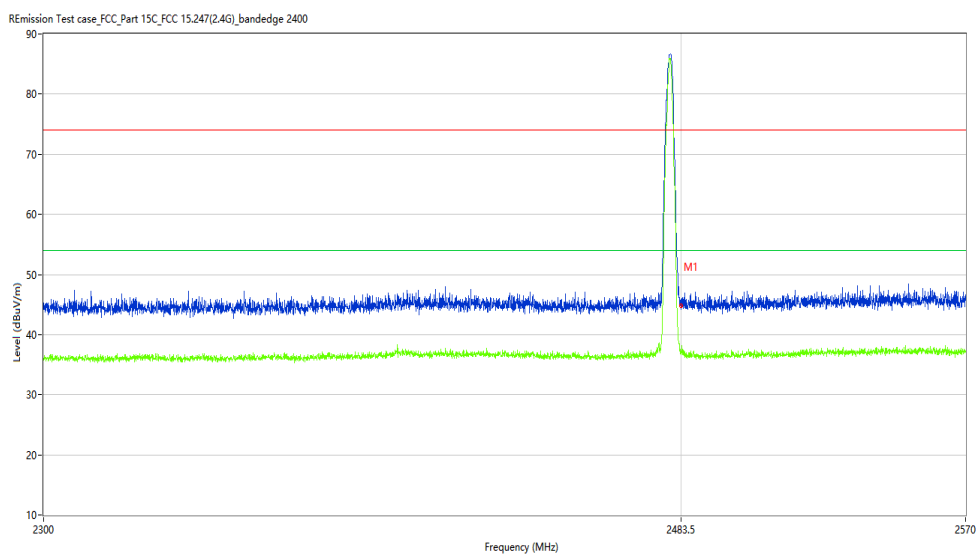

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	44.50	-10.74	74.0	29.50	Peak	149.36	100	Horizontal	Pass
1**	2483.500	36.95	-10.74	54.0	17.05	AV	149.36	100	Horizontal	Pass

BLE-Bandedge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2025-07-04_10.29.56

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: TX


Work Addition: TX

Temp.(oC): 24.8

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25060038-01#01

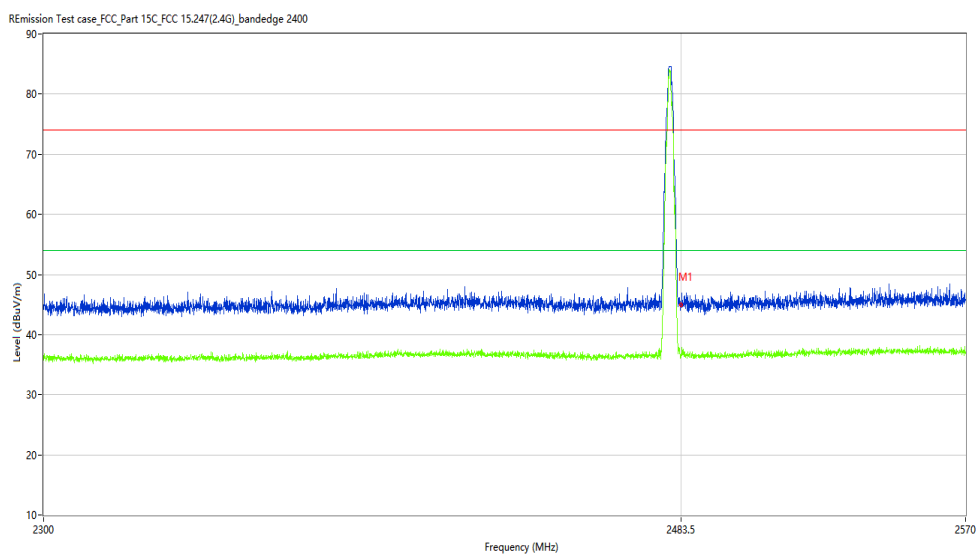

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	44.81	-10.74	74.0	29.19	Peak	157.13	100	Vertical	Pass
1**	2483.500	36.56	-10.74	54.0	17.44	AV	157.13	100	Vertical	Pass