




Package Contents




PowerMax 2400




User Manual



Power cord



Vehicle
charging cable





Solar charging
cable



XT60U-M to DC7909
adapter cable


Product Overview

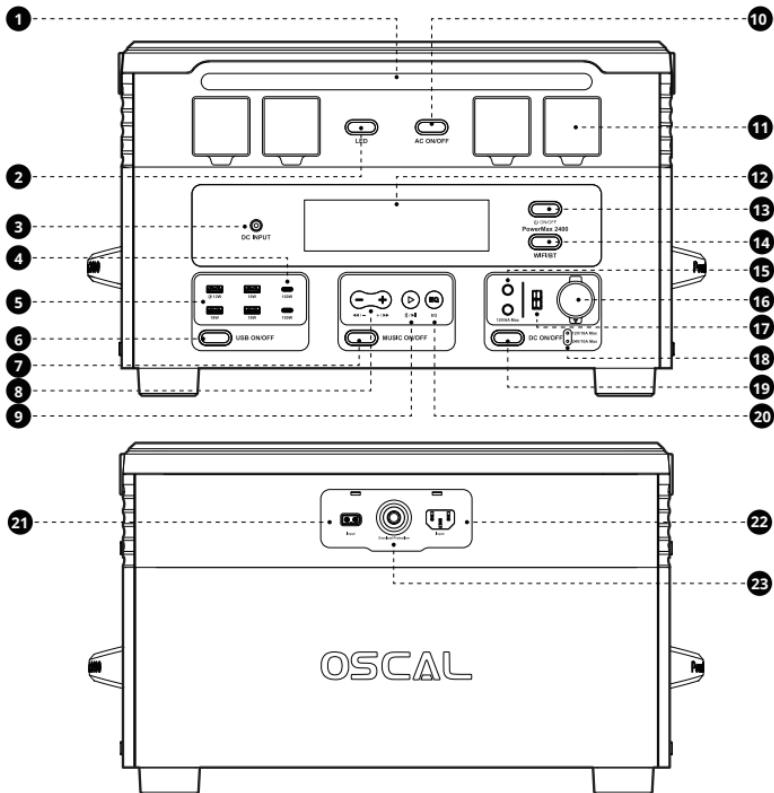

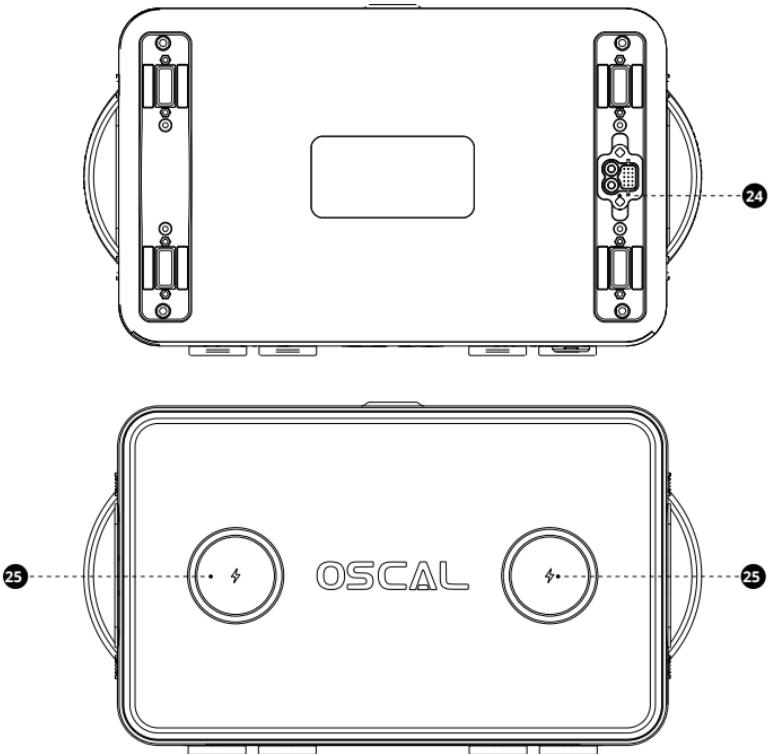


1. LED
2. LED switch
3. DC7909 input port
4. USB-C output port*2
5. USB-A output port*4
6. USB/Wireless charging output switch
7. Bluetooth speaker switch
8. Volume+-/Song switching
9. Music pause/play/Bluetooth reset button
10. AC output switch
11. AC output outlet*4
12. Display
13. Control switch
14. APP Bluetooth/WIFI switch
15. DC5521 output port*2
16. Cigarette lighter output port
17. Anderson output port
18. DC output voltage indicator
19. DC output switch
20. EQ switch button
21. Solar/Vehicle charging input port
22. AC input port
23. Overcurrent protector
24. Wireless parallel connector port
25. Wireless charging*2

Product Display

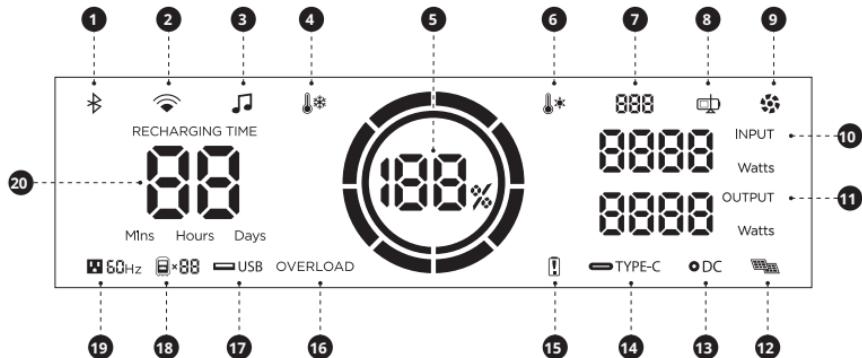


| | | | | |
|----|---------------------------|----|----------|---------------------------------|
| 1 | Bluetooth connection | 11 | OUTPUT | Output power |
| 2 | WIFI connection | 12 | | Solar panel DC charging |
| 3 | Music mode | 13 | ● DC | DC output |
| 4 | Low-temperature warning | 14 | ▬ TYPE-C | USB-C output |
| 5 | | 15 | ! | Battery pack fault |
| 6 | High-temperature warning | 16 | OVERLOAD | Output overload warning |
| 7 | | 17 | ▬ USB | USB-A output |
| 8 | Charging status indicator | 18 | | Connected battery packs |
| 9 | Fan status | 19 | | AC output |
| 10 | INPUT power | 20 | | Remaining charge/discharge time |


Product On/Off

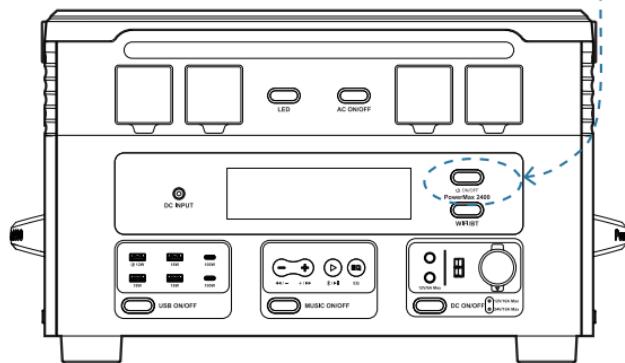


ON




OFF




Button Introduction

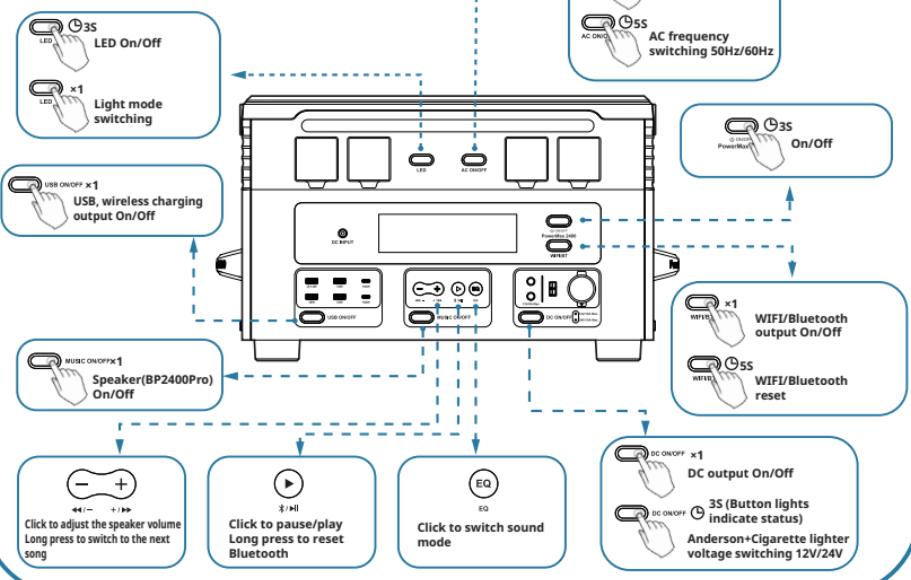


Powering Devices

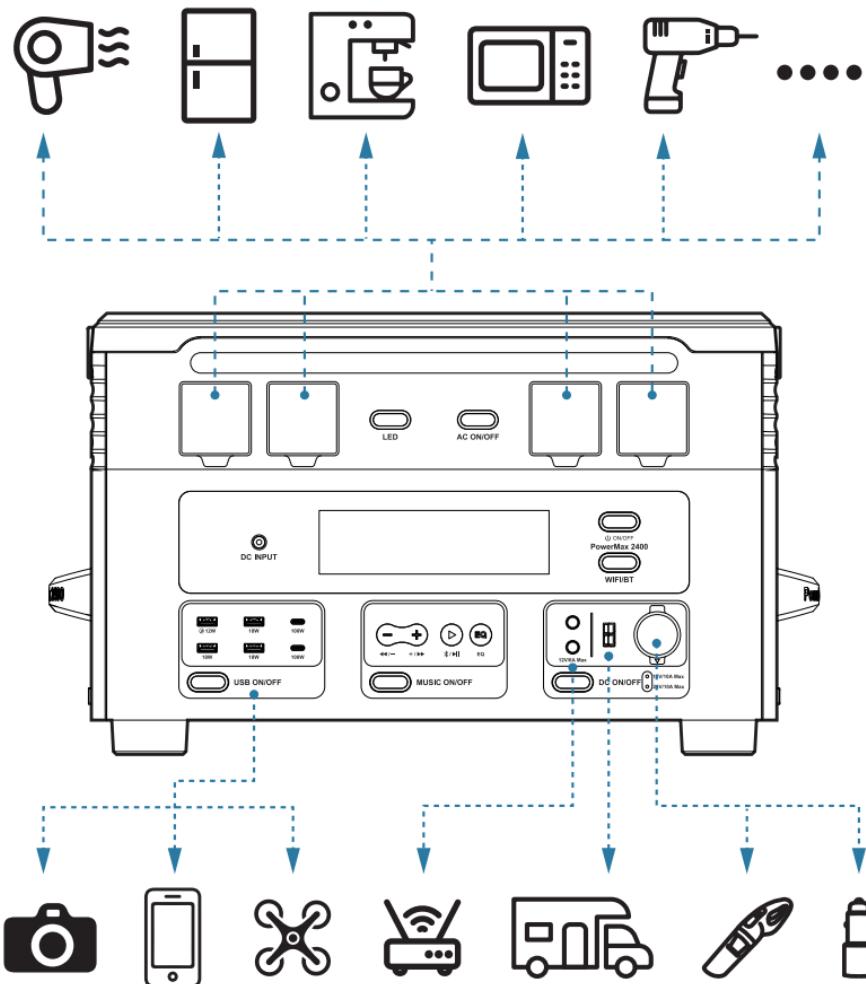

PowerMax 2400 Charging

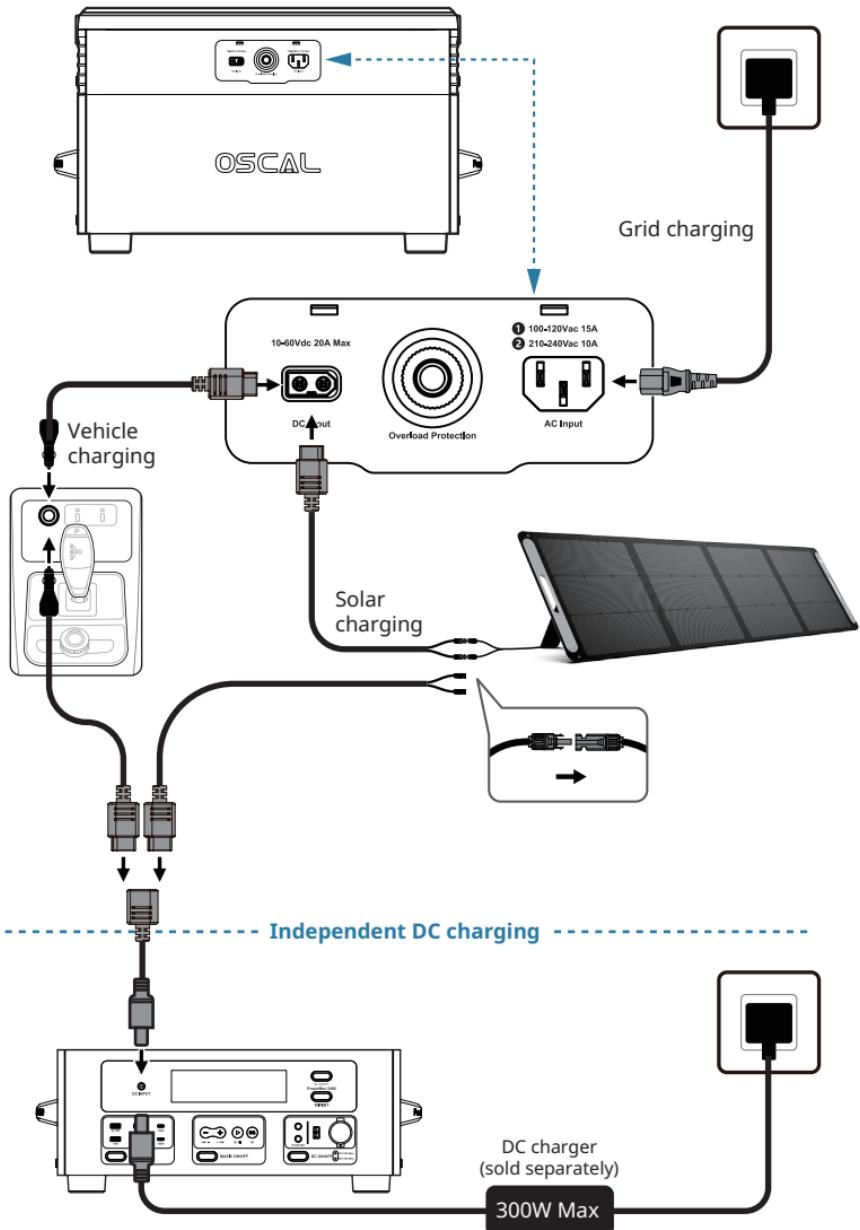

Grid-connected vs. Off-Grid/ BP2400 Charging

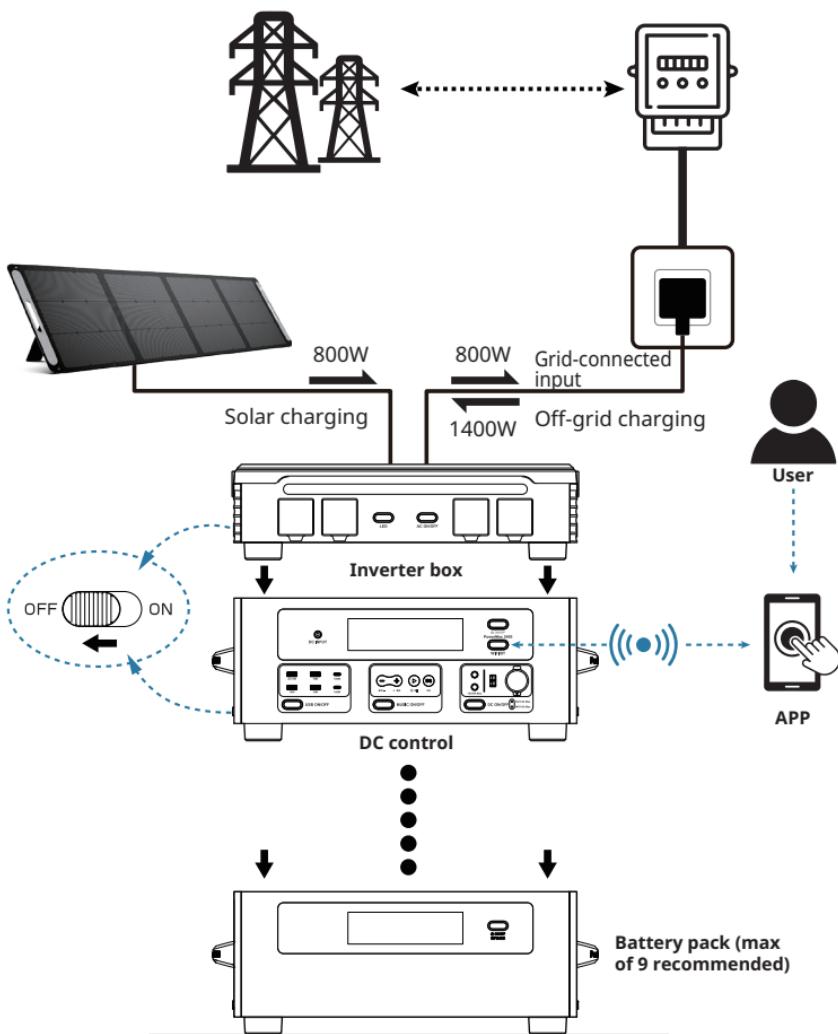

Before charging, please ensure that each battery pack component is properly connected to the power cable. Do not directly disconnect or connect components such as the battery pack when charging.

Parameter Specifications

Basic Information

| | |
|--------------------|-------------------------------|
| Net weight | Approx. 25.5kg (6.3kg+19.2kg) |
| Dimensions (L×W×H) | 530×290×302mm |
| Capacity | 1872Wh |
| WIFI | Frequency range: 2412-2462MHz |
| Bluetooth | Frequency range: 2402-2480MHz |
| WPT | Frequency range: 111-205KHz |

Output Specifications

| | |
|--------------------------|---|
| AC output (x4) | Pure sine wave, 2400W in total, 120V~(50/60Hz) |
| Wireless charging (x2) | Max power 15W |
| USB-A | 5V=2.4A, max 12W |
| USB-A fast charging (x3) | 5V=3A, 9V=2A, 12V=1.5A (constant voltage), max power 18W each, 54W in total |
| USB-C fast charging (x2) | 5/9/12/15V=3A, 20V=5A, max power 100W each, 200W in total |
| Vehicle charging output | 12/24V=10A, max power 240W |
| DC5521 (x2) | 12V=6A, max power 72W |
| Anderson port | 12/24V=10A, max power 240W |

Input Specifications

| | |
|------------------------|--|
| AC input power | Max power 1400W |
| AC input voltage | 100-120V~15A, 50Hz/60Hz |
| Solar charging input | 10-60V, max current 20A, max power 800W |
| Vehicle charging input | 12V/24V=10A, max power 240W |
| DC7909 input | DC/Solar charging: 10-60V, rated power 300W, max current 10A |
| AC+Solar+DC7909 | Max power 1500W |

Battery Specifications

| | |
|-----------------|--|
| Cell material | LFP (LiFePO4) |
| Cycle life | More than 80% capacity remaining after 3500 cycles |
| Protection type | High-temperature protection, low-temperature protection, overdischarge protection, overcharge protection, overload protection, short-circuit protection, overcurrent protection, overvoltage protection, undervoltage protection, excessive voltage difference protection. |

Operation Temperate

| | |
|-------------------------|--------------------------------|
| Charing temperature | 0°C~45°C |
| Discharging temperature | -10°C~45°C |
| Storage temperature | -10°C~45°C (ideally 20°C~30°C) |

Other Specifications

| | |
|---------------------|--|
| Battery pack BP2400 | 1.872kWh, stackable in parallel with up to 9 battery packs (including the main battery pack, the total capacity is 10*1.872kwh=18.72KWH), each sold separately |
| Solar panel | Optional, 200W solar panel recommended, sold separately |

- ① The voltage range of 100-120 V is only applicable to U.S.- and Japanese-version products
- ② The voltage range of 210-240 V is only applicable to European-version products



- 1. Vehicle charging is facilitated by means of an Anderson-style power connection, with a max power of 240W.
- 2. Product charging is dependent upon the actual temperature of the battery pack.

Safety Instructions

Use

1. It is recommended to use original components or parts. If replacement is required, please contact the official OSCAL sales channel for purchase information.
2. Do not allow the Product to come into contact with any liquid, and do not immerse the Product in water or get it wet. Do not use the Product in a rainy or humid environment.
3. Do not use the Product in strong electrostatic or magnetic-field environments.
4. Do not disassemble the Product in any way or puncture it with sharp objects.
5. Do not insert pins, wires, or other metal objects into the enclosure, sockets, or controls of the Product so as not to cause short circuiting.
6. Do not use the Product near heat sources (such as fire sources or hot furnaces).
7. Strictly abide by the ambient temperature specified in the User Manual when using the Product. If the temperature of the use environment is too high, the battery may catch fire or even explode. If the temperature is too low, the Product performance will be significantly reduced and the Product may even stop running.
8. Do not place heavy objects on top of the Product.
9. Do not forcibly block the fan during use.
10. Please avoid impact, fall, and violent vibration. In case of serious external impact, please immediately turn off the power and stop use. Please secure the Product during transportation to avoid vibration and impact.
11. If the Product accidentally falls into the water during use, please place it in a safe open area and keep away from it until it dries completely. The dried Product cannot be used again and should be disposed of according to the below section titled "Disposal". If the Product catches fire, please use fire extinguishing equipment in the following recommended order: water or water mist, sand, fire blanket, dry powder, CO2 (carbon dioxide) fire extinguisher.
12. If dirt enters a product port, use a dry cloth to clean it.
13. Please place the Product on a stable surface to prevent damage caused by tipping. If the Product is seriously damaged after tipping, shut it down immediately, put the battery in an open area away from combustible materials or people, and dispose of it in accordance with local laws and regulations.
14. Please keep the Product away from children and pets.
15. Store the Product in a dry and well ventilated area.

16. In a humid environment (seaside, waterside, etc.), it is recommended to use the Product in a moisture-proof bag to avoid immersion in water. If water enters the Product, do not use it or turn on. Ensure that anti-electric shock measures have been taken before touching it. Please put it in a safe and waterproof open area, and contact customer service or a licensed professional immediately.

17. The Product is not recommended for powering medical emergency equipment related to personal safety, including but not limited to hospital-use CPAP (Continuous Positive Air way Pressure) machines, ECMO (Extracorporeal Membrane Oxygenation) machines, etc. In addition, a home-use CPAP machine can be used normally in a home environment, and generally does not need continuous professional monitoring. Please follow your doctor's instructions, and consult the manufacturer for restrictions on the use of the related equipment. If the Product is used for general medical equipment, please monitor battery consumption to ensure that the Product does not run out of power.

18. A power supply product inevitably generates electromagnetic fields when used, which may affect the normal operation of implantable medical devices or personal medical devices, such as pacemakers, cochlear implants, hearing AIDS, defibrillators, etc. If using such medical devices, please consult the manufacturer for restrictions on their use to ensure that the Product is operated at an adequately safe distance from such medical devices (e.g., pacemakers, cochlear implants, hearing AIDS, defibrillators, etc.).

19. When the Product is connected to a refrigerator in its normal operating mode, it may automatically turn off due to power fluctuations from the refrigerator. If medicines, vaccines or other high-value items are stored in the refrigerator, it is recommended to set the AC output as "Never Turn Off" through the APP when connecting the Product to ensure continuous power supply. Also, monitor the battery level of the Product.



Using the Product in residential areas may cause disturbances.

Disposal

1. If possible, make sure to completely discharge the battery of the Product before placing the Product in the designated battery recycling bin. This Product contains a battery, which is considered a hazardous chemical substance. Disposal of the Product in a general-use trash receptacle is strictly prohibited. For relevant details, please refer to your local battery recycling and disposal laws and regulations.
2. If the battery cannot be completely discharged due to the fault of the Product itself, please contact a professional battery recycling company for further processing, instead of disposing of the battery directly in the battery recycling bin.
3. When an over-discharged battery cannot be activated, please dispose of it as specified.

UPS Function

The Product supports UPS (Uninterrupted Power Supply) functionality. When you connect the AC input port of the Product to the grid with the AC charging cable, an appliance can draw power from the AC output port of the Product to operate (at this time the AC power comes from the grid, not the battery). When the grid experiences a sudden power failure, the Product can automatically switch to its battery-powered mode within 10ms.



The UPS functionality of the Product is not that of a professional UPS function and does not support switching in 0ms. Do not connect to devices with high uninterrupted power supply requirements (such as data servers and workstations), or test repeatedly to confirm compatibility before use. Furthermore, it is recommended to use only one device with UPS requirements during use. Do not use multiple devices at the same time to avoid triggering the overload protection features of the Product. OSCAL is not liable for any failure of the device to operate correctly or any loss of data due to failure to follow the instructions.

Error Code and Solution

| Error code | Error type | Solution |
|------------|--|--|
| 001 | Battery overvoltage | Recovers after stopping charging/discharging for a period of time or after discharge |
| 002 | Battery undervoltage | Recovers after charging with mains power |
| 007 | Battery charging temperature low | Automatically recovers after reaching an appropriate temperature |
| 008 | Battery charging temperature high | Automatically recovers after reaching an appropriate temperature |
| 009 | Battery discharging temperature low | Automatically recovers after reaching an appropriate temperature |
| 010 | Battery discharging temperature high | Automatically recovers after reaching an appropriate temperature |
| 011 | BMS Mos tube temperature high | Automatically recovers after stopping charging/discharging for a period of time |
| 012 | BMS DCDC fault | Automatically recovers after stopping charging/discharging for a period of time |
| 013 | Total battery voltage too high | Automatically recovers after stopping charging |
| 014 | Total battery voltage too low | Automatically recovers after charge |
| 015 | Battery voltage difference too large | Contact the after-sales service |
| 016 | MPPT running fault | Check the light intensity and cable connection |
| 017 | MPPT temperature too high | Automatically recovers after stopping charging for a period of time |
| 018 | Solar charging disabled | Automatically recovers after stopping charging for a period of time or after discharge |
| 019 | Fan error | Contact the after-sales service |
| 020 | PCS communication interrupted | Contact the after-sales service |
| 021 | MPPT communication interrupted | Contact the after-sales service |
| 025 | Output short circuit | Disconnect the load and turn on AC switch. If the problem is persistent, contact the after-sales service |
| 026 | Output voltage too low/high | Automatically recovers after charge and discharge |
| 027 | Inverter temperature too high | Automatically recovers after a period of time |
| 028 | Battery overvoltage / Battery undervoltage / Undervoltage shutdown | Automatically recovers after charge and discharge |
| 030 | Overload | Check the load, reduce the load power, and turn on again |
| 037 | PCS temperature too high | Wait 30 minutes and turn on again |

APP



Smart Life

Use your mobile device to scan the QR code and download the Smart Life APP

Disclaimer

Before use, please read and fully understand the contents of the User Manual of the Product to ensure correct use. After reading, please store the User Manual in a safe place for future reference. Failure to operate the Product properly may cause serious injury to yourself or others, or result in damage to the Product and property damage. By using the Product, you confirm your understanding, acknowledgment, and acceptance of all the terms and conditions of this document. The user bears complete liability for his/her own actions and all consequences arising therefrom.

OSCAL is not liable for any damages caused by the user's failure to use the Product in accordance with the User Manual.

Within the scope of laws and regulations, OSCAL reserves the right to the final interpretation of this document and all related product documents.

The contents of the User Manual are subject to change, revision, or termination without prior notice. Please visit OSCAL's official website for the latest product information.

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance 20cm between the radiator and your body: Use only the supplied antenna.

PowerMax 2400 Portable Power Station



User Manual

1. Please keep the portable power station and accessories dry and away from fire.
 2. Do not disassemble or collide the product, or operate the product port to its instructions.
 3. Do not get caught in the rain or water. If it happens, stop using the product immediately.
 4. Please recycle and dispose the product subject to local laws and regulations.
 5. Children and special group of people may use the product under the supervision of guardian.
 6. Do not cover or block the radiator when using the product.



Dear customer,
 if you are in any problems with our products, Please feel free to contact us by scan the code or Email us to get professional worry-free technical support & Customer Service immediately
 We always do our best to maintain the interests of each customer and hope you get the most benefit from us!

Sehr geehrter Kunde,
 wenn Sie irgendwelche Probleme mit unseren Produkten haben, kontaktieren Sie uns bitte, indem Sie den Code scannen oder uns eine E-Mail schicken, um sofort professionelle und sorgenfreie technische Unterstützung zu erhalten & Kundenservice.
 Wir tun immer unser Bestes, um die Interessen eines jeden Kunden zu wahren und hoffen, dass Sie den größten Nutzen aus uns ziehen!

Gentile Cliente,
 Se hai domande sui nostri prodotti, non esitare a contattarci scansionando il codice QR o inviando un'e-mail per ottenere immediatamente supporto tecnico e servizio clienti professionale.
 Facciamo sempre del nostro meglio per mantenere gli interessi di ogni cliente e speriamo che tu possa ottenere il massimo beneficio da noi!

Cher client,
 si vous avez aucun problème avec nos produits, n'hésitez pas à nous contacter en scannant le code ou nous envoyant un courriel pour obtenir un soutien technique professionnel & Service client immédiatement.
 Nous faisons toujours de notre mieux pour maintenir l'intérêt de nos clients et espérons que vous obtiendrez le plus d'avantages de nous!

Estimado cliente,
 Si usted está en cualquier problema con nuestros productos, por favor sienta libre de enterarnos en contacto con nosotros por la exploración del QR código o del email nuestro para conseguir profesional soporte técnica preocupación-libre & servicio al cliente inmediatamente.
 Siempre hacemos todo lo posible para mantener intereses de cada cliente y esperamos que obtenga el máximo beneficio de nosotros

当社の製品に何か問題がございましたら、コードをスキャンしてお気軽にお問い合わせください、或は、メールでお問い合わせください


お客様の利益を守るために最善を尽くし、お客様によりよいサービスを提供して力を尽くします！

Scan the QR code below to get FREE-technical support
 Scannen sie den QR code unten, um KOSTENLOSEN technischen support zu erhalten
 Scansione il codice QR sotto per ottenere supporto tecnico GRATUITO
 Scannez le code QR ci-dessous pour bénéficier d'un soutien technique gratuite.
 Escanee el siguiente código QR para obtener asistencia técnica GRATUITA
 以下のQRコードをスキャンして、無料の技術サポートを受けられます




afterservice@oscal.hk

| | |
|-------------------------|-------|
| English text..... | 1-12 |
| 日本語デキスト..... | 13-24 |
| Текст на русском..... | 25-36 |
| Texte en français..... | 37-48 |
| Texto en español..... | 49-60 |
| Deutscher Text..... | 61-72 |
| Testo in italiano..... | 73-84 |
| Texto em português..... | 85-96 |



PowerMax 2400 (EU)

European standard products are only suitable
for 210-240V~ voltage input and output#



PowerMax 2400 (US) (JP)

US and Japanese standard products are only suitable
for 100-120V~ voltage input and output#



www.oscal.hk

Shenzhen Doke Communication Co.,Ltd

1301-1302, 13th Floor, Block B, WeiDongLong Business Building, Meilong Road 2113, Longhua District,
ShenZhen, P.R.C