



FCC TEST REPORT

FCC ID:2BQ07-Y25

Applicant: Shenzhen Jinghua Chuangxing Technology Co., Ltd
Address: 5th Floor, Building A, Jinhong Industrial Zone, Shiyan Street, Bao'an District, Shenzhen
Manufacturer: Shenzhen Jinghua Chuangxing Technology Co., Ltd
Address: 5th Floor, Building A, Jinhong Industrial Zone, Shiyan Street, Bao'an District, Shenzhen
EUT: Magnetic three-in-one wireless charging
Trade Mark: N/A
Model Number: Y25
Date of Receipt: Jun. 30, 2025
Test Date: Jun. 30, 2025 to Jul. 07, 2025
Date of Report: Jul. 07, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C
Test Result: Pass
Report Number: DLE-250709011R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENTS

1. VERSION	3
2. TEST SUMMARY	4
2.1 TEST FACILITY	5
2.2 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 TEST MODE	7
3.3 BLOCK DIAGRAM OF EUT CONFIGURATION	10
3.4 TEST CONDITIONS	11
3.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	11
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
4. CONDUCTED EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
5. RADIATED EMISSION MEASUREMENT	17
5.1 RADIATED EMISSION LIMITS	17
5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM	18
5.3 TEST PROCEDURE	19
5.4 DEVIATION FROM TEST STANDARD	19
5.5 TEST RESULT	19
6. 20DB BANDWIDTH TEST	32
6.1 TEST PROCEDURE	32
6.2 LIMIT	32
6.3 TEST SETUP	32
6.4 DEVIATION FROM STANDARD	32
6.5 TEST RESULT	33
7. ANTENNA REQUIREMENT	35
8. TEST SETUP PHOTO	36
9. EUT CONSTRUCTIONAL DETAILS	36



1. VERSION

Report No.	Version	Description	Approved
DLE-250709011R	Rev.01	Initial issue of report	Jul. 07, 2025



2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Stree
Longgang Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB identifier: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF conducted Spurious Emission	U=2.2dB
7	RF Occupied Bandwidth	U=1.8MHz
8	humidity uncertainty	U=5.3%
9	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Magnetic three-in-one wireless charging
Model No.:	Y25
Serial No.:	N/A
Model Difference:	N/A
Hardware Version:	V 1.0
Software Version:	V 1.1
Operation Frequency:	ANT 1&2: 111kHz ~ 205kHz ANT 3:300kHz ~ 350kHz
Modulation Type:	ASK
Antenna Type:	Loop Coil Antenna
Antenna Gain:	0dBi
Ratings:	Input: 9V/2A Phone Output:: 5W/7.5W/10W/15W Earphone Output: 5W Watch Output: 3W (max)
Transmitting Mode:	Keep the EUT in continuously wireless charging mode



3.2 TEST MODE

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.



EUT mode of operation before folding:

Test Modes:	Test Coil:	Description:
Mode 1	ANT 1	AC/DC Adapter + EUT + Phone 15W (Battery Status: <1%)
Mode 2		AC/DC Adapter + EUT + Phone 15W (Battery Status: 50%)
Mode 3		AC/DC Adapter + EUT + Phone 15W (Battery Status: >98%)
Mode 4		AC/DC Adapter + EUT + Phone 10W (Battery Status: <1%)
Mode 5		AC/DC Adapter + EUT + Phone 10W (Battery Status: 50%)
Mode 6		AC/DC Adapter + EUT + Phone 10W (Battery Status: >98%)
Mode 7		AC/DC Adapter + EUT + Phone 7.5W (Battery Status: <1%)
Mode 8		AC/DC Adapter + EUT + Phone 7.5W (Battery Status: 50%)
Mode 9		AC/DC Adapter + EUT + Phone 7.5W (Battery Status: >98%)
Mode 10		AC/DC Adapter + EUT + Phone 5W (Battery Status: <1%)
Mode 11		AC/DC Adapter + EUT + Phone 5W (Battery Status: 50%)
Mode 12		AC/DC Adapter + EUT + Phone 5W (Battery Status: >98%)
Mode 13	ANT 2	AC/DC Adapter + EUT + Earphone 5W (Battery Status: <1%)
Mode 14		AC/DC Adapter + EUT + Earphone 5W (Battery Status: 50%)
Mode 15		AC/DC Adapter + EUT + Earphone 5W (Battery Status: >98%)
Mode 16	ANT 3	AC/DC Adapter + EUT + Watch 3W (Battery Status: <1%)
Mode 17		AC/DC Adapter + EUT + Watch 3W (Battery Status: 50%)
Mode 18		AC/DC Adapter + EUT + Watch 3W (Battery Status: >98%)
Mode 19	ANT1 + ANT2+ANT3	AC/DC Adapter + EUT + Phone 15W + Earphone 5W +Watch 3W (Battery Status: <1%)
Mode 20		AC/DC Adapter + EUT + Phone 15W + Earphone 5W +Watch 3W (Battery Status: 50%)
Mode 21		AC/DC Adapter + EUT + Phone 15W + Earphone 5W +Watch 3W (Battery Status: >98%)
Mode 22	ANT1 + ANT2	AC/DC Adapter + EUT + Phone 15W + Earphone 5W (Battery Status: <1%)
Mode 23		AC/DC Adapter + EUT + Phone 15W + Earphone 5W (Battery Status: 50%)
Mode 24		AC/DC Adapter + EUT + Phone 15W + Earphone 5W (Battery Status: >98%)
Mode 25	ANT1 + ANT3	AC/DC Adapter + EUT + Phone 15W + Watch 3W (Battery Status: <1%)
Mode 26		AC/DC Adapter + EUT + Phone 15W + Watch 3W (Battery Status: 50%)




Mode 27		AC/DC Adapter + EUT + Phone 15W + Watch 3W (Battery Status: >98%)
Mode 28		AC/DC Adapter + EUT + Earphone 5W +Watch 3W (Battery Status: <1%)
Mode 29	ANT2 + ANT3	AC/DC Adapter + EUT + Earphone 5W +Watch 3W (Battery Status: 50%)
Mode 30		AC/DC Adapter + EUT + Earphone 5W +Watch 3W (Battery Status: >98%)




3.3 BLOCK DIAGRAM OF EUT CONFIGURATION

Conducted Emission

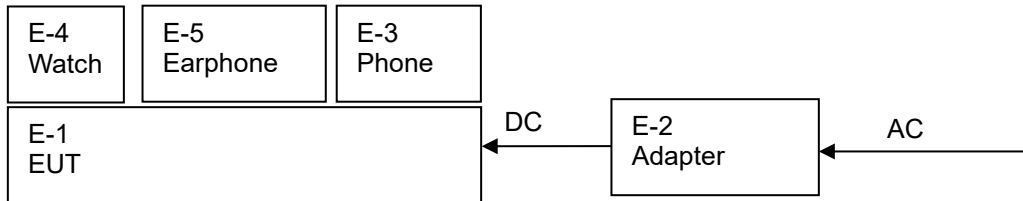

Radiated Emission

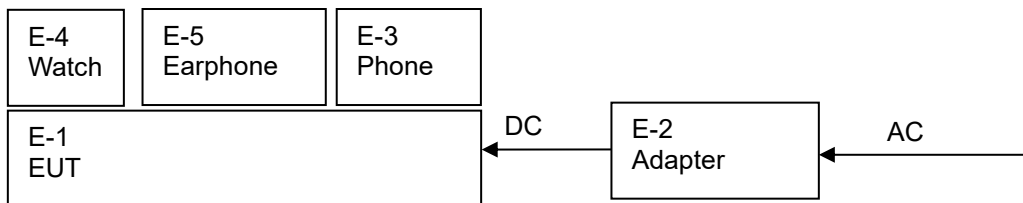



3.4 TEST CONDITIONS

Temperature: 23~26℃

Relative Humidity: 54~63 %

3.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Magnetic three-in-one wireless charging	N/A	Y25	N/A	EUT
E-2	AC/DC Adapter	SANXING	SX-200200CP1	N/A	Auxiliary
E-3	Phone	Xiaomi	Xiaomi 13	N/A	Auxiliary
E-4	Watch	Apple	iWatch SE	N/A	Auxiliary
E-5	Earphone	Apple	AirPods 2	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9kHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 01, 2024	Oct. 31, 2025
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

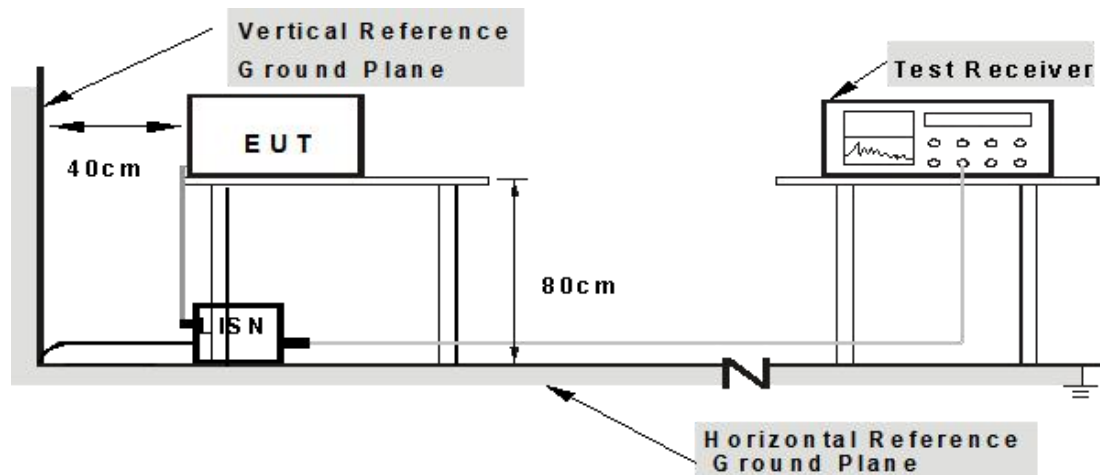

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	DC 9V	Test Mode :	Mode 19

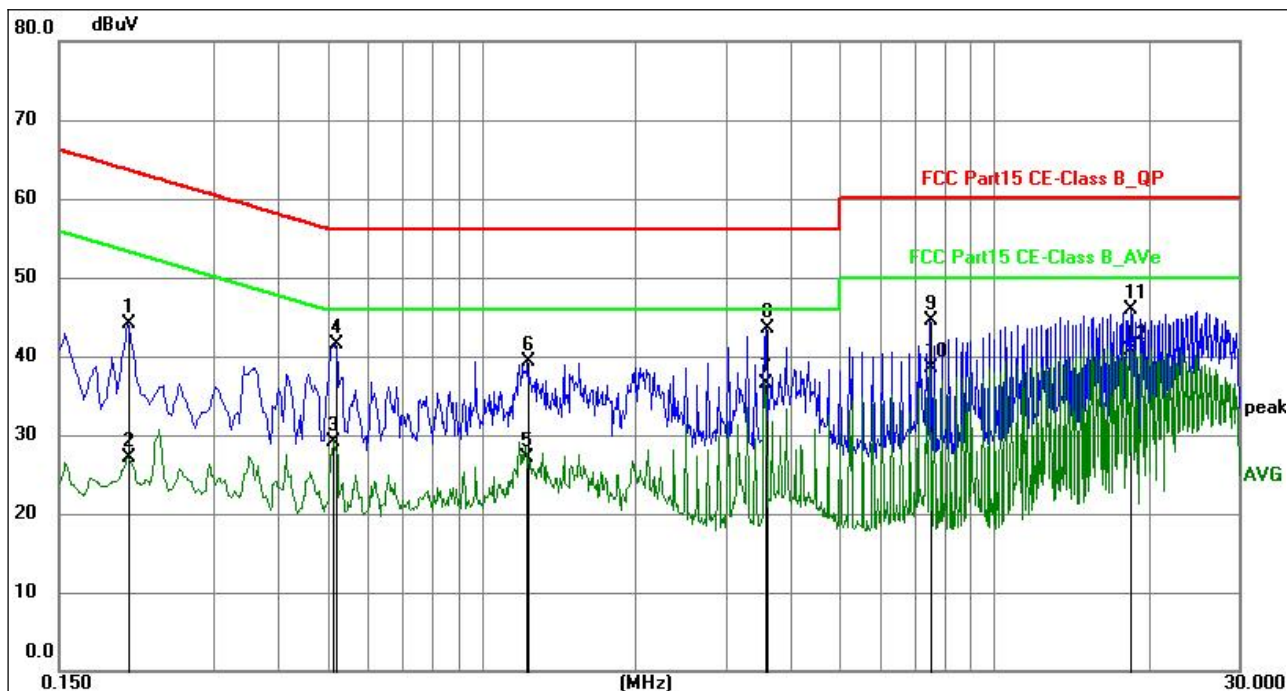


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2040	23.75	20.38	44.13	63.45	-19.32	QP	P	
2	0.2040	6.75	20.38	27.13	53.45	-26.32	AVG	P	
3	0.5155	8.71	20.30	29.01	46.00	-16.99	AVG	P	
4	0.5190	21.16	20.30	41.46	56.00	-14.54	QP	P	
5	1.2254	6.74	20.30	27.04	46.00	-18.96	AVG	P	
6	1.2300	19.05	20.30	39.35	56.00	-16.65	QP	P	
7	3.5655	16.26	20.34	36.60	46.00	-9.40	AVG	P	
8	3.5970	23.19	20.34	43.53	56.00	-12.47	QP	P	
9	7.5210	24.16	20.40	44.56	60.00	-15.44	QP	P	
10	7.5210	18.17	20.40	38.57	50.00	-11.43	AVG	P	
11	18.4470	25.48	20.50	45.98	60.00	-14.02	QP	P	
12	18.4470	20.15	20.50	40.65	50.00	-9.35	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lisen factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 19 recorded.



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	DC 9V	Test Mode :	Mode 19

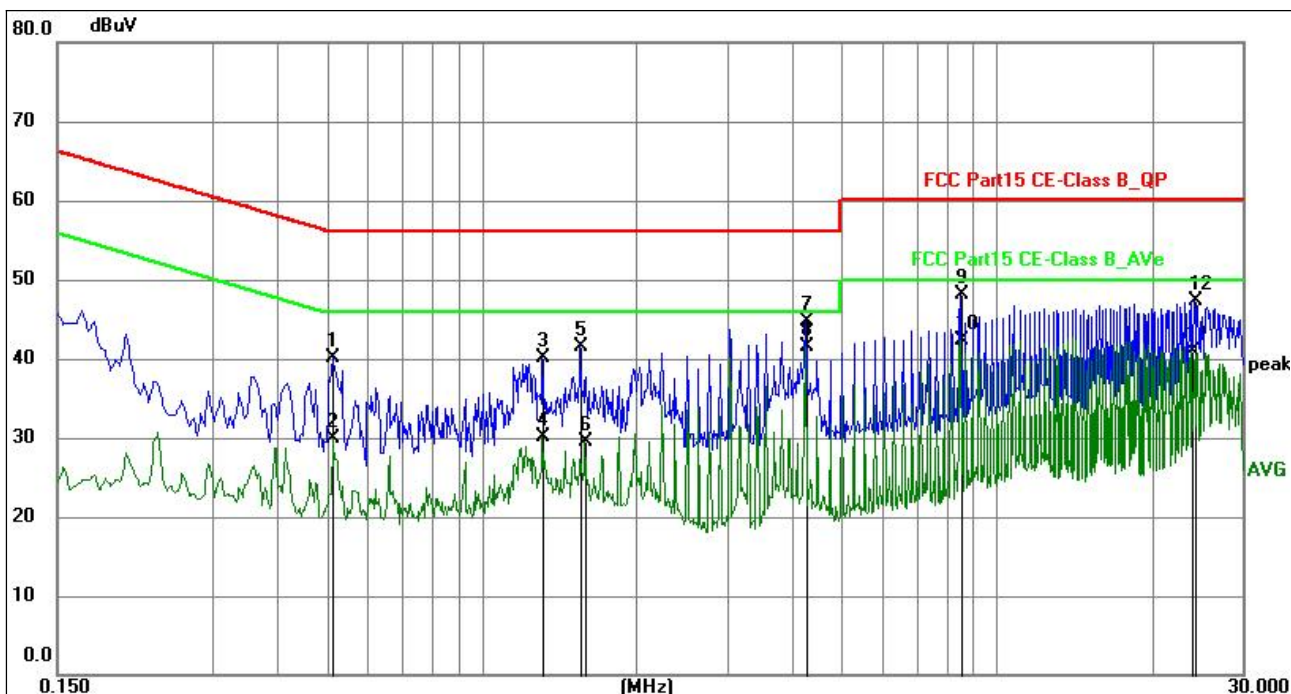

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5144	19.72	20.30	40.02	56.00	-15.98	QP	P	
2	0.5144	9.65	20.30	29.95	46.00	-16.05	AVG	P	
3	1.3154	19.89	20.31	40.20	56.00	-15.80	QP	P	
4	1.3154	9.77	20.31	30.08	46.00	-15.92	AVG	P	
5	1.5584	21.25	20.30	41.55	56.00	-14.45	QP	P	
6	1.5854	9.28	20.30	29.58	46.00	-16.42	AVG	P	
7	4.2540	24.45	20.34	44.79	56.00	-11.21	QP	P	
8	4.2540	21.14	20.34	41.48	46.00	-4.52	AVG	P	
9	8.5065	27.66	20.43	48.09	60.00	-11.91	QP	P	
10	8.5065	21.96	20.43	42.39	50.00	-7.61	AVG	P	
11	24.0090	20.31	20.64	40.95	50.00	-9.05	AVG	P	
12	24.2700	26.59	20.65	47.24	60.00	-12.76	QP	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lissn factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 19 recorded.



5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 RADIATED EMISSION LIMITS

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	$2400/F(\text{kHz})$	300	Quasi-peak Value
0.490-1.705	$24000/F(\text{kHz})$	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value


Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value




5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM

(A) Radiated Emission Test-Up Frequency Below 30MHz

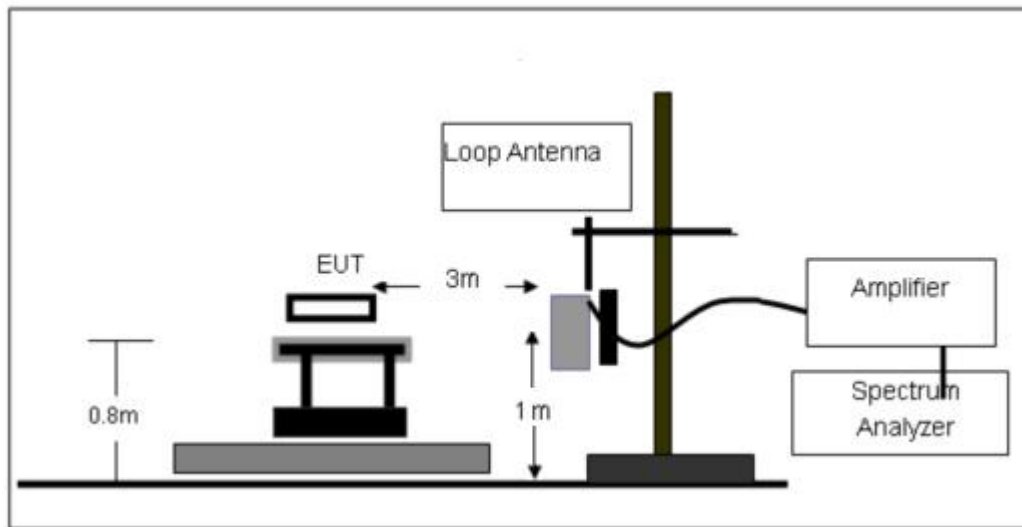

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

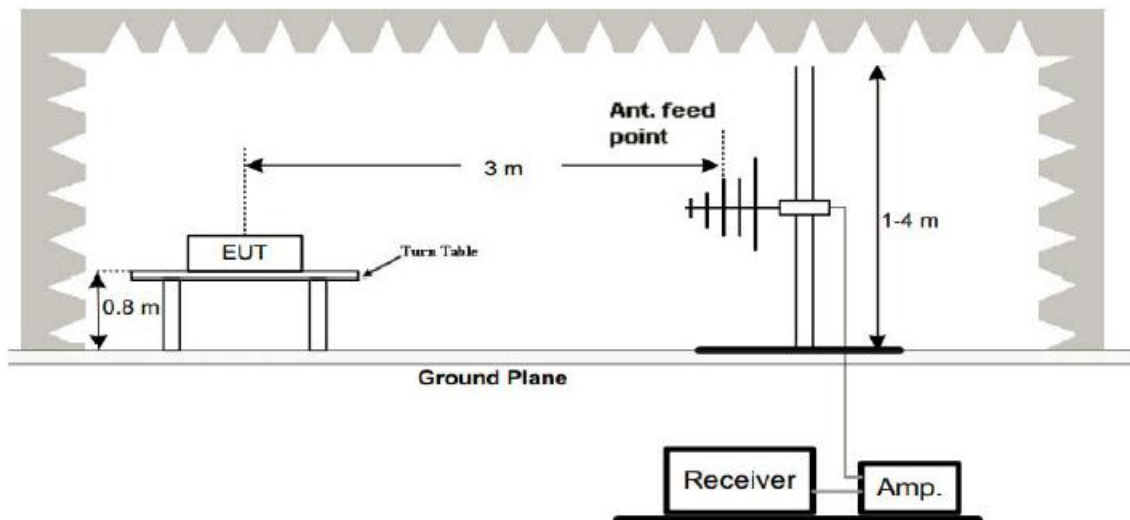

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



5.3 TEST PROCEDURE

Below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving loop antenna and in the center of a loop antenna, which was mounted on the top of a variable-height antenna tower.
- For each suspected emission, the EUT was arranged to its worst case, the height of interference-receiving loop antenna centre is 1 meter above the ground, and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- Both coaxial (loop plane perpendicular to the ground plane and to the measurement axis) and coplanar (loop plane perpendicular to the ground plane and coplanar with the measurement axis) polarizations of the antenna are set to make the measurement.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

30MHz-1GHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5 TEST RESULT

Measurement data:


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40



ANT-1 - 9 kHz~30 MHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	coaxial
Test Voltage :	DC 9V	Test Mode :	Mode 1

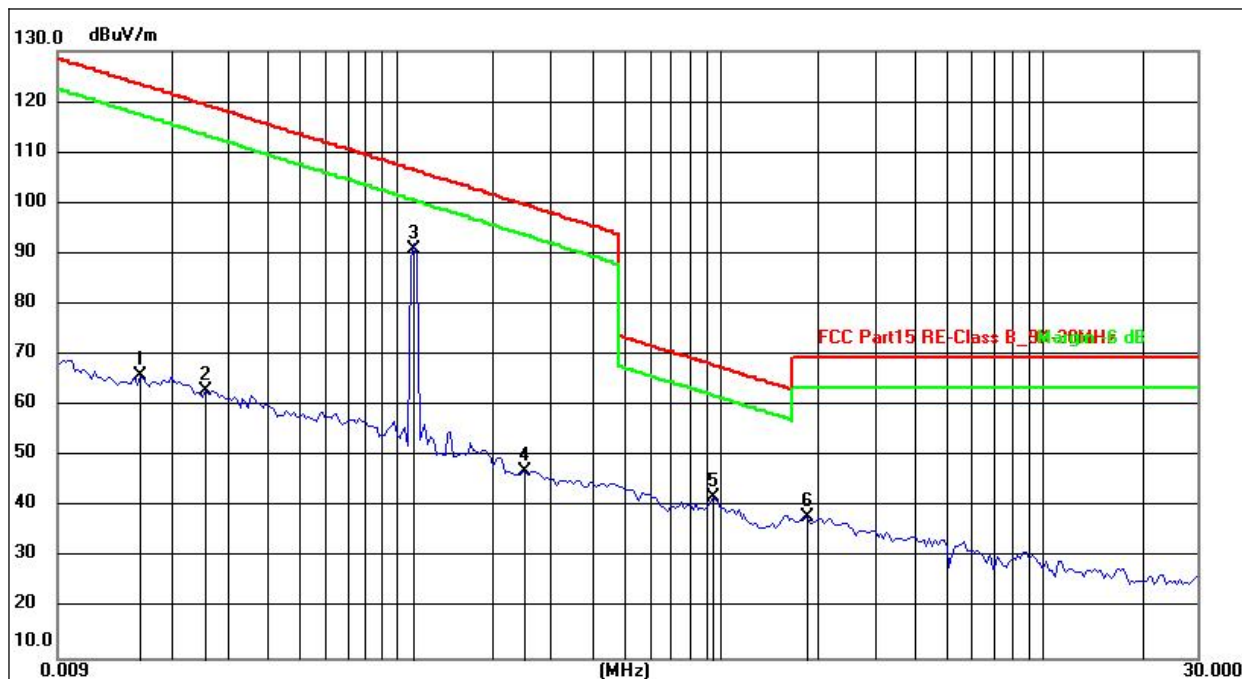

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0160	45.57	20.49	66.06	123.52	-57.46	peak
2	0.0258	42.72	20.31	63.03	119.37	-56.34	peak
3	0.1120	70.96	19.83	90.79	106.62	-15.83	peak
4	0.2503	27.04	20.10	47.14	99.63	-52.49	peak
5	0.9546	21.86	20.04	41.90	68.01	-26.11	peak
6	1.8643	18.29	19.82	38.11	69.54	-31.43	peak


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurements were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss factor - Amplifier factor.
5. Margin = Measurement Level - Limit.
6. All test modes were tested, with only the worst Mode 1 recorded.



ANT-1 - 30MHz-1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V	Test Mode:	Mode 1

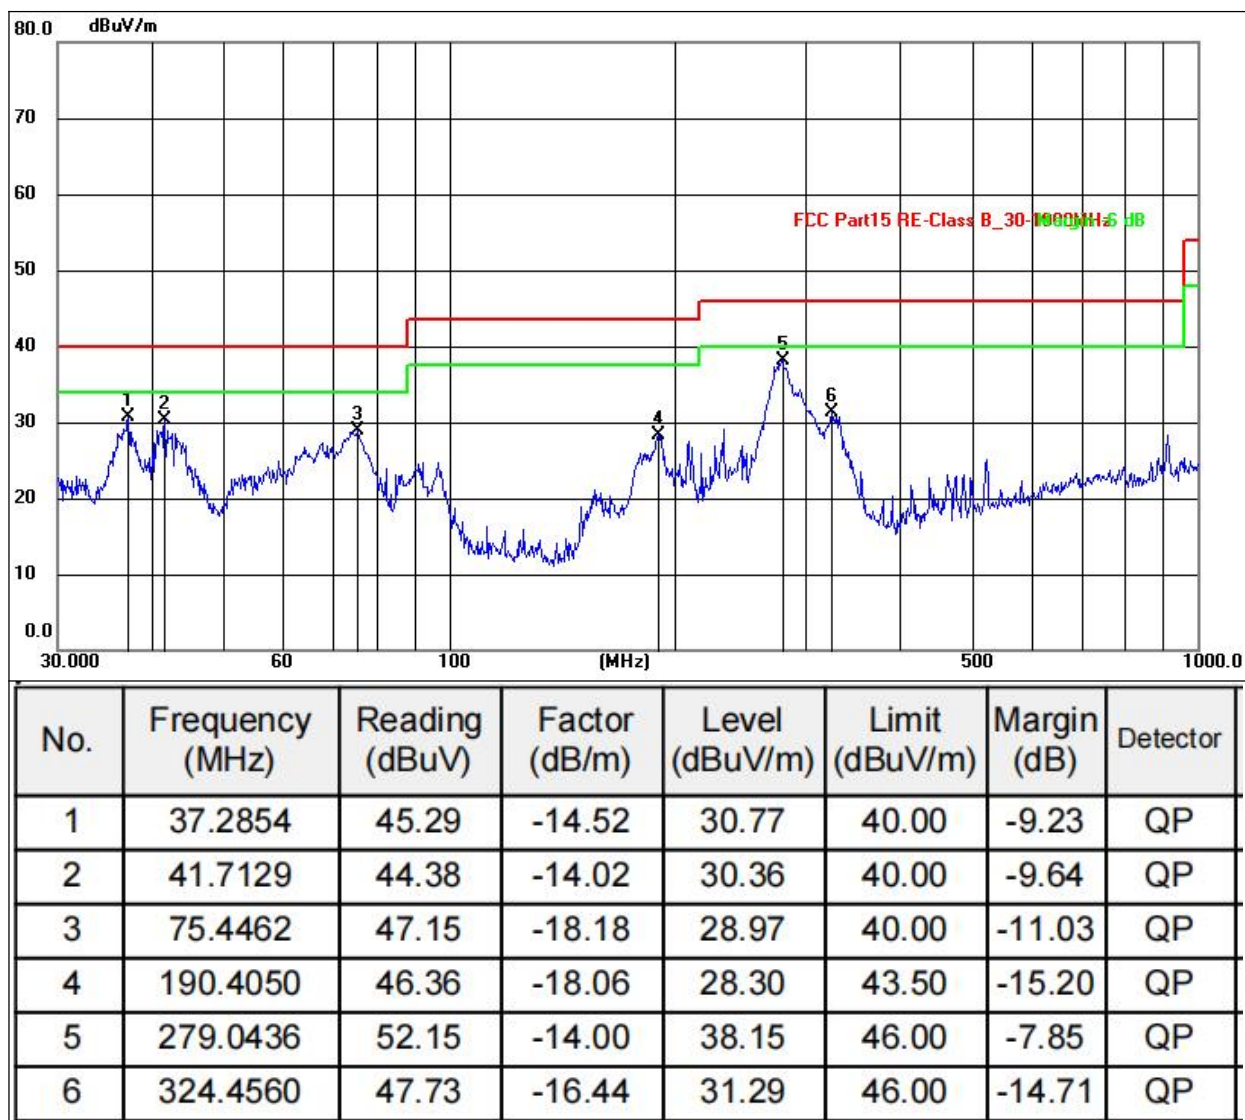


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V	Test Mode:	Mode 1

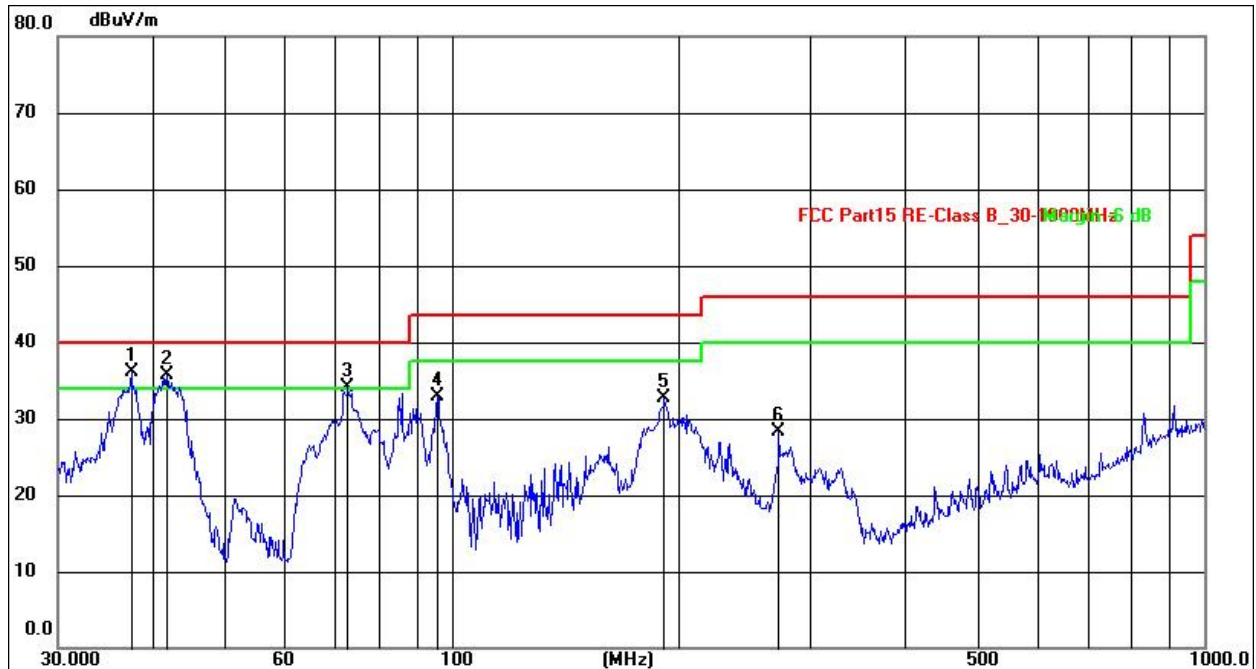

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.5478	53.14	-17.12	36.02	40.00	-3.98	QP
2	41.8595	52.56	-16.83	35.73	40.00	-4.27	QP
3	72.8466	53.99	-19.95	34.04	40.00	-5.96	QP
4	95.7622	54.16	-21.21	32.95	43.50	-10.55	QP
5	191.7450	52.82	-20.05	32.77	43.50	-10.73	QP
6	272.2776	47.12	-18.82	28.30	46.00	-17.70	QP


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1 recorded.



ANT-2 - 9 kHz~30 MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	coaxial
Test Voltage:	DC 9V	Test Mode:	Mode 13

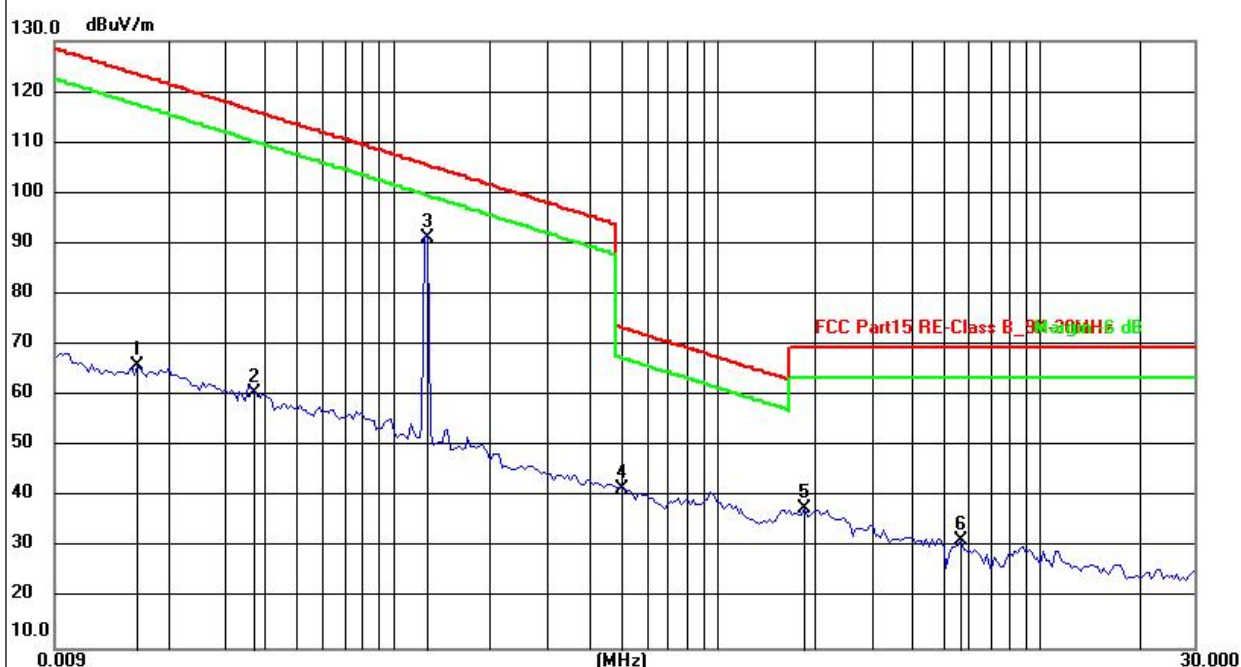

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0160	45.57	20.49	66.06	123.52	-57.46	peak
2	0.0371	40.46	20.05	60.51	116.22	-55.71	peak
3	0.1280	71.30	19.93	91.23	105.46	-14.23	peak
4	0.5090	21.35	20.21	41.56	73.47	-31.91	peak
5	1.8643	17.79	19.82	37.61	69.54	-31.93	peak
6	5.6875	11.92	19.41	31.33	69.54	-38.21	peak


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss factor - Amplifier factor.
5. Margin = Measurement Level - Limit.
6. All test modes were tested, with only the worst Mode 13 recorded.



ANT-2 - 30MHz-1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V	Test Mode:	Mode 13

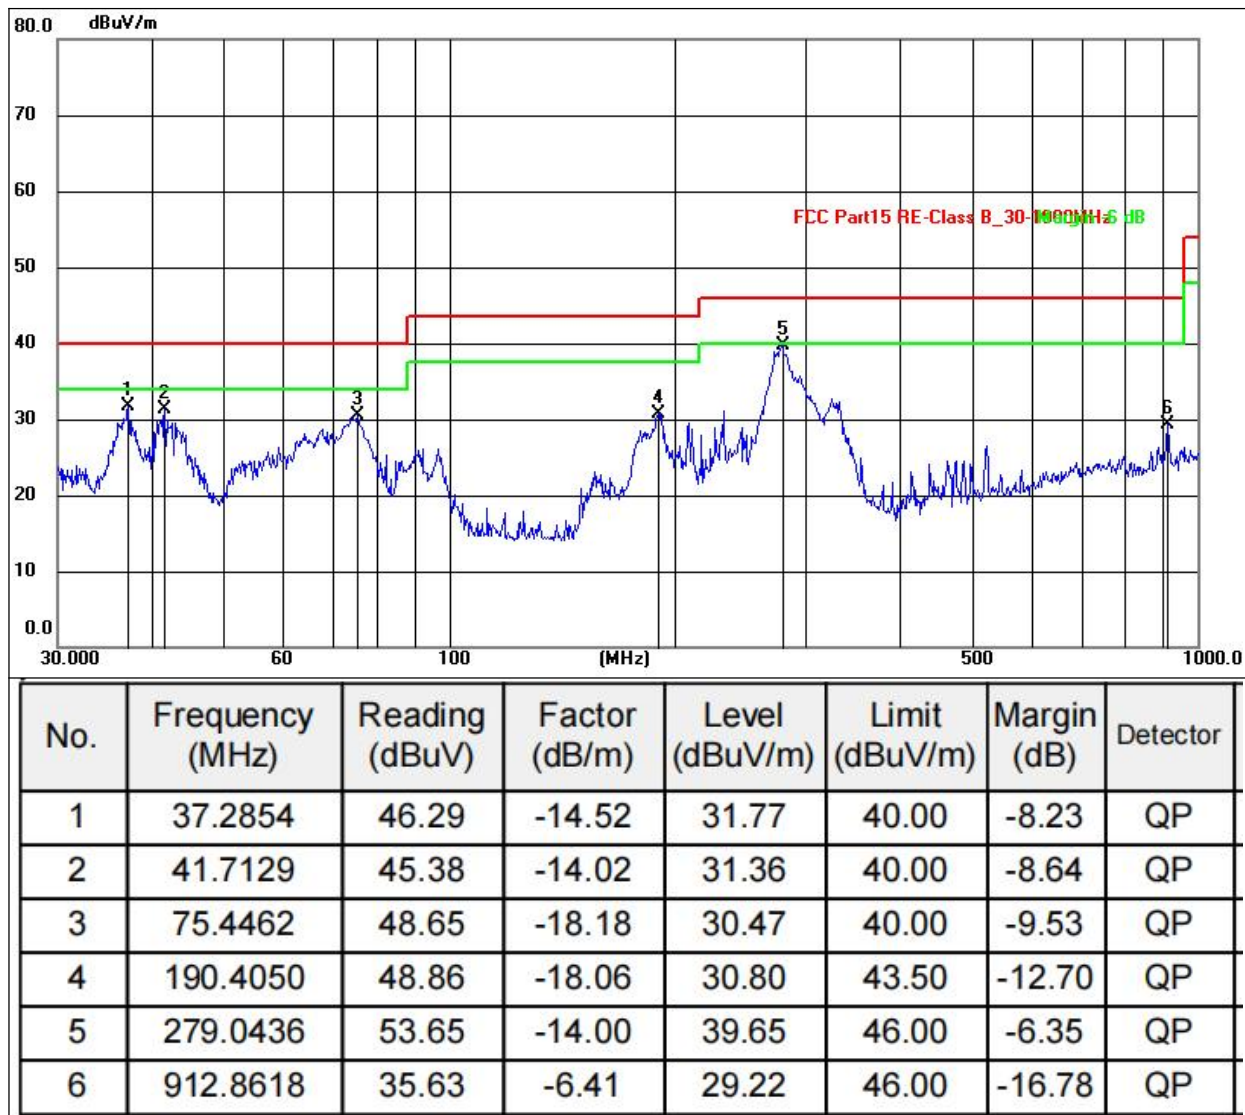


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 13 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V	Test Mode:	Mode 13

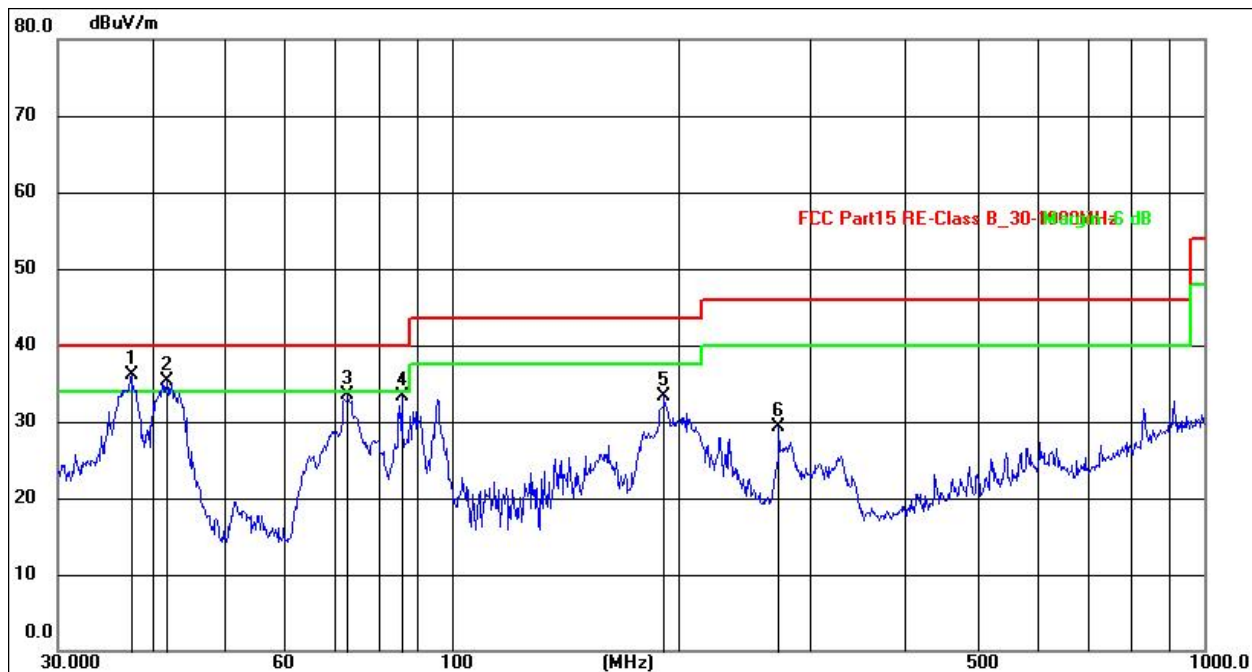

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.5478	53.14	-17.12	36.02	40.00	-3.98	QP
2	41.8594	52.06	-16.83	35.23	40.00	-4.77	QP
3	72.8465	53.49	-19.95	33.54	40.00	-6.46	QP
4	85.8983	54.87	-21.53	33.34	40.00	-6.66	QP
5	191.7450	53.32	-20.05	33.27	43.50	-10.23	QP
6	272.2776	48.12	-18.82	29.30	46.00	-16.70	QP


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 13 recorded.



ANT 3 - 9 kHz~30 MHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	coaxial
Test Voltage :	DC 9V	Test Mode :	Mode 16

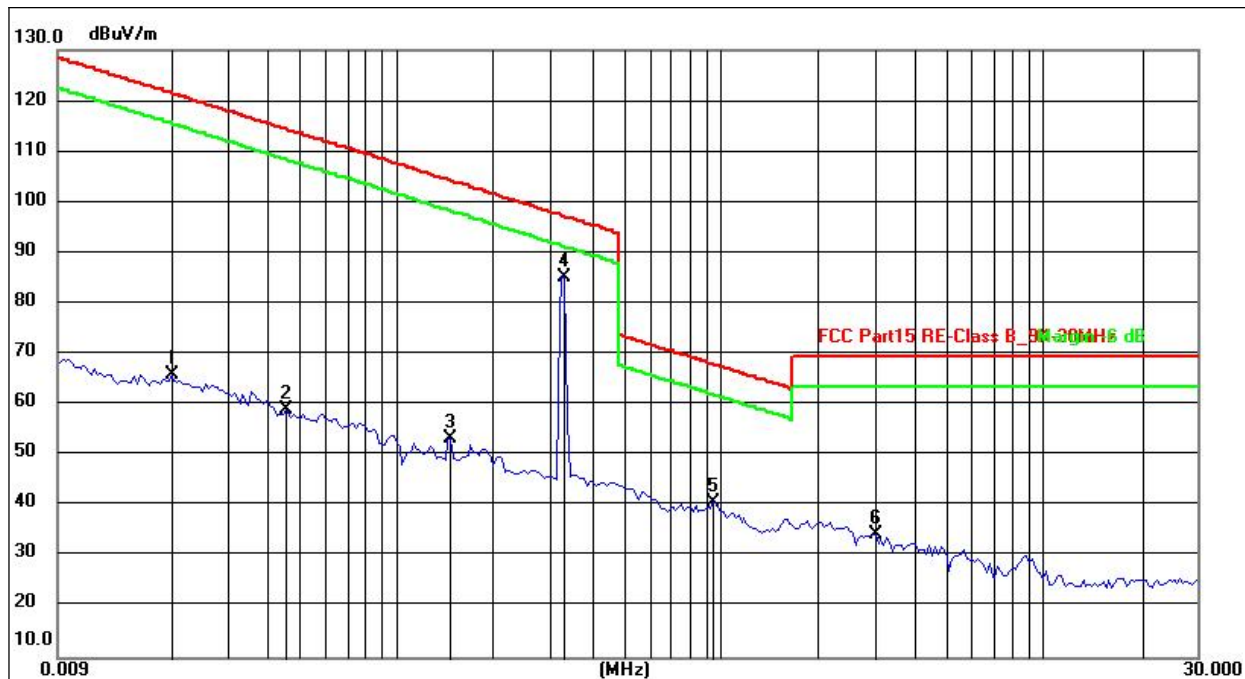

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0200	45.56	20.45	66.01	121.58	-55.57	peak
2	0.0454	39.05	19.86	58.91	114.46	-55.55	peak
3	0.1476	33.44	20.05	53.49	104.22	-50.73	peak
4	0.3270	65.00	20.13	85.13	97.31	-12.18	peak
5	0.9546	20.86	20.04	40.90	68.01	-27.11	peak
6	3.0331	14.85	19.64	34.49	69.54	-35.05	peak


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 16 recorded.



ANT 3 - 30MHz-1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V	Test Mode:	Mode 16

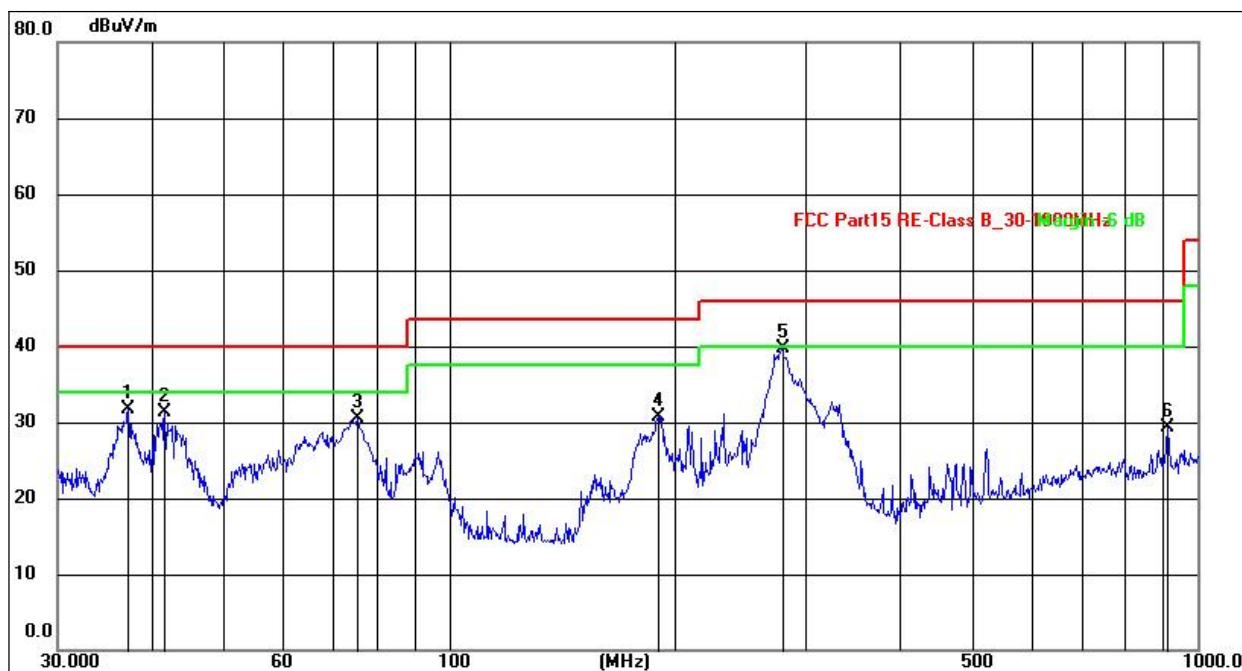


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.2854	46.29	-14.52	31.77	40.00	-8.23	QP
2	41.7129	45.38	-14.02	31.36	40.00	-8.64	QP
3	75.4462	48.65	-18.18	30.47	40.00	-9.53	QP
4	190.4050	48.86	-18.06	30.80	43.50	-12.70	QP
5	279.0436	53.65	-14.00	39.65	46.00	-6.35	QP
6	912.8618	35.63	-6.41	29.22	46.00	-16.78	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 16 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V	Test Mode:	Mode 16

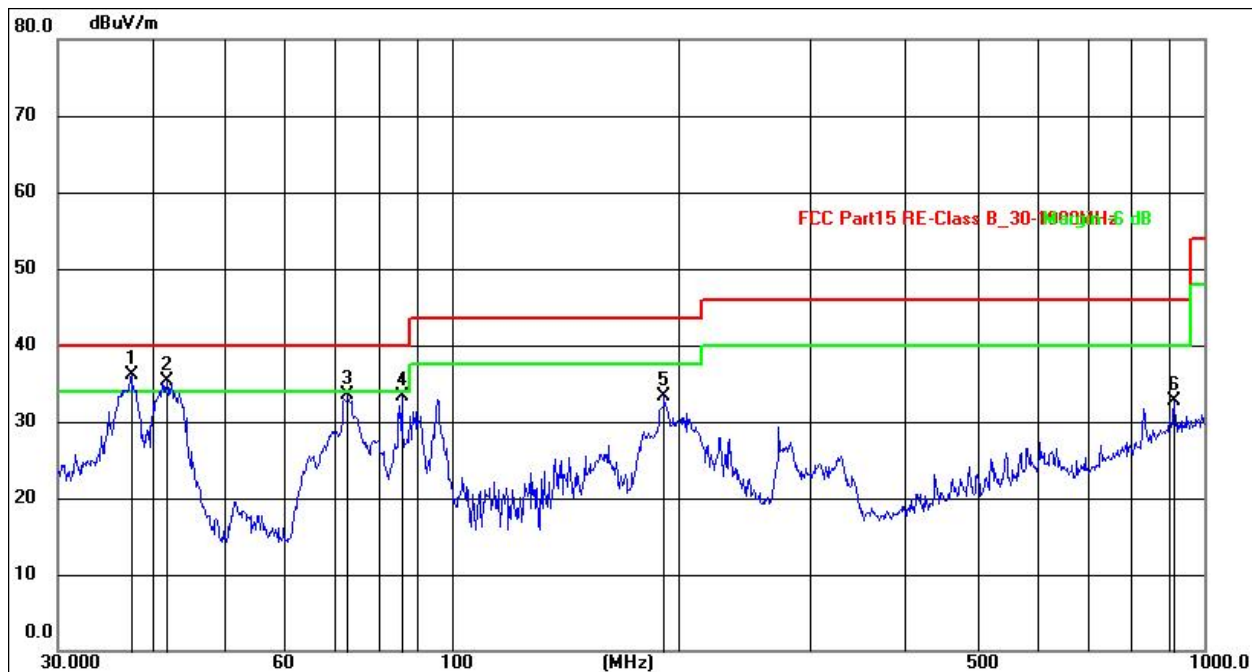

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.5478	53.14	-17.12	36.02	40.00	-3.98	QP
2	41.8594	52.06	-16.83	35.23	40.00	-4.77	QP
3	72.8465	53.49	-19.95	33.54	40.00	-6.46	QP
4	85.8983	54.87	-21.53	33.34	40.00	-6.66	QP
5	191.7450	53.32	-20.05	33.27	43.50	-10.23	QP
6	912.8618	33.06	-0.37	32.69	46.00	-13.31	QP


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 16 recorded.



ANT1+2+3 - 9 kHz~30 MHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	coaxial
Test Voltage :	DC 9V	Test Mode :	Mode 19

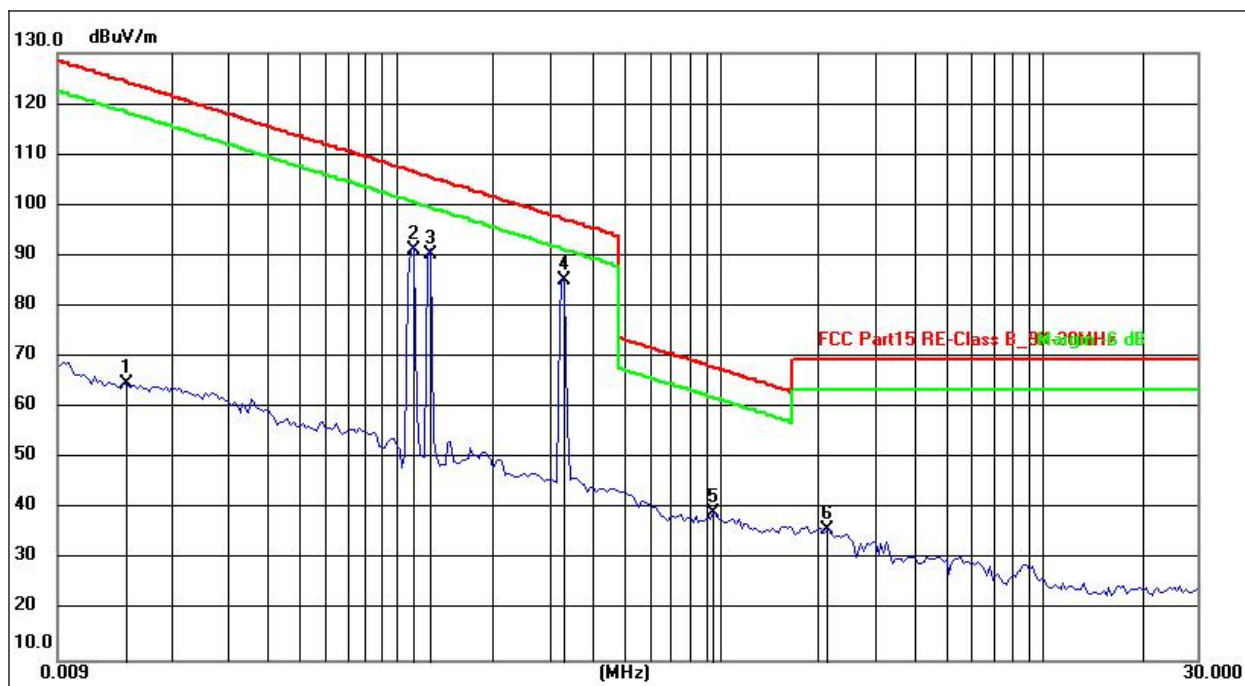

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0146	44.33	20.50	64.83	124.32	-59.49	peak
2	0.1120	71.40	19.83	91.23	106.62	-15.39	peak
3	0.1280	70.46	19.93	90.39	105.46	-15.07	peak
4	0.3270	65.00	20.13	85.13	97.31	-12.18	peak
5	0.9546	19.36	20.04	39.40	68.01	-28.61	peak
6	2.1486	16.06	19.78	35.84	69.54	-33.70	peak


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 19 recorded.



ANT1+2+3 - 30MHz-1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V	Test Mode:	Mode 19

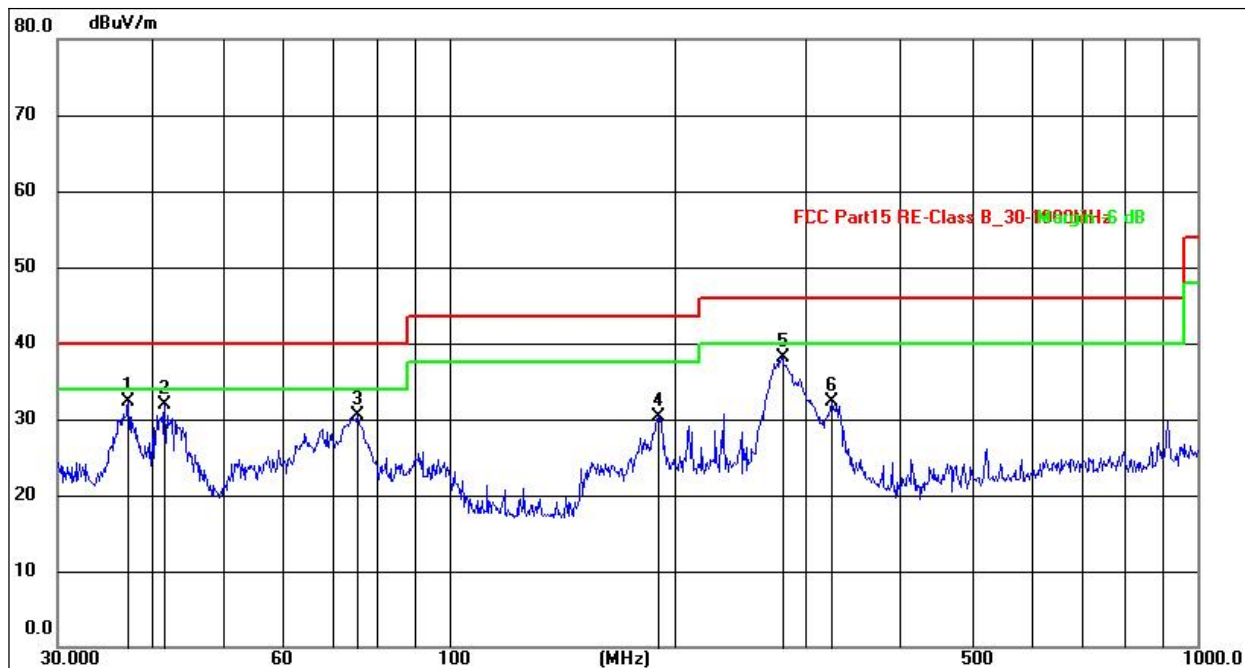


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.2854	46.79	-14.52	32.27	40.00	-7.73	QP
2	41.7129	45.88	-14.02	31.86	40.00	-8.14	QP
3	75.4462	48.65	-18.18	30.47	40.00	-9.53	QP
4	190.4050	48.36	-18.06	30.30	43.50	-13.20	QP
5	279.0436	52.15	-14.00	38.15	46.00	-7.85	QP
6	324.4560	48.73	-16.44	32.29	46.00	-13.71	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 19 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V	Test Mode:	Mode 19

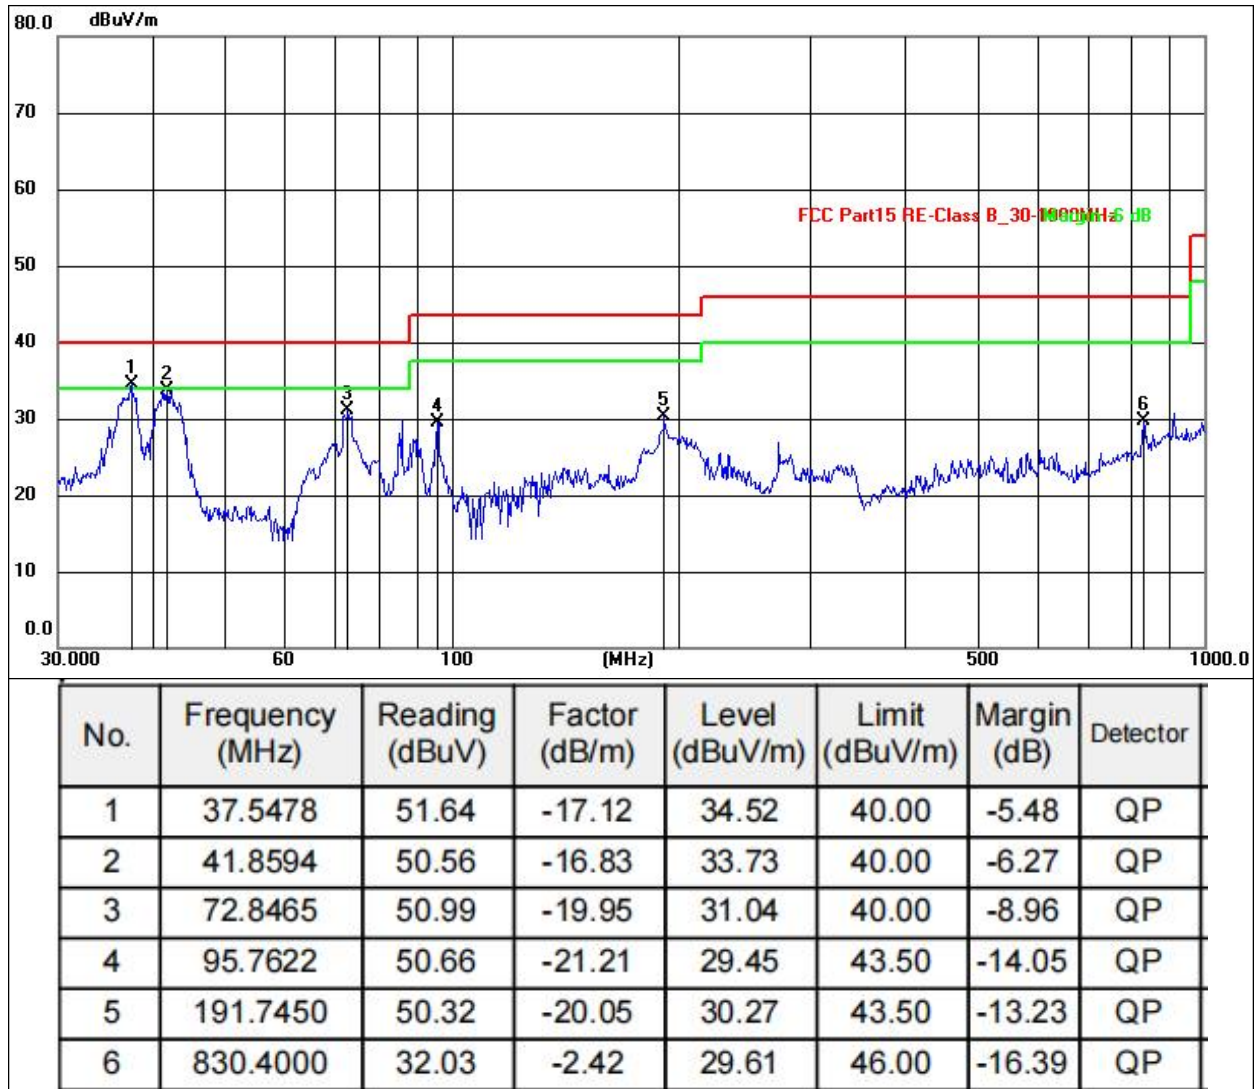

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 19 recorded.



6. 20DB BANDWIDTH TEST

6.1 TEST PROCEDURE

1. Se span = 1.5 ~ 5 times OBW.
2. Set RBW = 1%~5% OBW.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.2 LIMIT

N/A

6.3 TEST SETUP



6.4 DEVIATION FROM STANDARD

No deviation.




6.5 TEST RESULT


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 9V

Test Coil	Frequency (kHz)	20dB Bandwidth (kHz)	Result
ANT 1	112.00	2.523	Pass
ANT 2	128.00	2.607	Pass
ANT 3	327.00	2.558	Pass

ANT1:

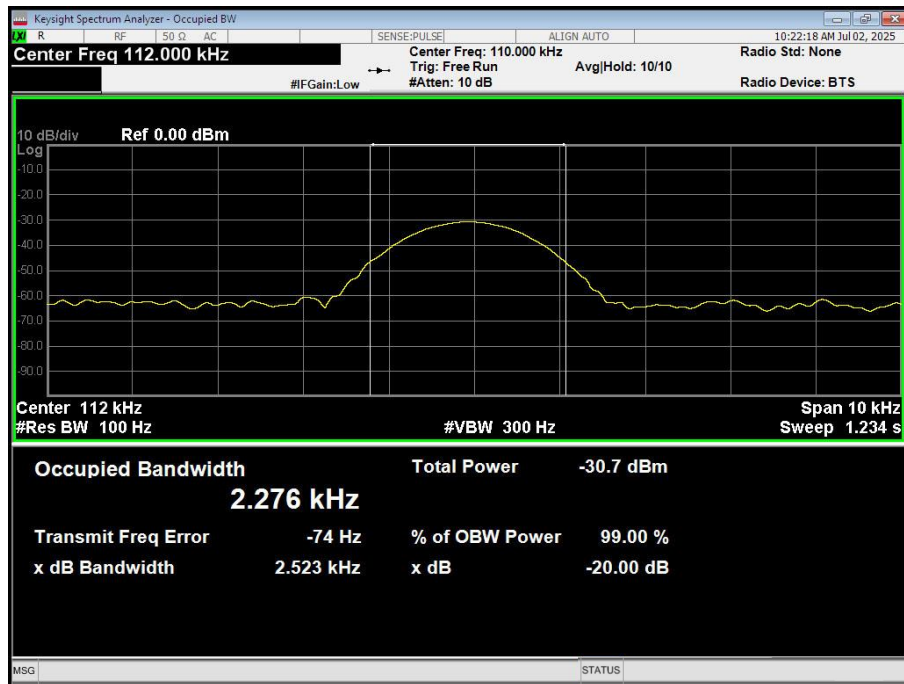


ANT2:

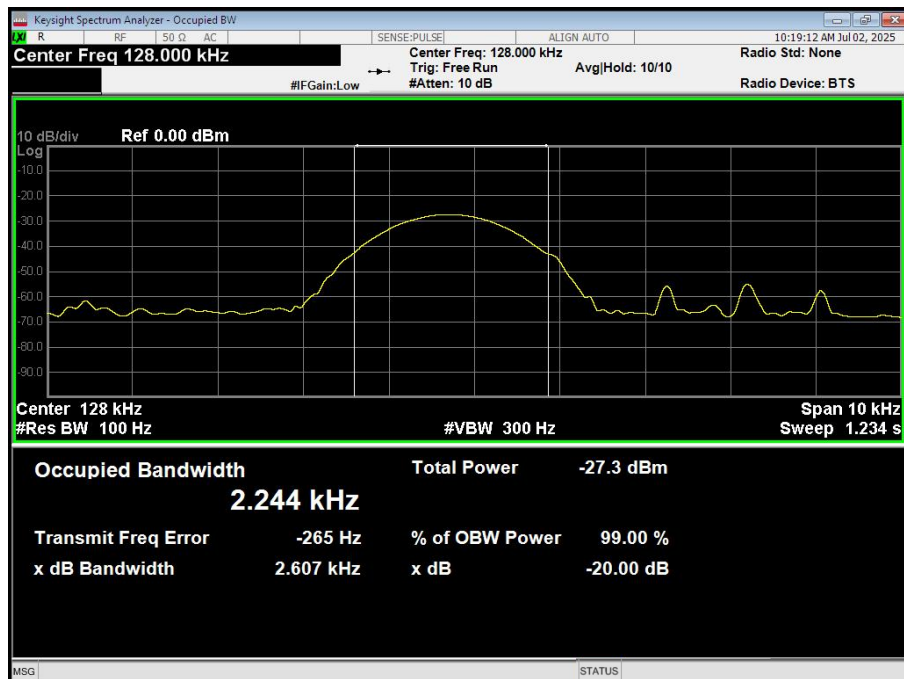



ANT3:

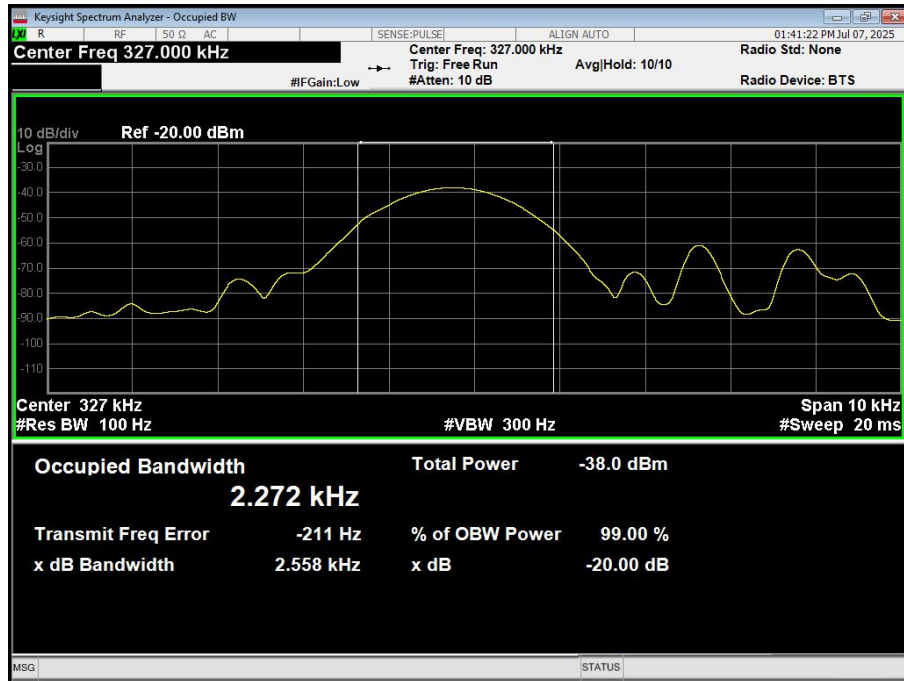



7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Loop Coil antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****