

TOPSTAR



EV Charger

INSTALLATION AND USAGE GUIDE



Intertek

TOPSTAR | TABLE OF CONTENTS

1.Safety Information.....	3-5
2.Specifications.....	6-8
3.Check Box Contents.....	9
4.Tools Needed.....	10
5.Installation Overview.....	11-25
Step 1: Download the APP (Home Version).....	11
Step 2: Download the OCPP Configuration Tool.....	12
Step 3: How is the EV Charger Powered.....	13
Step 4: Find a Place for the EV Charger.....	14
Step 5: Mark the Mounting Bracket Location.....	15
Step 6: Install the Mounting Bracket.....	15
Step 7: Install the Gun Cradle Beside the Charger.....	16
Step 8: Mount the EV Charger.....	16
Step 9a: Hardwired Instructions for Electricians.....	17-21
Step 9b: Plugged in Instructions for Electricians.....	22-25
Step 10: Complete Setup.....	25
6.Charging your Vehicle.....	26
7.EV Charger LED Lights.....	27-28
8.Troubleshooting Tips.....	29
9.FCC	30
10.Maintenance and Repair.....	31
11.Service.....	32



IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR ELECTRIC SHOCK!

Improper connection of the equipment- grounding conductor may result in a risk of electric shock, leading to death or serious injury. Topstar recommends that installation be performed by a licensed electrician or other qualified professional in accordance with the regional electrical code where it is being installed to ensure the Topstar EV Charger is properly grounded. Do not modify the provided plug – if it will not fit the outlet, have a proper outlet installed by a licensed electrician or other qualified professional.

GROUNDING INSTRUCTIONS

For Plugged-In Installation:

This product must be grounded. If it should malfunction or break down, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This product is equipped with a cord having an equipment grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING - Improper connection of the equipment-grounding conductor is able to result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the product is properly grounded. Do not modify the plug provided with the product – if it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For Hardwired Installation:

This product must be connected to a grounded, metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the product.

IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR ELECTRIC SHOCK

- Read all the instructions before using this product
- This device should be supervised when used around children. Do not put fingers into the electric vehicle connector.
- The Topstar EV Charger is intended for use with electric vehicles only. Specifically, it is intended only for charging vehicles not requiring ventilation during charging.
- Do not use the Topstar EV Charger in any manner other than specified in this installation guide. Refer servicing to qualified service personnel.
- Do not attempt to disassemble or repair any of the components of the Topstar EV Charger. There are no user serviceable parts inside.
- Do not use this product if the flexible power cord or EV cable is frayed, has broken insulation, or any other signs of damage.
- Do not use this product if the enclosure or the EV connector is broken, cracked, open, or shows any other indication of damage.
- Do not install the Topstar EV Charger in environments with explosive gas or vapors; nor where temperatures are outside its operating range of -22°F to 122°F (-30°C to 50°C).
- Use 105°C wire, 6 AWG copper for setting 48A rating intended for field wiring connection.

TOPSTAR | Moving and Storage Instructions

Improper moving or storage of the Topstar EV Charger may result in damage to the product that could result in a risk of fire or electric shock during subsequent use.

Handle charger and packaging with care and avoid dropping it. When moving or lifting the Topstar EV Charger, always grasp the unit by the charging station enclosure. Never carry or lift the Topstar EV Charger by either the power cable or charging cord.

Store the Topstar EV Charger indoors and in its original packaging until it is ready to be installed. Storage temperature should be between -22°F to 122°F (-30°C to 50°C).

TOPSTAR | Specifications

Electrical Characteristics	<ul style="list-style-type: none">› Safety Rated: 32A Max› Single phase input: nominal voltage 208-240 VAC ~60 Hz› Power: 7.6 kW at 240 VAC
Input Cable	<ul style="list-style-type: none">› NEMA 14-50 or NEMA 6-50Electrical Plug. Hardwired by licensed electrician
Output Cable & Connector	<ul style="list-style-type: none">› 18 ft/5.5 m cable (25ft/7.5m optional)› SAE J1772 standard compliant
App	<ul style="list-style-type: none">› Precision measurement of power, energy, voltage & current› Automated notifications: time-of-use in effect, start of charge, end of charge, unit offline, unit back online, car not plugged in by a set time
Smart Grid Connectivity	<ul style="list-style-type: none">› Built-in WIFI (802.11 b/g/n/2.4GHz) / Bluetooth Connectivity
Firmware	<ul style="list-style-type: none">› Over-the-air (OTA) upgradeable firmware
Emissions Reduction	<ul style="list-style-type: none">› Available via optional software upgrade
Emissions Reduction	<ul style="list-style-type: none">› Dynamic LED lights show charging status: standby, Device connectivity, charging in progress, fault indicator, network connectivity› NEMA Enclosure Type4: Weatherproof, dust-tight› IK10: Resistant polycarbonate case› Quick-release wall mounting bracket included› Operating Temperature: -22°F to 122°F (-30°C to 50°C)
Dimensions	<ul style="list-style-type: none">› Main enclosure:12.3in x 10.2in x 4.1in (313mm x 260mm x 105mm)
Codes & Standards	<ul style="list-style-type: none">› NEC625 compliant,UL2594 compliant, OCPP 1.6J,FCC Part 15Class B, Energy Star
Safety	<ul style="list-style-type: none">› ETL Listed
RFID	<ul style="list-style-type: none">› Optional
4G module	<ul style="list-style-type: none">› Optional
Warranty	<ul style="list-style-type: none">› 2 years limited product warranty
Made in China	<ul style="list-style-type: none">› From domestic & imported parts



TOPSTAR | Specifications

Electrical Characteristics	<ul style="list-style-type: none">› Safety Rated: 40A Max› Single phase input: nominal voltage 208-240 VAC ~60 Hz› Power: 9.6 kW at 240 VAC
Input Cable	<ul style="list-style-type: none">› NEMA 14-50 or NEMA 6-50Electrical Plug. Hardwired by licensed electrician
Output Cable & Connector	<ul style="list-style-type: none">› 18 ft/5.5 m cable (25ft/7.5m optional)› SAE J1772 standard compliant
App	<ul style="list-style-type: none">› Precision measurement of power, energy, voltage & current› Automated notifications: time-of-use in effect, start of charge, end of charge, unit offline, unit back online, car not plugged in by a set time
Smart Grid Connectivity	<ul style="list-style-type: none">› Built-in WIFI (802.11 b/g/n/2.4GHz) / Bluetooth Connectivity
Firmware	<ul style="list-style-type: none">› Over-the-air (OTA) upgradeable firmware
Emissions Reduction	<ul style="list-style-type: none">› Available via optional software upgrade
Emissions Reduction	<ul style="list-style-type: none">› Dynamic LED lights show charging status: standby, Device connectivity, charging in progress, fault indicator, network connectivity› NEMA Enclosure Type4: Weatherproof, dust-tight› IK10: Resistant polycarbonate case› Quick-release wall mounting bracket included› Operating Temperature: -22°F to 122°F (-30°C to 50°C)
Dimensions	<ul style="list-style-type: none">› Main enclosure:12.3in x 10.2in x 4.1in (313mm x 260mm x 105mm)
Codes & Standards	<ul style="list-style-type: none">› NEC625 compliant,UL2594 compliant, OCPP 1.6J,FCC Part 15Class B, Energy Star
Safety	<ul style="list-style-type: none">› ETL Listed
RFID	<ul style="list-style-type: none">› Optional
4G module	<ul style="list-style-type: none">› Optional
Warranty	<ul style="list-style-type: none">› 2 years limited product warranty
Made in China	<ul style="list-style-type: none">› From domestic & imported parts





TOPSTAR | Specifications

Electrical Characteristics	<ul style="list-style-type: none">› Safety Rated: 48A Max› Single phase input: nominal voltage 208-240 VAC ~60 Hz› Power: 11.5 kW at 240 VAC
Input Cable	<ul style="list-style-type: none">› Hardwired by licensed electrician
Output Cable & Connector	<ul style="list-style-type: none">› 18 ft/5.5 m cable (25ft/7.5m optional)› SAE J1772 standard compliant
App	<ul style="list-style-type: none">› Precision measurement of power, energy, voltage & current› Automated notifications: time-of-use in effect, start of charge, end of charge, unit offline, unit back online, car not plugged in by a set time
Smart Grid Connectivity	<ul style="list-style-type: none">› Built-in WIFI (802.11 b/g/n/2.4GHz) / Bluetooth Connectivity
Firmware	<ul style="list-style-type: none">› Over-the-air (OTA) upgradeable firmware
Emissions Reduction	<ul style="list-style-type: none">› Available via optional software upgrade
Emissions Reduction	<ul style="list-style-type: none">› Dynamic LED lights show charging status: standby, Device connectivity, charging in progress, fault indicator, network connectivity› NEMA Enclosure Type4: Weatherproof, dust-tight› IK10: Resistant polycarbonate case› Quick-release wall mounting bracket included› Operating Temperature: -22°F to 122°F (-30°C to 50°C)
Dimensions	<ul style="list-style-type: none">› Main enclosure:12.3in x 10.2in x 4.1in (313mm x 260mm x 105mm)
Codes & Standards	<ul style="list-style-type: none">› NEC625 compliant,UL2594 compliant, OCPP 1.6J,FCC Part 15› Class B, Energy Star
Safety	<ul style="list-style-type: none">› ETL Listed
RFID	<ul style="list-style-type: none">› Optional
4G module	<ul style="list-style-type: none">› Optional
Warranty	<ul style="list-style-type: none">› 2 years limited product warranty
Made in China	<ul style="list-style-type: none">› From domestic & imported parts




TOPSTAR | Check Box Contents

Your new Topstar EV Charger contains the following items. **If any of these items are missing or if you believe they've been damaged, call support immediately.**

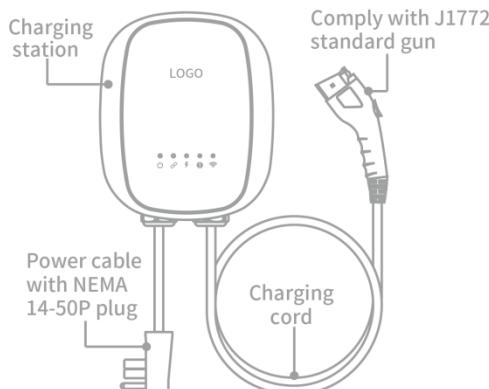

Mounting bracket x1



Gun cradle x1



10 drywall anchors



Eight 7/32inch #12 Phillips screws



Two M4X8 Phillips screws

TOPSTAR | Tools Needed

Here are the tools you will need to install the EV Charger.



Phillips,flathead and
torx crewdrivers




Pencil



iOS or Android
phone or tablet



Drill with a
5/16" drill bit



Hammer



Bubble level

TOPSTAR | Step 1:Download the APP (Home Version)

Use your phone to check the signal strength of your Wi-Fi network where the EV Charger will be installed. Low/no signal may require a Wi-Fi extender for the Charger to work. Download Topstar "Chargenius" APP onto your phone or tablet from the Apple App Store, from Google Play, Create account and begin the setup process.




Download on the
App Store



GET IT ON
Google Play

TOPSTAR | Step 2: Download the OCPP Configuration Tool

- Use your computer to open the Link:
<http://www.xiamenstopstar.com/en/download-36-64-65.html>.
- Find “OCPP Config Tool”, click “Downloaded”.
- Enter email address, click “Download” to download the Tool to your computer and begin the configure process.

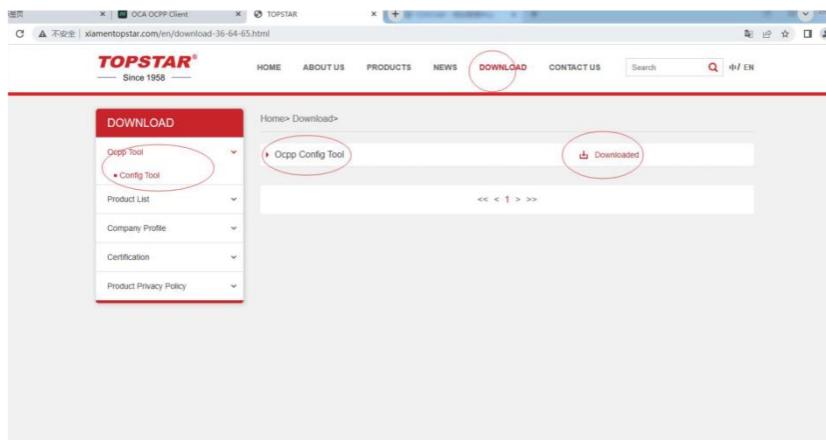

TOPSTAR

Sign up to receive exclusive offers and updates.

Enter your email address.

Download

TOPSTAR | Step 3: How is the EV Charger Powered?

Hardwired installation See Step 9a

- EV Charger can supply a maximum charge of 48A to the EV
- Requires a dedicated dual pole breaker. We recommend 60A.

CAUTION: To reduce the risk of fire, connect only to a circuit provided with 60 amperes maximum branch circuit over current protection in accordance with the National Electrical Code, ANSI/NFPA 70 and the Canadian Electrical Code, Part I, C22.1.


Dedicated Breaker	Charge Power @ 240V	
15A	2.9kW	12A
20A	3.8kW	16A
25A	4.8kW	20A
30A	5.8kW	24A
35A	6.7kW	28A
40A	7.7kW	32A
45A	8.6kW	36A
50A	9.6kW	40A
60A	11.5kW	48A




- Plugged-in installation See Step 9b
- EV Charger can supply a maximum charge of 40A to the EV
- Requires a dedicated, 50A dual pole breaker.
- Requires a NEMA14-50R receptacle outlet.
- Plugged-in installation see Step 9b
- EV Charger can supply a maximum charge of 40A to the EV
- Requires a dedicated, 50A dual pole breaker.
- Requires a NEMA 6-50R receptacle outlet.

TOPSTAR | Step 4: Find a Place for the EV Charger


This device shall be mounted at a sufficient height from grade such that the height of the storage means for the coupling device is located between 24"(600 mm) and 48"(1.2 m) from grade; the distance from the vehicle allows slack for charging cable; temperatures are between -22°F to 122°F; the charger is within range of WIFI signal; and if plugged-in, the distance from the NEMA outlet allows slack for a short cable.

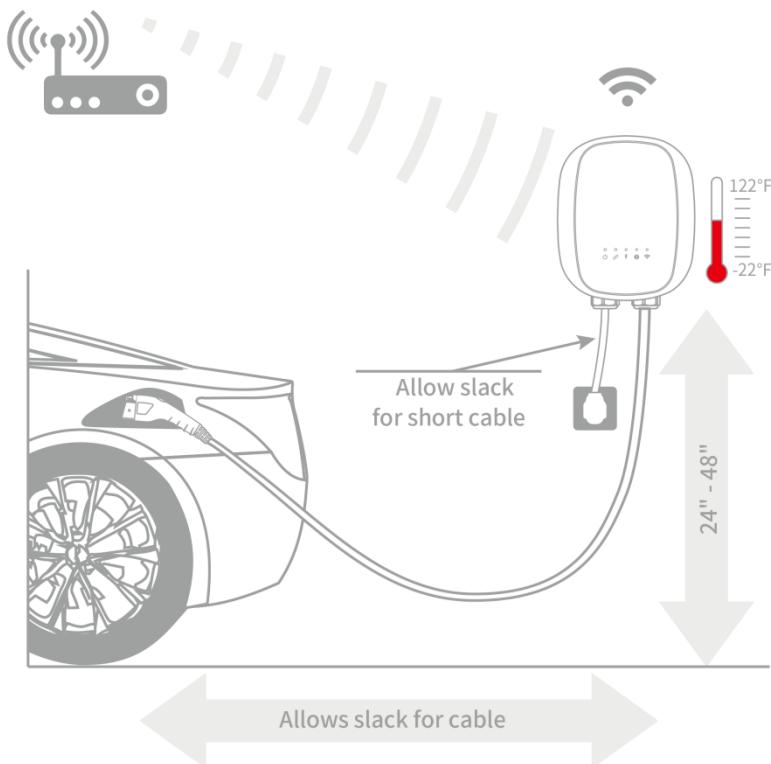

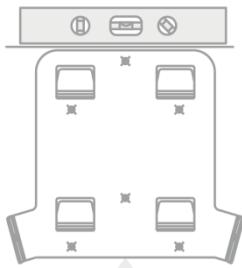


24" - 48"


On the plasterboard / drywall where the charger will be installed, use a bubble level to **draw a horizontal line** where the top of the EV Charger will sit on the wall ensuring it is mounted at a sufficient height from grade such that the height of the storage means for the coupling device is located between 24"(600 mm) and 48" (1.2 m) from grade and allows slack for the NEMA cable if it will be plugged in. Then, align the top of the mounting bracket to the line and **mark the 4 mounting holes**.

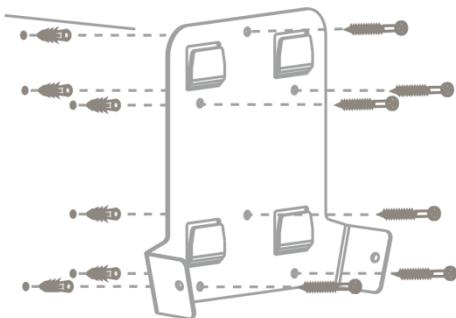



For each mark, drill a 5/16 hole in the wall. Use a hammer to tap in the 4 drywall anchors. **If you would like to install the gun cradle under the EV Charger**, install the mounting bracket with 3 Phillips screws into the top 3 anchors, omitting the bottom screw, and go to Step 6a . If you'd like to install the gun cradle off to the side of the EV Charger , install the mounting bracket with the 4 Phillips screws into the anchors and proceed to Step 7.

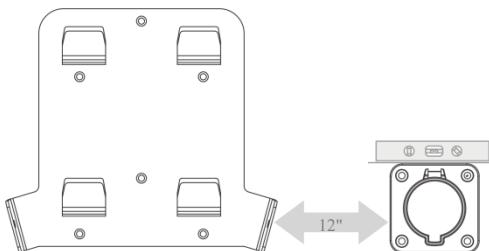


Use a bubble level to **draw a horizontal line** at least 12" away from the mounting bracket at the height you'd like the cradle beside your EV Charger. Holding the gun cradle up to your line, mark the top two and bottom mounting holes of the gun cradle. Drill a 5/16" hole in the wall for each mark. Use a hammer to tap in 4 drywall anchors. Install the gun cradle with 4 Phillips screws into the anchors.

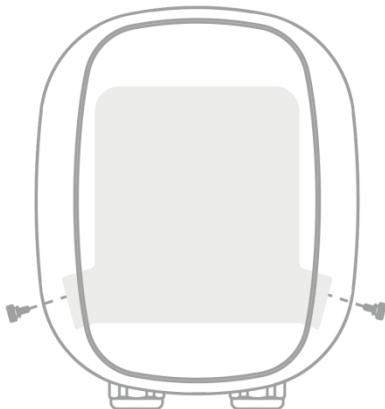

Use a Phillips screwdriver and the 4 Phillips bolts to install the EV Charger on the mounting bracket.

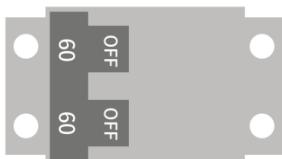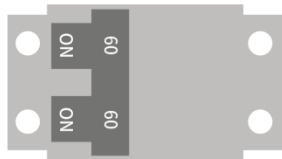


A licensed electrician or other qualified professional can follow these **instructions to hardwire the EV Charger to a breaker**. If you plan to power your EV Charger with a NEMA 14-50R/6-50R receptacle outlet, skip to Step 9b. First, turn off the dedicated dual-pole breaker that will power the EV Charger.

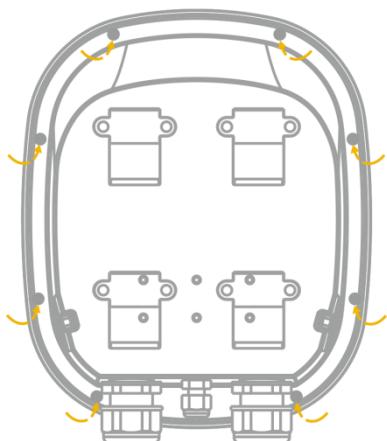

From the back of the EV Charger, use the Allen wrench to remove the 8 screws to detach the front cover.


CAUTION: there's a cable connecting the cover to the circuit board in the Charger. To remove the cable, gently grab the cable bundle and pull it away from the circuit board.

Unscrew the screws for **terminals L1, L2, and GND**, to remove the NEMA cable wires.

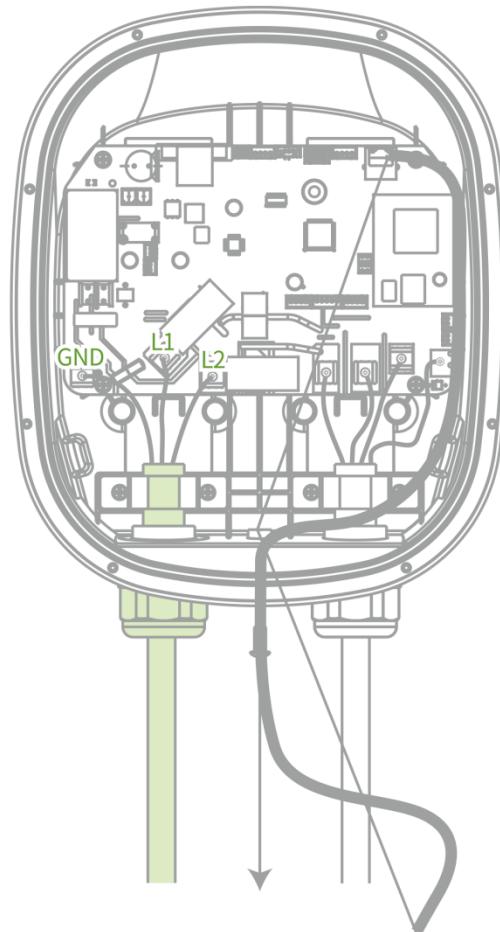


Ethernet cabling as shown


Unscrew the screws to remove the clamp securing NEMA cable. Then, remove the NEMA cable from the assembly. Finally, unscrew the nut holding the cable gland in place and remove it from the assembly.

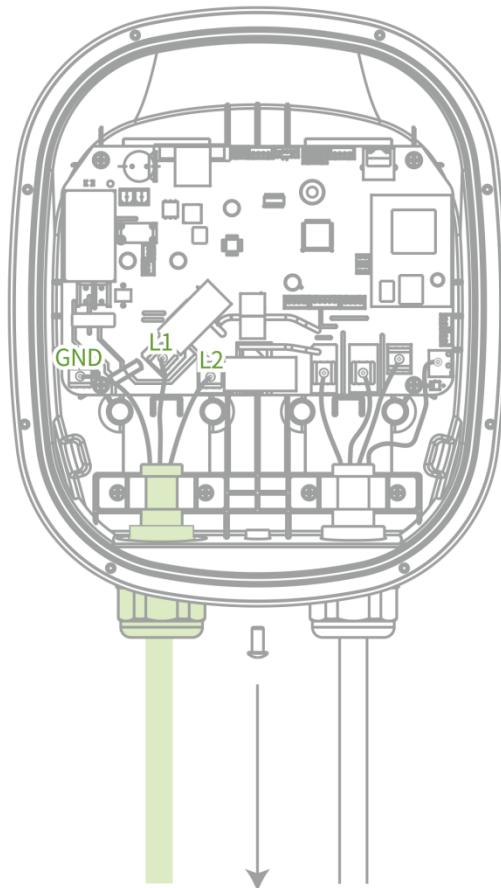



Pull out the plug rod of the middle waterproof connector, insert the Ethernet cable, and tighten the nut.

Using 1-1/4" conduit and proper fittings for the connections, use copper conductor only, 105°C, 6 AWG for setting 48A rating from both phases of the breaker along with a ground/earth lead into the EV Charger assembly. Put the phase 1 lead into terminal L2, the phase 2 lead into terminal L1, and the ground into terminal GND and secure them with the screws, applying a tightening torque of 1.2 Nm.

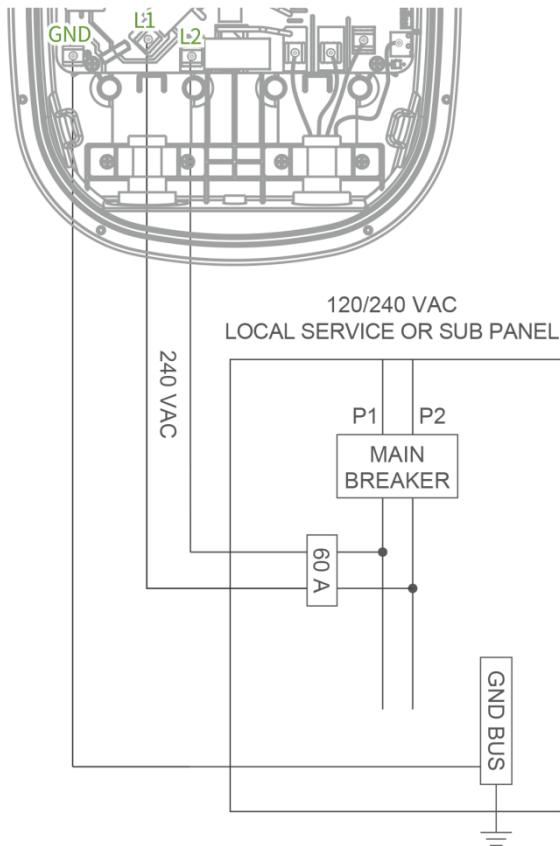


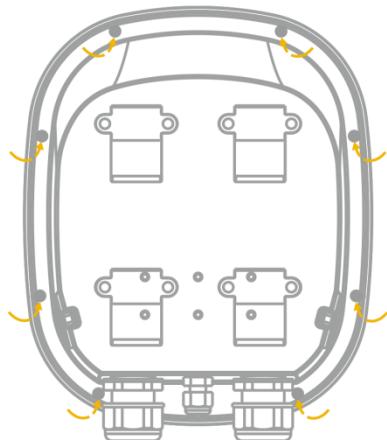

Gently reattach the cable to the cover and the circuit board. Then, from the back of the EV Charger, use the Allen wrench to replace the 8 screws to reattach the front cover.

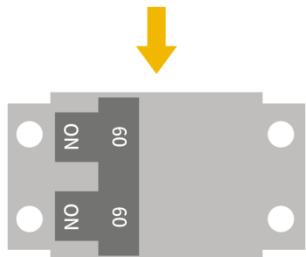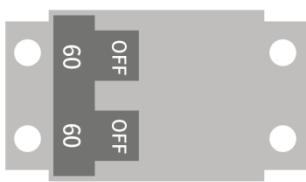


Turn on the breaker and ensure that the power light on the front of the EV Charger is illuminated.

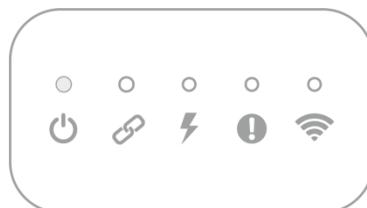




If a NEMA 14-50R receptacle outlet is not already at the EV Charger location, a licensed electrician or other qualified professional can follow these instructions to install one. First, turn off the dedicated dual-pole breaker that will power the EV Charger.




If a NEMA 6-50R receptacle outlet is not already at the EV Charger location, a licensed electrician or other qualified professional can follow these instructions to install one. First, turn off the dedicated dual-pole breaker that will power the EV Charger.

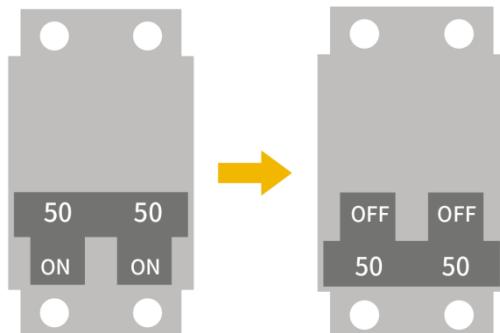




Install a NEMA14-50R receptacle outlet with the ground facing downward ensuring the distance between the NEMA outlet and the EV Charger allows slack for a short cable. Bring leads from both phases of the breaker along with a ground/earth lead to the outlet and connect them. **Neutral is not required.**

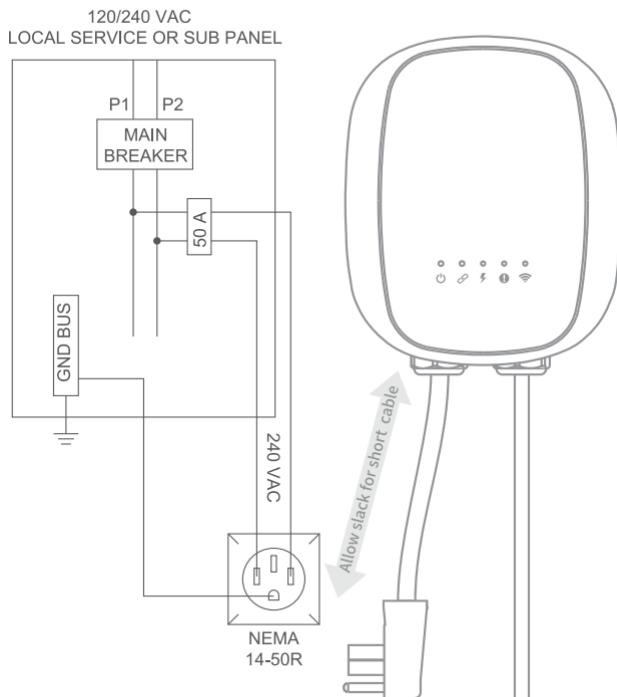




Install a NEMA6-50R receptacle outlet with the ground facing downward ensuring the distance between the NEMA outlet and the EV Charger allows slack for a short cable. Bring leads from both phases of the breaker along with a ground/earth lead to the outlet and connect them.

Neutral is not required.

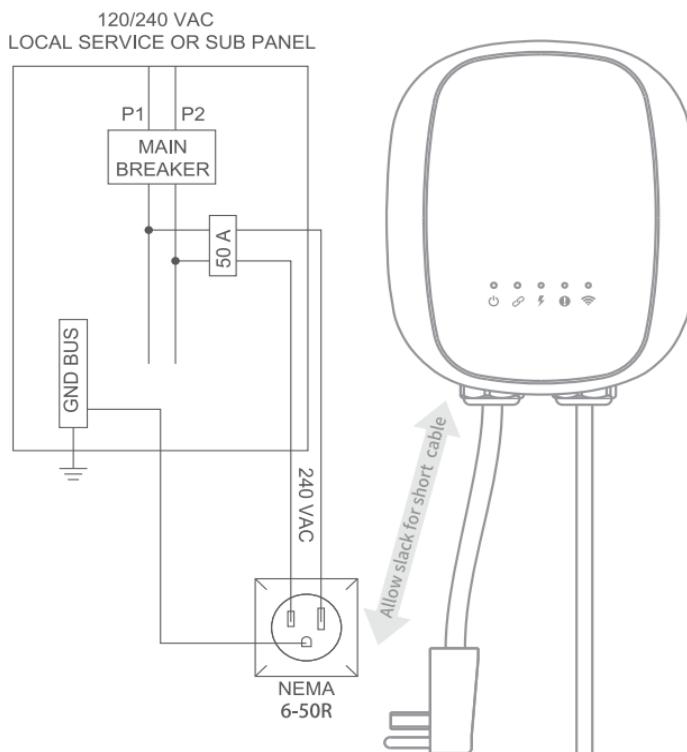




Plug in the NEMA 14-50P plug from the EV Charger into the receptacle outlet. Turn on the breaker and ensure that the power light on the front of the EV Charger is illuminated.

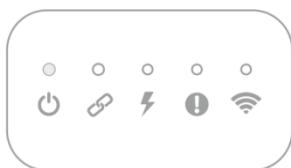

Plug in the NEMA 6-50P plug from the EV Charger into the receptacle outlet. Turn on the breaker and ensure that the power light on the front of the EV Charger is illuminated.




TOPSTAR | Step 10: Complete Setup



Your EV Charger is now ready to charge your vehicle. It is set from the factory to charge at maximum current. To raise or lower the charge rate to match your breaker size and to take advantage of the numerous other features available from Topstar, return to the Topstar App, choose Add a Device under Manage Devices and follow the instructions to set up your EV Charger. Your phone will connect via Bluetooth to the system and then you'll connect to a nearby- Wi-Fi router. Make sure you have your WIFI name and password.

TOPSTAR | Charging your Vehicle

Your charger is set from the factory to charge at maximum current. You can raise or lower this rate only through the Topstar app to charge your vehicle. To start charge the vehicle, open the port door and plug the EV Charger gun into the port. You will see the charge light on the EV Charger switch to solid green when it is connected to the vehicle. It will begin solid green, as the vehicle charges. Additionally, most EVs have indicator lights on the dashboard to let you know that you are charging. Do not attempt to drive your vehicle while the charge cable is connected to your vehicle.

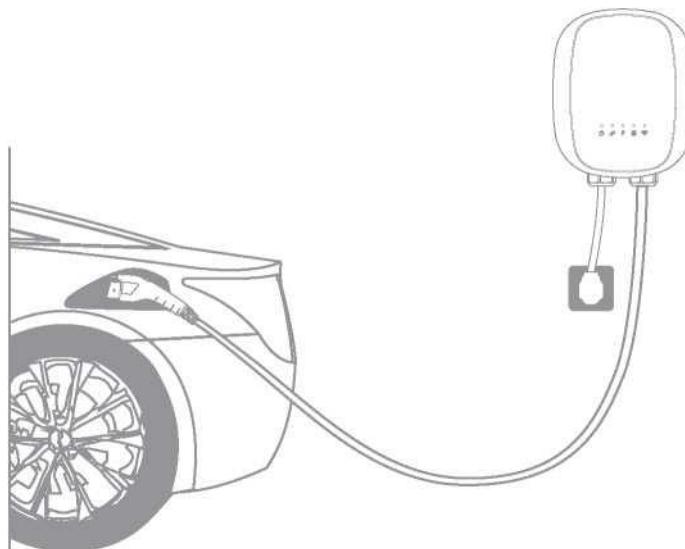

TOPSTAR | EV Charger LED Lights

Power	
Off	Charger does not have power
Solid blue	Charger has power
Connect	
Off	Faulty charging signal from the car
Flash Green	Charge mode
Solid Green	Pre-Charge Mode
Charge	
Off	Idle Mode
Flash Green	Charging Mode
Solid Green	Pre-Charge Mode
WIFI/4G	
Off	Not connected to router
Solid Green	Connected to the router and the Internet

TOPSTAR | EV Charger LED Lights

Fault	Description
Red light flashing every 3 seconds (Once)	<p>Input voltage is too high If plugged in, check that the NEMA14-50P or NEMA6-50P is plugged in securely. Check the supply breaker in your breaker panel for damage and replace if necessary. If issue persists, contact Support.</p>
Red light flashing every 3 seconds (twice)	<p>Input voltage is too low If plugged in, check that the NEMA14-50P or NEMA6-50P is plugged in securely. Check the supply breaker in your breaker panel for damage and replace if necessary. If issue persists, contact Support.</p>
Red light flashing every 3 seconds (three times)	<p>Output over current Unplug from car. Disconnect charger from power. Confirm there is no visible damage or foreign material in the EV gun. Return power to charger. If issue persists, contact Support.</p>
Red light flashing every 3 seconds (four times)	<p>Charger has exceeded nominal temperature. Ensure the charger is installed where ambient temperatures will not exceed 122°F (50°C). If issue persists, contact Support.</p>
Red light flashing every 3 seconds (five times)	<p>Current leakage. Unplug from car. Disconnect charger from power. Confirm there is no visible damage or foreign material in the EV gun. Return power to charger. If issue persists, contact Support.</p>
Red light flashing every 3 seconds (six times)	<p>Charger is not grounded Ensure that the EV Charger is properly wired and grounded. Check the line and neutral connections, as they may be reversed in the adapter or outlet. Unplug and reboot EV charger. If issue persists, contact Support.</p>
Red light flashing every 3 seconds (seven times)	CP line not properly connected.
Red light flashing every 3 seconds (eight times)	Relay fused in position Disconnect from power immediately. Contact Support.

TOPSTAR | Troubleshooting Tips

The Topstar app is not finding my EV Charger after I've installed it.

- Ensure the Charger has power:
 - Check for a green power light.
 - Check the EV Charger is wired properly.
 - Check that the breaker powering the EV Charger is turned on.
- Ensure your phone can connect to the EV Charger.
 - Check your phone's Bluetooth is on.
 - If you're using an Android, turn on location services for your phone to properly scan for Bluetooth devices.
- Try power cycling the breaker to which the EV Charger is connected.
- Try restarting the Topstar App.
- Try rebooting your phone.

My vehicle is not responding or charging.

- Ensure that the latch on the EV charging cable handle is locked into place. If the handle is not latched securely, the vehicle will not charge. If the latch is pressed down during charging, charging automatically stops.
- Ensure that the vehicle is not set up to begin charging at a specific time of day.



Conforms to UL std UL 2594.

Certified to CSA std C22.2 No.

280.

Model: TSE240V/32AUS-C01R001

Contains FCC ID: 2AC7Z-ESPC3WROOM

Contains FCC ID: XMR201909EC25AFX

Contains IC: 21098-ESPC3WROOM

Contains IC: 10224A-2019EC25AFX

FCC ID: 2A9FM-TSE240VAUS

IC: 29702-TSE240VAUS

The Topstar Smart Home EV Charger contains

This device complies with Part 15 of the FCC Rules / Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To satisfy FCC / IC RF exposure requirements, a separation distance of 20cm or more should be maintained between the antenna of this device and persons during device operation. To ensure compliance, operations at closer than this distance is not recommended.

Les antennes installées doivent être situées de façon à ce que la population ne puisse y être exposée à une distance de moins de 20 cm. Installer les antennes de façon à ce que le personnel ne puisse approcher à 20 cm ou moins de la position centrale de l'antenne.

La FCC des États-Unis stipule que cet appareil doit être en tout temps éloigné d'au moins 20 cm des personnes pendant son fonctionnement.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Always ensure that after charging, the charging cable is wrapped around the Wall Connector.

Regularly inspect the Wall Connector and charging cable for signs of damage. If damage is found, contact Topstar.

The Wall Connector contains no user-serviceable components. If the unit is not operating correctly, contact Topstar.

Wipe the outside of the wall Connector, the charging cable, and the connector end of the charging cable with a clean dry cloth to remove any accumulation of dust and dirt.



WARNING: Turn off input power at the circuit breaker before cleaning the Wall Connector.



WARNING: Do not use cleaning solvents, scouring, powder, or any type of abrasive pad to clean the wall connector, its charging cable, or the vehicle's charging port.




CAUTION: To reduce the risk of electrical shock or equipment damage, do not allow liquid to enter the wall Connector while cleaning it.

TOPSTAR | Service

Need more assistance? Contact Topstar Customer Service:

+86 0592-7263768

emma@topstar.com.cn

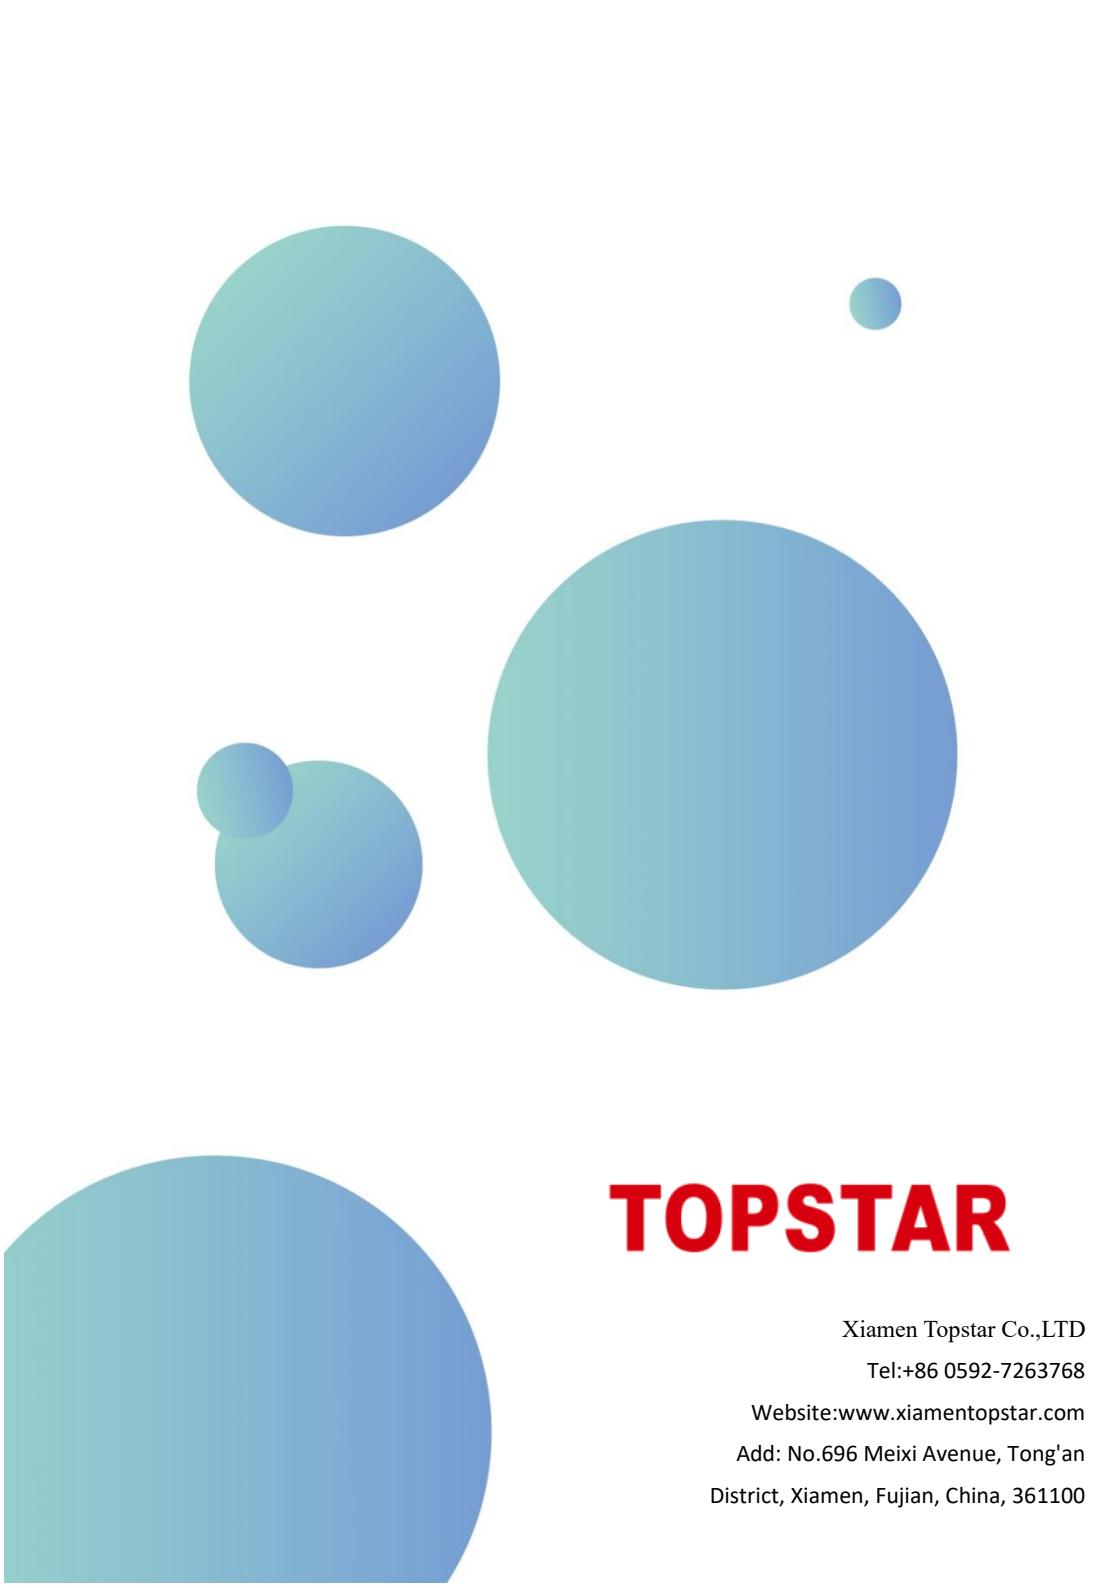

TOPSTAR

Xiamen Topstar Co.,LTD

Tel:+86 0592-7263768

Website:www.xiamen-topstar.com

Add: No.696 Meixi Avenue, Tong'an
District, Xiamen, Fujian, China, 361100