

## FCC RADIO TEST REPORT

Applicant.....: Yantai Trial Retailing Engineering CO.,LTD

Address.....: NO.161 CHANGJIANG ROAD, Pilot Free Trade Zone Yantai area, Shandong China.

Manufacturer.....: SHENZHEN SHINDY TECHNOLOGY CO., LTD.

Address.....: NO.401, 1300018, DAFU INDUSTRIAL COMMUNITY, ZHANGGE COMMUNITY, FUCHENG STREET, LONGHUA DISTRICT, SHENZHEN, GUANGDONG PROVINCE, P.R.CHINA

Factory.....: SHENZHEN SHINDY TECHNOLOGY CO., LTD.

Address.....: NO.401, 1300018, DAFU INDUSTRIAL COMMUNITY, ZHANGGE COMMUNITY, FUCHENG STREET, LONGHUA DISTRICT, SHENZHEN, GUANGDONG PROVINCE, P.R.CHINA

EUT.....: Retail AI Camera Z3

Brand Name.....: Retail Eye

Model No. ....: Retail Eye - Z3

FCC ID.....: 2A23I-AICAM-03


Measurement Standard.....: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Receipt Date of Samples....: June 07, 2021

Date of Tested.....: June 07, 2021 to August 20, 2021

Date of Report.....: September 07, 2021

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



---

Prepared by

Alina Guo / Project Engineer



## Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT .....	5
3. Test Channels and Modes Detail .....	7
4. Configuration of EUT.....	7
5. Modification of EUT .....	7
6. Description of Support Device.....	8
7. Test Facility and Location .....	9
8. Applicable Standards and References.....	10
9. Deviations and Abnormalities from Standard Conditions .....	10
10. Test Conditions .....	11
11. Measurement Uncertainty .....	11
12. Sample Calculations .....	12
13. Test Items and Results .....	13
13.1 Conducted Emissions Measurement .....	13
13.2 Maximum Conducted Output Power Measurement.....	17
13.3 6dB Bandwidth Measurement.....	19
13.4 Power Spectral Density Measurement .....	21
13.5 Band Edge and Conducted Spurious Emissions Measurement.....	23
13.6 Radiated Spurious Emissions and Restricted Bands Measurement.....	27
13.7 Antenna Requirement .....	34
14. Test Equipment List.....	35

## Revision History

## 1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.207 (a)	AC Power Conducted Emission	PASS	---
§15.247(b)(3)	Maximum Conducted Output Power	PASS	---
§15.247(a)(2)	6dB Bandwidth	PASS	---
§15.247(e)	Power Spectral Density	PASS	---
§15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	---
§15.247(d),§15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	PASS	---
§15.203	Antenna Requirement	PASS	---

## 2. General Description of EUT

Product Information	
Product name:	Retail AI Camera Z3
Main Model Name:	Retail Eye - Z3
Additional Model Name:	N/A
Model Difference:	N/A
S/N:	00001-3K-Z3
Brand Name	Retail Eye
Hardware version:	Not Stated
Software version:	Not Stated
Rating:	DC 5V come from USB port
Classification:	Class A
Typical arrangement:	Table-top
I/O Port:	N/A
Accessories Information	
Adapter:	M/N: JHD-AP024J-050300BA-A Input: AC 100-240V 50/60Hz, 0.55A Output: DC 5V 3000mA
Cable:	DC Line: 1.5m
Other:	N/A
Additional Information	
Note:	N/A
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification	
Zigbee Version:	Zigbee 3.0
Frequency Range:	2405-2480MHz
Modulation Type:	O-QPSK
Number of Channel:	16
Channel Space:	5MHz
Antenna Type:	PIFA antenna
Antenna Gain:	3.02 dBi (Declared by the manufacturer)

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	7	2435	13	2465
2	2410	8	2440	14	2470
3	2415	9	2445	15	2475
4	2420	10	2450	16	2480
5	2425	11	2455		
6	2430	12	2460		


### 3. Test Channels and Modes Detail

Mode		Channel		Frequency (MHz)	Modulation
1	TX	Low	1	2405	GFSK
2		Mid	9	2445	GFSK
3		High	16	2480	GFSK
4	Normal Mode	---	---	---	---

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

### 4. Configuration of EUT

#### Normal/TX Mode



### 5. Modification of EUT

No modifications are made to the EUT during all test items.

## 6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Monitor	DELL	S2240Tb	CN-0FP53 P-74261-3 AL-0CYU	AC Line: 1.15m unshielded DC Line: 1.21m unshielded with a core	Adapter: Manufacturer: CWT M/N: KPL-050F-VI I/P:AC100-240V50/60 Hz,1.7A O/P:12V4.17A 50W

No.	Test Software	Modulation	Power Setting
1.	ZigbeeTest_Tool_0616a.apk	O-QPSK	Default

## 7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	<p>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01</p> <p>Listed by CNAS, August 13, 2018</p> <p>The Certificate Registration Number is L5795.</p> <p>The Certificate is valid until August 13, 2024</p> <p>The Laboratory has been assessed and proved to be in compliance with ISO17025</p> <p>Listed by A2LA, November 01, 2017</p> <p>The Certificate Registration Number is 4429.01</p> <p>The Certificate is valid until December 31, 2021</p> <p>Listed by FCC, November 06, 2017</p> <p>Test Firm Registration Number: 907417</p> <p>Listed by Industry Canada, June 08, 2017</p> <p>The Certificate Registration Number. Is 46405-9743A</p> <p>The CAB identifier number is CN0015</p>
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

---

## 8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

**Test Standards:**

47 CFR Part 15, Subpart C, 15.247

ANSI C63.10-2013

**References Test Guidance:**

DTS KDB 558074 D01 15.247 Meas Guidance v05r02

**Remark:**

The EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

---

## 9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

## 10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	AC Power Conducted Emission	4	AC 120V 60Hz AC 240V 50Hz	---	See note 3
2.	Max. Conducted Output Power	1-3	AC 120V 60Hz	Sean Yuan	See note 1
3.	6dB Bandwidth	1-3	AC 120V 60Hz	Sean Yuan	See note 1
4.	Power Spectral Density	1-3	AC 120V 60Hz	Sean Yuan	See note 1
5.	Band Edge and Conducted Spurious Emissions	1-3	AC 120V 60Hz	Sean Yuan	See note 1
6.	Radiated Spurious Emissions and Restricted Bands	4	AC 120V 60Hz AC 240V 50Hz	Sean Yuan	See note 1
7..	Antenna Requirement	---	---	---	---

**Note:**

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35 °C, 30~70%, 86~106kPa
2. As the EUT can be operated multiple positions, all X,Y,Z axis were considered during the test and only the worst case X was recorded.
3. Only the worst case was recorded in the report.

## 11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.52 dB	---
2.	Radiated Emission Test	9kHz ~ 30MHz	±2.60 dB	---
		30MHz ~ 1GHz	±4.68 dB	---
		1GHz ~ 18GHz	±5.14 dB	---
		18GHz ~ 40GHz	±5.14 dB	---
3.	RF Conducted Test	10Hz ~ 40GHz	±1.06 dB	---

**Note:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

## 12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1900	30.10	10.60	40.70	79.00	-38.30	QP

Where,

Freq. = Emission frequency in MHz  
 Reading Level = Uncorrected Analyzer/Receiver reading  
 Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation  
 Measurement = Reading + Corrector Factor  
 Limit = Limit stated in standard  
 Margin = Measurement - Limit  
 Detector = Reading for Quasi-Peak / Average / Peak

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
60.0700	45.88	-18.38	27.50	49.00	-21.50	QP

Where,

Freq. = Emission frequency in MHz  
 Reading Level = Uncorrected Analyzer/Receiver reading  
 Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier  
 Measurement = Reading + Corrector Factor  
 Limit = Limit stated in standard  
 Over = Margin, which calculated by Measurement - Limit  
 Detector = Reading for Quasi-Peak / Average / Peak

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

## 13. Test Items and Results

## 13.1 Conducted Emissions Measurement

## LIMIT

According to the requirements of FCC PART 15.207, the limits are as follows:


Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note: 1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.

2. The lower limit shall apply at the transition frequencies.

3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

## BLOCK DIAGRAM OF TEST SETUP

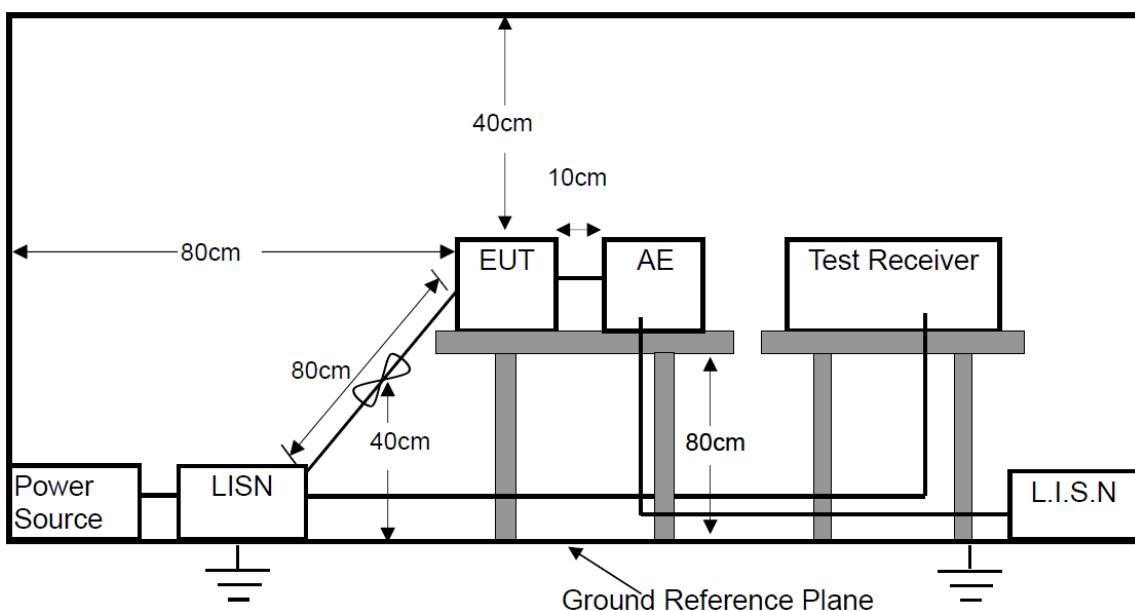

---


## TEST PROCEDURES


- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

## TEST RESULTS

PASS

Please refer to the following pages.

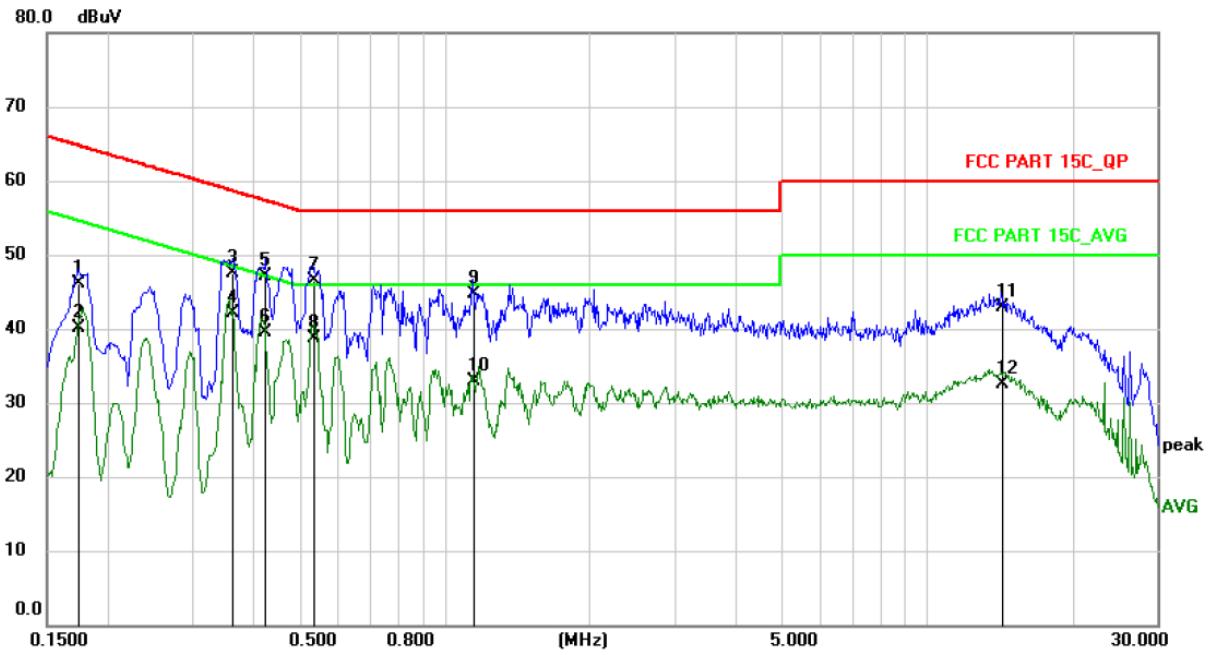M/N: Retail Eye - Z3	Testing Voltage: AC 120V 60Hz																																																																																																																
Phase: L1	Detector: QP & AVG																																																																																																																
Test Mode: 4																																																																																																																	
<b>Conducted Emission Measurement</b>																																																																																																																	
Date: 2021/7/30	Time: 11:54:05																																																																																																																
																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No. Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measure- ment</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>Detector</th> <th>Comment</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1737</td><td>35.53</td><td>10.60</td><td>46.13</td><td>64.78</td><td>-18.65</td><td>QP</td></tr> <tr><td>2</td><td>0.1737</td><td>29.55</td><td>10.60</td><td>40.15</td><td>54.78</td><td>-14.63</td><td>AVG</td></tr> <tr><td>3</td><td>0.3633</td><td>36.82</td><td>10.61</td><td>47.43</td><td>58.65</td><td>-11.22</td><td>QP</td></tr> <tr><td>4 *</td><td>0.3633</td><td>31.46</td><td>10.61</td><td>42.07</td><td>48.65</td><td>-6.58</td><td>AVG</td></tr> <tr><td>5</td><td>0.4259</td><td>36.44</td><td>10.62</td><td>47.06</td><td>57.33</td><td>-10.27</td><td>QP</td></tr> <tr><td>6</td><td>0.4259</td><td>28.91</td><td>10.62</td><td>39.53</td><td>47.33</td><td>-7.80</td><td>AVG</td></tr> <tr><td>7</td><td>0.5340</td><td>35.87</td><td>10.63</td><td>46.50</td><td>56.00</td><td>-9.50</td><td>QP</td></tr> <tr><td>8</td><td>0.5340</td><td>28.05</td><td>10.63</td><td>38.68</td><td>46.00</td><td>-7.32</td><td>AVG</td></tr> <tr><td>9</td><td>1.1451</td><td>34.05</td><td>10.70</td><td>44.75</td><td>56.00</td><td>-11.25</td><td>QP</td></tr> <tr><td>10</td><td>1.1451</td><td>22.23</td><td>10.70</td><td>32.93</td><td>46.00</td><td>-13.07</td><td>AVG</td></tr> <tr><td>11</td><td>14.2500</td><td>32.08</td><td>10.75</td><td>42.83</td><td>60.00</td><td>-17.17</td><td>QP</td></tr> <tr><td>12</td><td>14.2500</td><td>21.75</td><td>10.75</td><td>32.50</td><td>50.00</td><td>-17.50</td><td>AVG</td></tr> </tbody> </table>		No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			MHz	dBuV	dB	dBuV	dB	Detector	Comment	1	0.1737	35.53	10.60	46.13	64.78	-18.65	QP	2	0.1737	29.55	10.60	40.15	54.78	-14.63	AVG	3	0.3633	36.82	10.61	47.43	58.65	-11.22	QP	4 *	0.3633	31.46	10.61	42.07	48.65	-6.58	AVG	5	0.4259	36.44	10.62	47.06	57.33	-10.27	QP	6	0.4259	28.91	10.62	39.53	47.33	-7.80	AVG	7	0.5340	35.87	10.63	46.50	56.00	-9.50	QP	8	0.5340	28.05	10.63	38.68	46.00	-7.32	AVG	9	1.1451	34.05	10.70	44.75	56.00	-11.25	QP	10	1.1451	22.23	10.70	32.93	46.00	-13.07	AVG	11	14.2500	32.08	10.75	42.83	60.00	-17.17	QP	12	14.2500	21.75	10.75	32.50	50.00	-17.50	AVG
No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over																																																																																																											
	MHz	dBuV	dB	dBuV	dB	Detector	Comment																																																																																																										
1	0.1737	35.53	10.60	46.13	64.78	-18.65	QP																																																																																																										
2	0.1737	29.55	10.60	40.15	54.78	-14.63	AVG																																																																																																										
3	0.3633	36.82	10.61	47.43	58.65	-11.22	QP																																																																																																										
4 *	0.3633	31.46	10.61	42.07	48.65	-6.58	AVG																																																																																																										
5	0.4259	36.44	10.62	47.06	57.33	-10.27	QP																																																																																																										
6	0.4259	28.91	10.62	39.53	47.33	-7.80	AVG																																																																																																										
7	0.5340	35.87	10.63	46.50	56.00	-9.50	QP																																																																																																										
8	0.5340	28.05	10.63	38.68	46.00	-7.32	AVG																																																																																																										
9	1.1451	34.05	10.70	44.75	56.00	-11.25	QP																																																																																																										
10	1.1451	22.23	10.70	32.93	46.00	-13.07	AVG																																																																																																										
11	14.2500	32.08	10.75	42.83	60.00	-17.17	QP																																																																																																										
12	14.2500	21.75	10.75	32.50	50.00	-17.50	AVG																																																																																																										

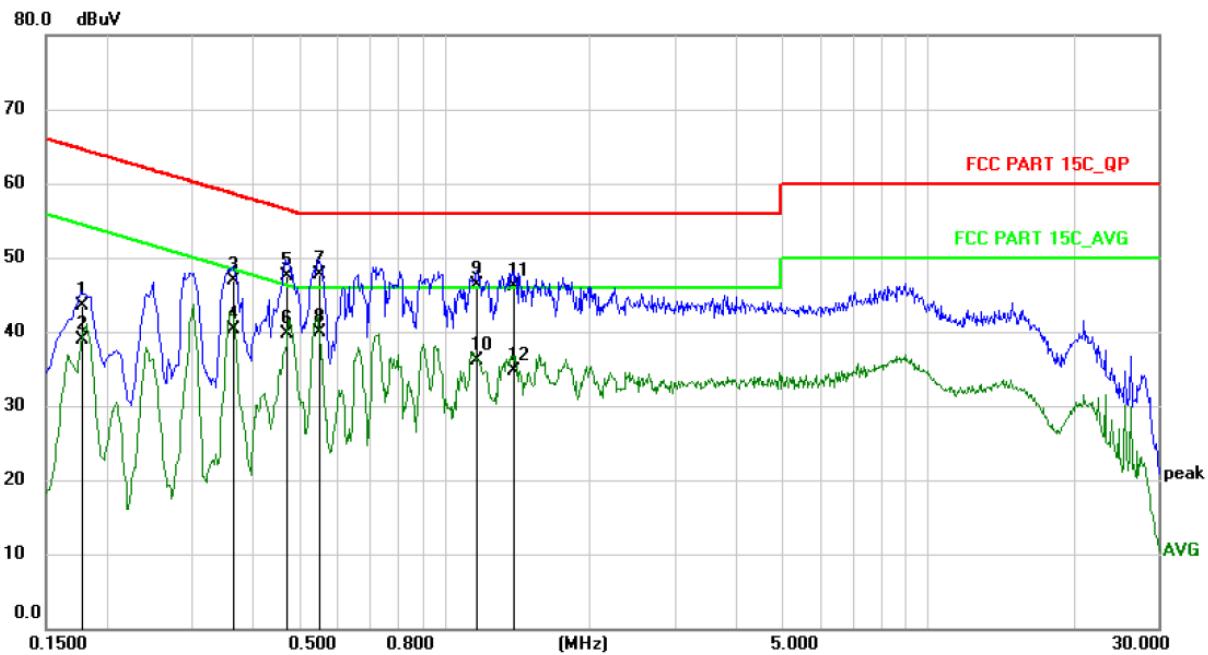M/N: Retail Eye - Z3	Testing Voltage: AC 120V 60Hz																																																																																																																
Phase: N	Detector: QP & AVG																																																																																																																
Test Mode: 4																																																																																																																	
<b>Conducted Emission Measurement</b>																																																																																																																	
Date: 2021/7/30	Time: 12:01:33																																																																																																																
																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No. Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>Detector</th> <th>Comment</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1779</td><td>32.92</td><td>10.60</td><td>43.52</td><td>64.58</td><td>-21.06</td><td>QP</td></tr> <tr><td>2</td><td>0.1779</td><td>28.40</td><td>10.60</td><td>39.00</td><td>54.58</td><td>-15.58</td><td>AVG</td></tr> <tr><td>3</td><td>0.3659</td><td>36.27</td><td>10.61</td><td>46.88</td><td>58.59</td><td>-11.71</td><td>QP</td></tr> <tr><td>4</td><td>0.3659</td><td>29.64</td><td>10.61</td><td>40.25</td><td>48.59</td><td>-8.34</td><td>AVG</td></tr> <tr><td>5</td><td>0.4700</td><td>36.84</td><td>10.62</td><td>47.46</td><td>56.51</td><td>-9.05</td><td>QP</td></tr> <tr><td>6</td><td>0.4700</td><td>29.00</td><td>10.62</td><td>39.62</td><td>46.51</td><td>-6.89</td><td>AVG</td></tr> <tr><td>7</td><td>0.5500</td><td>37.03</td><td>10.64</td><td>47.67</td><td>56.00</td><td>-8.33</td><td>QP</td></tr> <tr><td>8 *</td><td>0.5500</td><td>29.30</td><td>10.64</td><td>39.94</td><td>46.00</td><td>-6.06</td><td>AVG</td></tr> <tr><td>9</td><td>1.1653</td><td>35.63</td><td>10.70</td><td>46.33</td><td>56.00</td><td>-9.67</td><td>QP</td></tr> <tr><td>10</td><td>1.1653</td><td>25.37</td><td>10.70</td><td>36.07</td><td>46.00</td><td>-9.93</td><td>AVG</td></tr> <tr><td>11</td><td>1.3900</td><td>35.35</td><td>10.70</td><td>46.05</td><td>56.00</td><td>-9.95</td><td>QP</td></tr> <tr><td>12</td><td>1.3900</td><td>24.10</td><td>10.70</td><td>34.80</td><td>46.00</td><td>-11.20</td><td>AVG</td></tr> </tbody> </table>		No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over			MHz	dBuV	dB	dBuV	dB	Detector	Comment	1	0.1779	32.92	10.60	43.52	64.58	-21.06	QP	2	0.1779	28.40	10.60	39.00	54.58	-15.58	AVG	3	0.3659	36.27	10.61	46.88	58.59	-11.71	QP	4	0.3659	29.64	10.61	40.25	48.59	-8.34	AVG	5	0.4700	36.84	10.62	47.46	56.51	-9.05	QP	6	0.4700	29.00	10.62	39.62	46.51	-6.89	AVG	7	0.5500	37.03	10.64	47.67	56.00	-8.33	QP	8 *	0.5500	29.30	10.64	39.94	46.00	-6.06	AVG	9	1.1653	35.63	10.70	46.33	56.00	-9.67	QP	10	1.1653	25.37	10.70	36.07	46.00	-9.93	AVG	11	1.3900	35.35	10.70	46.05	56.00	-9.95	QP	12	1.3900	24.10	10.70	34.80	46.00	-11.20	AVG
No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																																																																																											
	MHz	dBuV	dB	dBuV	dB	Detector	Comment																																																																																																										
1	0.1779	32.92	10.60	43.52	64.58	-21.06	QP																																																																																																										
2	0.1779	28.40	10.60	39.00	54.58	-15.58	AVG																																																																																																										
3	0.3659	36.27	10.61	46.88	58.59	-11.71	QP																																																																																																										
4	0.3659	29.64	10.61	40.25	48.59	-8.34	AVG																																																																																																										
5	0.4700	36.84	10.62	47.46	56.51	-9.05	QP																																																																																																										
6	0.4700	29.00	10.62	39.62	46.51	-6.89	AVG																																																																																																										
7	0.5500	37.03	10.64	47.67	56.00	-8.33	QP																																																																																																										
8 *	0.5500	29.30	10.64	39.94	46.00	-6.06	AVG																																																																																																										
9	1.1653	35.63	10.70	46.33	56.00	-9.67	QP																																																																																																										
10	1.1653	25.37	10.70	36.07	46.00	-9.93	AVG																																																																																																										
11	1.3900	35.35	10.70	46.05	56.00	-9.95	QP																																																																																																										
12	1.3900	24.10	10.70	34.80	46.00	-11.20	AVG																																																																																																										

## 13.2 Maximum Conducted Output Power Measurement

### LIMIT

For system using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1 Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

### BLOCK DIAGRAM OF TEST SETUP



### TEST PROCEDURES

ANSI C63.10 - 2013, Section 11.9.1.3

ANSI C63.10 - 2013, Section 11.9.2.3.2

### TEST RESULTS

PASS

Please refer to the following tables.


IEEE 802.15.4				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Result
1	2405	9.42	≤30	PASS
9	2445	9.10	≤30	PASS
16	2480	9.18	≤30	PASS

### 13.3 6dB Bandwidth Measurement

#### LIMIT

The minimum 6dB bandwidth shall be at least 500 kHz

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v05r02):

- a. Set the RBW = 100KHz.
- b. Set the VBW  $\geq 3 \times$  RBW
- c. Set the Detector = peak.
- d. Set the Sweep time = auto couple.
- e. Set the Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




#### TEST RESULTS

PASS

Please refer to the following tables.

**IEEE 802.15.4**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
1	2405	1.203	-	>0.5	PASS
9	2445	1.327	-	>0.5	PASS
16	2480	1.215	-	>0.5	PASS

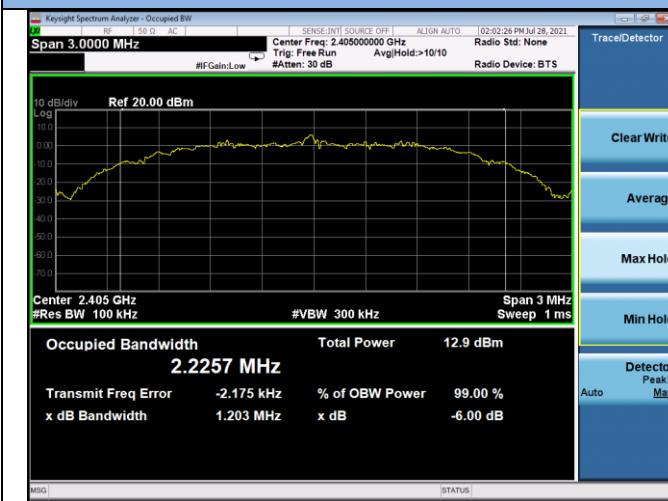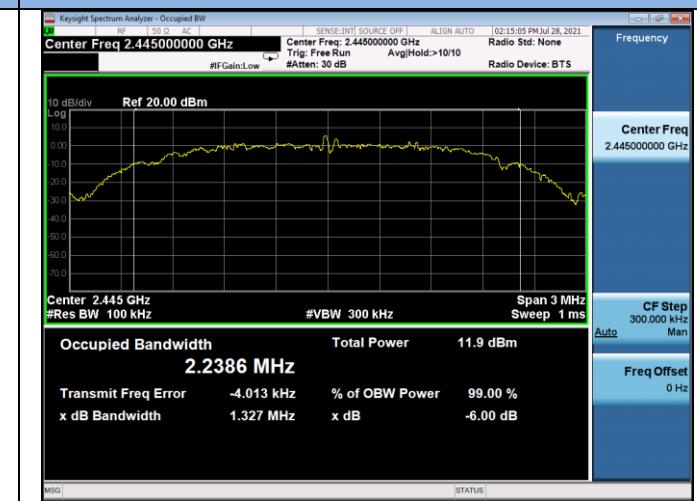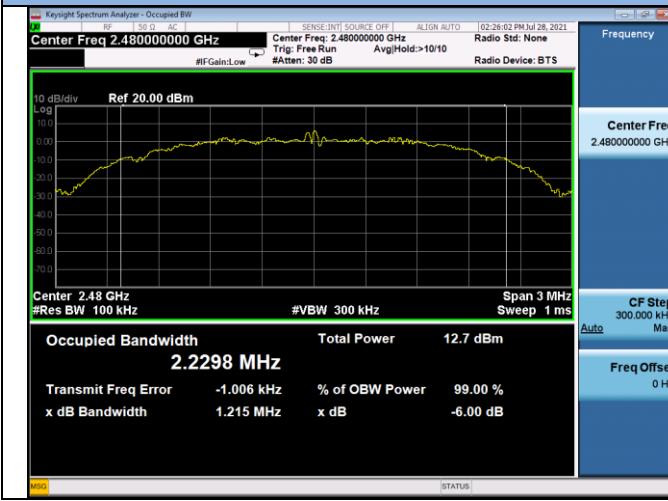**Test Plots of 6dB Bandwidth**
**2405MHz**

**2445MHz**

**2480MHz**


Blank

### 13.4 Power Spectral Density Measurement

#### LIMIT

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v05r02):

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100\text{KHz}$
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Set the Detector = peak.
- f. Set the Sweep time = auto couple.
- g. Set the Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.
- j. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


#### TEST RESULTS

PASS

Please refer to the following table.

**IEEE 802.15.4**

Channel	Frequency (MHz)	PSD dBm / 3kHz	Limit dBm / 3kHz	Results
1	2405	-7.077	8	PASS
9	2445	-7.528	8	PASS
16	2480	-8.373	8	PASS

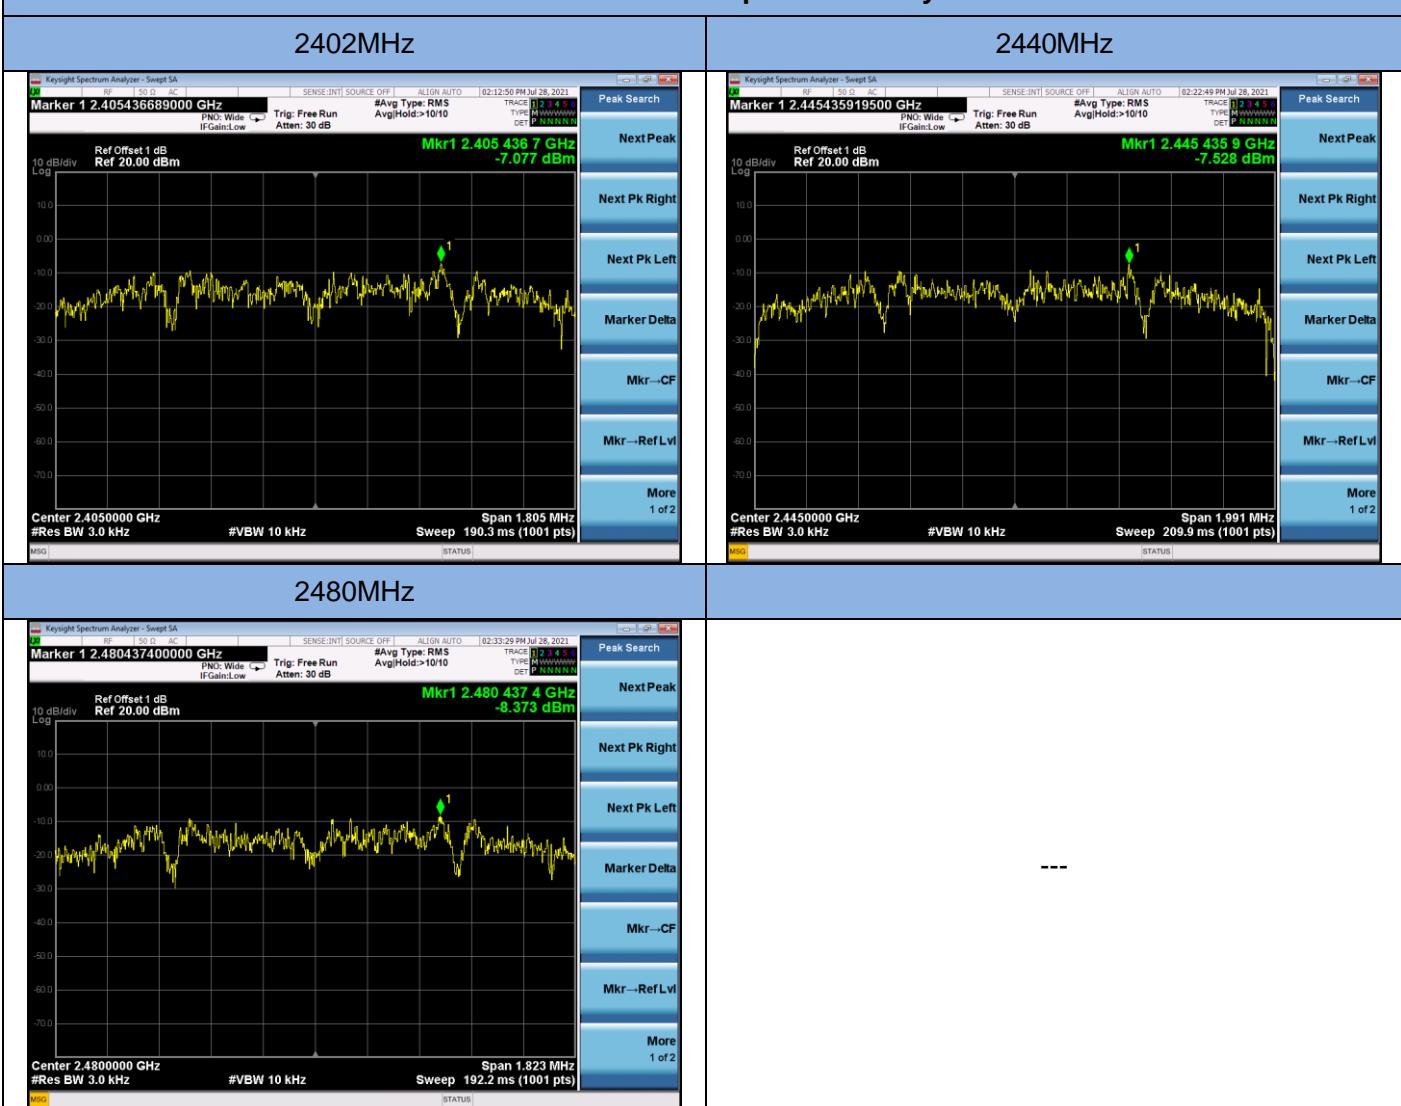**Test Plots of Power Spectral Density**


## 13.5 Band Edge and Conducted Spurious Emissions Measurement

### LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### BLOCK DIAGRAM OF TEST SETUP



### TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to ANSI C63.10-2013, Section 11.11

#### Measurement Procedure REF

- a. Set the RBW = 100 kHz.
- b. Set the VBW  $\geq$  300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

---


## Measurement Procedure OOB

- a. Set RBW = 100 kHz.
- b. Set VBW  $\geq$  300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep = auto couple.
- e. Set the Trace Mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum amplitude level.

## TEST RESULTS



PASS

Please refer to the following test plots.

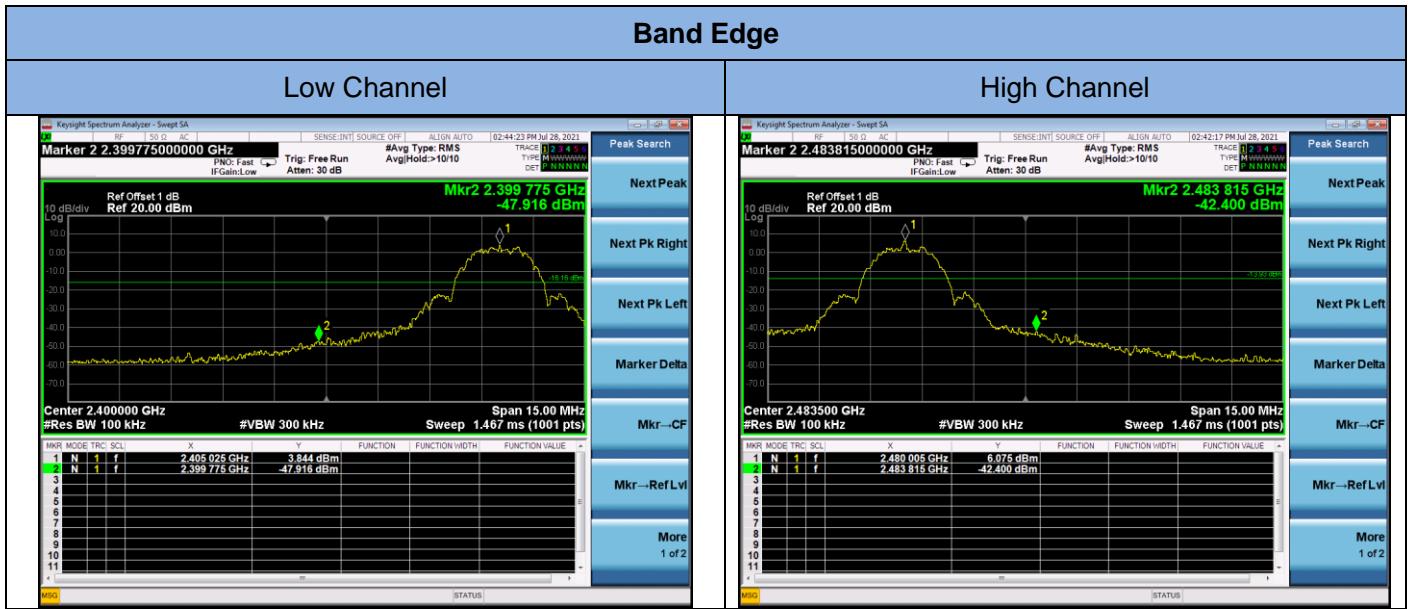


## Conducted Spurious Emissions


## Low Channel / 30MHz~1GHz

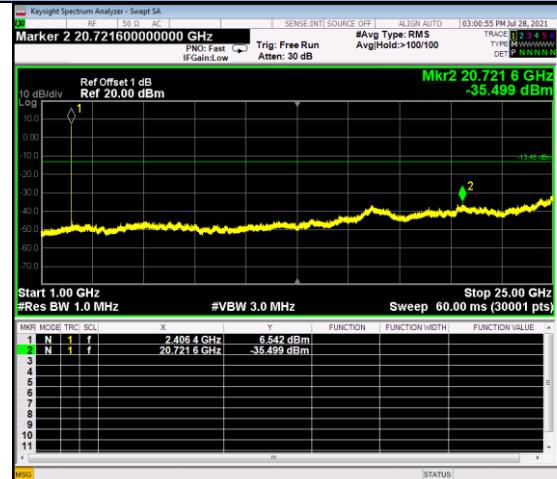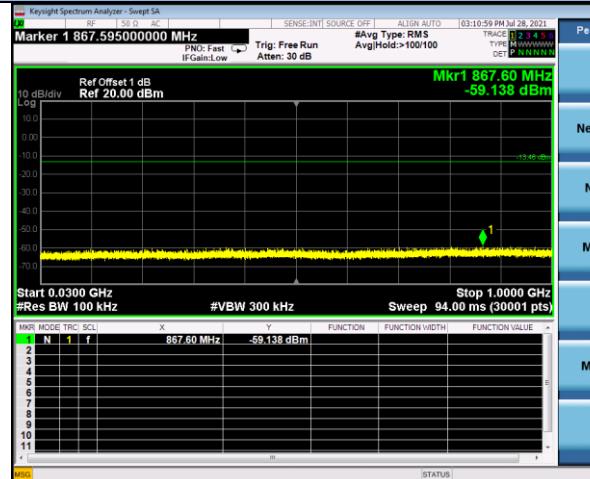

### Mid Channel / 30MHz~1GHz

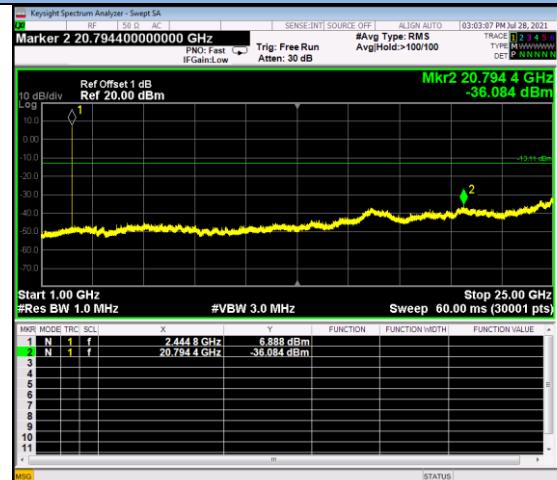

## High Channel / 30MHz~1GHz

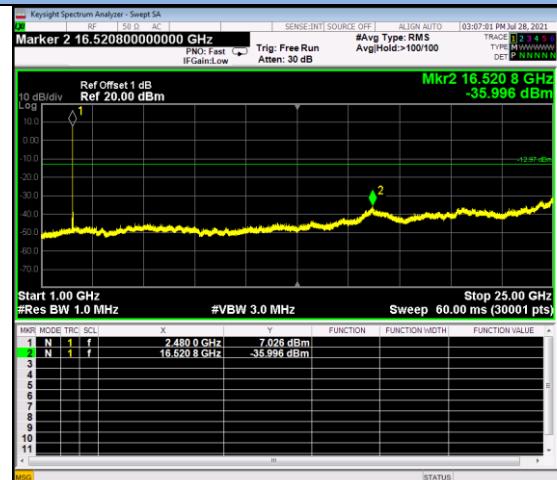

### 13.6 Radiated Spurious Emissions and Restricted Bands Measurement


#### LIMIT

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500


Remark: (1) Emission level (dB) $\mu\text{V}$  = 20 log Emission level  $\mu\text{V/m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.  
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.  
 (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

## BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

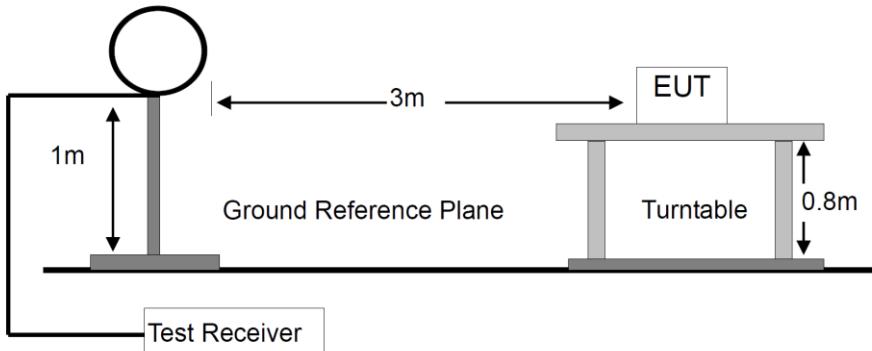

For Radiated Emission 30-1000MHz

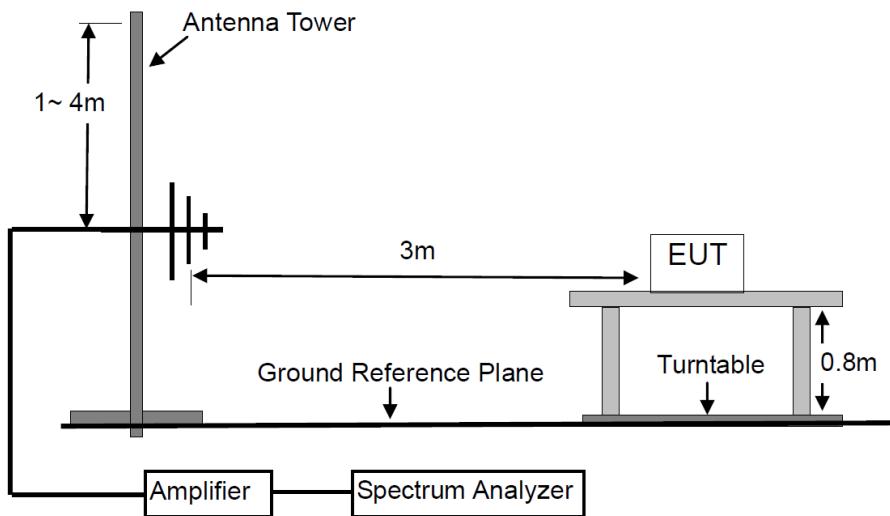

For Radiated Emission Above 1000MHz.

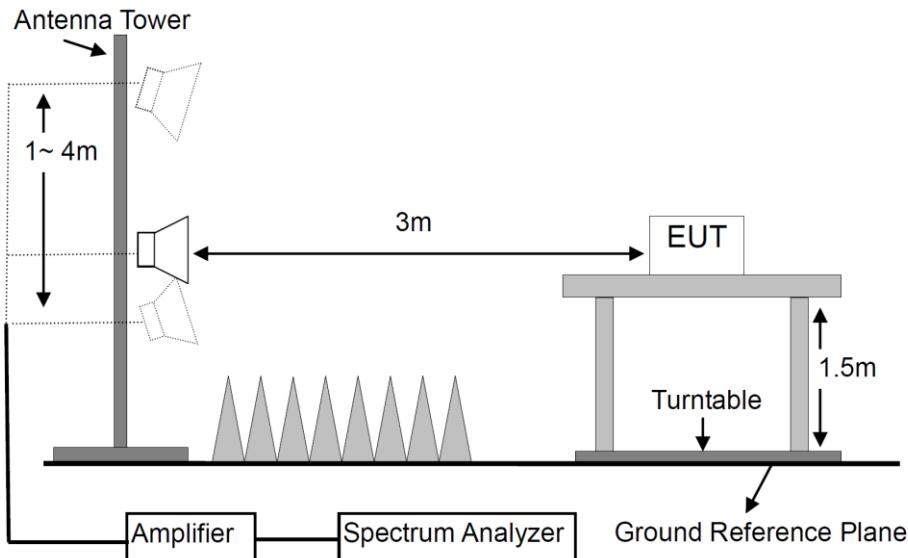

## TEST PROCEDURES

a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.

b. For the radiated emission test above 1GHz:

The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

---

## TEST RESULTS

PASS


Please refer to the following pages of the worst case.

M/N: Retail Eye - Z3	Testing Voltage: AC 120V 60Hz
Polarization: Horizontal	Detector: QP
Test Mode: 4	Distance: 3m

## Radiated Emission Measurement

Date: 2021/7/31

Time: 14:13:10

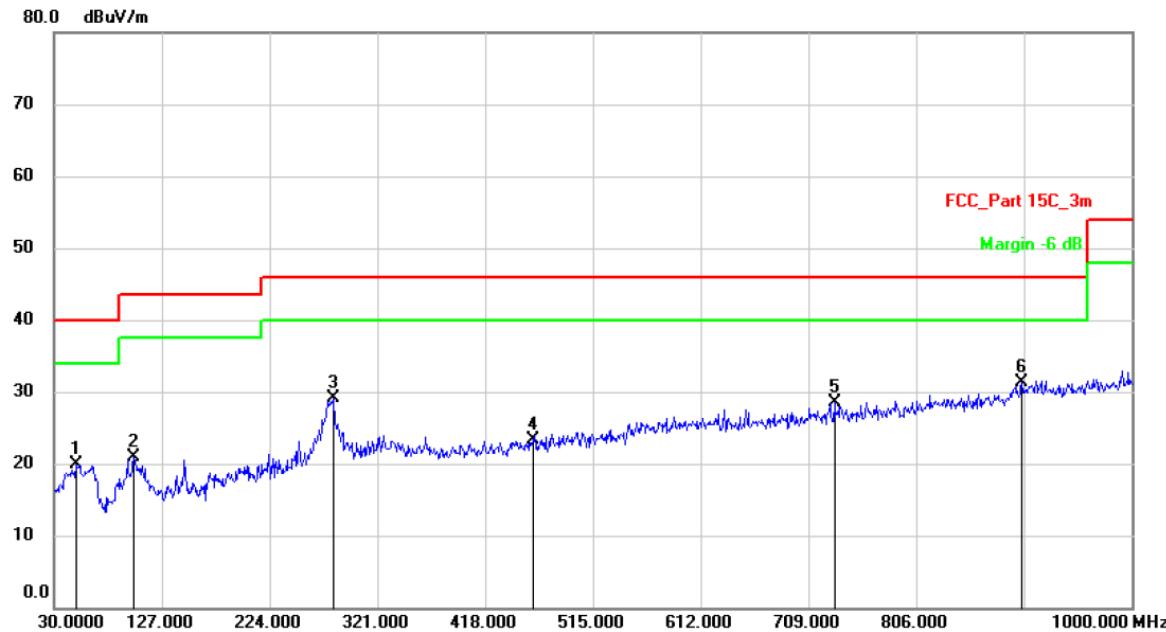

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		49.4000	26.87	-7.06	19.81	40.00	-20.19	QP	
2		101.7800	28.51	-7.51	21.00	43.50	-22.50	QP	
3		281.2300	34.89	-5.86	29.03	46.00	-16.97	QP	
4		460.6800	25.71	-2.39	23.32	46.00	-22.68	QP	
5		732.2800	25.79	2.75	28.54	46.00	-17.46	QP	
6	*	901.0600	25.03	6.21	31.24	46.00	-14.76	QP	

**Note:** Below 30MHz, the emissions are lower than 20dB below the allowable limit.


M/N: Retail Eye - Z3	Testing Voltage: AC 120V 60Hz
Polarization: Vertical	Detector: QP
Test Mode: 4	Distance: 3m

## Radiated Emission Measurement

Date: 2021/7/31

Time: 14:20:37

80.0 dBuV/m

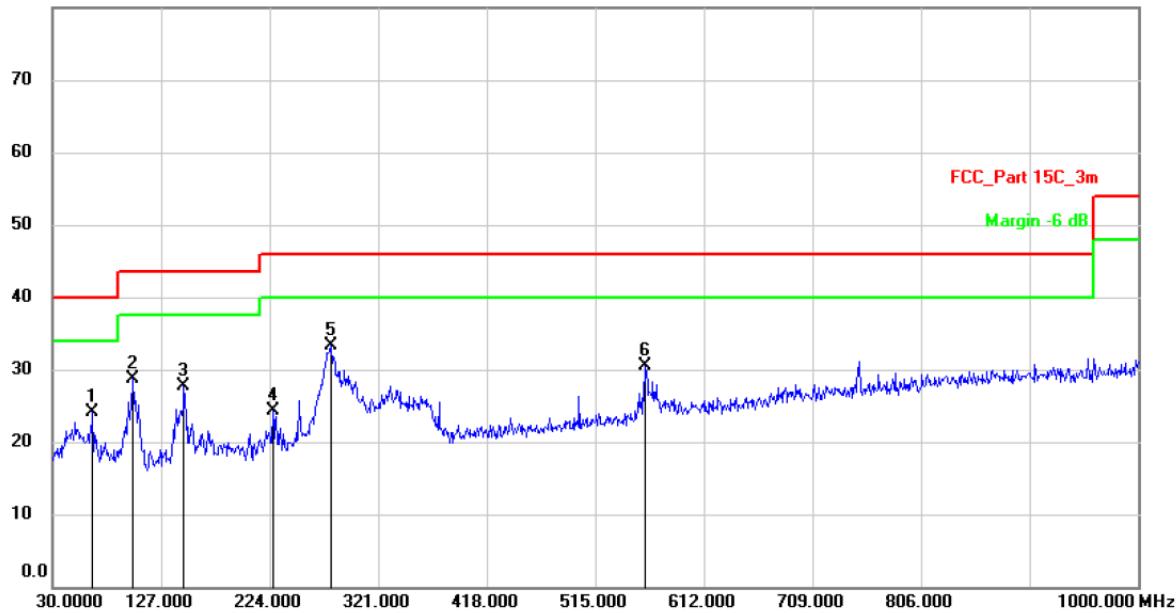

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB/m	dBuV/m	dB	Detector	Comment
1		65.8900	33.77	-9.63	24.14	40.00	-15.86	QP
2		101.7800	37.46	-8.72	28.74	43.50	-14.76	QP
3		147.3700	39.41	-11.75	27.66	43.50	-15.84	QP
4		226.9100	32.44	-8.10	24.34	46.00	-21.66	QP
5	*	278.3200	40.22	-6.90	33.32	46.00	-12.68	QP
6		559.6200	31.93	-1.50	30.43	46.00	-15.57	QP

**Note:** Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Modulation: GFSK					Test Result: PASS		Test frequency range: 1-25GHz				
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV/m)		Limit 3m (dBuV/m)		Margin (dB)		
		PK	AV		PK	AV	PK	AV	PK	AV	
<b>Operation Mode: TX Mode (Low)</b>											
4810	V	48.83	35.69	6.30	55.13	41.99	74.00	54.00	-18.87	-12.01	
7215	V	48.91	32.39	10.44	59.35	42.83	74.00	54.00	-14.65	-11.17	
---											
4810	H	48.43	33.86	6.30	54.73	40.16	74.00	54.00	-19.27	-13.84	
7215	H	48.42	32.74	10.44	58.86	43.18	74.00	54.00	-15.14	-10.82	
---											
<b>Operation Mode: TX Mode (Mid)</b>											
4890	V	47.65	33.45	6.60	54.25	40.05	74.00	54.00	-19.75	-13.95	
7335	V	49.09	32.78	10.55	59.64	43.33	74.00	54.00	-14.36	-10.67	
---											
4890	H	48.91	34.81	6.60	55.51	41.41	74.00	54.00	-18.49	-12.59	
7335	H	49.07	32.68	10.55	59.62	43.23	74.00	54.00	-14.38	-10.77	
---											
<b>Operation Mode: TX Mode (High)</b>											
4960	V	48.72	34.23	6.89	55.61	41.12	74.00	54.00	-18.39	-12.88	
7440	V	49.03	33.63	10.60	59.63	44.23	74.00	54.00	-14.37	-9.77	
---											
4960	H	48.37	34.22	6.89	55.26	41.11	74.00	54.00	-18.74	-12.89	
7440	H	48.48	33.83	10.60	59.08	44.43	74.00	54.00	-14.92	-9.57	
---											
<b>Spurious Emission in restricted band:</b>											
2390.000	V	49.39	40.04	0.09	49.48	40.13	74.00	54.00	-24.52	-13.87	
2390.000	H	49.30	39.43	0.09	49.39	39.52	74.00	54.00	-24.61	-14.48	
2483.500	V	59.70	39.66	0.34	60.04	40.00	74.00	54.00	-13.96	-14.00	
2483.500	H	66.91	39.90	0.34	67.25	40.24	74.00	54.00	-6.75	-13.76	
Remark: Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits.											

---

## 13.7 Antenna Requirement

### STANDARD APPLICABLE

According to of FCC part 15C section 15.203 and 15.204:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### ANTENNA CONNECTED CONSTRUCTION

The antenna is PIFA antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 3.02 dBi, Therefore, the antenna is consider meet the requirement.

## 14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2021	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2021	1 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2021	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2021	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2021	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 23, 2021	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 13, 2021	1 Year
8.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2021	1 Year
9.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2021	1 Year
10.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2021	1 Year
11.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2021	1 Year
12.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 13, 2021	1 Year
13.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2021	1 Year
14.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar. 13, 2021	1 Year
15.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
16.	Test Software	EZ	EZ_EMCA	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---