


Antenna specification

1. Antenna Describe

Antenna plate	Integral antenna
Model Name	AF11
Antenna Gain	1.5(Peak gain)
Frequency Rang	462-468MHz
Company Name	Shenzhen Cient Communication Technology Co.,Ltd.
Address:	501A&B-A Blockk,Donglian Building,Chuangye 2 road,Baoan District, Shenzhen,Guangdong,P.R china
Size:	30cm length




2. Test-up Diagram

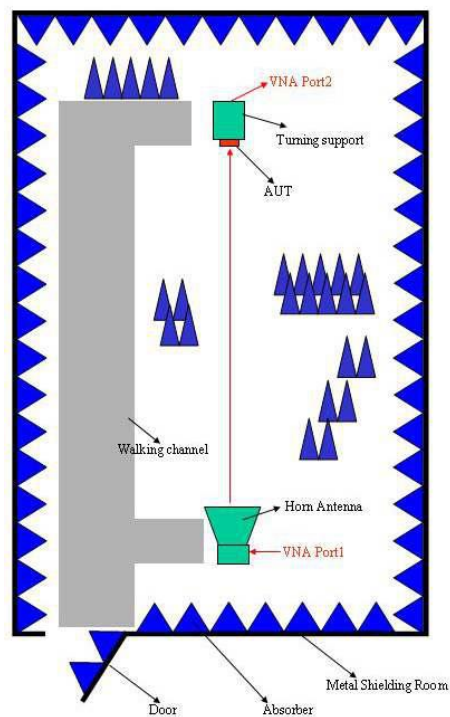


3. Antenna Radiation Pattern

Frequency (MHz)	Plane	Return Loss (dB)	Polarization	Gain max. (dBi)	θ for Gain max.	ϕ for Gain max.
462	XZ	-10.90	Vertical	-7.8	290	
462	XZ	-10.90	Horizontal	0.786	182	
462	YZ	-10.90	Vertical	1.21	226	
462	YZ	-10.90	Horizontal	-7.75	10	
462	XY	-10.90	Vertical	-15.4		20
462	XY	-10.90	Horizontal	0.93		180
465	XZ	-12.20	Vertical	-7.36	318	
465	XZ	-12.20	Horizontal	1.32	180	
465	YZ	-12.20	Vertical	0.981	204	
465	YZ	-12.20	Horizontal	-8.23	24	
465	XY	-12.20	Vertical	-14.1		-14
465	XY	-12.20	Horizontal	1.74		180
468	XZ	-13.80	Vertical	-7.95	312	
468	XZ	-13.80	Horizontal	1.81	186	
468	YZ	-13.80	Vertical	0.204	214	
468	YZ	-13.80	Horizontal	-8.38	8	
468	XY	-13.80	Vertical	-15.8		12
468	XY	-13.80	Horizontal	1.87		180


Radiation pattern: Antenna 1. XZ Plane at $f = 462\text{MHz}$

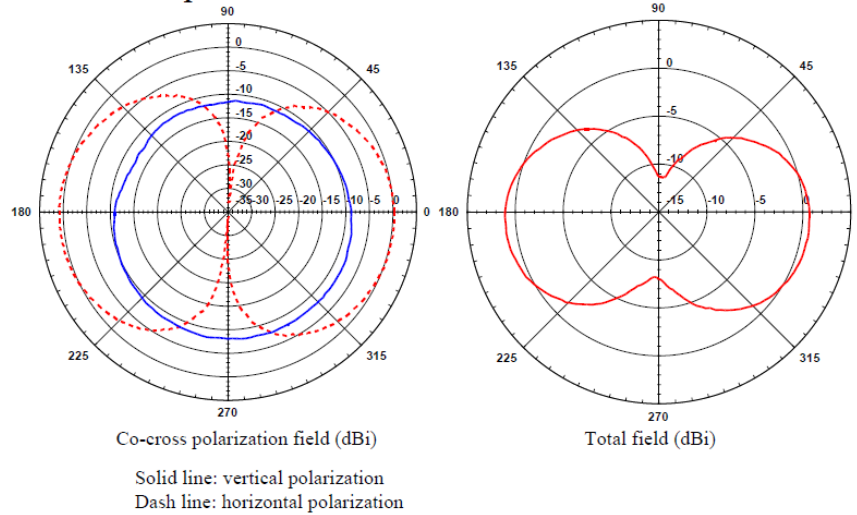


Radiation pattern: Antenna 1. YZ Plane at $f = 462\text{MHz}$

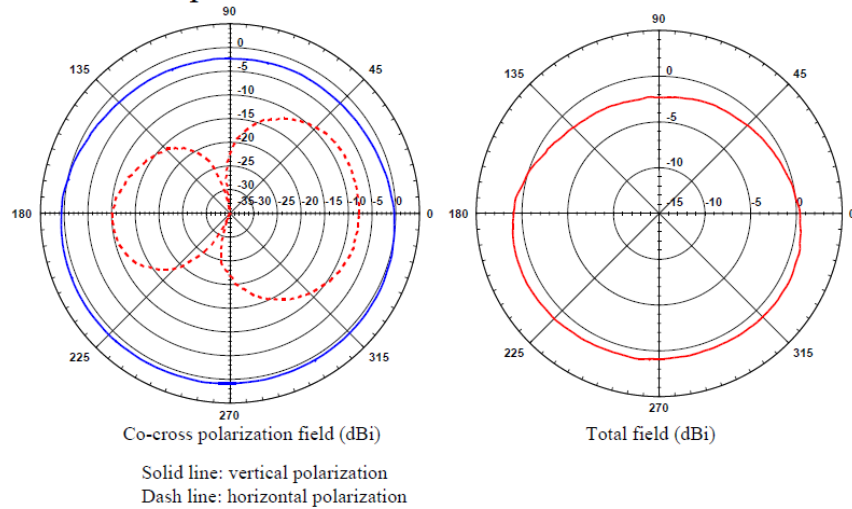


Radiation pattern: Antenna 1. XY Plane at $f = 462\text{MHz}$

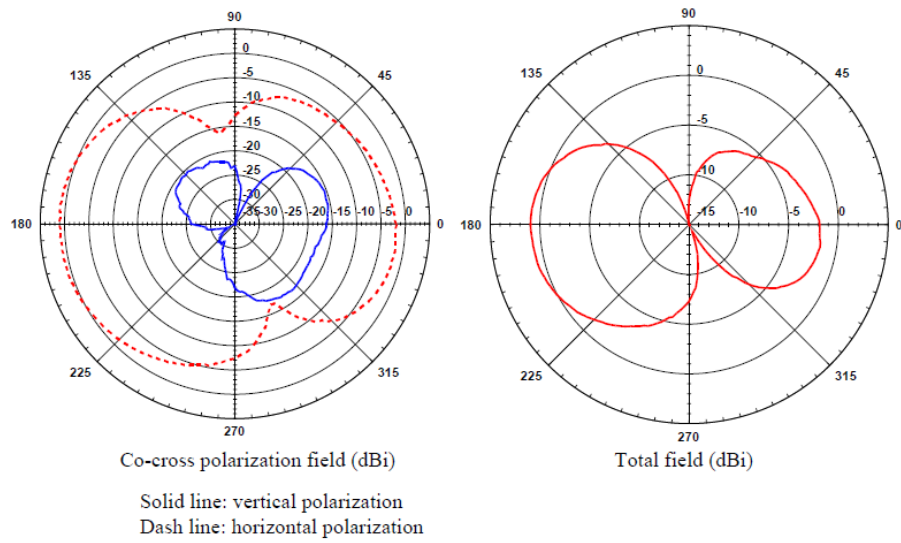


Radiation pattern: Antenna 1. XZ Plane at $f = 465\text{MHz}$

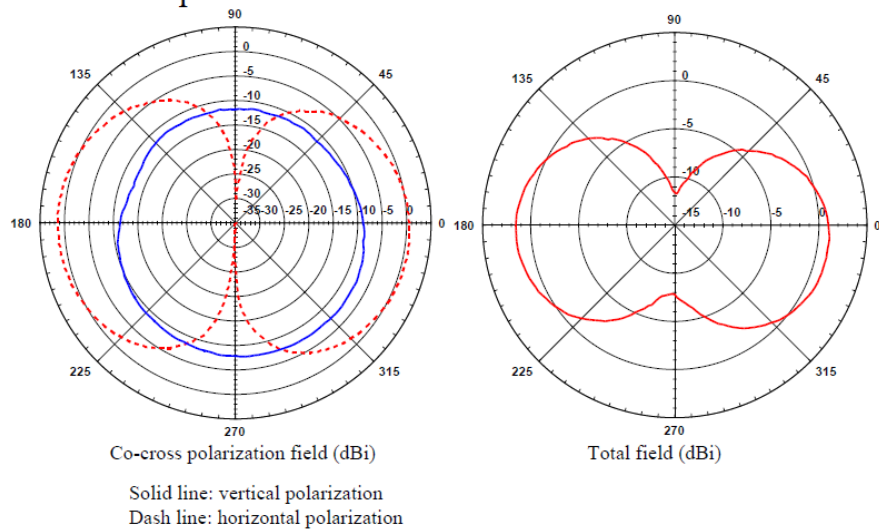


Radiation pattern: Antenna 1. YZ Plane at $f = 465\text{MHz}$

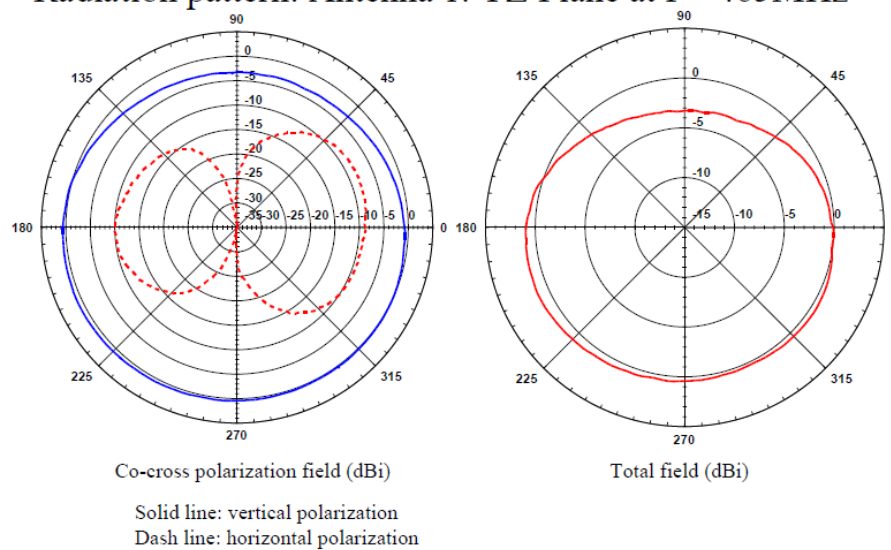


Radiation pattern: Antenna 1. XY Plane at $f = 465\text{MHz}$

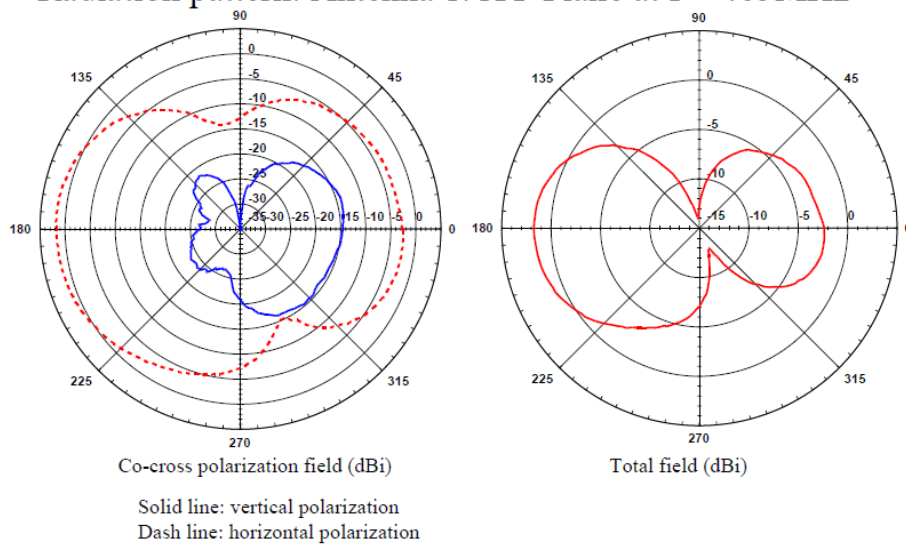


Radiation pattern: Antenna 1. XZ Plane at $f = 468\text{MHz}$

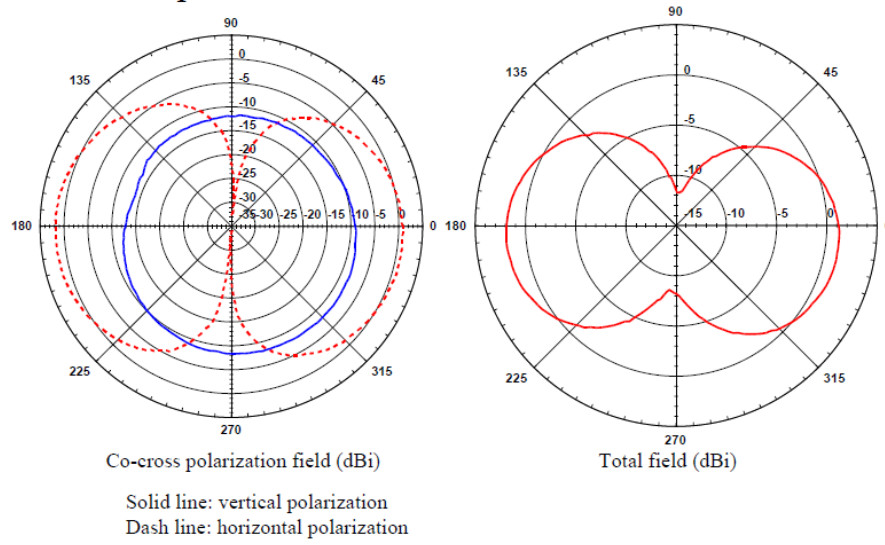


Radiation pattern: Antenna 1. YZ Plane at $f = 468\text{MHz}$

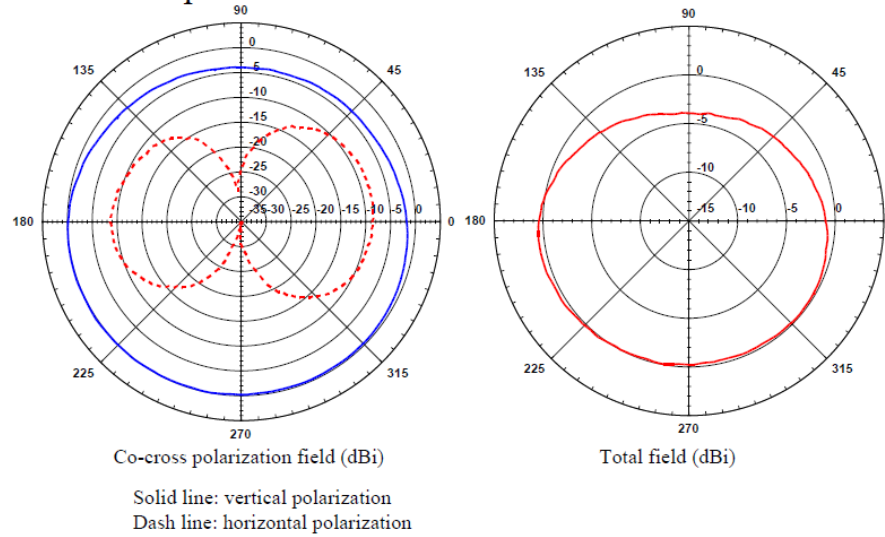

Radiation pattern: Antenna 1. XY Plane at $f = 468\text{MHz}$

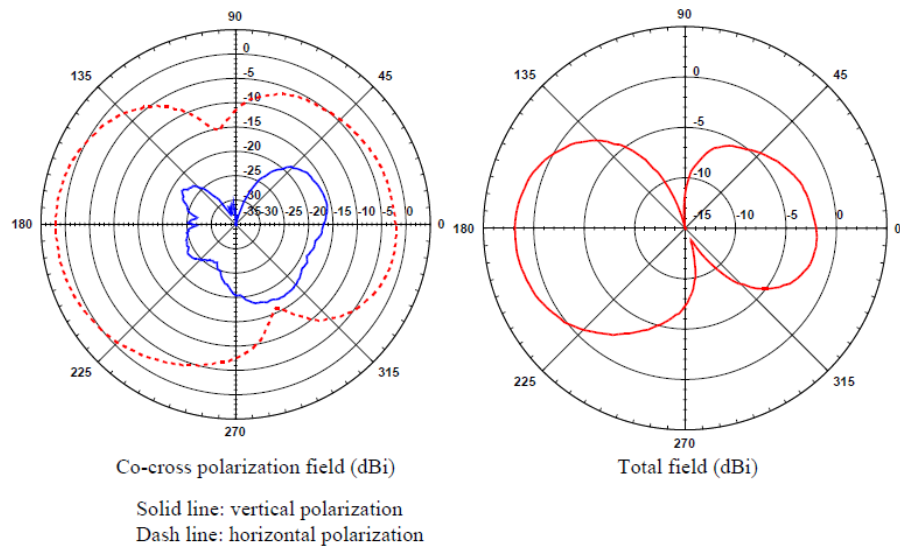

Return Loss: Antenna 1

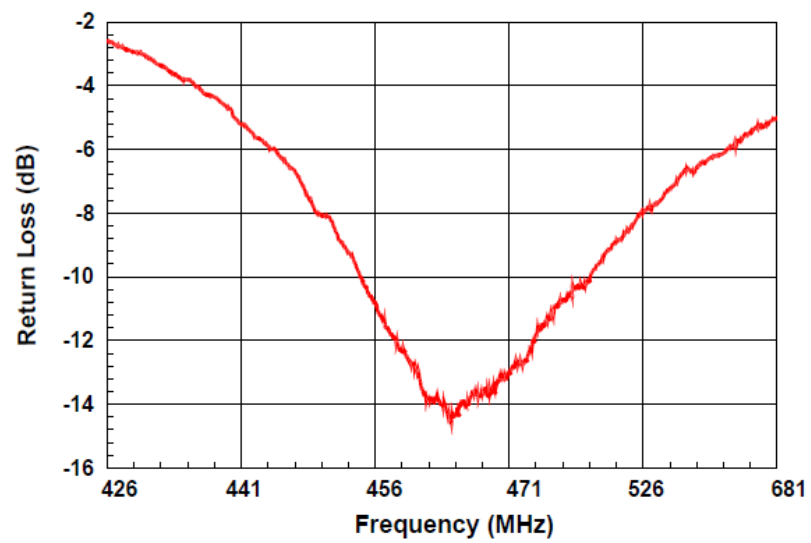

BW(-10dB) ⌚ 13.48%