



Appendix E

RF Test Data for 5.3GWIFI(Conducted Measurement)

Product Name: APOLLO

Test Model: APOLLO 7PRO

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu





E.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	22.005	≥ 0.5	Pass
NVNT	a	5300	Ant1	22.015	≥ 0.5	Pass
NVNT	a	5320	Ant1	21.879	≥ 0.5	Pass
NVNT	n20	5260	Ant1	21.775	≥ 0.5	Pass
NVNT	n20	5300	Ant1	22.645	≥ 0.5	Pass
NVNT	n20	5320	Ant1	22.55	≥ 0.5	Pass
NVNT	n40	5270	Ant1	42.143	≥ 0.5	Pass
NVNT	n40	5310	Ant1	42.246	≥ 0.5	Pass
NVNT	ac20	5260	Ant1	22.644	≥ 0.5	Pass
NVNT	ac20	5300	Ant1	22.128	≥ 0.5	Pass
NVNT	ac20	5320	Ant1	22.199	≥ 0.5	Pass
NVNT	ac40	5270	Ant1	41.841	≥ 0.5	Pass
NVNT	ac40	5310	Ant1	41.528	≥ 0.5	Pass
NVNT	ac80	5290	Ant1	79.707	≥ 0.5	Pass






Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

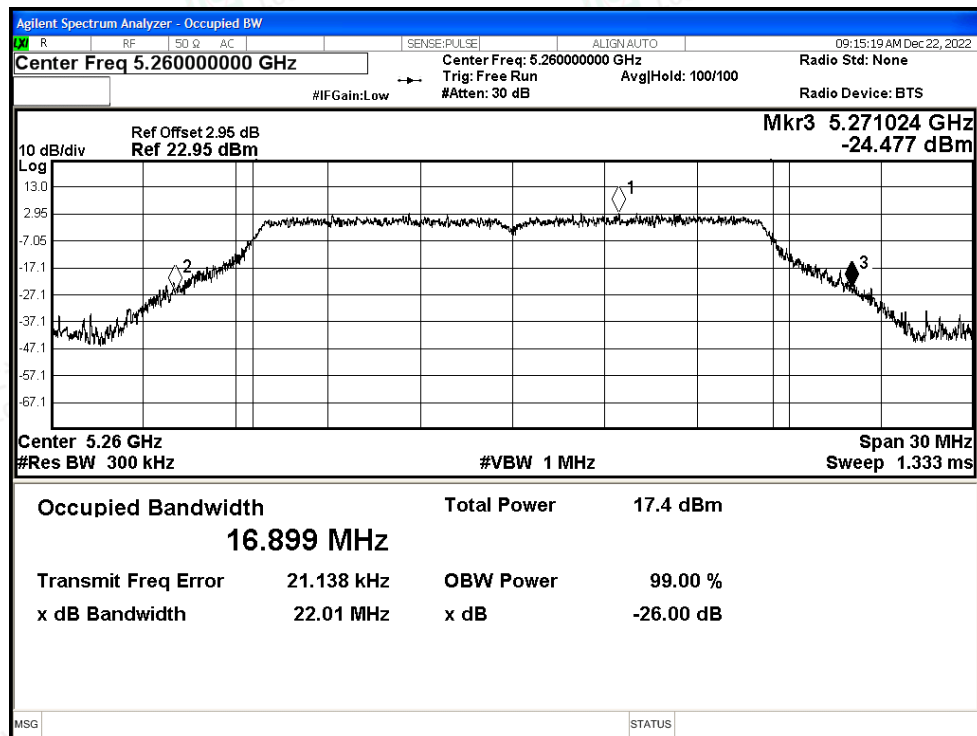


-26dB Bandwidth NVNT a 5300MHz Ant1

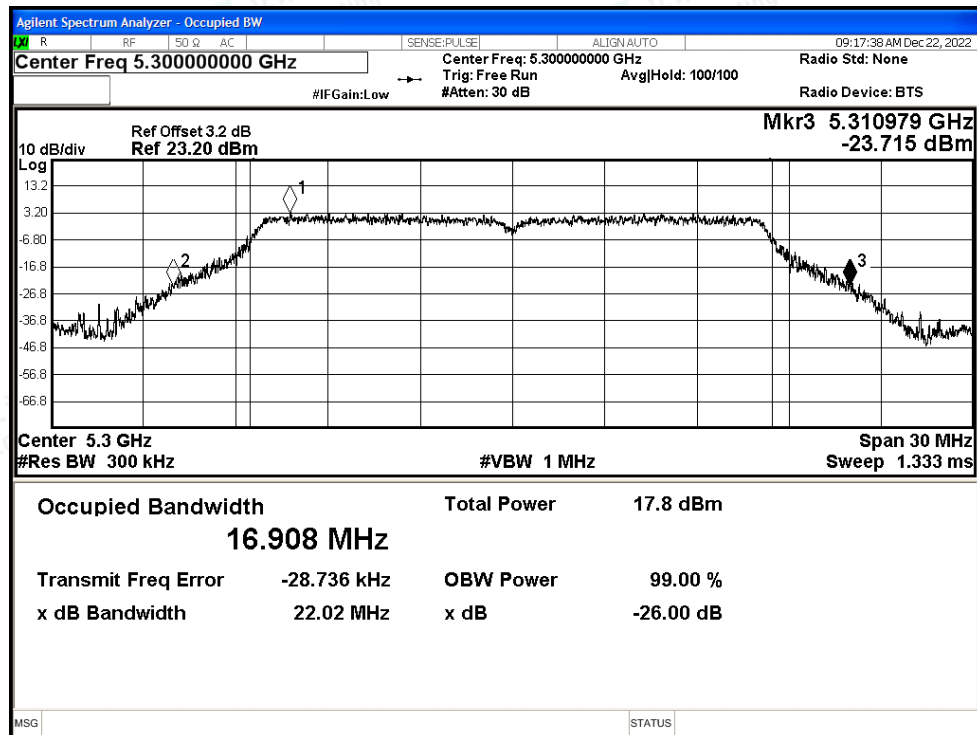




-26dB Bandwidth NVNT a 5320MHz Ant1

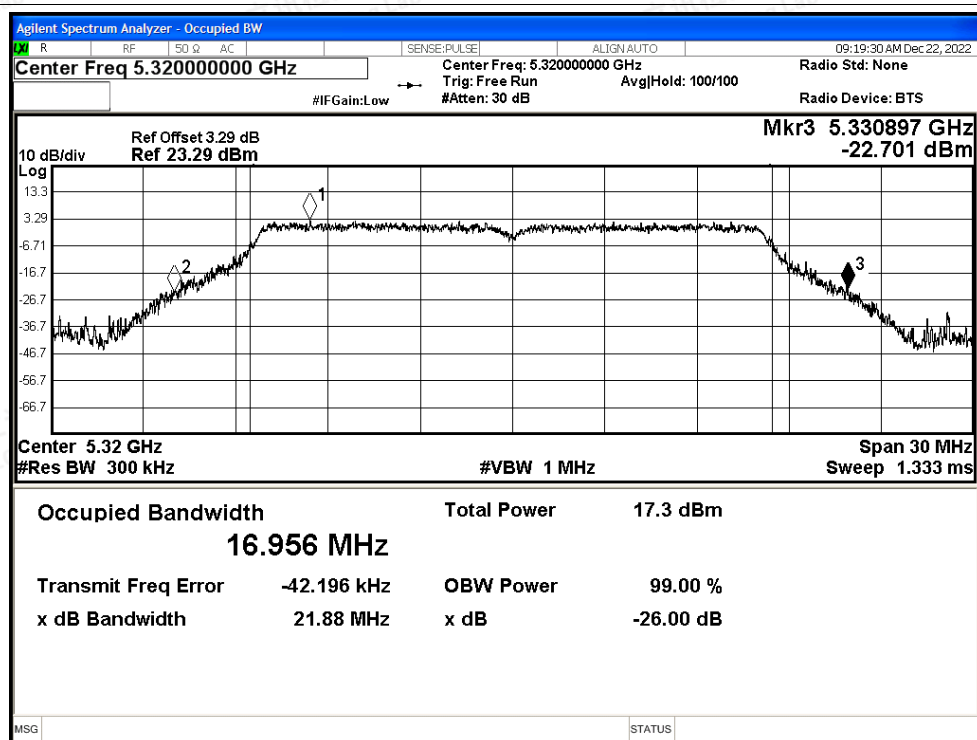

-26dB Bandwidth NVNT n20 5260MHz Ant1

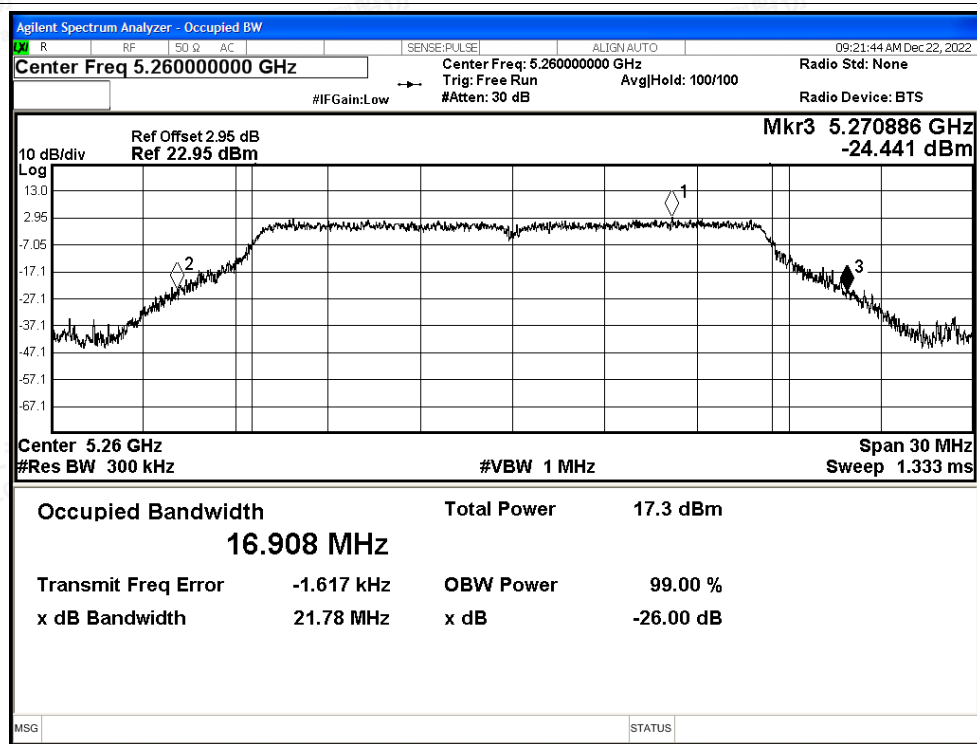

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n20 5300MHz Ant1

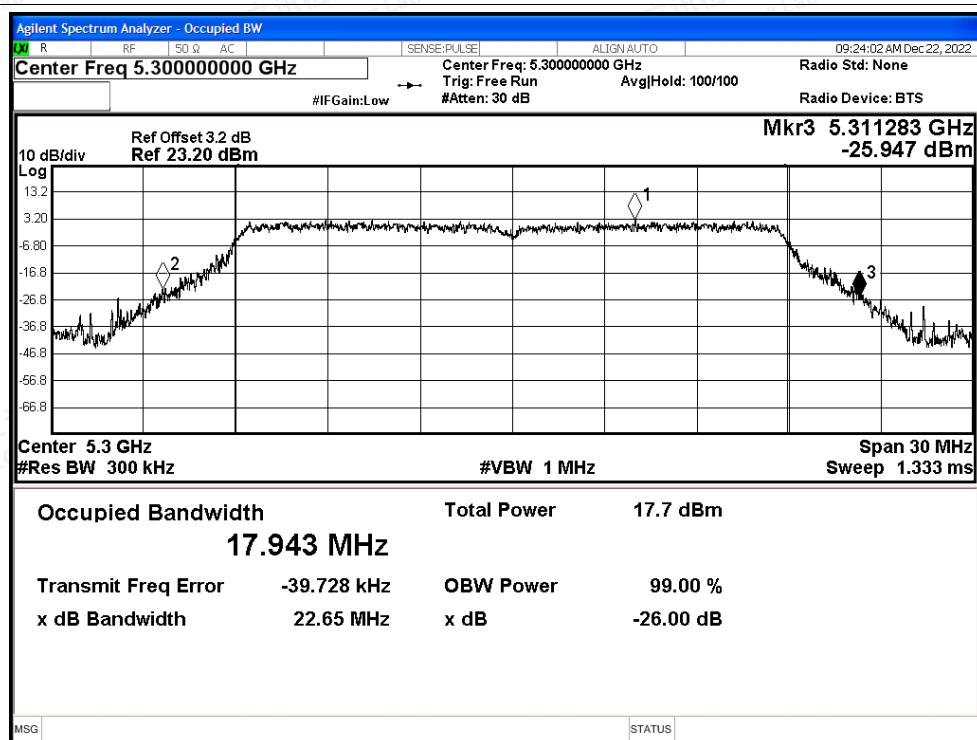


-26dB Bandwidth NVNT n20 5320MHz Ant1

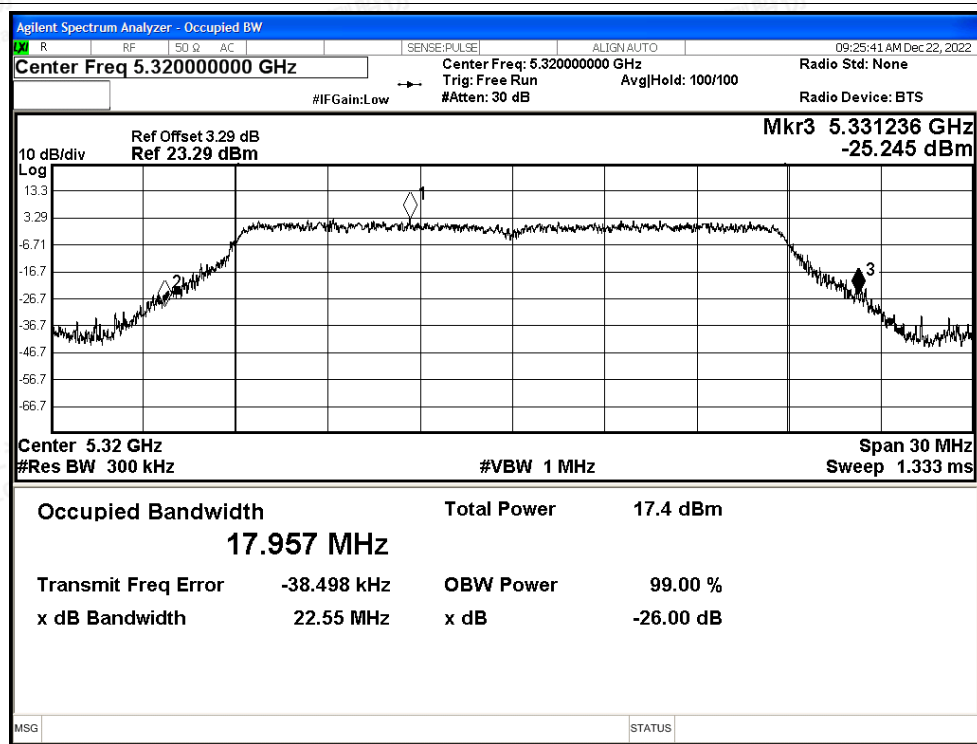




-26dB Bandwidth NVNT n40 5270MHz Ant1

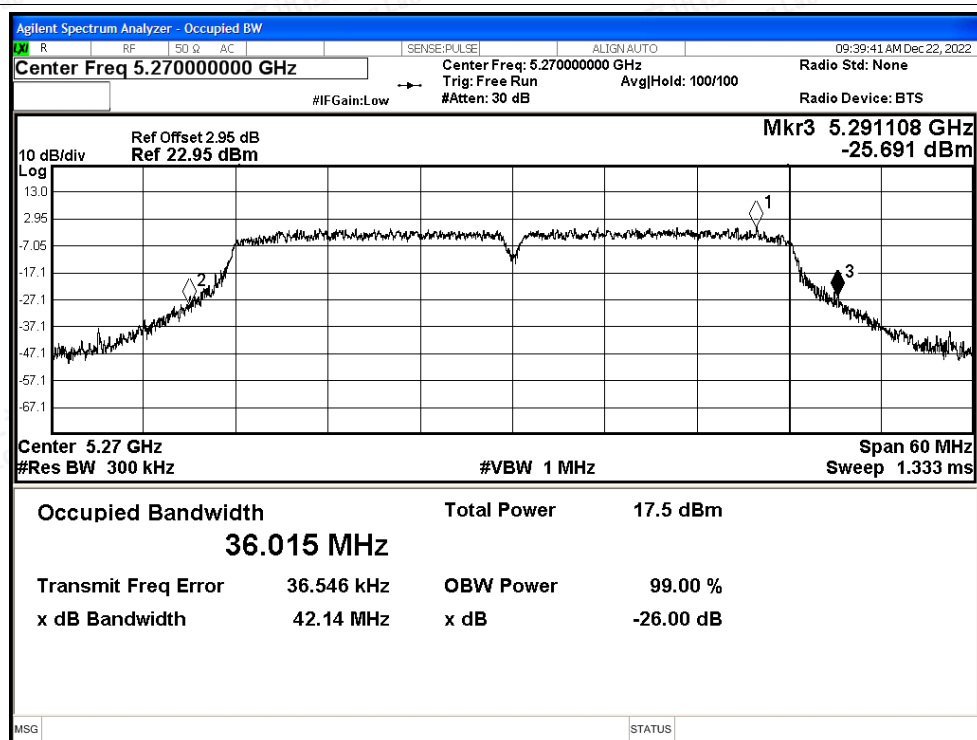


-26dB Bandwidth NVNT n40 5310MHz Ant1

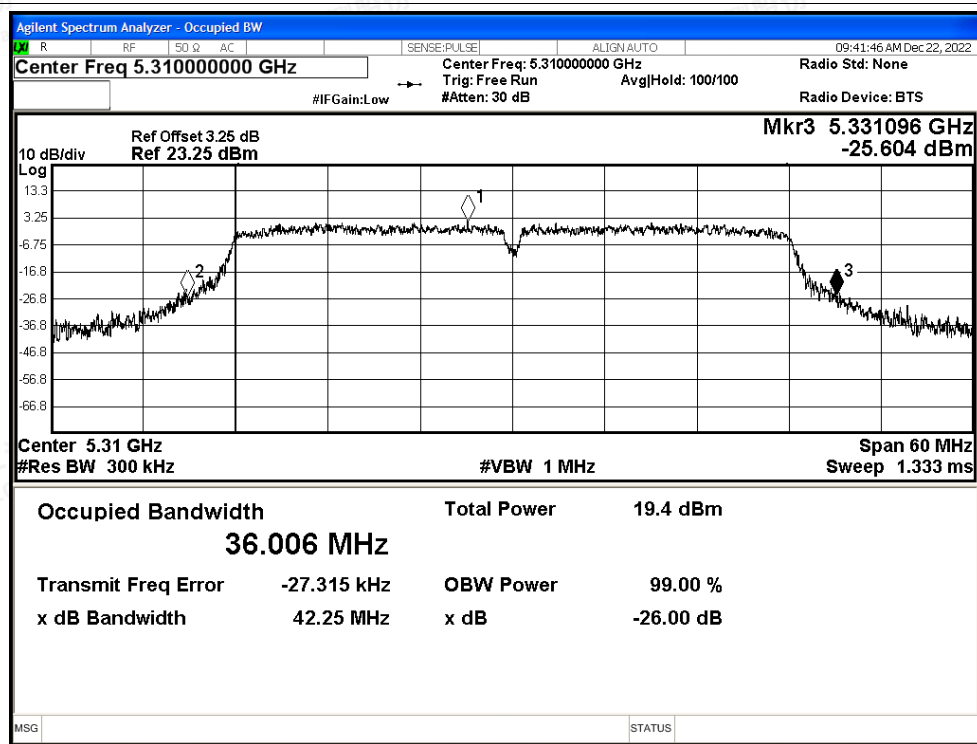




-26dB Bandwidth NVNT ac20 5260MHz Ant1

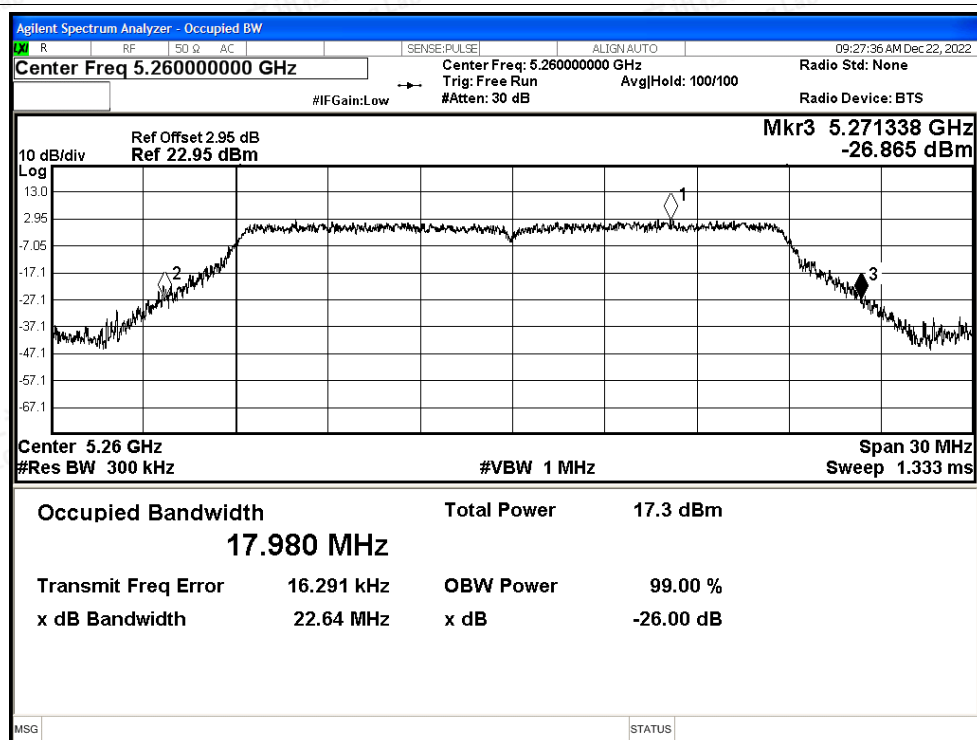

-26dB Bandwidth NVNT ac20 5300MHz Ant1

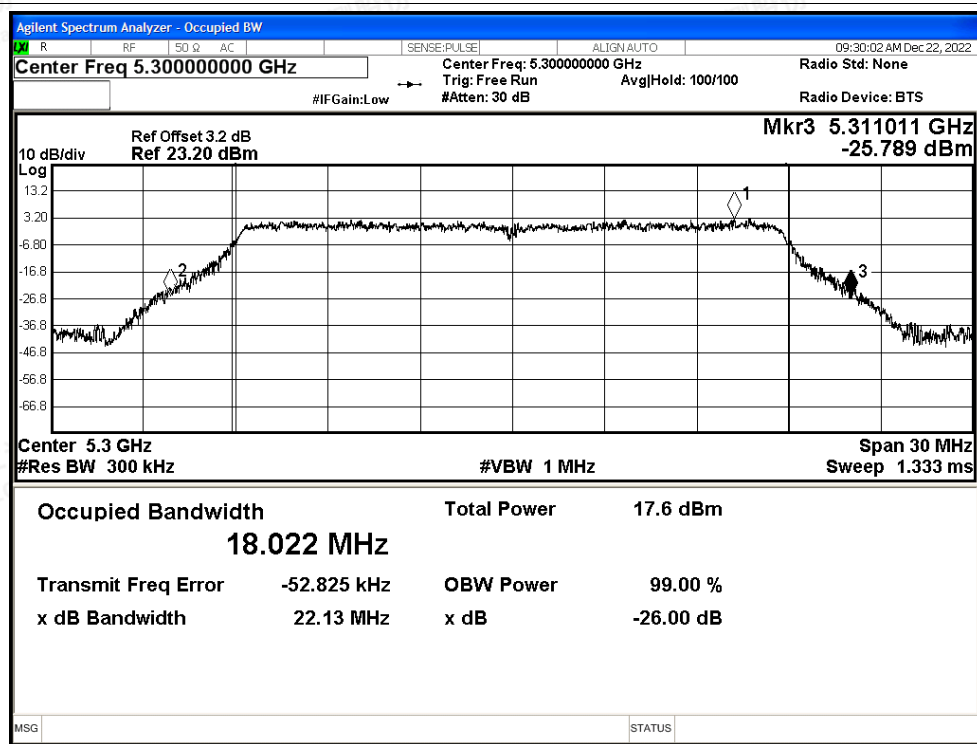

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5320MHz Ant1

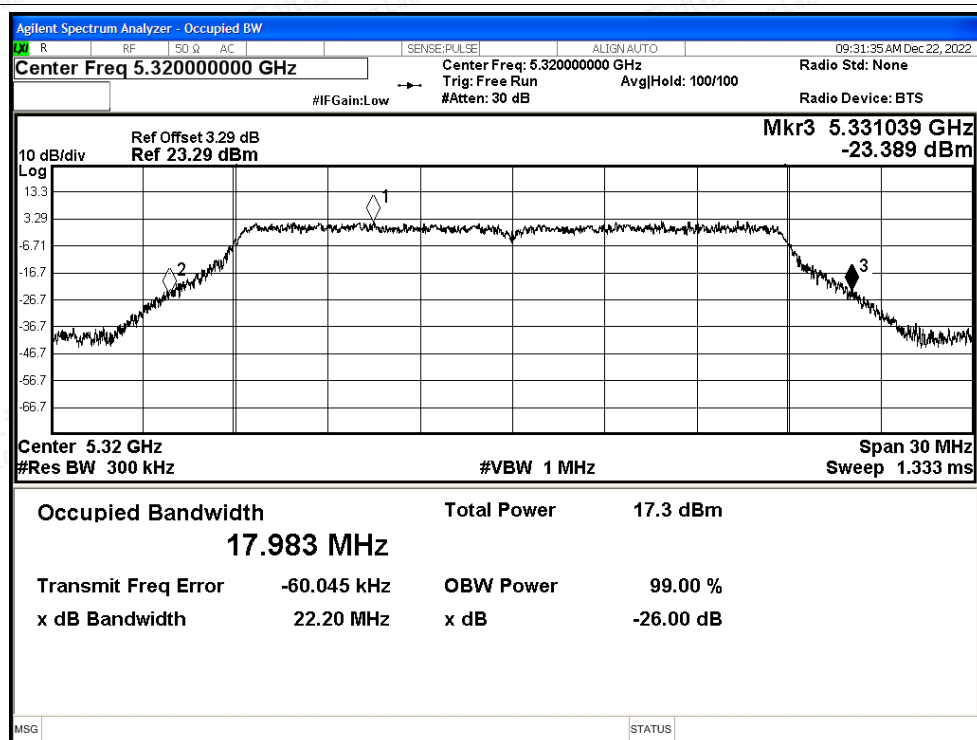

-26dB Bandwidth NVNT ac40 5270MHz Ant1

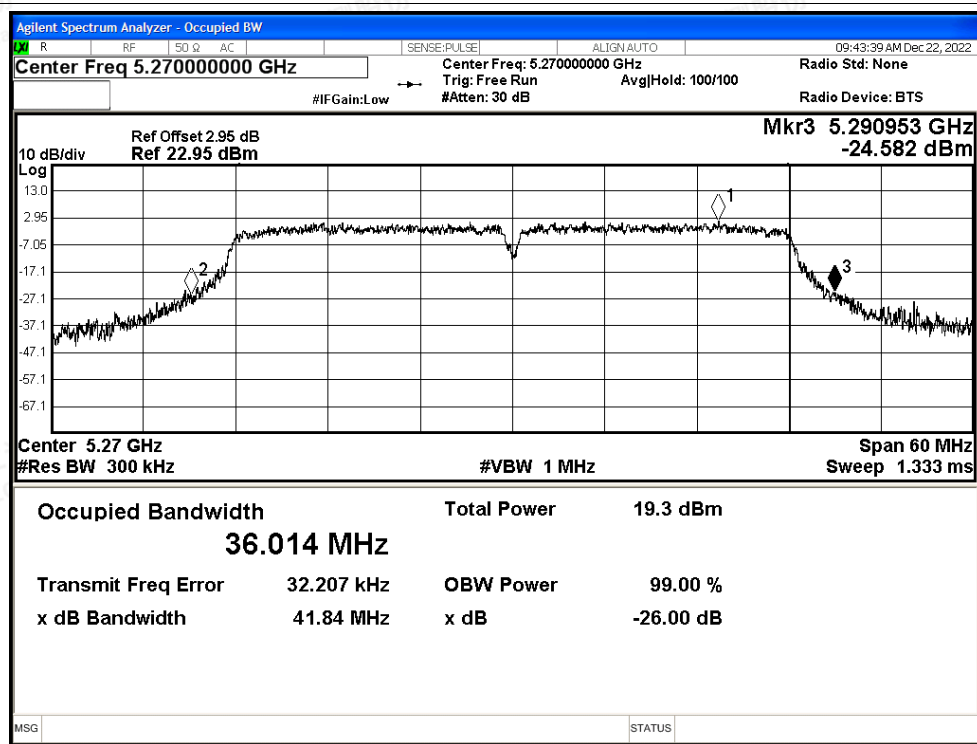

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac40 5310MHz Ant1

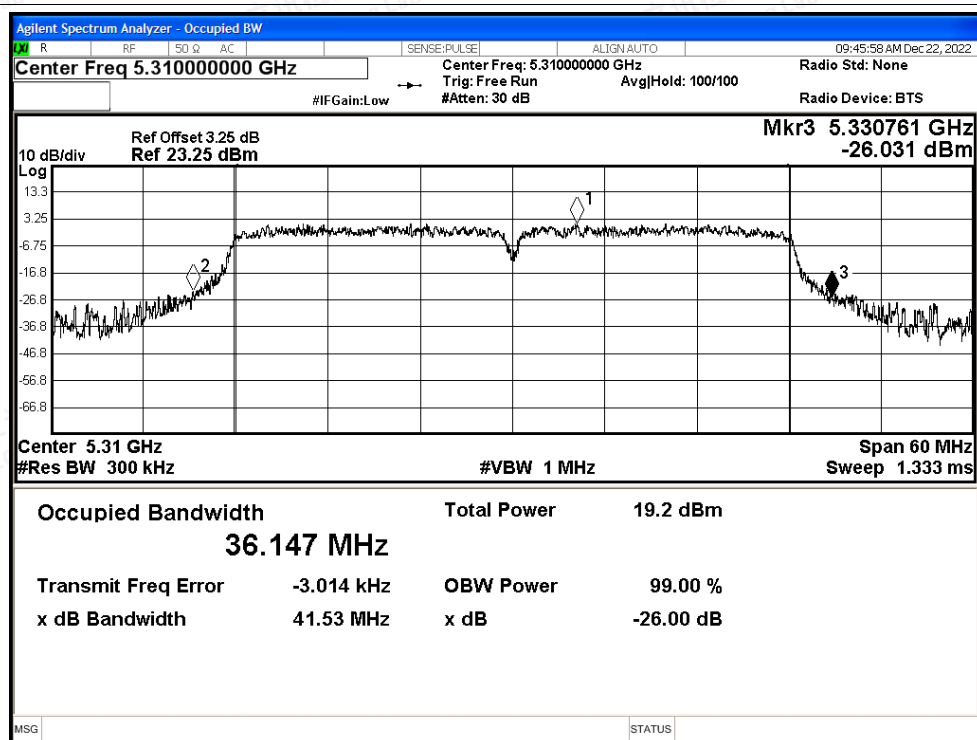

-26dB Bandwidth NVNT ac80 5290MHz Ant1

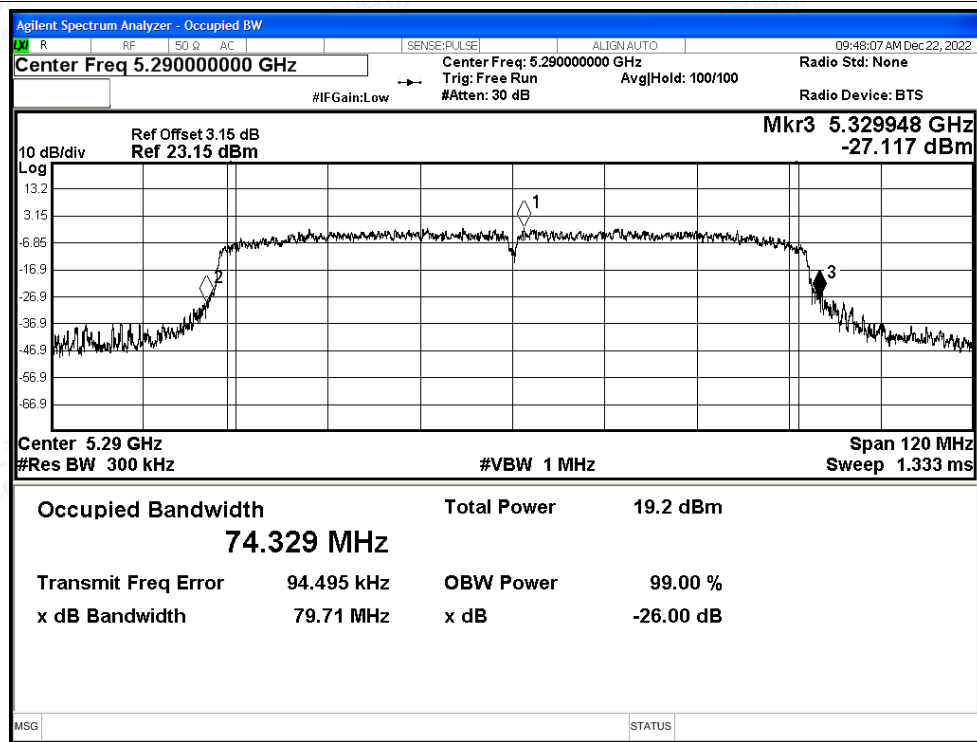

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	11.27	0.75	12.02	24	Pass
NVNT	a	5300	Ant1	11.33	0.76	12.09	24	Pass
NVNT	a	5320	Ant1	11.2	0.75	11.95	24	Pass
NVNT	n20	5260	Ant1	11.24	0.76	12.00	24	Pass
NVNT	n20	5300	Ant1	11.4	0.8	12.20	24	Pass
NVNT	n20	5320	Ant1	11.23	0.8	12.03	24	Pass
NVNT	n40	5270	Ant1	12.17	1.47	13.64	24	Pass
NVNT	n40	5310	Ant1	12.31	1.47	13.78	24	Pass
NVNT	ac20	5260	Ant1	11.1	0.8	11.90	24	Pass
NVNT	ac20	5300	Ant1	11.43	0.8	12.23	24	Pass
NVNT	ac20	5320	Ant1	10.93	0.8	11.73	24	Pass
NVNT	ac40	5270	Ant1	12.05	1.47	13.52	24	Pass
NVNT	ac40	5310	Ant1	11.62	2.38	14.00	24	Pass
NVNT	ac80	5290	Ant1	10.99	2.53	13.52	24	Pass





E.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	-7.23	0.75	-6.48	11	Pass
NVNT	a	5300	Ant1	-4.56	0.76	-3.8	11	Pass
NVNT	a	5320	Ant1	-8.07	0.75	-7.32	11	Pass
NVNT	n20	5260	Ant1	-4.8	0.76	-4.04	11	Pass
NVNT	n20	5300	Ant1	-7.74	0.8	-6.94	11	Pass
NVNT	n20	5320	Ant1	-6.22	0.8	-5.42	11	Pass
NVNT	n40	5270	Ant1	-14.23	1.47	-12.76	11	Pass
NVNT	n40	5310	Ant1	-14.54	1.47	-13.07	11	Pass
NVNT	ac20	5260	Ant1	-9.63	0.8	-8.83	11	Pass
NVNT	ac20	5300	Ant1	-8.5	0.8	-7.7	11	Pass
NVNT	ac20	5320	Ant1	-8.29	0.8	-7.49	11	Pass
NVNT	ac40	5270	Ant1	-15.99	1.47	-14.52	11	Pass
NVNT	ac40	5310	Ant1	-20.32	2.38	-17.94	11	Pass
NVNT	ac80	5290	Ant1	-24.67	2.53	-22.14	11	Pass






Test Graphs

PSD NVNT a 5260MHz Ant1

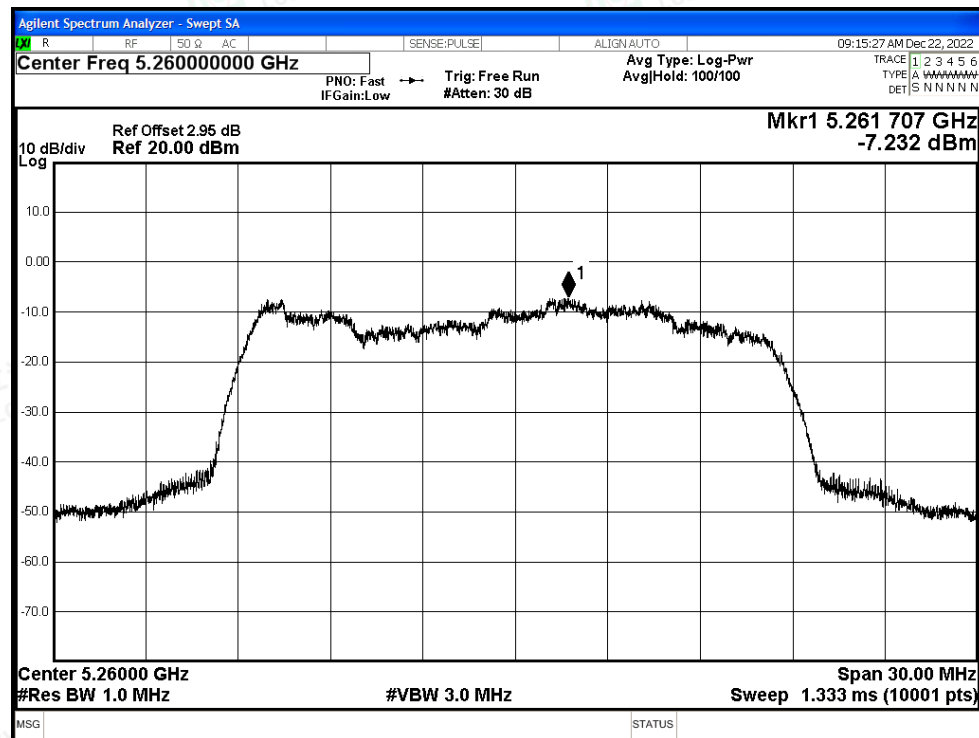


PSD NVNT a 5300MHz Ant1

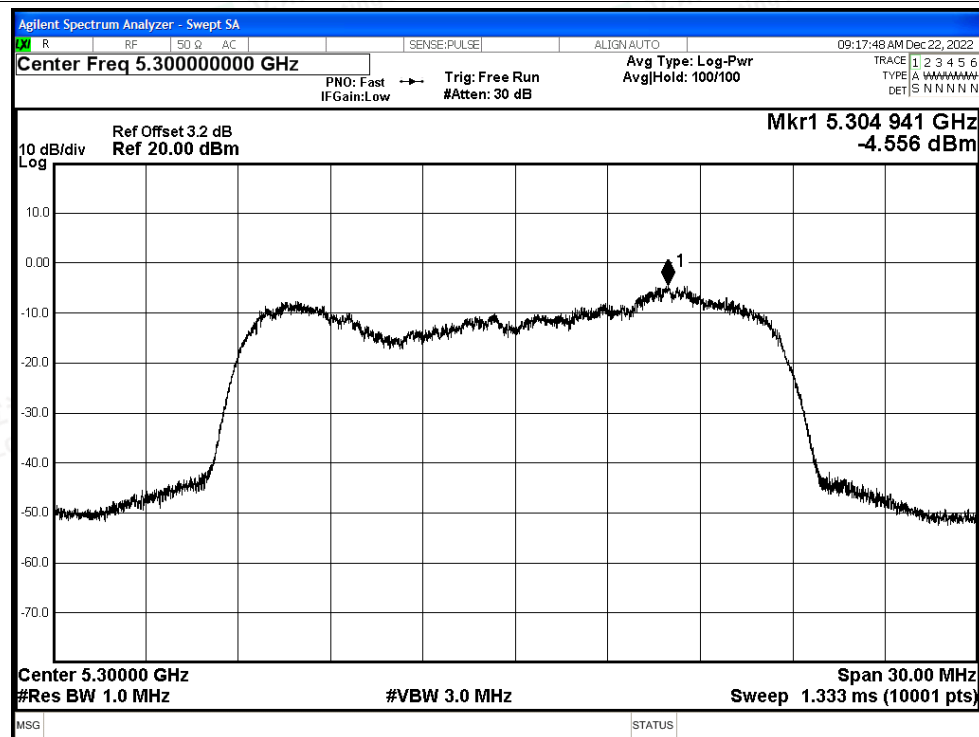








PSD NVNT a 5320MHz Ant1


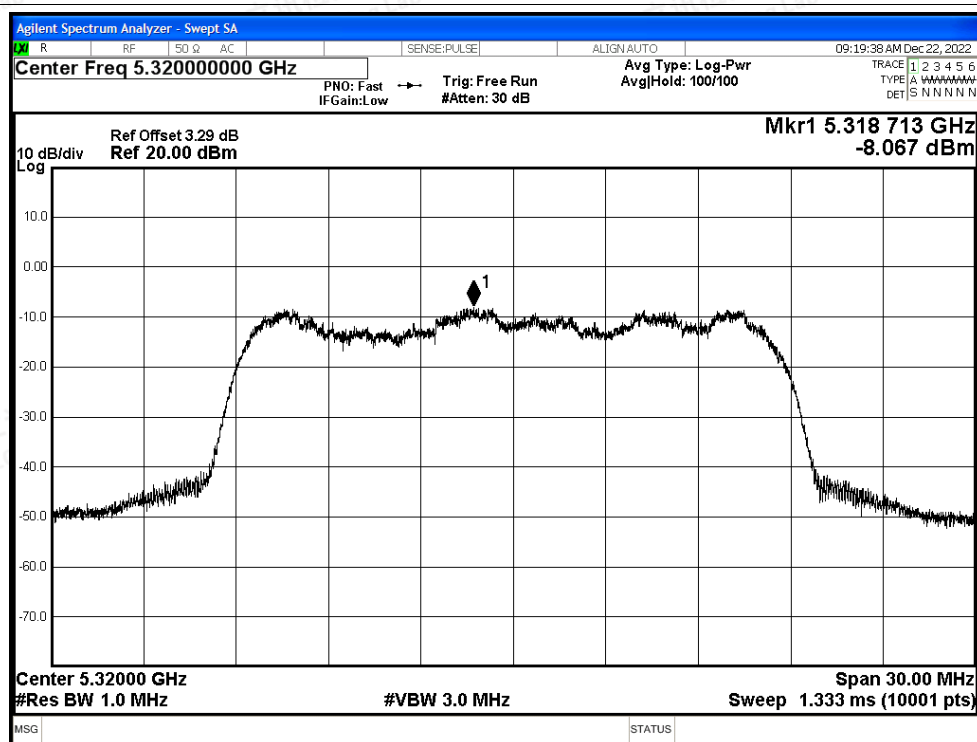


PSD NVNT n20 5260MHz Ant1

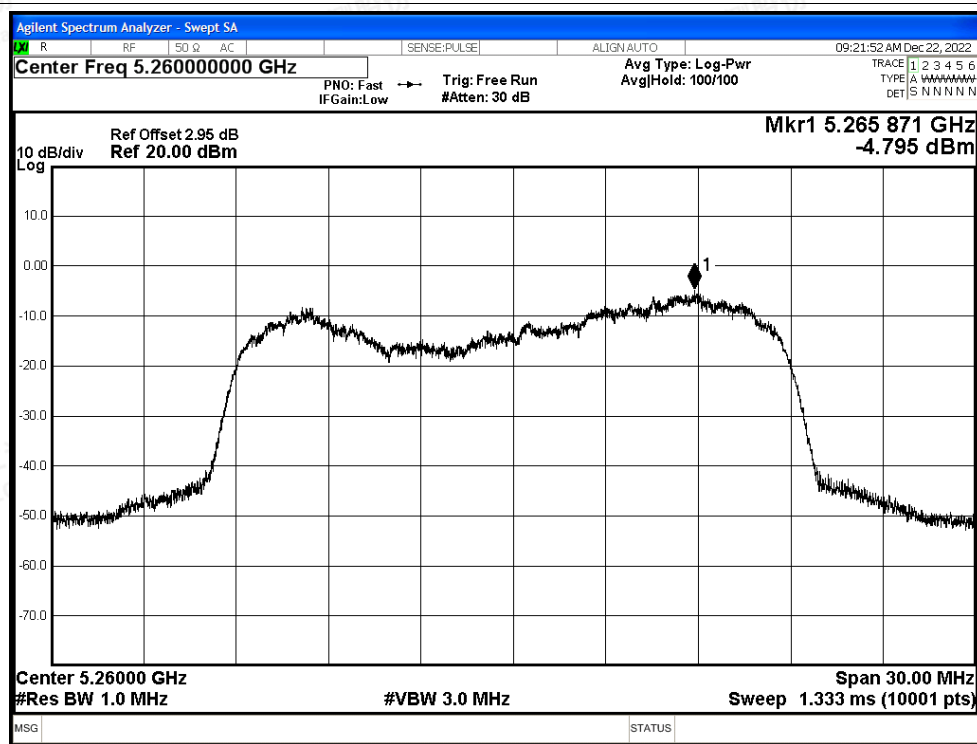

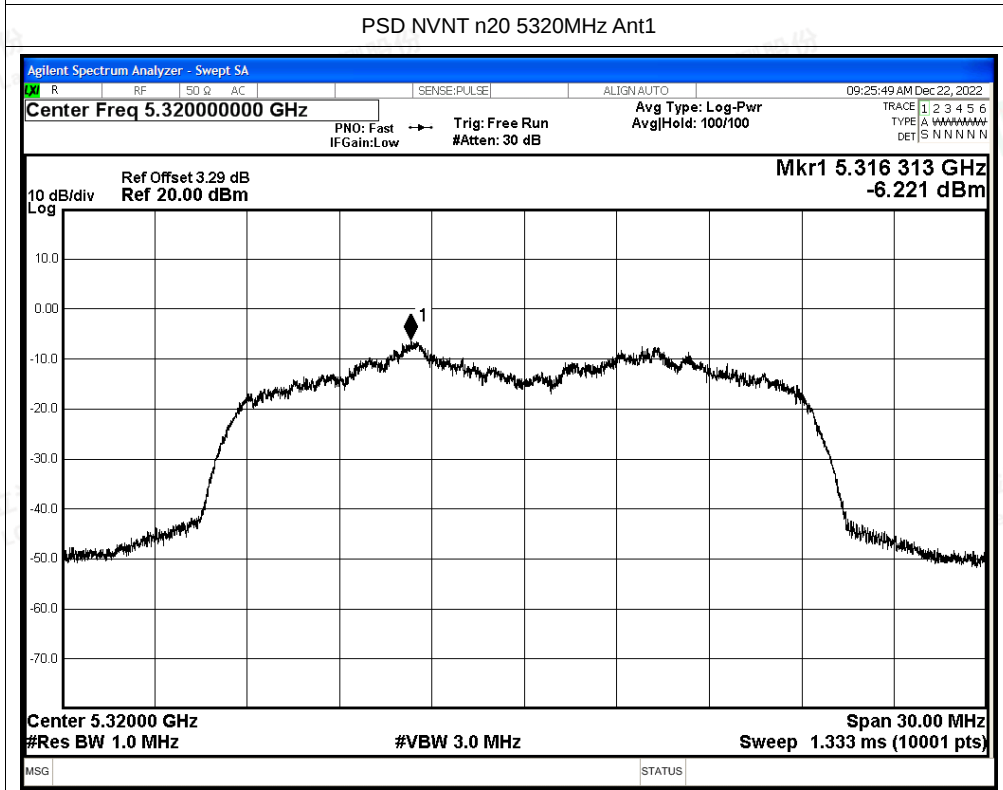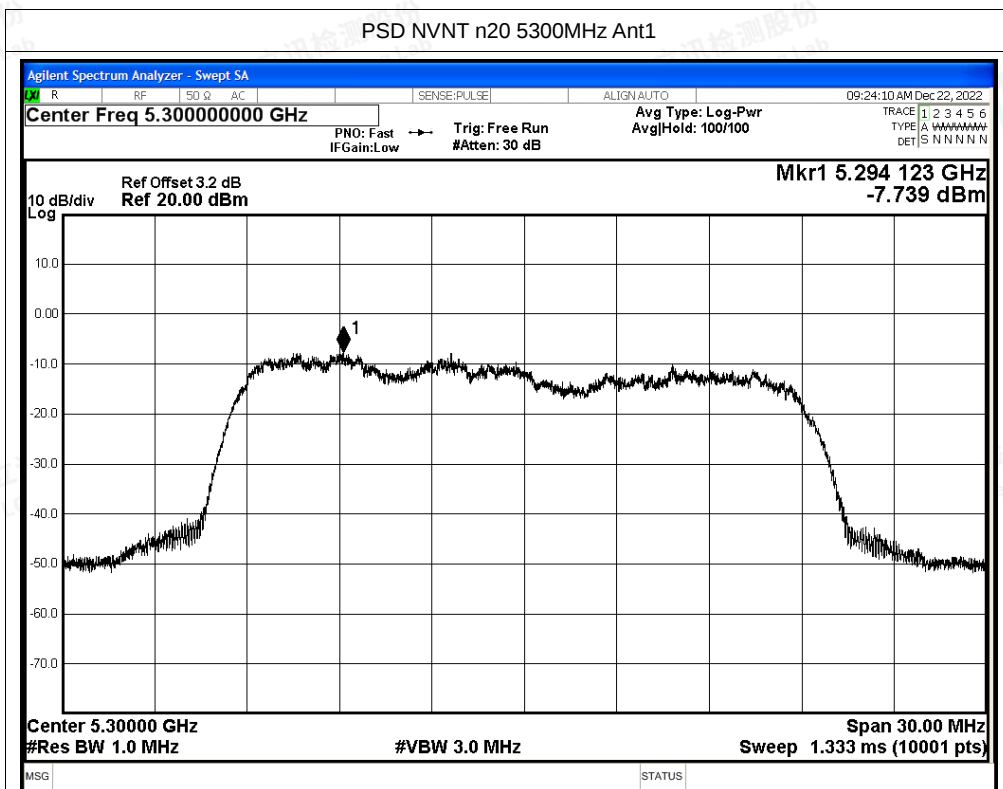


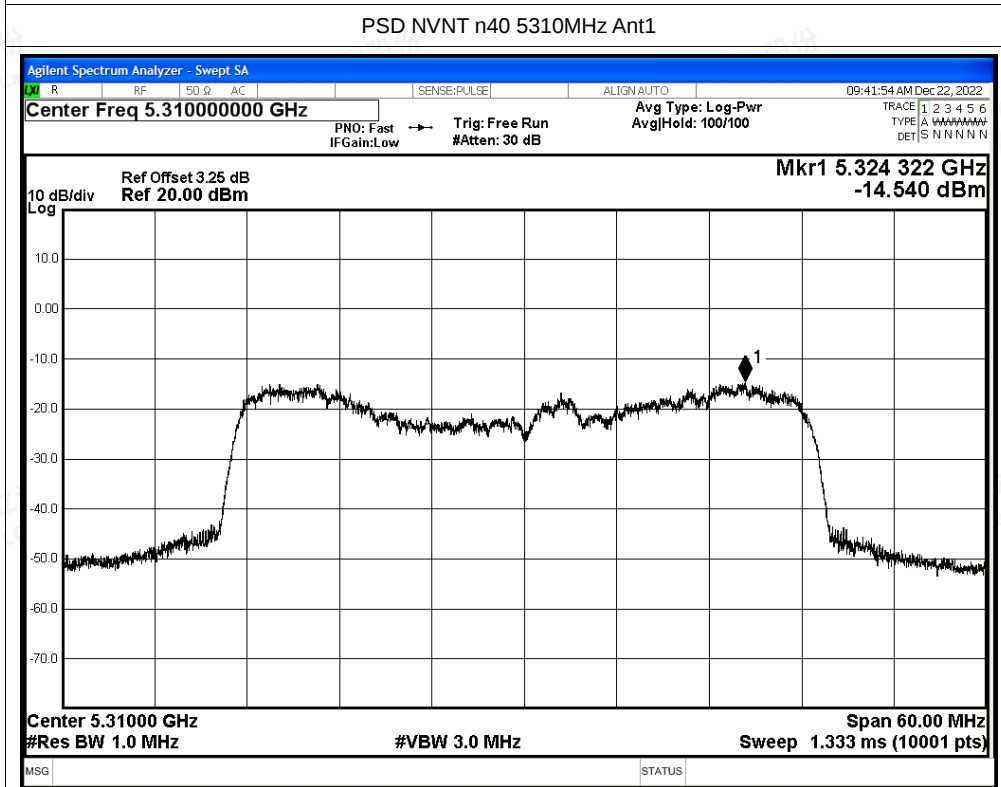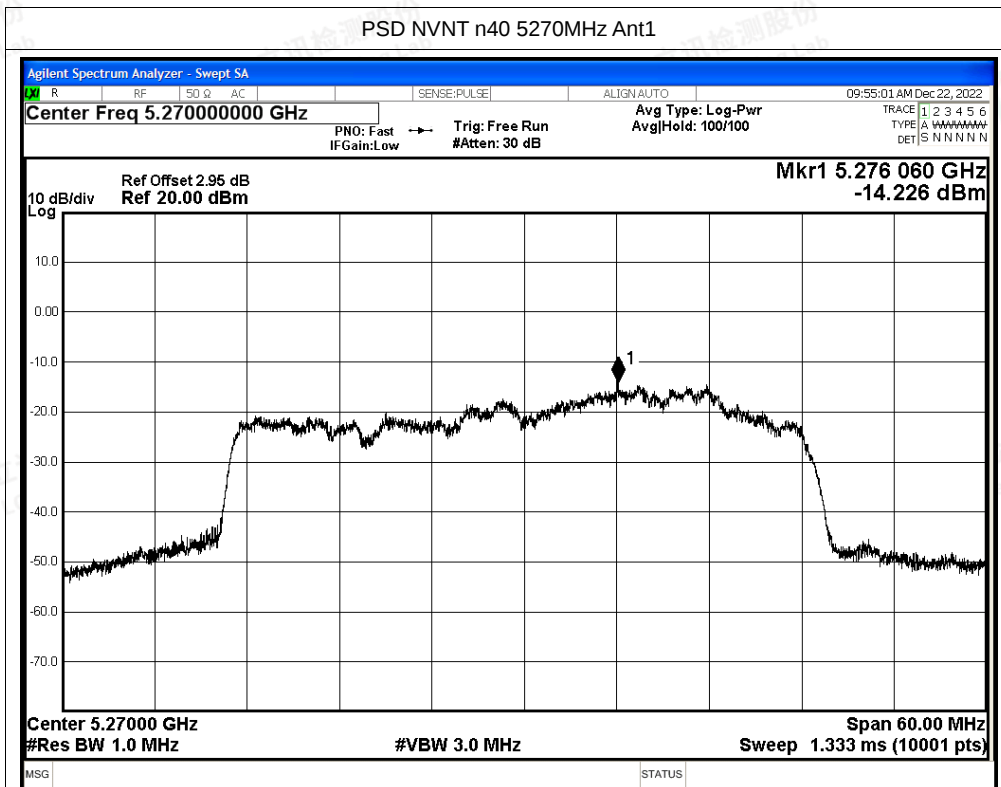

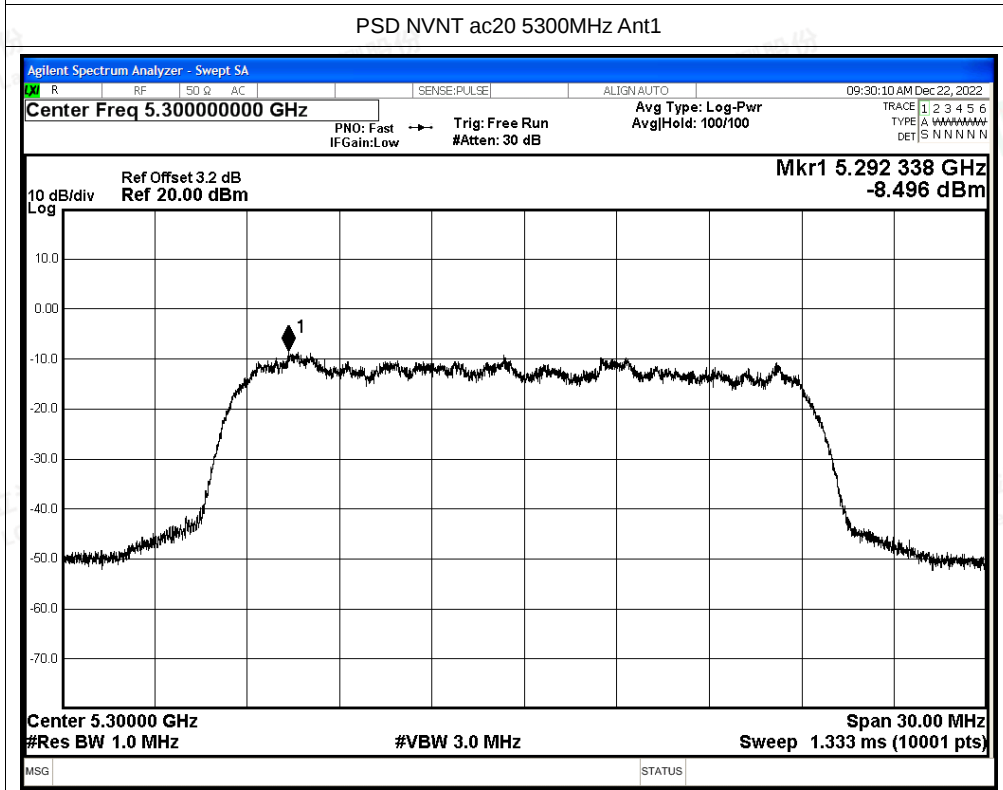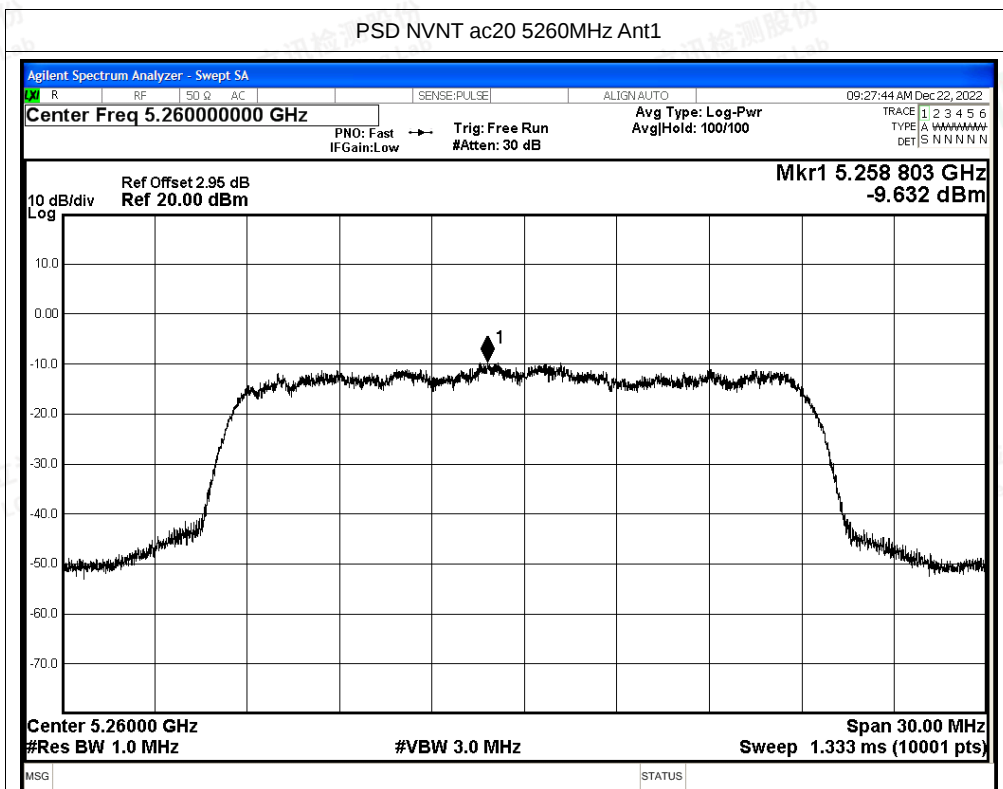






PSD NVNT ac20 5320MHz Ant1

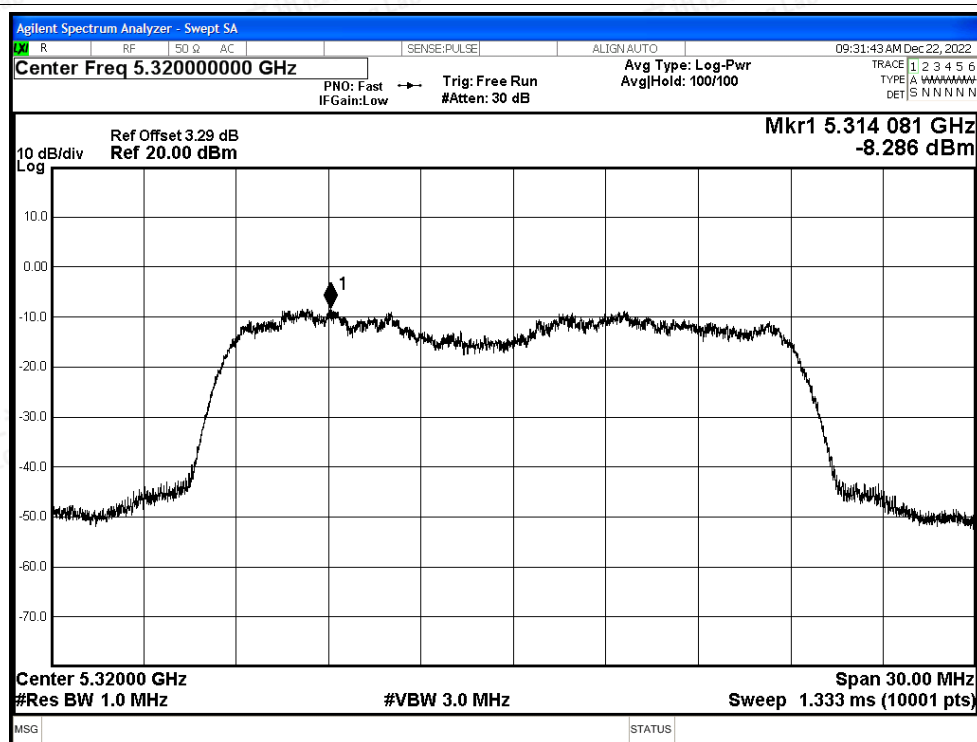

PSD NVNT ac40 5270MHz Ant1

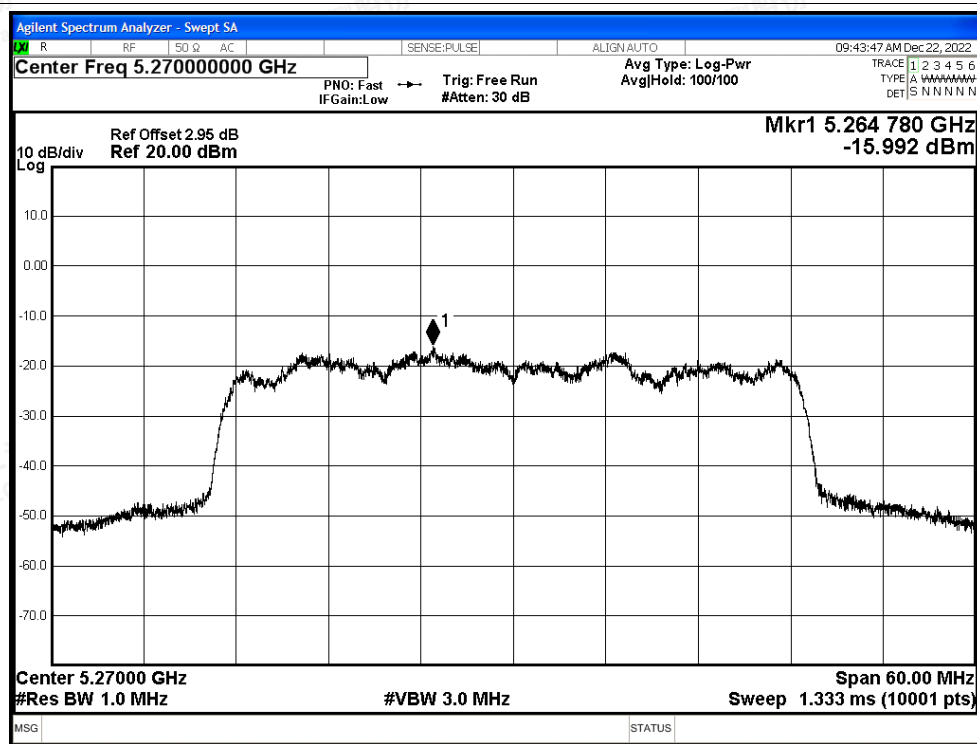

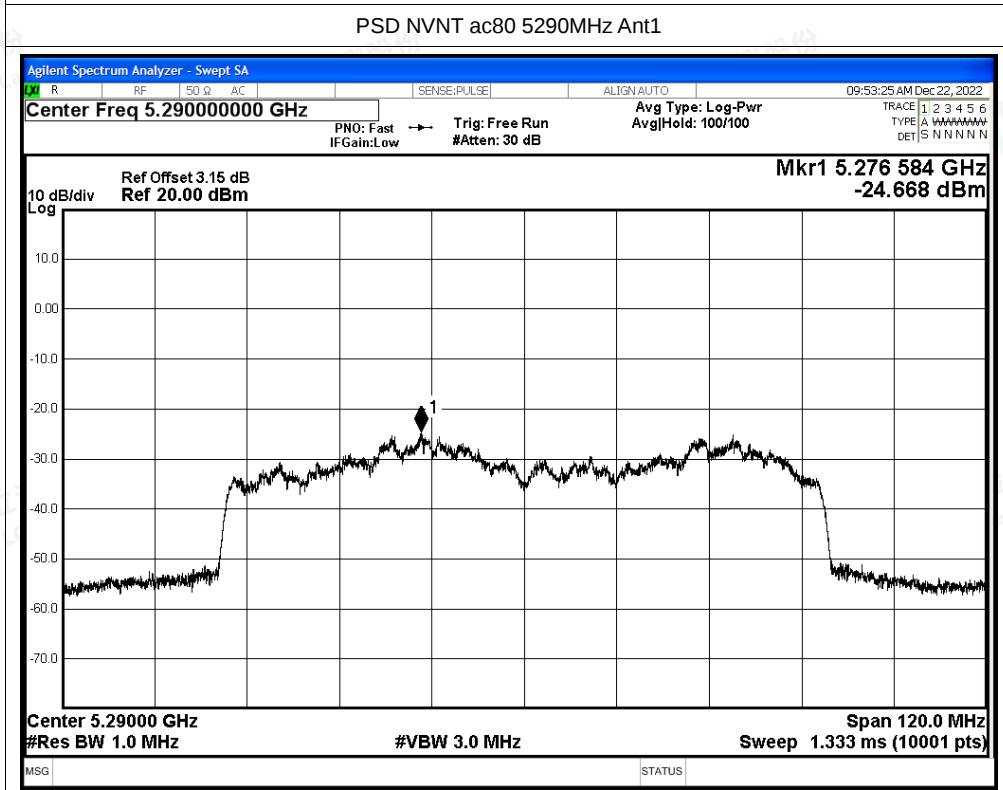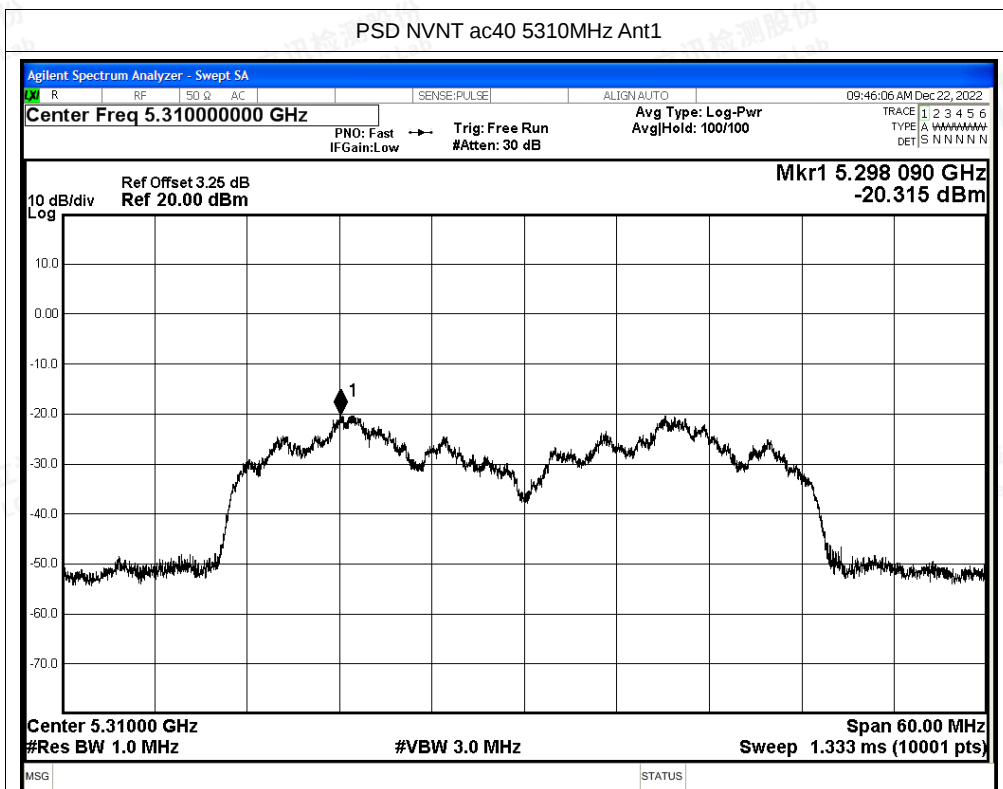



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant1	4500	-51.61	3.5	47.12	Peak	68.2	Pass
NVNT	a	5260	Ant1	4500	-60.21	3.5	38.52	Average	54	Pass
NVNT	a	5260	Ant1	5070.18	-45.91	3.5	52.82	Peak	68.2	Pass
NVNT	a	5260	Ant1	5063.94	-57.55	3.5	41.18	Average	54	Pass
NVNT	a	5260	Ant1	5150	-50.8	3.5	47.93	Peak	68.2	Pass
NVNT	a	5260	Ant1	5150	-58.79	3.5	39.94	Average	54	Pass
NVNT	a	5320	Ant1	5350	-47.6	3.5	51.13	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-58.38	3.5	40.35	Average	54	Pass
NVNT	a	5320	Ant1	5373.6	-43.74	3.5	54.99	Peak	68.2	Pass
NVNT	a	5320	Ant1	5372.2	-53.75	3.5	44.98	Average	54	Pass
NVNT	a	5320	Ant1	5460	-48.95	3.5	49.78	Peak	68.2	Pass
NVNT	a	5320	Ant1	5460	-59.16	3.5	39.57	Average	54	Pass
NVNT	n20	5260	Ant1	4500	-50.26	3.5	48.47	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4500	-60.22	3.5	38.51	Average	54	Pass
NVNT	n20	5260	Ant1	5057.7	-46.08	3.5	52.65	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5075.64	-57.74	3.5	40.99	Average	54	Pass
NVNT	n20	5260	Ant1	5150	-48.48	3.5	50.25	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5150	-59.09	3.5	39.64	Average	54	Pass
NVNT	n20	5320	Ant1	5350	-48.38	3.5	50.35	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-58.12	3.5	40.61	Average	54	Pass
NVNT	n20	5320	Ant1	5372.4	-43.48	3.5	55.25	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5371.6	-53.08	3.5	45.65	Average	54	Pass
NVNT	n20	5320	Ant1	5460	-49.18	3.5	49.55	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5460	-59.15	3.5	39.58	Average	54	Pass
NVNT	n40	5270	Ant1	4500	-51.97	3.5	46.76	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4500	-59.82	3.5	38.91	Average	54	Pass
NVNT	n40	5270	Ant1	4910.67	-47.09	3.5	51.64	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5082.39	-57.62	3.5	41.11	Average	54	Pass
NVNT	n40	5270	Ant1	5150	-49.39	3.5	49.34	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5150	-58.51	3.5	40.22	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-34.37	3.5	64.36	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-49.54	3.5	49.19	Average	54	Pass
NVNT	n40	5310	Ant1	5353.8	-31.68	3.5	67.05	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350.8	-49.41	3.5	49.32	Average	54	Pass
NVNT	n40	5310	Ant1	5460	-48.26	3.5	50.47	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5460	-58.88	3.5	39.85	Average	54	Pass
NVNT	ac20	5260	Ant1	4500	-50.78	3.5	47.95	Peak	68.2	Pass






NVNT	ac20	5260	Ant1	4500	-60.18	3.5	38.55	Average	54	Pass
NVNT	ac20	5260	Ant1	5070.96	-46.71	3.5	52.02	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5063.16	-57.74	3.5	40.99	Average	54	Pass
NVNT	ac20	5260	Ant1	5150	-50.05	3.5	48.68	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5150	-58.94	3.5	39.79	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-48.54	3.5	50.19	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-57.98	3.5	40.75	Average	54	Pass
NVNT	ac20	5320	Ant1	5372.2	-43.51	3.5	55.22	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5371.8	-53.03	3.5	45.70	Average	54	Pass
NVNT	ac20	5320	Ant1	5460	-47.19	3.5	51.54	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5460	-59.29	3.5	39.44	Average	54	Pass
NVNT	ac40	5270	Ant1	4500	-49.71	3.5	49.02	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4500	-60.06	3.5	38.67	Average	54	Pass
NVNT	ac40	5270	Ant1	5143.14	-46.88	3.5	51.85	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5065.38	-57.42	3.5	41.31	Average	54	Pass
NVNT	ac40	5270	Ant1	5150	-49.69	3.5	49.04	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5150	-58.61	3.5	40.12	Average	54	Pass
NVNT	ac40	5310	Ant1	5350	-33.39	3.5	65.34	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-49.07	3.5	49.66	Average	54	Pass
NVNT	ac40	5310	Ant1	5350.6	-32.13	3.5	66.60	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350.4	-48.85	3.5	49.88	Average	54	Pass
NVNT	ac40	5310	Ant1	5460	-50.33	3.5	48.40	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5460	-58.47	3.5	40.26	Average	54	Pass
NVNT	ac80	5290	Ant1	4500	-51.14	3.5	47.59	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	4500	-58.95	3.5	39.78	Average	54	Pass
NVNT	ac80	5290	Ant1	5144.67	-44.58	3.5	54.15	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5081.16	-56.94	3.5	41.79	Average	54	Pass
NVNT	ac80	5290	Ant1	5150	-48.97	3.5	49.76	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5150	-57.79	3.5	40.94	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-33.84	3.5	64.89	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-49.46	3.5	49.27	Average	54	Pass
NVNT	ac80	5290	Ant1	5366.25	-30.88	3.5	67.85	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5351	-49.06	3.5	49.67	Average	54	Pass
NVNT	ac80	5290	Ant1	5460	-49.75	3.5	48.98	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5460	-58.5	3.5	40.23	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5260MHz Ant1 Peak

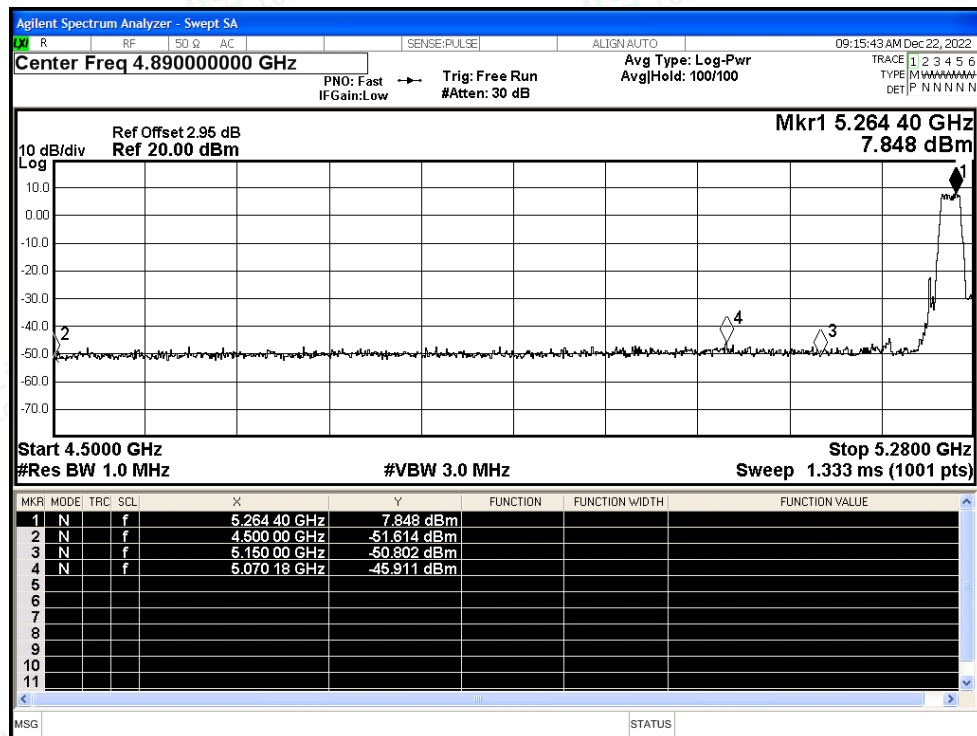


Restrict Band NVNT a 5260MHz Ant1 Average

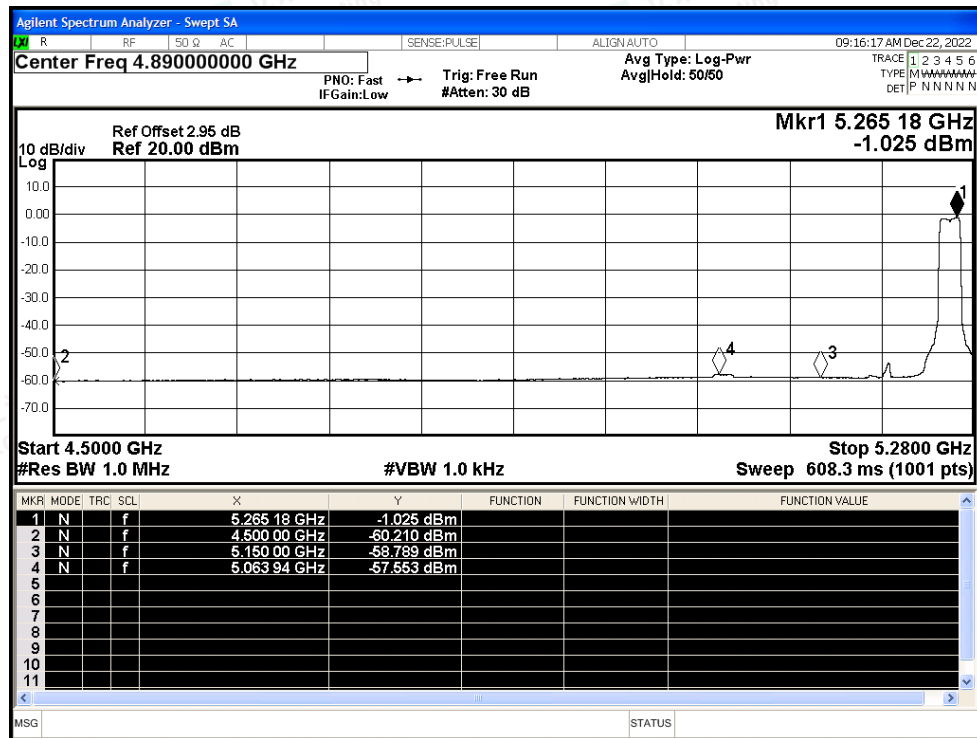




Restrict Band NVNT a 5320MHz Ant1 Peak

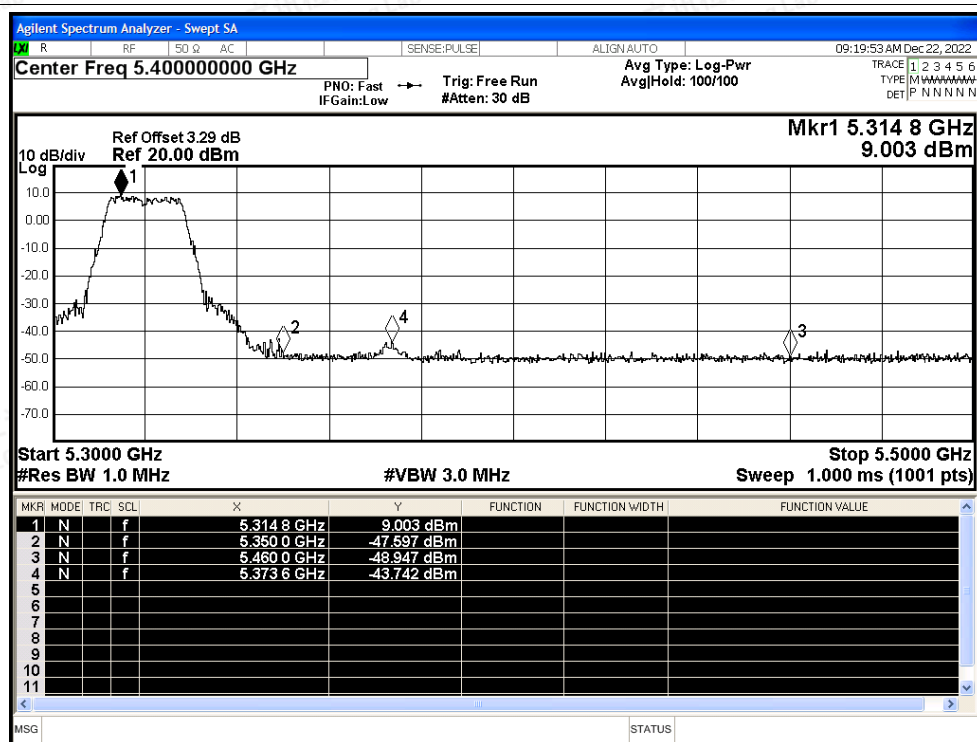

Restrict Band NVNT a 5320MHz Ant1 Average

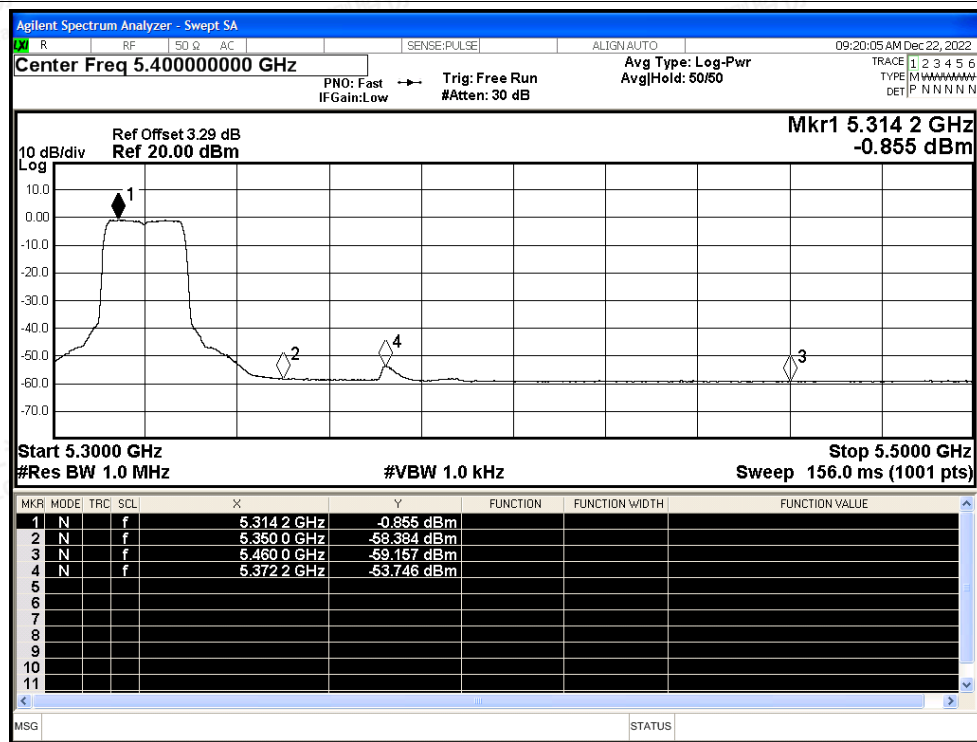

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n20 5260MHz Ant1 Peak

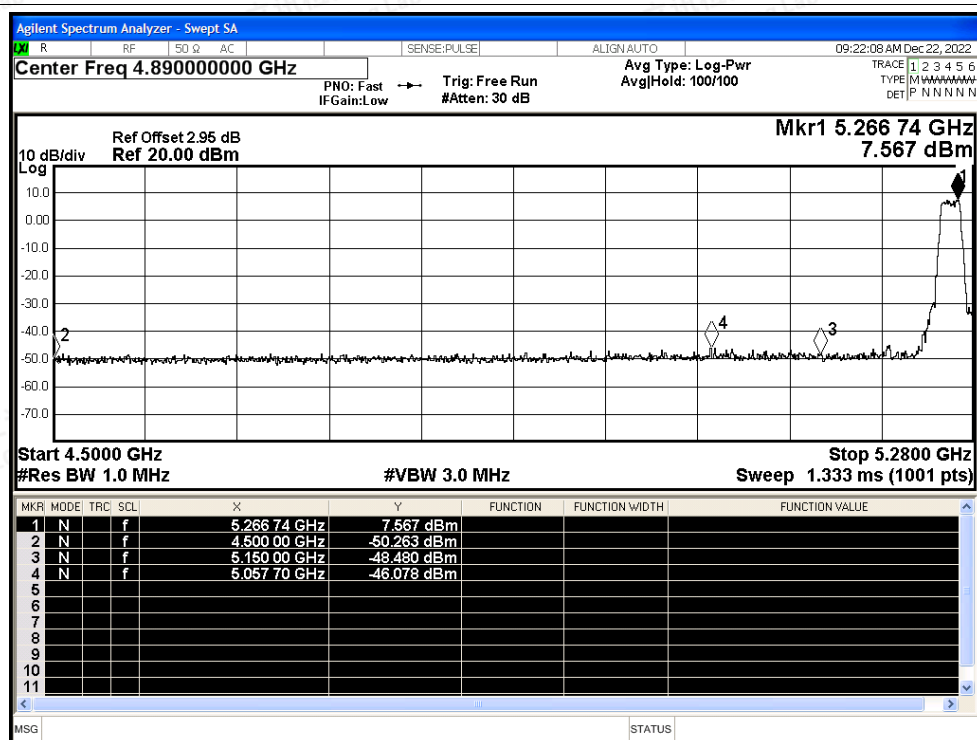


Restrict Band NVNT n20 5260MHz Ant1 Average

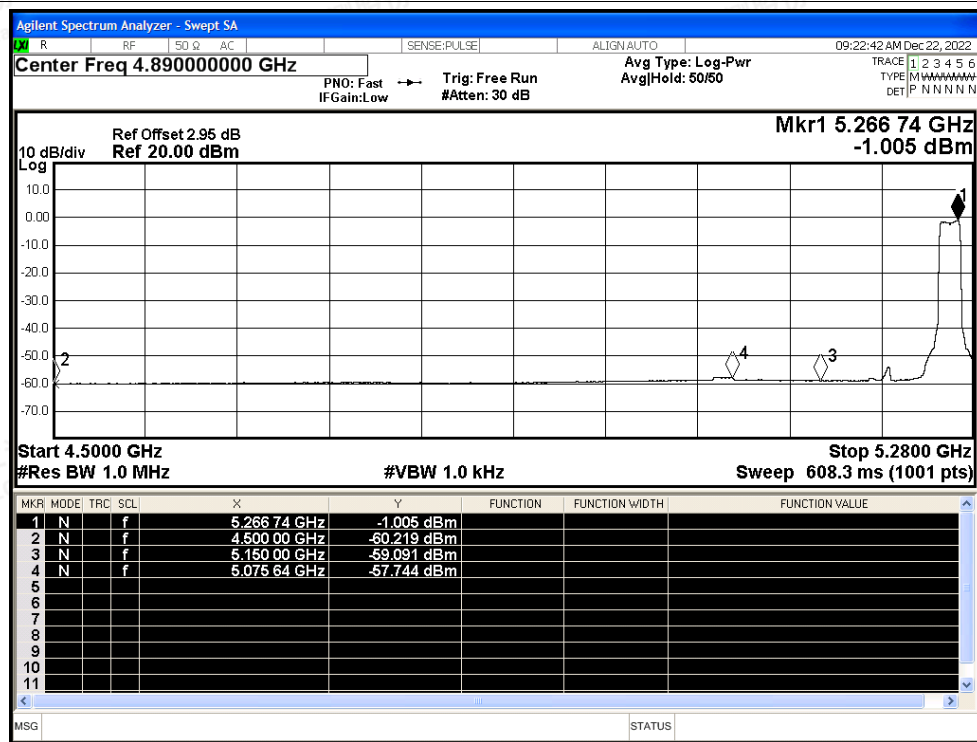




Restrict Band NVNT n20 5320MHz Ant1 Peak

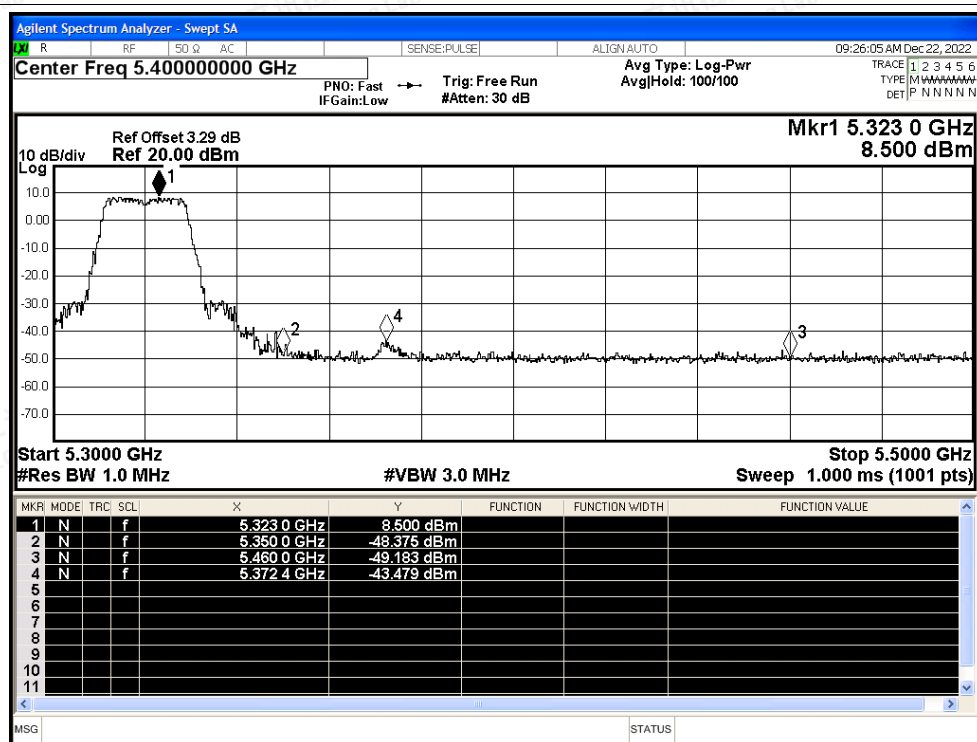


Restrict Band NVNT n20 5320MHz Ant1 Average

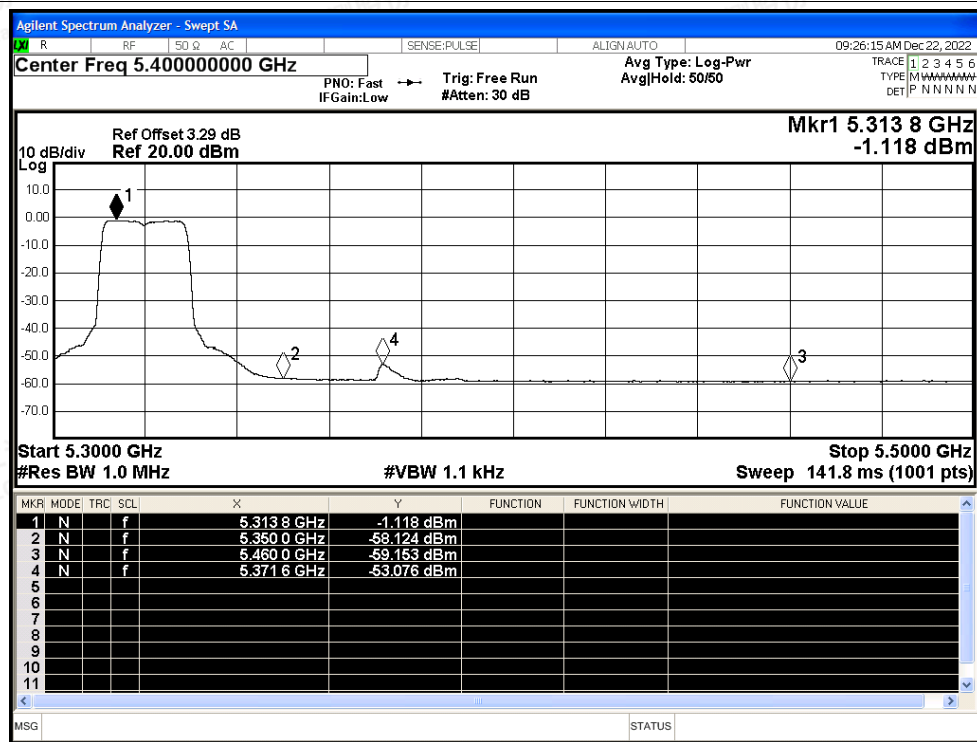




Restrict Band NVNT n40 5270MHz Ant1 Peak

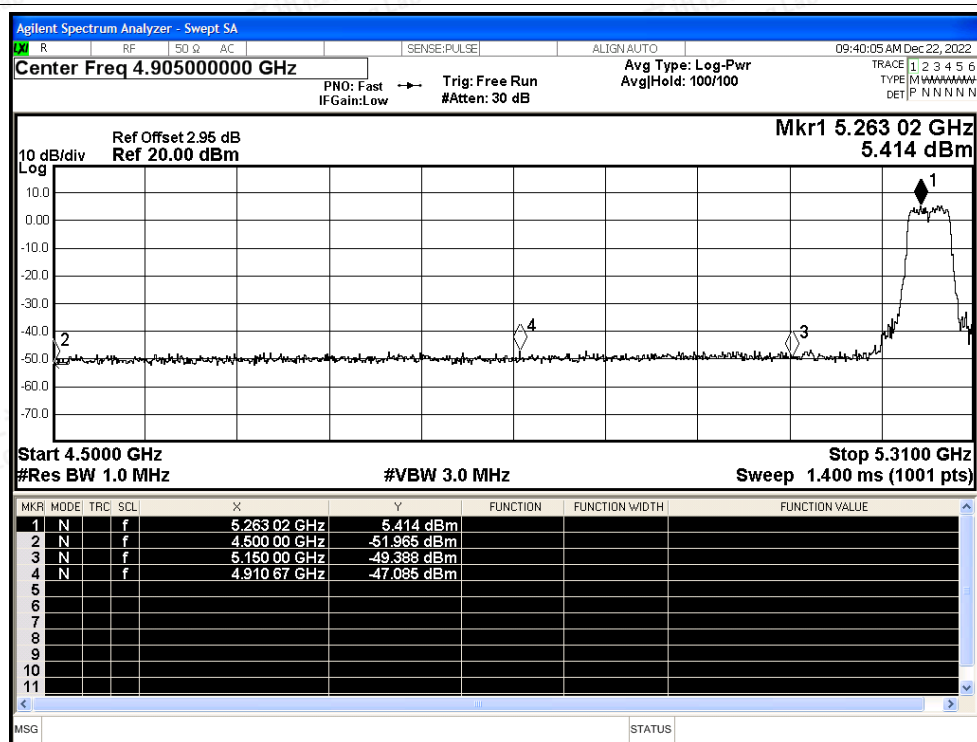


Restrict Band NVNT n40 5270MHz Ant1 Average

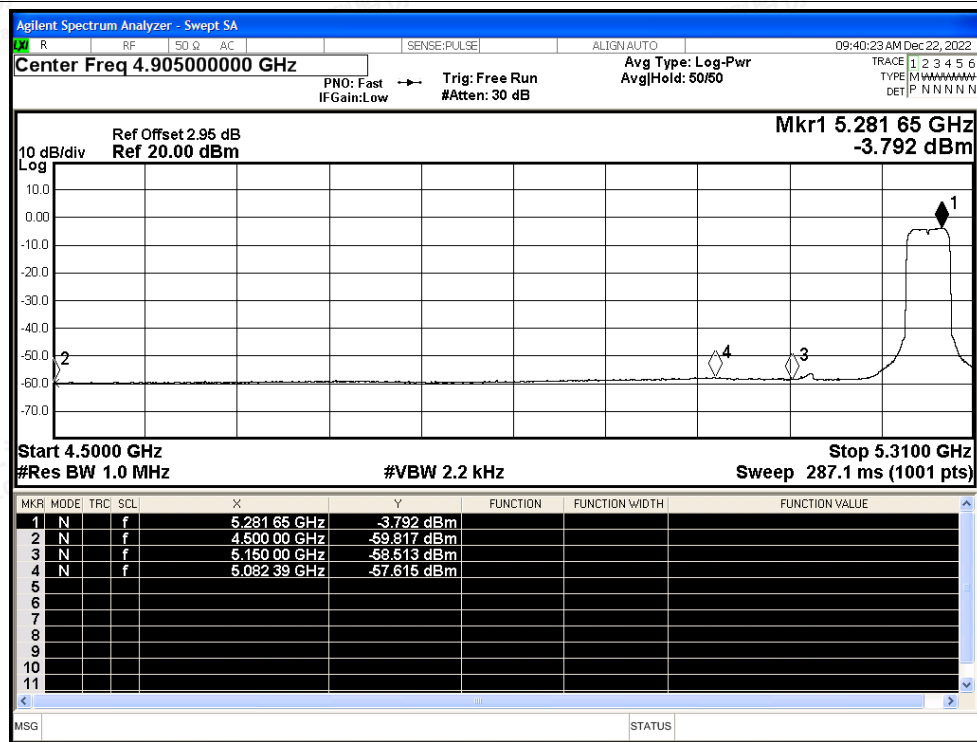




Restrict Band NVNT n40 5310MHz Ant1 Peak

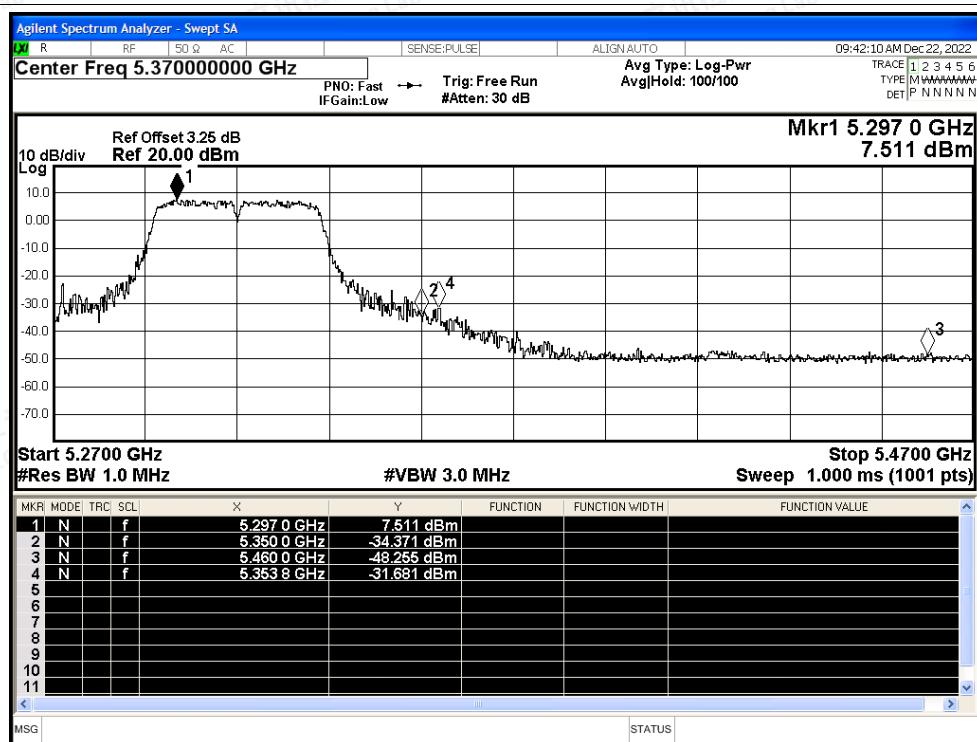

Restrict Band NVNT n40 5310MHz Ant1 Average

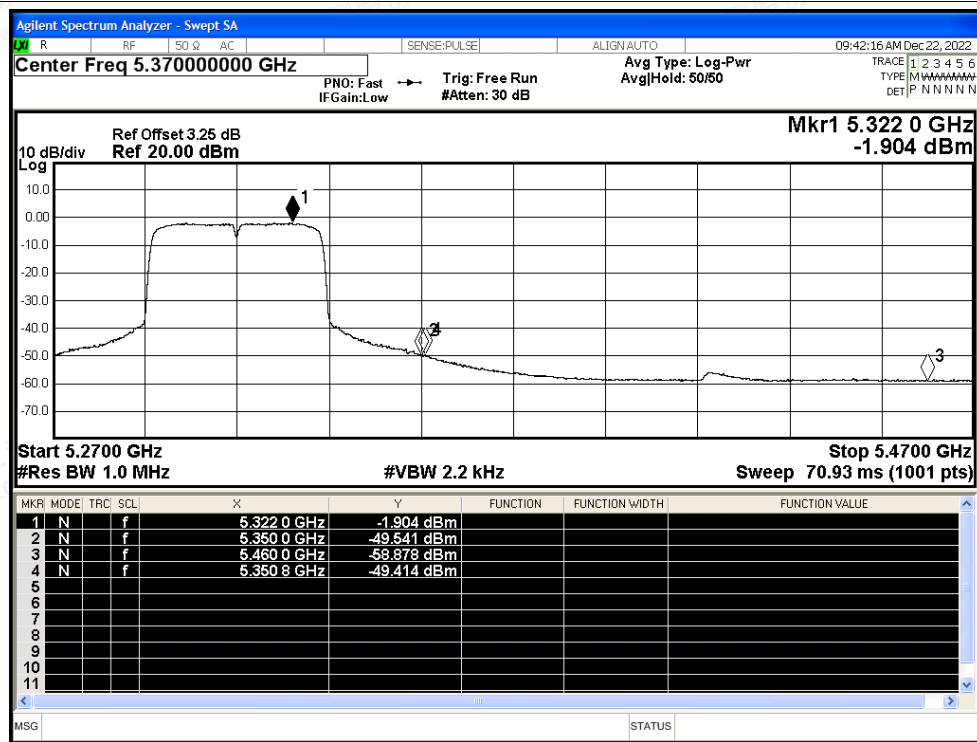

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac20 5260MHz Ant1 Peak

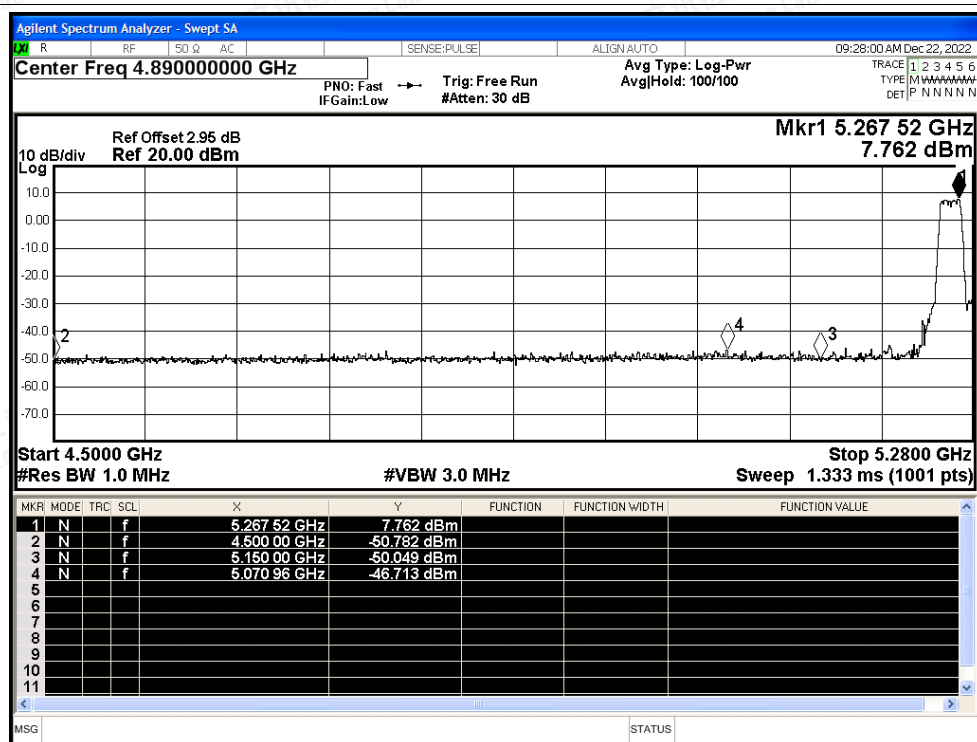


Restrict Band NVNT ac20 5260MHz Ant1 Average

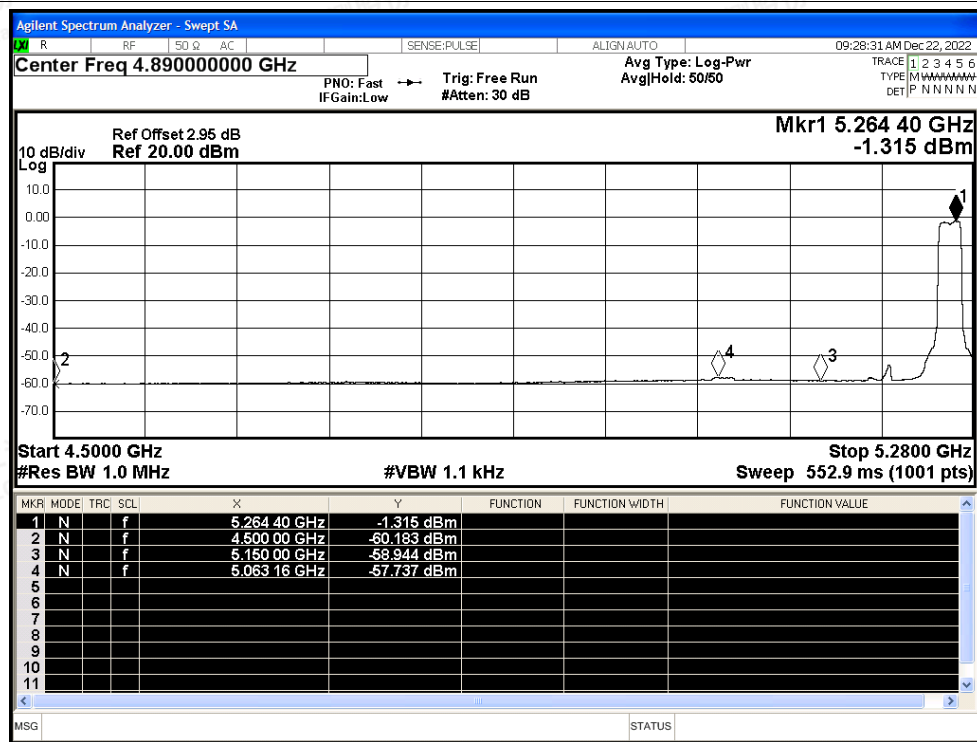




Restrict Band NVNT ac20 5320MHz Ant1 Peak

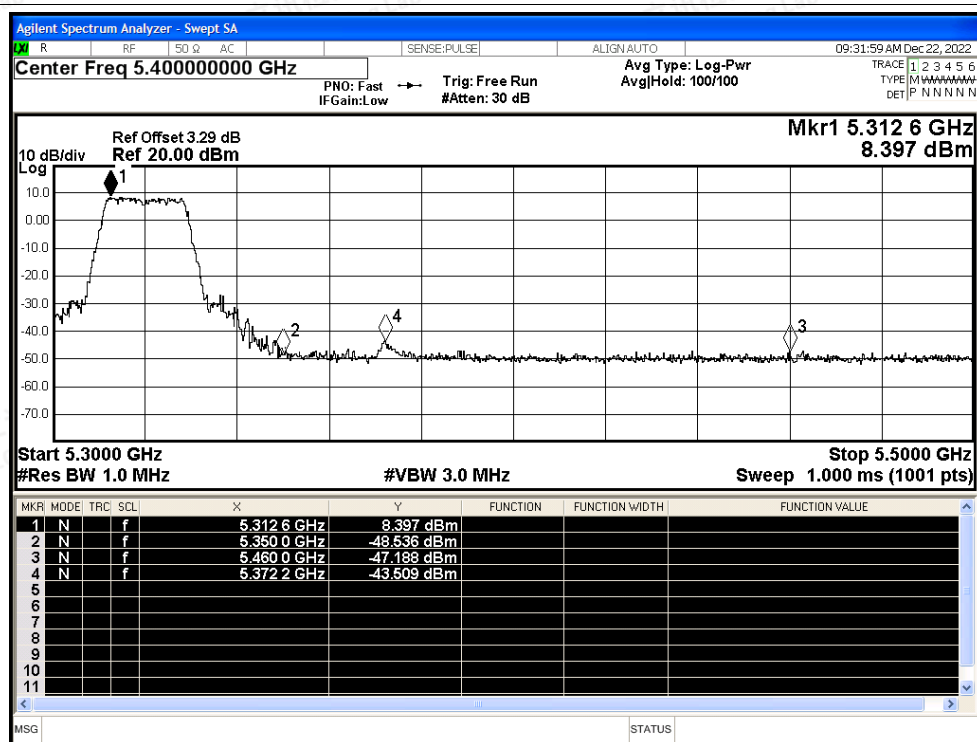


Restrict Band NVNT ac20 5320MHz Ant1 Average

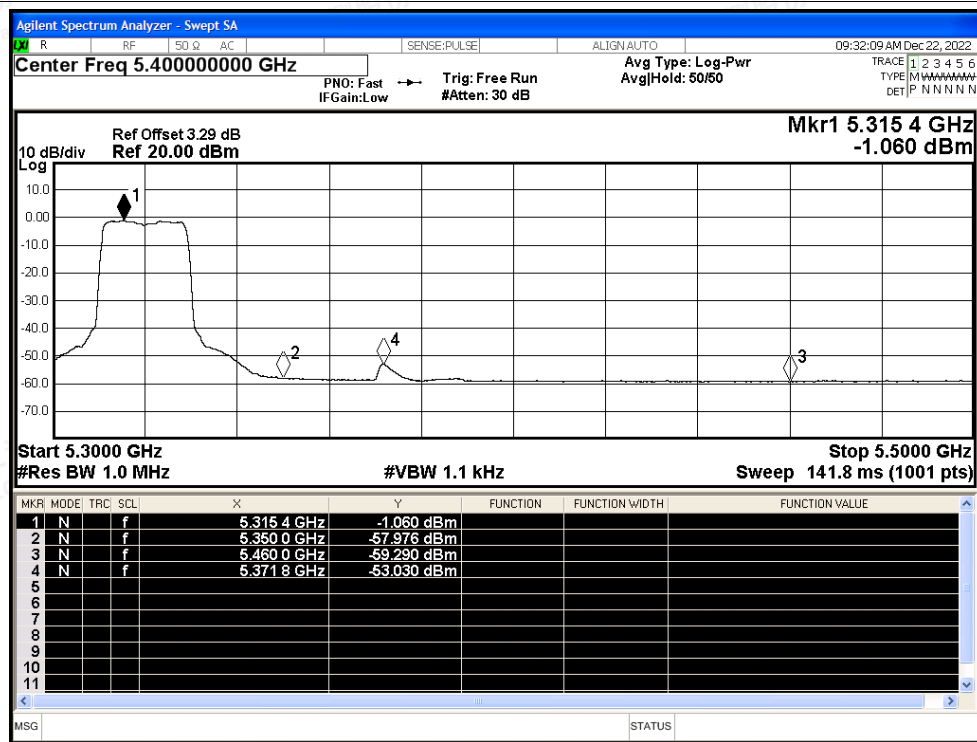




Restrict Band NVNT ac40 5270MHz Ant1 Peak

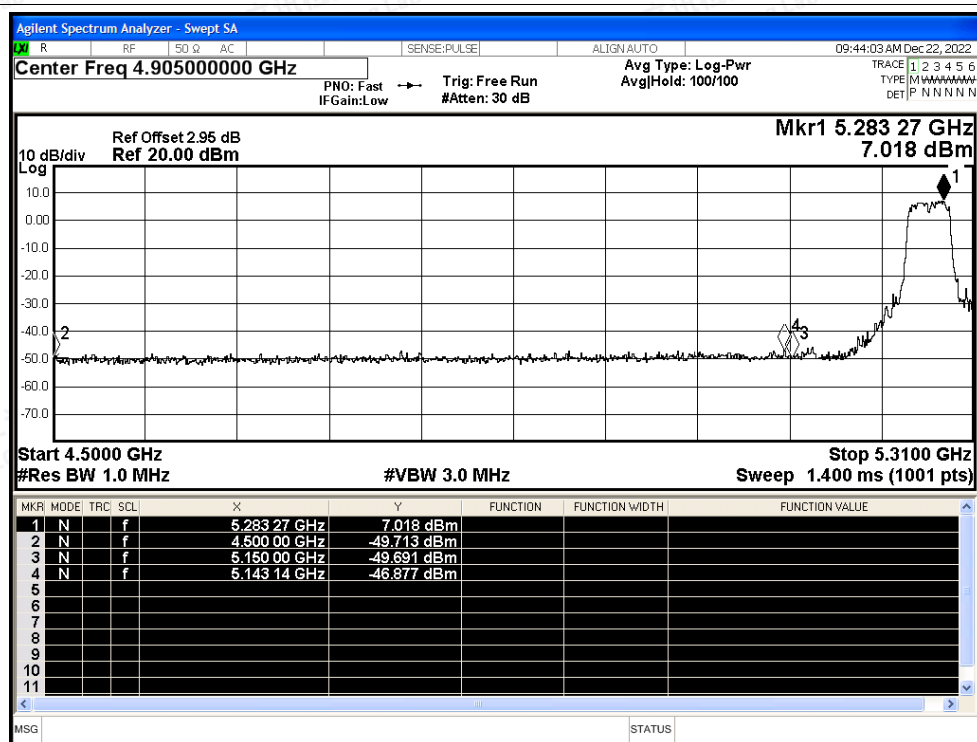


Restrict Band NVNT ac40 5270MHz Ant1 Average

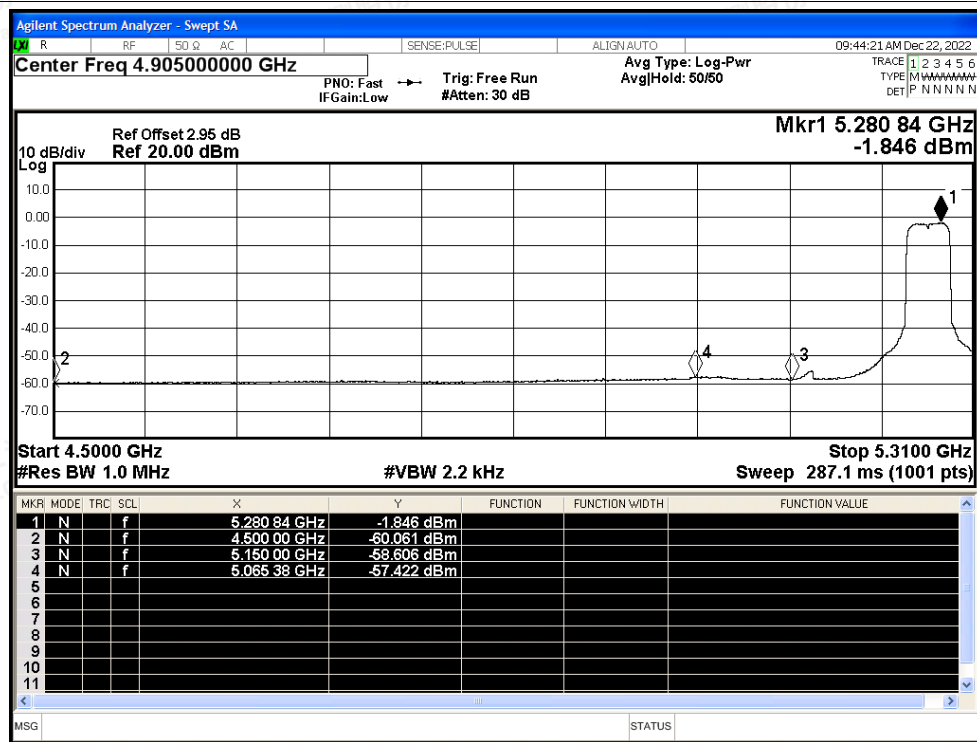




Restrict Band NVNT ac40 5310MHz Ant1 Peak

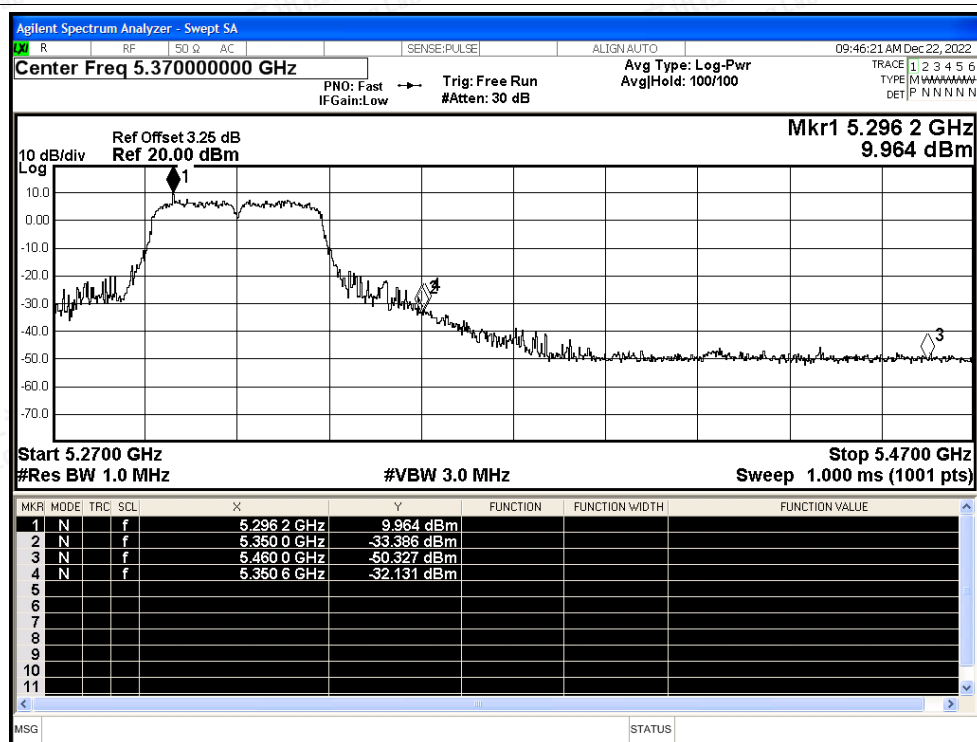


Restrict Band NVNT ac40 5310MHz Ant1 Average

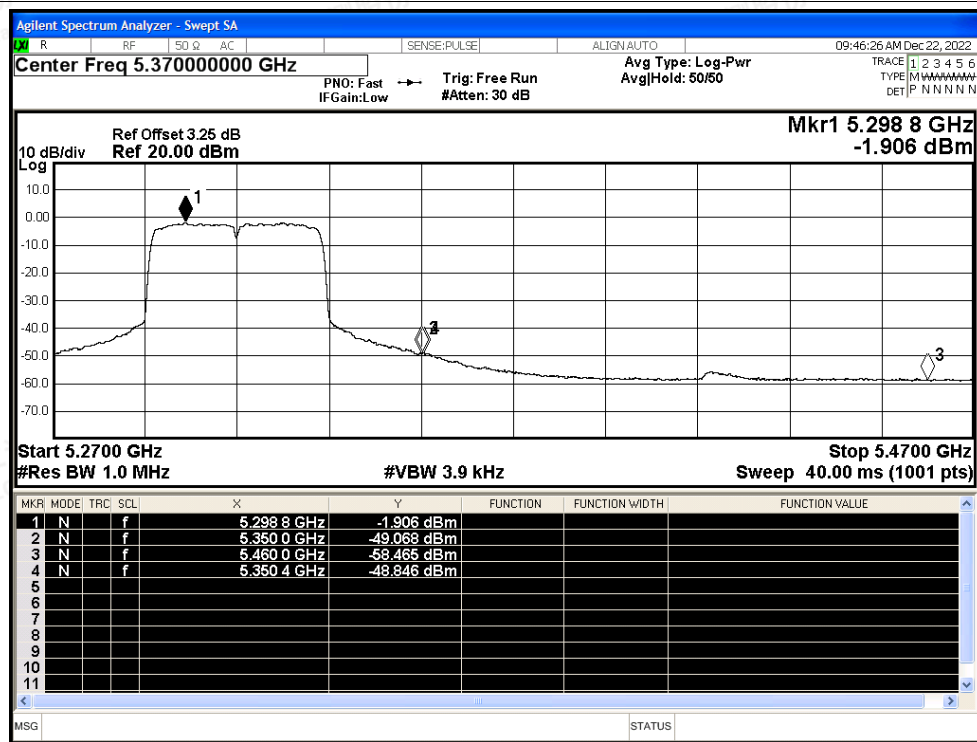




Restrict Band NVNT ac80 5290MHz Ant1 Peak

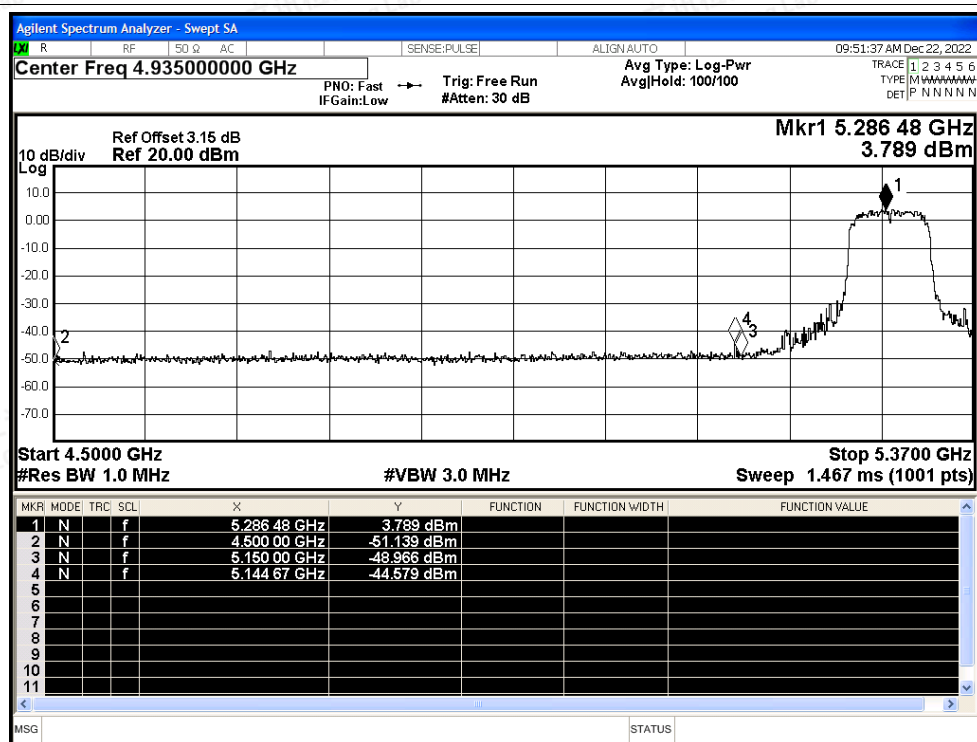


Restrict Band NVNT ac80 5290MHz Ant1 Average

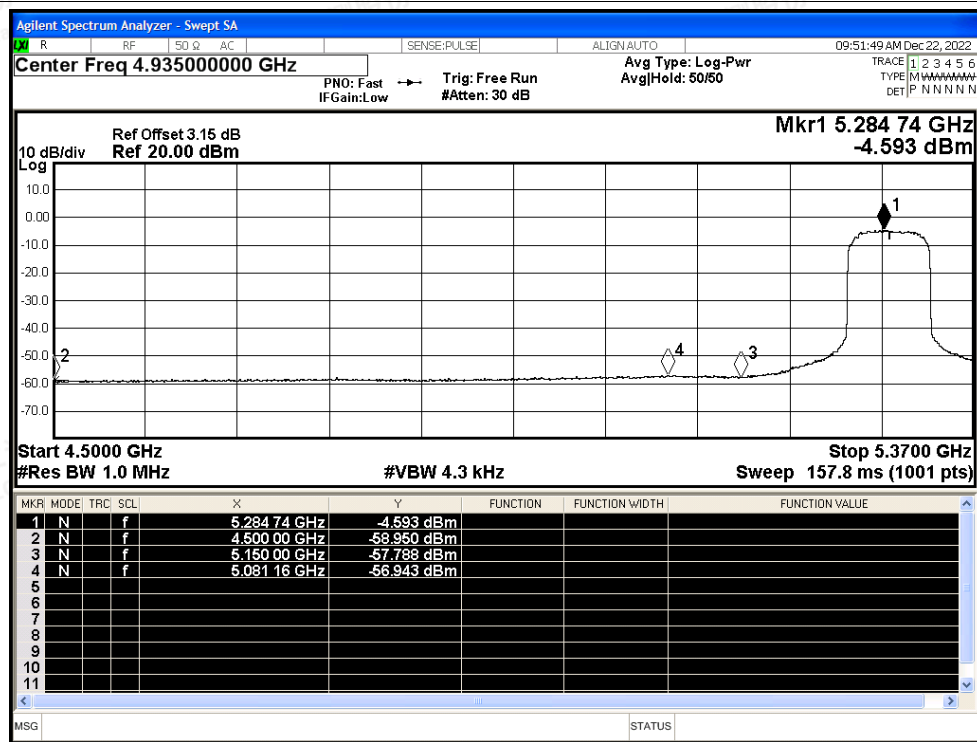




Restrict Band NVNT ac80 5290MHz Ant1 Peak

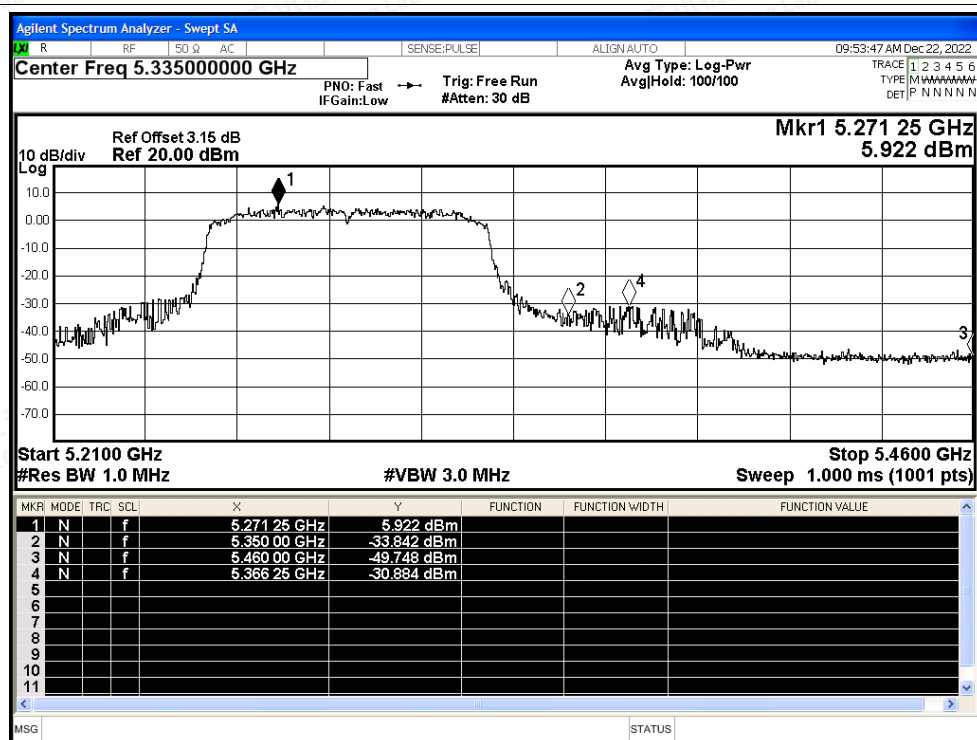

Restrict Band NVNT ac80 5290MHz Ant1 Average

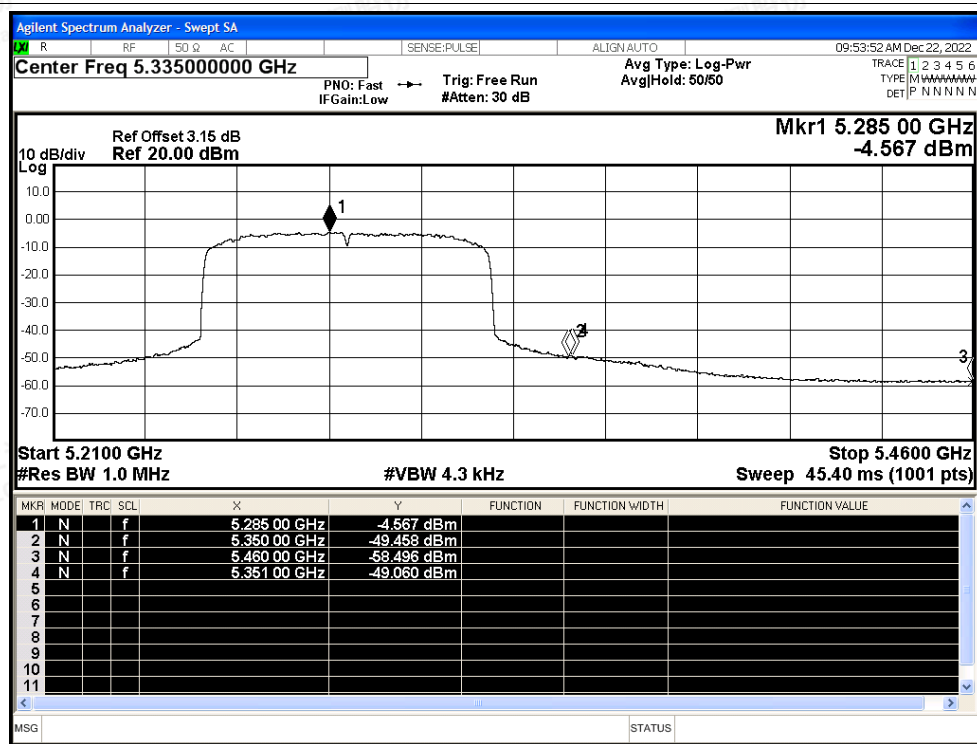

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5260	Ant1	5259.96	-40000	-7.6	25	Pass
NVNT	ac20	5300	Ant1	5299.96	-40000	-7.55	25	Pass
NVNT	ac20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	ac40	5270	Ant1	5269.96	-40000	-7.59	25	Pass
NVNT	ac40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac80	5290	Ant1	5290.08	80000	15.12	25	Pass






Test Graphs

Freq. Stability NVNT ac20 5260MHz Ant1

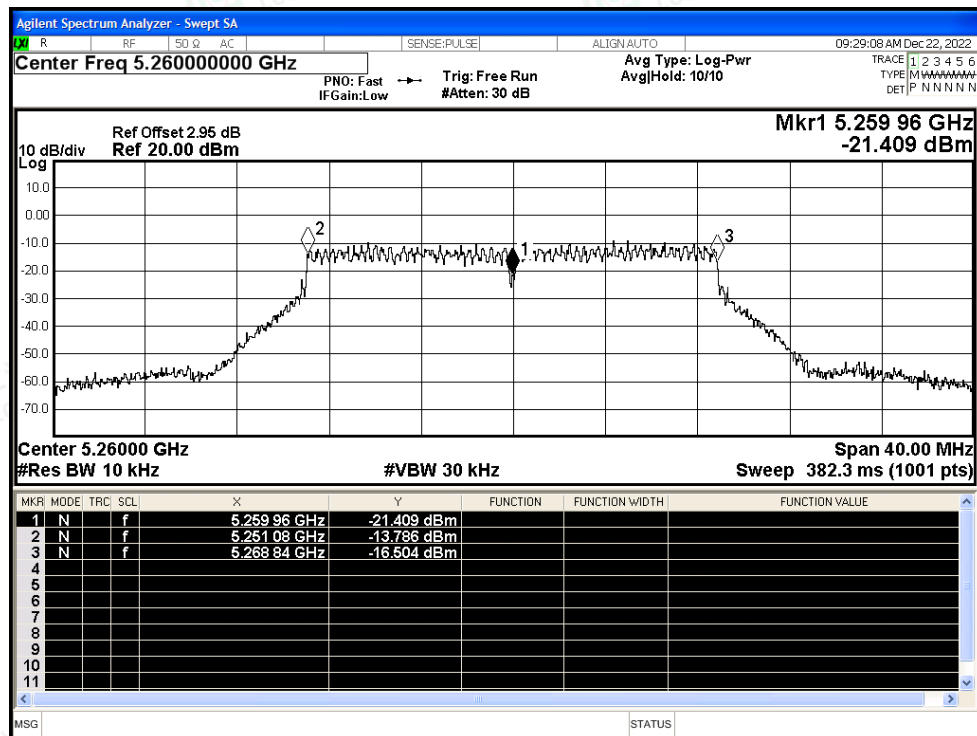


Freq. Stability NVNT ac20 5300MHz Ant1

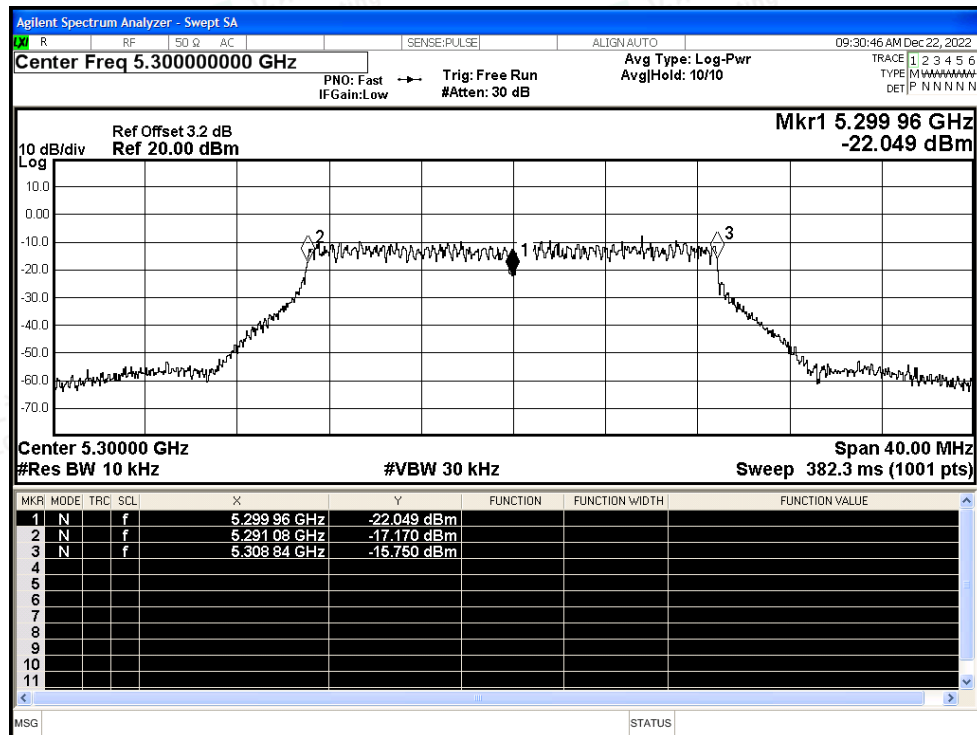




Freq. Stability NVNT ac20 5320MHz Ant1

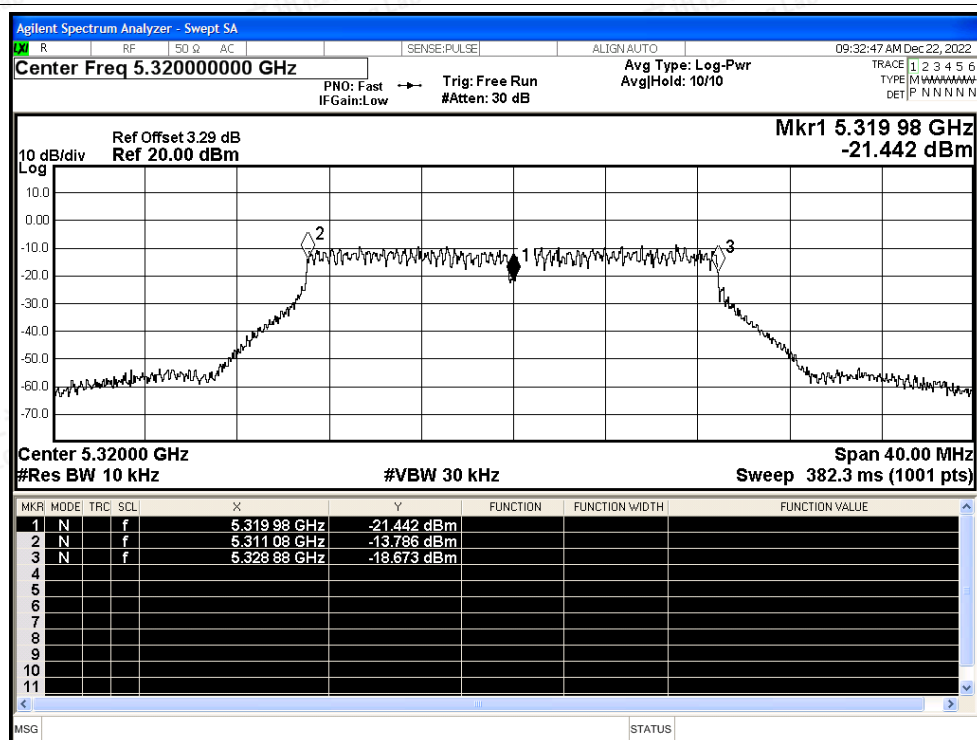

Freq. Stability NVNT ac40 5270MHz Ant1

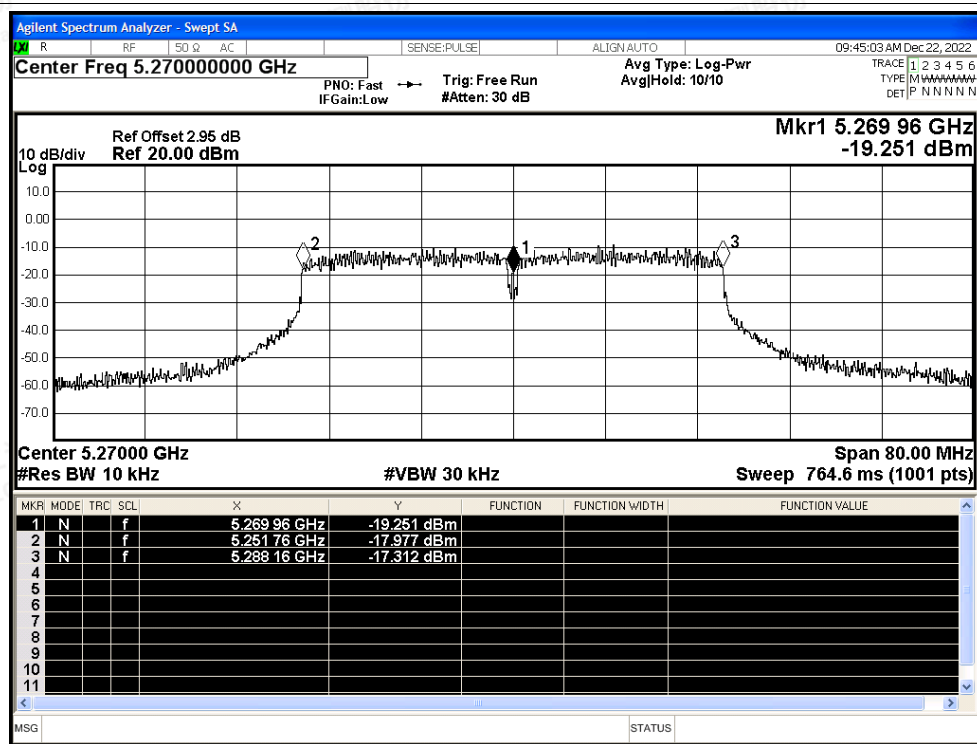

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Freq. Stability NVNT ac40 5310MHz Ant1

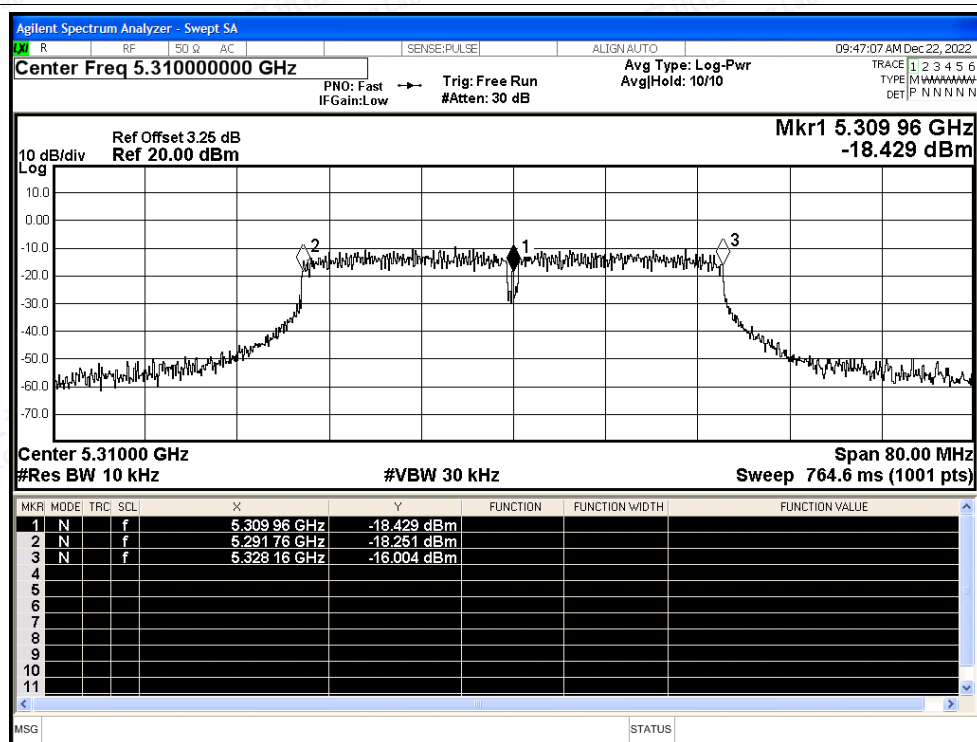

Freq. Stability NVNT ac80 5290MHz Ant1

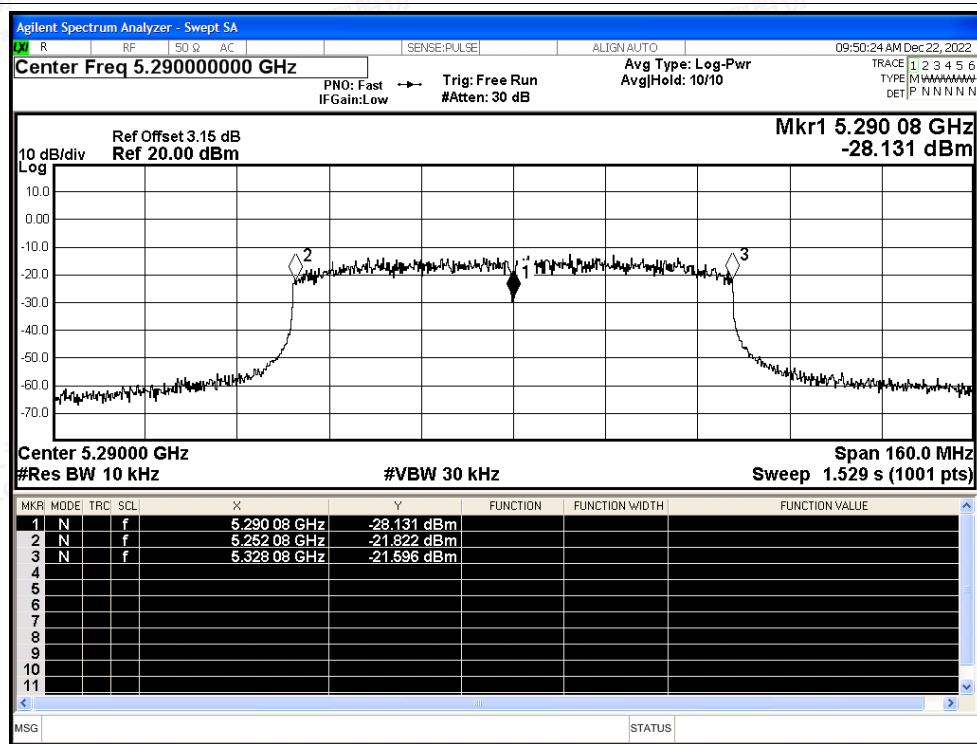



E.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	84.09	0.75	0.96
NVNT	a	5300	Ant1	84.01	0.76	0.96
NVNT	a	5320	Ant1	84.09	0.75	0.96
NVNT	n20	5260	Ant1	84.01	0.76	0.96
NVNT	n20	5300	Ant1	83.13	0.8	1.02
NVNT	n20	5320	Ant1	83.13	0.8	1.02
NVNT	n40	5270	Ant1	71.32	1.47	2.04
NVNT	n40	5310	Ant1	71.32	1.47	2.04
NVNT	ac20	5260	Ant1	83.13	0.8	1.02
NVNT	ac20	5300	Ant1	83.13	0.8	1.02
NVNT	ac20	5320	Ant1	83.15	0.8	1.02
NVNT	ac40	5270	Ant1	71.22	1.47	2.04
NVNT	ac40	5310	Ant1	57.82	2.38	3.7
NVNT	ac80	5290	Ant1	55.8	2.53	4






Test Graphs

Duty Cycle NVNT a 5260MHz Ant1

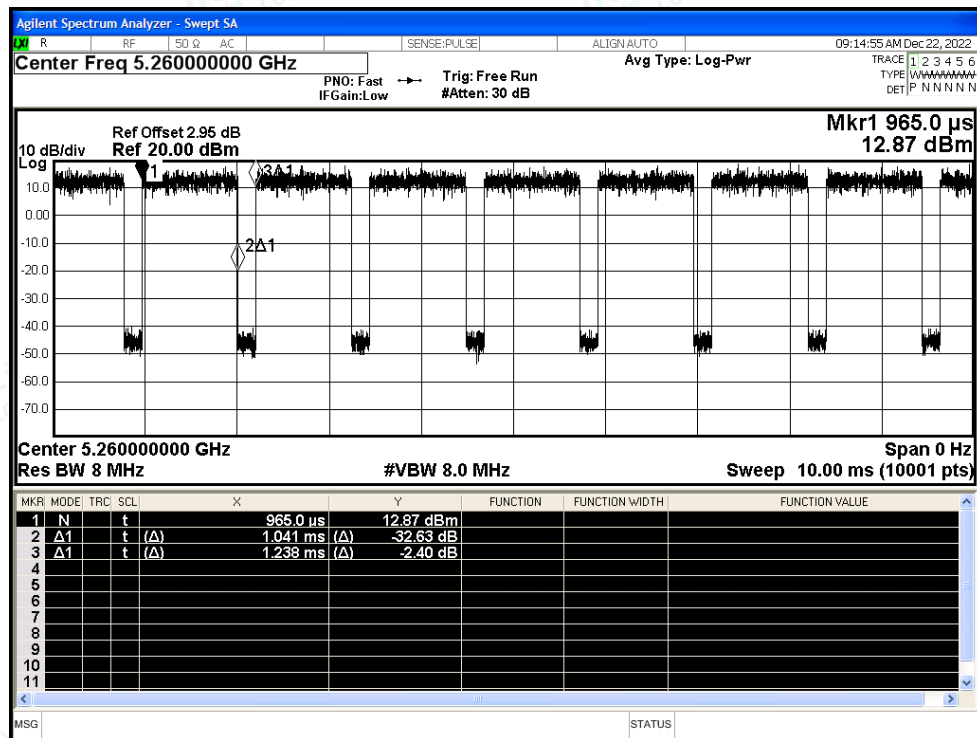


Duty Cycle NVNT a 5300MHz Ant1

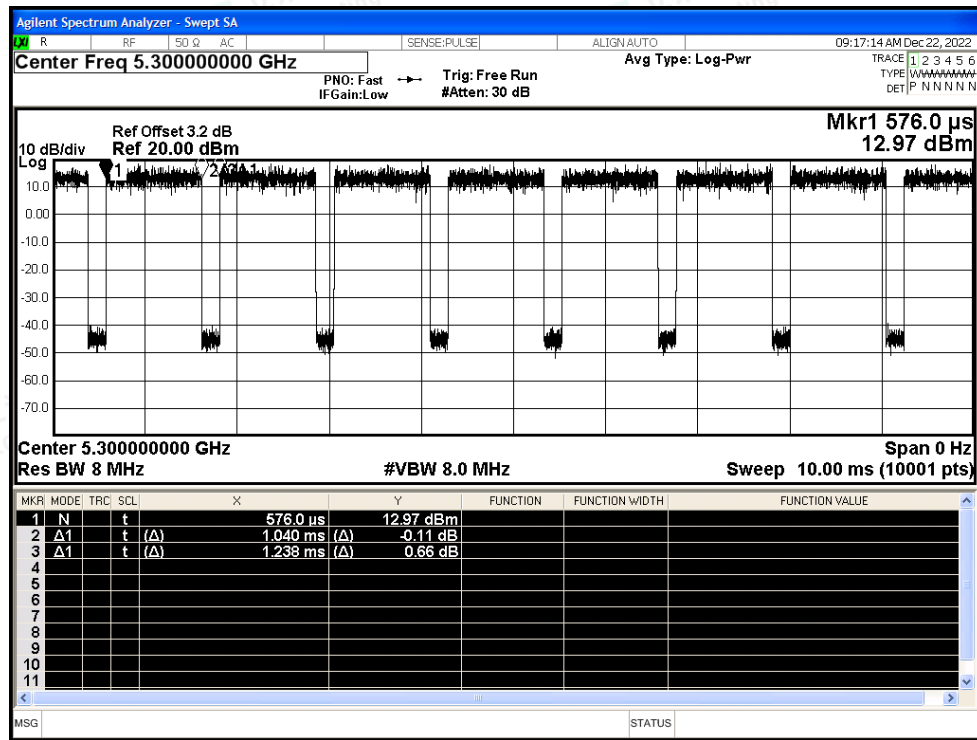




Duty Cycle NVNT a 5320MHz Ant1

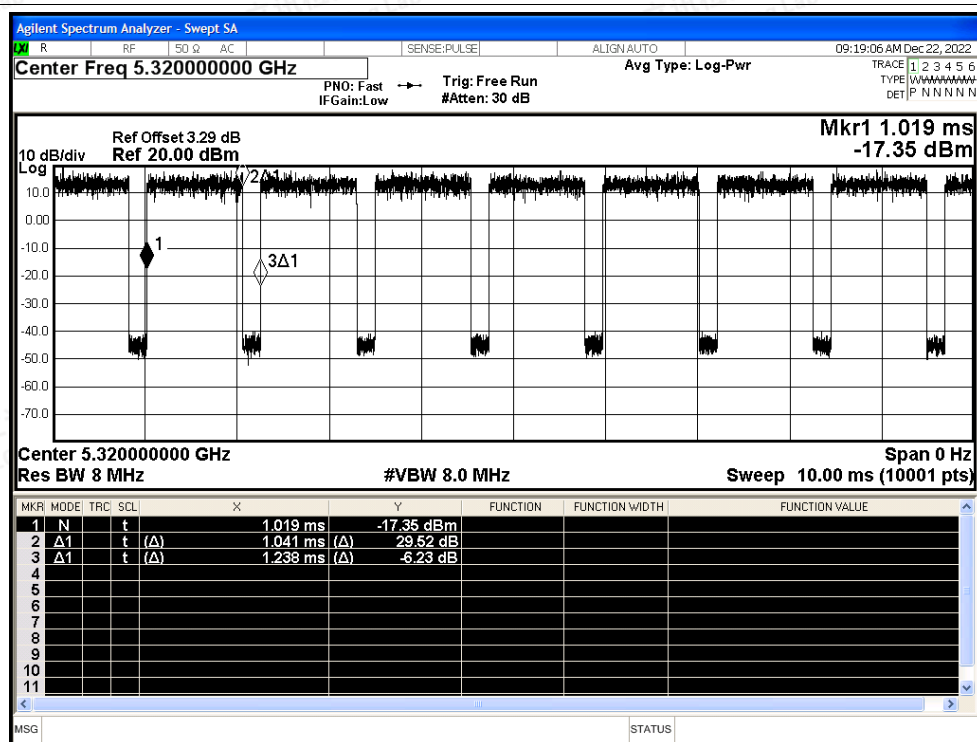

Duty Cycle NVNT n20 5260MHz Ant1

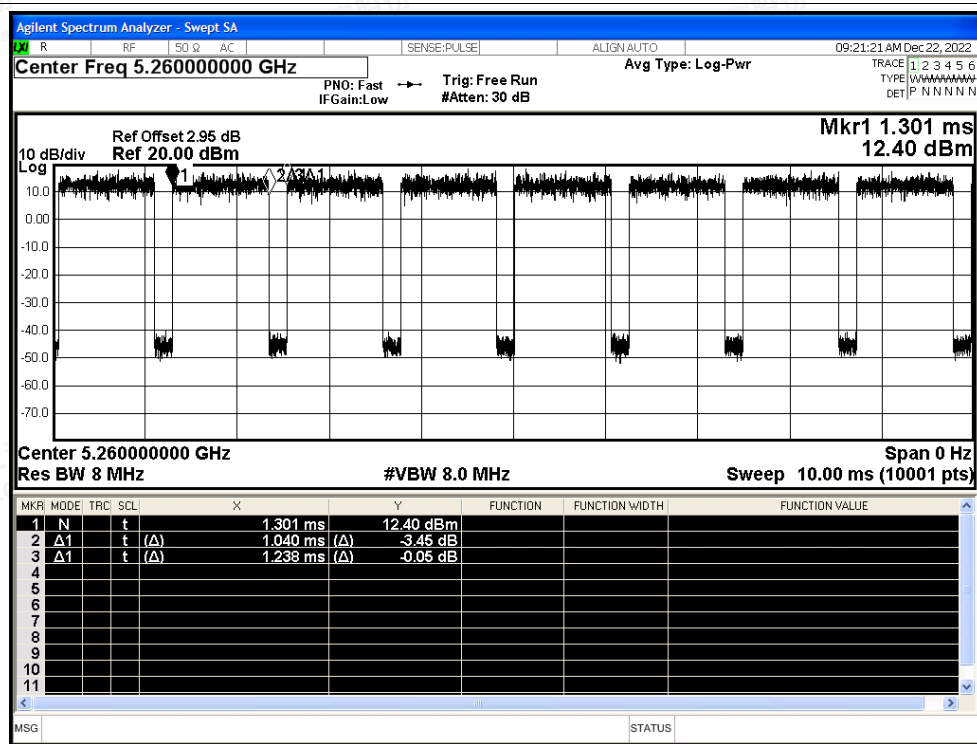

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT n20 5300MHz Ant1

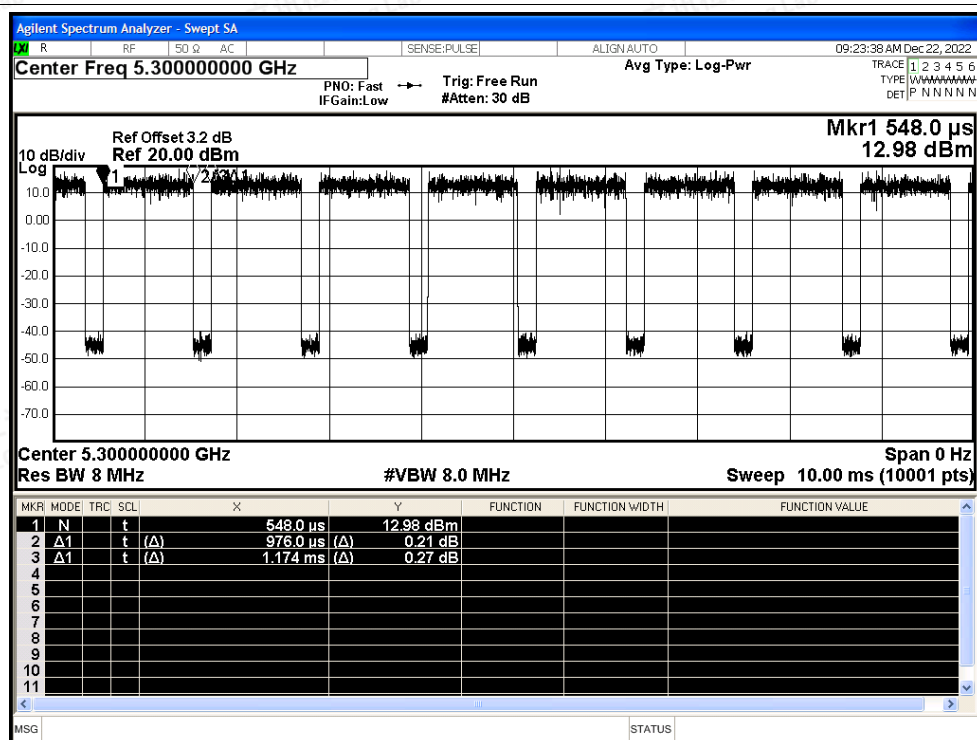


Duty Cycle NVNT n20 5320MHz Ant1

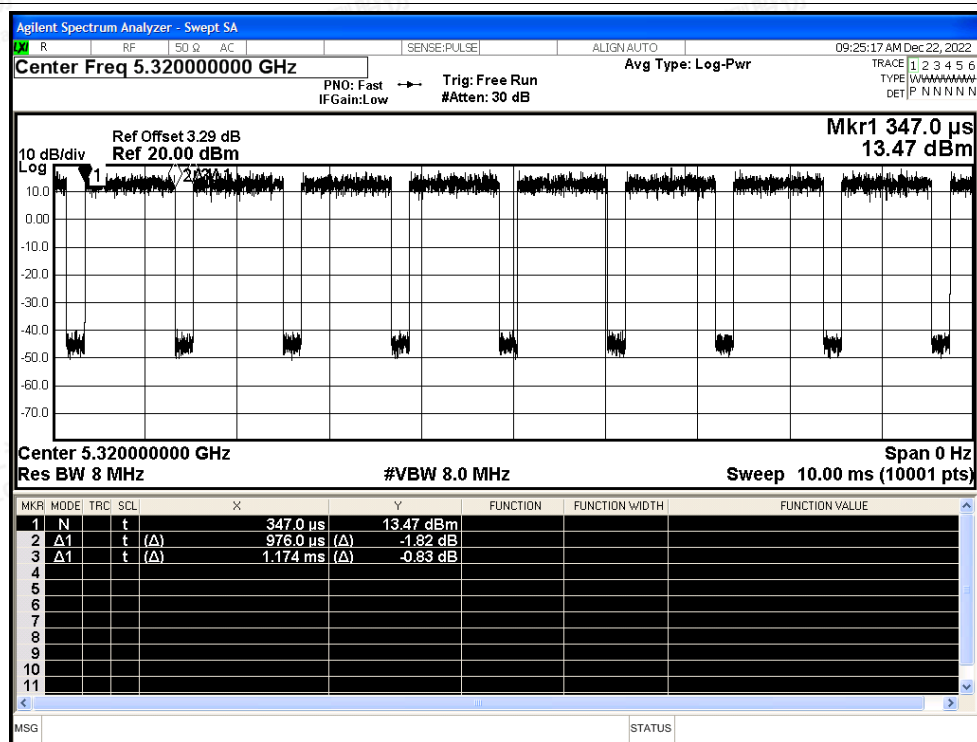




Duty Cycle NVNT n40 5270MHz Ant1

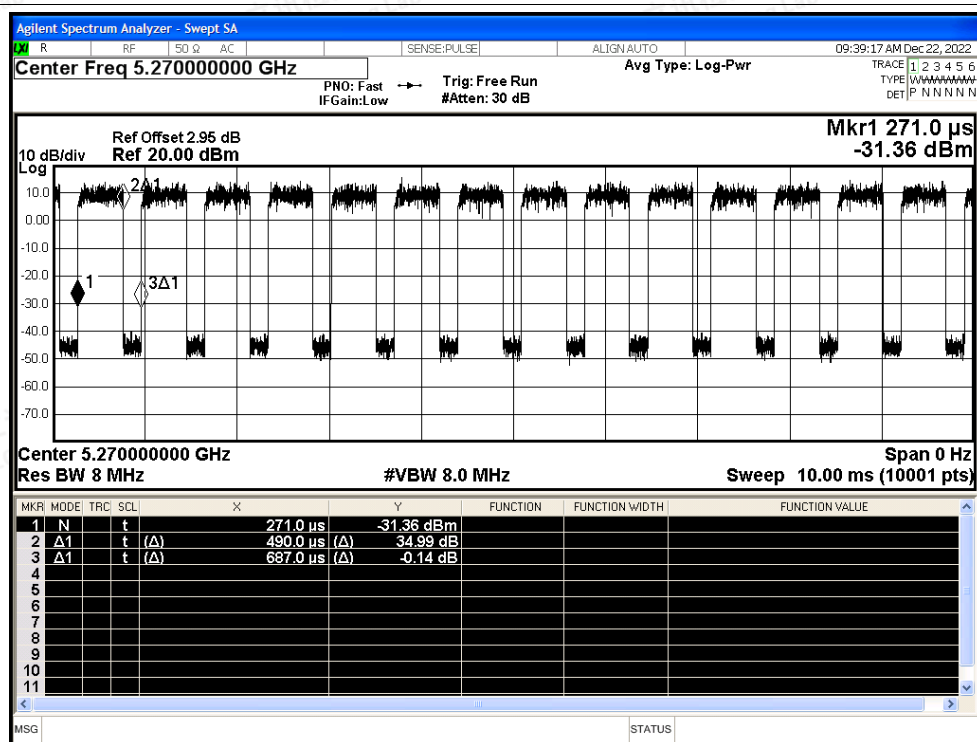


Duty Cycle NVNT n40 5310MHz Ant1

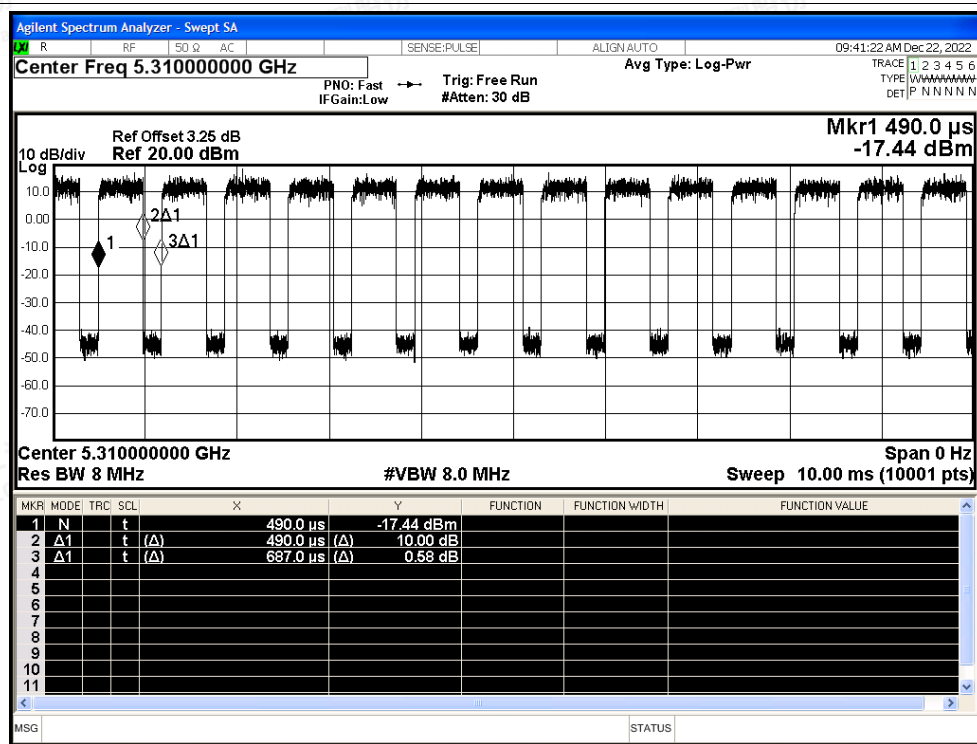




Duty Cycle NVNT ac20 5260MHz Ant1

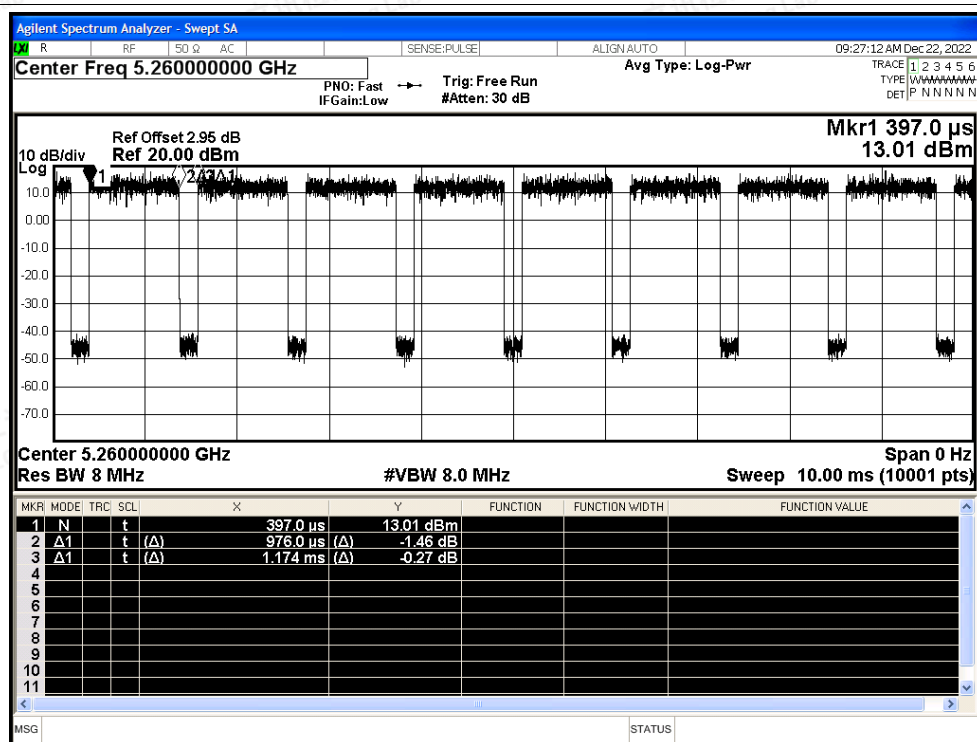


Duty Cycle NVNT ac20 5300MHz Ant1

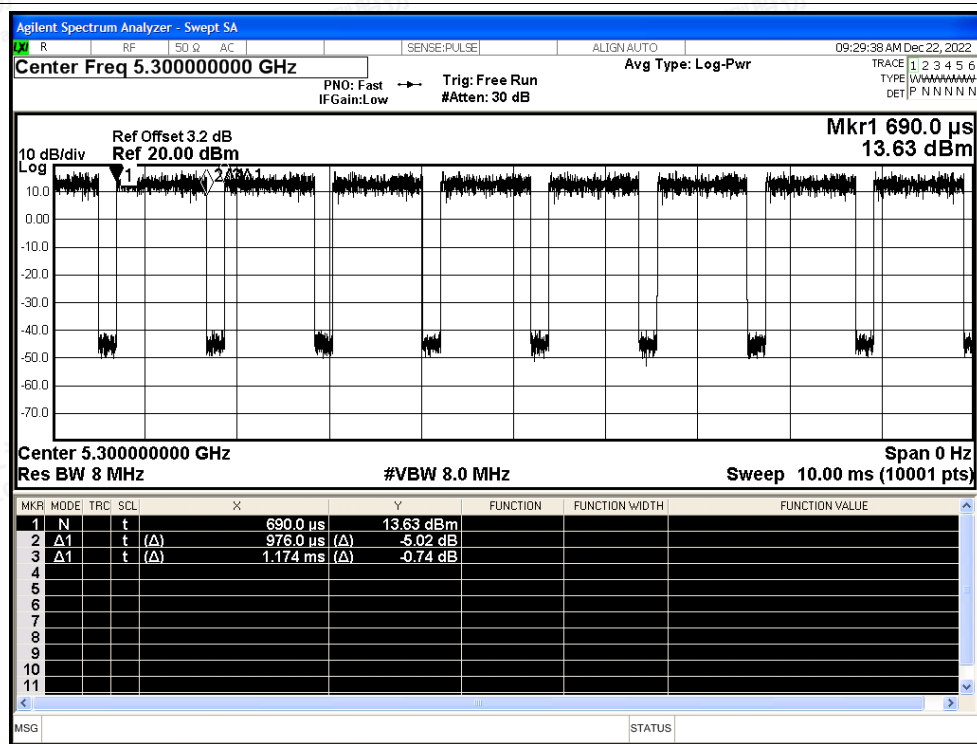




Duty Cycle NVNT ac20 5320MHz Ant1

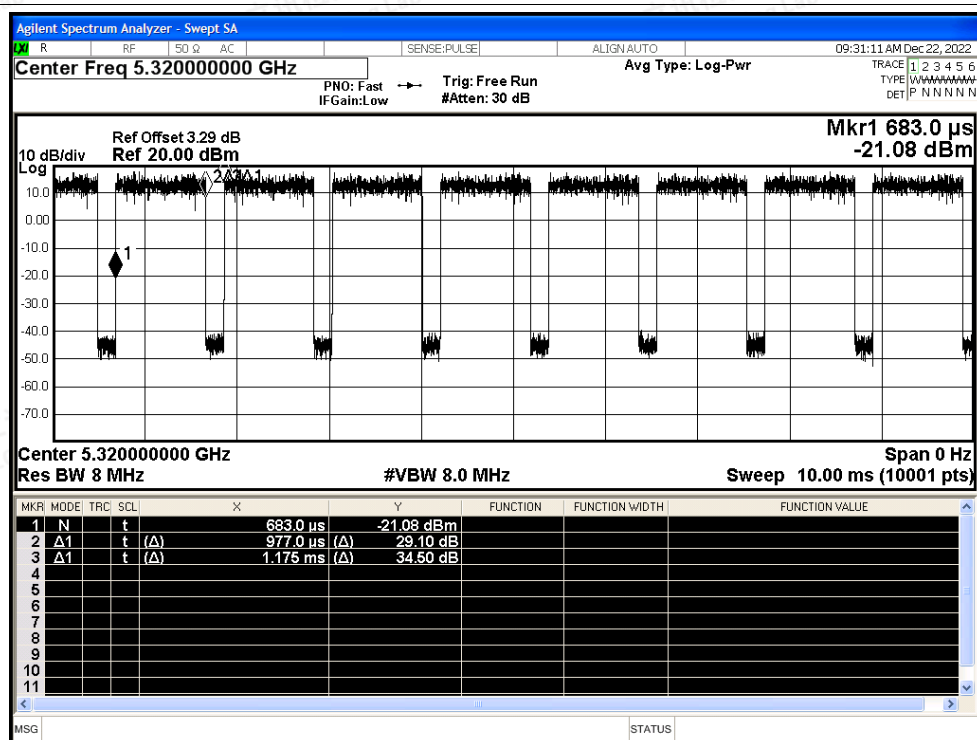


Duty Cycle NVNT ac40 5270MHz Ant1

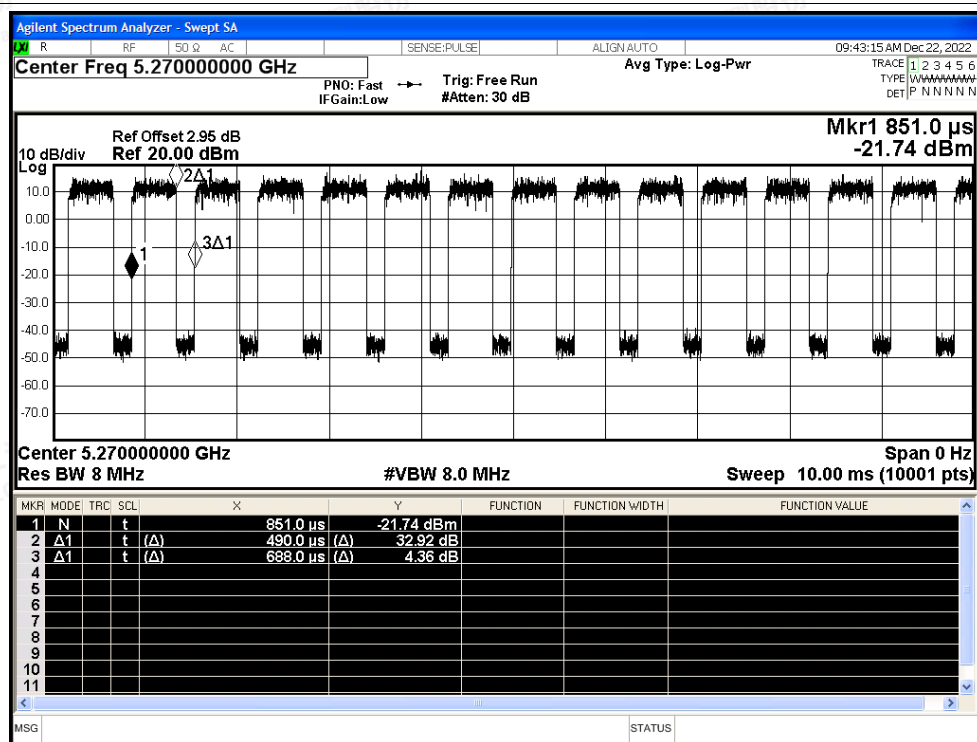



Duty Cycle NVNT ac40 5310MHz Ant1

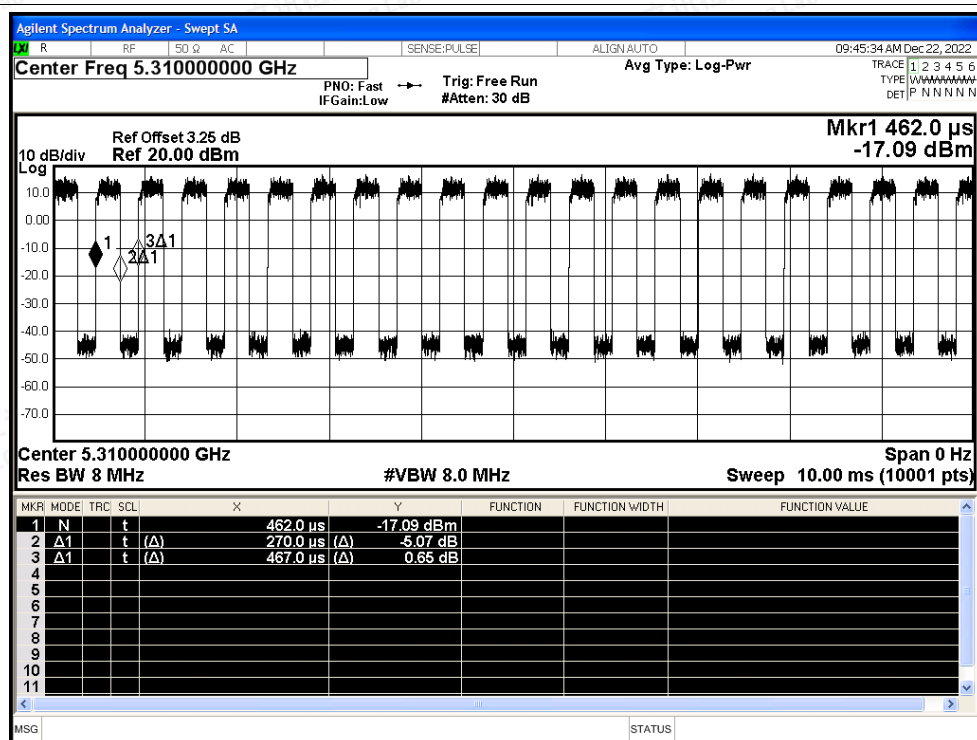

Duty Cycle NVNT ac80 5290MHz Ant1

