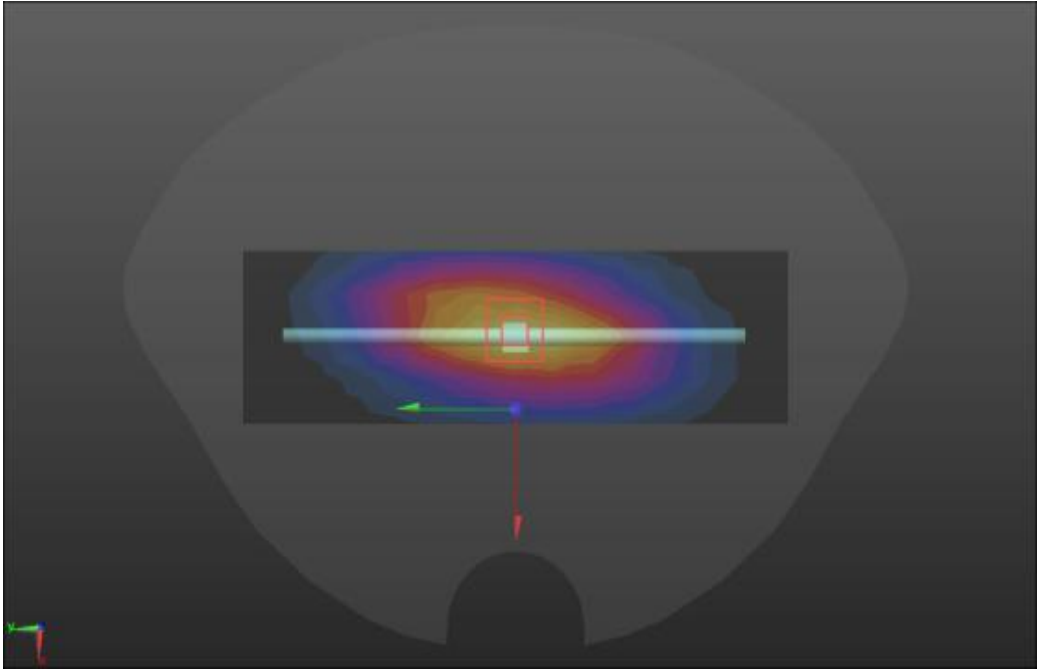
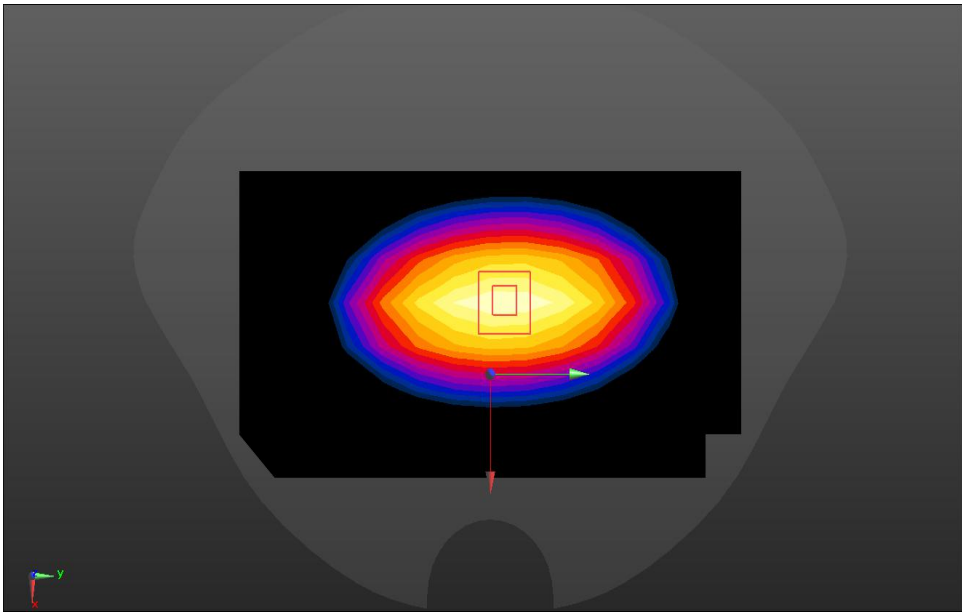


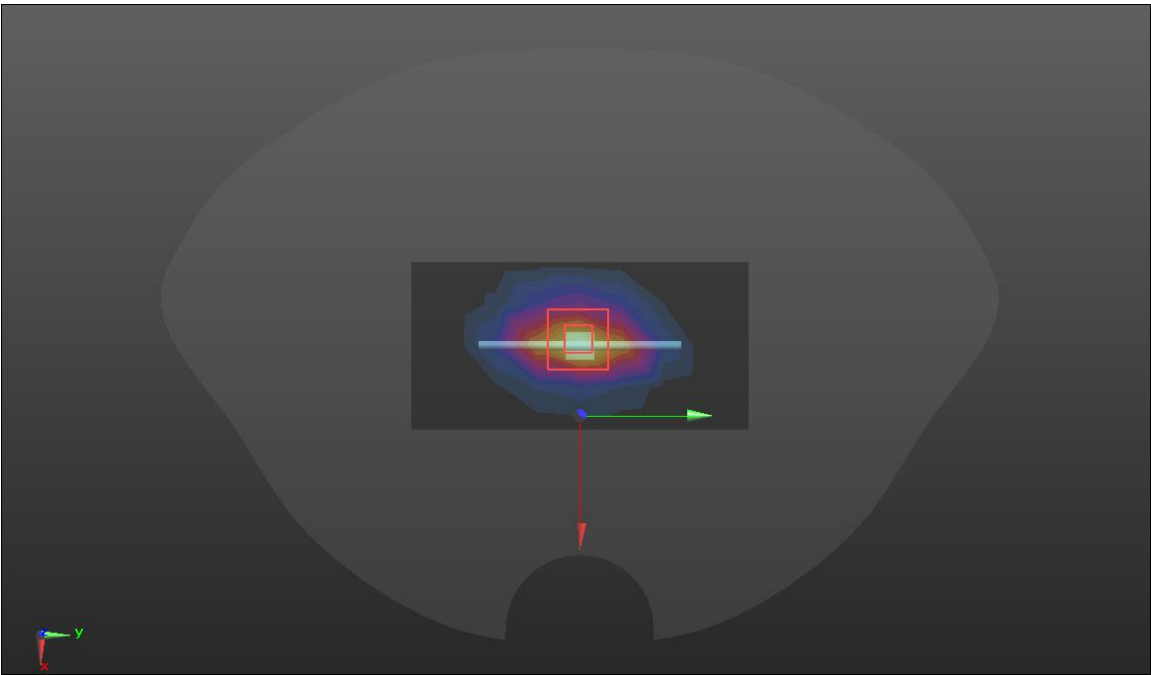
ANNEX A – TEST PLOTS

System check	750MHz(2021.07.27)
Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 40.77$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75) @ 750 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D750/Dipole 750MHz/Area Scan (5x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.51 W/kg D750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 55.69 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 2.87 W/kg SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.22 W/kg Maximum value of SAR (measured) = 2.53 W/kg 	

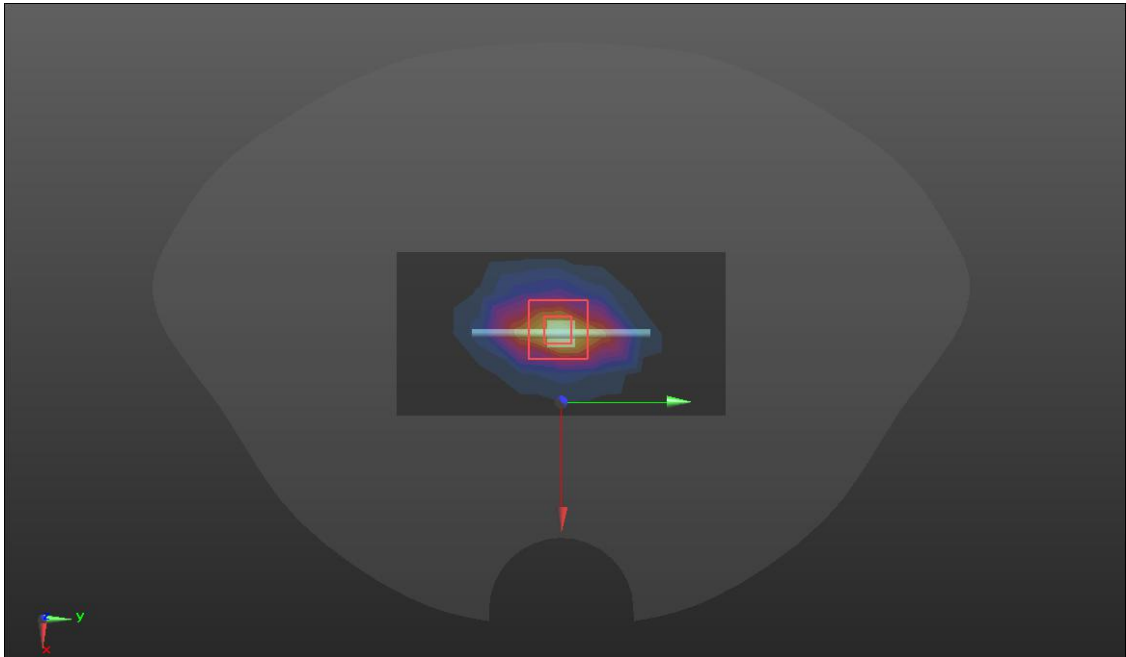
SRTC performed system check by using 250mw at antenna port

System check	835MHz(2021.08.10)
Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.48, 9.48, 9.48) @ 835 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.72 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.67 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 3.58 W/kg SAR(1 g) = 2.26 W/kg; SAR(10 g) = 1.51 W/kg Maximum value of SAR (measured) = 2.75 W/kg	
	

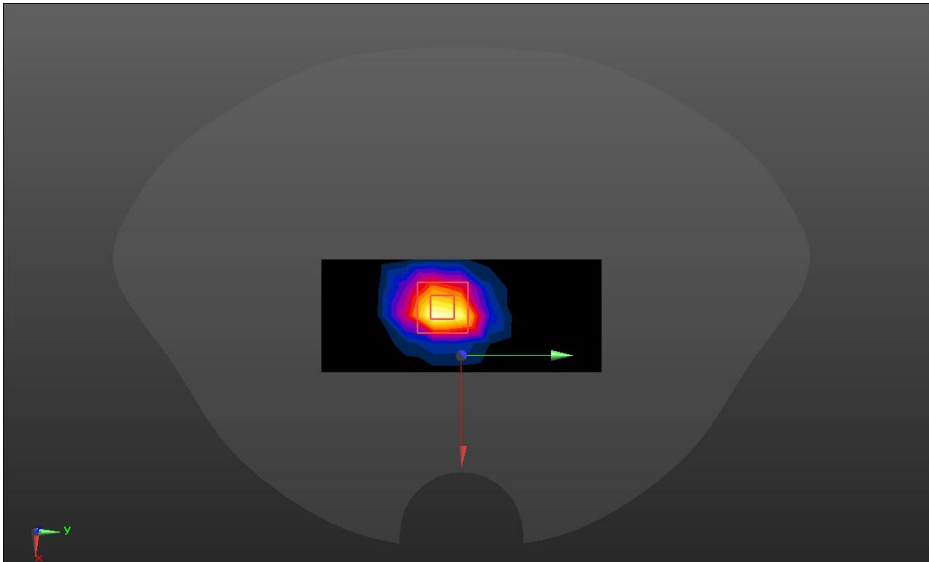
SRTC performed system check by using 250mw at antenna port

System check	1800MHz(2021.08.16)
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 38.37$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27) @ 1800 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D1800/Dipole 1800MHz/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 15.3 W/kg D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 107.8 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 9.66 W/kg; SAR(10 g) = 5.21 W/kg Maximum value of SAR (measured) = 15.6 W/kg 	

SRTC performed system check by using 250mw at antenna port

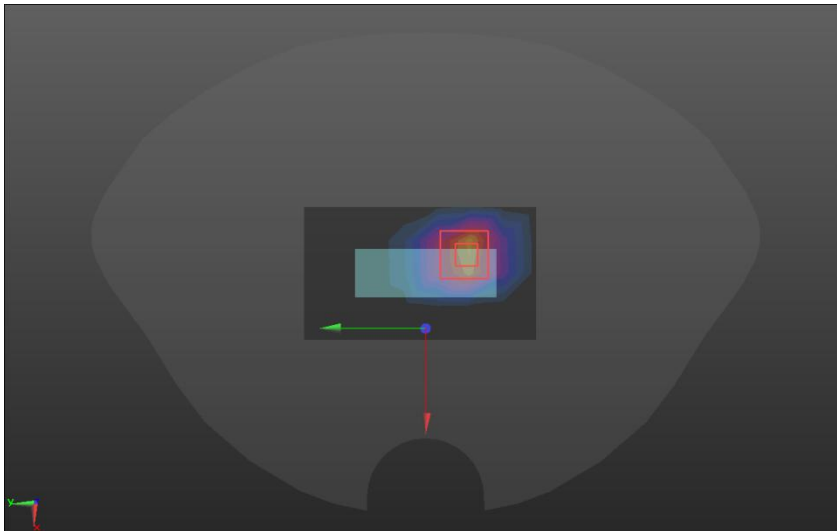
System check	2000MHz(2021.08.20)
Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 39.65$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.94, 7.94, 7.94) @ 2000 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2000/Dipole 2000MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 15.2 W/kg D2000/Dipole 2000MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.6 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 18.9 W/kg SAR(1 g) = 10.23 W/kg; SAR(10 g) = 5.16W/kg Maximum value of SAR (measured) = 15.5 W/kg 	

SRTC performed system check by using 250mw at antenna port

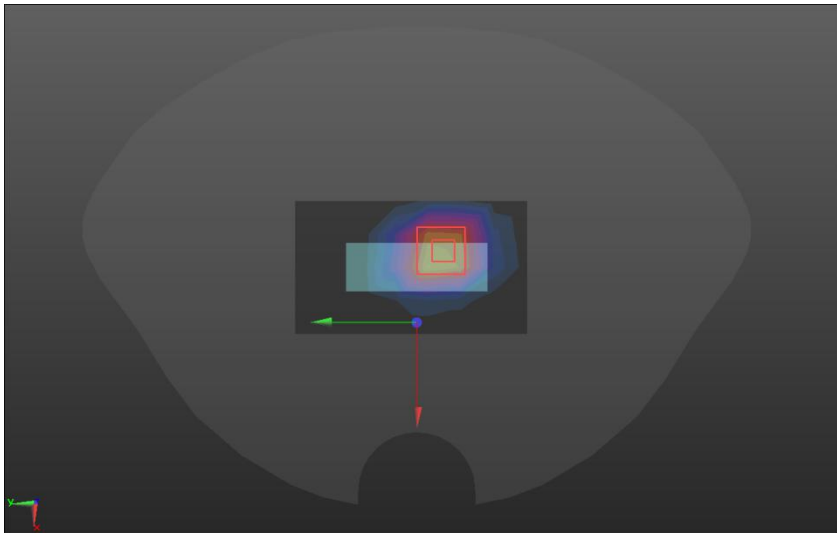
System check	2600MHz(2021.09.12)
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) SYSTEM CHECK 2600/Area Scan (5x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 22.7 W/kg SYSTEM CHECK 2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.2 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 33.7 W/kg SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.49 W/kg Maximum value of SAR (measured) = 26.6 W/kg 	

SRTC performed system check by using 250mw at antenna port

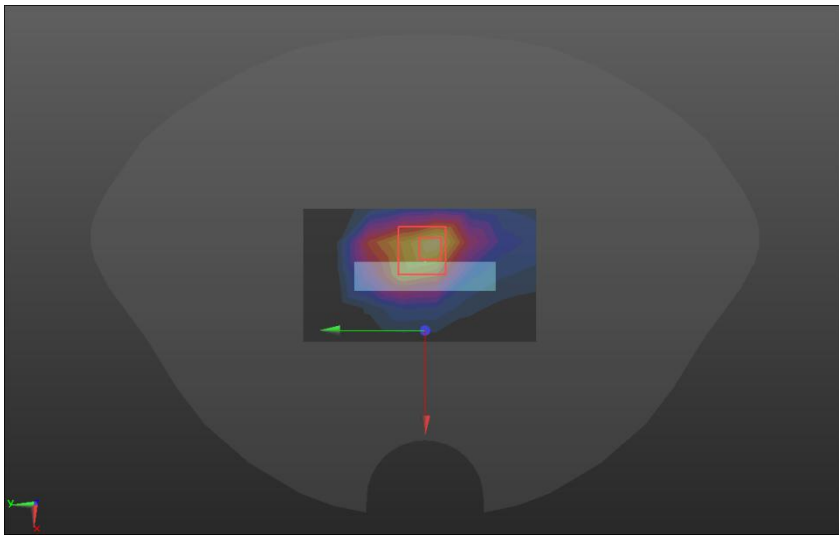
WCDMA Band II

Body	Back(2021.08.20)
Communication System: UID 0, wcdma BANDII (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.94, 7.94, 7.94) @ 1880 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back FCC 5MM/WCDMA B2 /Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.817 W/kg Back FCC 5MM/WCDMA B2 /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 16.22 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 1.62 W/kg SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.462 W/kg Maximum value of SAR (measured) = 1.16 W/kg	
	

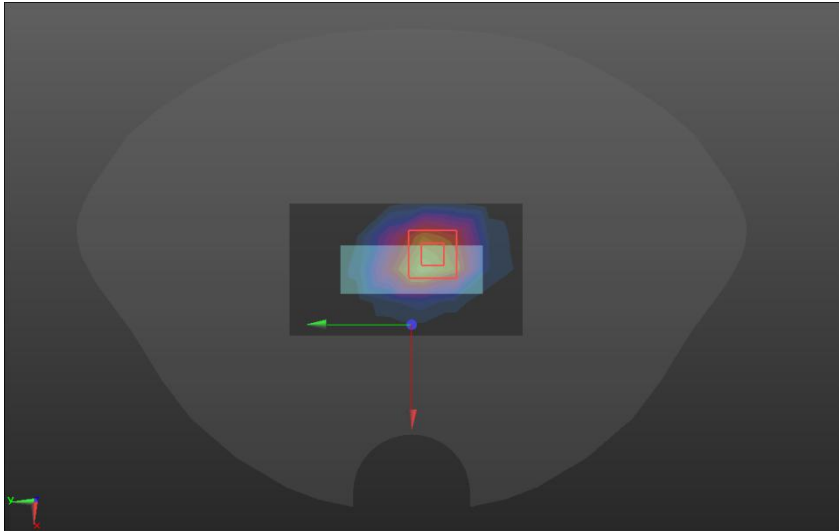
WCDMA Band IV

Body	Back(2021.08.16)
Communication System: UID 0, wcdma bandIV (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27) @ 1732.4 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back FCC 5MM/WCDMA B4 2 2/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.880 W/kg Back FCC 5MM/WCDMA B4 2 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 23.51 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 1.61 W/kg SAR(1 g) = 0.961 W/kg; SAR(10 g) = 0.521 W/kg Maximum value of SAR (measured) = 1.18 W/kg	
	

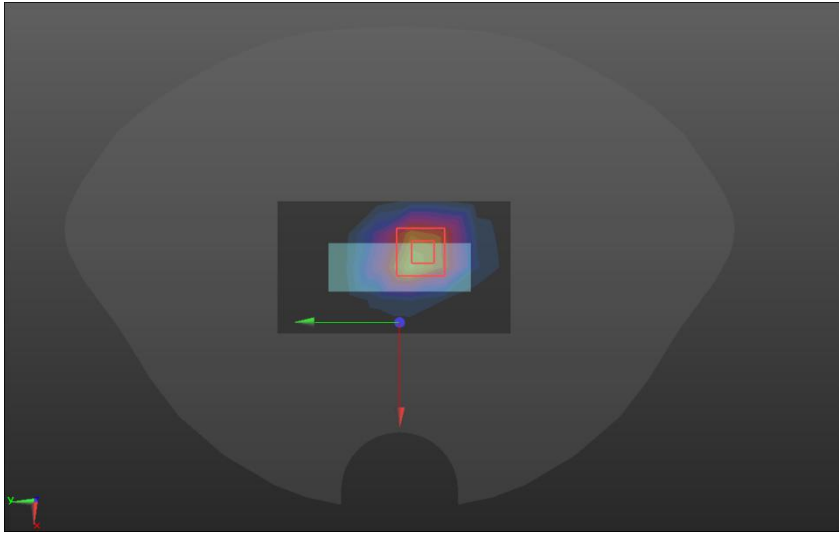
WCDMA Band V

Body	Bottom(2021.08.10)
Communication System: UID 0, WCDMA BAND 5 (0); Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.48, 9.48, 9.48); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Bottom FCC 5MM/WCDMA B5/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.811 W/kg Bottom FCC 5MM/WCDMA B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 26.22 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 1.35 W/kg SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.397 W/kg Maximum value of SAR (measured) = 0.852 W/kg	
	

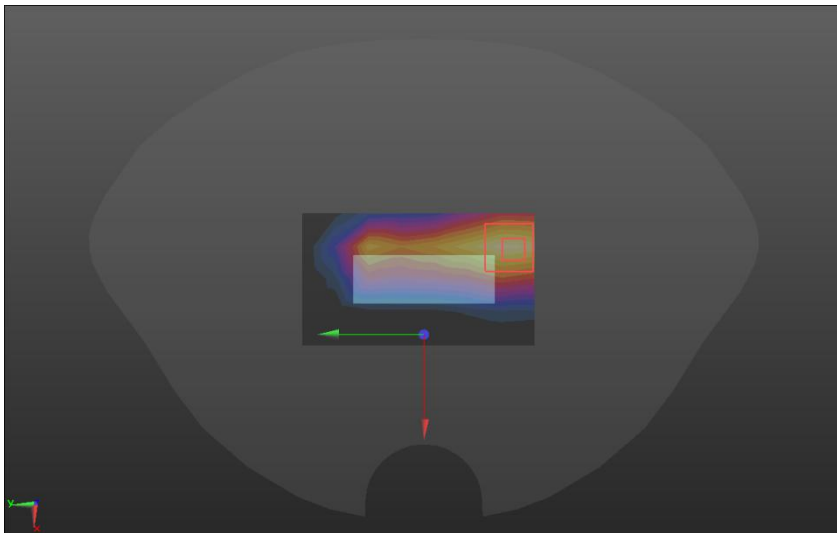
LTE Band2

Body	Back(2021.08.20)
Communication System: UID 0, LTE BAND02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.94, 7.94, 7.94) @ 1880 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back FCC 5MM/LTE B2 2/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.04 W/kg Back FCC 5MM/LTE B2 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 26.21 V/m; Power Drift = -0.21 dB Peak SAR (extrapolated) = 1.60 W/kg SAR(1 g) = 0.966 W/kg; SAR(10 g) = 0.527 W/kg Maximum value of SAR (measured) = 1.18 W/kg	
	

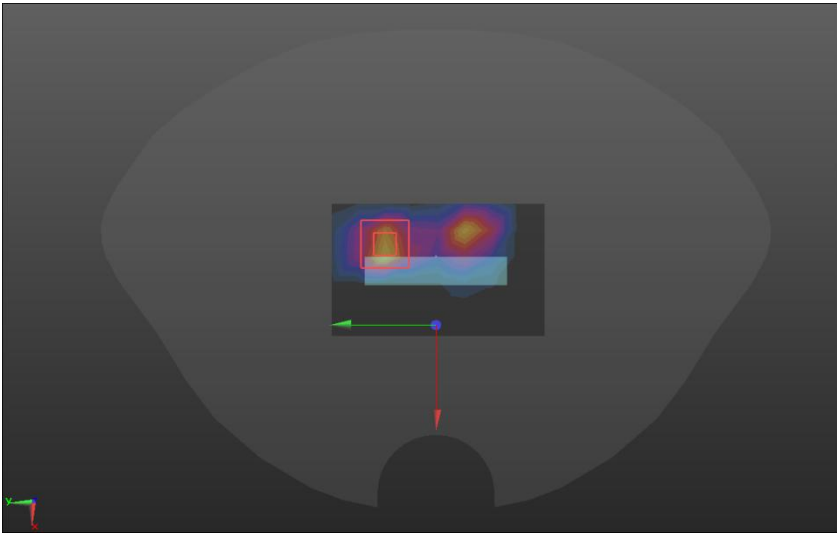
LTE Band4

Body	Back(2021.08.16)
Communication System: UID 0, LTE BAND4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27) @ 1732.5 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back FCC 5MM/LTE B4 2/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.948 W/kg Back FCC 5MM/LTE B4 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 24.85 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 1.57 W/kg SAR(1 g) = 0.936 W/kg; SAR(10 g) = 0.510 W/kg Maximum value of SAR (measured) = 1.14 W/kg 	

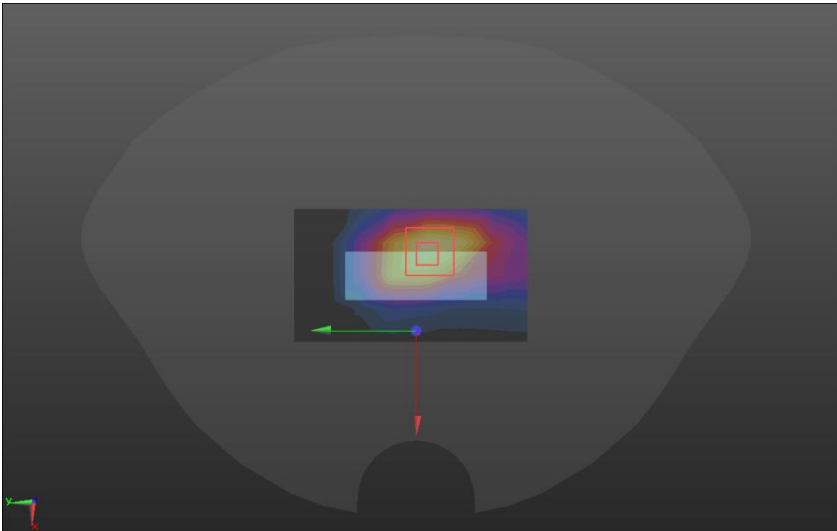
LTE Band5

Body	Front (2021.08.10)
Communication System: UID 0, LTE Band 5 (0); Communication System Band: 20525; Frequency: 836.5 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.48, 9.48, 9.48); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Front FCC 5MM/LTE B5/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.659 W/kg Front FCC 5MM/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 19.60 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.871 W/kg SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.375 W/kg Maximum value of SAR (measured) = 0.774 W/kg	
	

LTE Band7

Body	Bottom (2021.09.12)
Communication System: UID 0, LTE Band 7 (0); Communication System Band: band 7; Frequency: 2535 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Bottom FCC 5MM/LTE B7/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.875 W/kg Bottom FCC 5MM/LTE B7/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.60 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 1.78 W/kg SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.422 W/kg Maximum value of SAR (measured) = 1.06 W/kg 	

LTE Band12

Body	Back(2021.07.27)
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.115$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75) ;Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Back FCC 5MM/LTE B12/Area Scan (5x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.510 W/kg Back FCC 5MM/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 22.84 V/m; Power Drift = -0.06dB Peak SAR (extrapolated) = 0.744 W/kg SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.555 W/kg Maximum value of SAR (measured) = 1.525 W/kg	
	

LTE Band17

Body	Back(2021.07.27)
Communication System: UID 0, LTE BAND17 (0); Frequency: 710 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 710 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.102$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75) @ 710 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back FCC 5MM/LTE B17/Area Scan (5x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.382 W/kg Back FCC 5MM/LTE B17/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 20.50 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.633 W/kg SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.217 W/kg Maximum value of SAR (measured) = 0.445 W/kg 