


6 Reader user manual

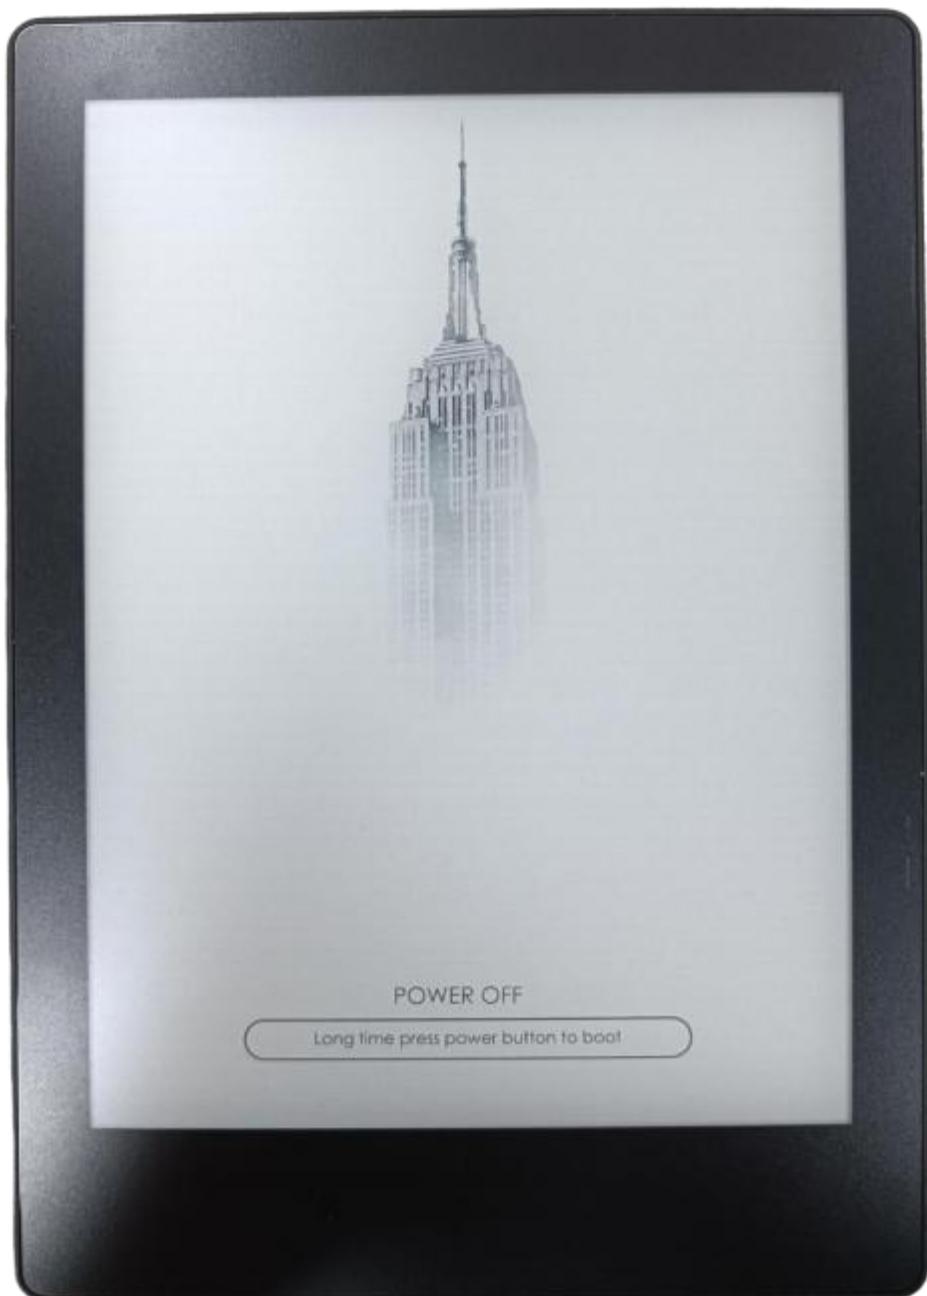

	catalogue
1 . Product diagram.....	4
2 . Main interface introduction.....	9
3 .reader.....	10
3. 1. Read the shortcut menu.....	13
3. 2. Catalogue.....	17
3. 3. A bookmark.....	18
3. 4. tagging.....	18
4. Application.....	21
. 1. 4 Application market.....	23
4.2. Browser.....	24
4.3. File Manager.....	24
5. Set.....	27
5. 1. network.....	28
.1.1.5 WiFi.....	28
5. 2. General practice.....	29
5. 3. Account.....	30
5.3.1. Registration.....	30
5.3.2. The landing.....	31
.3.3.5 Modify the password.....	32
5. 4. Battery.....	33
5. 5. Upgrade.....	34
5. 6. Safety.....	35
5. 7. About the.....	36
.7.1.5 feedback.....	36
.7.2.5 Personalization settings.....	37
6 .size of product.....	39
7. Accessories.....	40
8. Safety guidelines.....	40
9. Warranty terms.....	
9.1., Scope of warranty.....	
9.2. Non-warranty scope.....	
.....	


10 .frequently asked questions.....	41
10.1., How to switch on and off the machine.....	41
10.2. How to charge it.....	41
10.3. How to transfer the data.....	41
10.4. How to upgrade the system.....	42
10.5. How to sync notes and books to cloud storage.....	42
10.6. How to protect the equipment.....	42
11. statement.....	42

1 . Product diagram

front




side

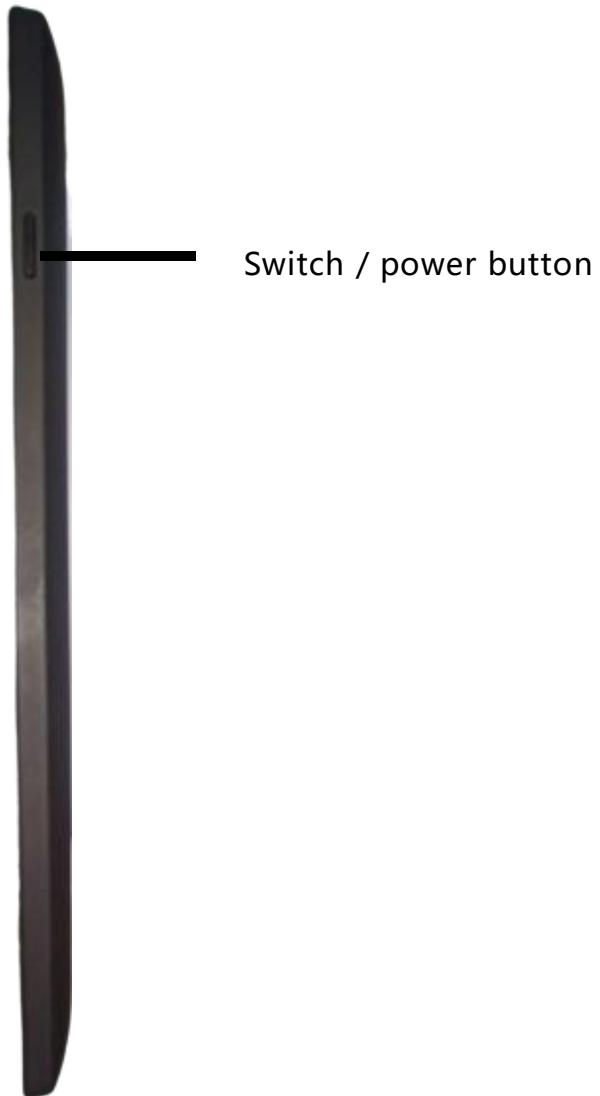

the back



bottom

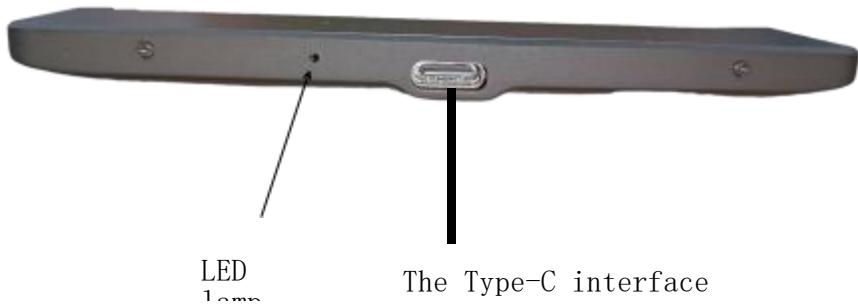

Introduction of the key function

Power switch / sleep wake -up	<p>1 . Press the power button to start the device</p> <p>2 . Press the power key and hold it for 3-4 seconds to turn off the device. Select the "Shutdown" function in the menu</p> <p>3 . Press the power button and then immediately release, and the device goes to hibernation</p> <p>4 . Press the power button and immediately release to awaken the sleep state</p>
Type - C joggle	<p>Connect the SID Note to the PC via the Type-C data line, or</p> <p>Charge the device</p>
LED lamp	Power supply charging indicator light

2 . Main interface introduction

The bottom end of the home page displays the current basic status of the device, including: WiFi connection status, bluetooth, power quantity and charging state show.

Below the status information is the function column, including: reading, application, and Settings. Click the device status information to enter the system Settings interface, and click the account number to enter the account management interface.



3 .reader

Main
interface
click



Can display the book list, and the
book management menu bar.



search

Local search for books, keyword support title, author, label, bookmark

mark two lines in front of the pages; online search for books, keyword,



support title, author;


New bookshelf



After building a new bookshelf, you can move other book documents to the
bookshelf;

Icon / list switch

Click the icon to switch the icon or list display mode

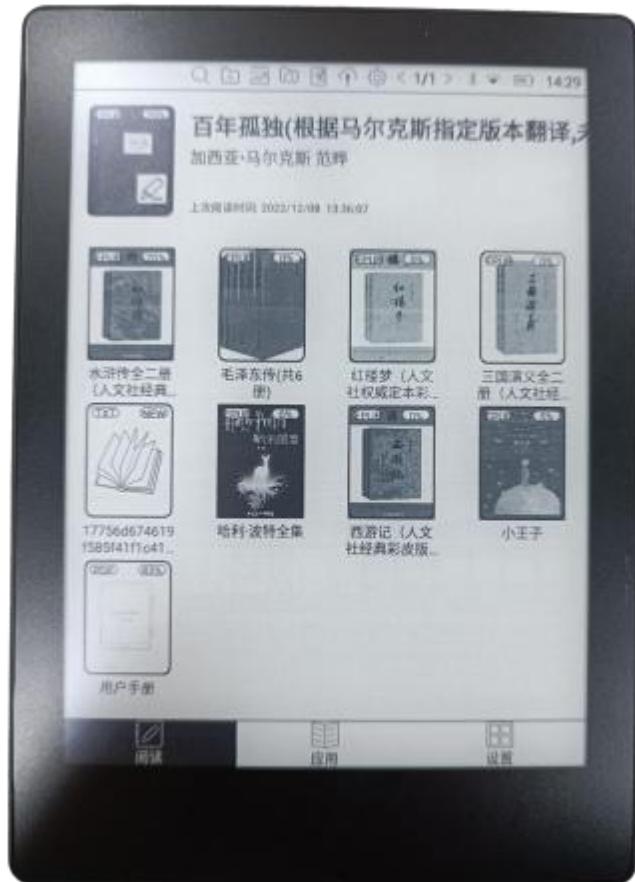

Scan the document

Click to scan all documents in the internal storage and display in the default shelf; formats supported: PDF, TXT, EPU B, MOBI, RTF, FB 2, DOC, HTM L, etc.



W i F i Pass on the book

Mobile phone or computer and SID Note machine or computer transfer book documents to the SID

When connected to the same LAN, you can Note through wifi and will be added to the default shelf.





Cloud synchronization


(Need to log in the account) Books and notes can be synchronized into the cloud storage. Every time you log in the account, the books and notes will be automatically synchronized to the device from the cloud storage.

set up


Here you can set up to open / close books and notes automatically synchronized to SID Note cloud server, export to third-party cloud disk account management, backup and recovery, etc.



Long press the shelf to rename, move, and delete the shelf:

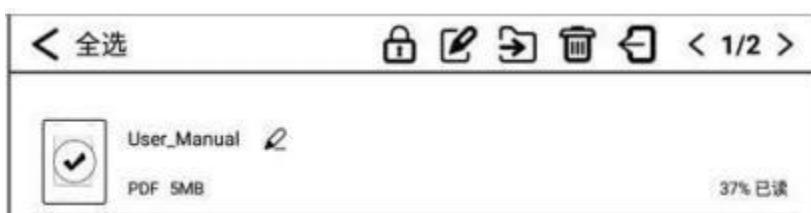


Long press the book to select to lock / unlock, rename, move, and delete the book:

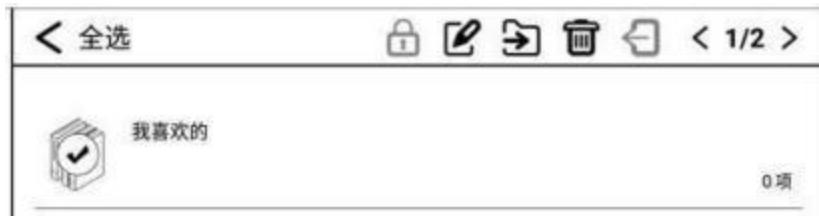

3.1. Read the shortcut menu

Click the cover of any book to enter the reading interface. The default is the full-screen display reading area, and the display at the bottom

Reading progress, time, and battery level.

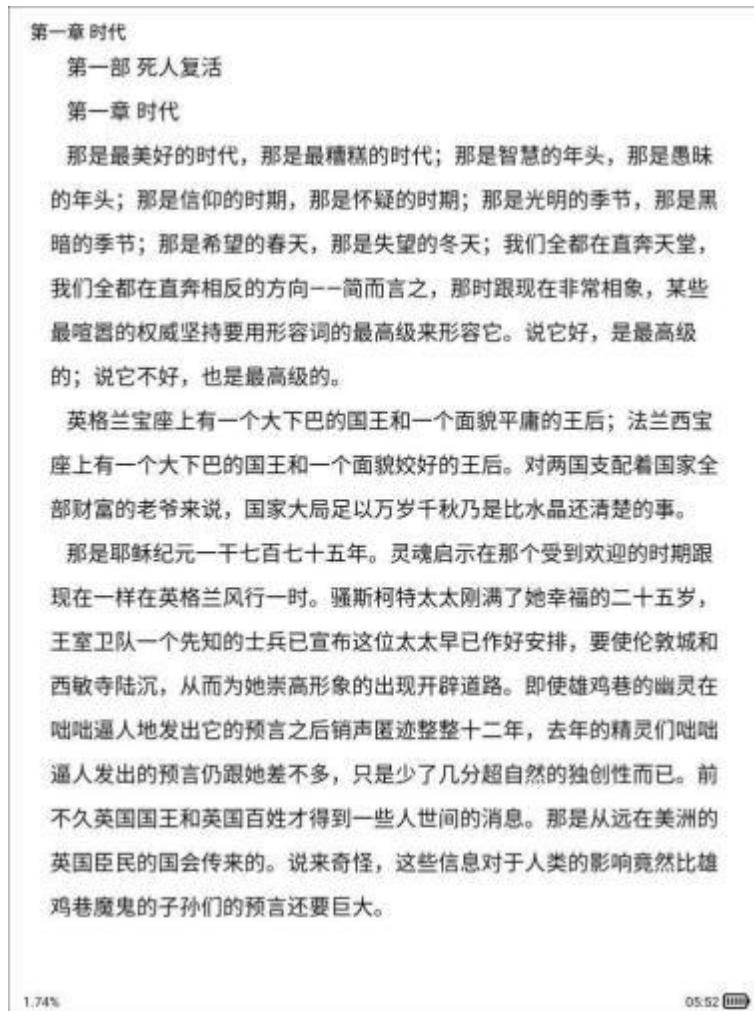

Click the left side (vertical) area of the screen to switch to the previous page;

Click the right side of the screen to switch to the next page;


Click the (vertical) area in the middle of the screen to call out the menu bar;

The menu at the top of the menu bar includes: return, enable / disable handwriting, display / hide handwritten notes, search, add / cancel bookmark, automatic page turning, refresh, share and set;

The menu at the bottom of the menu bar includes: last chapter, progress adjustment, next chapter, catalog, bookmark, format / display, and mark


Copyright belongs to Guangdong Zhihui Core Screen Technology Co., LTD. 13 / 42

Notes and notes.

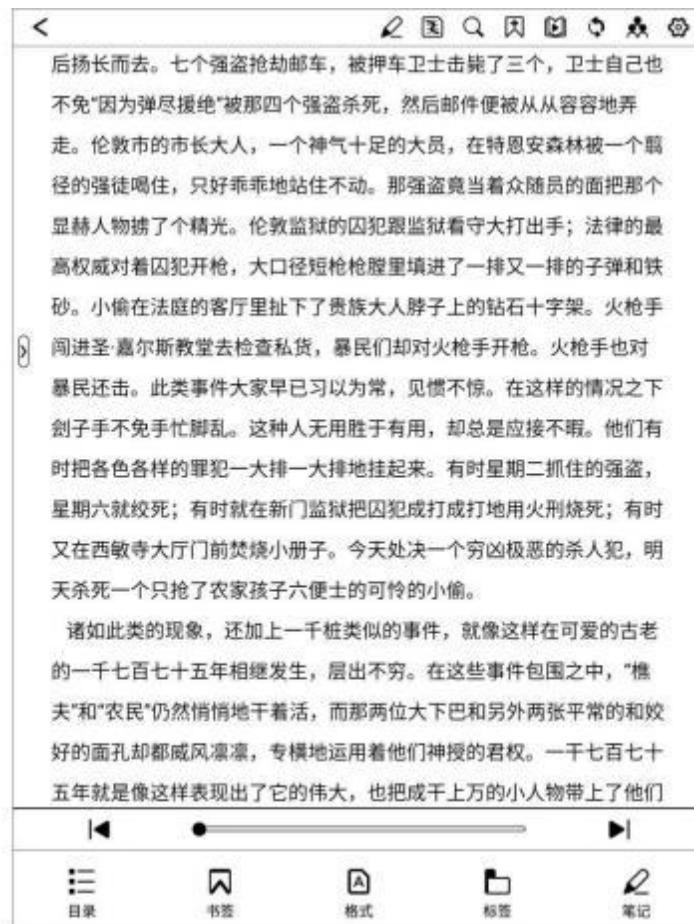

search

In-document search is supported

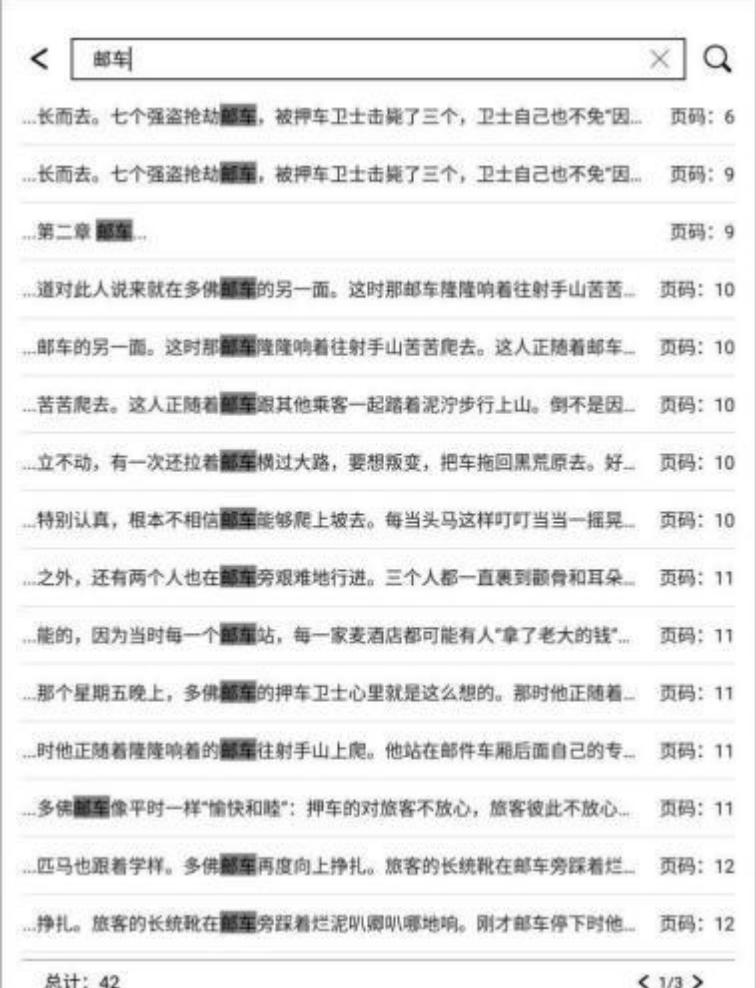

邮车

...长而去。七个强盗抢劫邮车，被押车卫士击毙了三个，卫士自己也不免“因... 页码：6

...长而去。七个强盗抢劫邮车，被押车卫士击毙了三个，卫士自己也不免“因... 页码：9

...第二章 邮车... 页码：9

...道对此人来说就在多佛邮车的另一面。这时那邮车隆隆响着往射手山苦苦... 页码：10

...邮车的另一面。这时那邮车隆隆响着往射手山苦苦爬去。这人正随着邮车... 页码：10

...苦苦爬去。这人正随着邮车跟其他乘客一起踏着泥泞步行上山。倒不是因... 页码：10

...立不动，有一次还拉着邮车横过大路，要想叛变，把车拖回黑荒原去。好... 页码：10

...特别认真，根本不相信邮车能够爬上坡去。每当头马这样叮叮当当一摇晃... 页码：10

...之外，还有两个人也在邮车旁艰难地行进。三个人都一直裹到额骨和耳朵... 页码：11

...能的，因为当时每一个邮车站，每一家麦酒店都可能有人“拿了老大的钱”... 页码：11

...那个星期五晚上，多佛邮车的押车卫士心里就是这么想的。那时他正随着... 页码：11

...时他正随着隆隆响着的邮车往射手山上爬。他站在邮件车厢后面自己的专... 页码：11

...多佛邮车像平时一样“愉快和睦”：押车的对旅客不放心，旅客彼此不放心... 页码：11

...匹马也跟着学样。多佛邮车再度向上挣扎。旅客的长统靴在邮车旁踩着烂... 页码：12

...挣扎。旅客的长统靴在邮车旁踩着烂泥叭唧叭唧地响。刚才邮车停下时他... 页码：12

总计：42 < 1/3 >



Add / unbookmark

You can add bookmarks, when the bookmarked page, then display as the cancelled bookmark icon, click to cancel the added bookmark record



Automatic page turning

Click to enable automatic page turning, and click again to stop automatic page turning. In the dialog box that has popped up, OK Modify the time interval between the automatic turning of the pages.

加速

10S

减速

为了更好的阅读，手写的笔记会被隐藏起来。

开始



share

You can share book pages, supporting both email and Bluetooth.



set up

Here you can set reading related properties, such as: display / hide the chapter name, reading progress / time / power, global properties of the format, export file storage address, etc.



renovate

Full refresh page



Previous chapter / next chapter

You can quickly switch to the previous chapter or the next chapter, or drag the progress bar in the middle to quickly switch to the progress.

Can out the page format adjustment menu, the menu can adjust the font size, line spacing, upper / lower spacing, left / right spacing;

字体大小	<input type="button" value="-"/>	40	<input type="button" value="+"/>
行间距	<input type="button" value="-"/>	18	<input type="button" value="+"/>
上/下间距	<input type="button" value="-"/>	56	<input type="button" value="+"/>
左/右间距	<input type="button" value="-"/>	78	<input type="button" value="+"/>

.2.3 Directory

When reading the document, click in the middle of the screen, you can call out the menu bar, click on the directory in the lower left corner, and you can switch to the document directory interface.

Click each directory to jump to the body of the page.

目录	0.25%
双城记	0.25%
目录	0.5%
作者简介	0.5%
第一部 死人复活	0.99%
第一章 时代	1.74%
第二章 邮车	2.23%
第三章 夜间黑影	3.72%
第四章 准备	4.71%
第五章 酒店	7.94%
第六章 鞋匠	10.67%
第二部 金丝网络	13.4%
第一章 五年后	14.89%
第二章 看热闹	16.63%
<	< 1/4 >

目录

书签

标签

笔记

3.3. A bookmark

When reading the document, click the middle of the screen, in the pop-up menu bar, click the top as 

Previous page add bookmark, added bookmark page, click Cancel. 

Bookmarks can be viewed in the menu bar- -> bookmark page. This interface can delete bookmarks

.

Click each bookmark to jump directly to the body of the page.

第二章 邮车	2.48%	09-15-2021 06:18 上午	<input type="checkbox"/>
第二章 邮车 十一月下旬的一个星期五晚上，多佛大道伸展在跟这段历史有关的几个人之中的第一个人前...			
第四章 准备	4.96%	09-15-2021 06:18 上午	<input type="checkbox"/>
第四章 准备 邮车上午顺利到达多佛。乔治王旅馆的帐房先生按照他的习惯打开了邮车车门，动作略带几...			
第四章 准备	6.45%	09-15-2021 06:19 上午	<input type="checkbox"/>
在她那双眉之间、在她小巧的女性鼻子的上方出现了一道淡到不能再淡的纤细的皱纹。她一直站在一张椅子旁边，这时便若有所思地在椅			
第五章 酒店	9.18%	09-15-2021 06:20 上午	<input type="checkbox"/>
而且卷起了衬衫袖子，让棕黄的胳膊直露到手肘。他有一头蓬松鬈曲的黑色短发，没戴帽子。这人肤色黝黑，目光炯炯，双眼之间分得很			
第三章 失望	19.6%	09-15-2021 06:20 上午	<input type="checkbox"/>
“墨内特小姐，在越过海峡的时候你跟囚犯说过话么？” “说过，先生。”			
第三章 失望	20.35%	09-15-2021 06:20 上午	<input type="checkbox"/>
“你无法回答有什么确切的特别的原因么？” 他低声回答说，“有。”			
第四章 祝贺	22.08%	09-15-2021 06:21 上午	<input type="checkbox"/>
达尔内先生已经热情地、感激地吻过她的手，也已转身向斯特莱佛先生表示了热烈的谢意。 斯特莱佛先生三十刚过，看来却要比实际年龄			
< < 1/2 > >		○	■
 目录	 书签	 标签	 笔记

3.4. tagging

When reading the document, you can press the text and drag the word, highlight the required text and lower the line \

Draw the dotted line and bottom the wavy line to mark the text. By default, use the last selected dimension, first make

Line it down by default.



Copy can be selected.



You can jump to the Browser to search for selected text.



 The search for and highlight to display the same text within the document.

Click the marked text, and then click to delete the mark.



2 Select can also add comments to the annotated text.

第六章 数以百计的来人

她。罗瑞先生也是一片喜气洋洋。他戴着小假发望着这一切憨笑，对他单身生活的福星们表示感谢，因为他们在他的垂暮之年照亮了他，给了他一个家。但是这一片景象并没有被“数以百计的人”看见，罗瑞先生寻找普洛丝的预言的验证，却没有找到。

晚饭时间到了，“数以百计的人”仍然没有出现。在家务活动之中，普洛丝小姐负责的是下层工作，她总干得很出色。她做的饭菜用料虽然一般，却是烹调得体，设计精美，半英国式半法国式，出类拔萃。普洛丝小姐的友谊是很实际的。她在索霍区和附近地区四处搜寻贫困的法国人，付出注释这些式微的高卢后，
把她看作注释，
免、一两、
星期天取消确定人知道的
时候到底层或二楼她的屋里去吃——那是个蓝色的房间，除了她的小鸟儿之外谁也不许进入。此时此刻，普洛丝小姐因为小鸟儿那快活的脸蛋、也因她在努力使她高兴，表现得十分随和。因此，大家晚饭时都很愉快。

Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	@
+	Z	X	C	V	B	N	M	<X>	
CN	?123	—				.	+		

Annotation and annotation can be viewed in the menu bar- -> annotation page to facilitate positioning and jump. This interface can delete notes and comments.

Click each dimension to jump directly to the body of the page.

Mark all the contents of the list page, support export to txt document, export directory to

FFolder with the same name as the source document in / sdcard / Annotations directory.

The screenshot shows a list of annotations in the SID Note application. Each item in the list includes the chapter name, page percentage, date and time, and a preview of the annotated text. The annotations are as follows:

- 第四章 祝贺 23.08% 09-15-2021 06:21 上午
这一句暗示及时提醒了达尔内：这个讨厌的伙伴那天曾主动帮助他渡过了难关。他立即转向了这个话头，并对他表示感谢。
- 第五章 财狗 24.81% 09-15-2021 06:22 上午
太阳凄凉地、忧伤地升了起来，照在一个极可恶的人身上。那是个很有才华、感情深厚的人，却无法施展自己的才能，用那才华和情感为自己获取幸福。他明知道它的危害，却听之任之。...
- 第六章 数以百计的来人 25.31% 09-15-2021 06:22 上午
这是标注这是标注。。。
曼内特医生在这儿应诊，他的病家是他往日的声誉和悄悄流传的有关他的故事所唤醒的名声带来的。他
- 第六章 数以百计的来人 26.05% 09-15-2021 06:22 上午
罗瑞先生知道普洛丝小姐很妒忌。可是他现在也明白，她在她那古怪的外表之下却是一个毫不自私自利的女人——只有女人才可能这样——这种人纯粹为了爱与崇拜心甘情愿去做奴隶，为她...
- 第六章 数以百计的来人 26.8% 09-15-2021 06:23 上午
这是个奇妙的地方，它的耳朵特别灵，有些不寻常的音响效果。罗瑞先生站在敞开的窗前寻找已有脚步声传来的父女俩时，简直以为他们再也不会到达了——不但他俩的脚步声仿佛逐渐远...

At the bottom of the screen, there is a navigation bar with the following icons and text:
< 2/3 > (Page number)
目录 (Table of Contents)
书签 (Bookmark)
标签 (Tag)
笔记 (Note)

4. Application

Click on the main interface to display the installed application software APP




Press the app icon long enough to view its details:



4.1. Application market

You can download the required third-party App here

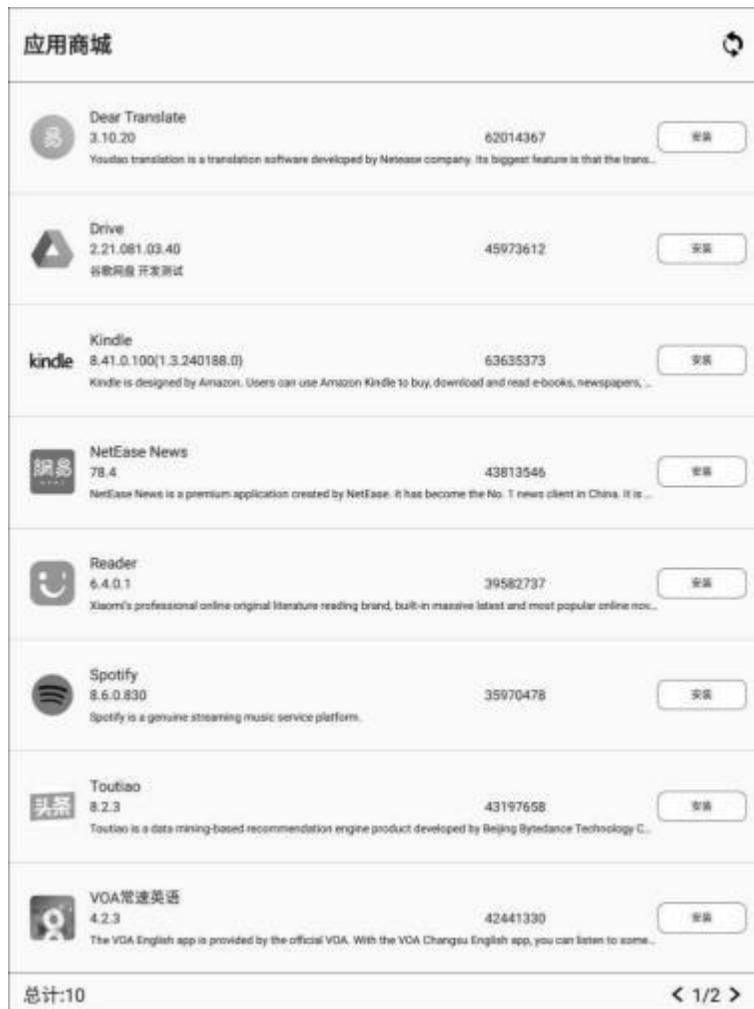

statement

1 . All applications in this market are collected on the Internet, the purpose of sharing is only for everyone to learn and reference, if there is infringement, please delete in time!

2 . All applications in this market do not guarantee their integrity and security, please check the security after downloading.

4 . This market is completely free to share resources, need technical support, please buy the official business version!

3 . In addition to the application optimization related problems, in the use of the application of its own functional problems, please contact the application developer for consultation!

4 . This market is completely free to share resources, need technical support, please buy the official business version!

5 . This market does not have any right to provide the downloaded software and other resources, its version right belongs to the legal owner of the resource all!

2.4 Browser

Enter the website, or keyword in the address bar and click to access. 

Use the Chinese state

Baidu search engine, in the English state, the default use of Google search engine.



3.4: The File Manager



Enter a file or folder name for a search

 new folder

After creating a new folder, you can move your notes to the folder;

 select

Item In the selection interface, you can select / unselect folders and notes, and copy / move / delete selected

 sort

Select the ascending / descending order by note creation time, note modification time, and note name:

Long press the file to select how to open, rename, delete, copy, and move:



Long pressing the folder allows you to rename, delete, copy, and move:





5. Set



Click the main interface to enter the main interface, the user can proceed

Network, general setting, account management, battery, system update, password, view equipment related information, etc.



5.1. network

5.1.5 WiFi

After opening wifi, the device will automatically search for available WIFI hotspots, select the corresponding hotspot in the displayed WLAN network list, enter the password and other required information, and connect to the WIFI hotspots. The connection will be successful

Show the WIFI connection successfully and WIFI, signal icon.

After the WLAN hotspot connection is successfully set for the first time, the information of the hotspot will be automatically recorded. The next connection will only be in the notification bar and click the WLAN switch to automatically connect;



2.5 Conventional

General Settings include: system voice, time zone, input method, sound.



3.5 Account

The devices that log in to the account can enjoy the function of synchronizing notes & books to the cloud server, and synchronizing notes & books to devices from the cloud server.

PC or mobile phone access <https://www.kloudnote.com> can log in & view notes & books in cloud storage.



5.3.1. Registration

Account registration, support with the mobile phone number or email registration. Registered mobile phone number and email address are not registered again.



5.3.2. The landing

Enter the mobile phone number or email address and the corresponding password to log in.



5.3.3. Change the password


You can reset the account password through the mobile phone number or email + verification code.

If you need to contact us.



4.5 Battery

It can set the automatic hibernation time without operation, the automatic shutdown time, and check the battery status information.

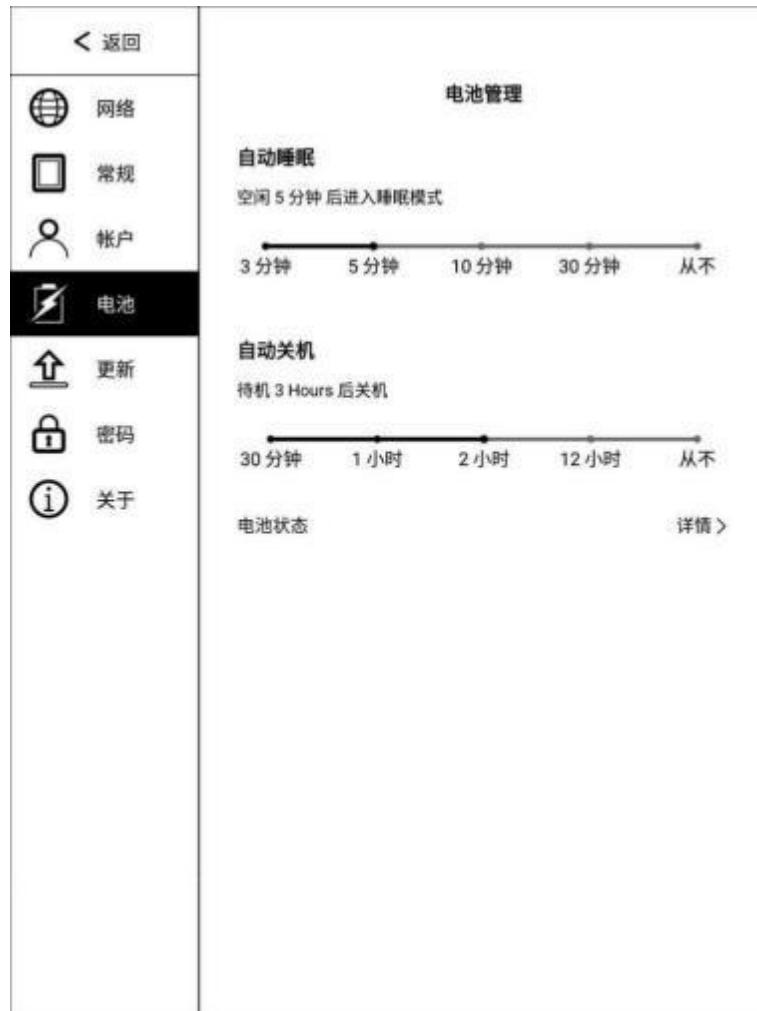

5.5 Upgrade

Every time the user enters the update interface, it will detect whether there is new software on the server, when there is new

When the software, a prompt will pop up, click to download, and follow the prompt to install the new software.

If the automatic download is opened, when a new software is detected, the new software will be automatically downloaded, and the user will be prompted to install after the download.



.6.5 Safety

Security Settings include: digital password setting and management, and fingerprint entry and management, and lock screen opening and closing. After setting the password, when the device is turned on and activated, you need to enter the password to enter the system; Please remember the password. If the password may lead to the system, please contact us.

The password used when locking the book is consistent with the password for unlocking the screen.



5.7. About the

In "About", you can view the device model, OS, serial number, software version number, storage space, as well as privacy policy, user manual download, feedback, personalized Settings and restore factory Settings.



6.size of product

processor	Qu a d - core Cortex - A 3 5	screen	The E-ink E-ink screen
internal storage	1 GB	screen size	And 6 inches
Built-in storage	32 G B	resolution ratio	75 8x 1 0 2 4
operating system	And r o i d 8 .1	Touch control type	Electromagnetic touch control + capacitive touch control
language	English / Chinese language (More support will come later)	cell	A 3,700 m A h mAh lithium battery
document format	PD F , TX T , EP U B , M O B I , R T F , FB 2 , DO C , H T M L et al. RTF, FB 2, D O C, HT M L et al	U S B Interface	T y p e - C
upgrad e	Support for OTA upgrades	W i F i bluetooth	2 .4 G
product size	1 5 3 * 10 8 .7 *7 .6 m m	charge	DC 5V / 2 A
attestati on	CE 、 F C C	service temperature	0 ° C - 50 ° C

7. Accessories

The package contains the following standard accessories:

1 . SID Note Host x 1

3 . The Type-C data line, x 1

8. Safety guidelines

Please read the following Safe Use Guide before use and contact us if you encounter any technical difficulties.

Screen protection

The display screen of this equipment is E-PAPER screen, which is a fragile part. Do not directly hit, squeeze or press the screen, or fall from a high place on a hard surface. If the display screen is broken, please stop the use, and contact the official or other qualified professional for replacement. Do not disassemble and replace it by yourself.

Qualified accessories

Only the batteries, chargers and other accessories that meet the safety standards of the equipment are allowed,

Refer to the product configuration parameters for details.

Use incompatible accessories for equipment damage.

Stay away from liquid

This equipment is not waterproof, please do not expose the equipment to a wet environment, nor in the rain

Use the product in, stay away from any corrosive liquid.

Do not tear down the machine

Do not dismantle the equipment to avoid structural or screen damage.

service environment

The allowable temperature range of this equipment is 0°C-50 °C.

9 .frequently asked questions

.1.9 How to switch on and off the machine

In the shutdown state, long press the key for 2-3 seconds, enter the opening interface, after the animation display, enter the Home interface;

In the boot state, long press the key open for 5 seconds, that is, automatic shutdown.

In the boot state, long press the key to open for 2-3 seconds, call out the menu bar, and select " off

Machine "; under the shutdown state, connect the TypeC line to charge, namely automatically boot.

9.2., How to charge it

Connect the device through the USB data cable to the computer USB for charging;

Connect USB cable and equipment through adapter (optional), connect to AC socket for charging;

The charging time is about 4 hours

pay attention to:

If the connected adapter does not display the charging status, check whether the default power supply of the adapter is 5V (voltage mode

Enclosure: 4.5V - 5.4V), if not in this range, please replace the adapter and try again.

3.9 How to transfer the data

Connect the mobile phone and the computer through the data cable for data transmission;

Download books directly through WIFI;

Through WIFI, wireless transmission, from the mobile phone or computer transmission of books to devices;

Direct directly to the built-in WIFI browser to access the web page to download data;

.4.9 How to upgrade the system

Online upgrades via OTA.

Settings- -> upgrade- -> Automatic detection of updates, WIFI networking, search upgrade package, directly upgrade the device online.

9.5. How to sync notes and books to cloud storage

First, register for the account, and then log in to the account.

Settings- -> More Settings- -> Check that automatic synchronization is on. It will automatically when it is on

Synchronize notes and books into cloud storage; automatically synchronize notes and books from cloud storage each time you log your account

Register to the equipment.

.6.9 How to protect the equipment

Daily use as far as possible equipped with a hard shell book cover, to avoid the screen received direct impact, extrusion;

When not in use, put the screen down on the horizontal surface, do not mix hard objects between the screen and the horizontal surface; avoid accumulating heavy objects above the reader; keep away from various liquids.

10. statement

Guangdong Zhihui Core Screen Technology Co., Ltd. reserves the right to make changes to the product specifications and contents included in the User Manual, and are subject to changes without notice.

You can obtain product-related information through our website:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.