


|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT80 at 5775MHz |               |            |

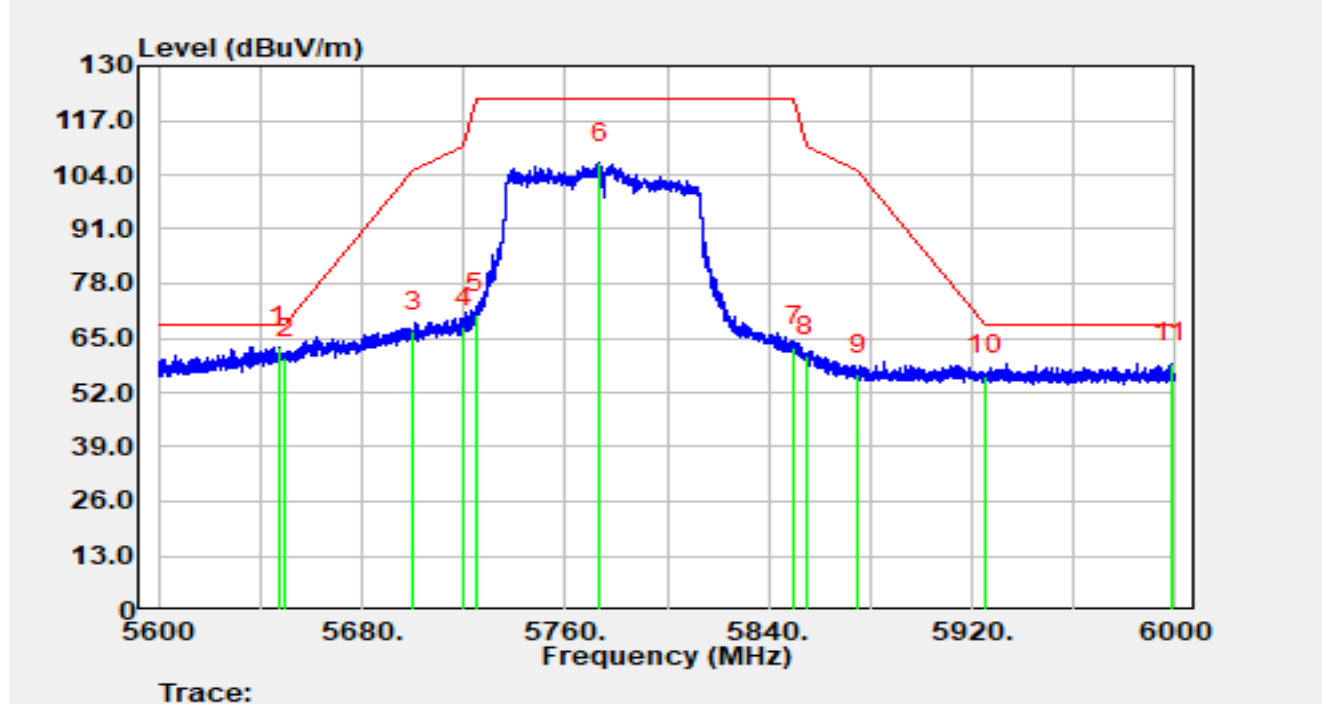


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5647.36         | 42.61          | 20.38      | 62.99                | -5.21       | 68.20          | Peak     |
| 2  |      | 5650.00         | 39.81          | 20.37      | 60.19                | -8.01       | 68.20          | Peak     |
| 3  |      | 5700.00         | 45.90          | 20.58      | 66.47                | -38.73      | 105.20         | Peak     |
| 4  |      | 5720.00         | 47.00          | 20.70      | 67.70                | -43.10      | 110.80         | Peak     |
| 5  |      | 5725.00         | 50.09          | 20.69      | 70.78                | -51.42      | 122.20         | Peak     |
| 6  |      | 5773.68         | 86.16          | 20.60      | 106.76               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 42.04          | 20.79      | 62.83                | -59.37      | 122.20         | Peak     |
| 8  |      | 5855.00         | 39.97          | 20.76      | 60.73                | -50.07      | 110.80         | Peak     |
| 9  |      | 5875.00         | 35.58          | 20.78      | 56.36                | -48.84      | 105.20         | Peak     |
| 10 |      | 5925.00         | 34.94          | 21.12      | 56.06                | -12.14      | 68.20          | Peak     |
| 11 |      | 5998.56         | 38.04          | 21.01      | 59.05                | -9.15       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).

3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT80 at 5775MHz |               |            |

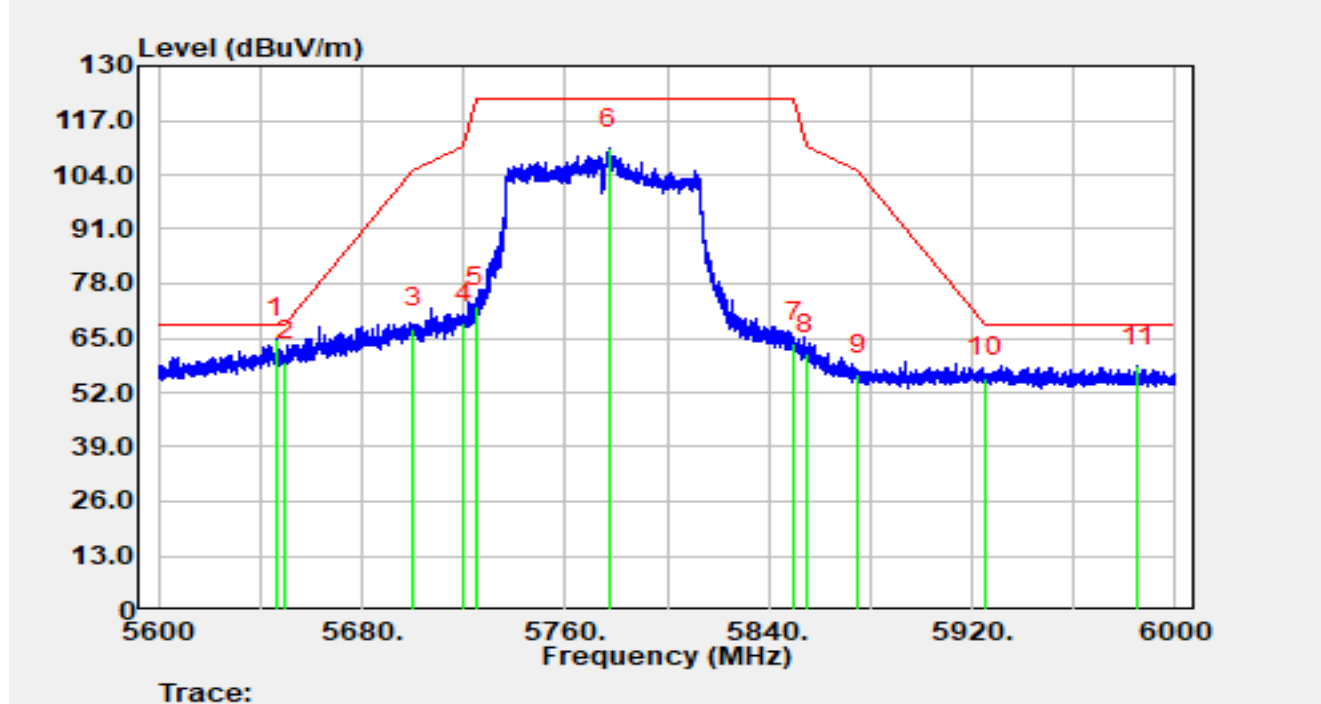


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5646.28         | 44.39          | 20.39      | 64.77                | -3.43       | 68.20          | Peak     |
| 2  |      | 5650.00         | 39.20          | 20.37      | 59.57                | -8.63       | 68.20          | Peak     |
| 3  |      | 5700.00         | 46.83          | 20.58      | 67.41                | -37.79      | 105.20         | Peak     |
| 4  |      | 5720.00         | 47.80          | 20.70      | 68.50                | -42.30      | 110.80         | Peak     |
| 5  |      | 5725.00         | 51.75          | 20.69      | 72.44                | -49.76      | 122.20         | Peak     |
| 6  |      | 5777.16         | 89.67          | 20.60      | 110.27               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 43.09          | 20.79      | 63.88                | -58.32      | 122.20         | Peak     |
| 8  |      | 5855.00         | 40.55          | 20.76      | 61.31                | -49.49      | 110.80         | Peak     |
| 9  |      | 5875.00         | 35.42          | 20.78      | 56.20                | -49.00      | 105.20         | Peak     |
| 10 |      | 5925.00         | 34.37          | 21.12      | 55.49                | -12.71      | 68.20          | Peak     |
| 11 |      | 5985.08         | 37.31          | 20.96      | 58.27                | -9.93       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).

3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5250MHz |               |            |

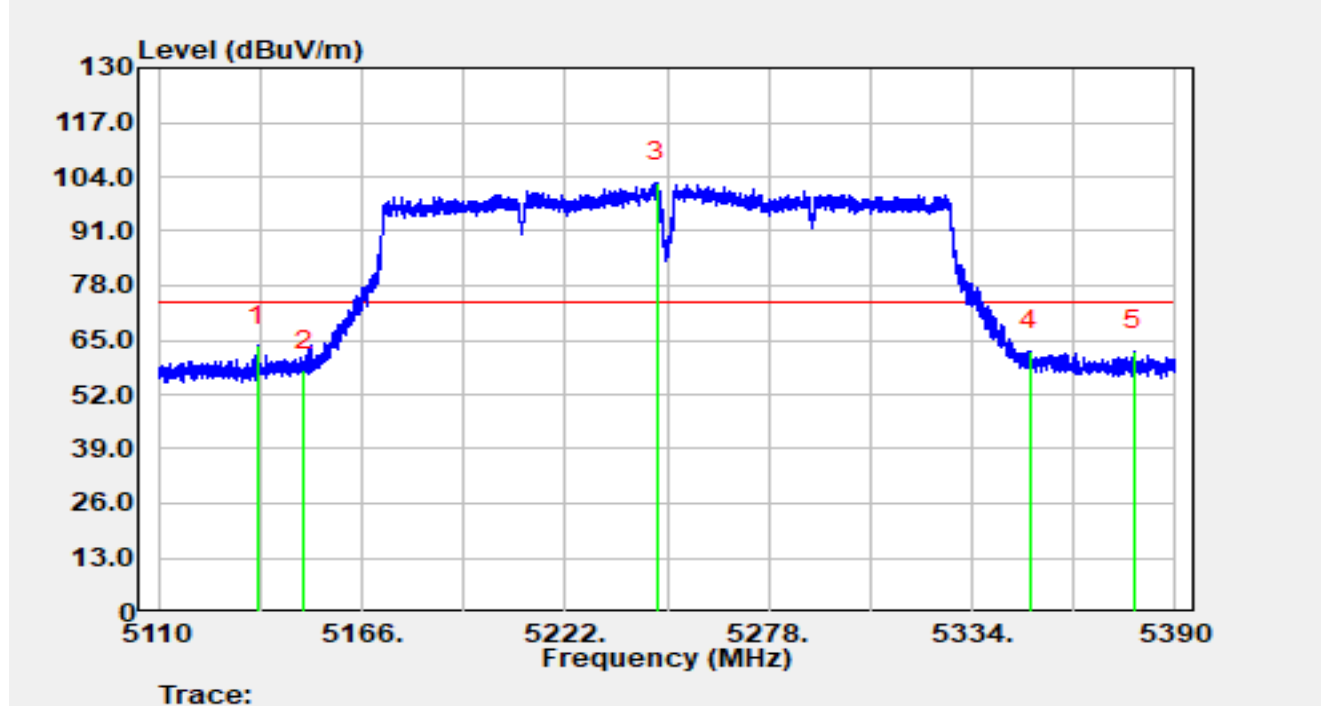


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5137.22         | 43.59          | 20.15      | 63.75                | -10.25      | 74.00          | Peak     |
| 2  |      | 5150.00         | 37.52          | 20.14      | 57.66                | -16.34      | 74.00          | Peak     |
| 3  |      | 5247.09         | 82.62          | 20.05      | 102.67               | N/A         | N/A            | Peak     |
| 4  |      | 5350.00         | 42.39          | 20.09      | 62.48                | -11.52      | 74.00          | Peak     |
| 5  |      | 5378.63         | 42.40          | 20.11      | 62.52                | -11.48      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5250MHz |               |            |

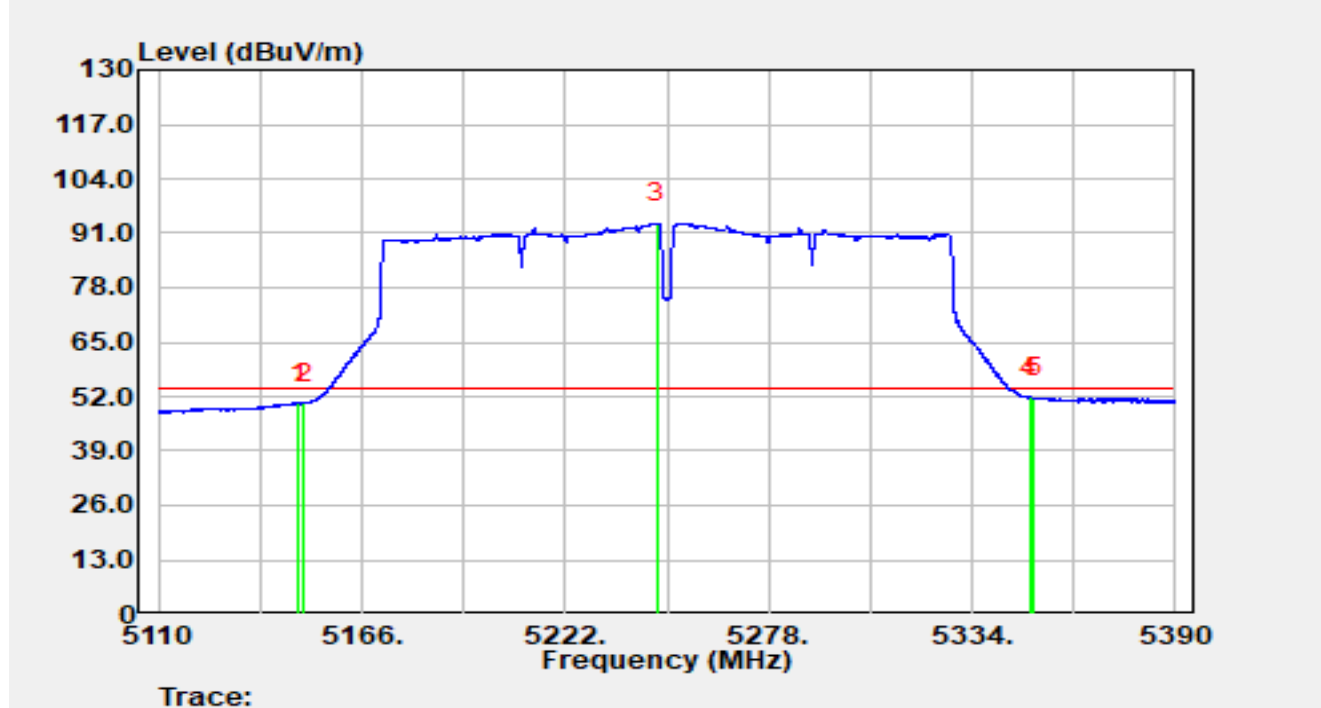


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5148.61         | 30.25          | 20.14      | 50.39                | -3.61       | 54.00          | Average  |
| 2  |      | 5150.00         | 30.31          | 20.14      | 50.45                | -3.55       | 54.00          | Average  |
| 3  |      | 5247.20         | 73.27          | 20.05      | 93.32                | N/A         | N/A            | Average  |
| 4  | *    | 5350.00         | 31.72          | 20.09      | 51.81                | -2.19       | 54.00          | Average  |
| 5  |      | 5350.97         | 31.67          | 20.08      | 51.75                | -2.25       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5250MHz |               |            |

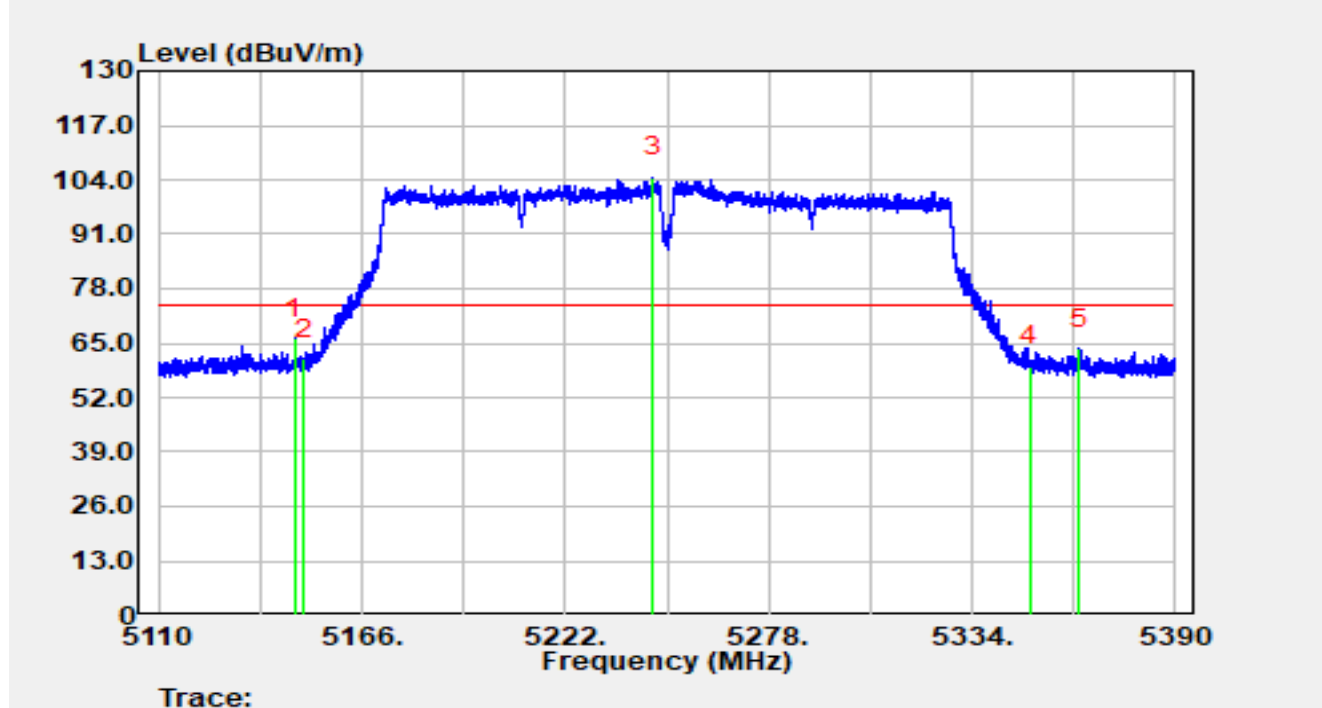


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5147.52         | 46.08          | 20.14      | 66.22                | -7.78       | 74.00          | Peak     |
| 2  |      | 5150.00         | 41.14          | 20.14      | 61.28                | -12.72      | 74.00          | Peak     |
| 3  |      | 5246.28         | 84.46          | 20.05      | 104.50               | N/A         | N/A            | Peak     |
| 4  |      | 5350.00         | 39.39          | 20.09      | 59.48                | -14.52      | 74.00          | Peak     |
| 5  |      | 5363.65         | 43.51          | 20.06      | 63.57                | -10.43      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5250MHz |               |            |

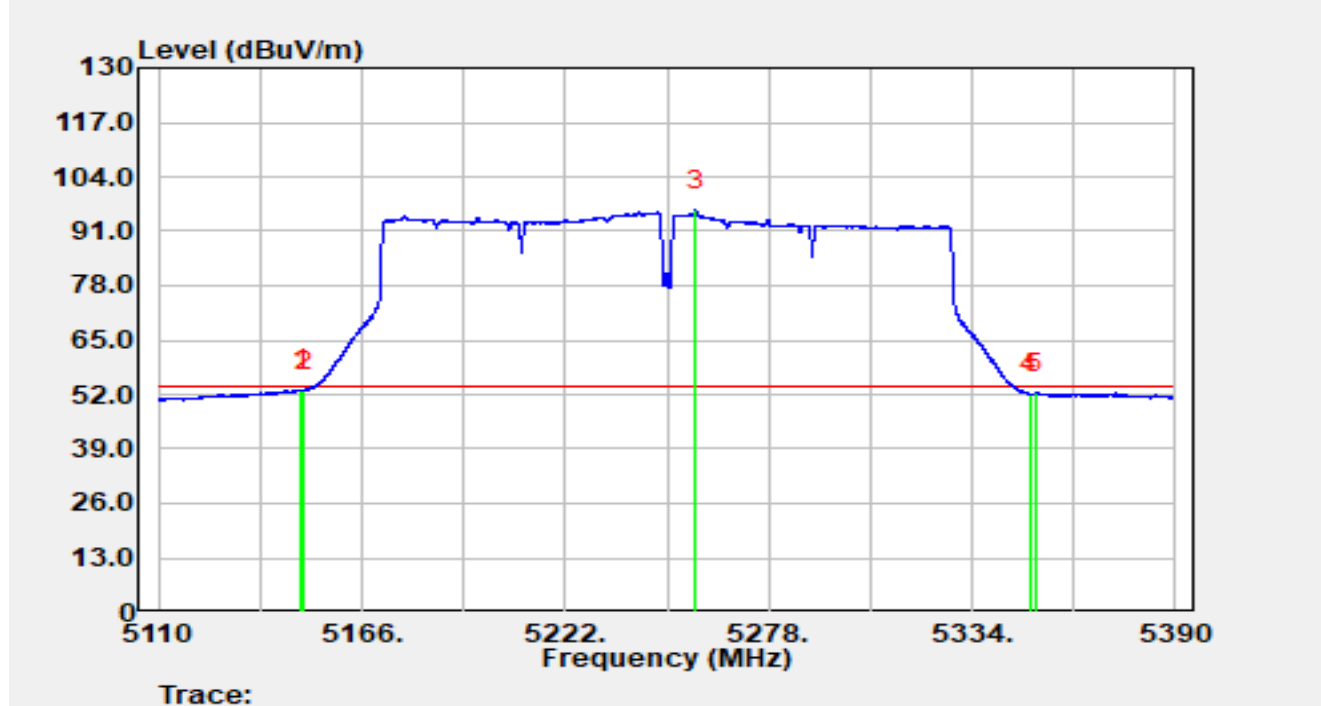


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.37         | 32.96          | 20.14      | 53.10                | -0.90       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.84          | 20.14      | 52.97                | -1.03       | 54.00          | Average  |
| 3  |      | 5257.81         | 76.00          | 20.01      | 96.01                | N/A         | N/A            | Average  |
| 4  |      | 5350.00         | 31.98          | 20.09      | 52.07                | -1.93       | 54.00          | Average  |
| 5  |      | 5351.39         | 32.24          | 20.07      | 52.31                | -1.69       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5570MHz |               |            |

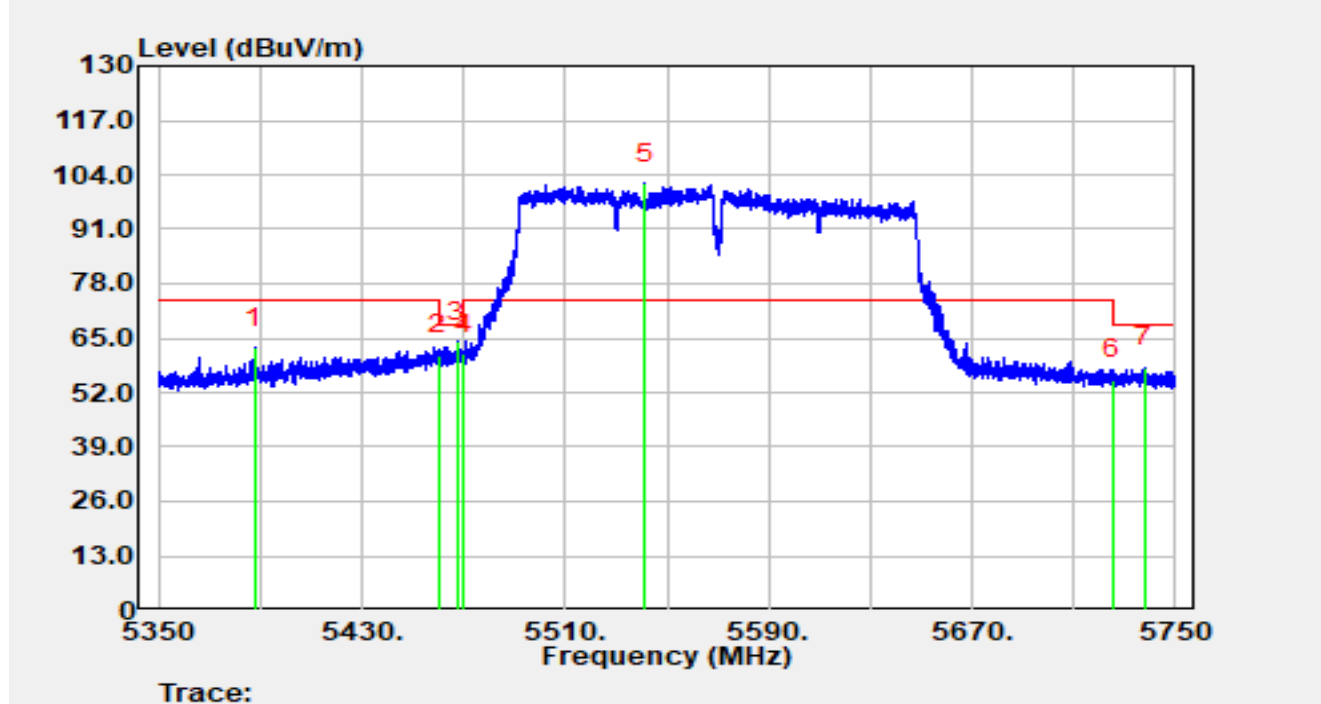


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5387.68         | 42.57          | 20.17      | 62.74                | -11.26      | 74.00          | Peak     |
| 2  |      | 5460.00         | 40.61          | 20.40      | 61.01                | -7.19       | 68.20          | Peak     |
| 3  | *    | 5467.36         | 43.93          | 20.33      | 64.26                | -3.94       | 68.20          | Peak     |
| 4  |      | 5470.00         | 40.78          | 20.31      | 61.09                | -7.11       | 68.20          | Peak     |
| 5  |      | 5541.32         | 81.43          | 20.42      | 101.86               | N/A         | N/A            | Peak     |
| 6  |      | 5725.00         | 34.36          | 20.69      | 55.05                | -13.15      | 68.20          | Peak     |
| 7  |      | 5737.64         | 37.29          | 20.62      | 57.91                | -10.29      | 68.20          | Peak     |

#### Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5570MHz |               |            |

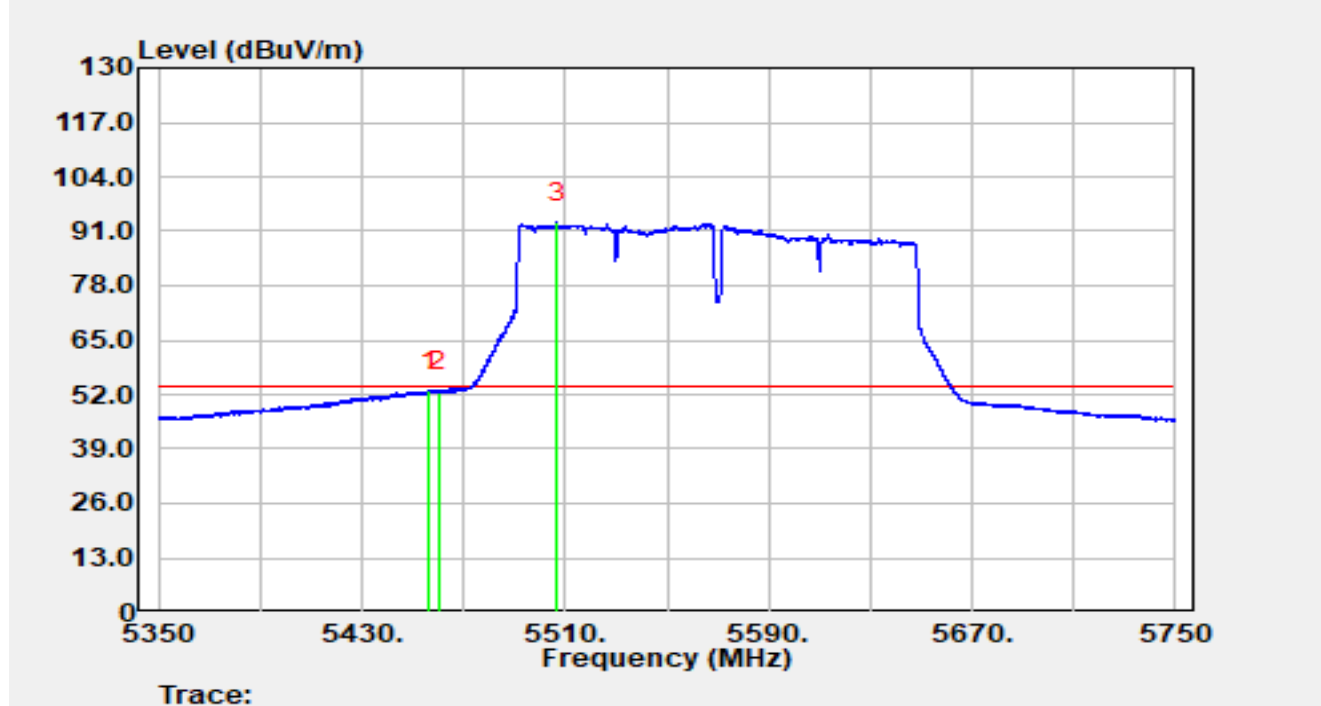


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5456.64         | 32.43          | 20.42      | 52.85                | -1.15       | 54.00          | Average  |
| 2  |      | 5460.00         | 32.28          | 20.40      | 52.68                | -1.32       | 54.00          | Average  |
| 3  |      | 5506.52         | 72.55          | 20.50      | 93.05                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5570MHz |               |            |

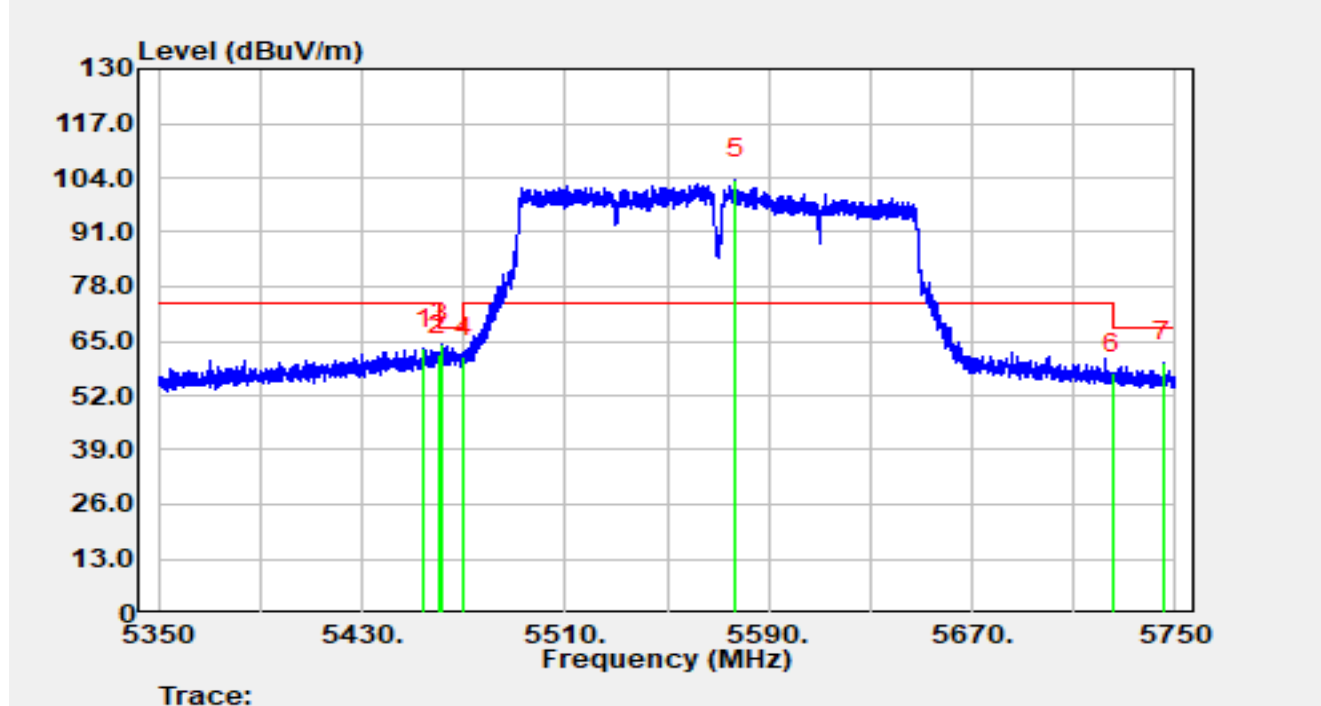


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5454.60         | 42.82          | 20.43      | 63.25                | -10.75      | 74.00          | Peak     |
| 2  |      | 5460.00         | 41.18          | 20.40      | 61.57                | -6.63       | 68.20          | Peak     |
| 3  | *    | 5461.40         | 43.95          | 20.38      | 64.33                | -3.87       | 68.20          | Peak     |
| 4  |      | 5470.00         | 40.81          | 20.31      | 61.12                | -7.08       | 68.20          | Peak     |
| 5  |      | 5576.84         | 83.21          | 20.31      | 103.51               | N/A         | N/A            | Peak     |
| 6  |      | 5725.00         | 36.51          | 20.69      | 57.20                | -11.00      | 68.20          | Peak     |
| 7  |      | 5745.16         | 39.51          | 20.58      | 60.08                | -8.12       | 68.20          | Peak     |

#### Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                        |               |            |
|-------------|----------------------------------------|---------------|------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                 | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                         | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP  | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ac-VHT160 at 5570MHz |               |            |

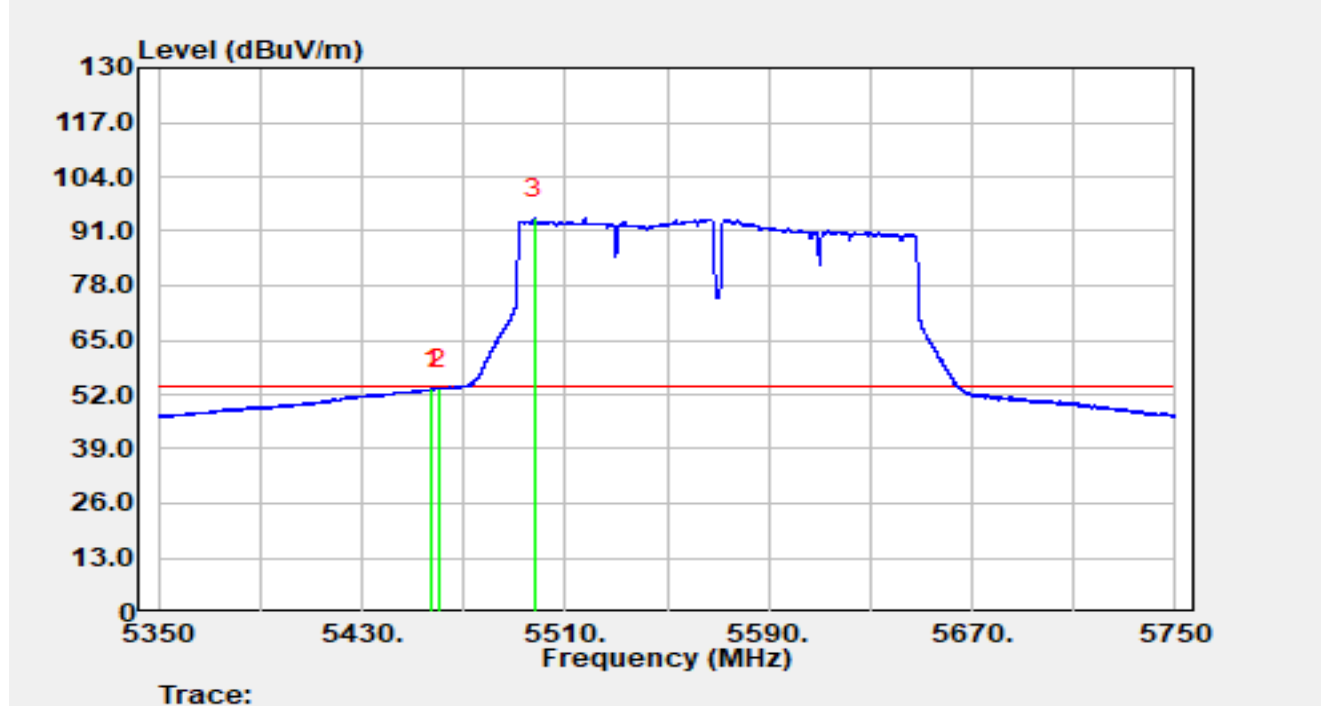


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5457.32         | 32.91          | 20.42      | 53.33                | -0.67       | 54.00          | Average  |
| 2  | *    | 5460.00         | 33.00          | 20.40      | 53.39                | -0.61       | 54.00          | Average  |
| 3  |      | 5497.80         | 73.54          | 20.45      | 93.99                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5180MHz  |               |            |

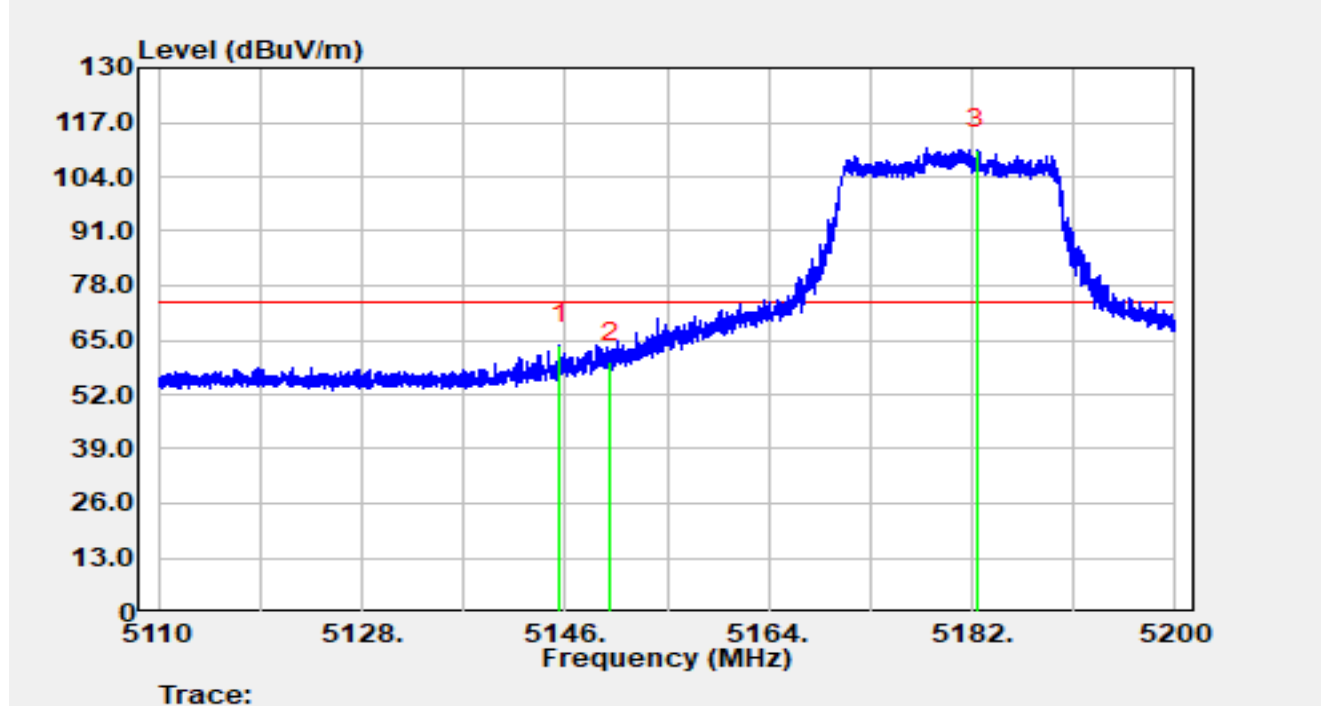


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5145.50         | 43.63          | 20.14      | 63.78                | -10.22      | 74.00          | Peak     |
| 2  |      | 5150.00         | 39.52          | 20.14      | 59.66                | -14.34      | 74.00          | Peak     |
| 3  |      | 5182.40         | 90.51          | 19.98      | 110.49               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5180MHz  |               |            |

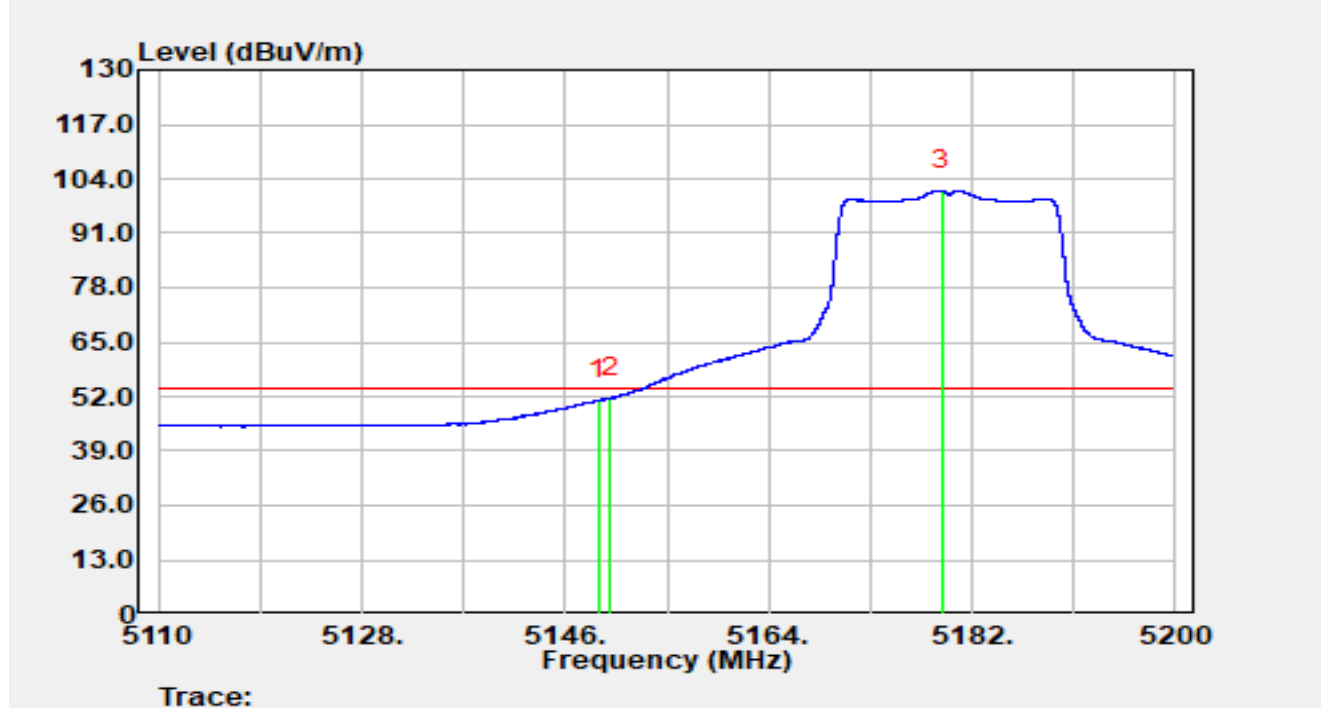


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5148.91         | 30.95          | 20.14      | 51.09                | -2.91       | 54.00          | Average  |
| 2  | *    | 5150.00         | 31.51          | 20.14      | 51.64                | -2.36       | 54.00          | Average  |
| 3  |      | 5179.29         | 81.31          | 19.99      | 101.30               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5180MHz  |               |            |

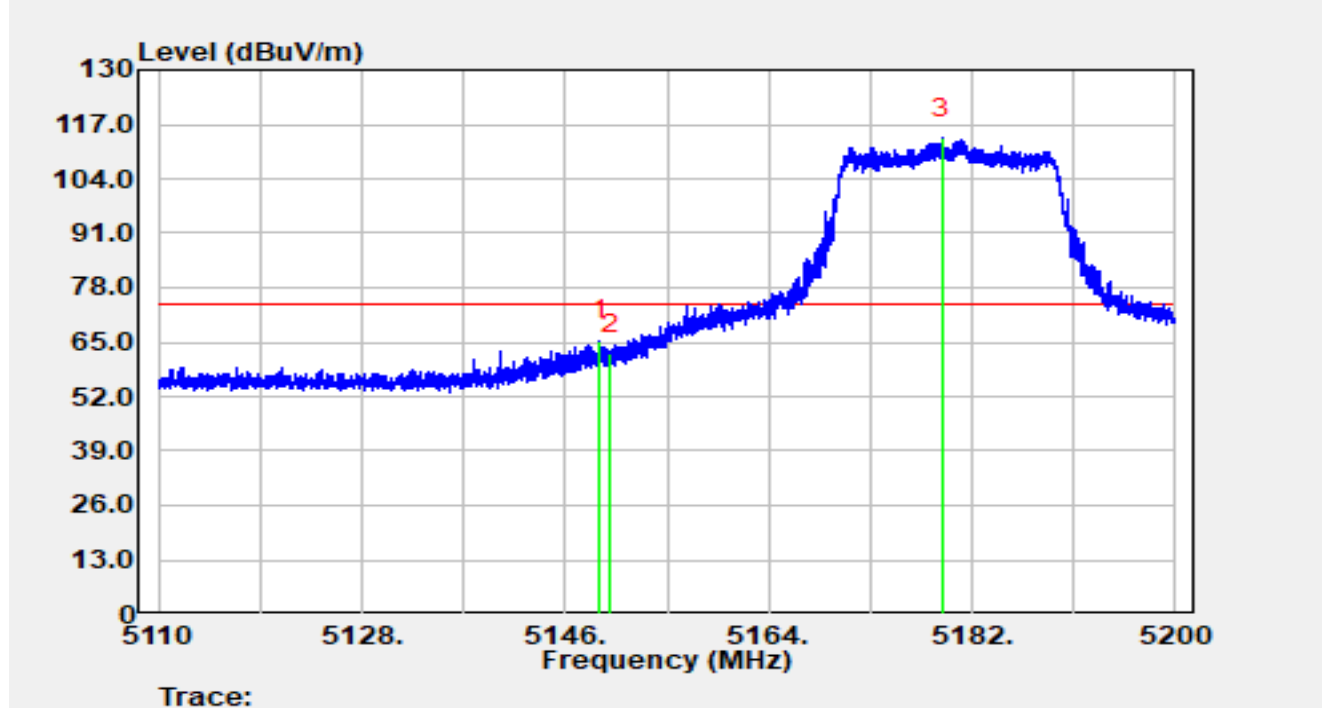


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.02         | 45.18          | 20.14      | 65.31                | -8.69       | 74.00          | Peak     |
| 2  |      | 5150.00         | 41.96          | 20.14      | 62.09                | -11.91      | 74.00          | Peak     |
| 3  |      | 5179.36         | 93.58          | 19.99      | 113.57               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5180MHz  |               |            |

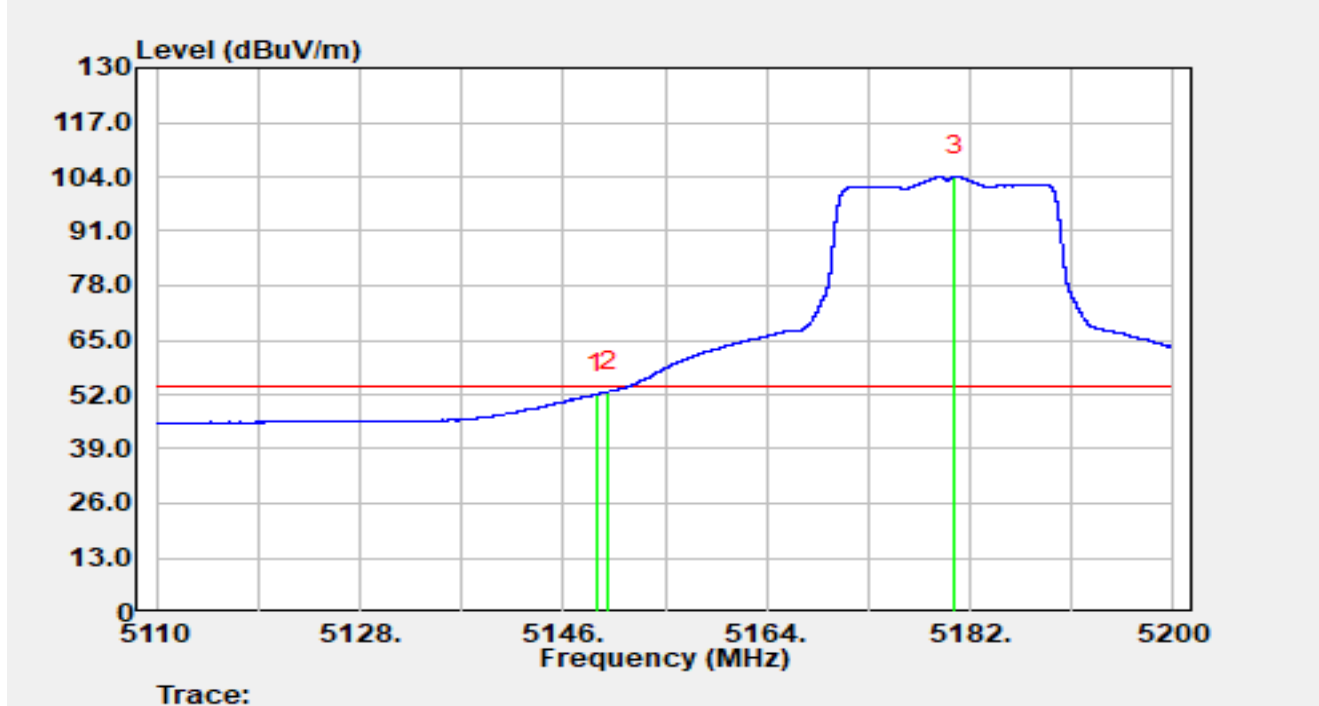


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5148.87         | 31.87          | 20.14      | 52.01                | -1.99       | 54.00          | Average  |
| 2  | *    | 5150.00         | 32.58          | 20.14      | 52.71                | -1.29       | 54.00          | Average  |
| 3  |      | 5180.70         | 84.16          | 19.98      | 104.15               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5320MHz  |               |            |

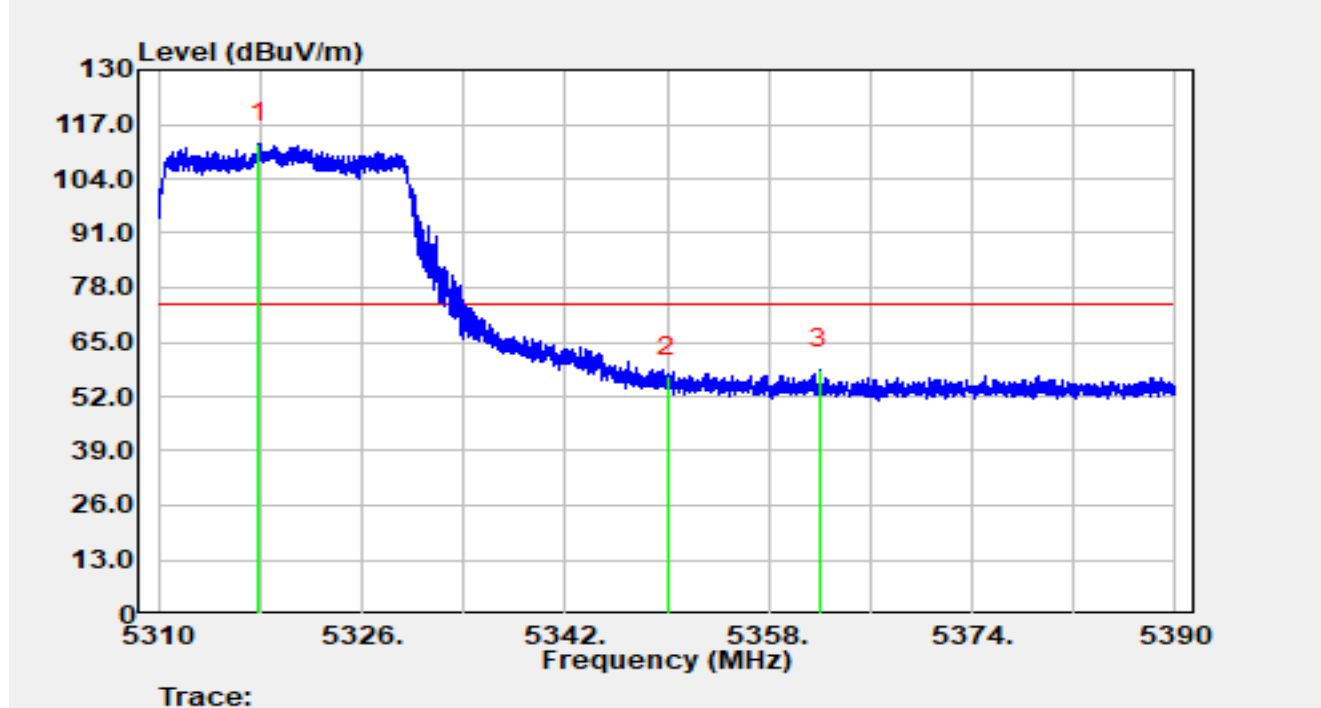


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5317.89         | 92.30          | 20.06      | 112.35               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 36.73          | 20.09      | 56.82                | -17.18      | 74.00          | Peak     |
| 3  | *    | 5362.02         | 38.33          | 20.06      | 58.39                | -15.61      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5320MHz  |               |            |

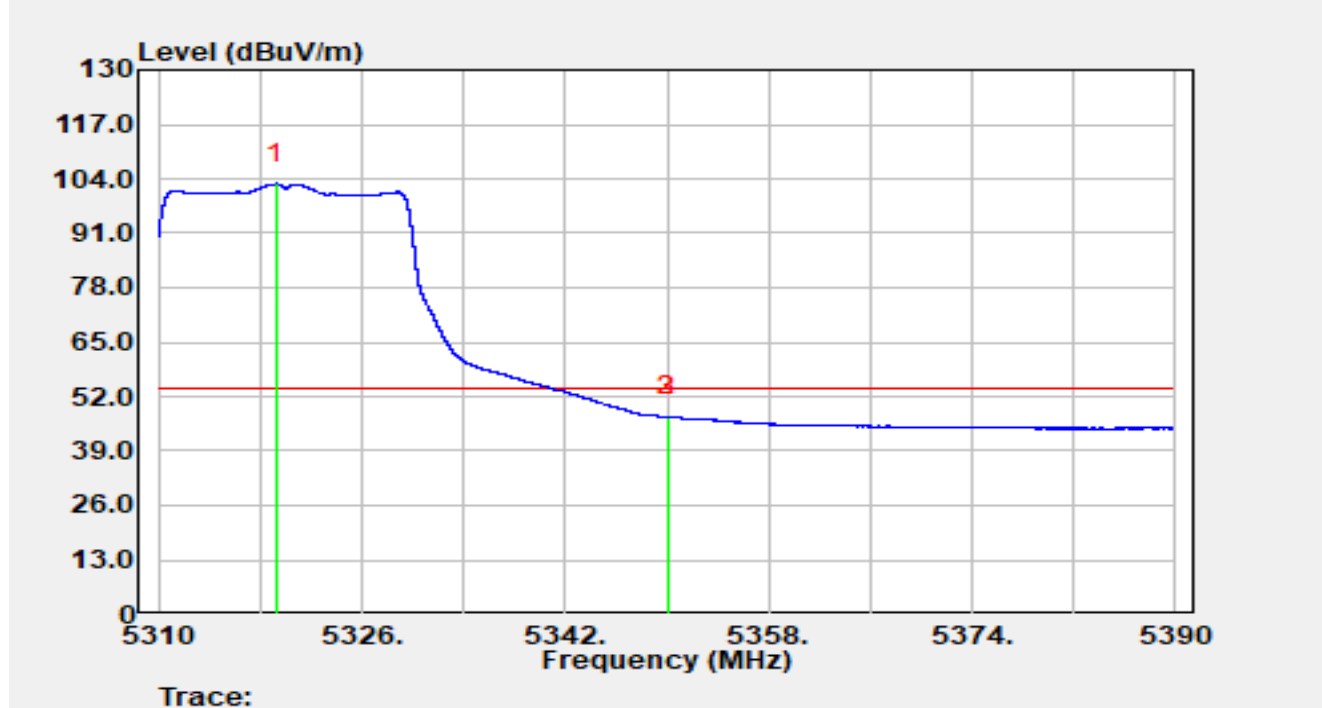


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5319.30         | 82.74          | 20.07      | 102.81               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 27.05          | 20.09      | 47.14                | -6.86       | 54.00          | Average  |
| 3  | *    | 5350.02         | 27.07          | 20.09      | 47.15                | -6.85       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5320MHz  |               |            |

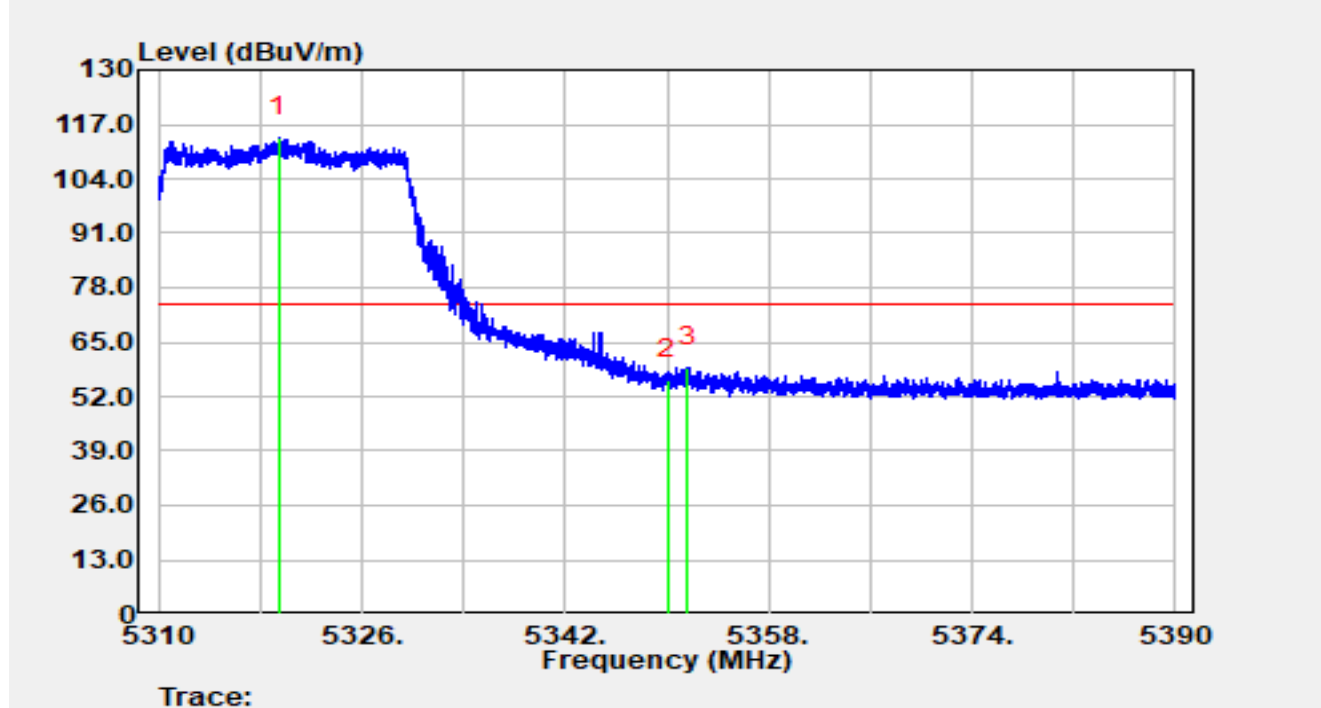


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5319.46         | 93.84          | 20.07      | 113.90               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 35.90          | 20.09      | 55.99                | -18.01      | 74.00          | Peak     |
| 3  | *    | 5351.67         | 39.03          | 20.07      | 59.10                | -14.90      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5320MHz  |               |            |

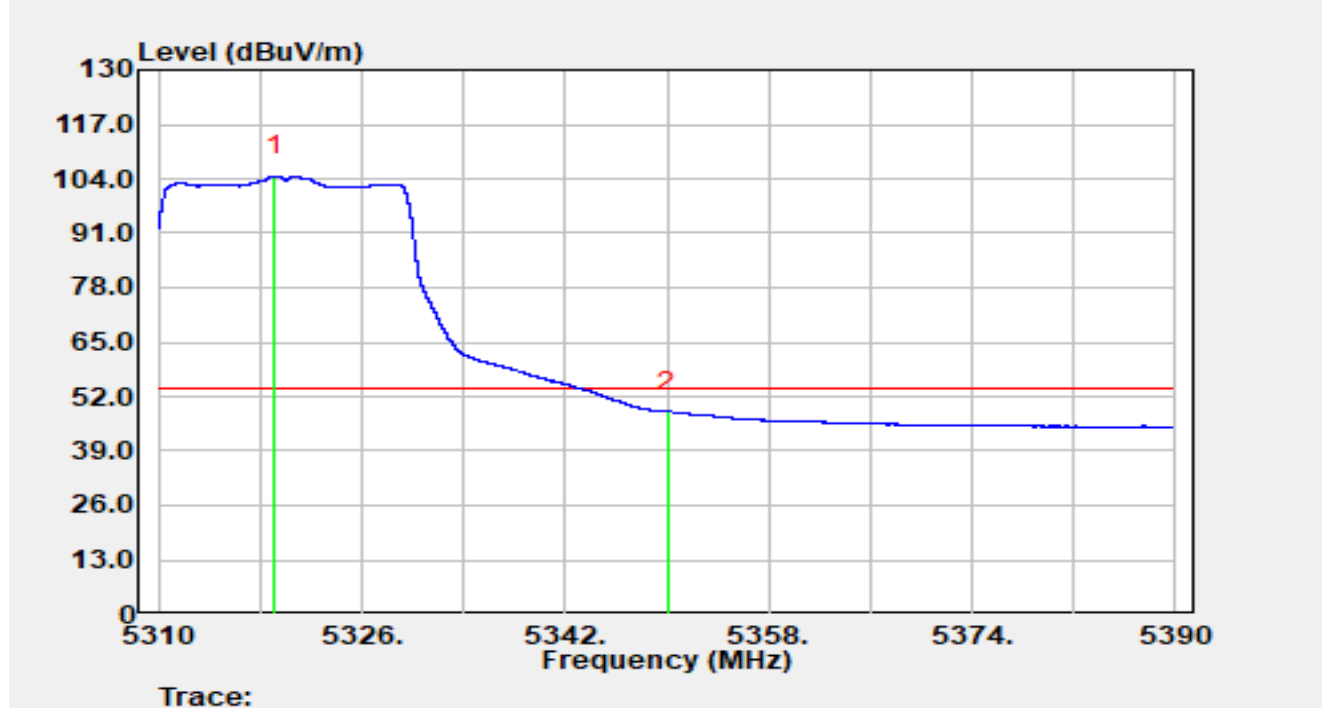


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5319.19         | 84.63          | 20.07      | 104.70               | N/A         | N/A            | Average  |
| 2  | *    | 5350.00         | 28.35          | 20.09      | 48.44                | -5.56       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5500MHz  |               |            |

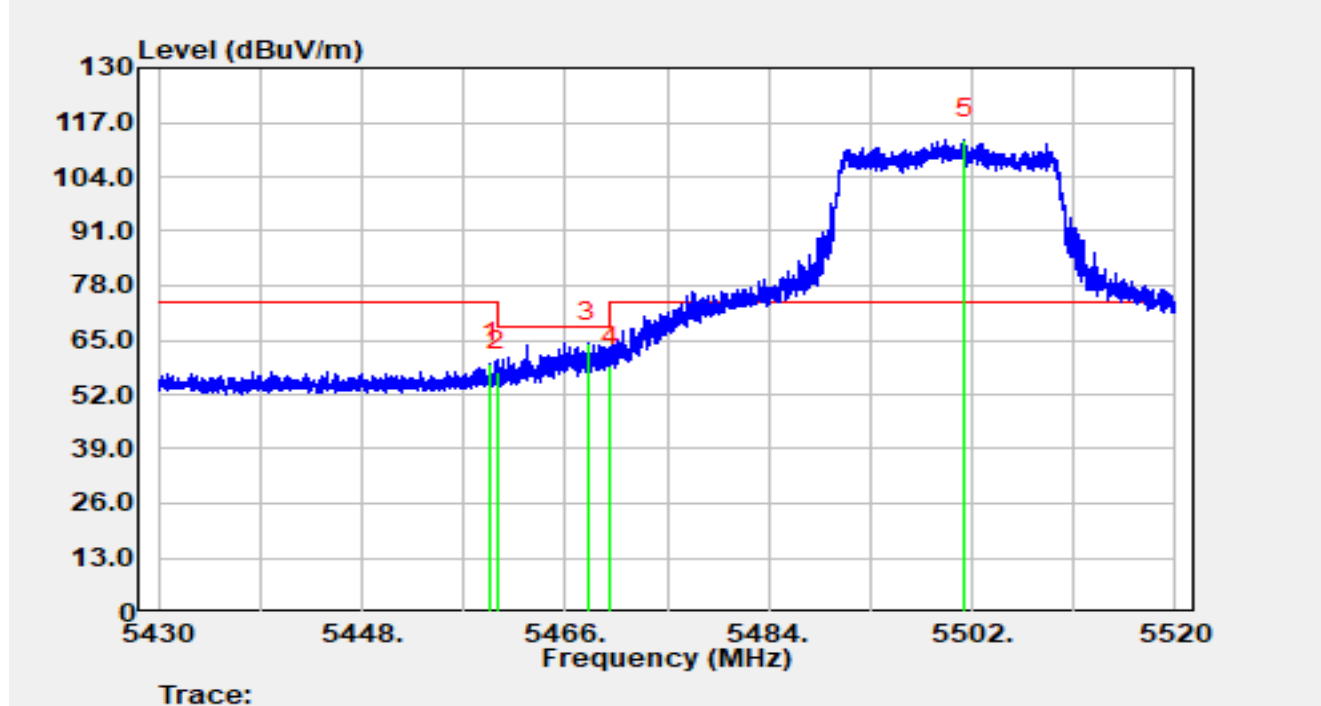


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.35         | 38.99          | 20.40      | 59.39                | -14.61      | 74.00          | Peak     |
| 2  |      | 5460.00         | 37.02          | 20.40      | 57.41                | -10.79      | 68.20          | Peak     |
| 3  | *    | 5467.97         | 44.09          | 20.33      | 64.41                | -3.79       | 68.20          | Peak     |
| 4  |      | 5470.00         | 38.33          | 20.31      | 58.64                | -9.56       | 68.20          | Peak     |
| 5  |      | 5501.32         | 92.48          | 20.47      | 112.95               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5500MHz  |               |            |

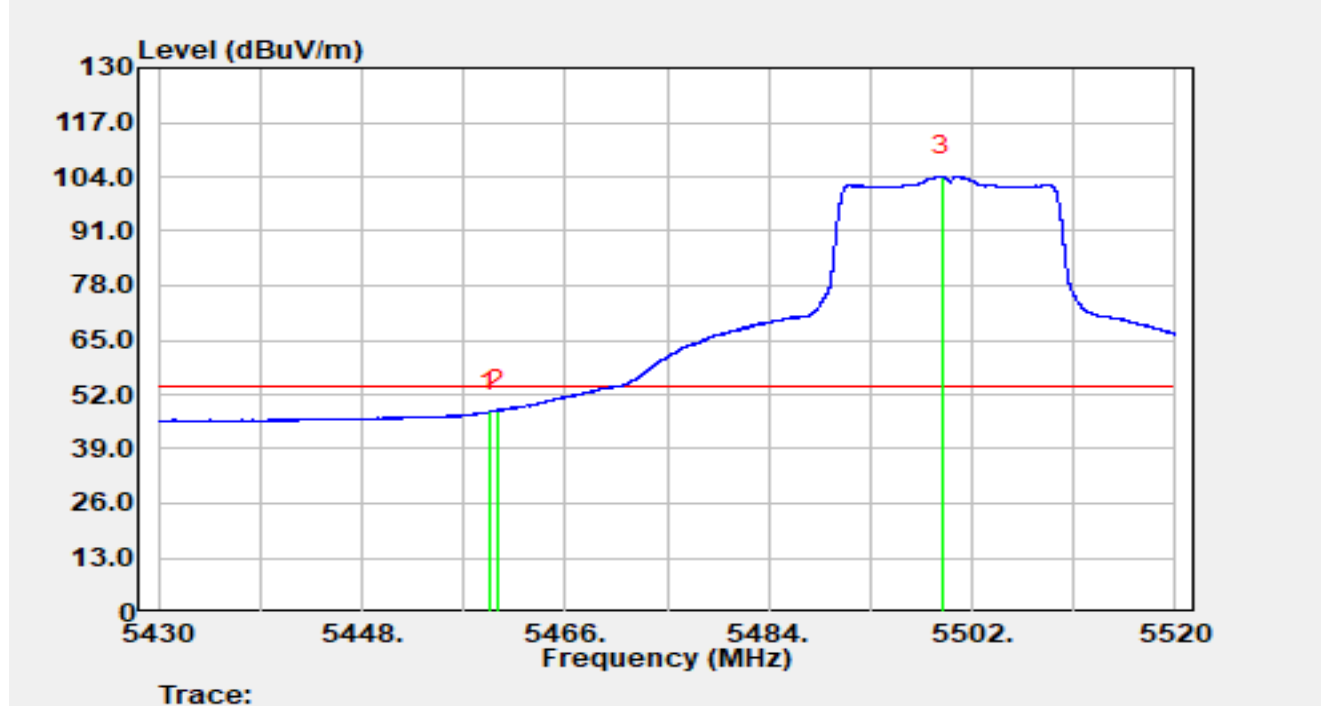


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.28         | 27.52          | 20.40      | 47.92                | -6.08       | 54.00          | Average  |
| 2  | *    | 5460.00         | 27.77          | 20.40      | 48.16                | -5.84       | 54.00          | Average  |
| 3  |      | 5499.36         | 83.66          | 20.46      | 104.12               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5500MHz  |               |            |

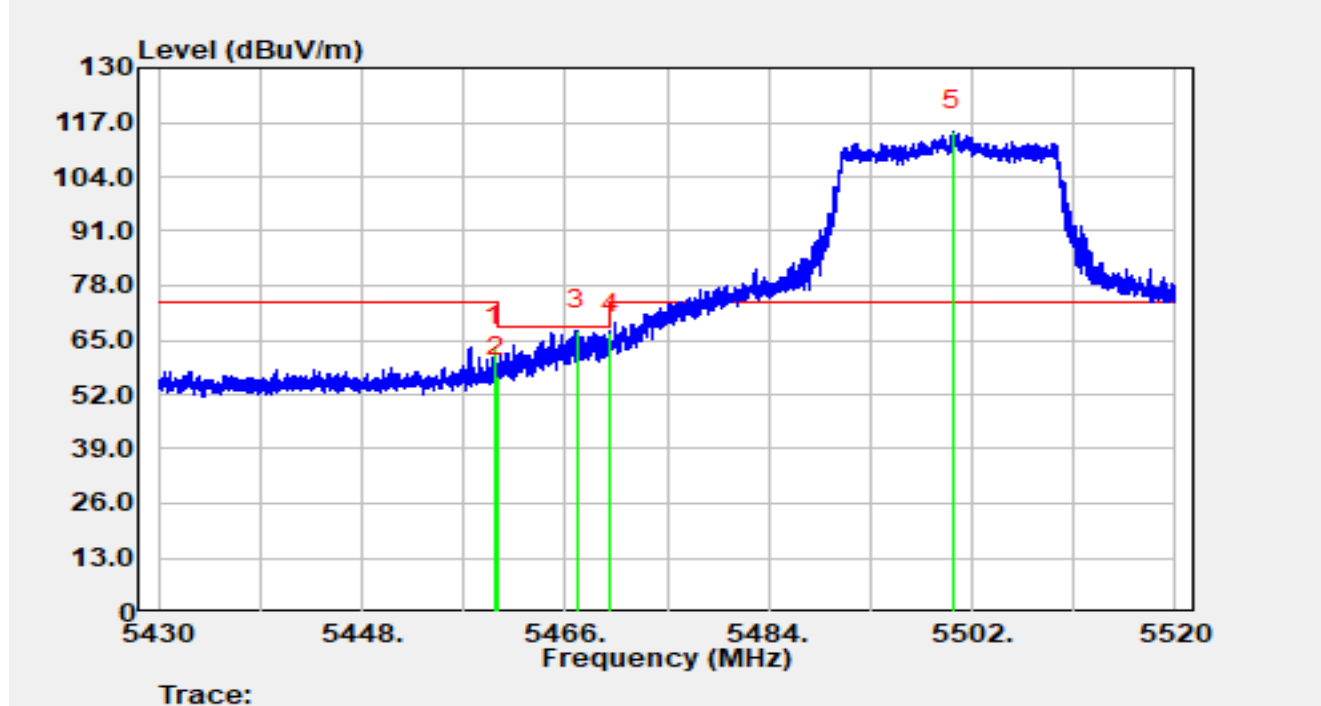


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.75         | 43.05          | 20.40      | 63.45                | -10.55      | 74.00          | Peak     |
| 2  |      | 5460.00         | 35.95          | 20.40      | 56.34                | -11.86      | 68.20          | Peak     |
| 3  | *    | 5467.04         | 47.03          | 20.33      | 67.36                | -0.84       | 68.20          | Peak     |
| 4  |      | 5470.00         | 46.36          | 20.31      | 66.67                | -1.53       | 68.20          | Peak     |
| 5  |      | 5500.29         | 94.49          | 20.47      | 114.95               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5500MHz  |               |            |

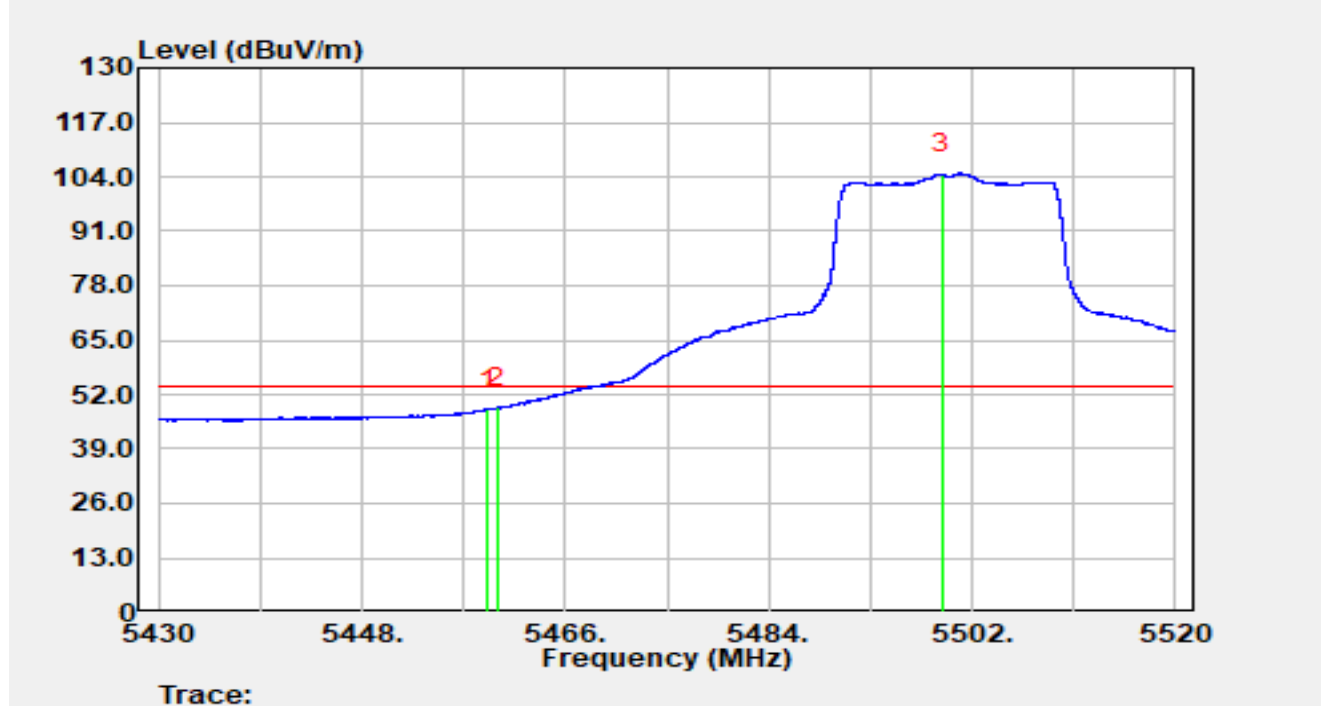


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.14         | 28.08          | 20.40      | 48.48                | -5.52       | 54.00          | Average  |
| 2  | *    | 5460.00         | 28.46          | 20.40      | 48.85                | -5.15       | 54.00          | Average  |
| 3  |      | 5499.38         | 84.25          | 20.46      | 104.71               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5700MHz  |               |            |

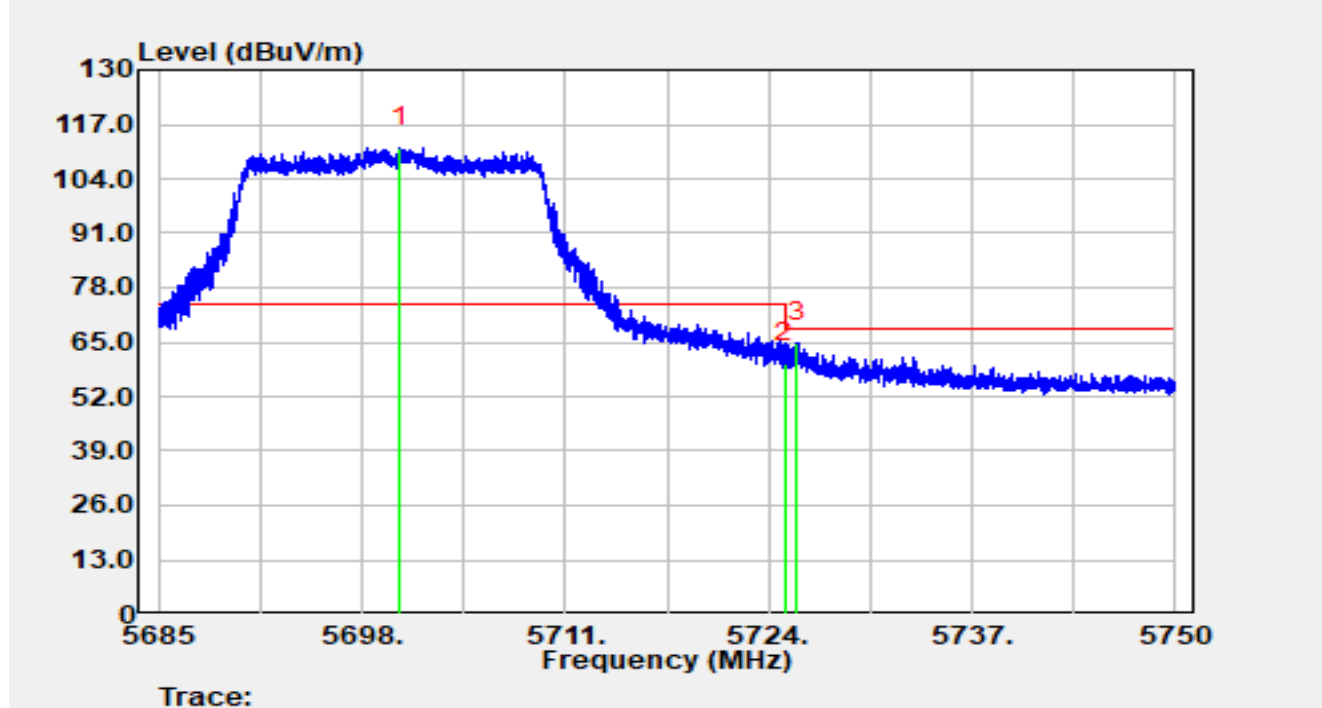


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5700.46         | 90.96          | 20.58      | 111.55               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 39.28          | 20.69      | 59.97                | -8.23       | 68.20          | Peak     |
| 3  | *    | 5725.84         | 44.28          | 20.69      | 64.97                | -3.23       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5700MHz  |               |            |

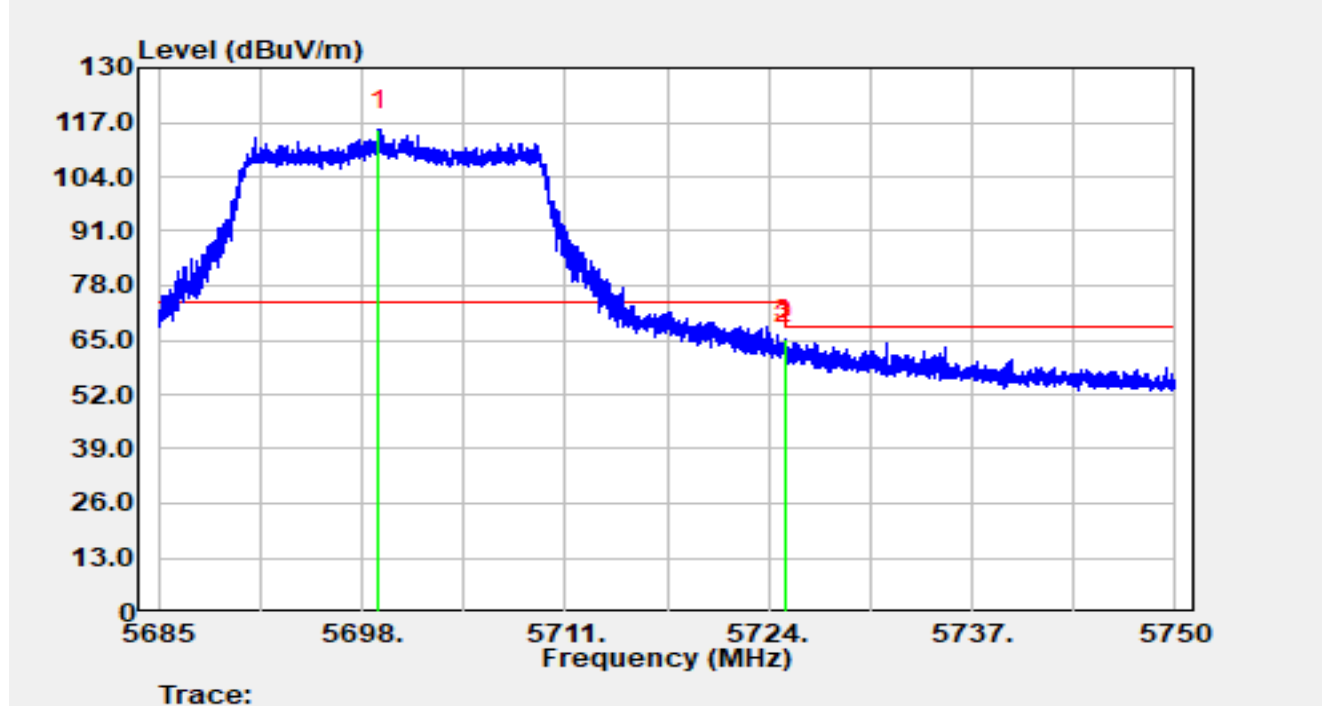


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5699.11         | 94.56          | 20.56      | 115.13               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 43.18          | 20.69      | 63.87                | -4.33       | 68.20          | Peak     |
| 3  | *    | 5725.02         | 44.45          | 20.69      | 65.14                | -3.06       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5745MHz  |               |            |

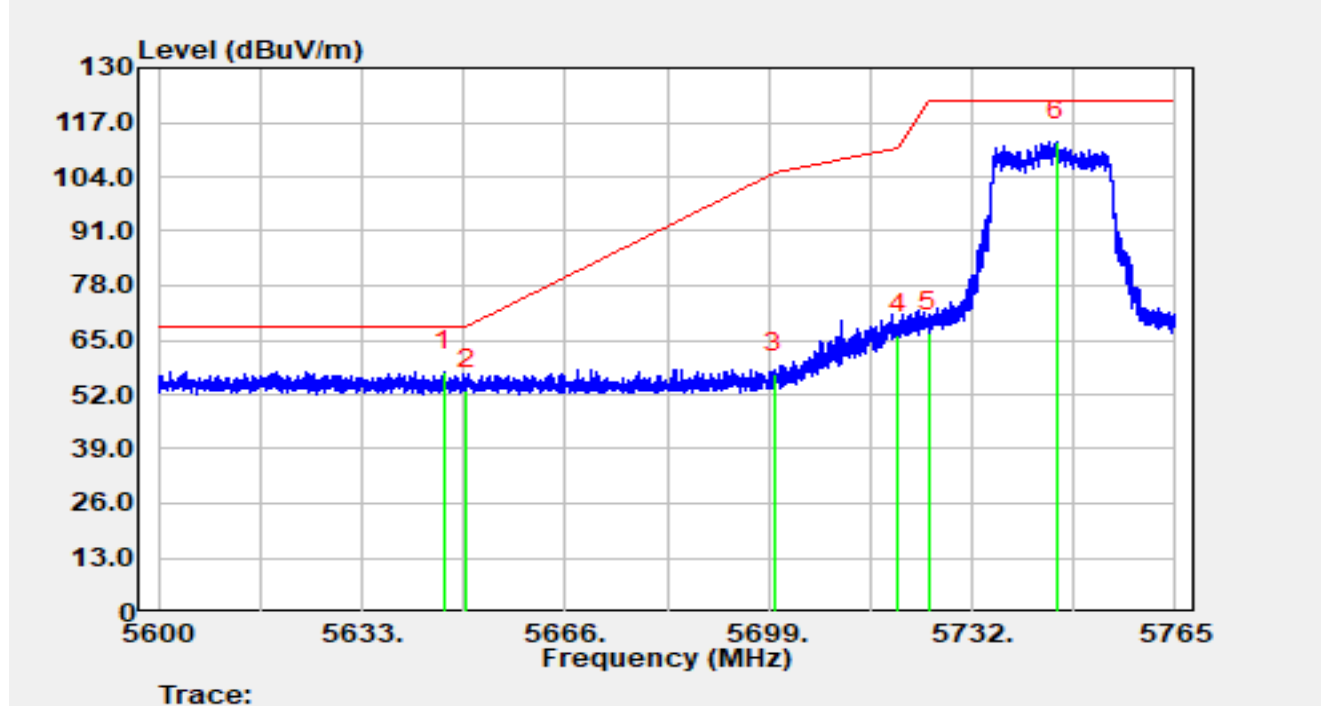


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5646.30         | 37.20          | 20.38      | 57.59                | -10.61      | 68.20          | Peak     |
| 2  |      | 5650.00         | 32.83          | 20.37      | 53.20                | -15.00      | 68.20          | Peak     |
| 3  |      | 5700.00         | 36.41          | 20.58      | 56.99                | -48.21      | 105.20         | Peak     |
| 4  |      | 5720.00         | 45.65          | 20.70      | 66.35                | -44.45      | 110.80         | Peak     |
| 5  |      | 5725.00         | 46.07          | 20.69      | 66.76                | -55.44      | 122.20         | Peak     |
| 6  |      | 5745.73         | 91.88          | 20.58      | 112.46               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5745MHz  |               |            |

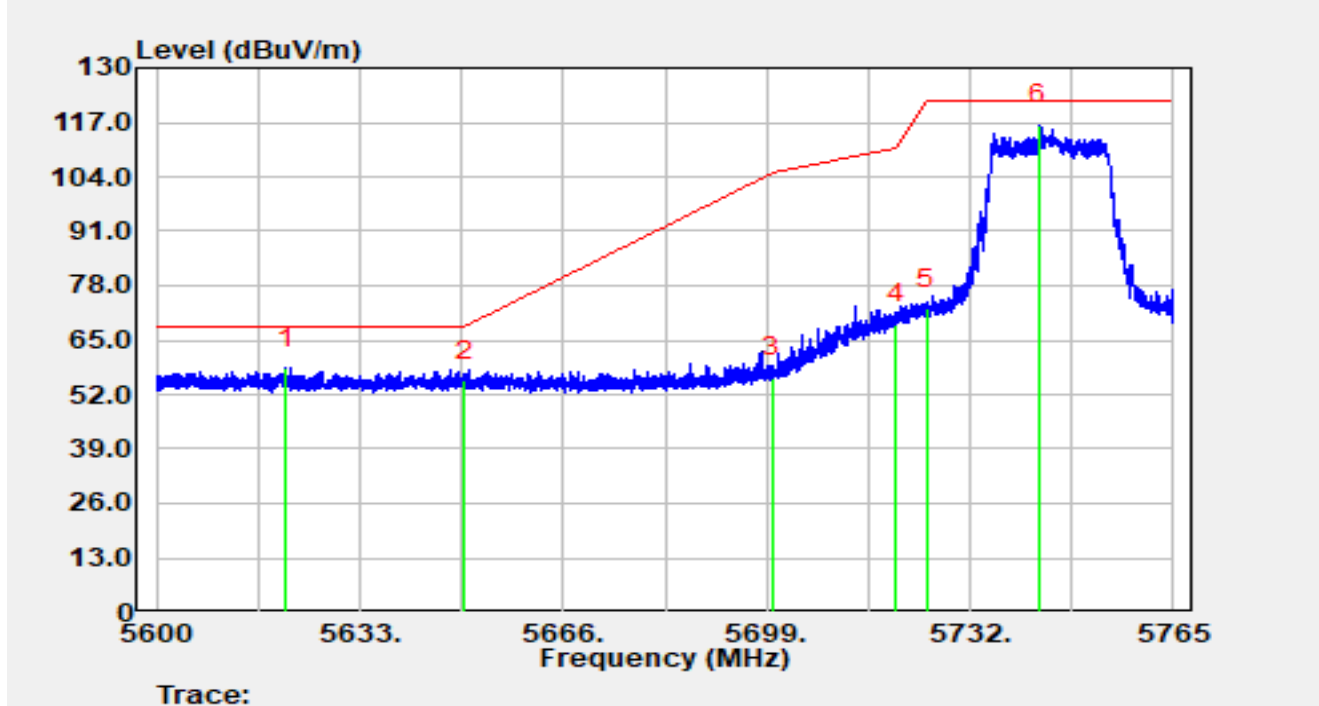


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5621.05         | 37.79          | 20.49      | 58.28                | -9.92       | 68.20          | Peak     |
| 2  |      | 5650.00         | 35.04          | 20.37      | 55.41                | -12.79      | 68.20          | Peak     |
| 3  |      | 5700.00         | 35.52          | 20.58      | 56.10                | -49.10      | 105.20         | Peak     |
| 4  |      | 5720.00         | 48.13          | 20.70      | 68.83                | -41.98      | 110.81         | Peak     |
| 5  |      | 5725.00         | 51.85          | 20.69      | 72.53                | -49.67      | 122.20         | Peak     |
| 6  |      | 5743.12         | 95.73          | 20.59      | 116.31               | N/A         | N/A            | Peak     |

#### Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5825MHz  |               |            |

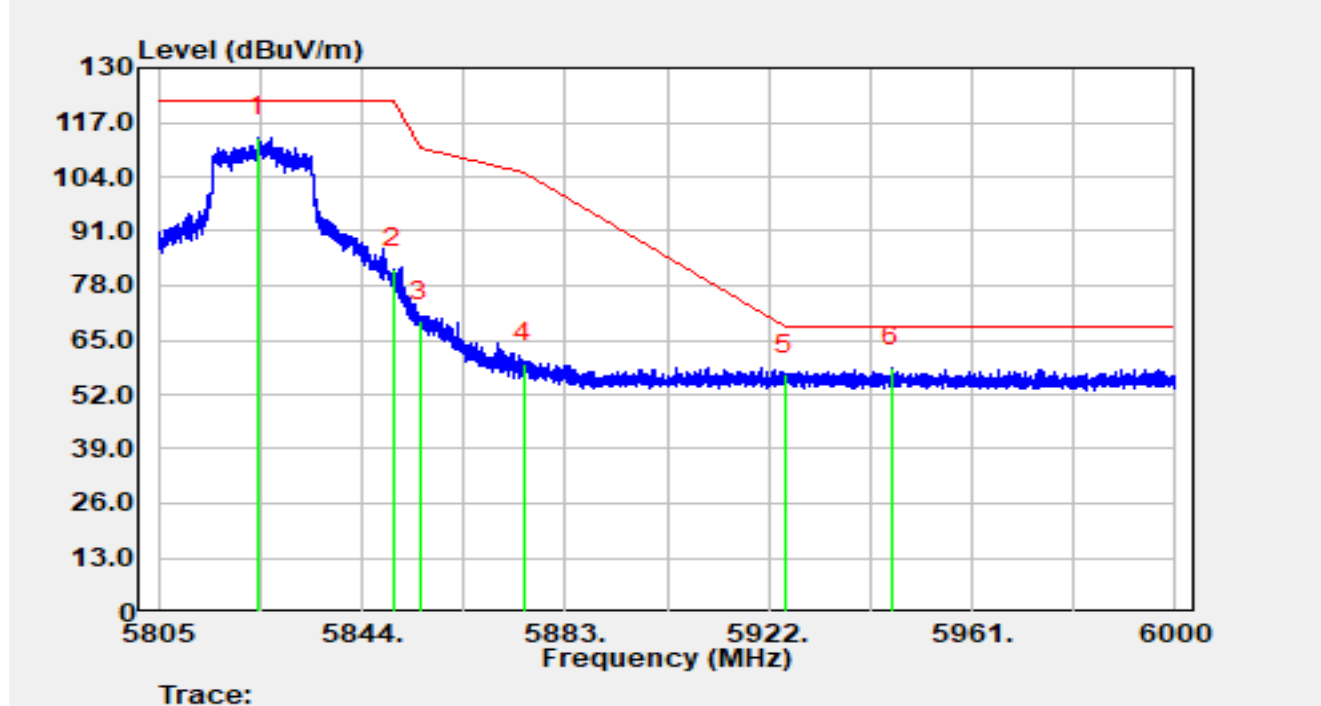


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5823.99         | 92.36          | 21.00      | 113.36               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 61.25          | 20.79      | 82.04                | -40.16      | 122.20         | Peak     |
| 3  |      | 5855.00         | 48.69          | 20.76      | 69.45                | -41.35      | 110.80         | Peak     |
| 4  |      | 5875.00         | 38.81          | 20.78      | 59.58                | -45.62      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.77          | 21.12      | 56.89                | -11.31      | 68.20          | Peak     |
| 6  | *    | 5945.50         | 37.54          | 20.87      | 58.42                | -9.78       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-12 |
| Temperature | 23.6°C                                | Humidity      | 45.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Dick Shen  |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE20 at 5825MHz  |               |            |

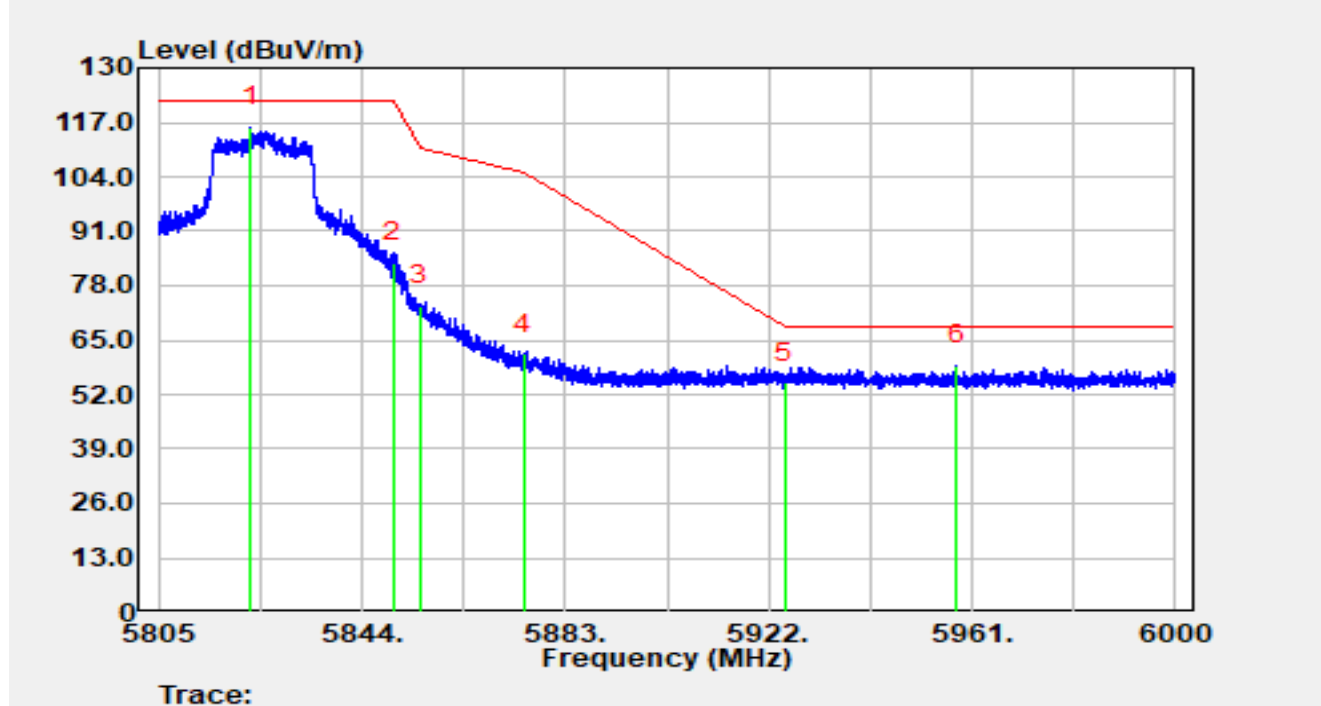


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5822.77         | 94.79          | 20.99      | 115.78               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 62.65          | 20.79      | 83.44                | -38.76      | 122.20         | Peak     |
| 3  |      | 5855.00         | 52.44          | 20.76      | 73.20                | -37.60      | 110.80         | Peak     |
| 4  |      | 5875.00         | 41.03          | 20.78      | 61.81                | -43.39      | 105.20         | Peak     |
| 5  |      | 5925.00         | 33.65          | 21.12      | 54.77                | -13.43      | 68.20          | Peak     |
| 6  | *    | 5957.96         | 38.26          | 20.81      | 59.08                | -9.12       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5190MHz  |               |            |

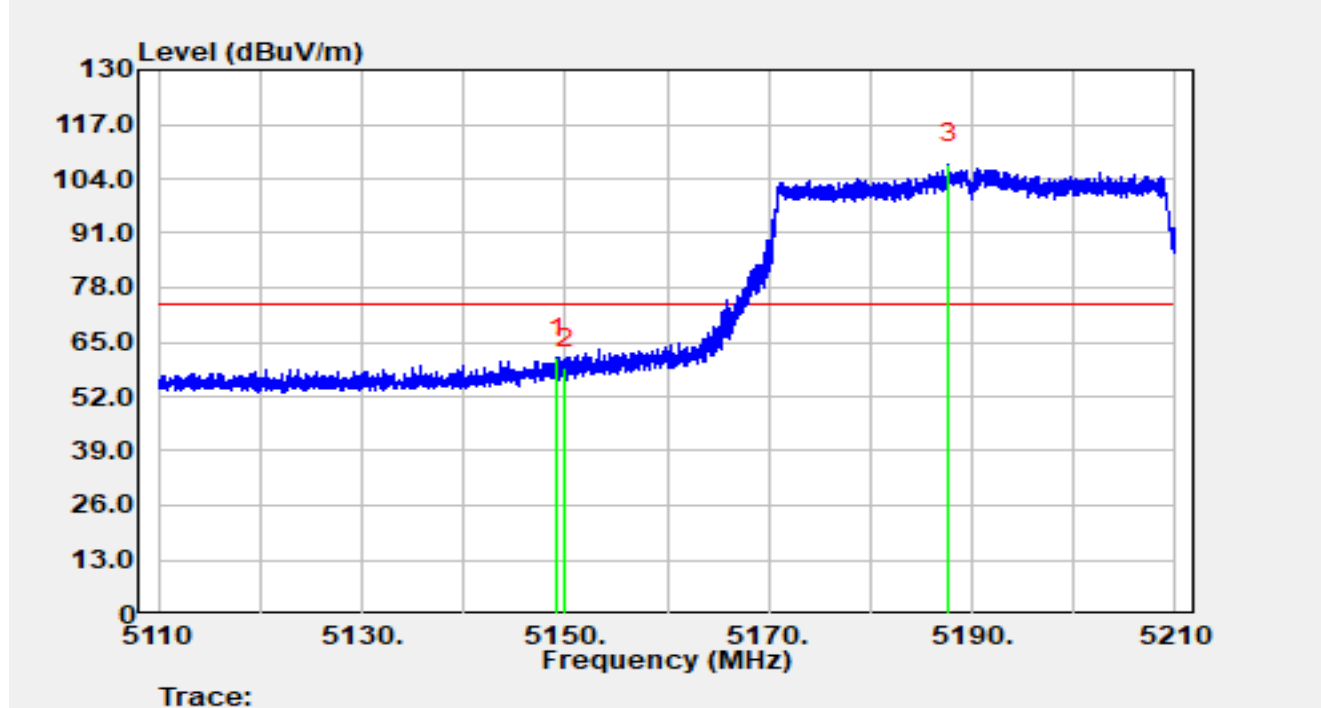


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.25         | 41.04          | 20.14      | 61.18                | -12.82      | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.59          | 20.14      | 58.73                | -15.27      | 74.00          | Peak     |
| 3  |      | 5187.65         | 87.69          | 19.98      | 107.67               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5190MHz  |               |            |

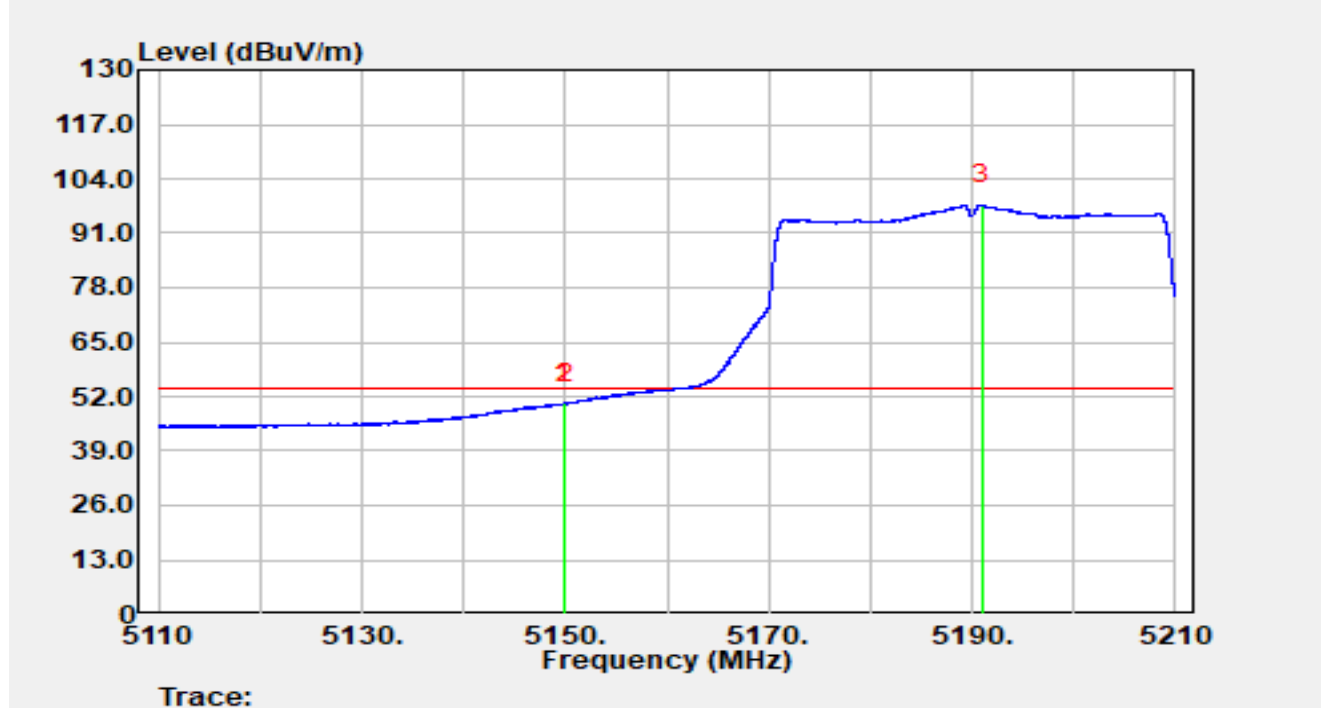


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5149.80         | 30.13          | 20.14      | 50.26                | -3.74       | 54.00          | Average  |
| 2  | *    | 5150.00         | 30.17          | 20.14      | 50.31                | -3.69       | 54.00          | Average  |
| 3  |      | 5190.95         | 77.65          | 20.00      | 97.65                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5190MHz  |               |            |

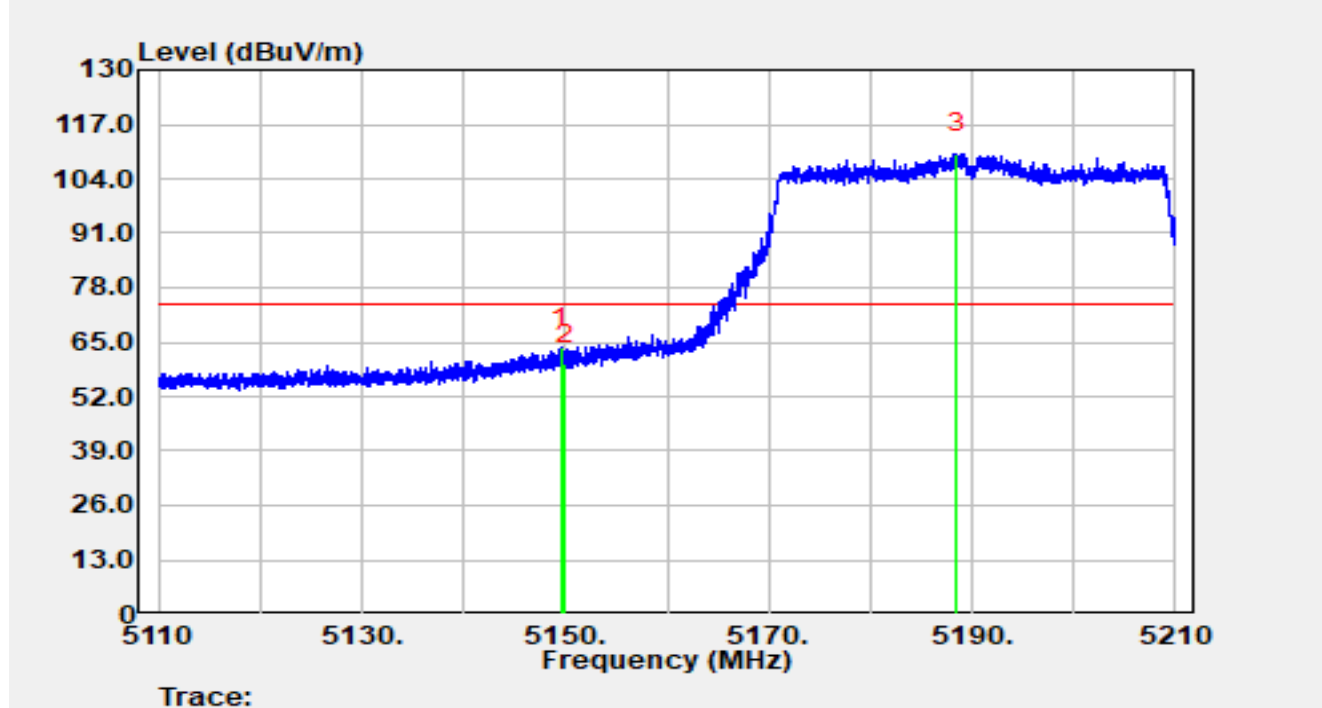


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.65         | 43.44          | 20.14      | 63.57                | -10.43      | 74.00          | Peak     |
| 2  |      | 5150.00         | 39.70          | 20.14      | 59.83                | -14.17      | 74.00          | Peak     |
| 3  |      | 5188.54         | 89.93          | 19.98      | 109.91               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5190MHz  |               |            |

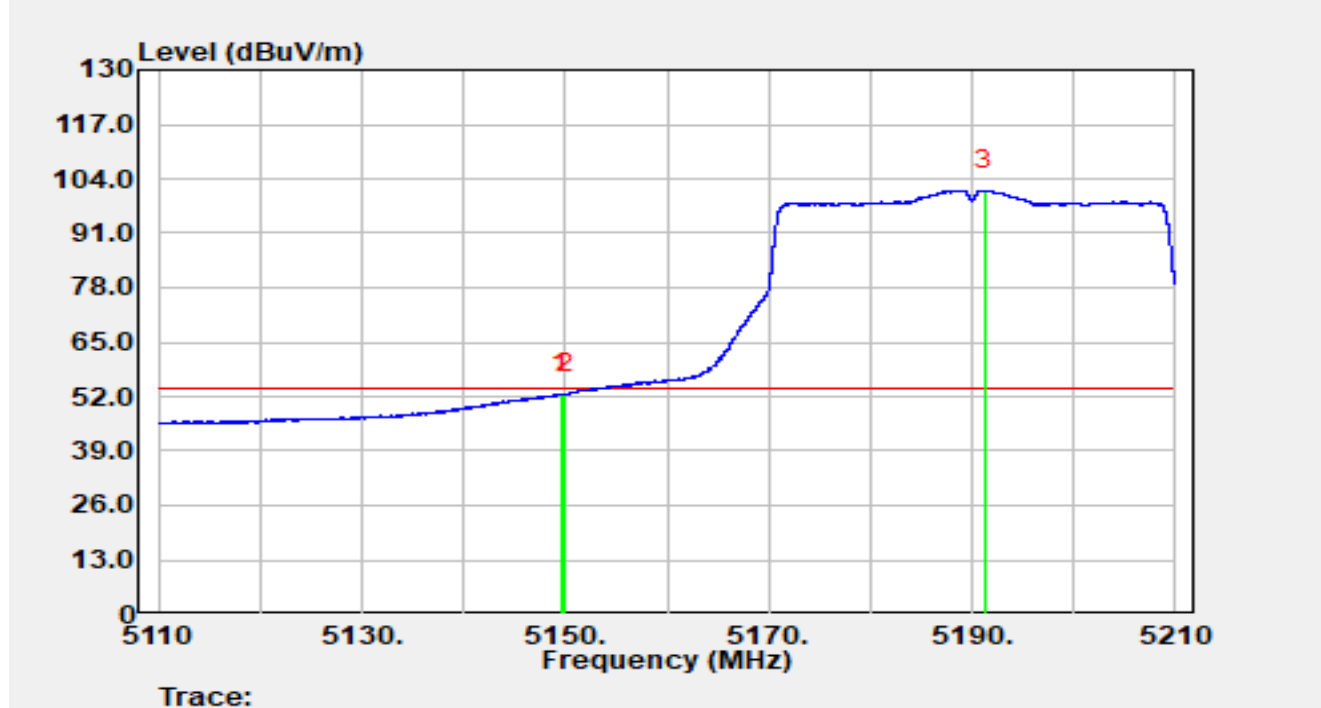


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5149.63         | 32.37          | 20.14      | 52.51                | -1.49       | 54.00          | Average  |
| 2  | *    | 5150.00         | 32.52          | 20.14      | 52.66                | -1.34       | 54.00          | Average  |
| 3  |      | 5191.27         | 81.28          | 20.00      | 101.28               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5310MHz  |               |            |

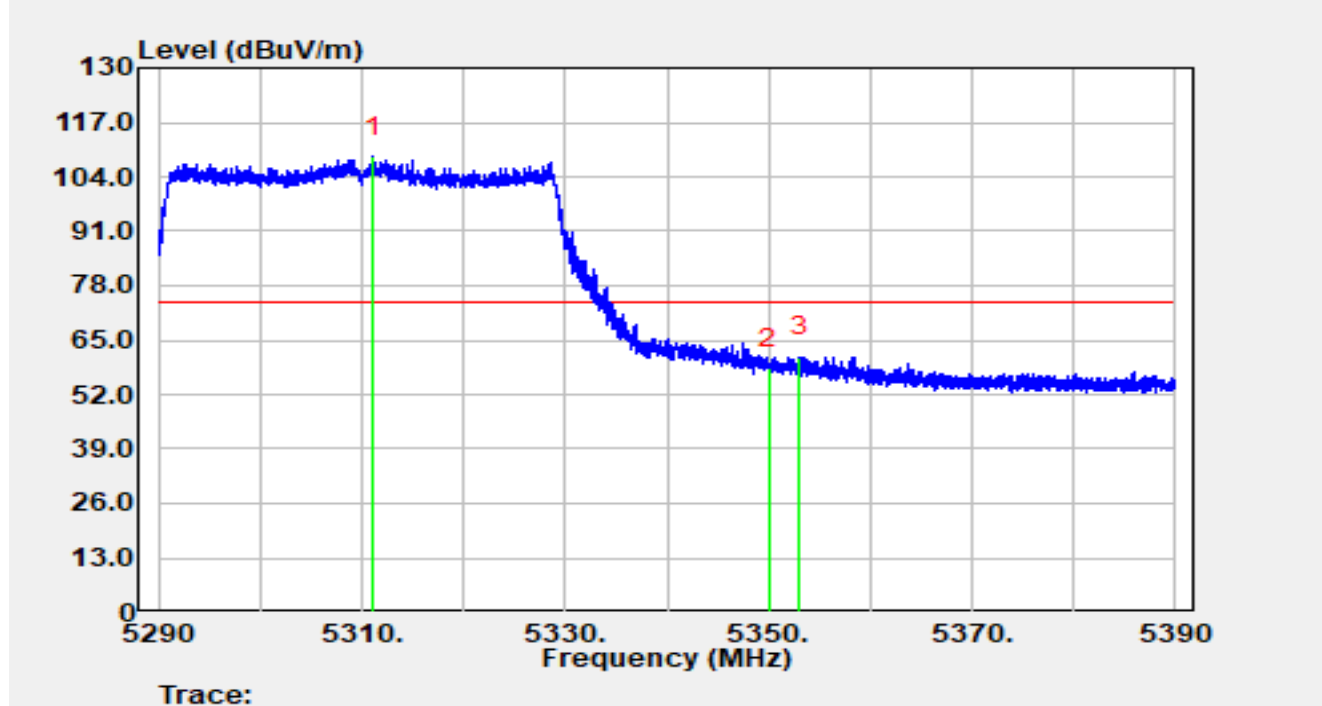


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5311.16         | 88.65          | 20.03      | 108.67               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 38.20          | 20.09      | 58.29                | -15.71      | 74.00          | Peak     |
| 3  | *    | 5353.09         | 40.99          | 20.07      | 61.06                | -12.94      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5310MHz  |               |            |

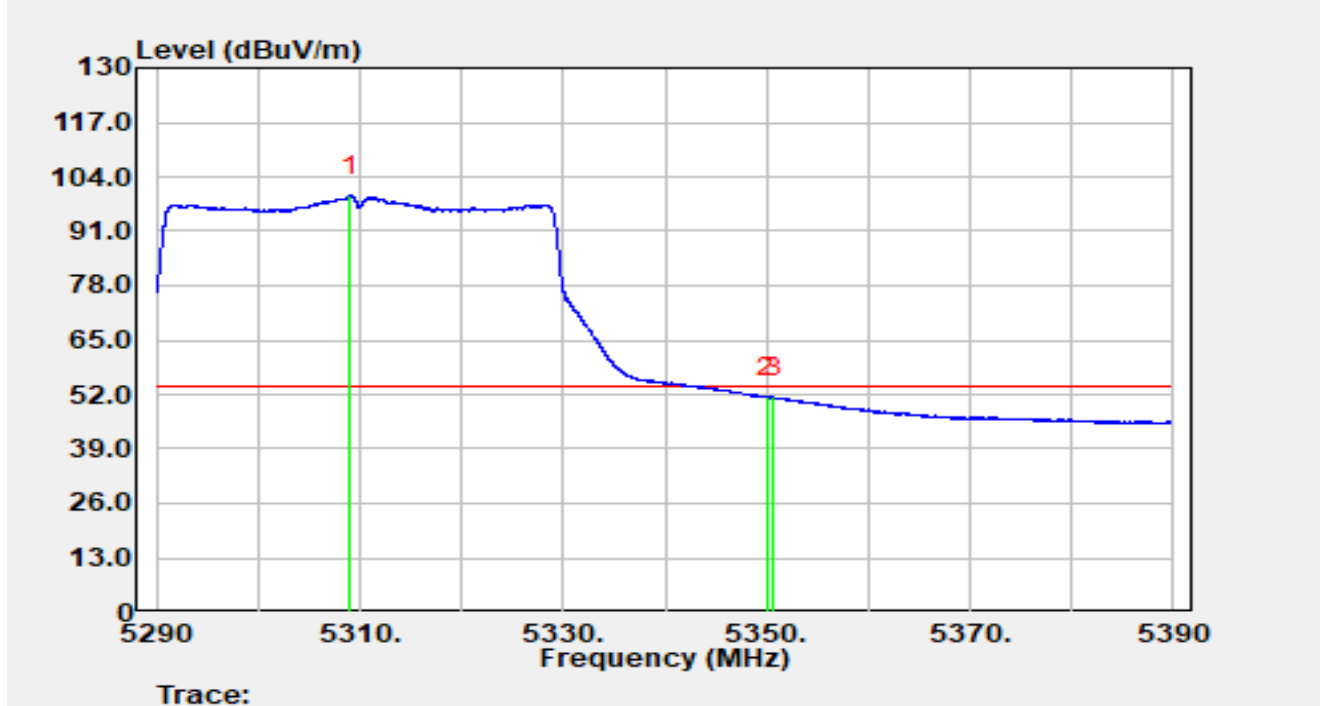


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5309.07         | 79.56          | 20.02      | 99.57                | N/A         | N/A            | Average  |
| 2  | *    | 5350.00         | 31.36          | 20.09      | 51.44                | -2.56       | 54.00          | Average  |
| 3  |      | 5350.61         | 31.19          | 20.08      | 51.27                | -2.73       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5310MHz  |               |            |

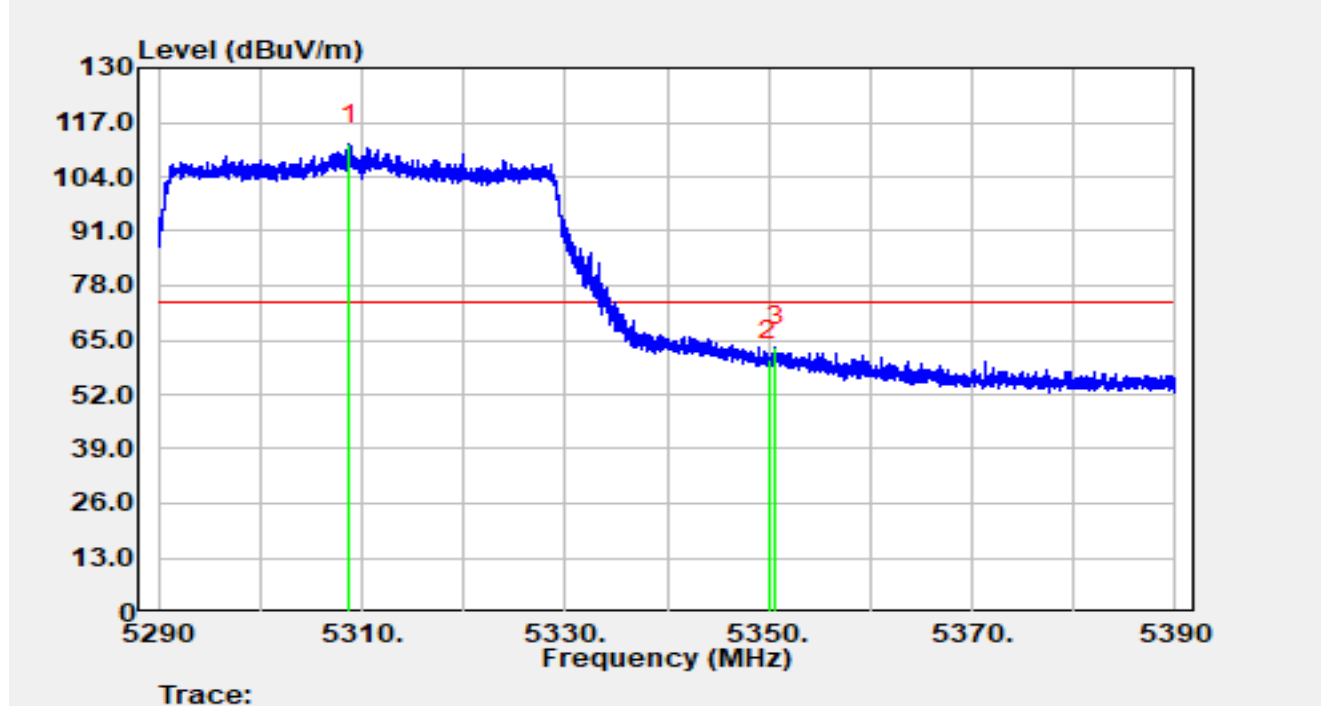


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5308.82         | 91.60          | 20.01      | 111.61               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 40.06          | 20.09      | 60.14                | -13.86      | 74.00          | Peak     |
| 3  | *    | 5350.64         | 43.29          | 20.08      | 63.38                | -10.62      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5310MHz  |               |            |

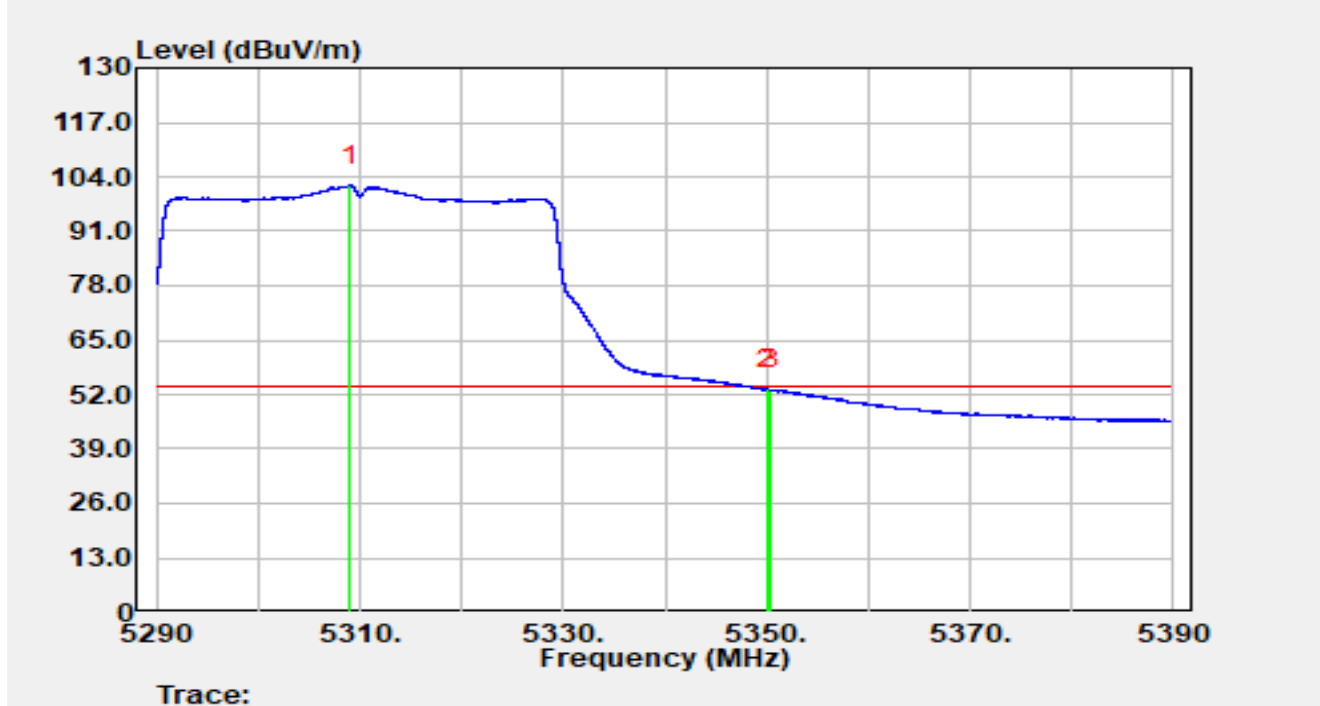


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5308.97         | 81.83          | 20.01      | 101.84               | N/A         | N/A            | Average  |
| 2  | *    | 5350.00         | 33.16          | 20.09      | 53.25                | -0.75       | 54.00          | Average  |
| 3  |      | 5350.37         | 33.10          | 20.08      | 53.19                | -0.81       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5510MHz  |               |            |

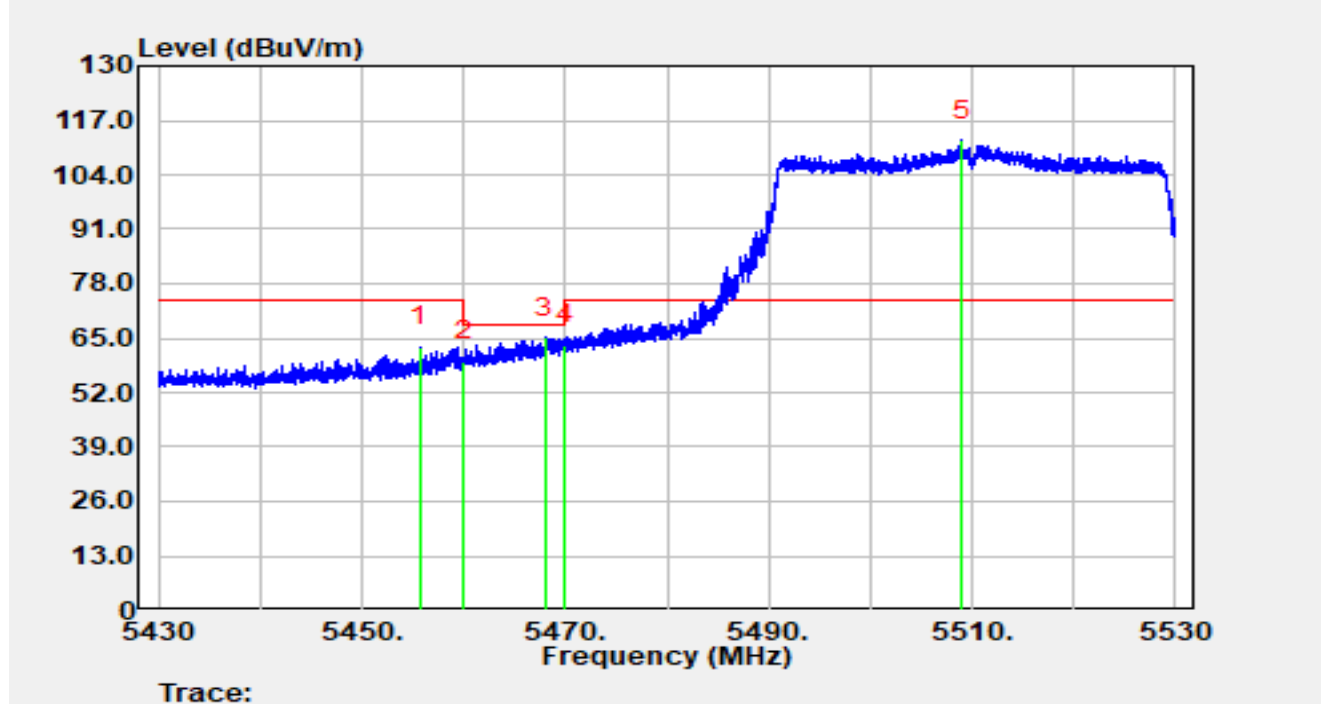


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5455.76         | 42.38          | 20.43      | 62.80                | -11.20      | 74.00          | Peak     |
| 2  |      | 5460.00         | 38.99          | 20.40      | 59.39                | -8.81       | 68.20          | Peak     |
| 3  | *    | 5468.00         | 44.72          | 20.33      | 65.04                | -3.16       | 68.20          | Peak     |
| 4  |      | 5470.00         | 43.01          | 20.31      | 63.32                | -4.88       | 68.20          | Peak     |
| 5  |      | 5508.95         | 91.78          | 20.50      | 112.29               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5510MHz  |               |            |

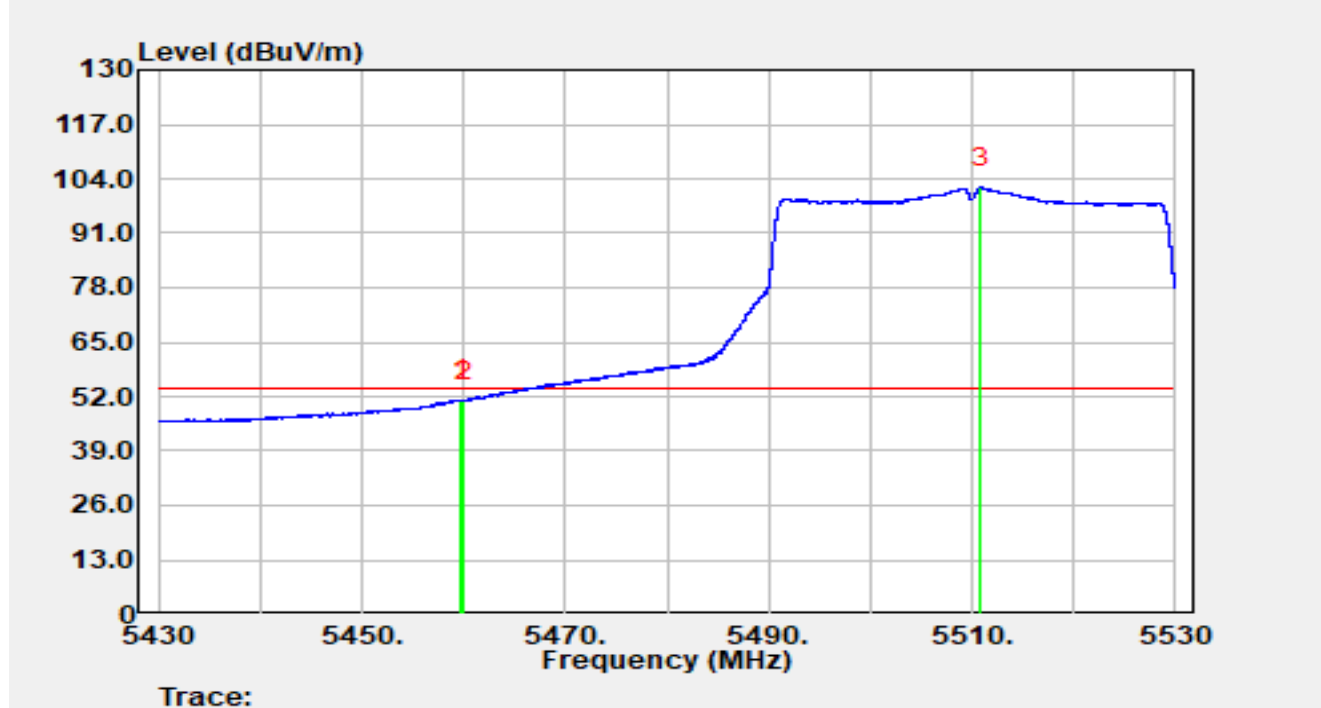


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.77         | 30.84          | 20.40      | 51.23                | -2.77       | 54.00          | Average  |
| 2  |      | 5460.00         | 30.53          | 20.40      | 50.92                | -3.08       | 54.00          | Average  |
| 3  |      | 5510.85         | 81.39          | 20.51      | 101.90               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5510MHz  |               |            |

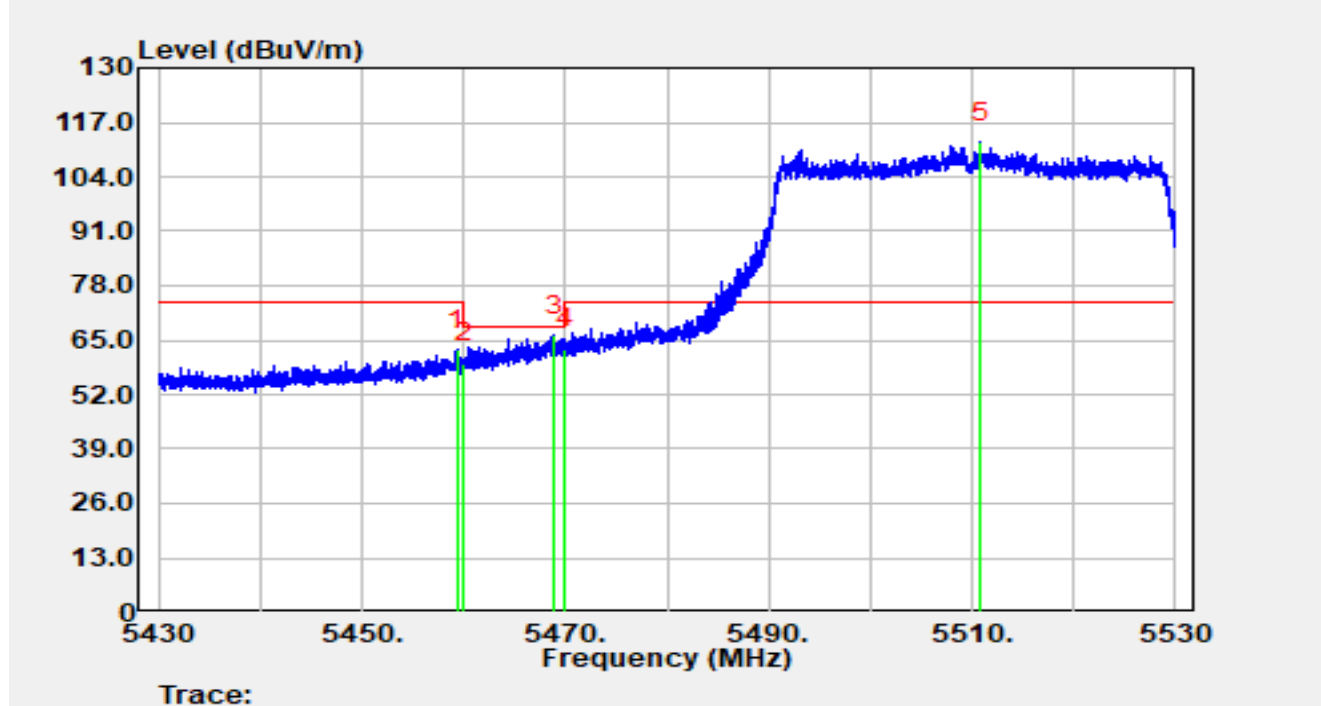


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.31         | 42.30          | 20.40      | 62.70                | -11.30      | 74.00          | Peak     |
| 2  |      | 5460.00         | 39.04          | 20.40      | 59.44                | -8.76       | 68.20          | Peak     |
| 3  | *    | 5468.91         | 45.79          | 20.32      | 66.11                | -2.09       | 68.20          | Peak     |
| 4  |      | 5470.00         | 42.51          | 20.31      | 62.81                | -5.39       | 68.20          | Peak     |
| 5  |      | 5510.82         | 91.83          | 20.51      | 112.34               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5510MHz  |               |            |

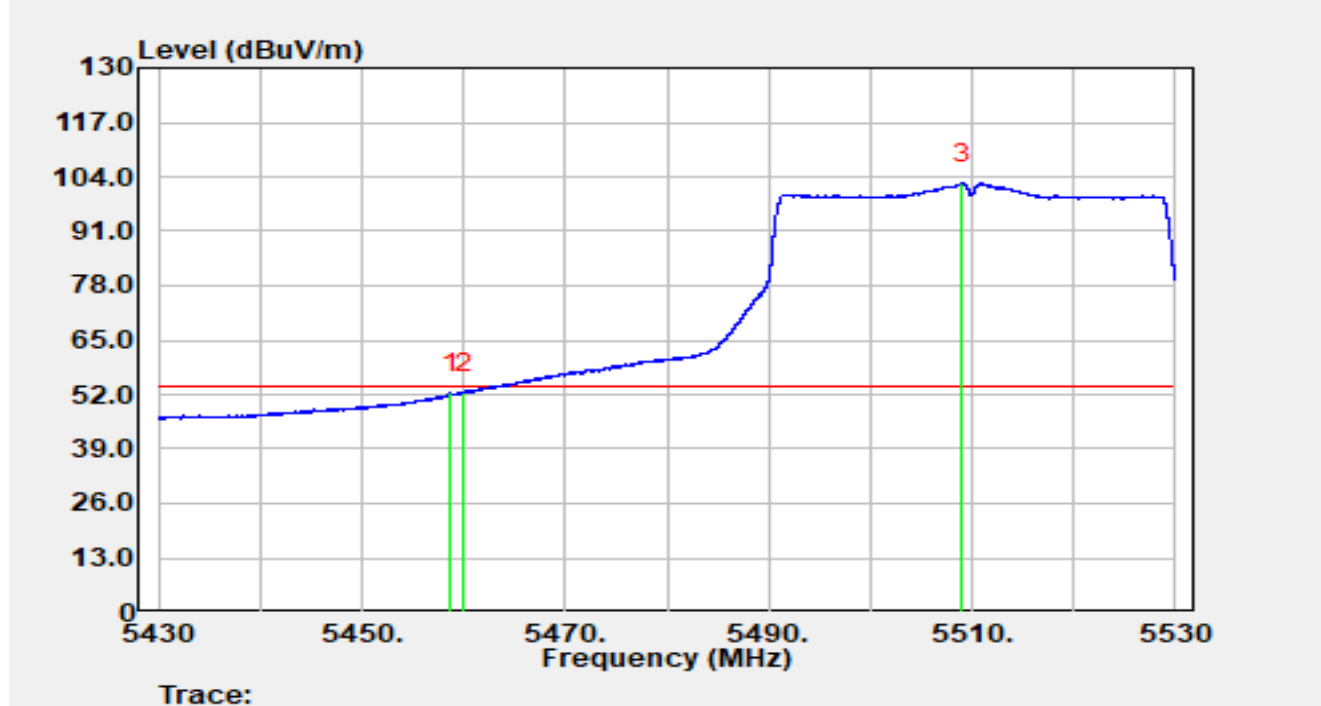


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5458.71         | 31.88          | 20.41      | 52.29                | -1.71       | 54.00          | Average  |
| 2  | *    | 5460.00         | 32.01          | 20.40      | 52.40                | -1.60       | 54.00          | Average  |
| 3  |      | 5509.07         | 81.95          | 20.50      | 102.45               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5670MHz  |               |            |

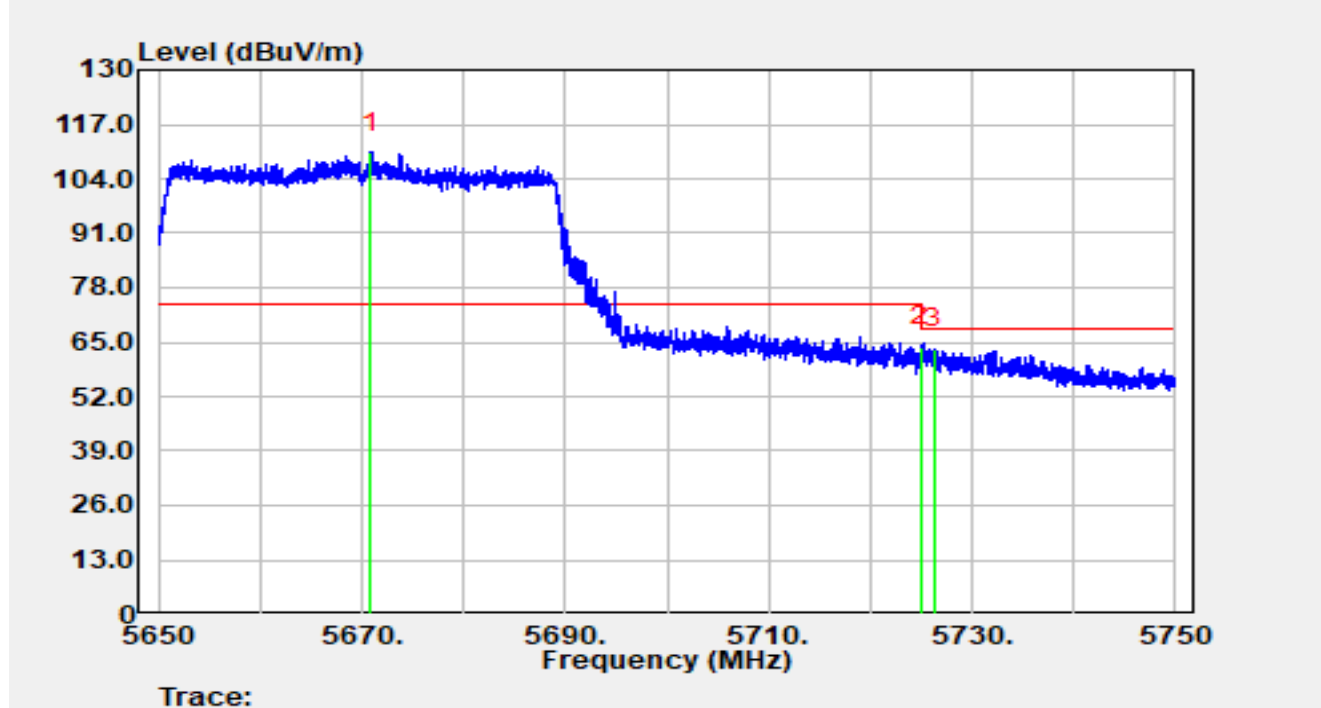


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5670.92         | 89.98          | 20.32      | 110.31               | N/A         | N/A            | Peak     |
| 2  | *    | 5725.00         | 43.16          | 20.69      | 63.84                | -4.36       | 68.20          | Peak     |
| 3  |      | 5726.28         | 42.67          | 20.68      | 63.35                | -4.85       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5670MHz  |               |            |

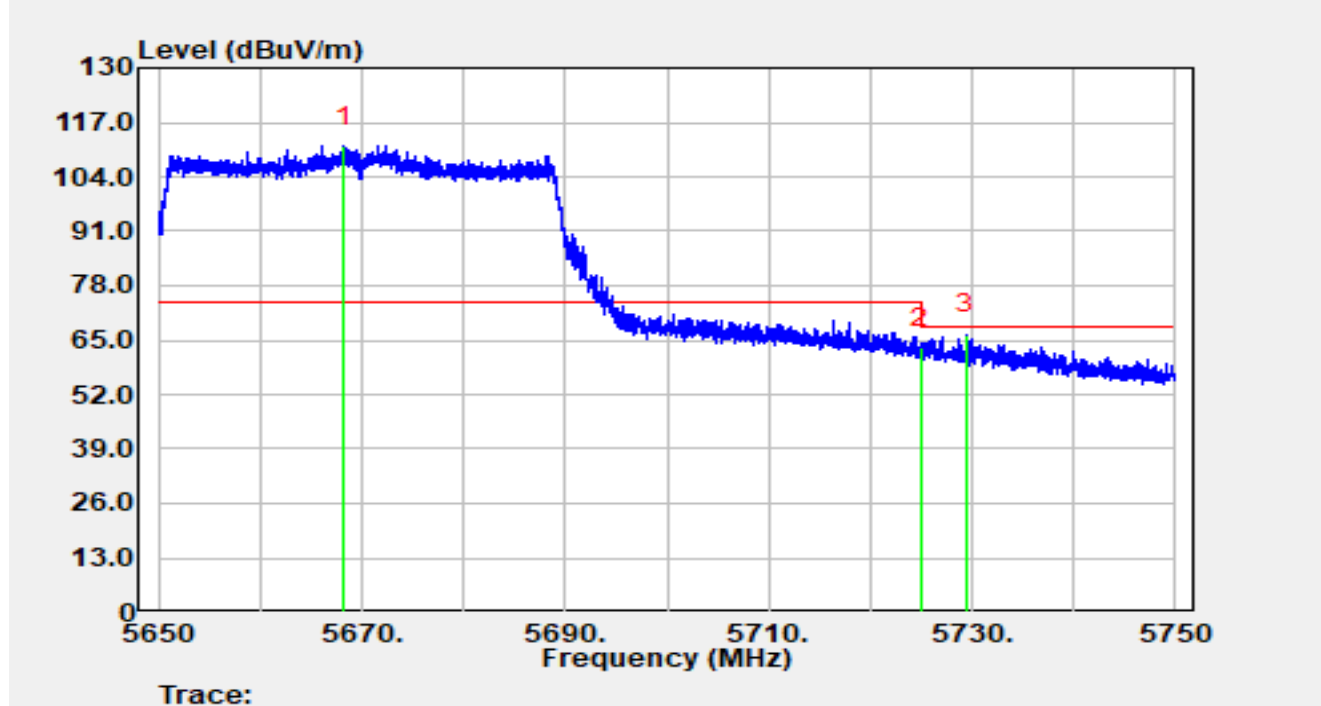


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5668.23         | 91.03          | 20.33      | 111.35               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 42.42          | 20.69      | 63.10                | -5.10       | 68.20          | Peak     |
| 3  | *    | 5729.46         | 45.66          | 20.66      | 66.33                | -1.87       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5755MHz  |               |            |

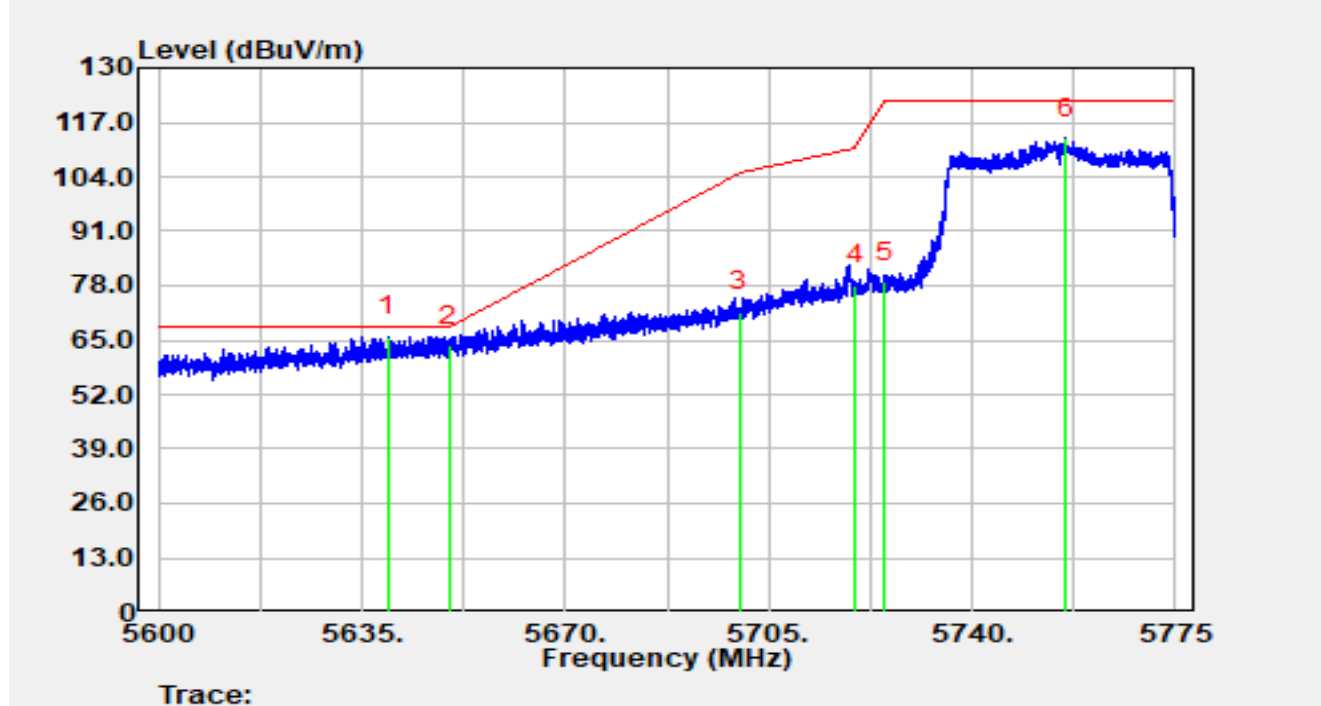


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5639.46         | 45.51          | 20.41      | 65.92                | -2.28       | 68.20          | Peak     |
| 2  |      | 5650.00         | 43.18          | 20.37      | 63.55                | -4.65       | 68.20          | Peak     |
| 3  |      | 5700.00         | 51.22          | 20.58      | 71.80                | -33.40      | 105.20         | Peak     |
| 4  |      | 5720.00         | 57.31          | 20.70      | 78.00                | -32.80      | 110.80         | Peak     |
| 5  |      | 5725.00         | 58.24          | 20.69      | 78.93                | -43.27      | 122.20         | Peak     |
| 6  |      | 5756.14         | 92.70          | 20.58      | 113.28               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5755MHz  |               |            |

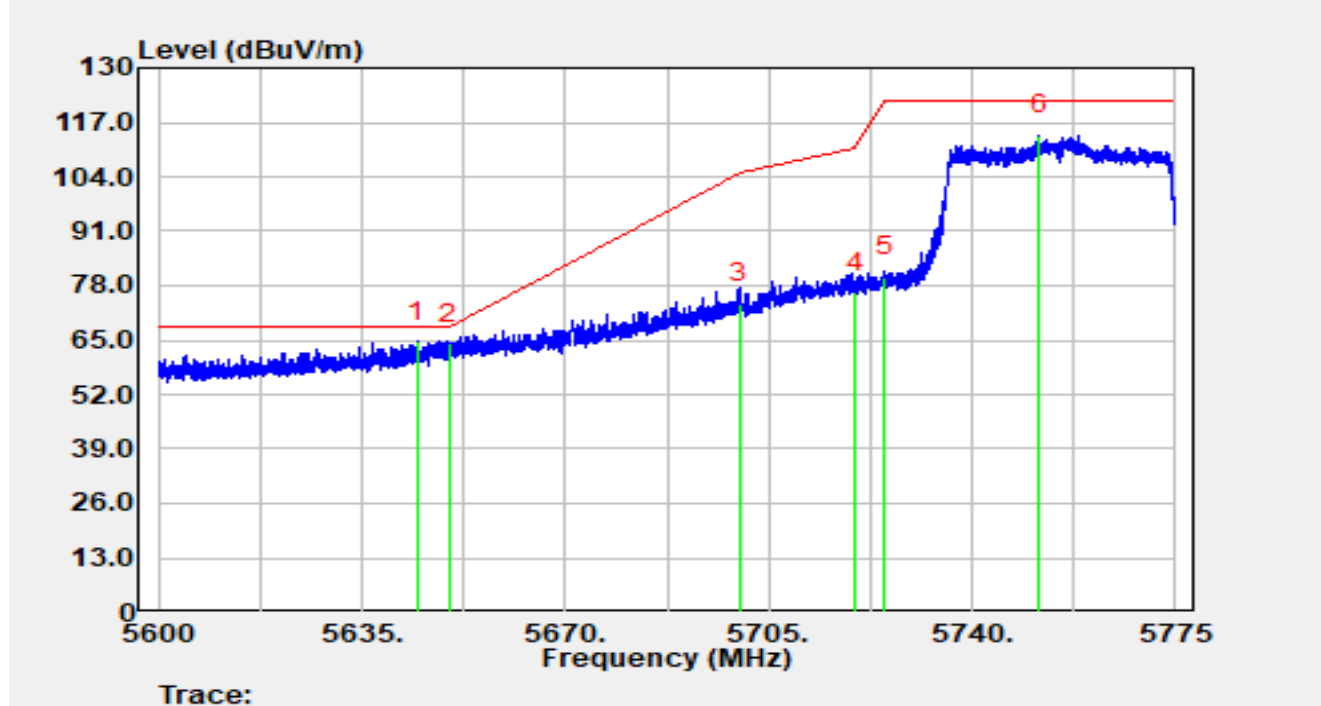


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5644.56         | 44.17          | 20.39      | 64.56                | -3.64       | 68.20          | Peak     |
| 2  |      | 5650.00         | 43.88          | 20.37      | 64.25                | -3.95       | 68.20          | Peak     |
| 3  |      | 5700.00         | 53.21          | 20.58      | 73.78                | -31.42      | 105.20         | Peak     |
| 4  |      | 5720.00         | 55.68          | 20.70      | 76.37                | -34.43      | 110.80         | Peak     |
| 5  |      | 5725.00         | 59.43          | 20.69      | 80.12                | -42.08      | 122.20         | Peak     |
| 6  |      | 5751.52         | 93.44          | 20.58      | 114.02               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5795MHz  |               |            |

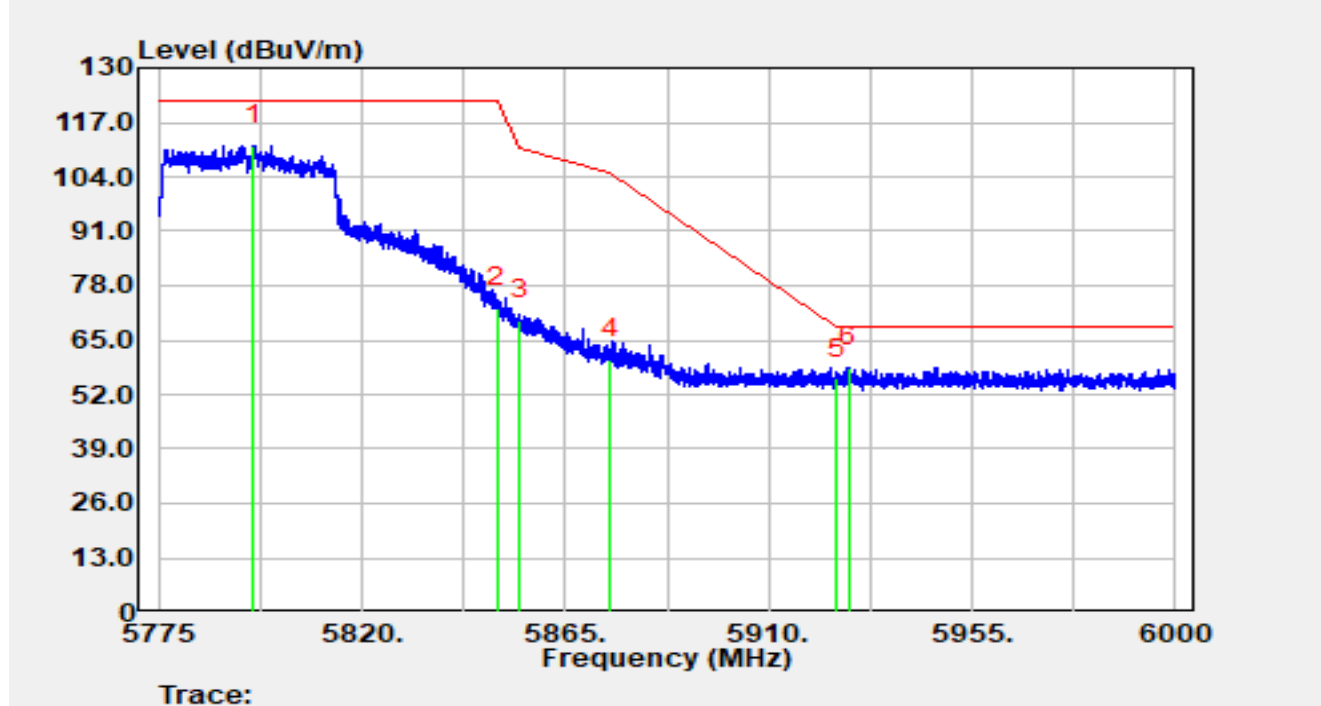


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5796.13         | 90.74          | 20.72      | 111.46               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 51.94          | 20.79      | 72.73                | -49.47      | 122.20         | Peak     |
| 3  |      | 5855.00         | 49.10          | 20.76      | 69.86                | -40.94      | 110.80         | Peak     |
| 4  |      | 5875.00         | 39.63          | 20.78      | 60.41                | -44.79      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.65          | 21.12      | 55.77                | -12.43      | 68.20          | Peak     |
| 6  | *    | 5927.60         | 37.34          | 21.11      | 58.45                | -9.75       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE40 at 5795MHz  |               |            |

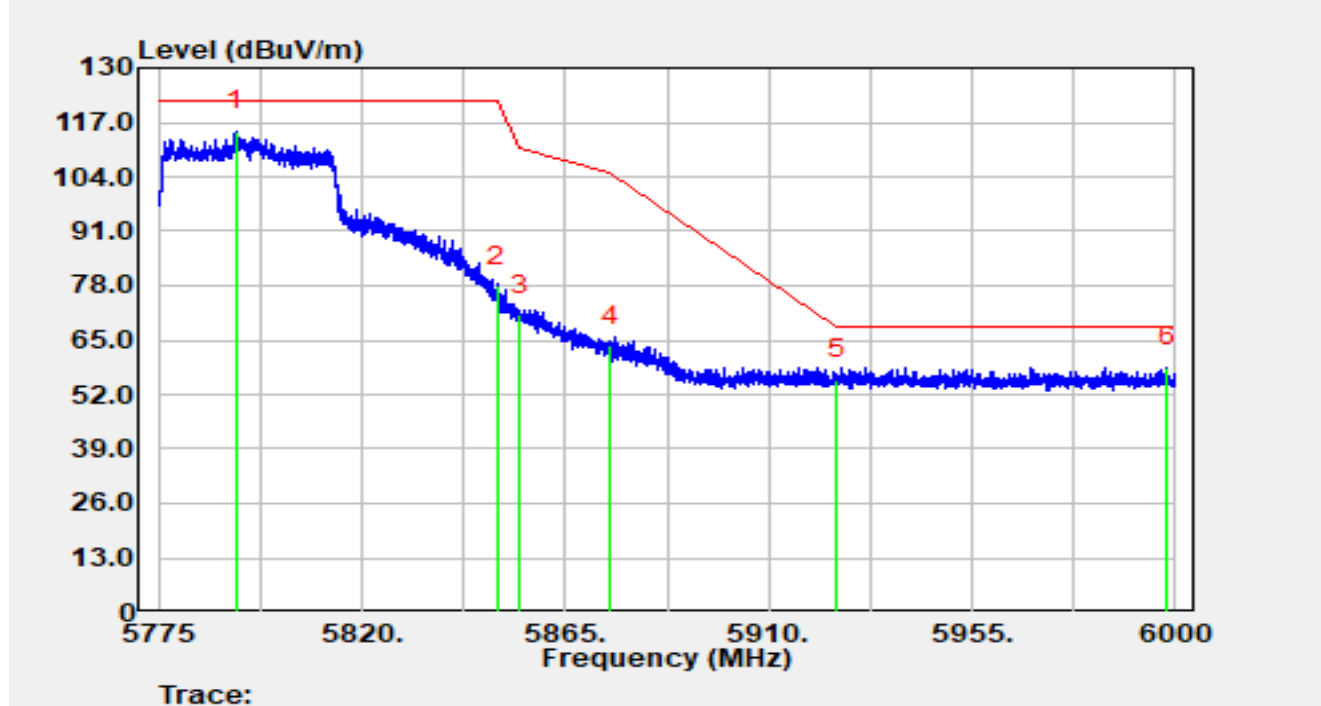


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5792.28         | 94.17          | 20.68      | 114.86               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 57.20          | 20.79      | 77.99                | -44.21      | 122.20         | Peak     |
| 3  |      | 5855.00         | 50.36          | 20.76      | 71.12                | -39.68      | 110.80         | Peak     |
| 4  |      | 5875.00         | 42.94          | 20.78      | 63.71                | -41.49      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.53          | 21.12      | 55.65                | -12.55      | 68.20          | Peak     |
| 6  | *    | 5998.20         | 37.40          | 21.00      | 58.40                | -9.80       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5210MHz  |               |            |

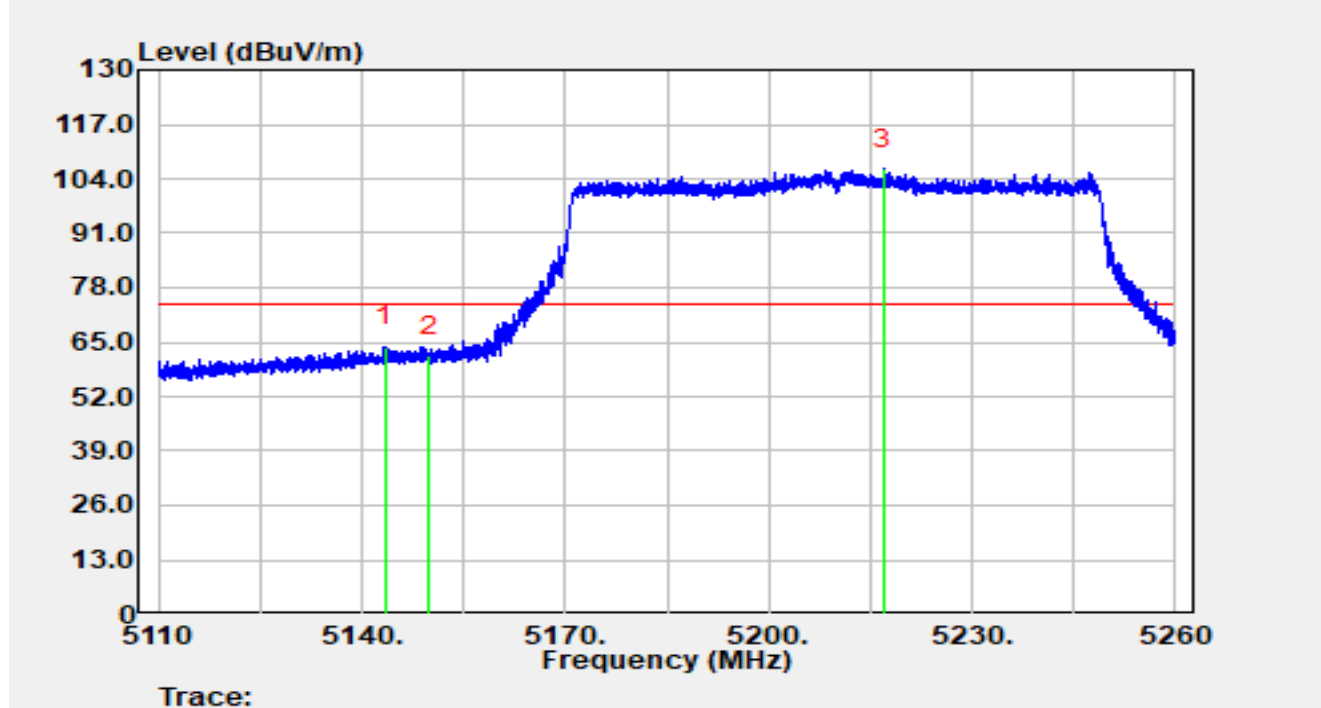


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5143.39         | 43.64          | 20.15      | 63.79                | -10.21      | 74.00          | Peak     |
| 2  |      | 5150.00         | 41.46          | 20.14      | 61.59                | -12.41      | 74.00          | Peak     |
| 3  |      | 5217.01         | 86.17          | 20.16      | 106.33               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5210MHz  |               |            |

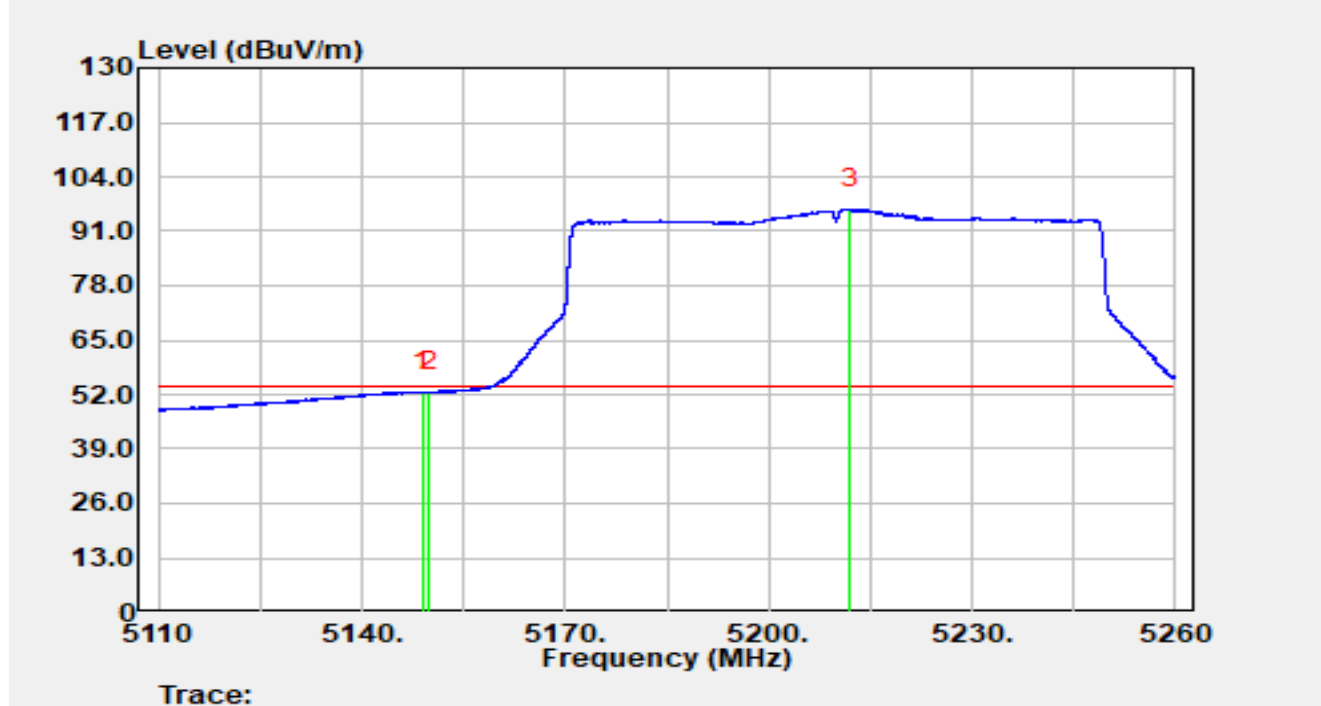


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.93         | 32.51          | 20.14      | 52.65                | -1.35       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.45          | 20.14      | 52.59                | -1.41       | 54.00          | Average  |
| 3  |      | 5212.06         | 76.18          | 20.14      | 96.32                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5210MHz  |               |            |

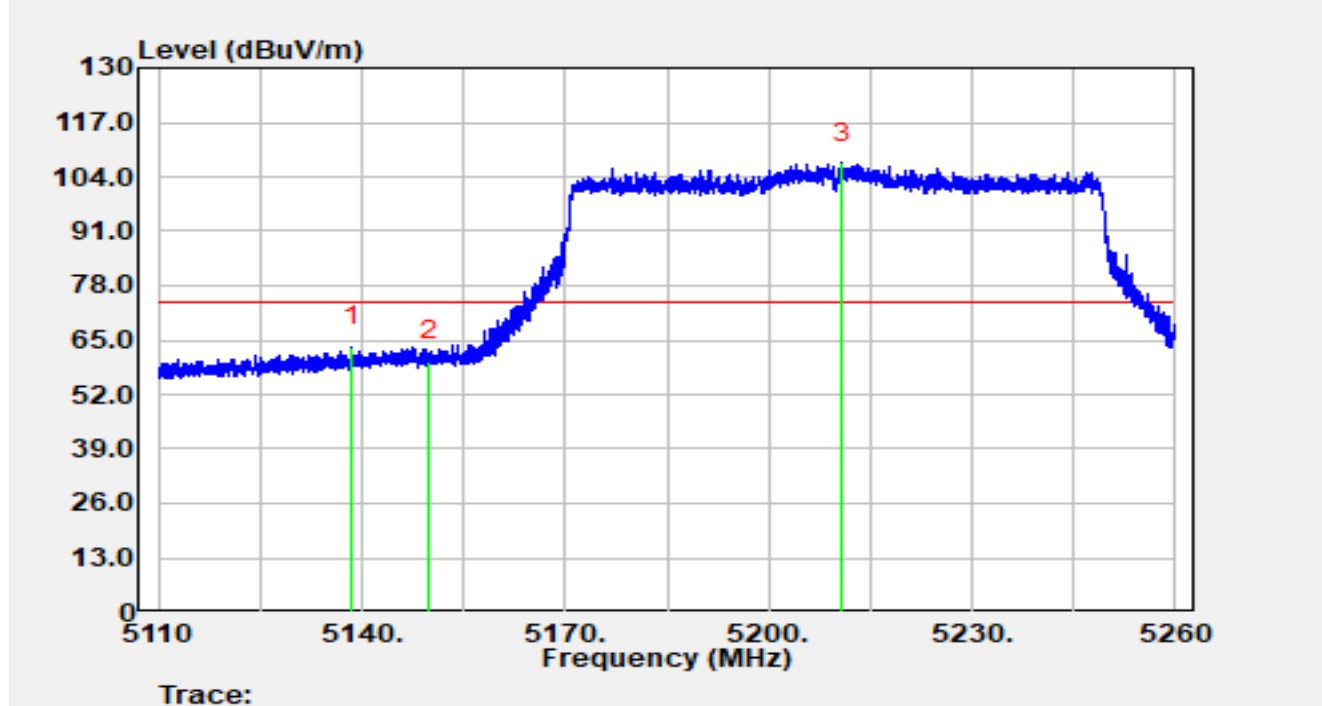


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5138.55         | 43.22          | 20.15      | 63.37                | -10.63      | 74.00          | Peak     |
| 2  |      | 5150.00         | 39.72          | 20.14      | 59.86                | -14.14      | 74.00          | Peak     |
| 3  |      | 5210.88         | 87.13          | 20.13      | 107.26               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5210MHz  |               |            |

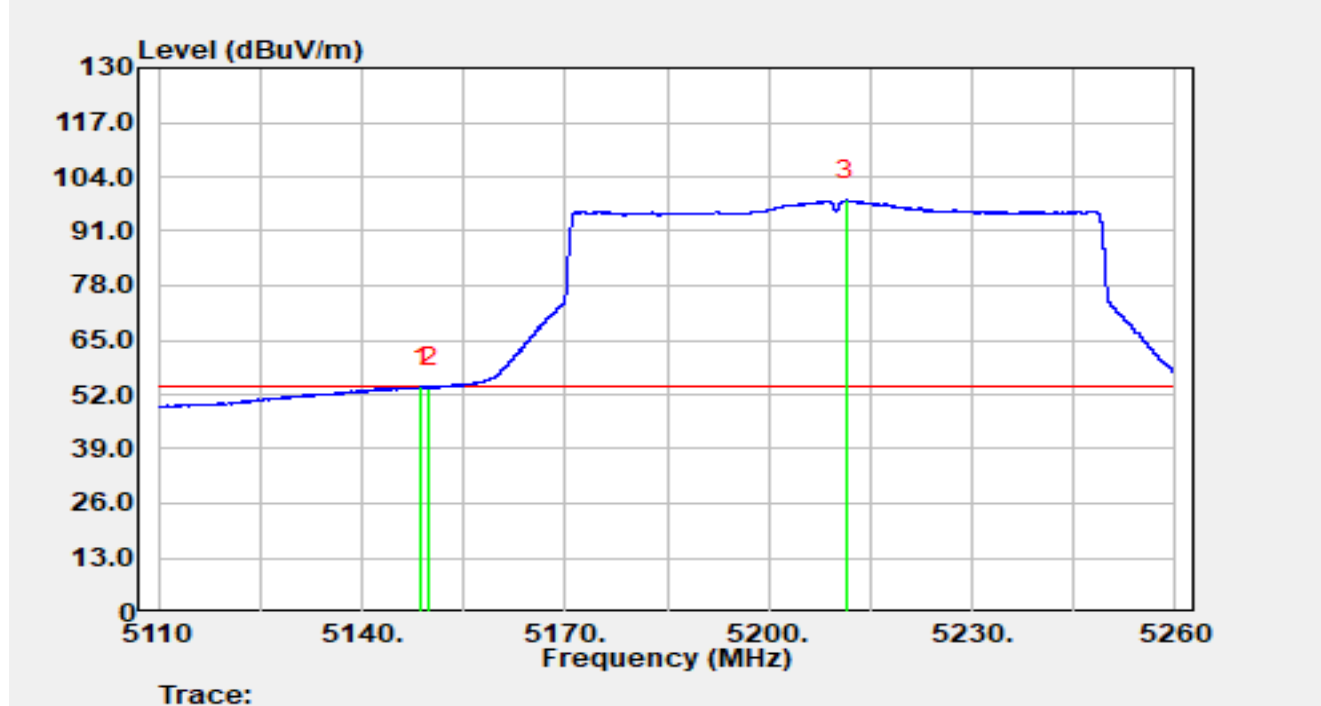


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.82         | 33.63          | 20.14      | 53.77                | -0.23       | 54.00          | Average  |
| 2  |      | 5150.00         | 33.56          | 20.14      | 53.70                | -0.30       | 54.00          | Average  |
| 3  |      | 5211.51         | 78.31          | 20.14      | 98.45                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5290MHz  |               |            |

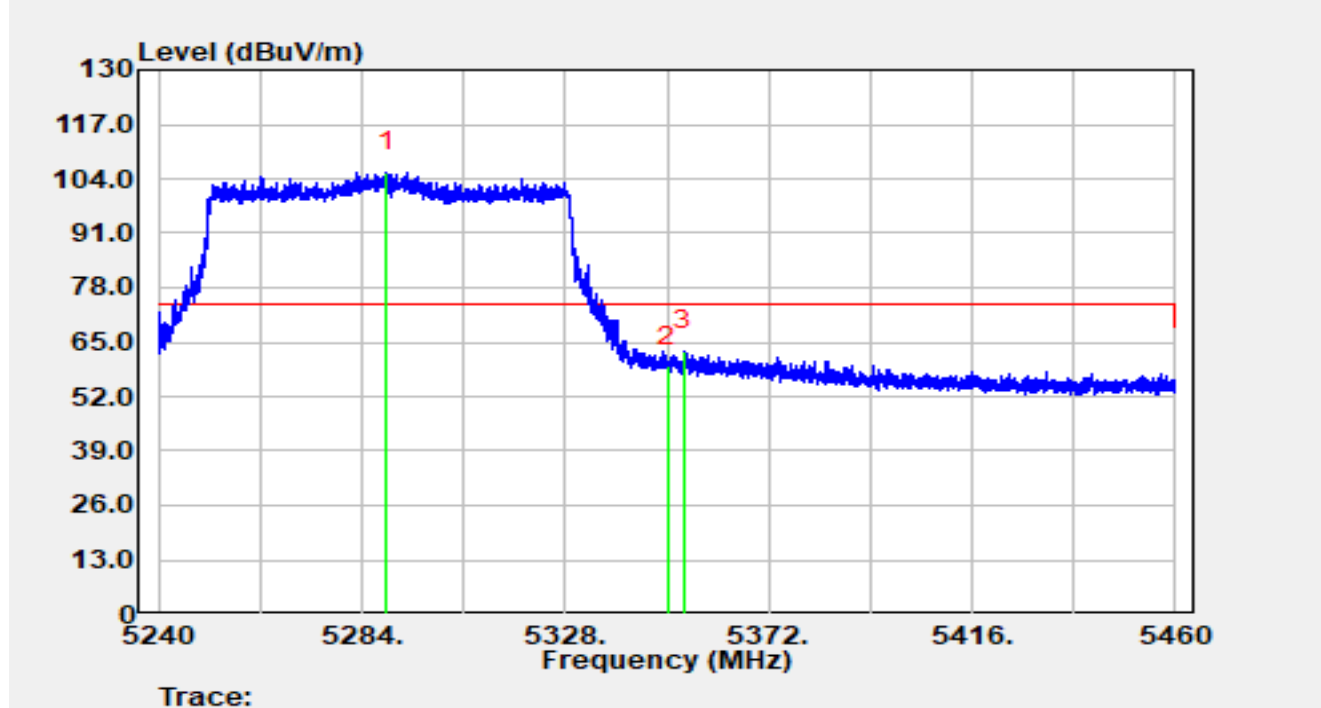


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5289.28         | 85.69          | 19.95      | 105.64               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 39.23          | 20.09      | 59.32                | -14.68      | 74.00          | Peak     |
| 3  | *    | 5353.72         | 42.90          | 20.07      | 62.97                | -11.03      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5290MHz  |               |            |

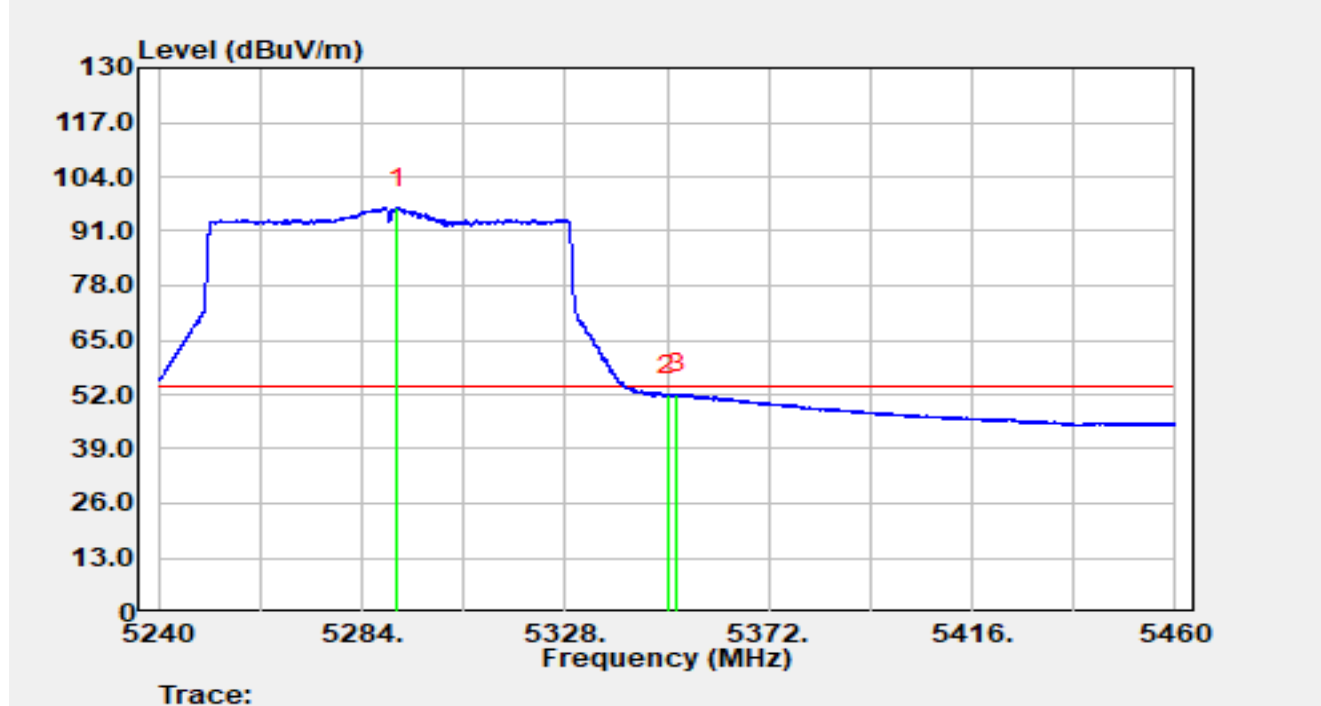


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5291.57         | 76.53          | 19.95      | 96.48                | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 31.75          | 20.09      | 51.84                | -2.16       | 54.00          | Average  |
| 3  | *    | 5352.18         | 32.11          | 20.07      | 52.18                | -1.82       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5290MHz  |               |            |

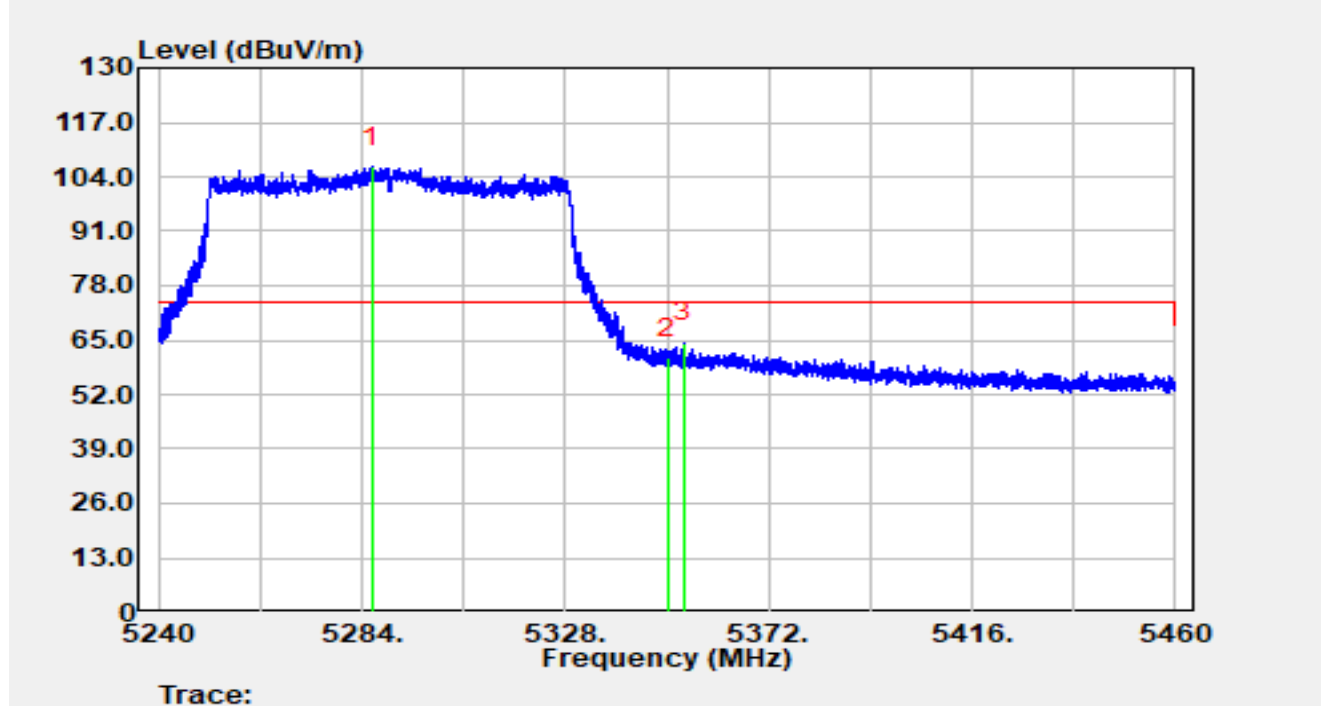


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5286.05         | 86.39          | 19.94      | 106.34               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 40.69          | 20.09      | 60.78                | -13.22      | 74.00          | Peak     |
| 3  | *    | 5353.70         | 44.32          | 20.07      | 64.39                | -9.61       | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5290MHz  |               |            |

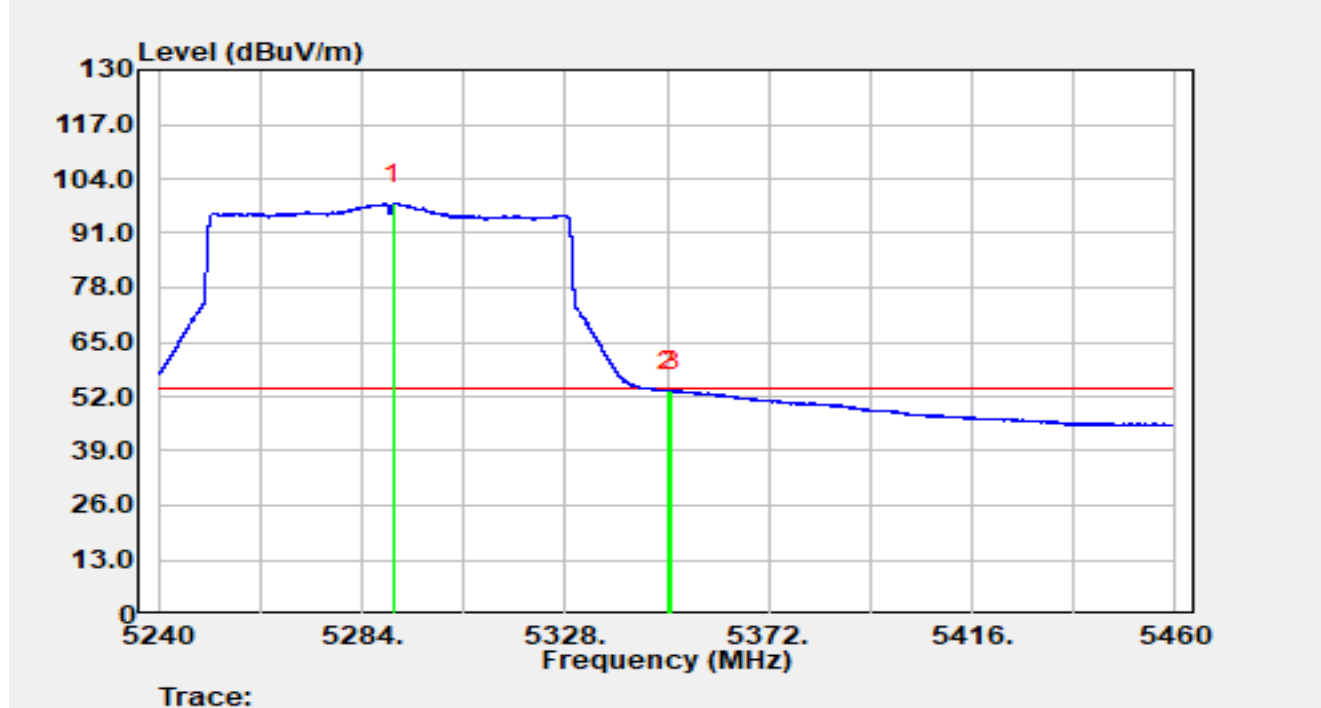


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5290.91         | 78.11          | 19.95      | 98.07                | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 33.15          | 20.09      | 53.24                | -0.76       | 54.00          | Average  |
| 3  | *    | 5351.08         | 33.34          | 20.08      | 53.41                | -0.59       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5530MHz  |               |            |

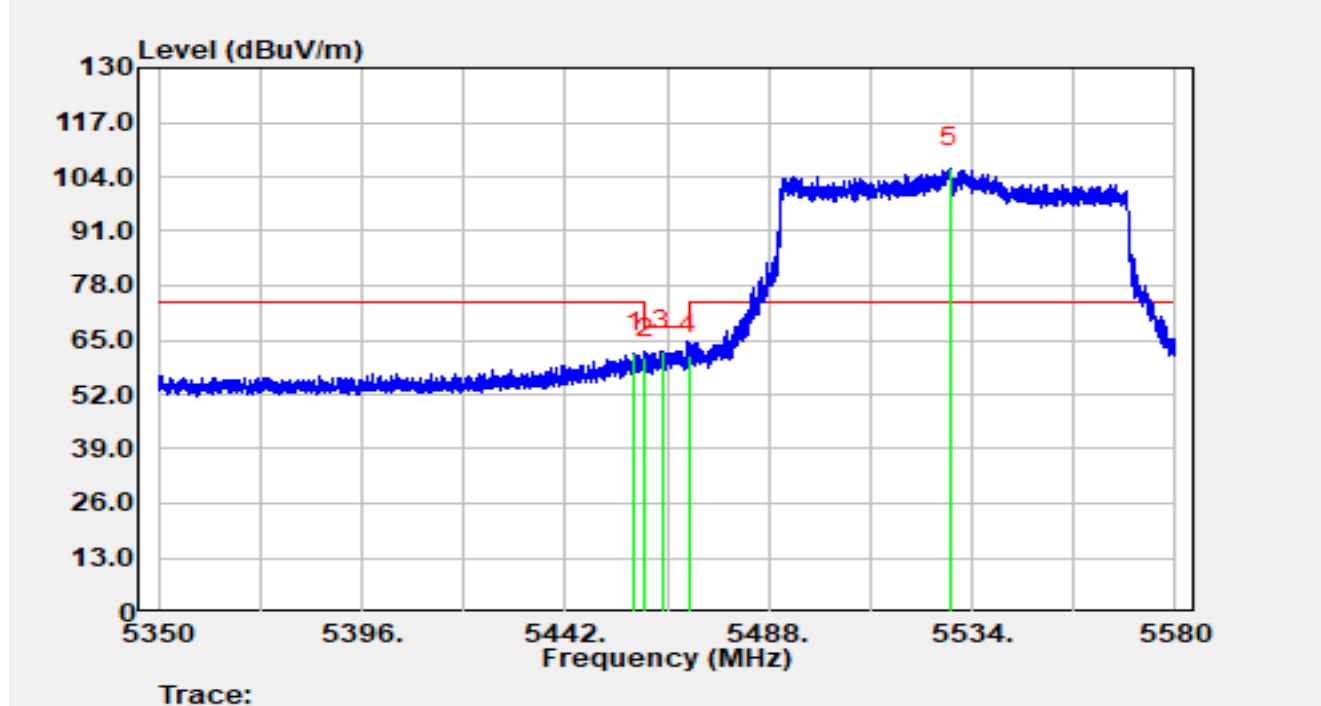


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5457.62         | 41.61          | 20.42      | 62.03                | -11.97      | 74.00          | Peak     |
| 2  |      | 5460.00         | 40.40          | 20.40      | 60.80                | -7.40       | 68.20          | Peak     |
| 3  | *    | 5464.03         | 42.12          | 20.36      | 62.48                | -5.72       | 68.20          | Peak     |
| 4  |      | 5470.00         | 41.20          | 20.31      | 61.51                | -6.69       | 68.20          | Peak     |
| 5  |      | 5528.99         | 85.59          | 20.50      | 106.10               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5530MHz  |               |            |

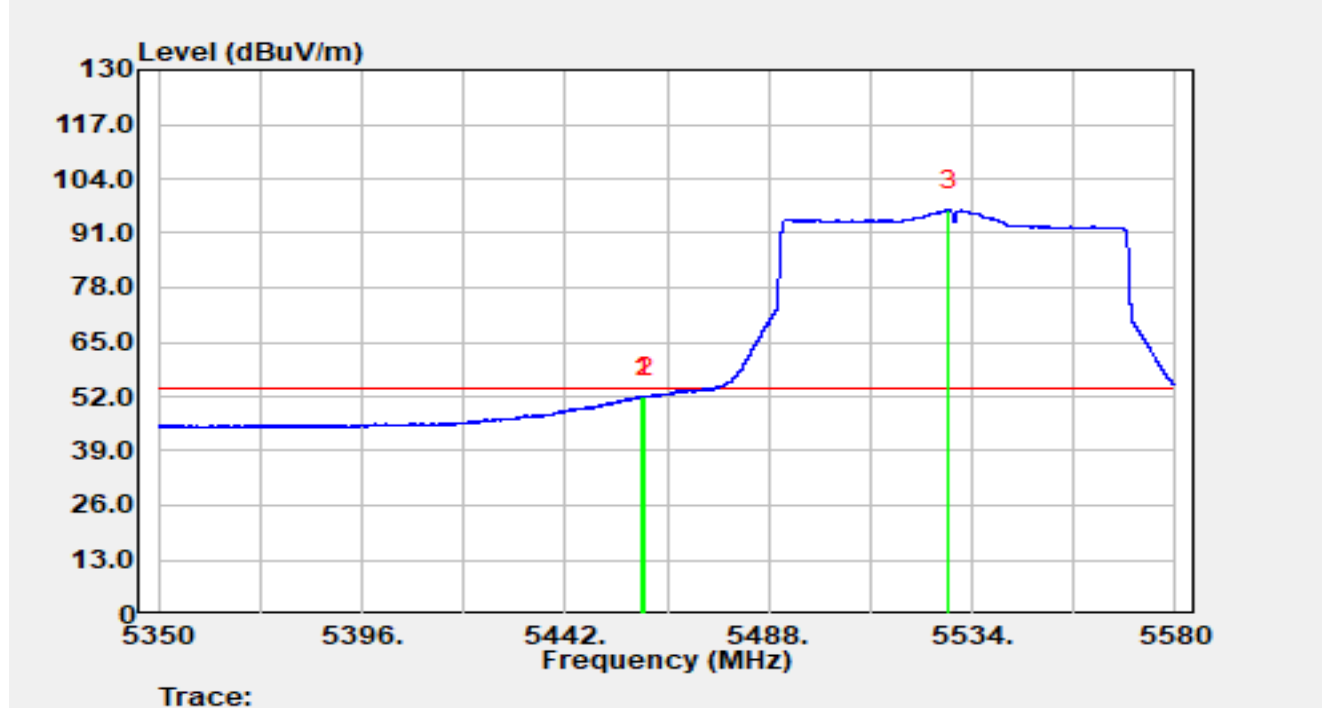


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.30         | 31.46          | 20.40      | 51.86                | -2.14       | 54.00          | Average  |
| 2  |      | 5460.00         | 31.45          | 20.40      | 51.85                | -2.15       | 54.00          | Average  |
| 3  |      | 5528.62         | 75.97          | 20.51      | 96.48                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5530MHz  |               |            |

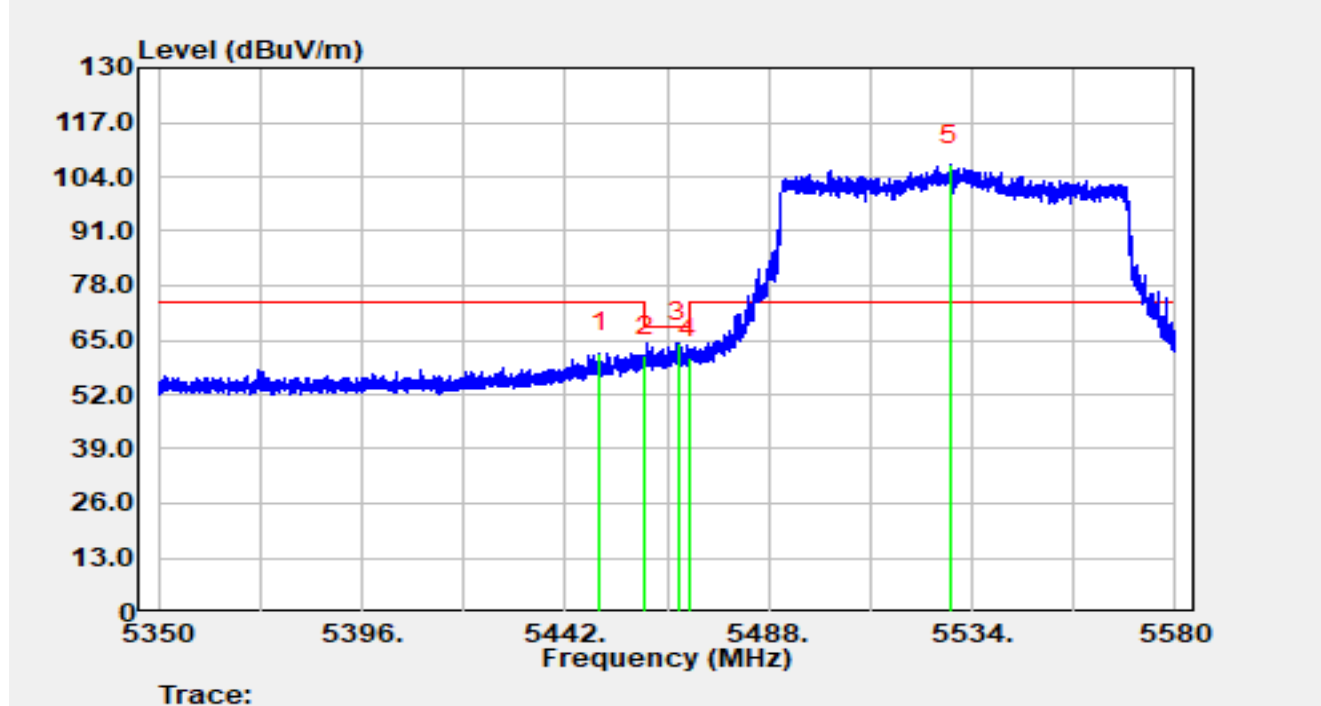


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5449.75         | 41.43          | 20.41      | 61.84                | -12.16      | 74.00          | Peak     |
| 2  |      | 5460.00         | 40.83          | 20.40      | 61.23                | -6.97       | 68.20          | Peak     |
| 3  | *    | 5467.42         | 44.18          | 20.33      | 64.51                | -3.69       | 68.20          | Peak     |
| 4  |      | 5470.00         | 40.33          | 20.31      | 60.64                | -7.56       | 68.20          | Peak     |
| 5  |      | 5529.08         | 86.22          | 20.50      | 106.73               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5530MHz  |               |            |

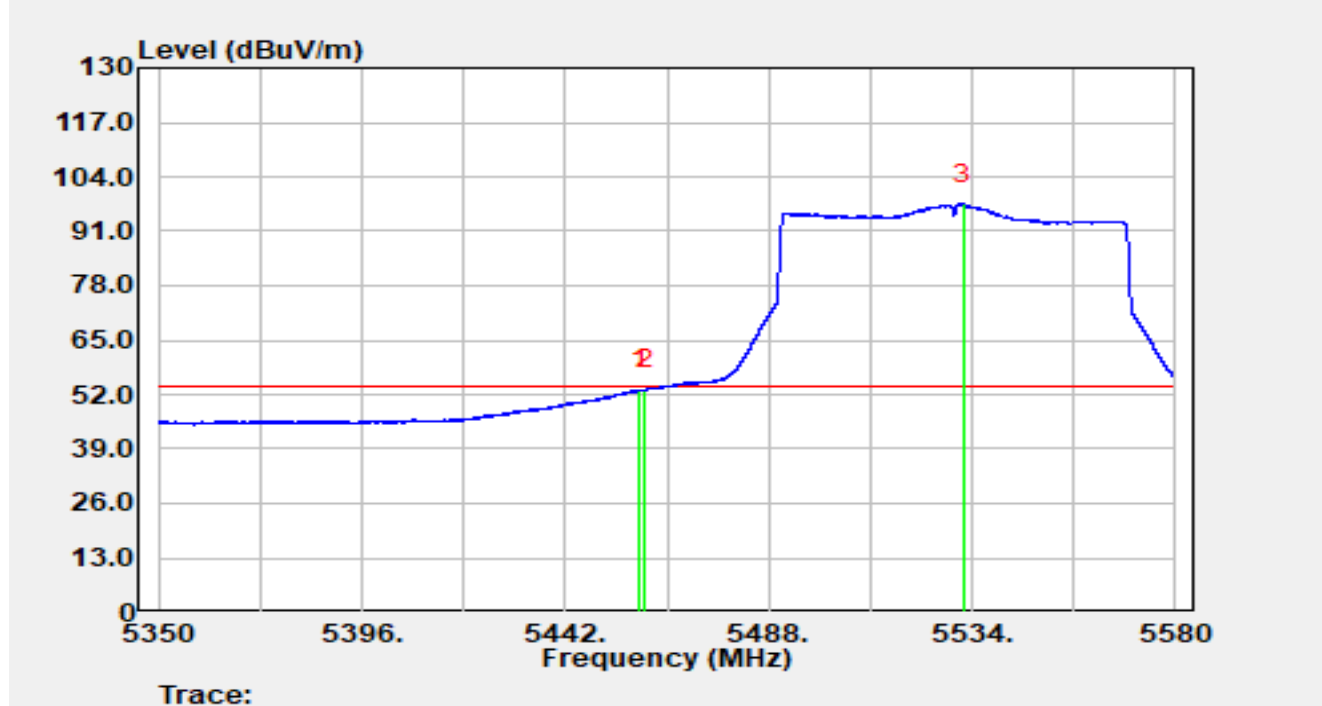


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5458.91         | 32.61          | 20.41      | 53.02                | -0.98       | 54.00          | Average  |
| 2  | *    | 5460.00         | 32.77          | 20.40      | 53.16                | -0.84       | 54.00          | Average  |
| 3  |      | 5531.95         | 77.08          | 20.49      | 97.56                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5610MHz  |               |            |

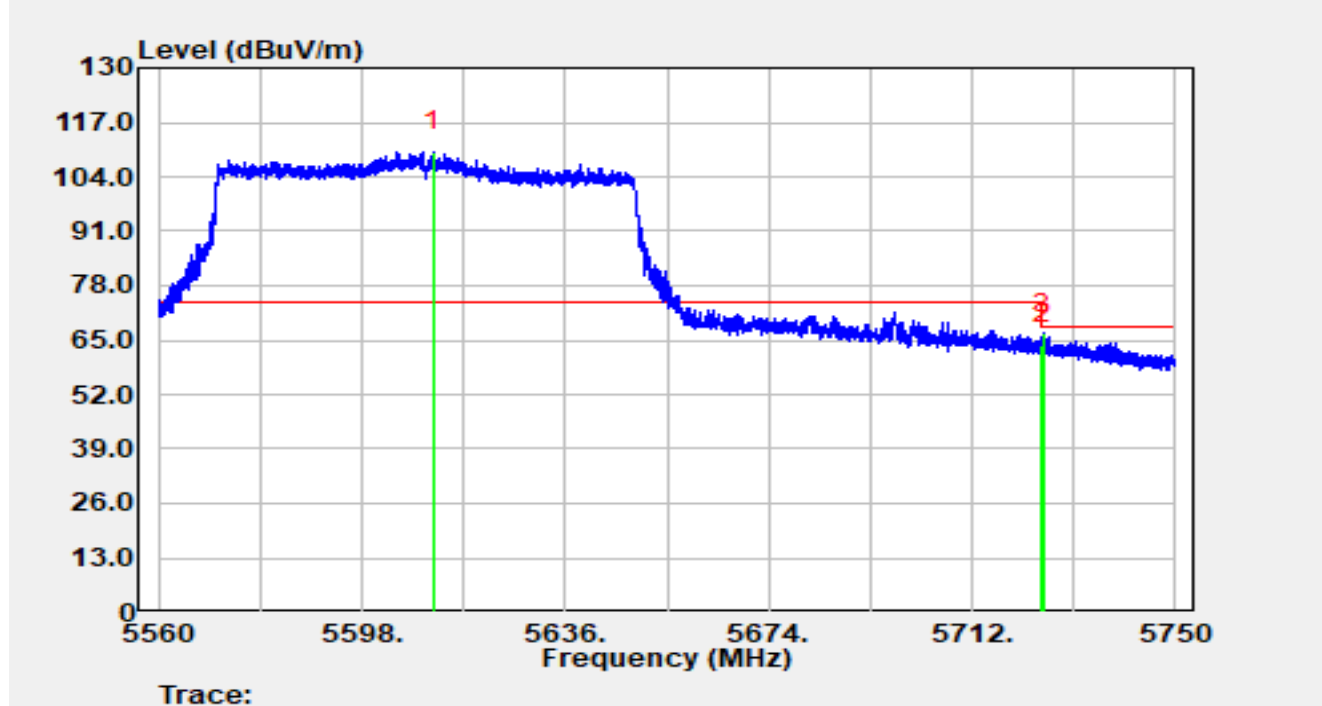


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5611.26         | 89.61          | 20.46      | 110.07               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 43.12          | 20.69      | 63.80                | -4.40       | 68.20          | Peak     |
| 3  | *    | 5725.26         | 45.79          | 20.69      | 66.48                | -1.72       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5610MHz  |               |            |

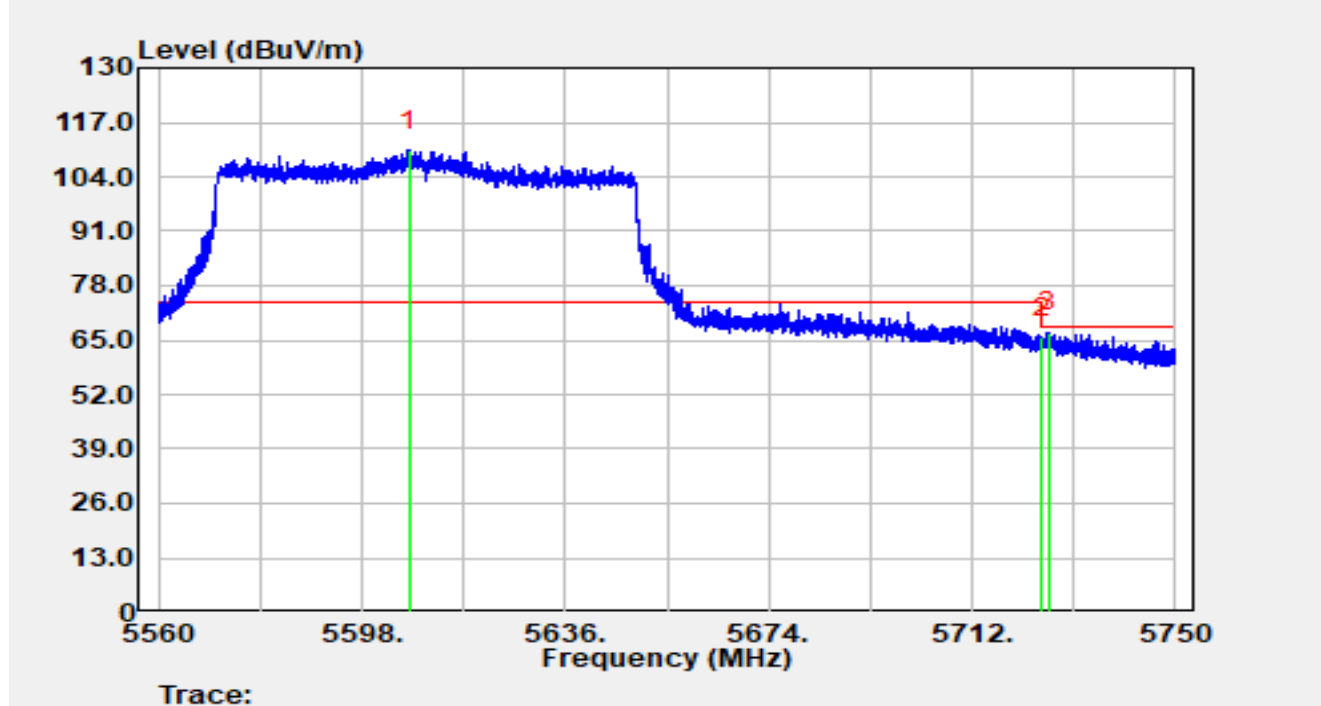


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5606.72         | 89.89          | 20.45      | 110.34               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 44.91          | 20.69      | 65.60                | -2.60       | 68.20          | Peak     |
| 3  | *    | 5726.25         | 46.20          | 20.68      | 66.88                | -1.32       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5775MHz  |               |            |

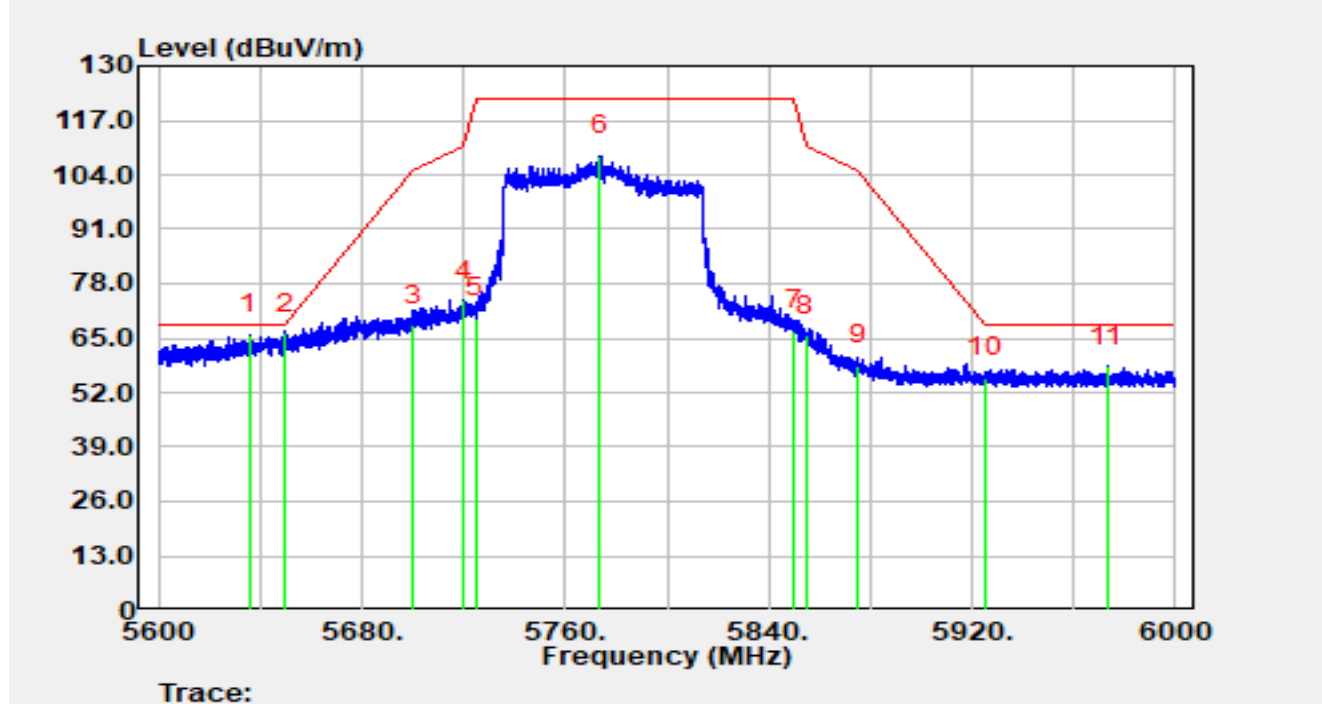

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5636.00         | 45.53          | 20.43      | 65.95                | -2.25       | 68.20          | Peak     |
| 2  | *    | 5650.00         | 45.75          | 20.37      | 66.12                | -2.08       | 68.20          | Peak     |
| 3  |      | 5700.00         | 47.49          | 20.58      | 68.06                | -37.14      | 105.20         | Peak     |
| 4  |      | 5720.00         | 53.33          | 20.70      | 74.03                | -36.77      | 110.80         | Peak     |
| 5  |      | 5725.00         | 49.09          | 20.69      | 69.78                | -52.42      | 122.20         | Peak     |
| 6  |      | 5773.80         | 88.06          | 20.60      | 108.66               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 46.05          | 20.79      | 66.85                | -55.35      | 122.20         | Peak     |
| 8  |      | 5855.00         | 44.95          | 20.76      | 65.70                | -45.10      | 110.80         | Peak     |
| 9  |      | 5875.00         | 37.61          | 20.78      | 58.39                | -46.81      | 105.20         | Peak     |
| 10 |      | 5925.00         | 34.53          | 21.12      | 55.65                | -12.55      | 68.20          | Peak     |
| 11 |      | 5973.04         | 37.44          | 20.89      | 58.33                | -9.87       | 68.20          | Peak     |


Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).

3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE80 at 5775MHz  |               |            |

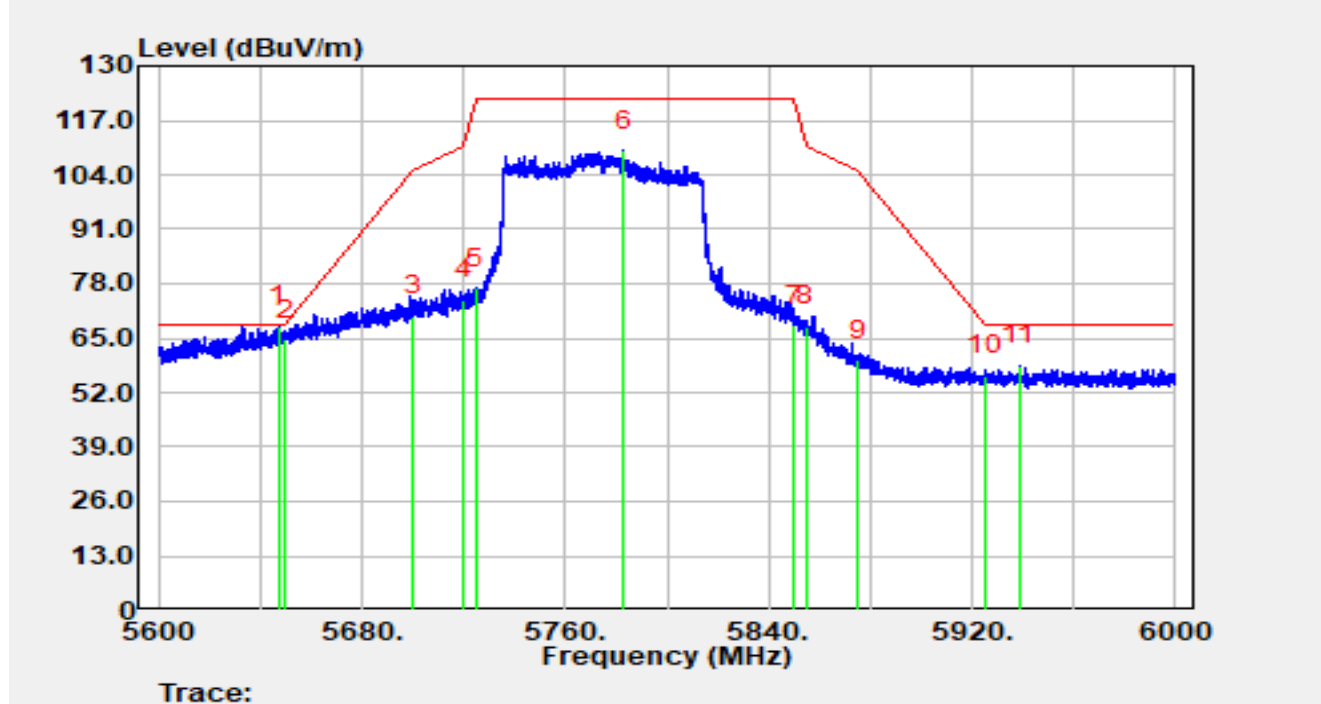


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5647.08         | 47.53          | 20.38      | 67.91                | -0.29       | 68.20          | Peak     |
| 2  |      | 5650.00         | 44.22          | 20.37      | 64.59                | -3.61       | 68.20          | Peak     |
| 3  |      | 5700.00         | 49.75          | 20.58      | 70.33                | -34.87      | 105.20         | Peak     |
| 4  |      | 5720.00         | 53.48          | 20.70      | 74.18                | -36.62      | 110.80         | Peak     |
| 5  |      | 5725.00         | 56.17          | 20.69      | 76.86                | -45.34      | 122.20         | Peak     |
| 6  |      | 5782.76         | 89.11          | 20.63      | 109.75               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 47.24          | 20.79      | 68.03                | -54.17      | 122.20         | Peak     |
| 8  |      | 5855.00         | 47.18          | 20.76      | 67.94                | -42.86      | 110.80         | Peak     |
| 9  |      | 5875.00         | 38.94          | 20.78      | 59.72                | -45.48      | 105.20         | Peak     |
| 10 |      | 5925.00         | 34.94          | 21.12      | 56.06                | -12.14      | 68.20          | Peak     |
| 11 |      | 5938.40         | 37.64          | 20.96      | 58.59                | -9.61       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).

3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5250MHz |               |            |

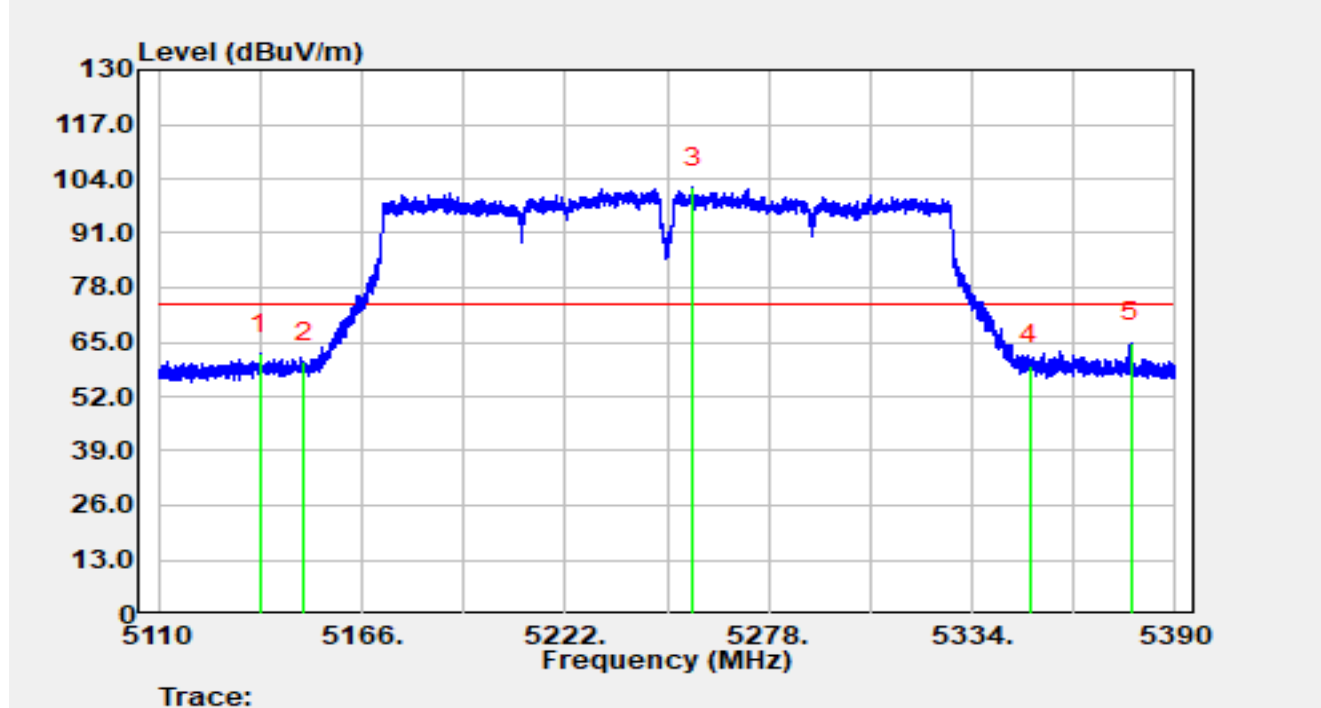


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5138.06         | 42.01          | 20.15      | 62.16                | -11.84      | 74.00          | Peak     |
| 2  |      | 5150.00         | 40.00          | 20.14      | 60.13                | -13.87      | 74.00          | Peak     |
| 3  |      | 5257.06         | 81.89          | 20.01      | 101.90               | N/A         | N/A            | Peak     |
| 4  |      | 5350.00         | 39.32          | 20.09      | 59.41                | -14.59      | 74.00          | Peak     |
| 5  | *    | 5377.68         | 44.66          | 20.11      | 64.77                | -9.23       | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5250MHz |               |            |

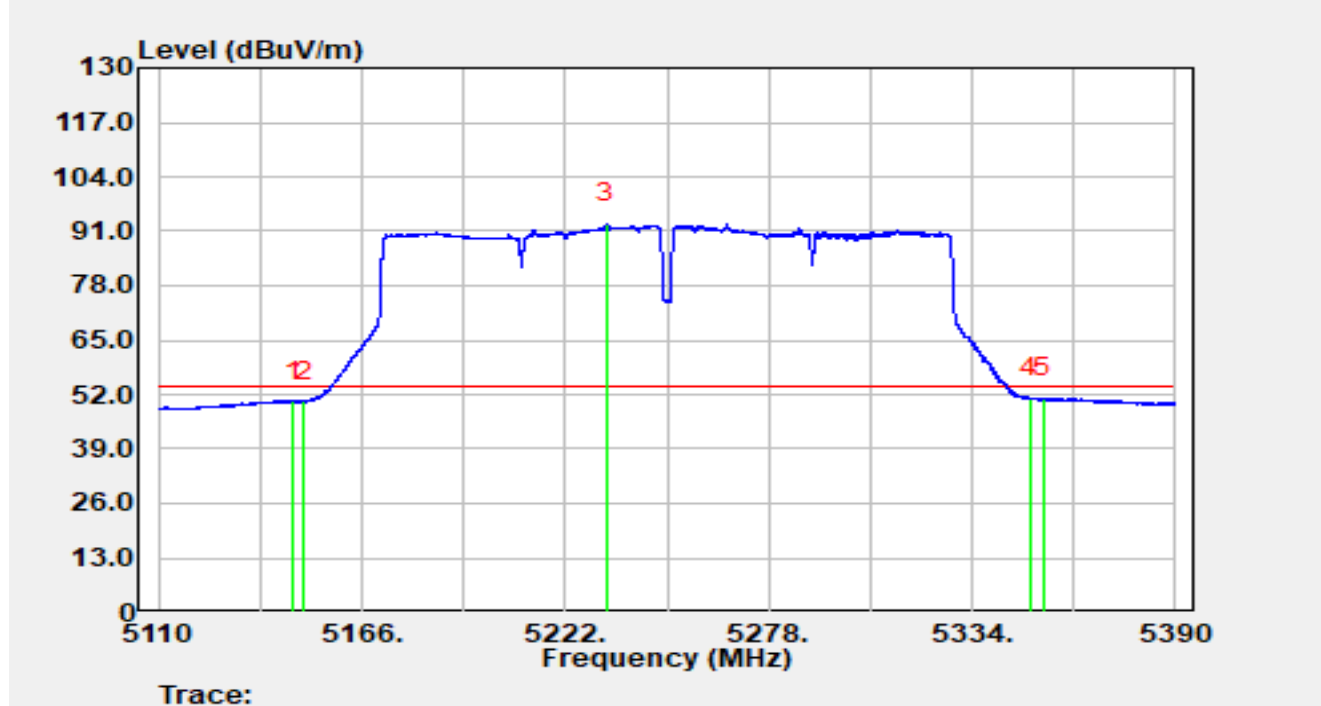


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5147.21         | 30.25          | 20.14      | 50.39                | -3.61       | 54.00          | Average  |
| 2  |      | 5150.00         | 30.18          | 20.14      | 50.31                | -3.69       | 54.00          | Average  |
| 3  |      | 5233.40         | 72.72          | 20.09      | 92.81                | N/A         | N/A            | Average  |
| 4  |      | 5350.00         | 30.95          | 20.09      | 51.03                | -2.97       | 54.00          | Average  |
| 5  | *    | 5353.71         | 31.15          | 20.07      | 51.22                | -2.78       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5250MHz |               |            |

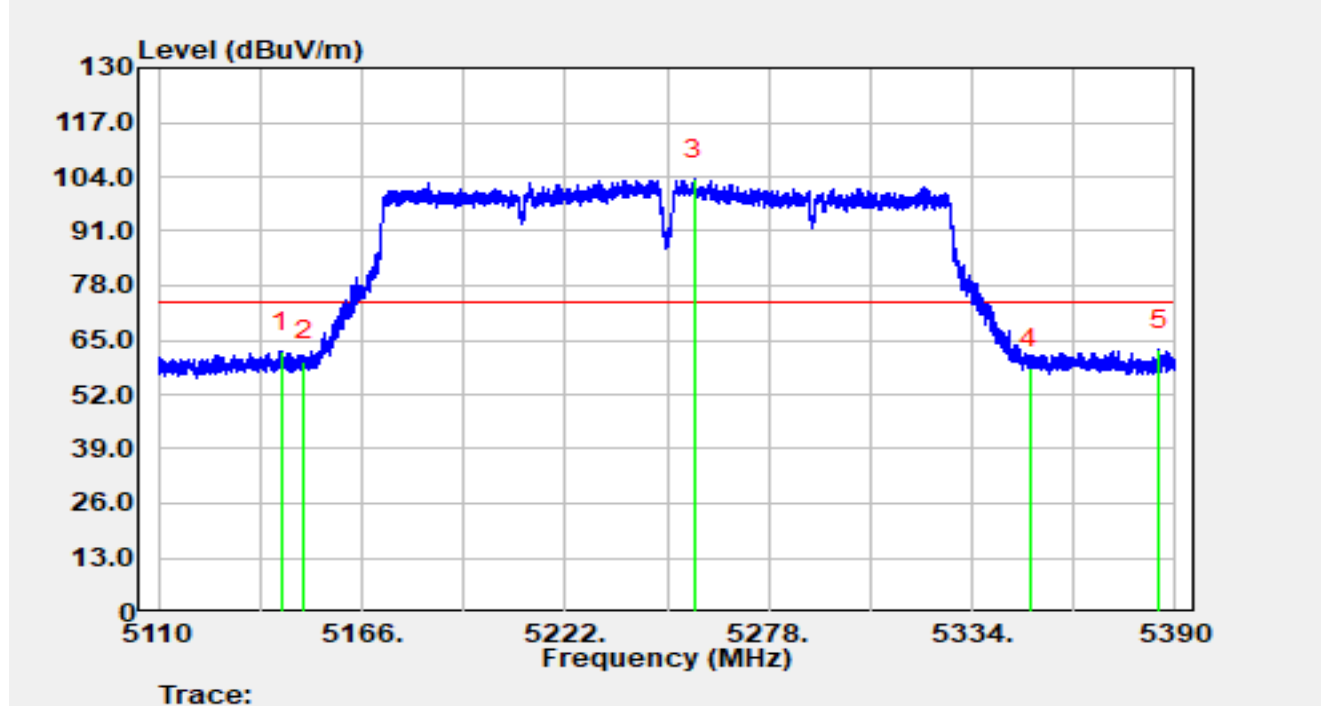


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5143.94         | 42.11          | 20.14      | 62.25                | -11.75      | 74.00          | Peak     |
| 2  |      | 5150.00         | 39.73          | 20.14      | 59.87                | -14.13      | 74.00          | Peak     |
| 3  |      | 5257.64         | 83.49          | 20.01      | 103.50               | N/A         | N/A            | Peak     |
| 4  |      | 5350.00         | 38.26          | 20.09      | 58.35                | -15.65      | 74.00          | Peak     |
| 5  | *    | 5385.66         | 42.42          | 20.14      | 62.57                | -11.43      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5250MHz |               |            |

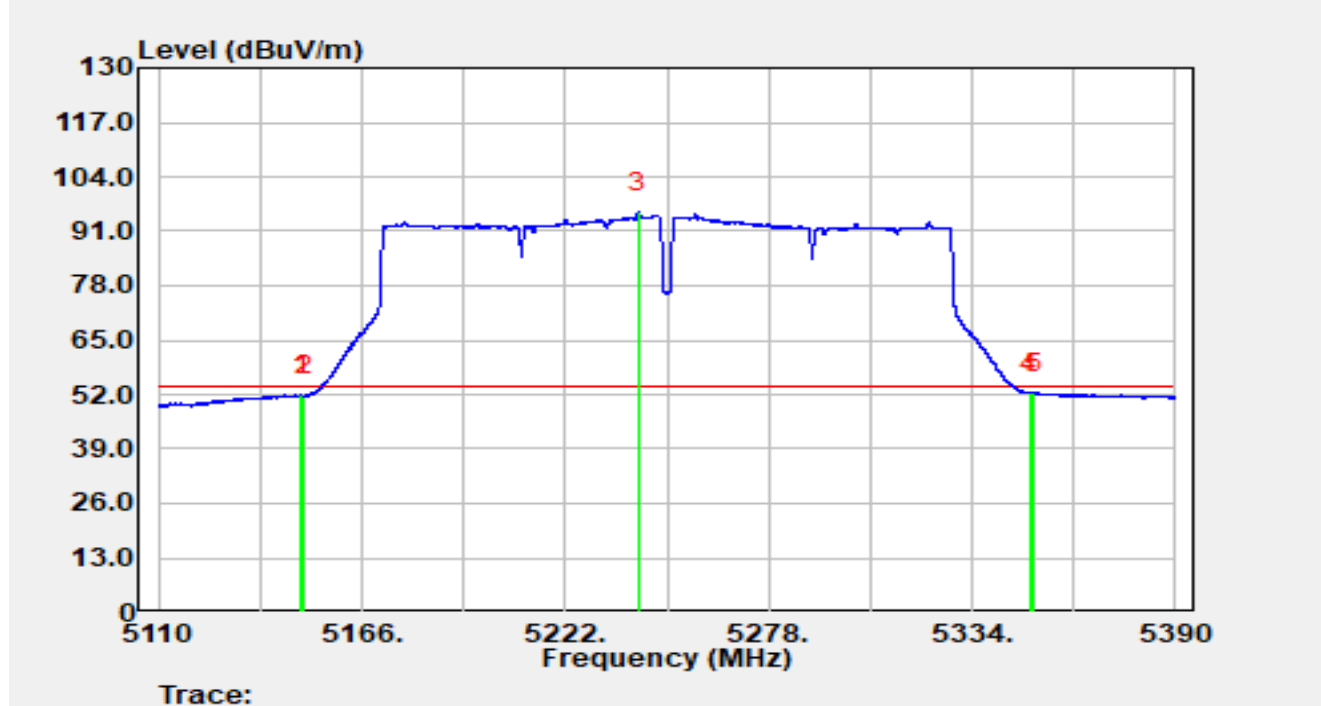


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5149.37         | 31.75          | 20.14      | 51.88                | -2.12       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.47          | 20.14      | 51.60                | -2.40       | 54.00          | Average  |
| 3  |      | 5242.13         | 75.38          | 20.06      | 95.43                | N/A         | N/A            | Average  |
| 4  |      | 5350.00         | 32.19          | 20.09      | 52.28                | -1.72       | 54.00          | Average  |
| 5  | *    | 5351.16         | 32.33          | 20.08      | 52.40                | -1.60       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5570MHz |               |            |

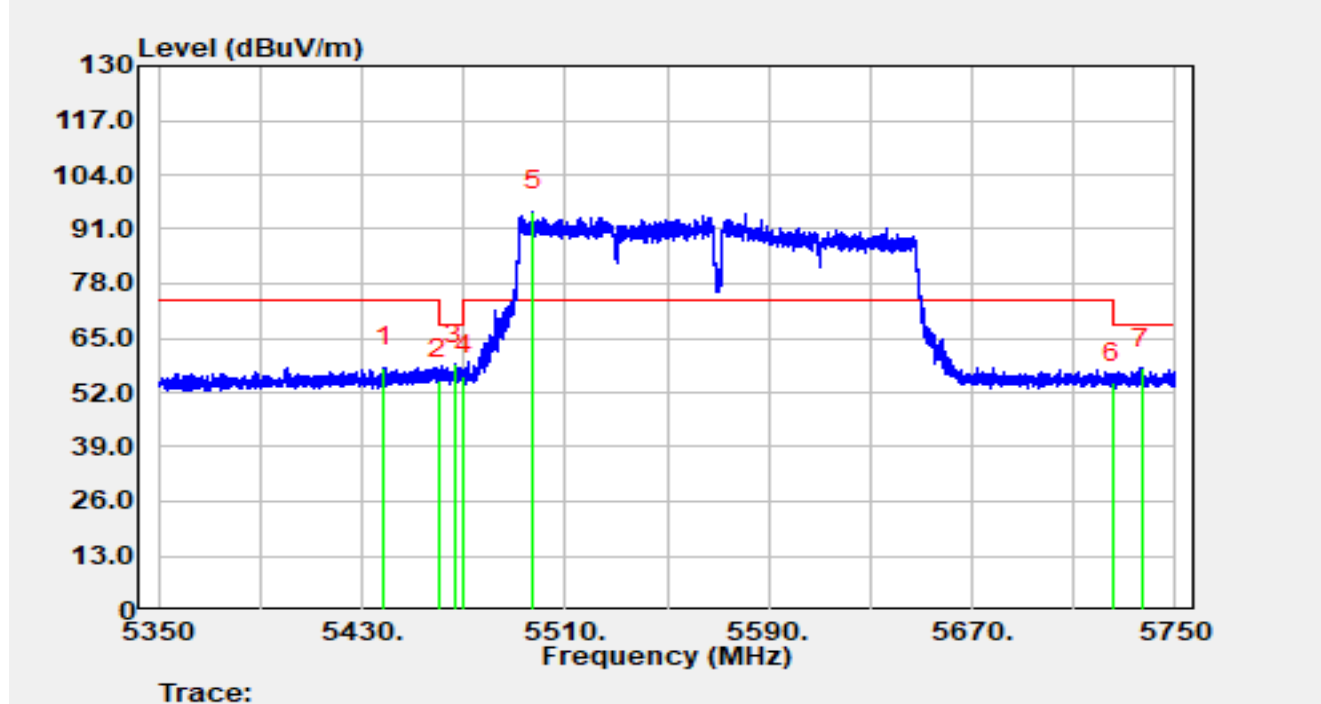


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5438.92         | 37.64          | 20.36      | 57.99                | -16.01      | 74.00          | Peak     |
| 2  |      | 5460.00         | 34.73          | 20.40      | 55.12                | -13.08      | 68.20          | Peak     |
| 3  | *    | 5466.44         | 38.33          | 20.34      | 58.67                | -9.53       | 68.20          | Peak     |
| 4  |      | 5470.00         | 35.71          | 20.31      | 56.02                | -12.18      | 68.20          | Peak     |
| 5  |      | 5497.32         | 74.85          | 20.44      | 95.30                | N/A         | N/A            | Peak     |
| 6  |      | 5725.00         | 33.58          | 20.69      | 54.27                | -13.93      | 68.20          | Peak     |
| 7  |      | 5736.52         | 37.20          | 20.62      | 57.82                | -10.38      | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5570MHz |               |            |

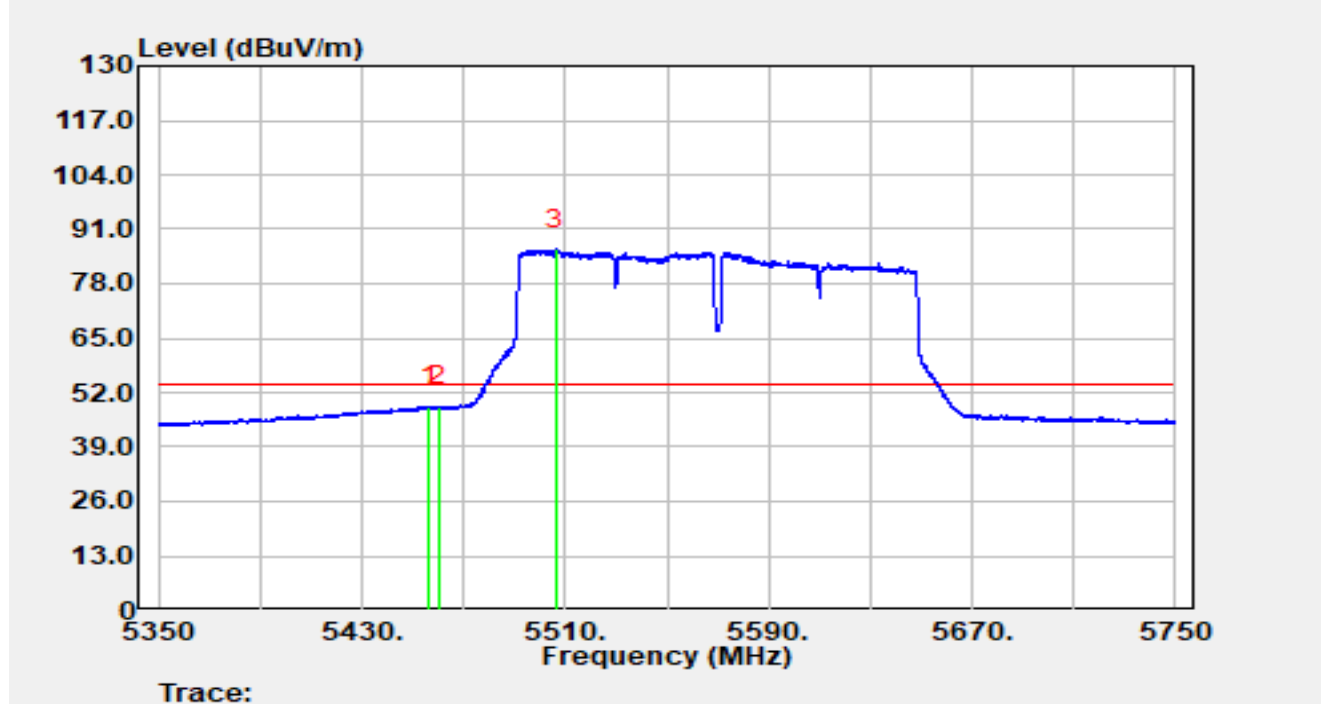


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5456.36         | 28.38          | 20.42      | 48.81                | -5.19       | 54.00          | Average  |
| 2  |      | 5460.00         | 28.27          | 20.40      | 48.66                | -5.34       | 54.00          | Average  |
| 3  |      | 5506.40         | 65.79          | 20.50      | 86.30                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5570MHz |               |            |

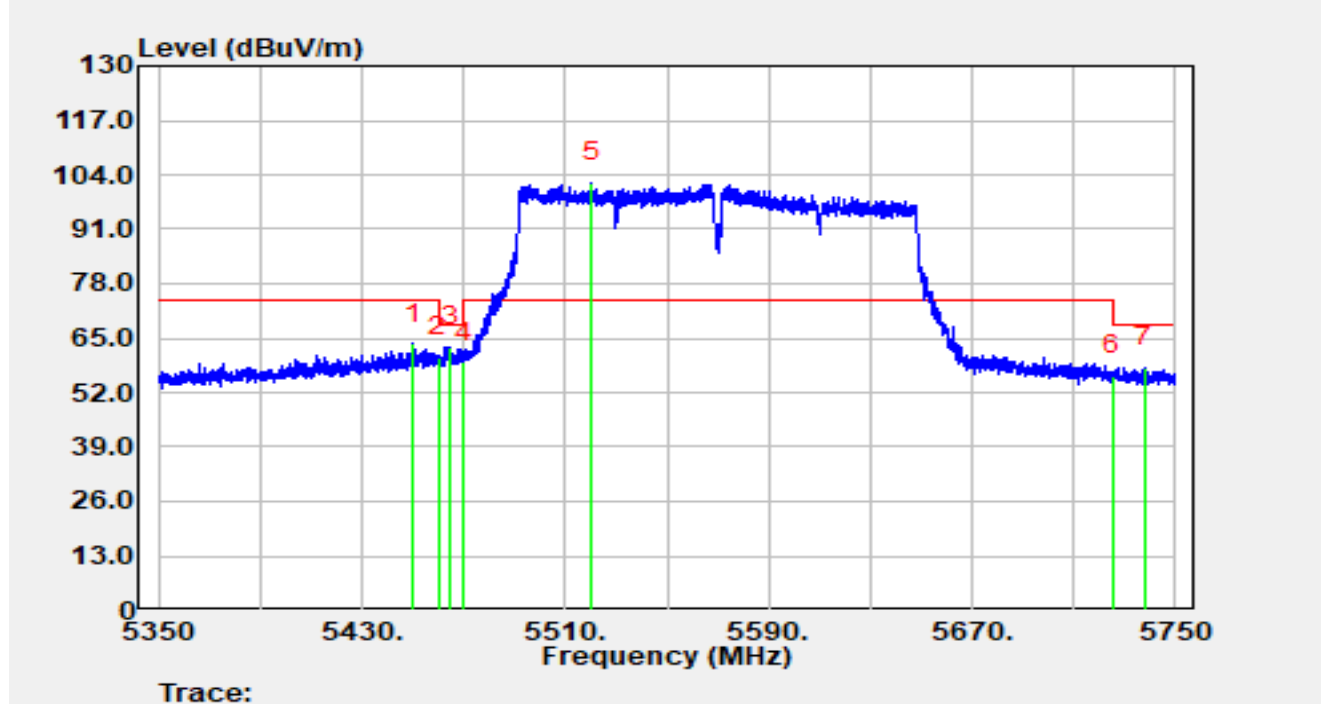


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5449.96         | 43.12          | 20.41      | 63.54                | -10.46      | 74.00          | Peak     |
| 2  |      | 5460.00         | 40.06          | 20.40      | 60.46                | -7.74       | 68.20          | Peak     |
| 3  | *    | 5465.04         | 42.65          | 20.35      | 63.01                | -5.19       | 68.20          | Peak     |
| 4  |      | 5470.00         | 38.97          | 20.31      | 59.28                | -8.92       | 68.20          | Peak     |
| 5  |      | 5520.16         | 81.66          | 20.54      | 102.20               | N/A         | N/A            | Peak     |
| 6  |      | 5725.00         | 35.35          | 20.69      | 56.04                | -12.16      | 68.20          | Peak     |
| 7  |      | 5737.88         | 37.42          | 20.62      | 58.04                | -10.16      | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11ax-HE160 at 5570MHz |               |            |

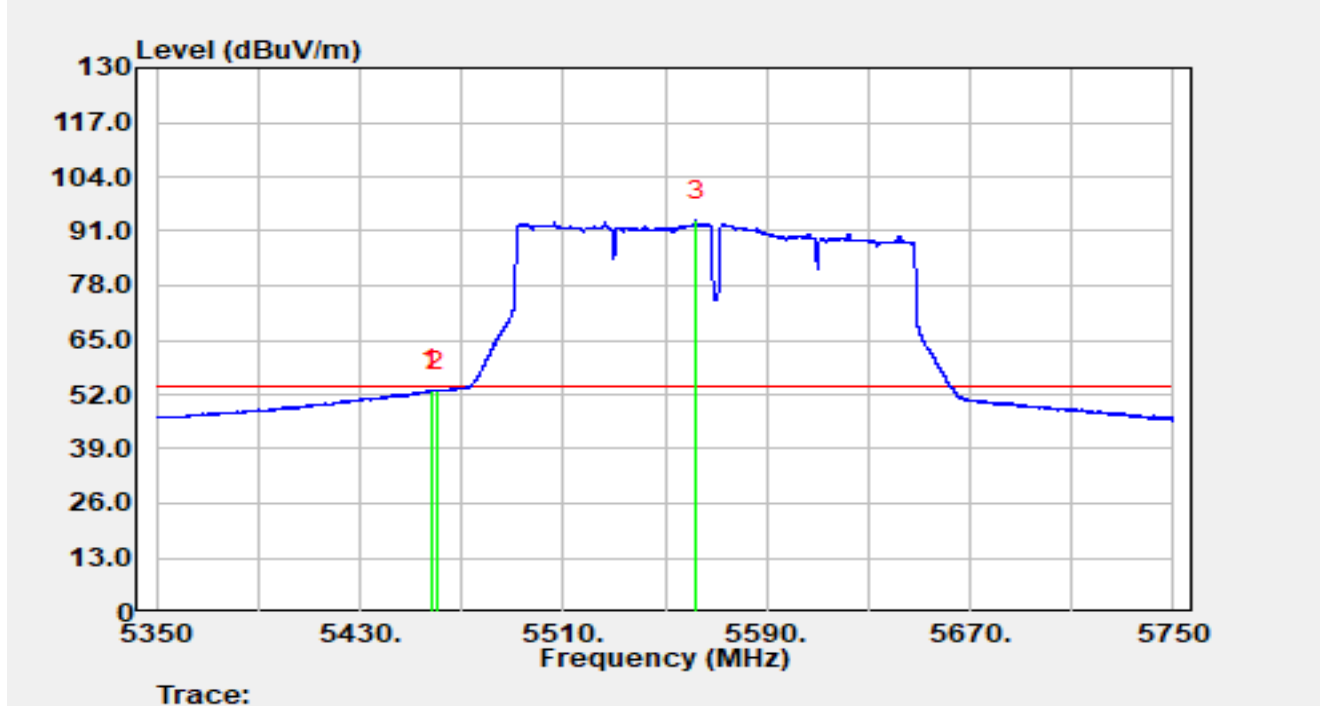


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5458.16         | 32.69          | 20.41      | 53.10                | -0.90       | 54.00          | Average  |
| 2  |      | 5460.00         | 32.54          | 20.40      | 52.93                | -1.07       | 54.00          | Average  |
| 3  |      | 5562.16         | 73.32          | 20.27      | 93.59                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5180MHz |               |            |

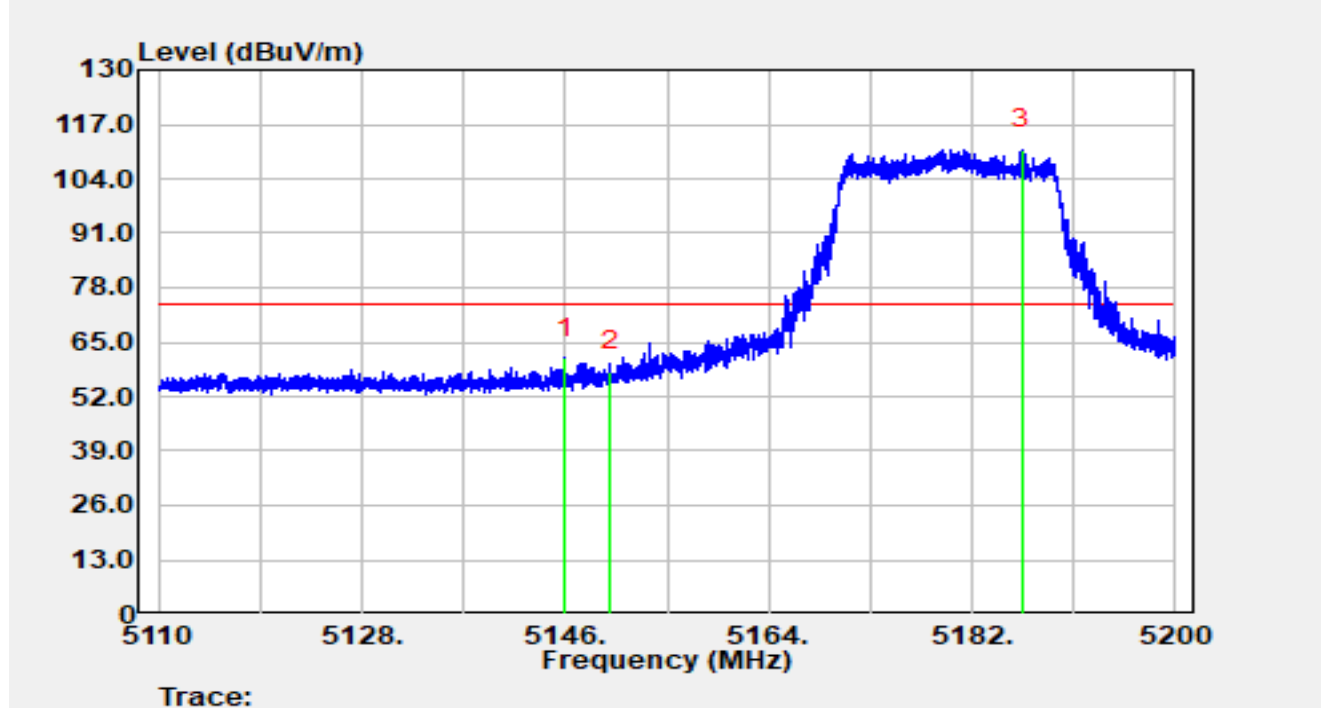


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5145.98         | 41.02          | 20.14      | 61.16                | -12.84      | 74.00          | Peak     |
| 2  |      | 5150.00         | 37.92          | 20.14      | 58.06                | -15.94      | 74.00          | Peak     |
| 3  |      | 5186.38         | 91.05          | 19.98      | 111.03               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5180MHz |               |            |

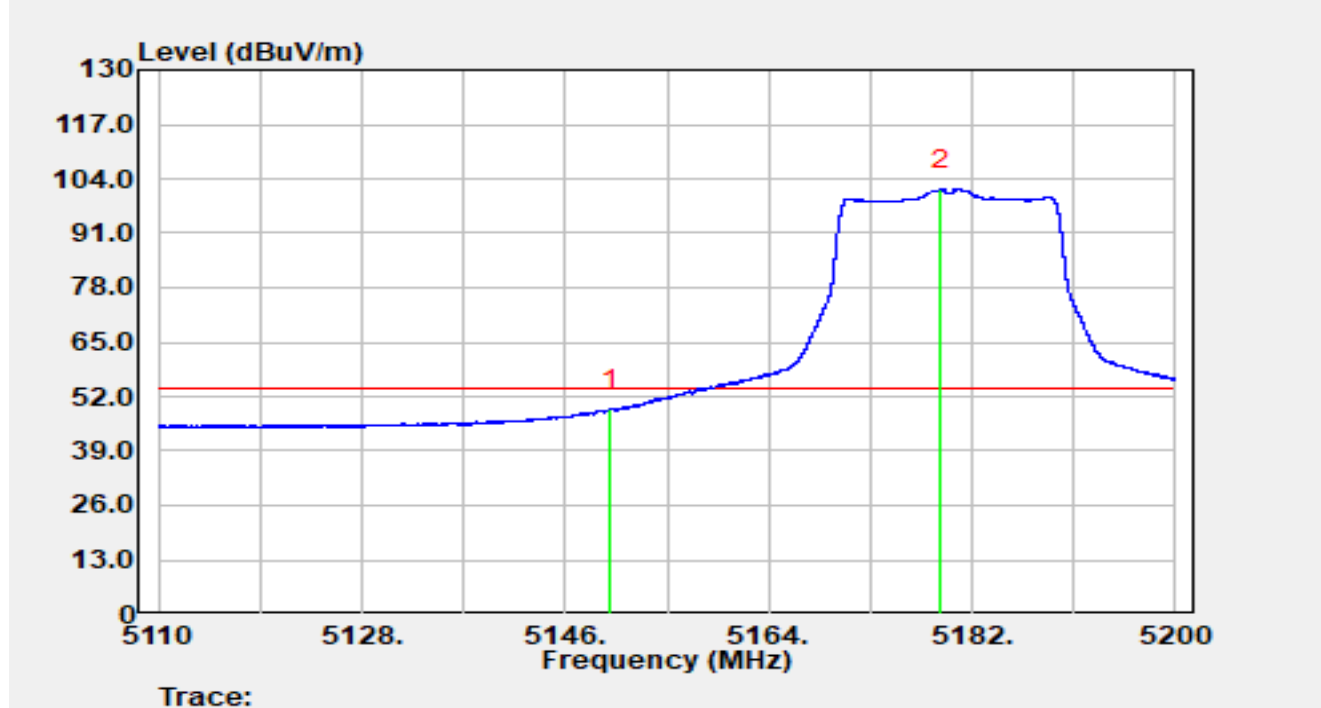


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5150.00         | 28.73          | 20.14      | 48.86                | -5.14       | 54.00          | Average  |
| 2  |      | 5179.27         | 81.51          | 19.99      | 101.50               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5180MHz |               |            |

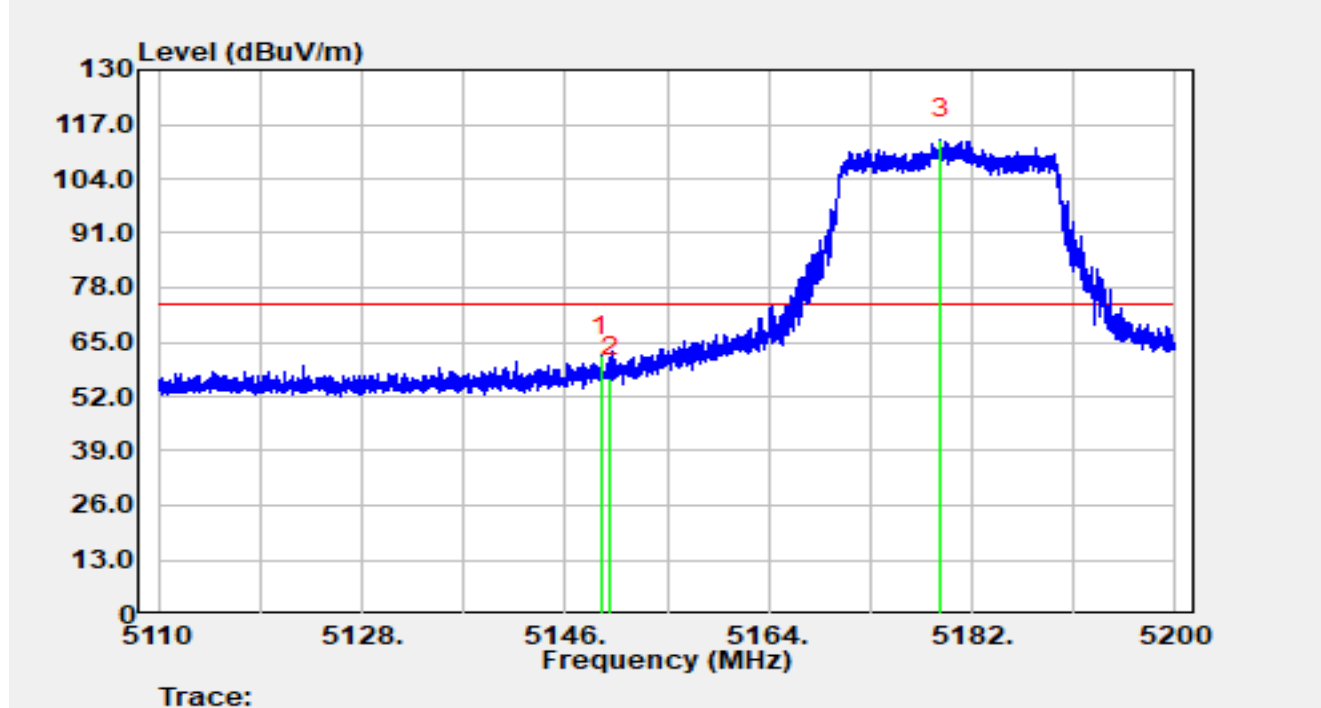


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.19         | 41.61          | 20.14      | 61.74                | -12.26      | 74.00          | Peak     |
| 2  |      | 5150.00         | 36.50          | 20.14      | 56.63                | -17.37      | 74.00          | Peak     |
| 3  |      | 5179.17         | 93.51          | 19.99      | 113.50               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5180MHz |               |            |

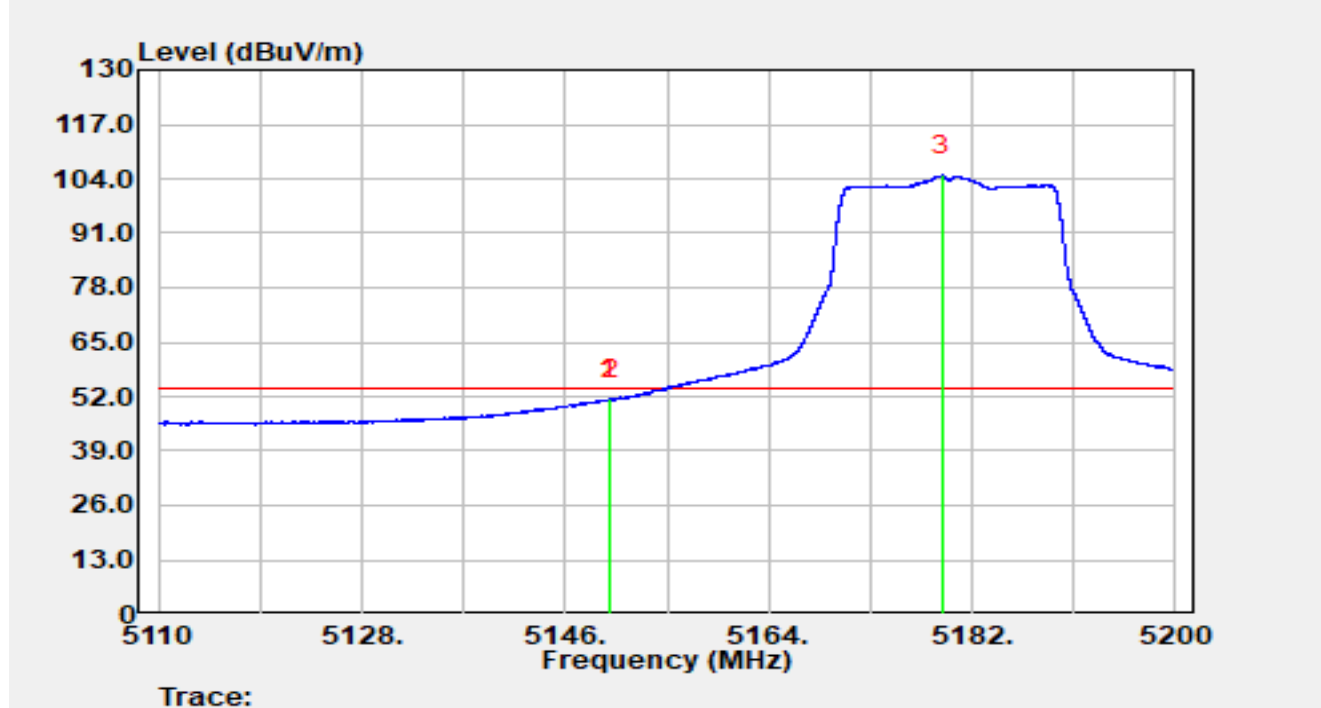


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.90         | 31.17          | 20.14      | 51.31                | -2.69       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.17          | 20.14      | 51.30                | -2.70       | 54.00          | Average  |
| 3  |      | 5179.35         | 84.80          | 19.99      | 104.79               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5320MHz |               |            |

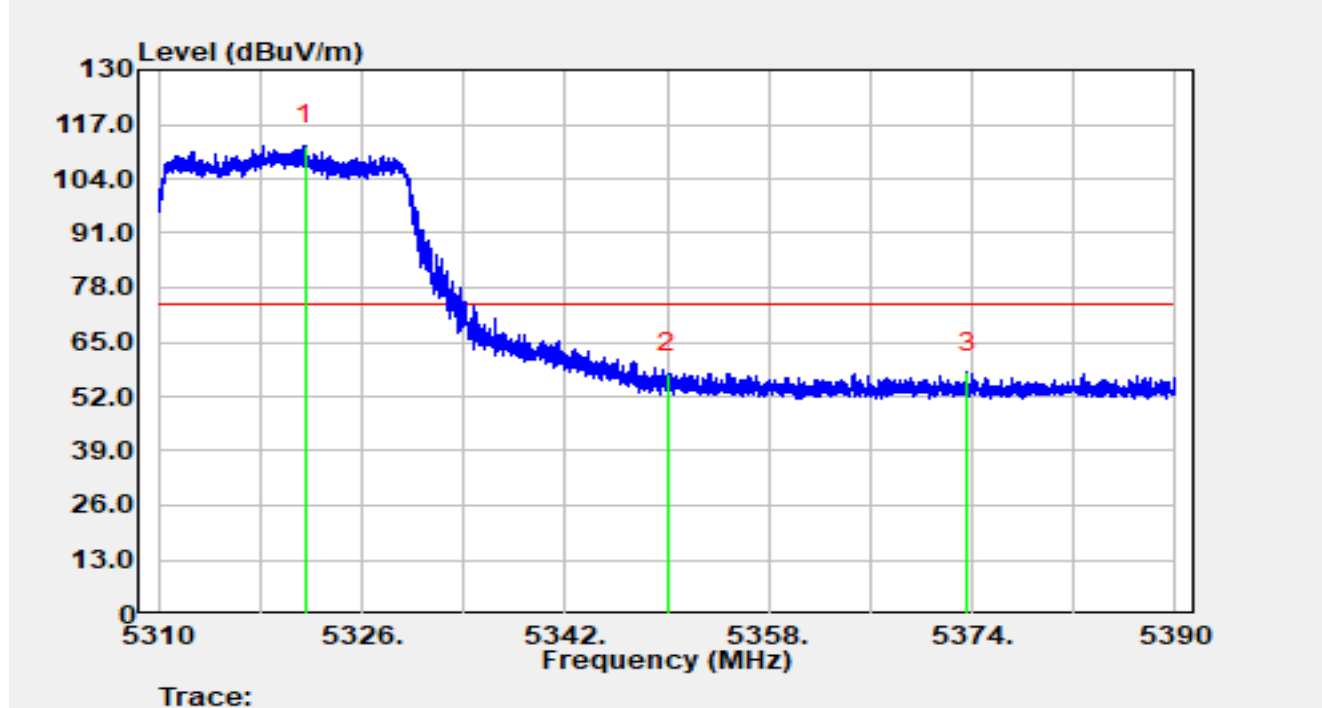


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5321.50         | 91.94          | 20.08      | 112.02               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 37.39          | 20.09      | 57.47                | -16.53      | 74.00          | Peak     |
| 3  | *    | 5373.61         | 37.66          | 20.09      | 57.75                | -16.25      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5320MHz |               |            |

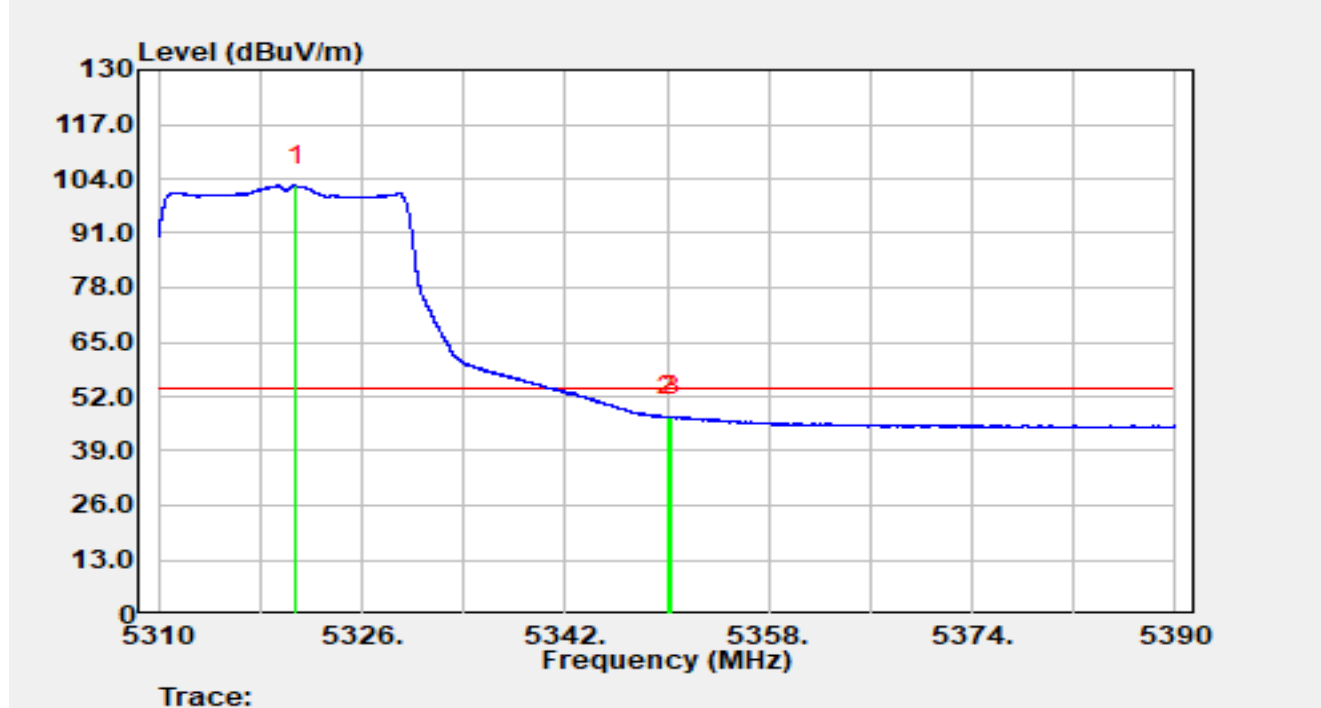


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5320.82         | 82.32          | 20.08      | 102.40               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 27.03          | 20.09      | 47.11                | -6.89       | 54.00          | Average  |
| 3  | *    | 5350.40         | 27.15          | 20.08      | 47.24                | -6.76       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5320MHz |               |            |

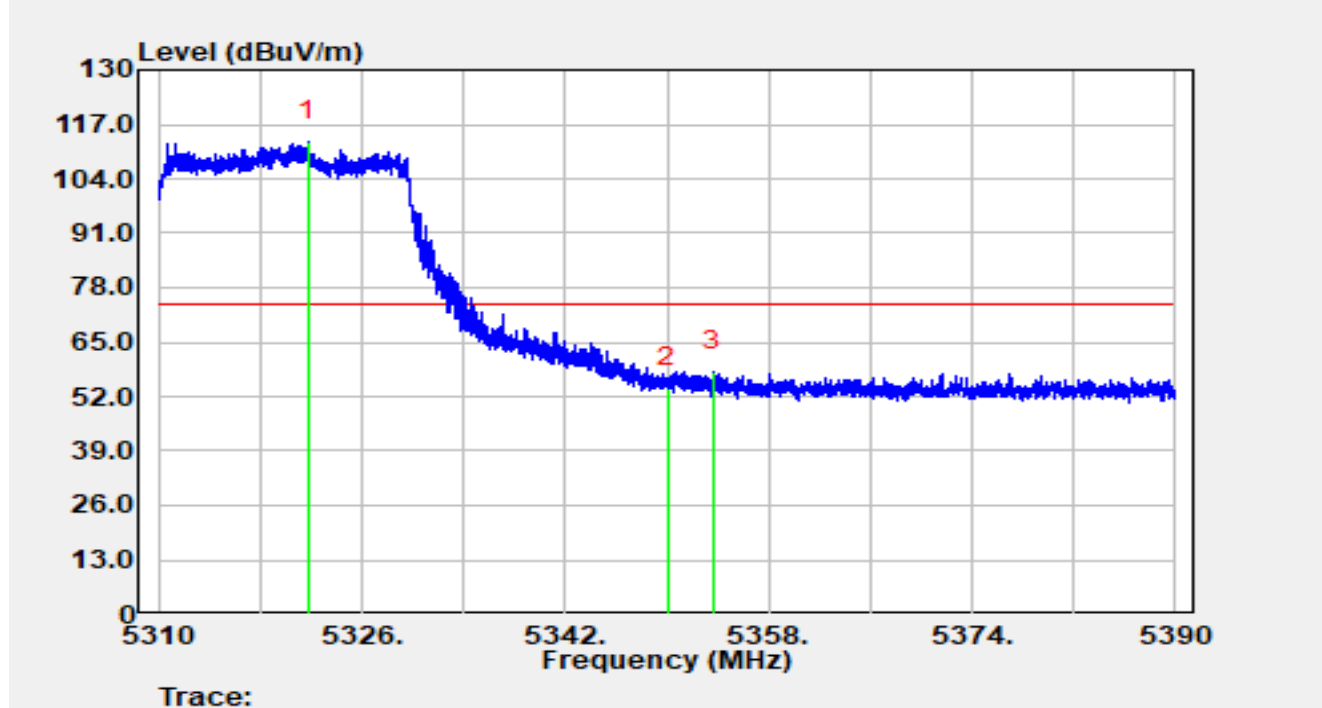


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5321.79         | 92.87          | 20.09      | 112.95               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 34.06          | 20.09      | 54.15                | -19.85      | 74.00          | Peak     |
| 3  | *    | 5353.66         | 37.98          | 20.07      | 58.05                | -15.95      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5320MHz |               |            |

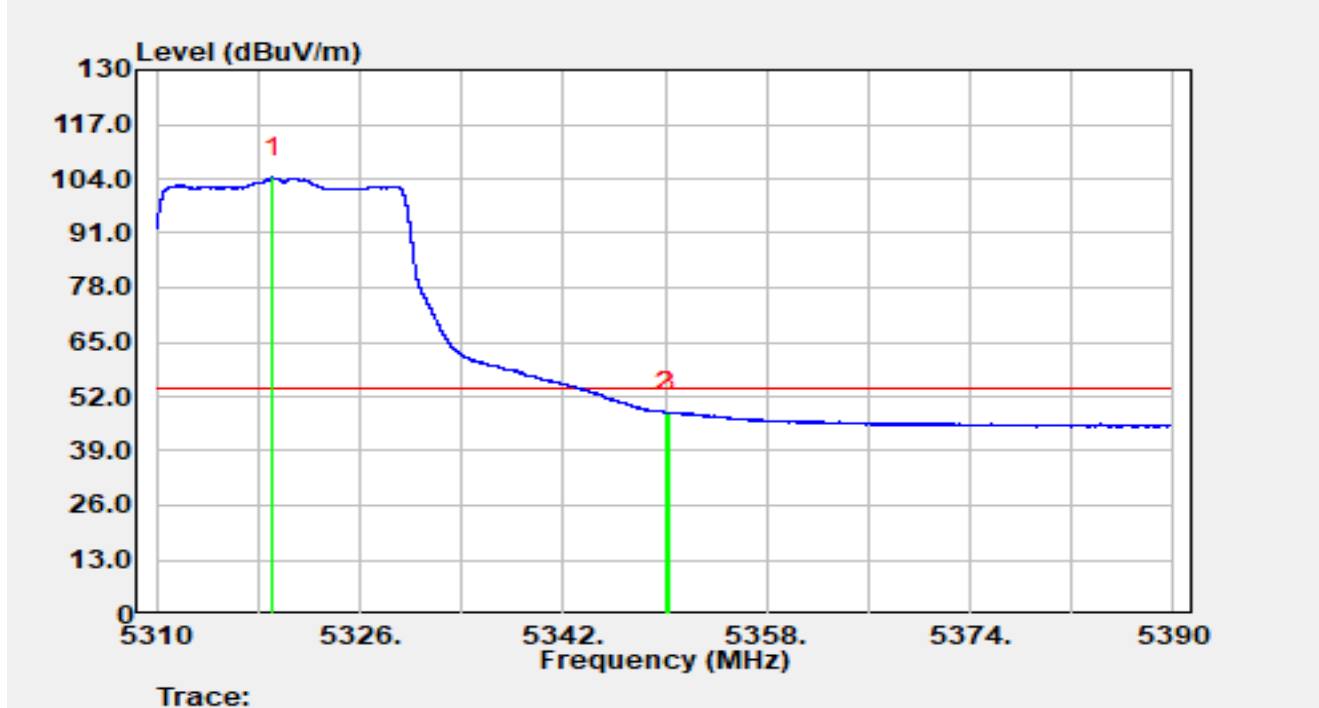


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5319.10         | 84.19          | 20.07      | 104.26               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 28.18          | 20.09      | 48.26                | -5.74       | 54.00          | Average  |
| 3  | *    | 5350.28         | 28.23          | 20.08      | 48.32                | -5.68       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5500MHz |               |            |

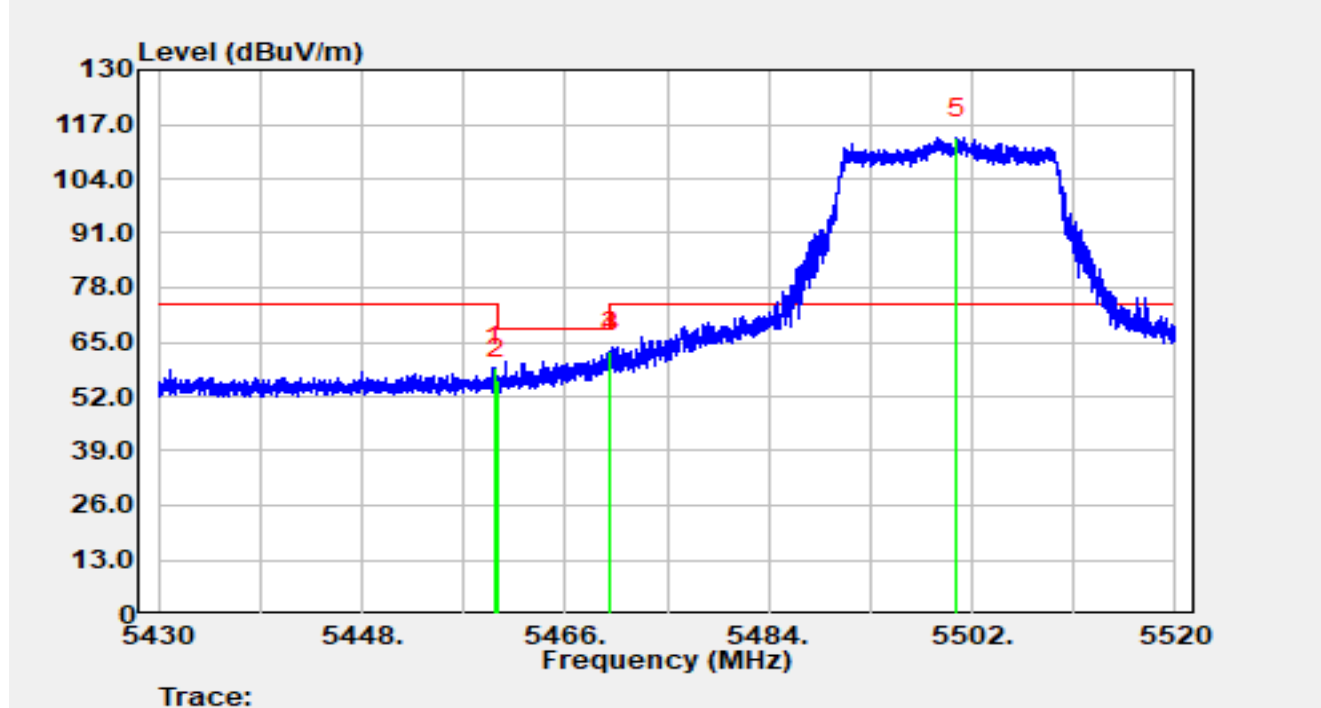


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.68         | 38.64          | 20.40      | 59.03                | -14.97      | 74.00          | Peak     |
| 2  |      | 5460.00         | 35.59          | 20.40      | 55.99                | -18.01      | 74.00          | Peak     |
| 3  | *    | 5469.99         | 42.39          | 20.31      | 62.70                | -5.50       | 68.20          | Peak     |
| 4  |      | 5470.00         | 42.39          | 20.31      | 62.69                | -5.51       | 68.20          | Peak     |
| 5  |      | 5500.59         | 93.28          | 20.47      | 113.75               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5500MHz |               |            |

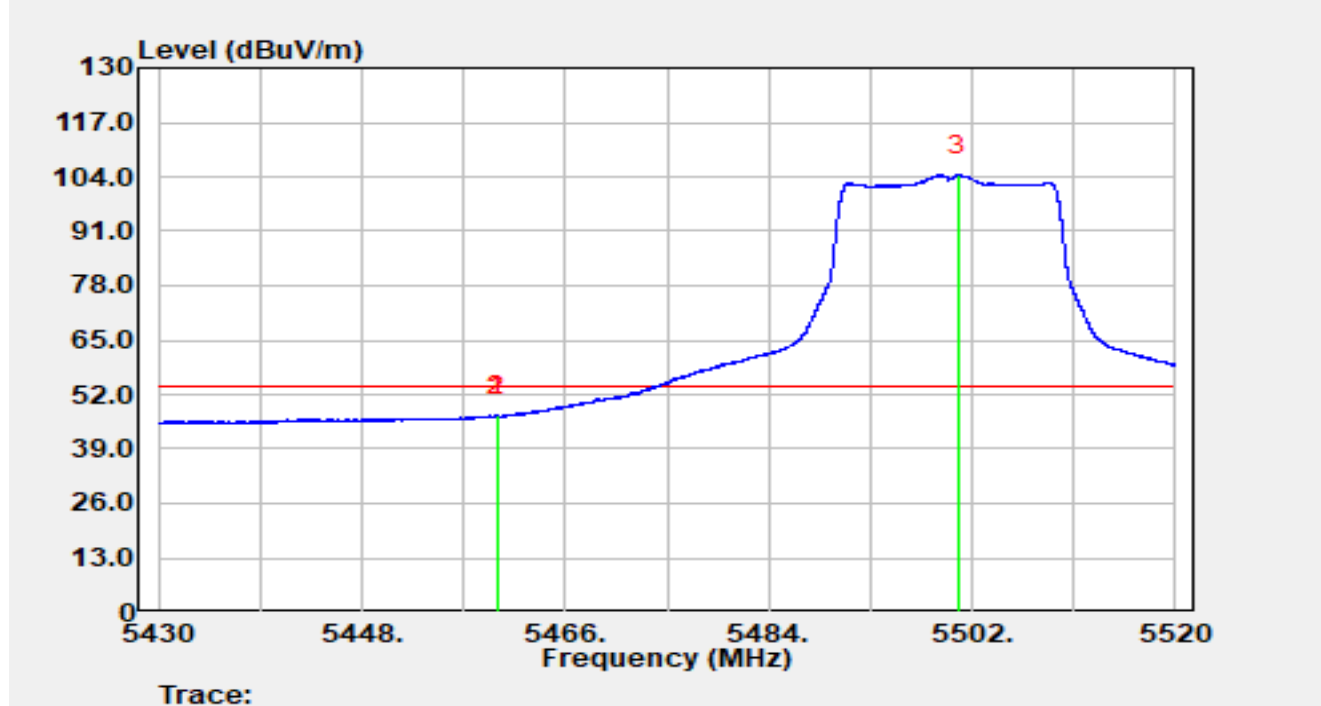


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.98         | 26.55          | 20.40      | 46.94                | -7.06       | 54.00          | Average  |
| 2  |      | 5460.00         | 26.49          | 20.40      | 46.88                | -7.12       | 54.00          | Average  |
| 3  |      | 5500.73         | 83.97          | 20.47      | 104.44               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5500MHz |               |            |

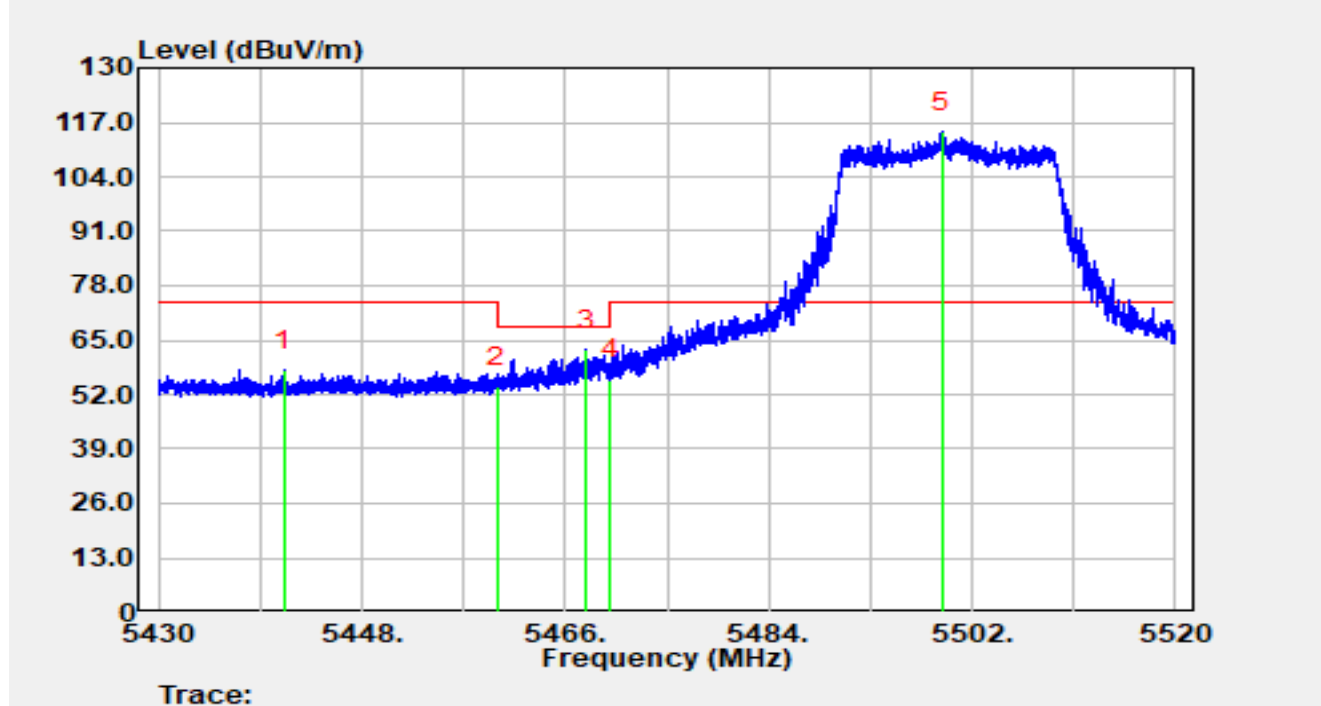


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5441.14         | 37.34          | 20.37      | 57.71                | -16.29      | 74.00          | Peak     |
| 2  |      | 5460.00         | 33.39          | 20.40      | 53.79                | -20.21      | 74.00          | Peak     |
| 3  | *    | 5467.90         | 42.29          | 20.33      | 62.61                | -5.59       | 68.20          | Peak     |
| 4  |      | 5470.00         | 35.28          | 20.31      | 55.59                | -12.61      | 68.20          | Peak     |
| 5  |      | 5499.30         | 94.21          | 20.46      | 114.67               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5500MHz |               |            |

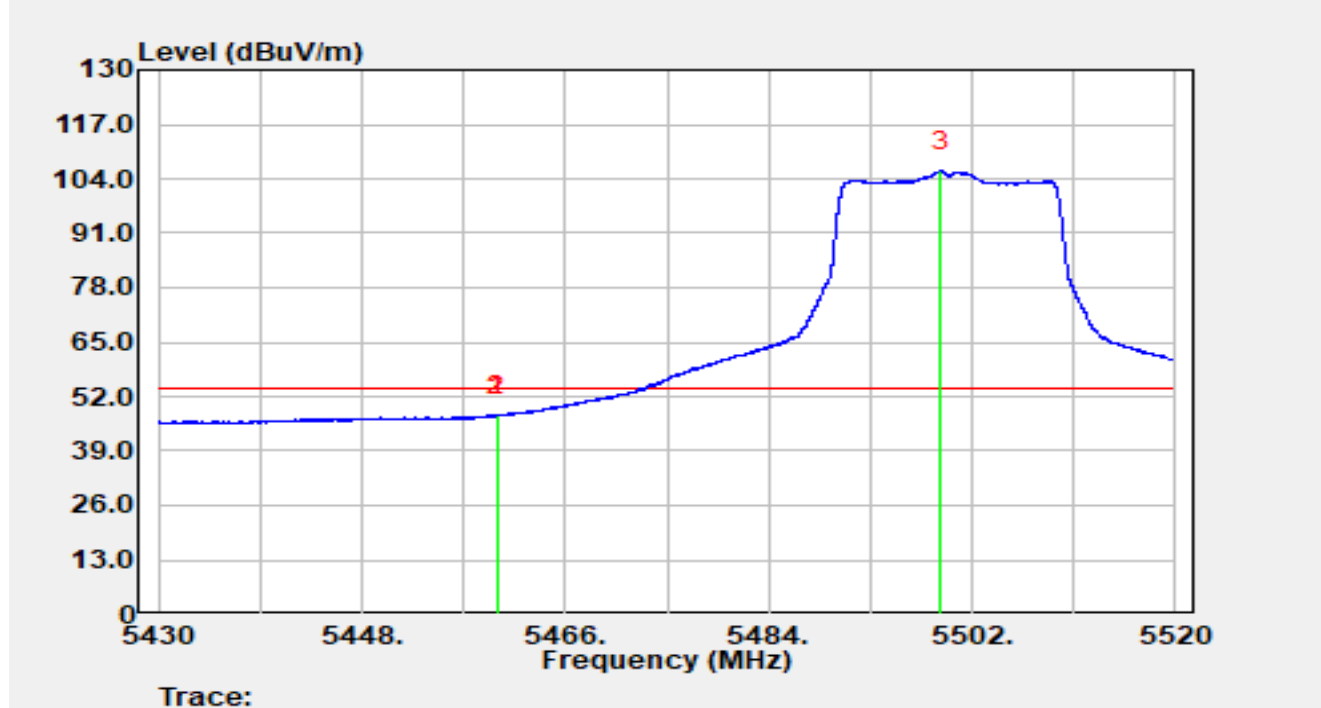


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.98         | 27.15          | 20.40      | 47.54                | -6.46       | 54.00          | Average  |
| 2  |      | 5460.00         | 27.14          | 20.40      | 47.54                | -6.46       | 54.00          | Average  |
| 3  |      | 5499.27         | 85.50          | 20.46      | 105.96               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5700MHz |               |            |

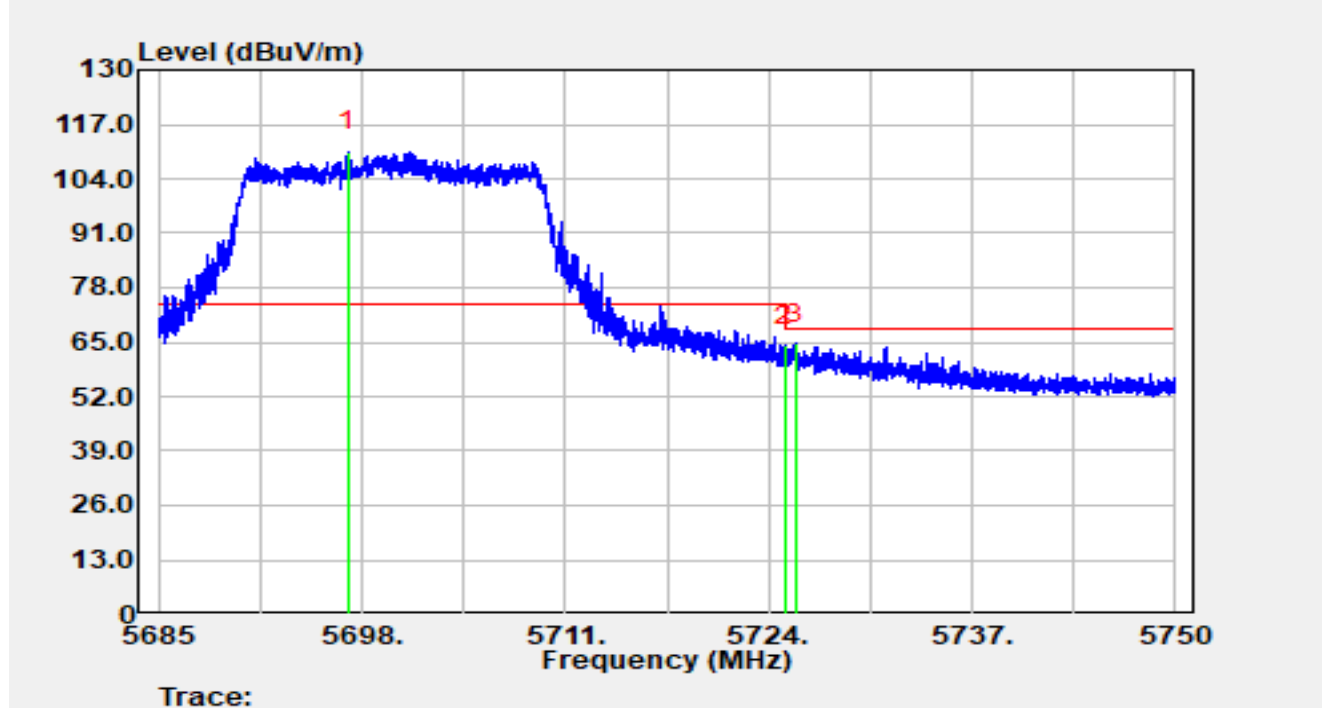


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5697.08         | 89.92          | 20.53      | 110.46               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 43.49          | 20.69      | 64.17                | -4.03       | 68.20          | Peak     |
| 3  | *    | 5725.68         | 43.95          | 20.69      | 64.64                | -3.56       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5700MHz |               |            |

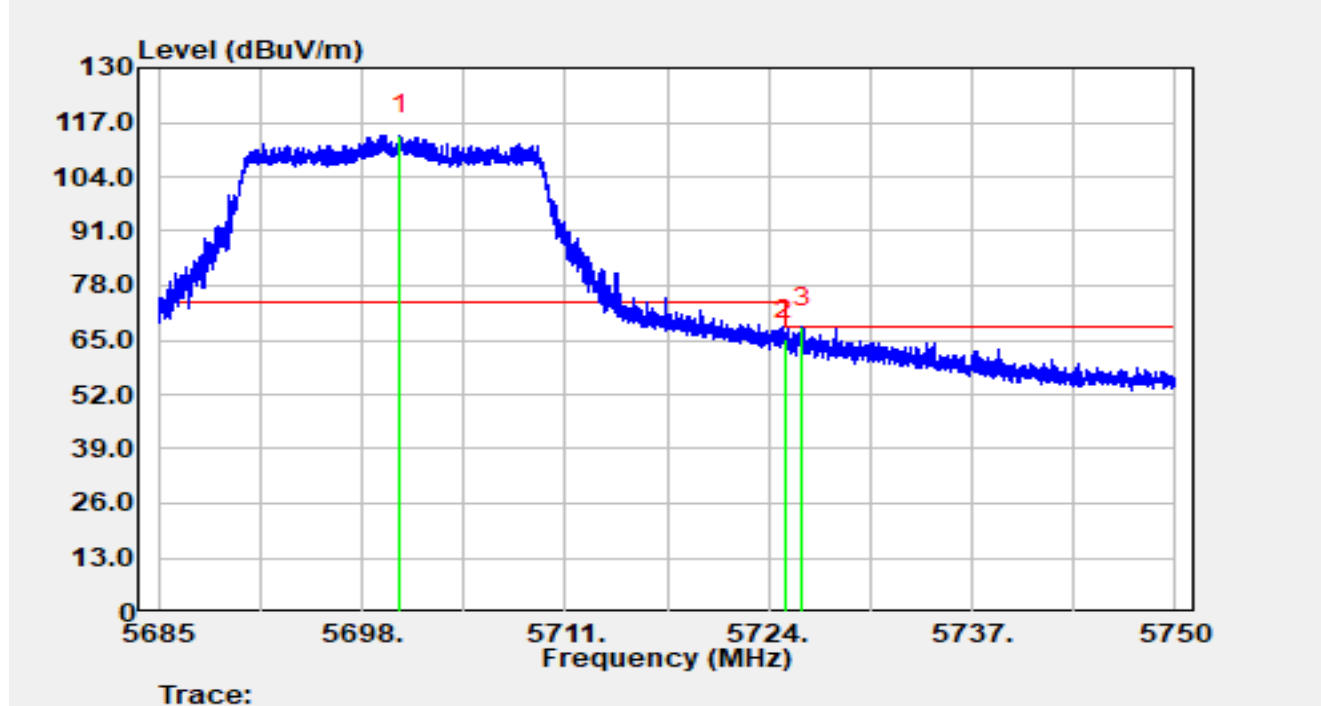


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5700.41         | 93.34          | 20.58      | 113.92               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 44.54          | 20.69      | 65.22                | -2.98       | 68.20          | Peak     |
| 3  | *    | 5726.18         | 47.34          | 20.68      | 68.02                | -0.18       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5745MHz |               |            |

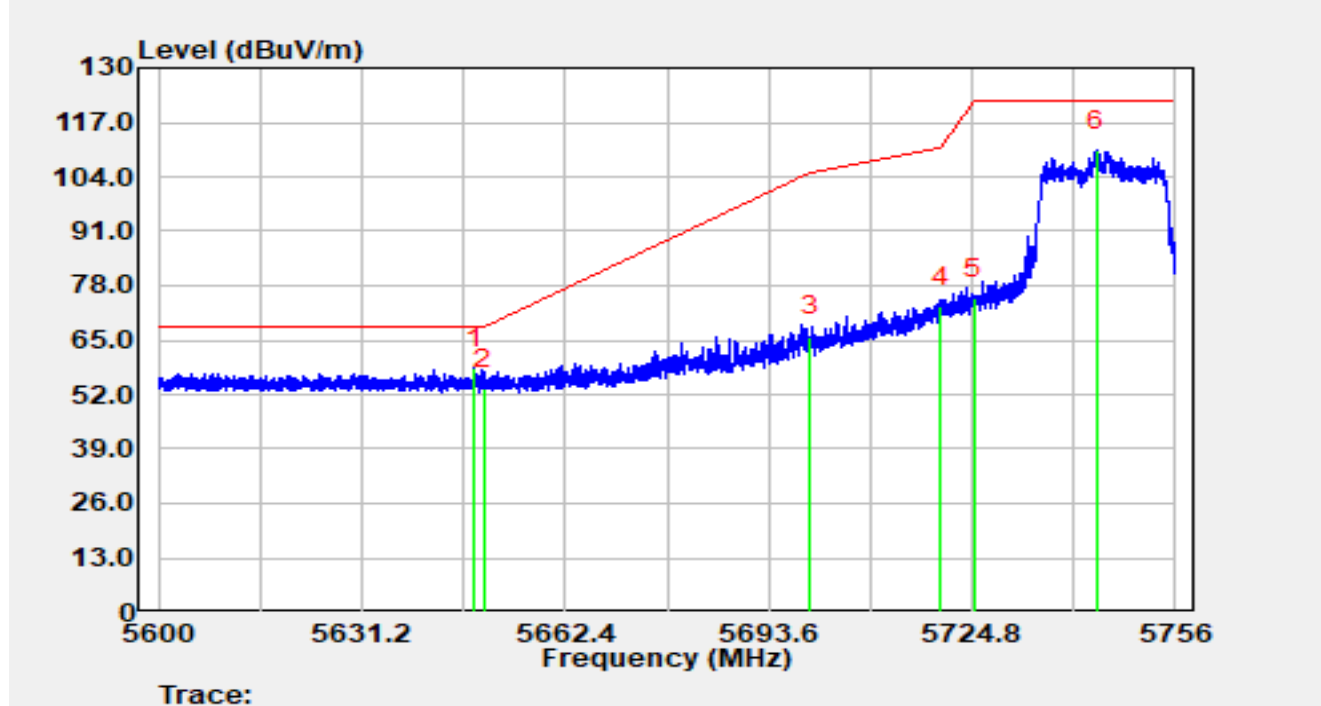


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5648.44         | 37.98          | 20.38      | 58.35                | -9.85       | 68.20          | Peak     |
| 2  |      | 5650.00         | 33.08          | 20.37      | 53.45                | -14.75      | 68.20          | Peak     |
| 3  |      | 5700.00         | 45.26          | 20.58      | 65.84                | -39.36      | 105.20         | Peak     |
| 4  |      | 5720.00         | 52.28          | 20.70      | 72.98                | -37.82      | 110.80         | Peak     |
| 5  |      | 5725.00         | 54.37          | 20.69      | 75.05                | -47.15      | 122.20         | Peak     |
| 6  |      | 5743.80         | 89.56          | 20.58      | 110.14               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5745MHz |               |            |

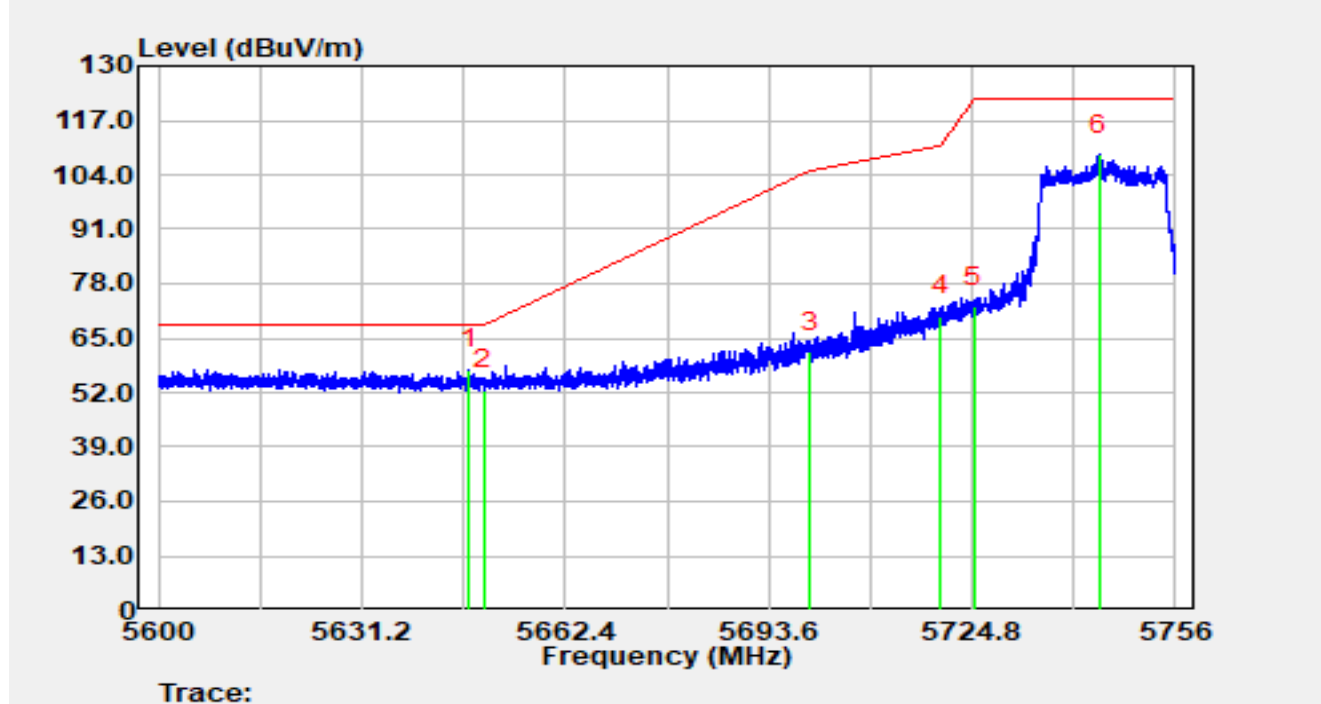


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5647.60         | 37.24          | 20.38      | 57.62                | -10.58      | 68.20          | Peak     |
| 2  |      | 5650.00         | 32.20          | 20.37      | 52.58                | -15.62      | 68.20          | Peak     |
| 3  |      | 5700.00         | 41.08          | 20.58      | 61.66                | -43.54      | 105.20         | Peak     |
| 4  |      | 5720.00         | 49.49          | 20.70      | 70.19                | -40.61      | 110.80         | Peak     |
| 5  |      | 5725.00         | 51.83          | 20.69      | 72.52                | -49.68      | 122.20         | Peak     |
| 6  |      | 5744.38         | 88.32          | 20.58      | 108.90               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5825MHz |               |            |

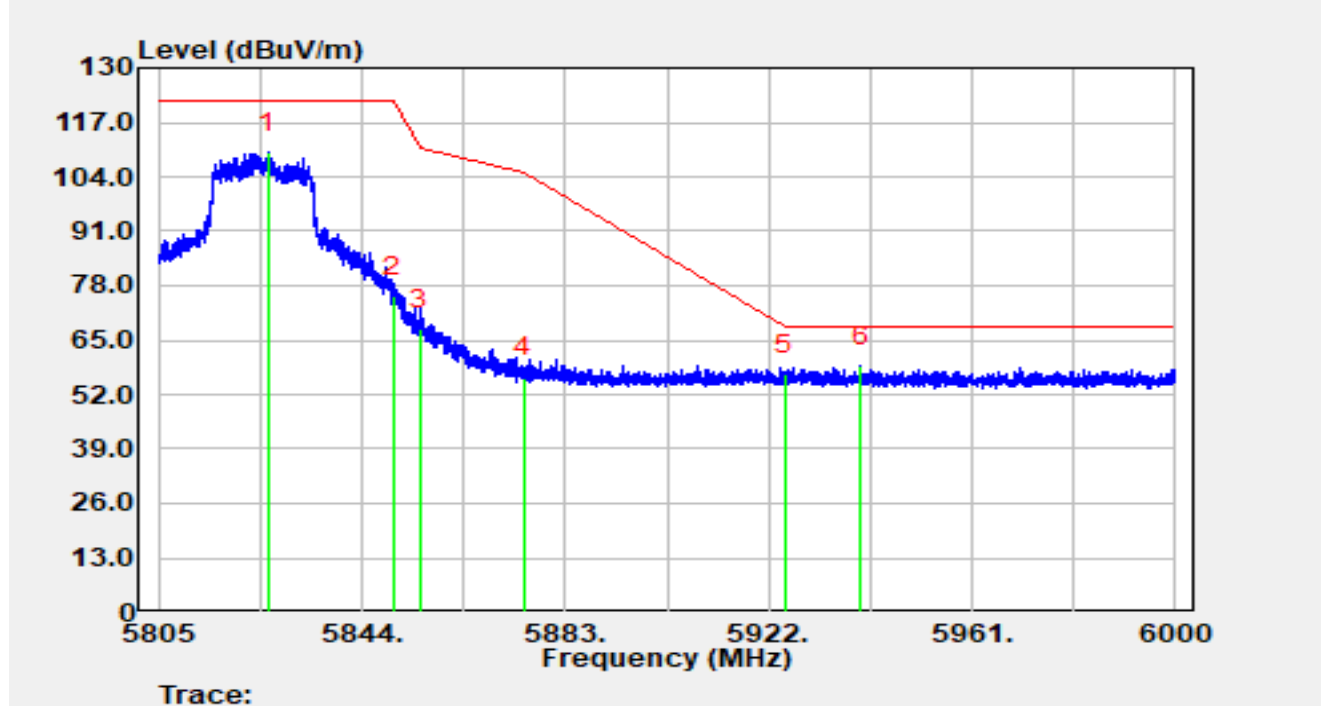


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5825.96         | 88.72          | 21.00      | 109.73               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 54.51          | 20.79      | 75.30                | -46.90      | 122.20         | Peak     |
| 3  |      | 5855.00         | 46.94          | 20.76      | 67.69                | -43.11      | 110.80         | Peak     |
| 4  |      | 5875.00         | 35.35          | 20.78      | 56.13                | -49.07      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.59          | 21.12      | 56.71                | -11.49      | 68.20          | Peak     |
| 6  | *    | 5939.71         | 37.73          | 20.93      | 58.66                | -9.54       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT20 at 5825MHz |               |            |

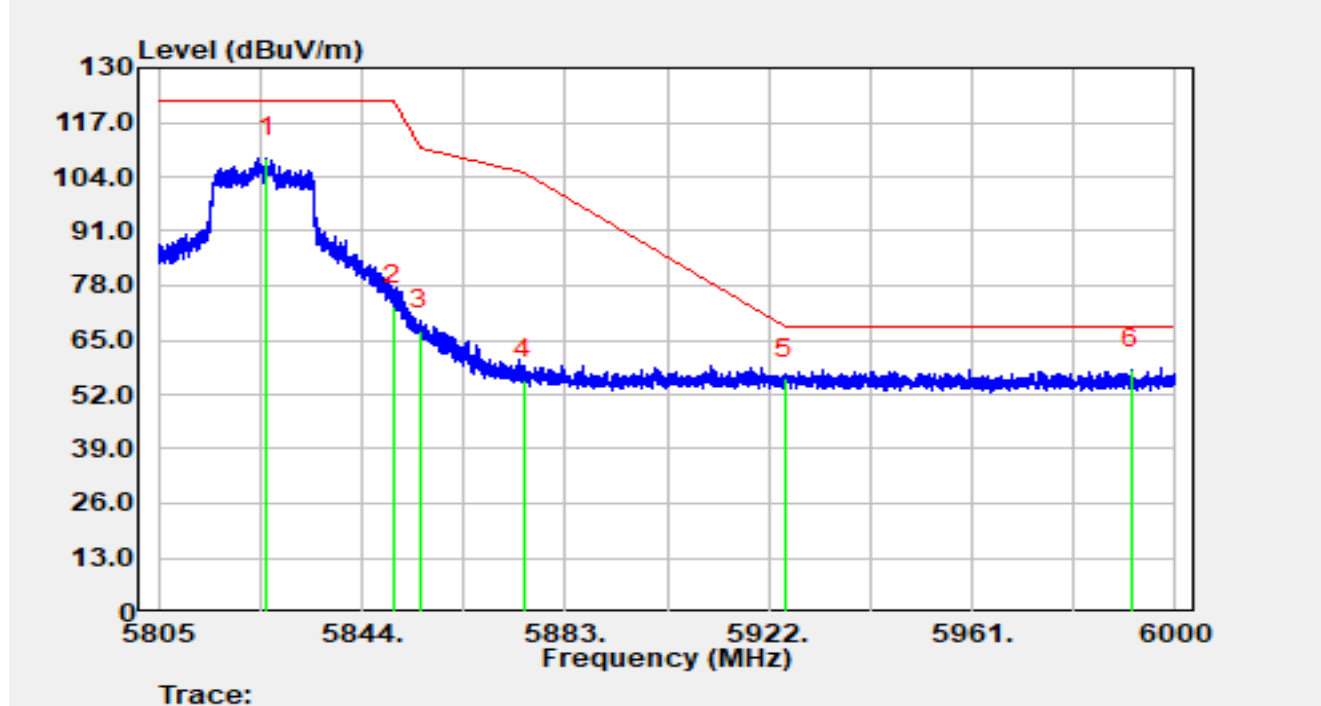


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5825.81         | 87.65          | 21.00      | 108.66               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 52.39          | 20.79      | 73.18                | -49.02      | 122.20         | Peak     |
| 3  |      | 5855.00         | 46.60          | 20.76      | 67.35                | -43.45      | 110.80         | Peak     |
| 4  |      | 5875.00         | 34.83          | 20.78      | 55.61                | -49.59      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.74          | 21.12      | 55.86                | -12.34      | 68.20          | Peak     |
| 6  | *    | 5991.58         | 37.03          | 20.97      | 58.01                | -10.19      | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5190MHz |               |            |

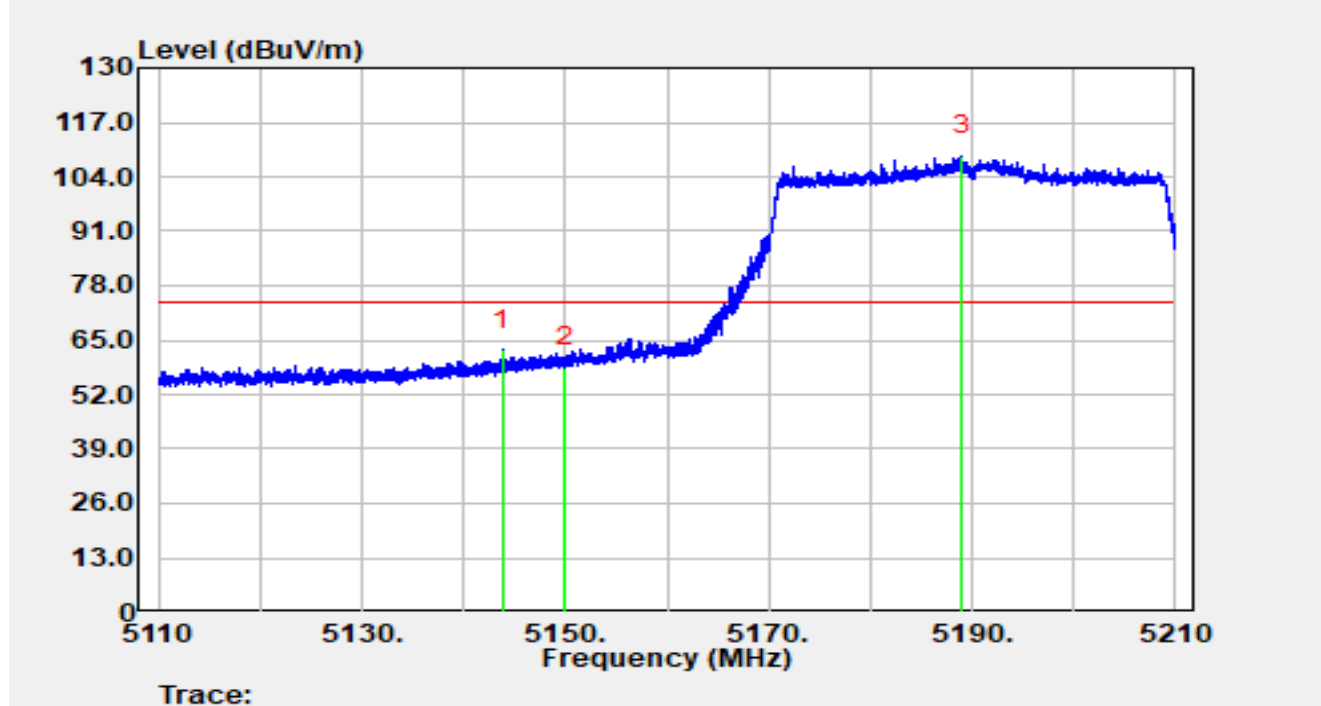


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5143.78         | 42.43          | 20.15      | 62.58                | -11.42      | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.37          | 20.14      | 58.51                | -15.49      | 74.00          | Peak     |
| 3  |      | 5188.98         | 89.13          | 19.99      | 109.12               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5190MHz |               |            |

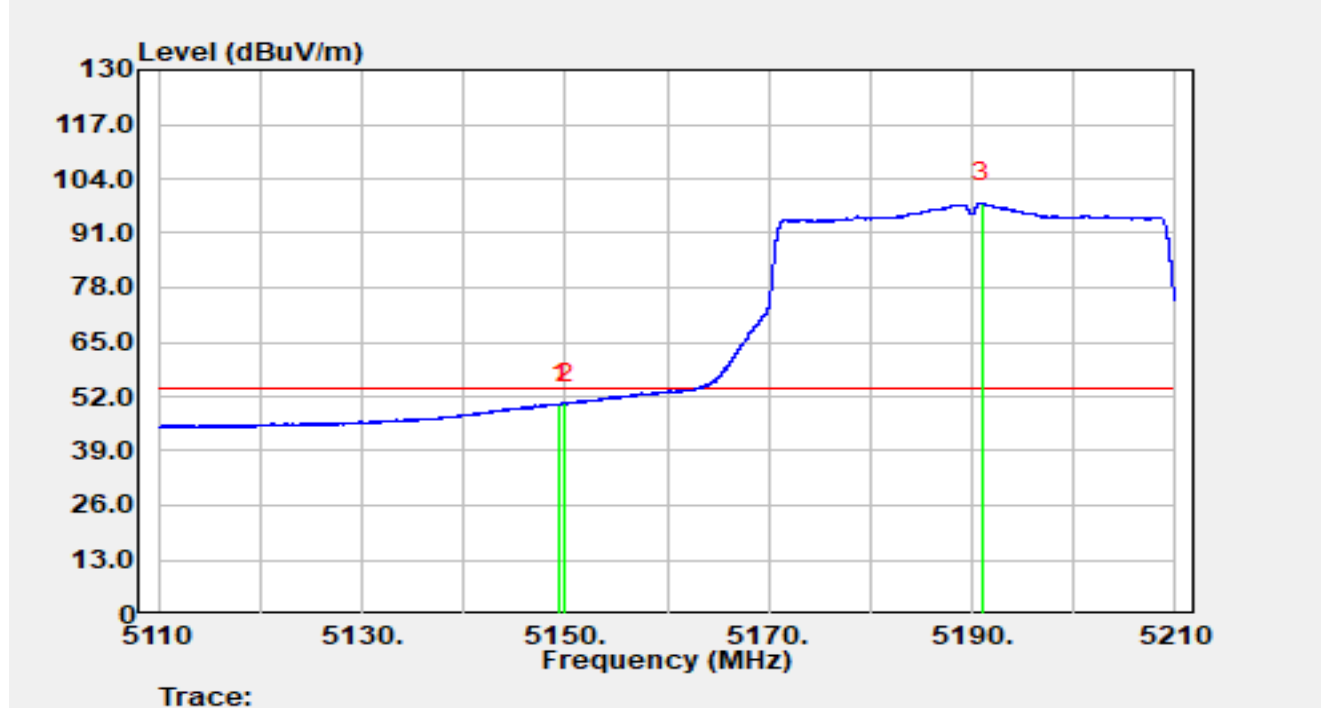


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5149.43         | 30.03          | 20.14      | 50.17                | -3.83       | 54.00          | Average  |
| 2  | *    | 5150.00         | 30.20          | 20.14      | 50.34                | -3.66       | 54.00          | Average  |
| 3  |      | 5190.94         | 78.22          | 20.00      | 98.21                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5190MHz |               |            |

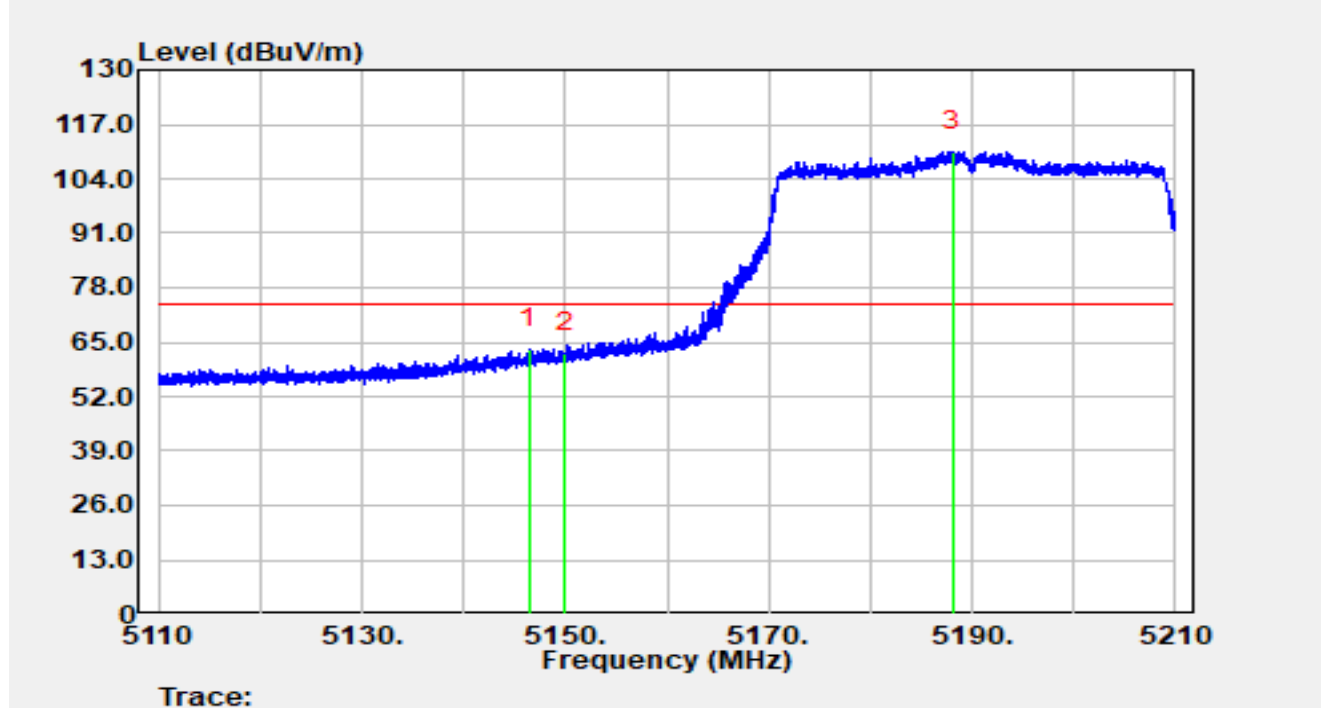


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5146.45         | 43.19          | 20.14      | 63.33                | -10.67      | 74.00          | Peak     |
| 2  |      | 5150.00         | 42.19          | 20.14      | 62.33                | -11.67      | 74.00          | Peak     |
| 3  |      | 5188.11         | 90.60          | 19.98      | 110.58               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-05-31 |
| Temperature | 24.1°C                                | Humidity      | 48.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Jerry Lu   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5190MHz |               |            |

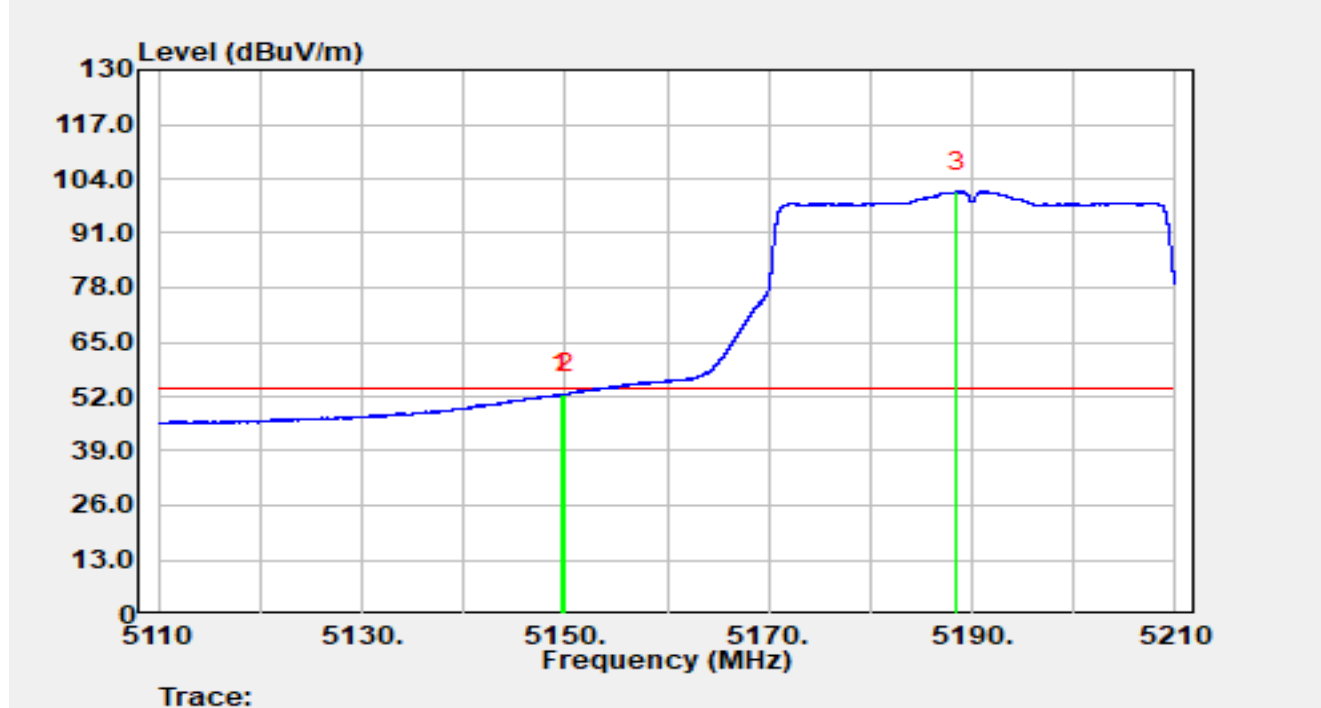


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.58         | 32.41          | 20.14      | 52.55                | -1.45       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.40          | 20.14      | 52.54                | -1.46       | 54.00          | Average  |
| 3  |      | 5188.47         | 80.98          | 19.98      | 100.96               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5310MHz |               |            |

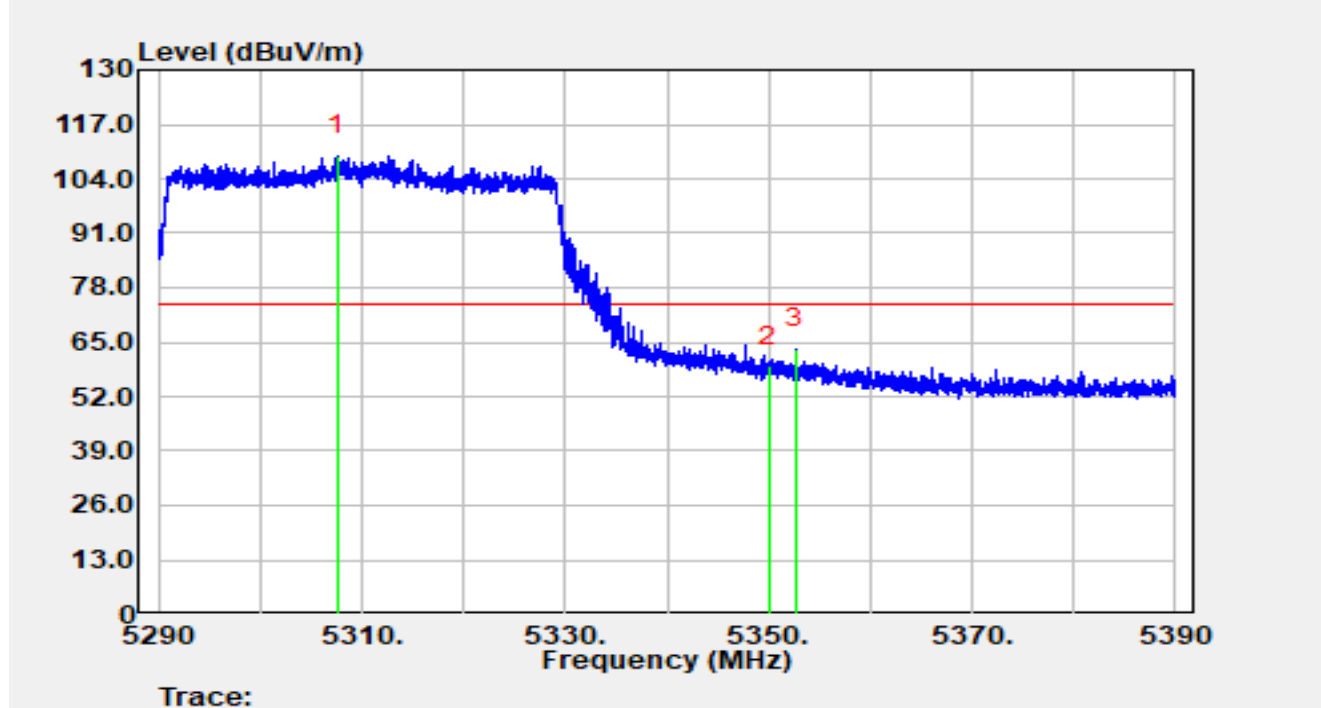


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5307.53         | 89.39          | 20.01      | 109.40               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 39.06          | 20.09      | 59.14                | -14.86      | 74.00          | Peak     |
| 3  | *    | 5352.64         | 43.22          | 20.07      | 63.28                | -10.72      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5310MHz |               |            |

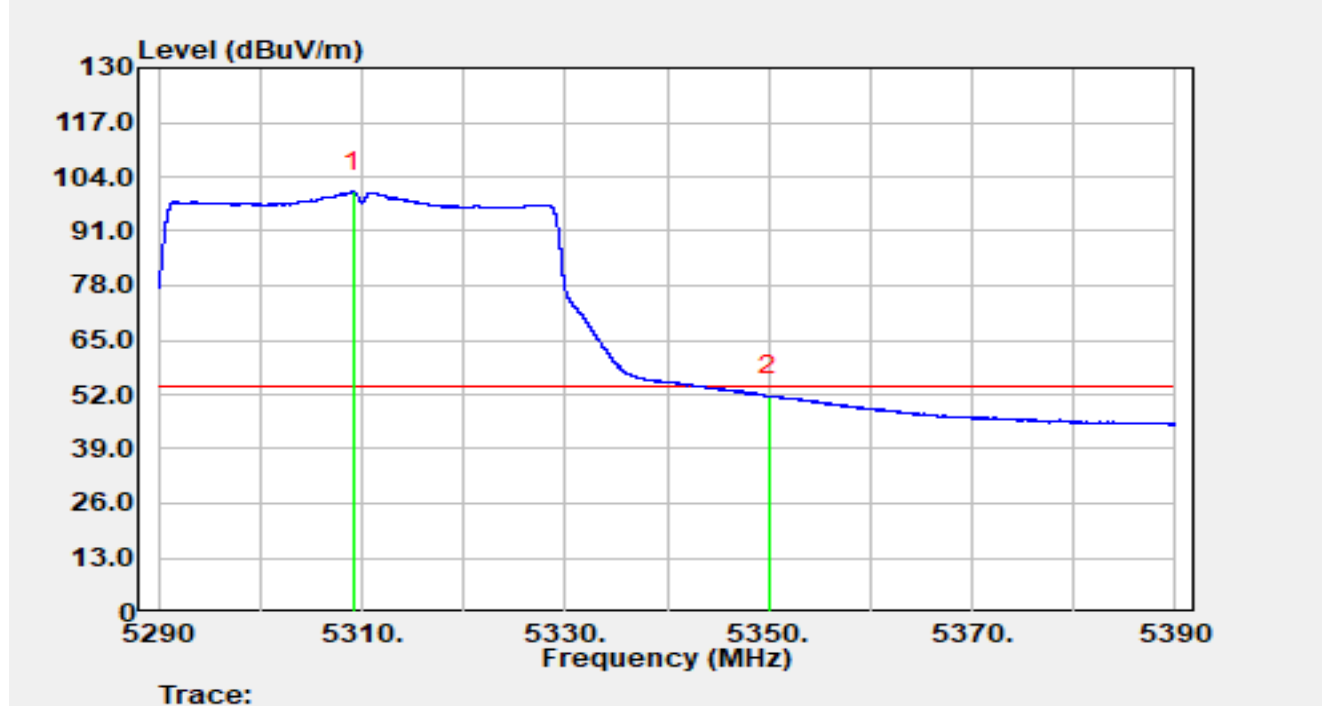


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5309.18         | 80.51          | 20.02      | 100.53               | N/A         | N/A            | Average  |
| 2  | *    | 5350.00         | 31.65          | 20.09      | 51.73                | -2.27       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5310MHz |               |            |

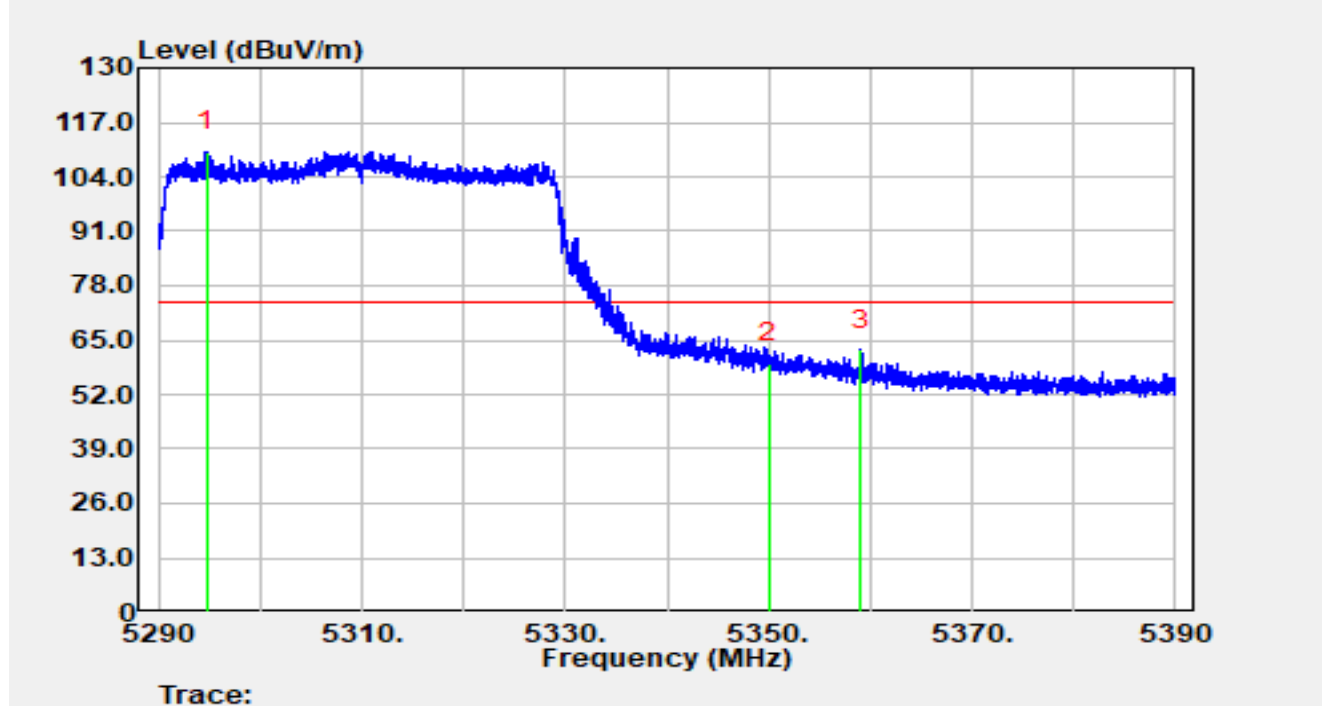


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5294.68         | 90.03          | 19.96      | 109.99               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 39.37          | 20.09      | 59.45                | -14.55      | 74.00          | Peak     |
| 3  | *    | 5359.11         | 42.60          | 20.06      | 62.66                | -11.34      | 74.00          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5310MHz |               |            |

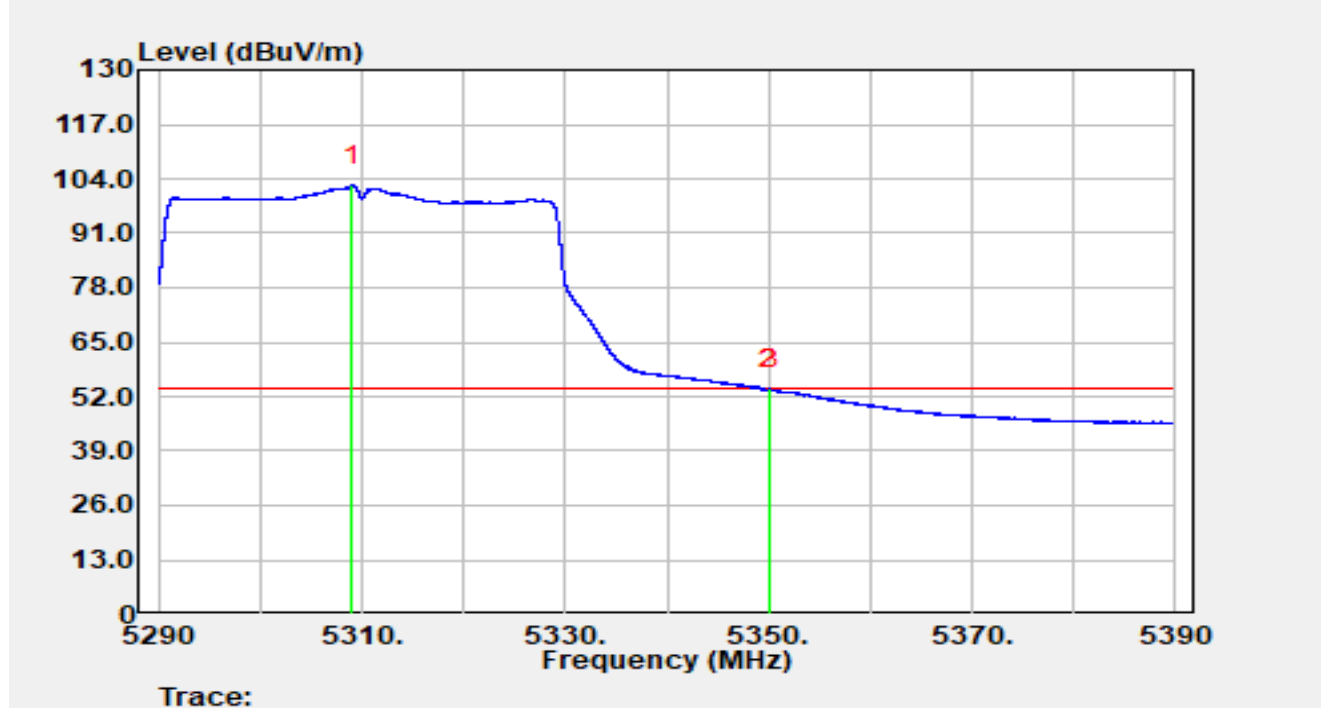


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5309.08         | 82.29          | 20.02      | 102.31               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 33.50          | 20.09      | 53.59                | -0.41       | 54.00          | Average  |
| 3  | *    | 5350.14         | 33.64          | 20.09      | 53.72                | -0.28       | 54.00          | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5510MHz |               |            |

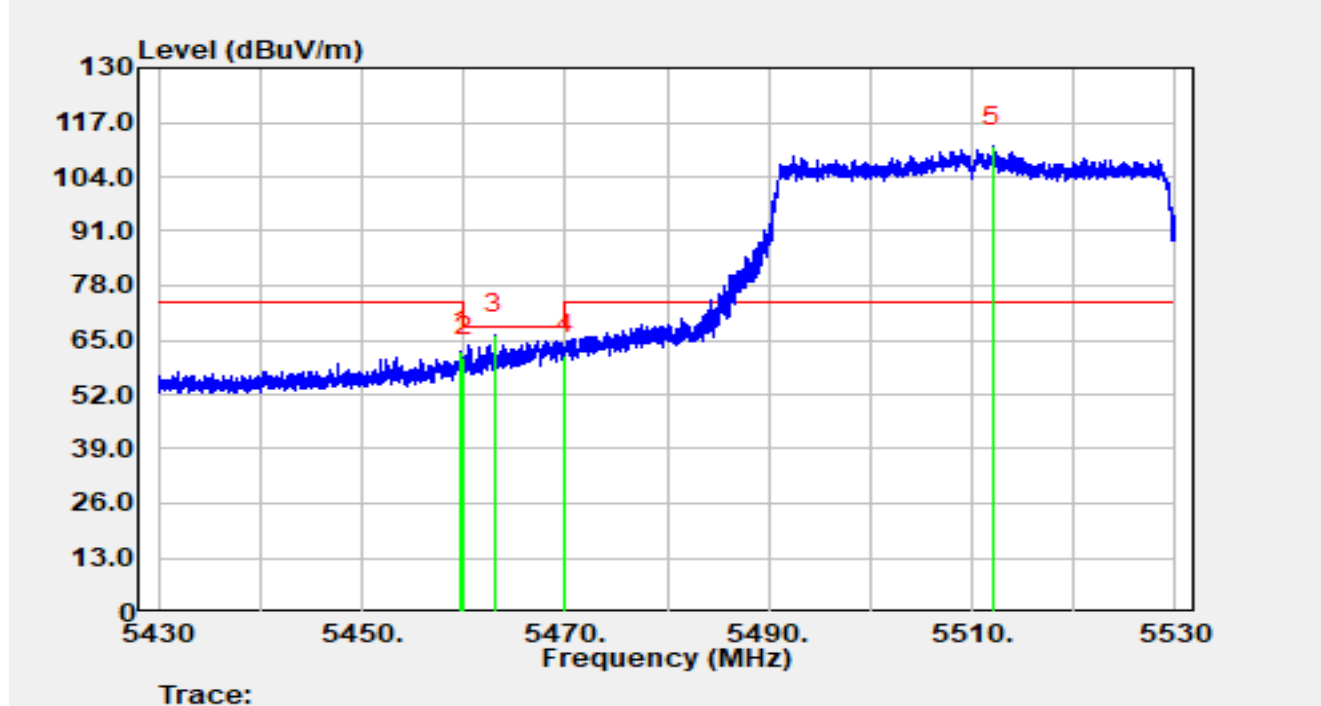


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.74         | 42.06          | 20.40      | 62.46                | -11.54      | 74.00          | Peak     |
| 2  |      | 5460.00         | 40.45          | 20.40      | 60.85                | -7.35       | 68.20          | Peak     |
| 3  | *    | 5463.09         | 46.00          | 20.37      | 66.37                | -1.83       | 68.20          | Peak     |
| 4  |      | 5470.00         | 41.25          | 20.31      | 61.55                | -6.65       | 68.20          | Peak     |
| 5  |      | 5512.00         | 90.78          | 20.51      | 111.29               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5510MHz |               |            |

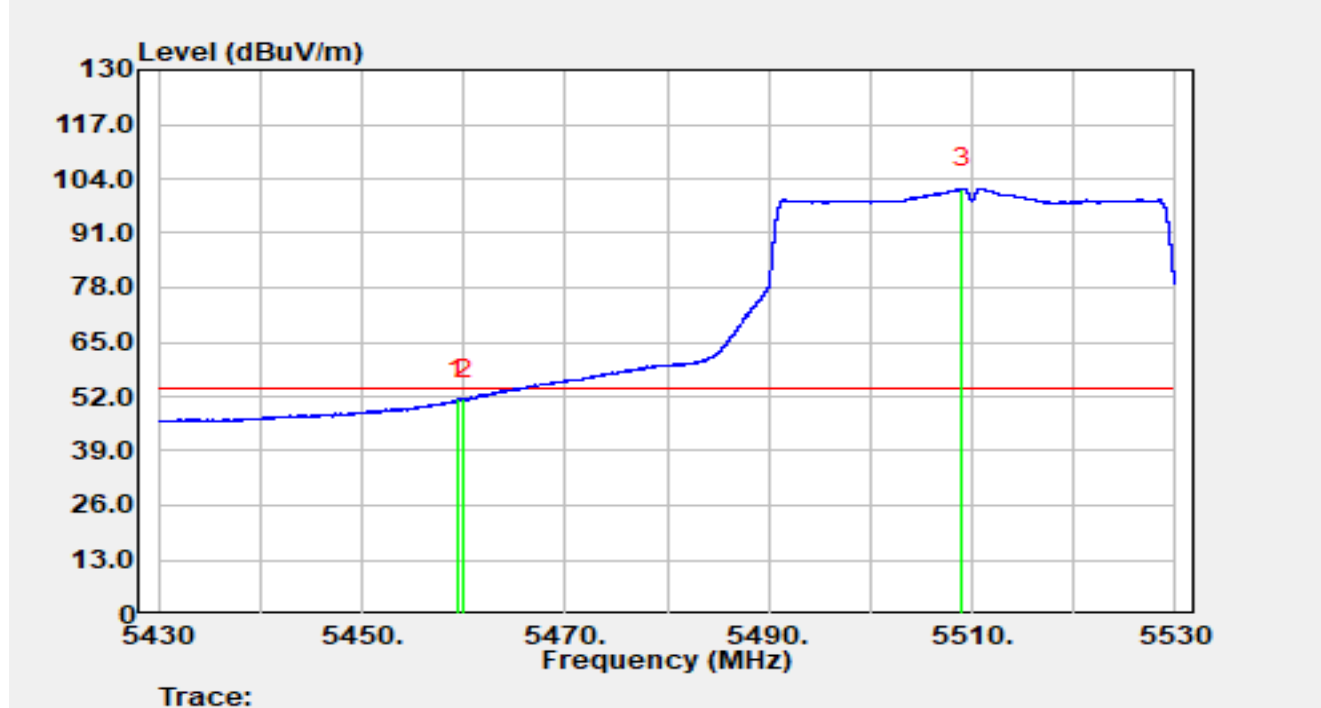


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.41         | 30.93          | 20.40      | 51.33                | -2.67       | 54.00          | Average  |
| 2  |      | 5460.00         | 30.88          | 20.40      | 51.28                | -2.72       | 54.00          | Average  |
| 3  |      | 5509.07         | 81.19          | 20.50      | 101.70               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5510MHz |               |            |

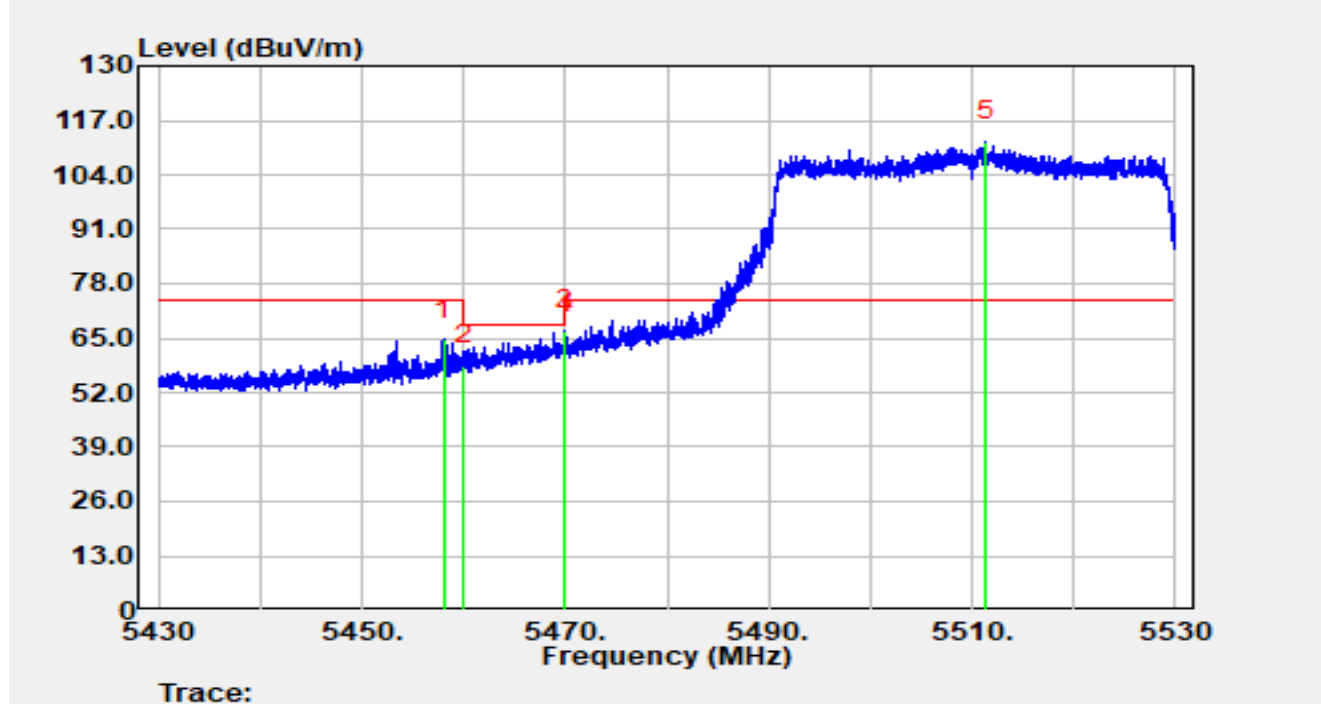


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5458.00         | 44.16          | 20.41      | 64.57                | -9.43       | 74.00          | Peak     |
| 2  |      | 5460.00         | 38.18          | 20.40      | 58.58                | -9.62       | 68.20          | Peak     |
| 3  | *    | 5469.98         | 46.50          | 20.31      | 66.81                | -1.39       | 68.20          | Peak     |
| 4  |      | 5470.00         | 45.91          | 20.31      | 66.22                | -1.98       | 68.20          | Peak     |
| 5  |      | 5511.33         | 91.42          | 20.51      | 111.92               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5510MHz |               |            |

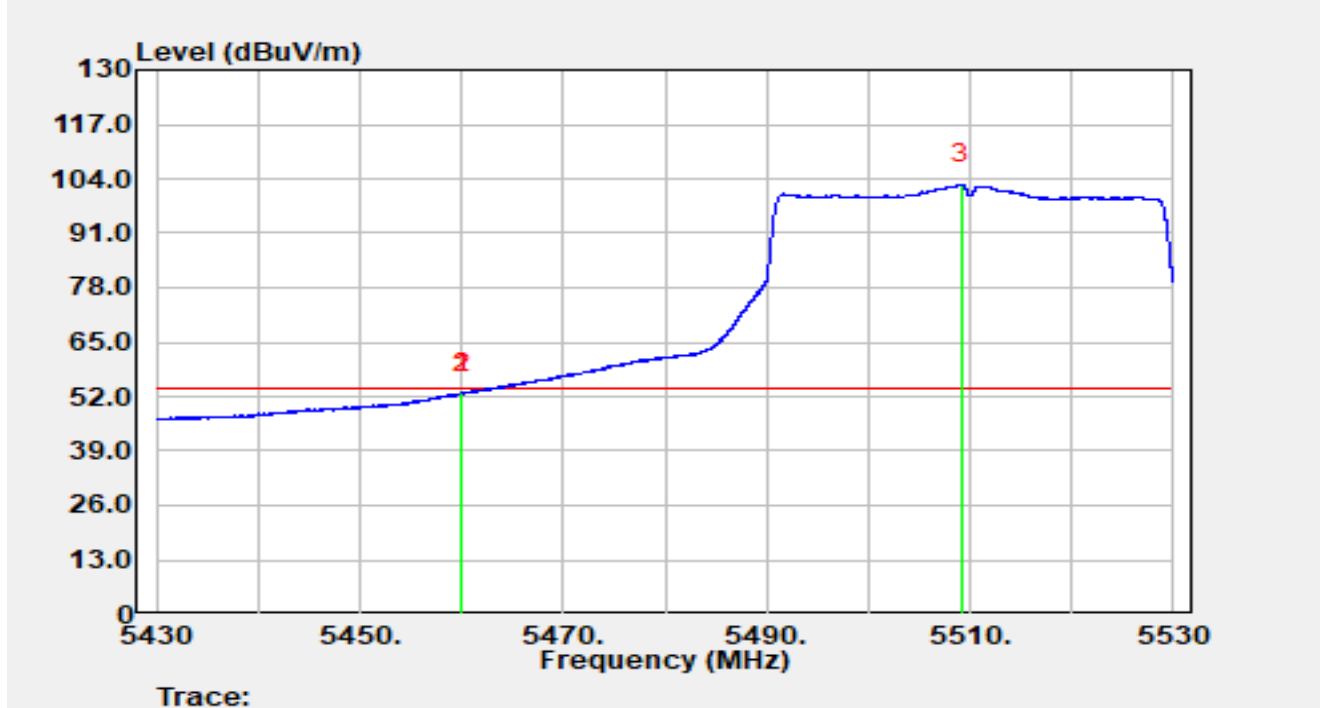


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.97         | 32.42          | 20.40      | 52.81                | -1.19       | 54.00          | Average  |
| 2  |      | 5460.00         | 32.35          | 20.40      | 52.74                | -1.26       | 54.00          | Average  |
| 3  |      | 5509.18         | 82.26          | 20.50      | 102.77               | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5670MHz |               |            |

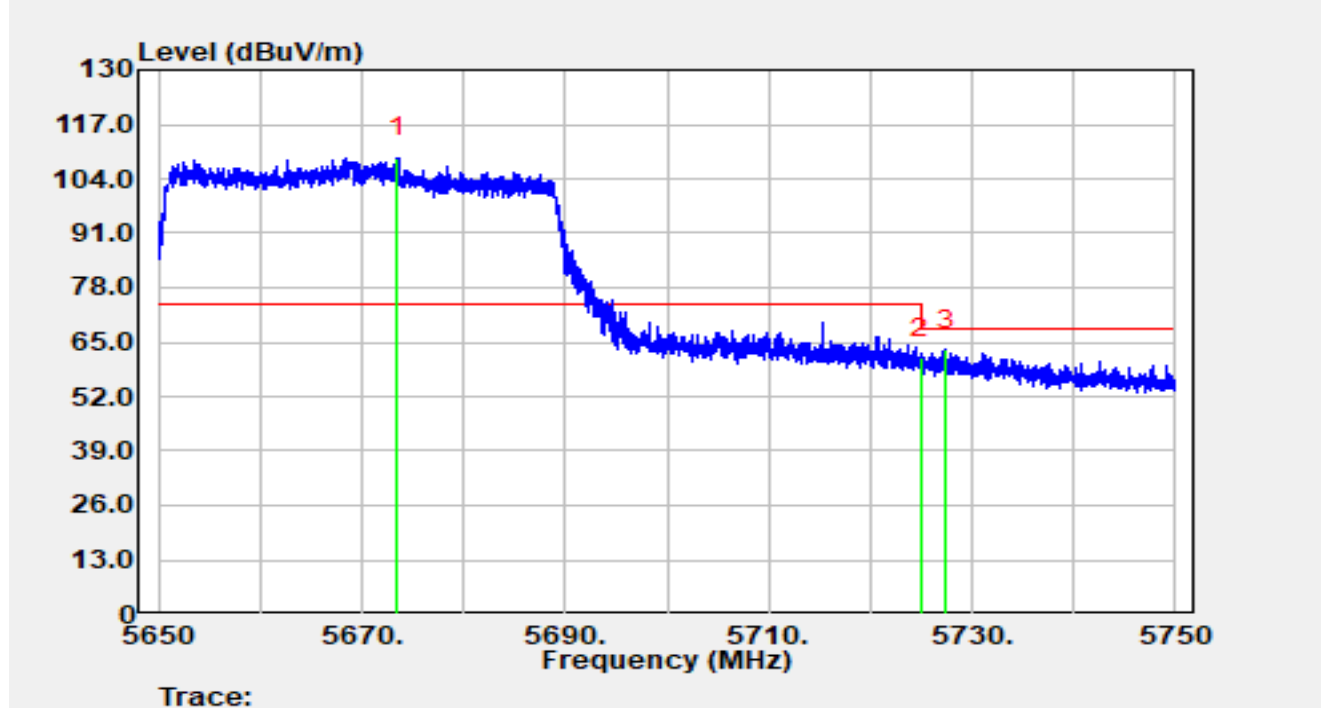


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5673.54         | 88.79          | 20.32      | 109.11               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 40.53          | 20.69      | 61.21                | -6.99       | 68.20          | Peak     |
| 3  | *    | 5727.44         | 42.53          | 20.68      | 63.21                | -4.99       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5670MHz |               |            |

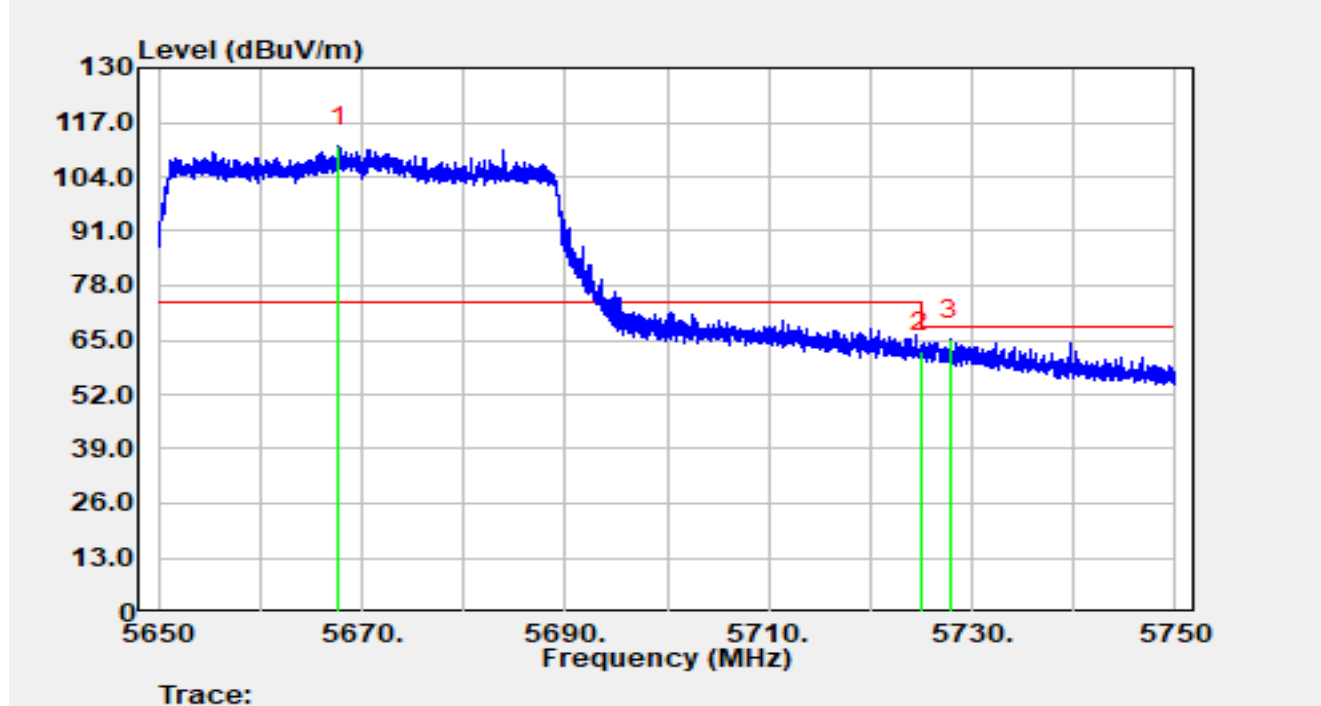


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5667.76         | 91.02          | 20.33      | 111.35               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 41.55          | 20.69      | 62.24                | -5.96       | 68.20          | Peak     |
| 3  | *    | 5727.85         | 44.51          | 20.67      | 65.18                | -3.02       | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5755MHz |               |            |

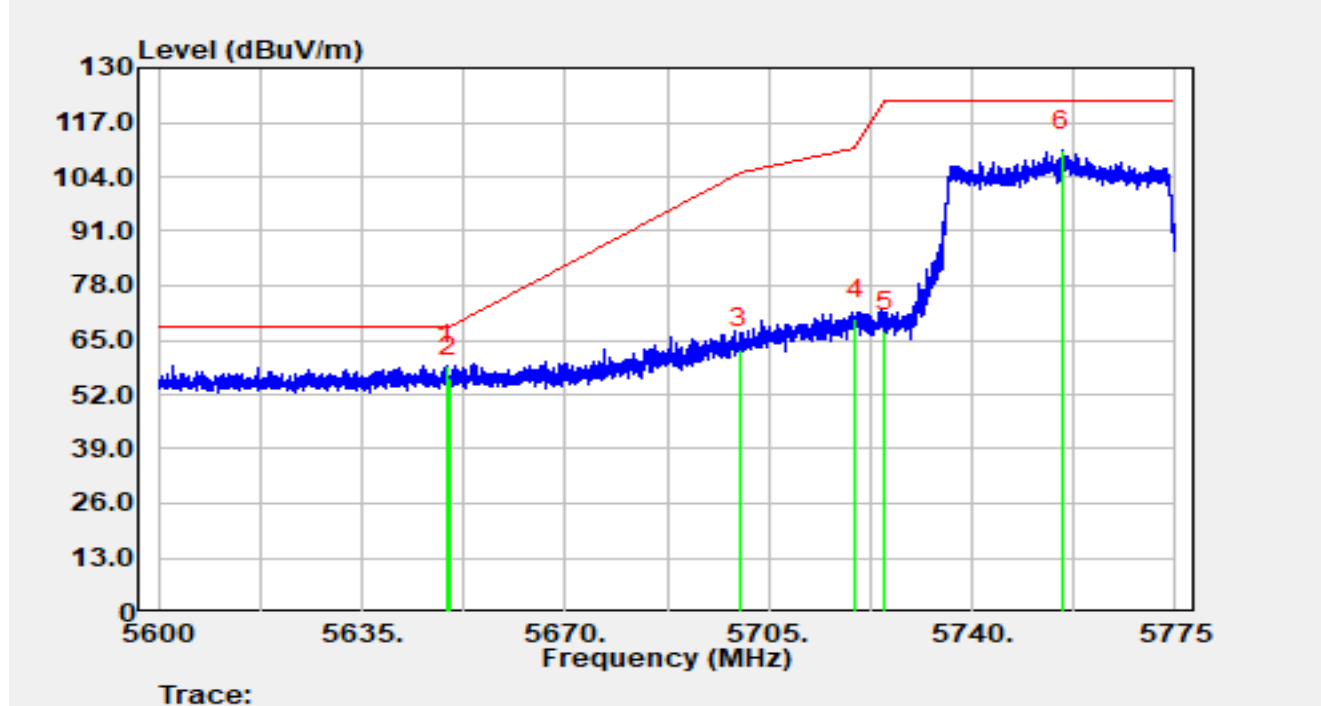


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5649.47         | 38.63          | 20.37      | 59.00                | -9.20       | 68.20          | Peak     |
| 2  |      | 5650.00         | 35.79          | 20.37      | 56.16                | -12.04      | 68.20          | Peak     |
| 3  |      | 5700.00         | 42.32          | 20.58      | 62.90                | -42.30      | 105.20         | Peak     |
| 4  |      | 5720.00         | 49.38          | 20.70      | 70.08                | -40.72      | 110.80         | Peak     |
| 5  |      | 5725.00         | 46.36          | 20.69      | 67.05                | -55.15      | 122.20         | Peak     |
| 6  |      | 5755.45         | 89.74          | 20.58      | 110.32               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5755MHz |               |            |

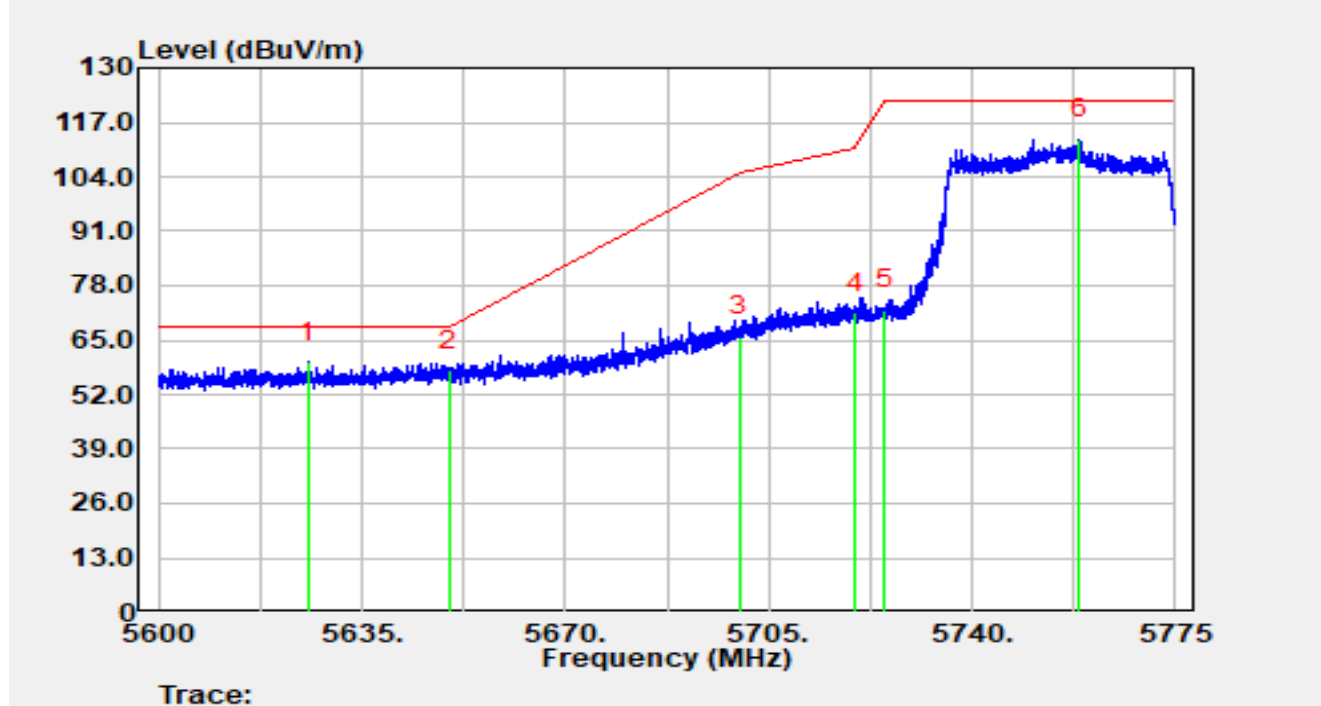


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5625.78         | 39.31          | 20.49      | 59.80                | -8.40       | 68.20          | Peak     |
| 2  |      | 5650.00         | 37.48          | 20.37      | 57.85                | -10.35      | 68.20          | Peak     |
| 3  |      | 5700.00         | 45.20          | 20.58      | 65.78                | -39.42      | 105.20         | Peak     |
| 4  |      | 5720.00         | 50.91          | 20.70      | 71.61                | -39.19      | 110.80         | Peak     |
| 5  |      | 5725.00         | 51.50          | 20.69      | 72.18                | -50.02      | 122.20         | Peak     |
| 6  |      | 5758.53         | 92.26          | 20.58      | 112.84               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5795MHz |               |            |

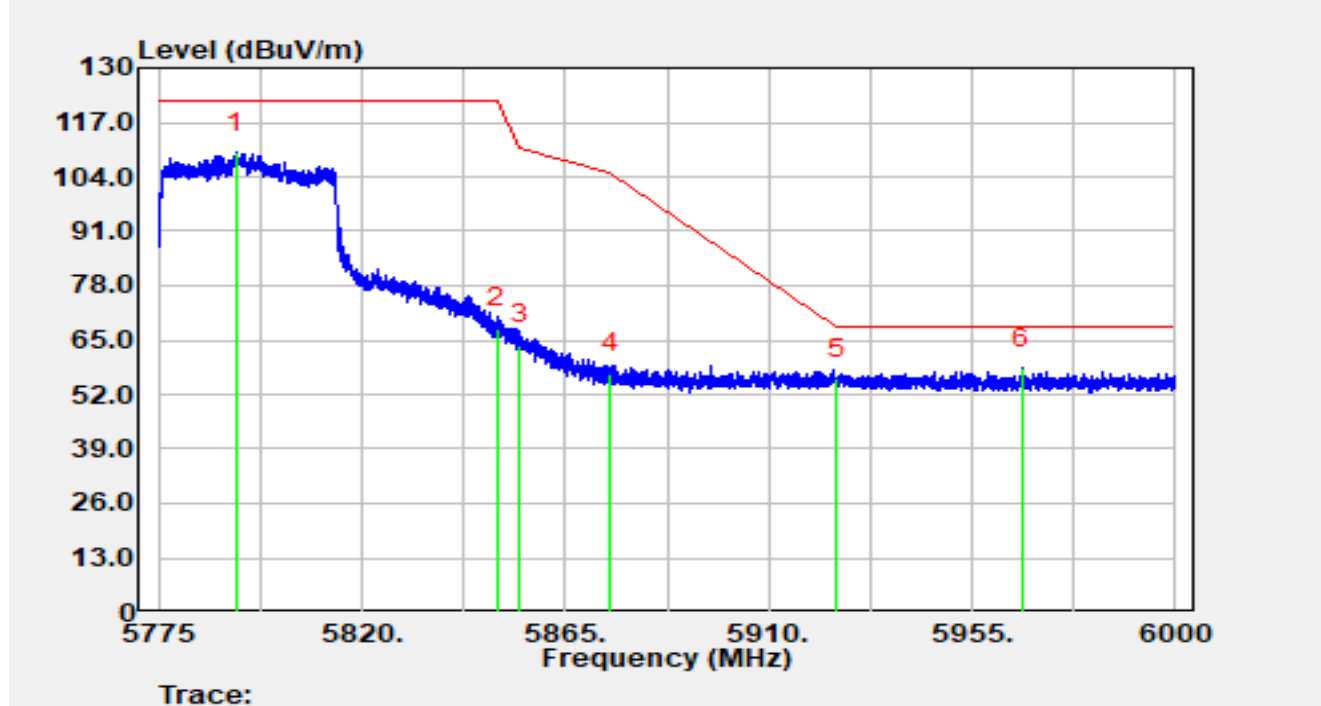


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5792.17         | 89.15          | 20.68      | 109.83               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 47.11          | 20.79      | 67.90                | -54.30      | 122.20         | Peak     |
| 3  |      | 5855.00         | 43.22          | 20.76      | 63.98                | -46.82      | 110.80         | Peak     |
| 4  |      | 5875.00         | 36.16          | 20.78      | 56.93                | -48.27      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.68          | 21.12      | 55.80                | -12.40      | 68.20          | Peak     |
| 6  | *    | 5966.03         | 37.36          | 20.80      | 58.17                | -10.03      | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-26 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5.8G_RE (3m)                      | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT40 at 5795MHz |               |            |

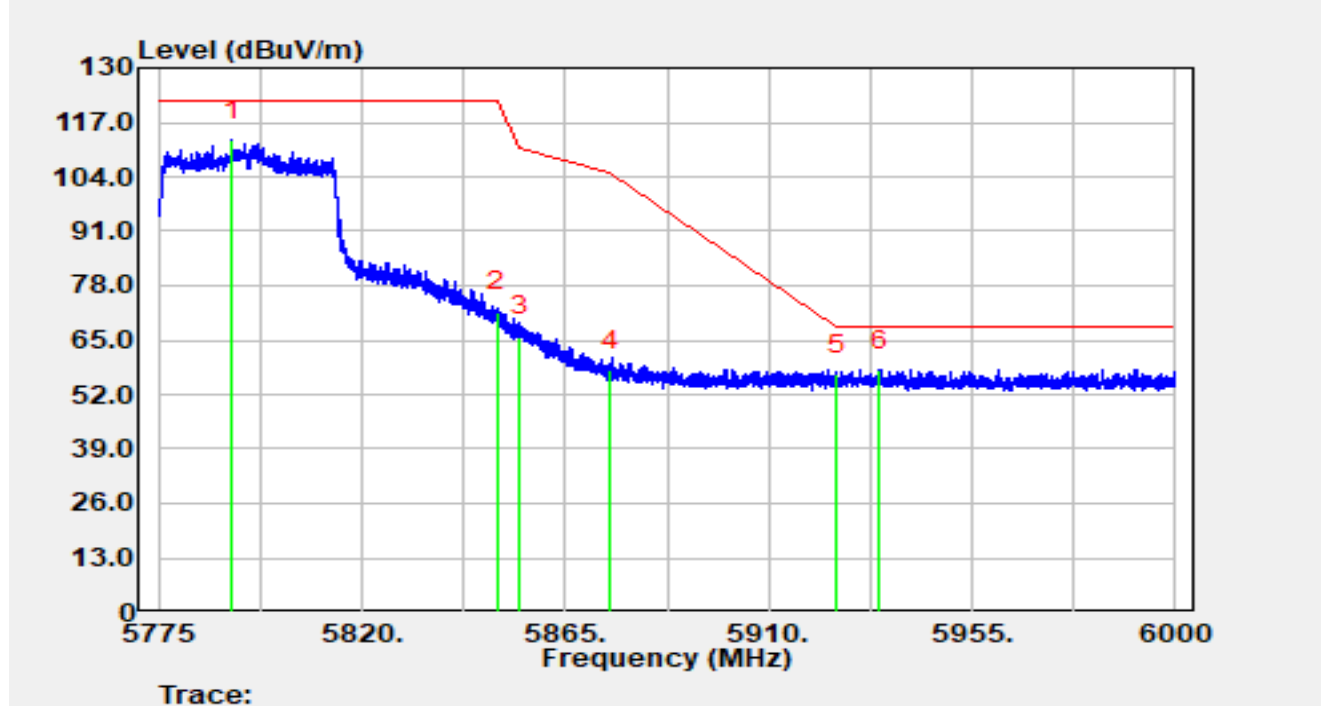


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5791.22         | 92.07          | 20.68      | 112.74               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 50.83          | 20.79      | 71.63                | -50.57      | 122.20         | Peak     |
| 3  |      | 5855.00         | 45.07          | 20.76      | 65.82                | -44.98      | 110.80         | Peak     |
| 4  |      | 5875.00         | 37.00          | 20.78      | 57.78                | -47.42      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.67          | 21.12      | 56.79                | -11.41      | 68.20          | Peak     |
| 6  | *    | 5934.64         | 36.83          | 21.02      | 57.85                | -10.35      | 68.20          | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-28 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT80 at 5210MHz |               |            |

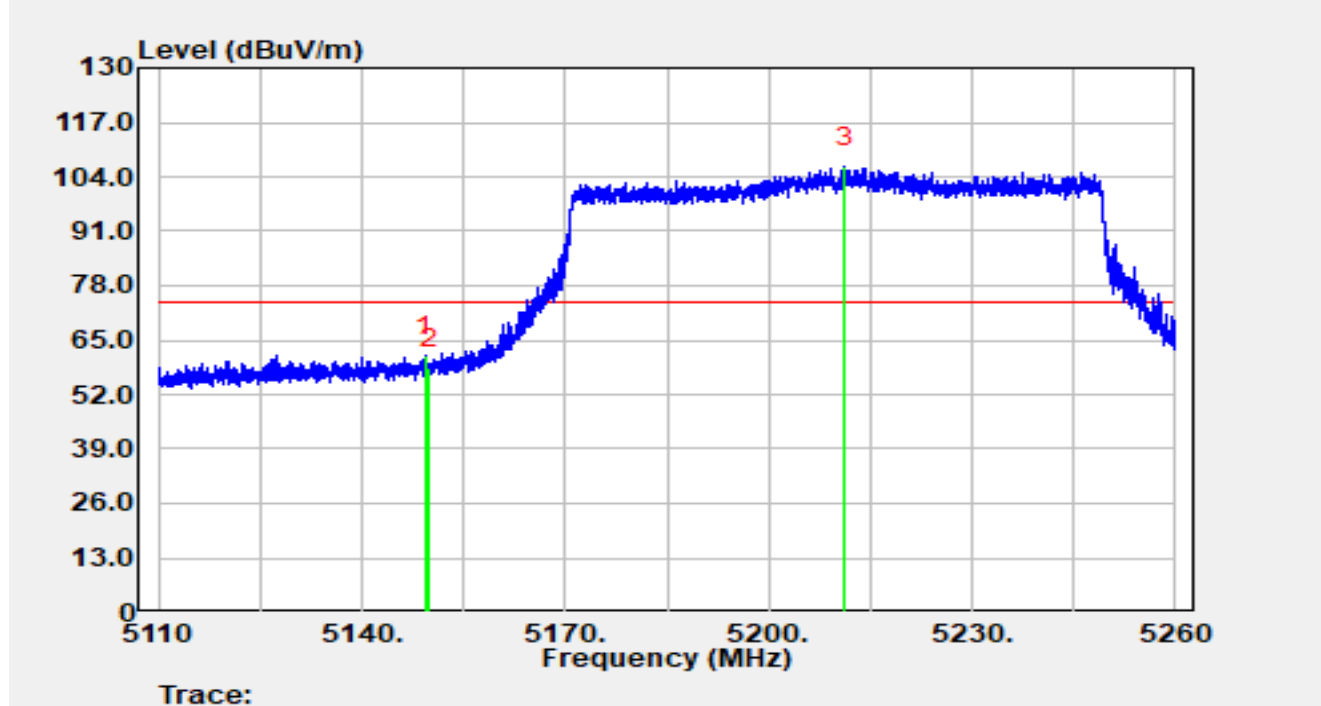


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.42         | 41.08          | 20.14      | 61.21                | -12.79      | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.14          | 20.14      | 58.28                | -15.72      | 74.00          | Peak     |
| 3  |      | 5211.24         | 86.14          | 20.13      | 106.28               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-28 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT80 at 5210MHz |               |            |

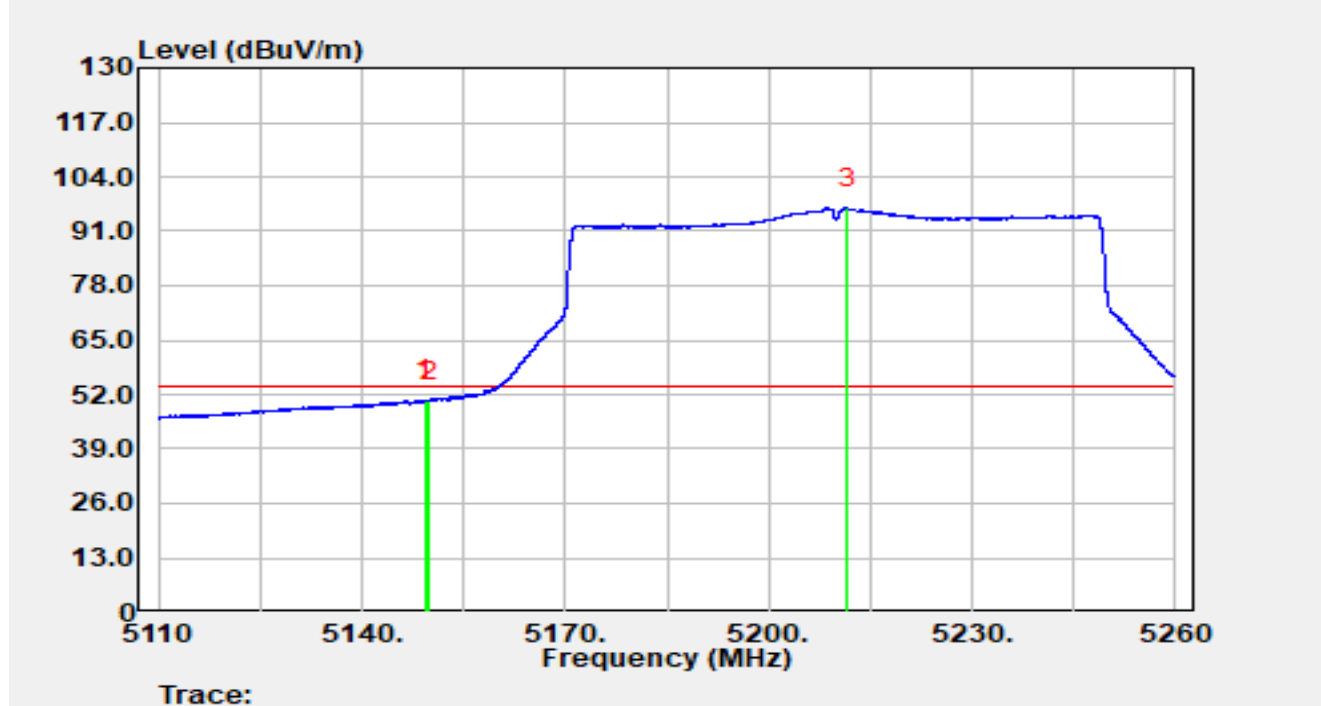


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.26         | 30.51          | 20.14      | 50.64                | -3.36       | 54.00          | Average  |
| 2  |      | 5150.00         | 30.29          | 20.14      | 50.42                | -3.58       | 54.00          | Average  |
| 3  |      | 5211.54         | 76.39          | 20.14      | 96.52                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-28 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT80 at 5210MHz |               |            |

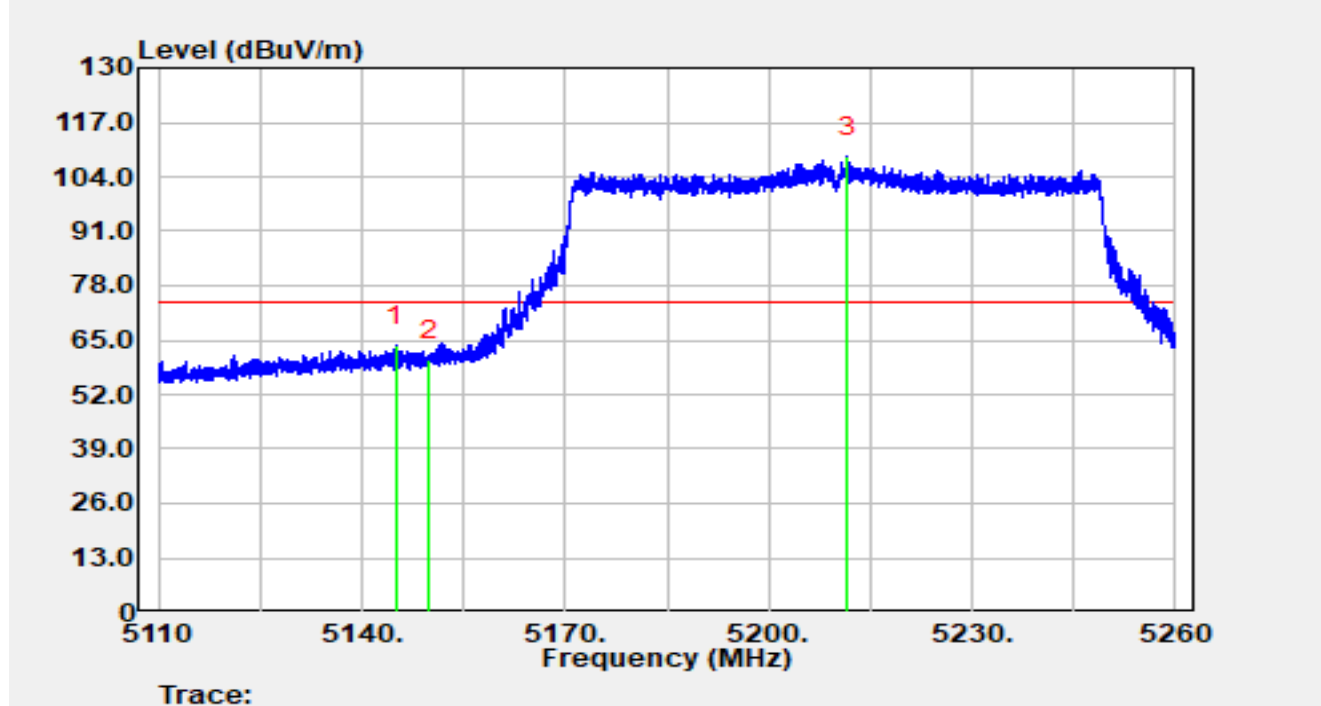


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5144.95         | 43.39          | 20.14      | 63.53                | -10.47      | 74.00          | Peak     |
| 2  |      | 5150.00         | 40.14          | 20.14      | 60.27                | -13.73      | 74.00          | Peak     |
| 3  |      | 5211.69         | 88.53          | 20.14      | 108.67               | N/A         | N/A            | Peak     |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                       |               |            |
|-------------|---------------------------------------|---------------|------------|
| Site        | WZ-AC1                                | Test Date     | 2025-06-28 |
| Temperature | 25.6°C                                | Humidity      | 46.8%      |
| Limit       | FCC_5G_RE (3m)                        | Test Engineer | Ajin Fan   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical   |
| EUT         | Wi-Fi 7 Tri-band Indoor Wall Plate AP | Test Voltage  | By PoE     |
| Test Mode   | Transmit by 802.11be-EHT80 at 5210MHz |               |            |

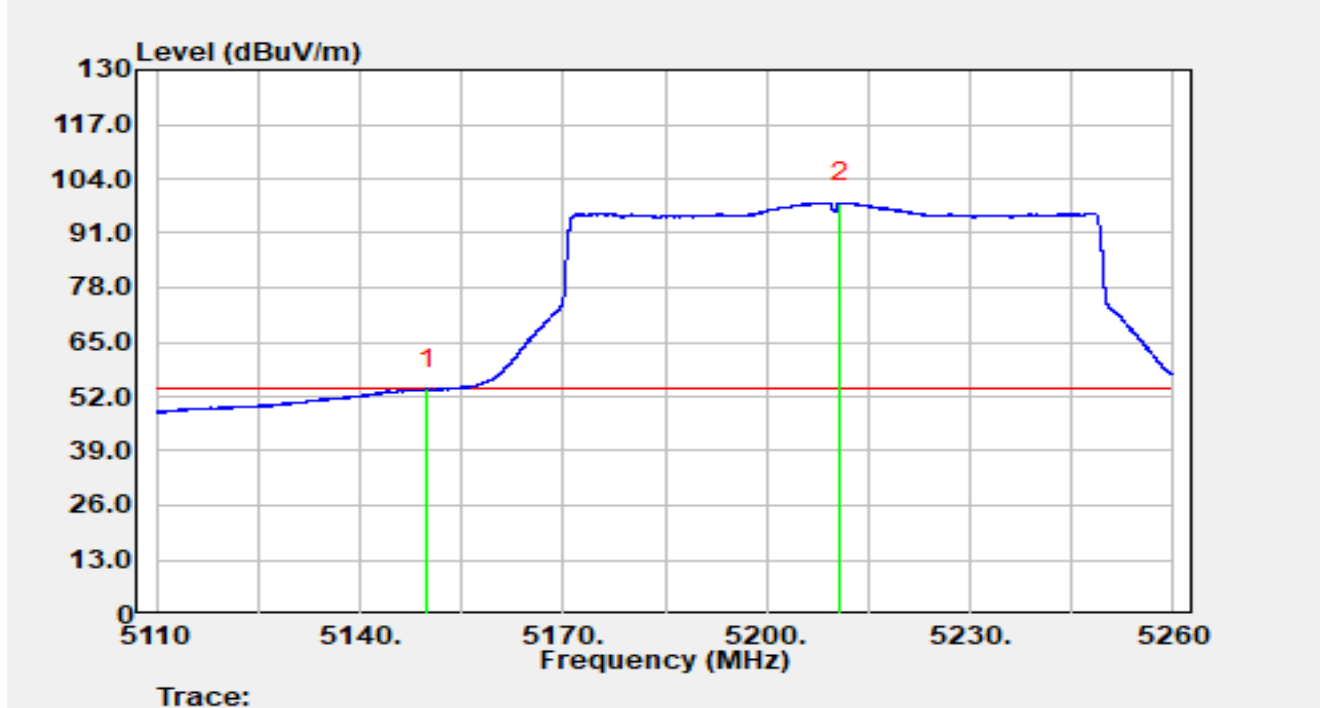

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5150.00         | 33.59          | 20.14      | 53.72                | -0.28       | 54.00          | Average  |
| 2  |      | 5210.89         | 78.21          | 20.13      | 98.34                | N/A         | N/A            | Average  |

Notes:

1. "\*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).