



FCC Radio Test Report

FCC ID: 2ABVH-OONA222W

This report concerns: Original Grant

Project No. : 2504G031
Equipment : Kiosk
Brand Name : AAVA
Test Model : OONA22-2W
Series Model : N/A
Applicant : Aava Mobile Oy
Address : Nahkatehtaankatu 2, FI-90130 Oulu, Finland
Manufacturer : Aava Mobile Oy
Address : Nahkatehtaankatu 2, FI-90130 Oulu, Finland
Factory : Ennoconn (Suzhou) Technology Co.,Ltd
Address : BUILDING 1, 299 NANSONG RD, YU SHAN TOWN KUNSHAN 215300
JIANGSU CHINA
Date of Receipt : Apr. 29, 2025
Date of Test : Apr. 29, 2025 ~ Jun. 10, 2025
Issued Date : Jun. 18, 2025
Report Version : R00
Test Sample : Engineering Sample No.: DG2025042934 for conducted,
DG2025042935 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Sheldon Ou
Sheldon Ou

Approved by : Chay Cai
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	13
3.3 PARAMETERS OF TEST SOFTWARE	15
3.4 DUTY CYCLE	17
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	19
3.6 SUPPORT UNITS	19
3.7 CUSTOMER INFORMATION DESCRIPTION	19
4 . AC POWER LINE CONDUCTED EMISSIONS	20
4.1 LIMIT	20
4.2 TEST PROCEDURE	20
4.3 DEVIATION FROM TEST STANDARD	20
4.4 TEST SETUP	21
4.5 EUT OPERATION CONDITIONS	21
4.6 TEST RESULTS	21
5 . RADIATED EMISSIONS	22
5.1 LIMIT	22
5.2 TEST PROCEDURE	23
5.3 DEVIATION FROM TEST STANDARD	24
5.4 TEST SETUP	24
5.5 EUT OPERATION CONDITIONS	26
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	26
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	26
5.8 TEST RESULTS - ABOVE 1000 MHZ	26
6 . BANDWIDTH	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	27
6.4 TEST SETUP	28
6.5 EUT OPERATION CONDITIONS	28
6.6 TEST RESULTS	28
7 . MAXIMUM OUTPUT POWER	29
7.1 LIMIT	29
7.2 TEST PROCEDURE	29
7.3 DEVIATION FROM STANDARD	29
7.4 TEST SETUP	29
7.5 EUT OPERATION CONDITIONS	29
7.6 TEST RESULTS	29
8 . POWER SPECTRAL DENSITY	30
8.1 LIMIT	30
8.2 TEST PROCEDURE	30
8.3 DEVIATION FROM STANDARD	30
8.4 TEST SETUP	31
8.5 EUT OPERATION CONDITIONS	31
8.6 TEST RESULTS	31
9 . FREQUENCY STABILITY	32
9.1 LIMIT	32
9.2 TEST PROCEDURE	32
9.3 DEVIATION FROM STANDARD	32
9.4 TEST SETUP	32
9.5 EUT OPERATION CONDITIONS	32
9.6 TEST RESULTS	32
10 . MEASUREMENT INSTRUMENTS LIST	33
11 . EUT TEST PHOTOS	35
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	41
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	44
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	49
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	52
APPENDIX E - BANDWIDTH	136
APPENDIX F - MAXIMUM OUTPUT POWER	155

Table of Contents	Page
APPENDIX G - POWER SPECTRAL DENSITY	174
APPENDIX H - FREQUENCY STABILITY	198

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2504G031	R00	Original Report.	Jun. 18, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☐ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☒ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Frequency Stability	2.7 ppm
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	22°C	55%	AC 120V/60Hz	Hayden Chen	May 16, 2025
Radiated Emissions -9kHz to 30MHz	23°C	52%	AC 120V/60Hz	Hayden Chen	May 15, 2025
Radiated Emissions -30MHz to 1000MHz	23°C	52%	AC 120V/60Hz	Calvin Wen	May 16, 2025
Radiated Emissions -Above 1000 MHz	23°C	52%	AC 120V/60Hz	Drew Tan	May 17, 2025
	23°C	52%	AC 120V/60Hz	Calvin Wen	May 21, 2025
Bandwidth	24-26°C	53-56%	AC 120V/60Hz	Arvin Tong	May 16, 2025-May 17, 2025
Maximum Output Power	24-25°C	56-60%	AC 120V/60Hz	Alex Yin	May 13, 2025-May 27, 2025
Power Spectral Density	24-26°C	53-56%	AC 120V/60Hz	Arvin Tong	May 16, 2025-May 17, 2025
Frequency Stability	Normal & Extreme	53-56%	Normal & Extreme	Arvin Tong	May 16, 2025-May 17, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Kiosk
Brand Name	AAVA
Test Model	OONA22-2W
Series Model	N/A
Model Difference(s)	N/A
Hardware Version	PV
Software Version	Android
Power Source	DC voltage supplied from AC adapter. Model: J652-2403000DI
Power Rating	I/P: 100-240V~ 50/60Hz 1.7A O/P: 24.0V  3.0A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 1733.4 Mbps IEEE 802.11ax: up to 2402 Mbps
Maximum Output Power_UNII-1	IEEE 802.11a: 21.14 dBm (0.1299 W)
Maximum Output Power_UNII-2A	IEEE 802.11a: 21.30 dBm (0.1348 W)
Maximum Output Power_UNII-2C	IEEE 802.11ax(HE80): 21.57 dBm (0.1435 W)
Maximum Output Power_UNII-3	IEEE 802.11ax(HE20): 21.38 dBm (0.1374 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac(VHT160) IEEE 802.11ax(HE160)	
Channel	Frequency (MHz)
50	5250
114	5570

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1		W3006	Chip	N/A	3.0
2		W3006	Chip	N/A	2.3

Note:

This EUT supports CDD, and all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=3.0.

For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.

So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 3.0 + 10\log(2/1)\text{dBi} = 6.01$.

The UNII-1, UNII-2A, UNII-2C power spectral density limit is $11 - (6.01 - 6) = 10.99$, the UNII-3 power spectral density limit is $30 - (6.01 - 6) = 29.99$.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 9	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 10	TX A Mode Channel 100/116/140/144 (UNII-2C)
Mode 11	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 12	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 13	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 14	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 15	TX A Mode Channel 149/157/165 (UNII-3)
Mode 16	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 17	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 18	TX AX(HE80) Mode Channel 155 (UNII-3)
Mode 19	TX AX(HE80) Mode Channel 138 (UNII-2C)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 19	TX AX(HE80) Mode Channel 138 (UNII-2C)

Radiated Emissions Test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 19	TX AX(HE80) Mode Channel 138 (UNII-2C)

Radiated Emissions Test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 9	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 10	TX A Mode Channel 100/116/140/144 (UNII-2C)
Mode 11	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 12	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 13	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 14	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 15	TX A Mode Channel 149/157/165 (UNII-3)
Mode 16	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 17	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 18	TX AX(HE80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 9	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 10	TX A Mode Channel 100/116/140/144 (UNII-2C)
Mode 11	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 12	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 13	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 14	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 15	TX A Mode Channel 149/157/165 (UNII-3)
Mode 16	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 17	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 18	TX AX(HE80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AX(HE80) Mode Channel 138 (UNII-2C) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical for Band edge, Horizontal for Harmonic. In this report only recorded the worst case.
- (6) IEEE 802.11ax mode only support full RU, so only the full RU is evaluated and measured inside report.
- (7) HE20/HE40/HE80/HE160 covers HT20/HT40 and VHT20/VHT40/VHT80/VHT160, due to same modulation (in full RU). The power setting for 802.11n HT20/HT40 and 802.11ac VHT20/VHT40/VHT80/VHT160 are the same or lower than 802.11ax HE20/HE40/HE80/HE160.
- (8) For radiated emission test, every axis (X, Y, Z) was also verified. The Z axis is found to be the worst case and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	qdart_conn.win.1.0_installer_00097.1		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	19	19	19.5
IEEE 802.11ax(HE20)	19	19	19.5
Frequency (MHz)	5190	5230	
IEEE 802.11ax(HE40)	17.5	19.5	
Frequency (MHz)	5210		
IEEE 802.11ax(HE80)	17		

UNII-2A			
Test Software Version	qdart_conn.win.1.0_installer_00097.1		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	19.5	19.5	19.5
IEEE 802.11ax(HE20)	19	19.5	18.5
Frequency (MHz)	5270	5310	
IEEE 802.11ax(HE40)	19.5	16.5	
Frequency (MHz)	5290		
IEEE 802.11ax(HE80)	15.5		

UNII-1+UNII-2A	
Test Software Version	qdart_conn.win.1.0_installer_00097.1
Frequency (MHz)	5250
IEEE 802.11ax(HE160)	15.5


UNII-2C				
Test Software Version	qdart_conn.win.1.0_installer_00097.1			
Frequency (MHz)	5500	5580	5700	5720
IEEE 802.11a	19.5	20	20	19.5
IEEE 802.11ax(HE20)	19.5	20	19.5	20.5
Frequency (MHz)	5510	5550	5670	5710
IEEE 802.11ax(HE40)	17.5	19.5	19.5	20.5
Frequency (MHz)	5530	5610	5690	
IEEE 802.11ax(HE80)	16	20	20.5	
Frequency (MHz)	5570			
IEEE 802.11ax(HE160)	15			

UNII-3			
Test Software Version	qdart_conn.win.1.0_installer_00097.1		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	20.5	21	21
IEEE 802.11ax(HE20)	21	21.5	21.5
Frequency (MHz)	5755	5795	
IEEE 802.11ax(HE40)	21	21.5	
Frequency (MHz)	5775		
IEEE 802.11ax(HE80)	21		

3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.
 The power spectral density = measured power spectral density + duty factor.


802.11a

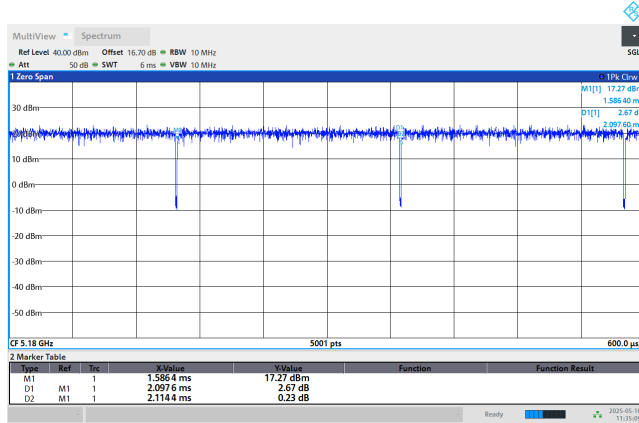

11:35:09 AM 05/16/2025

Duty cycle = 2098.000 ms / 2114.000 ms = 99.24%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$


802.11ax(HE20)

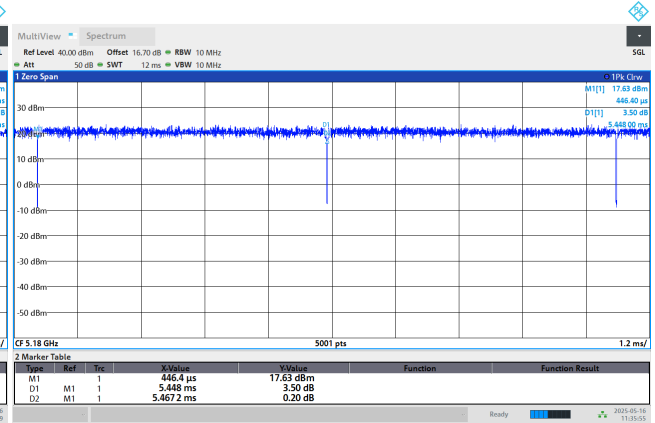

11:35:55 AM 05/16/2025

Duty cycle = 5448.000 ms / 5467.000 ms = 99.65%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$


802.11ax(HE40)

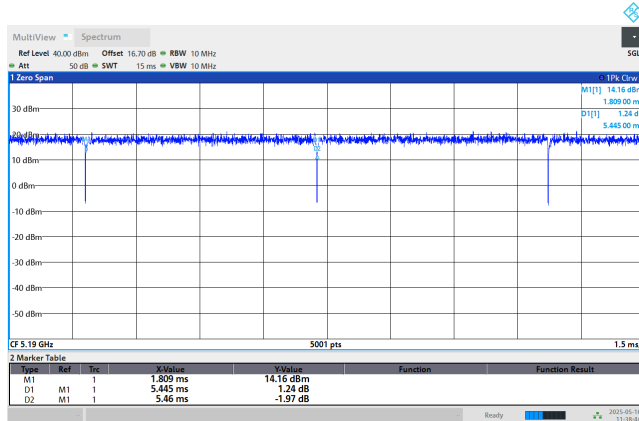

11:38:45 AM 05/16/2025

Duty cycle = 5445.000 ms / 5460.000 ms = 99.73%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$

802.11ax(HE80)

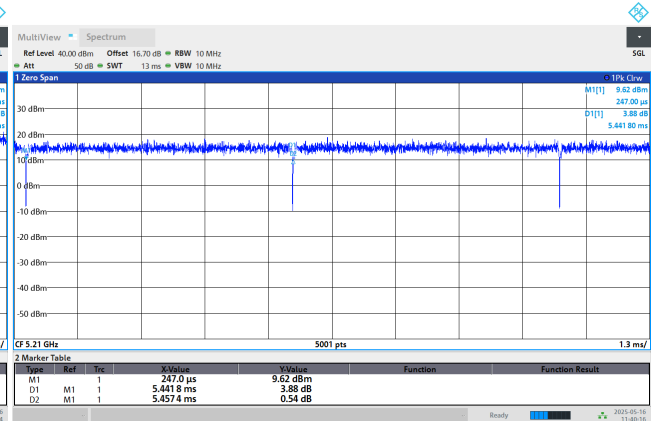

11:40:17 AM 05/16/2025

Duty cycle = 5442.000 ms / 5457.000 ms = 99.73%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$

MultiView Spectrum

Ref Level 30.00 dBm Offset 16.70 dB RBW 10 kHz
 Att 40 dB SWT 12 ms VBW 10 kHz

Zero Span

1 Pk Chw

Metric	Value
M1[1]	-7.57 dBm
S1[1]	544.80 μs
T1[1]	2.54 ms
	5.44800 MHz


CF 5.45 GHz 5001 pts 1.2 ms

Type	Ref	Freq	X-Value	Y-Value	Function	Function Result
M1	M1	1	544.8 μs	-7.57 dBm		
D1	M1	1	5.448 ms	2.54 dB		
D2	M1	1	5.4648 ms	0.19 dB		

Ready 2025-05-16 11:05:18

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle $\geq 98\%$).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

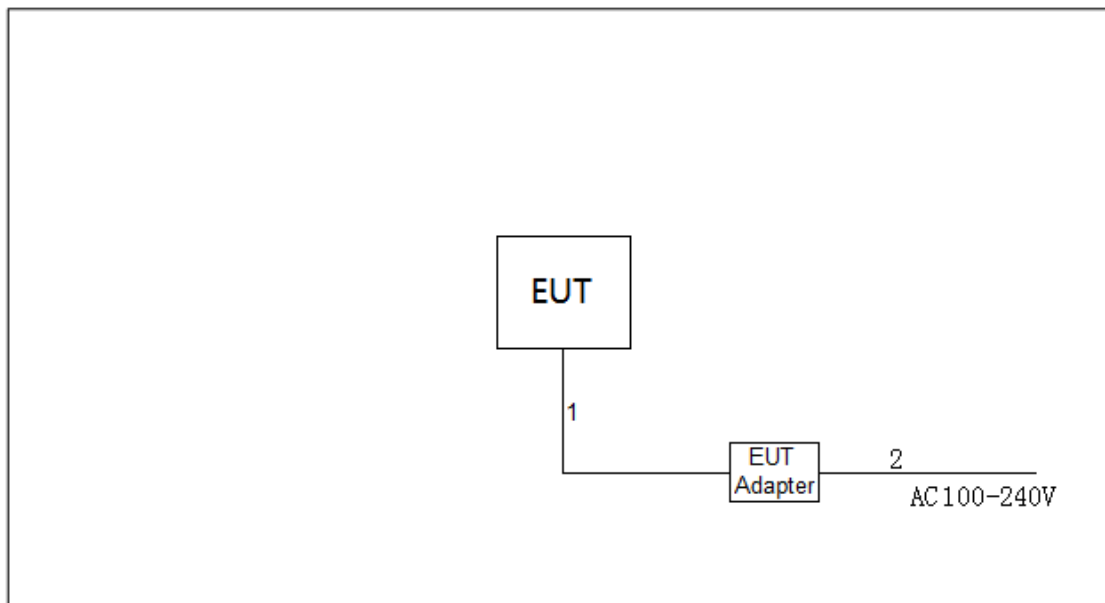

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m
2	AC Cable	NO	NO	1.5m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (0.5dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

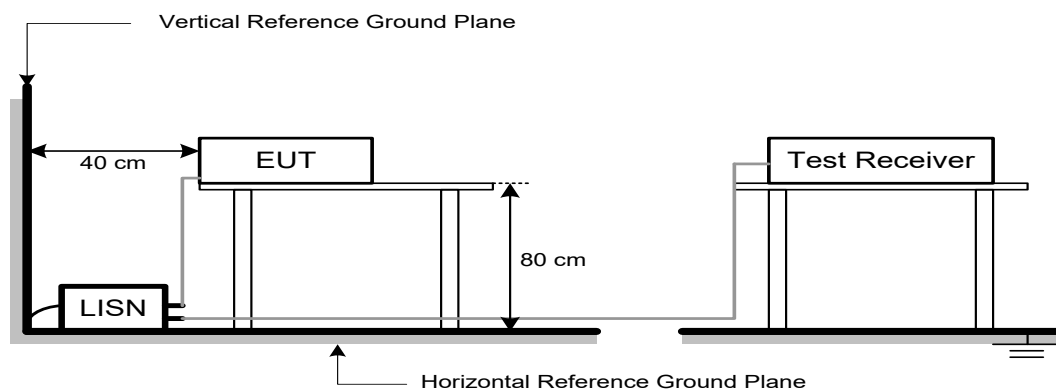

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

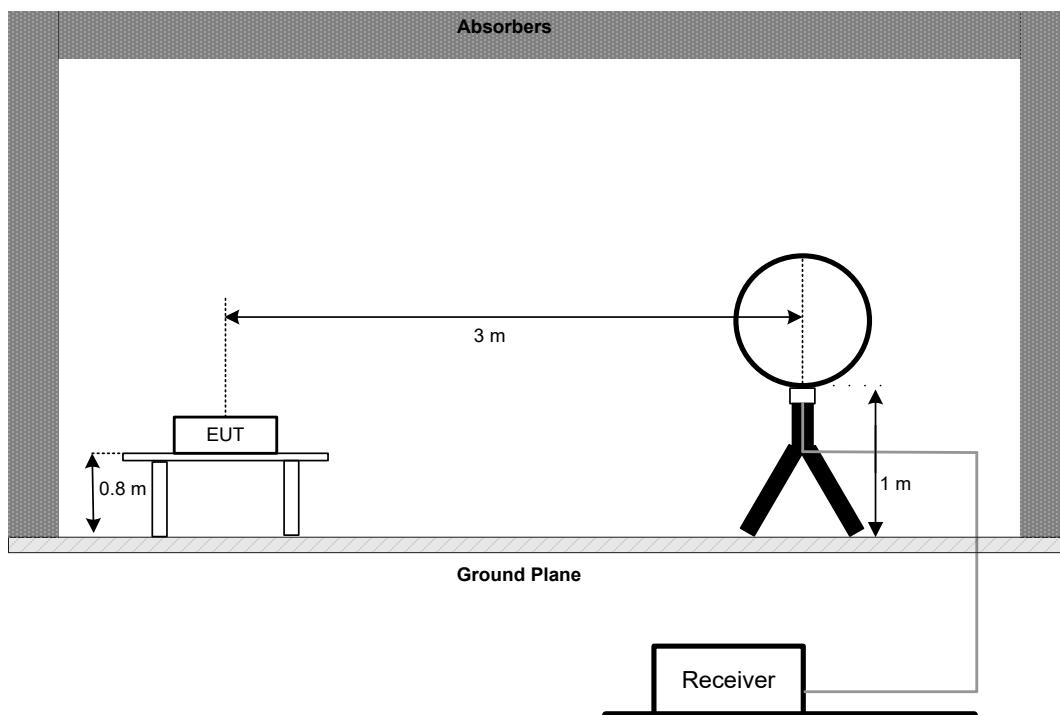


30 MHz to 1 GHz

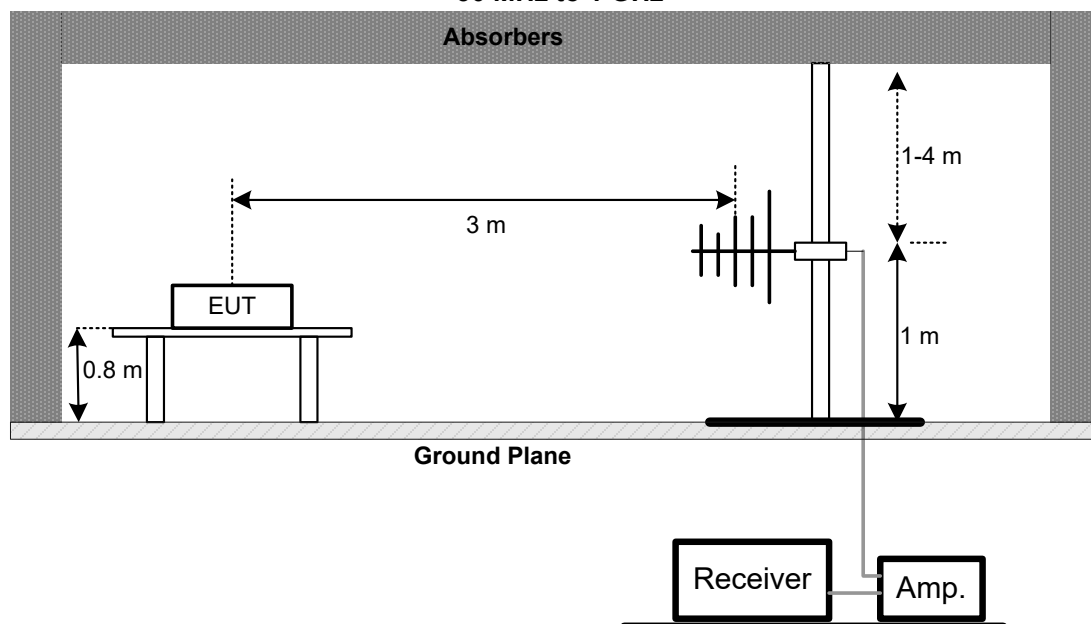

**Above 1 GHz
Band edge & Harmonic (1 GHz to 18 GHz)**

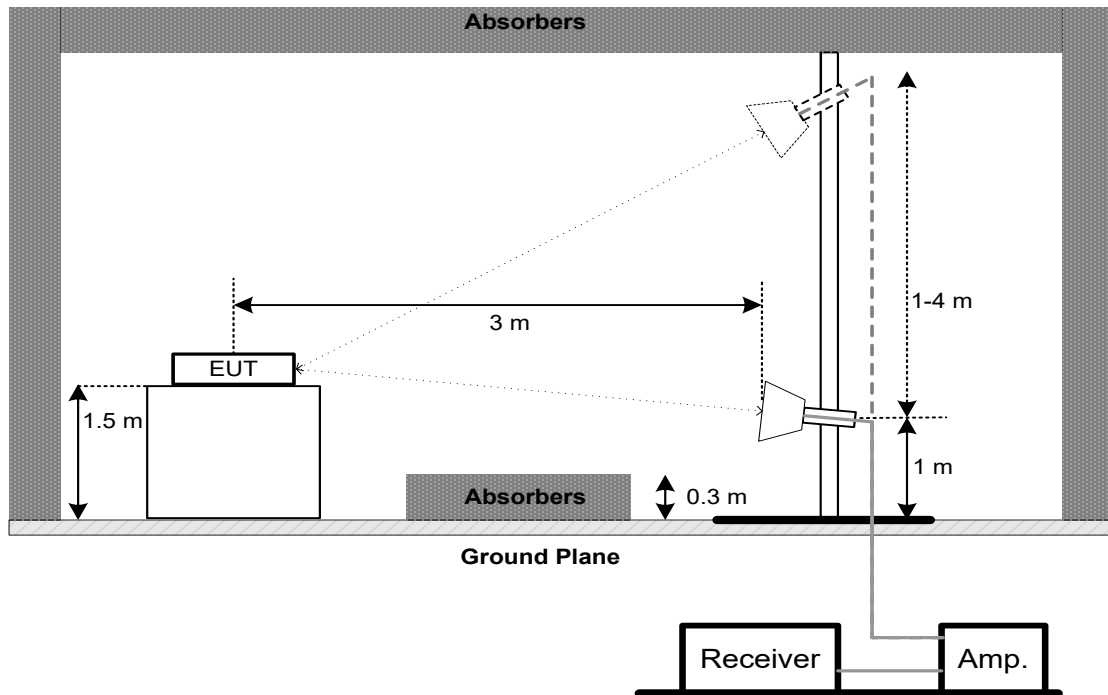

Harmonic (18 GHz to 40 GHz)

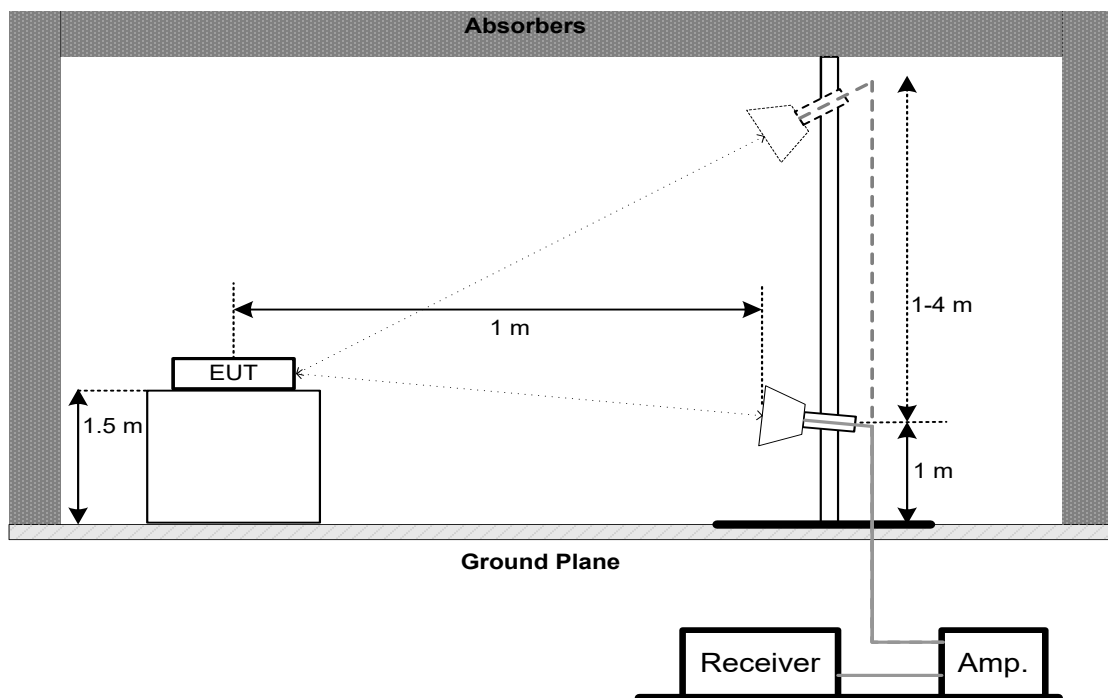

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

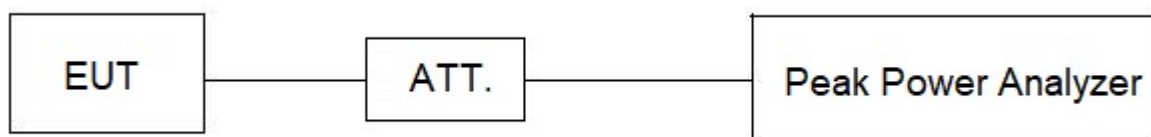

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz
VBW	300 kHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is -10°C~50°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

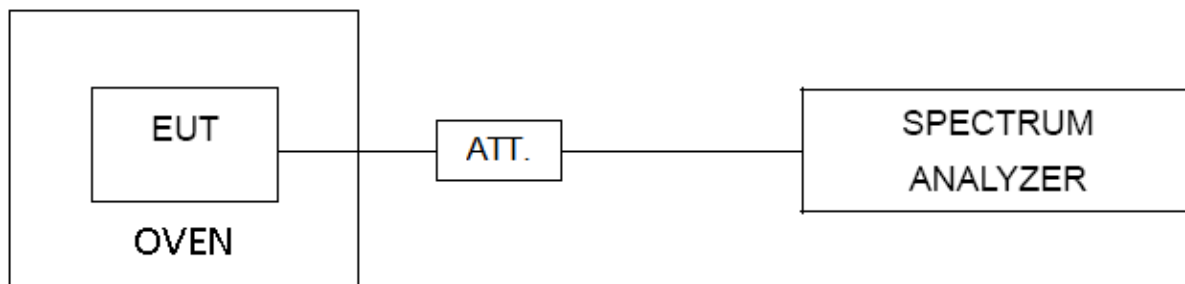

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 31, 2025
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 1 GHz to 18GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 29, 2025
3	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 02, 2026
4	Cable	RegalWay	RWLP50-4.0A-SMSM-12.5M	N/A	Jul. 03, 2025
5	Cable	RegalWay	RWLP50-4.0A-NMRASM-2.5M	N/A	Jul. 03, 2025
6	Cable	RegalWay	RWLP50-4.0A-NMRASM-RA-0.8M	N/A	Jul. 03, 2025
7	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
8	Filter	STI	STI15-9969	N/A	May 31, 2025
9	Positioning Controller	MF	MF-7802	N/A	N/A
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2026

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
2	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
3	Cable	RegalWay	RWLP50-2.6A-2.92M2.9 2M-1.1M	N/A	Jul. 25, 2025
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 16, 2025
6	966 Chamber room	CM	9*6*6	N/A	May 09, 2026
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	FSV Signal & Spectrum Analyzer	R&S	FSV3044	101682	Oct. 17, 2025
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A

Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	FSV Signal & Spectrum Analyzer	R&S	FSV3044	101682	Oct. 17, 2025
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Jan. 10, 2026
5	AC power source	Preen	AFC-S-1250	F123080107	Dec. 06, 2025
6	Cable	RegalWay	20210802 013	RWP50-402-SMSM-1M	N/A
7	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Jan. 10, 2026

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



11. EUT TEST PHOTOS

AC Power Line Conducted Emissions Test Photos





Radiated Emissions Test Photos

9 kHz to 30 MHz

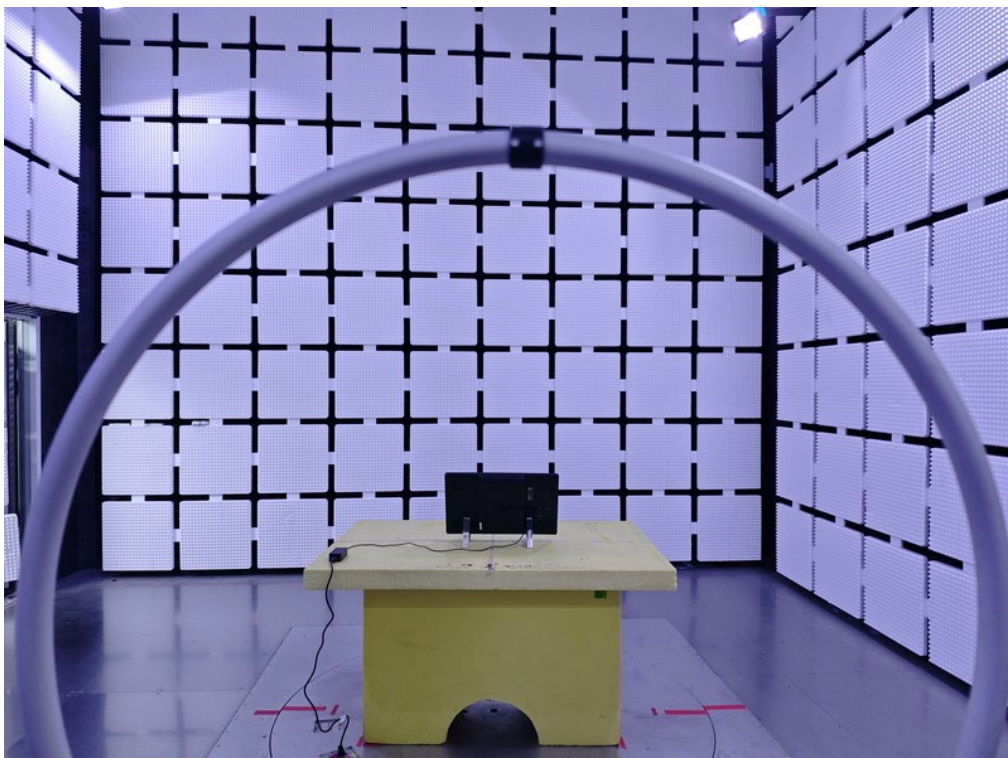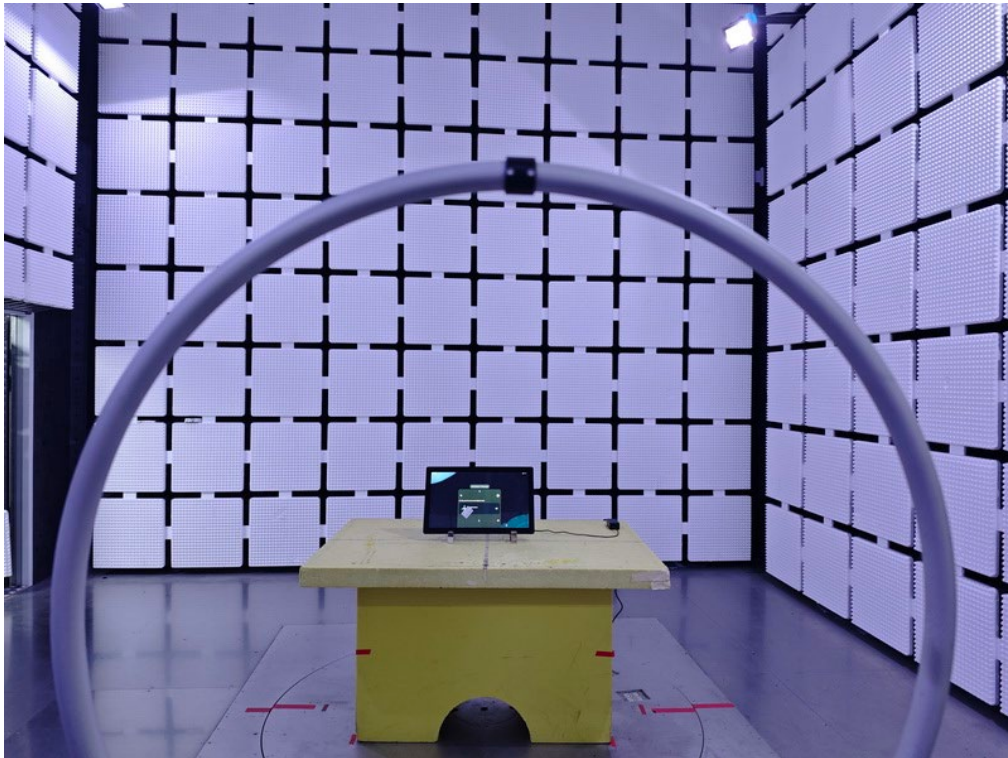



Radiated Emissions Test Photos

30 MHz to 1000 MHz

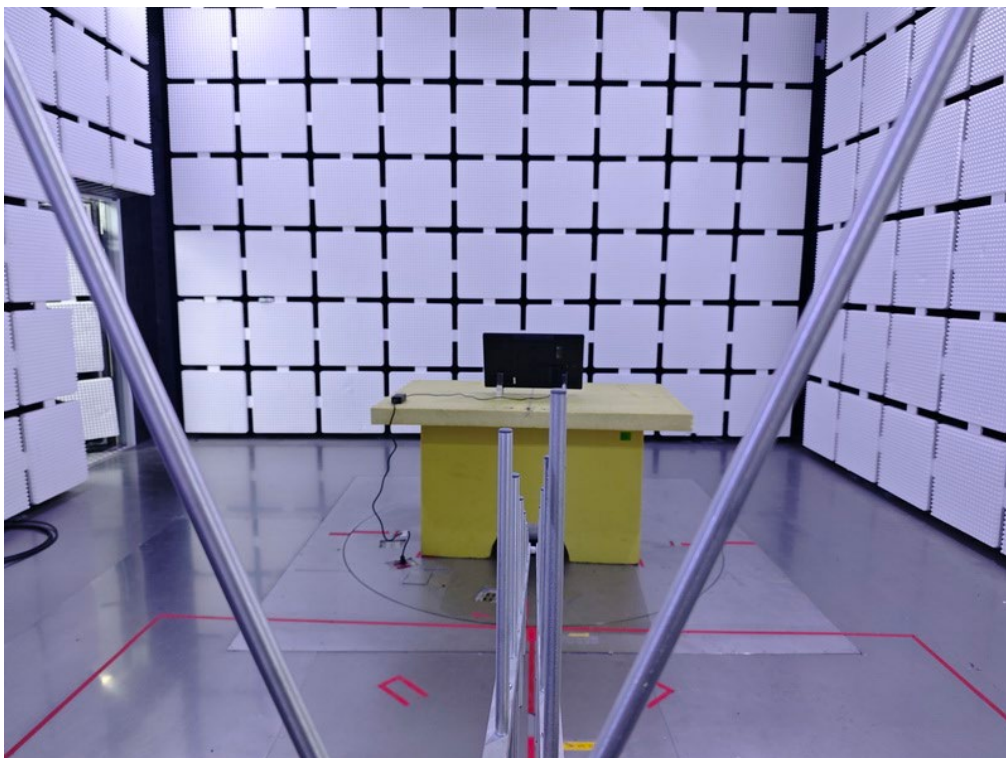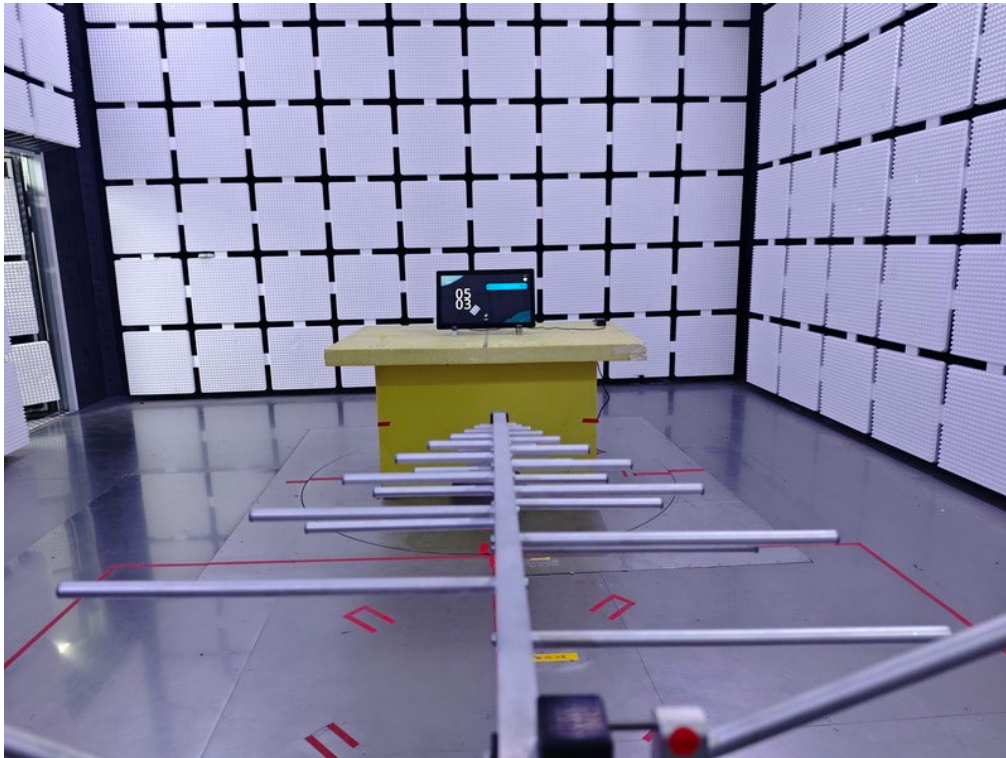



Radiated Emissions Test Photos

1 GHz to 18 GHz

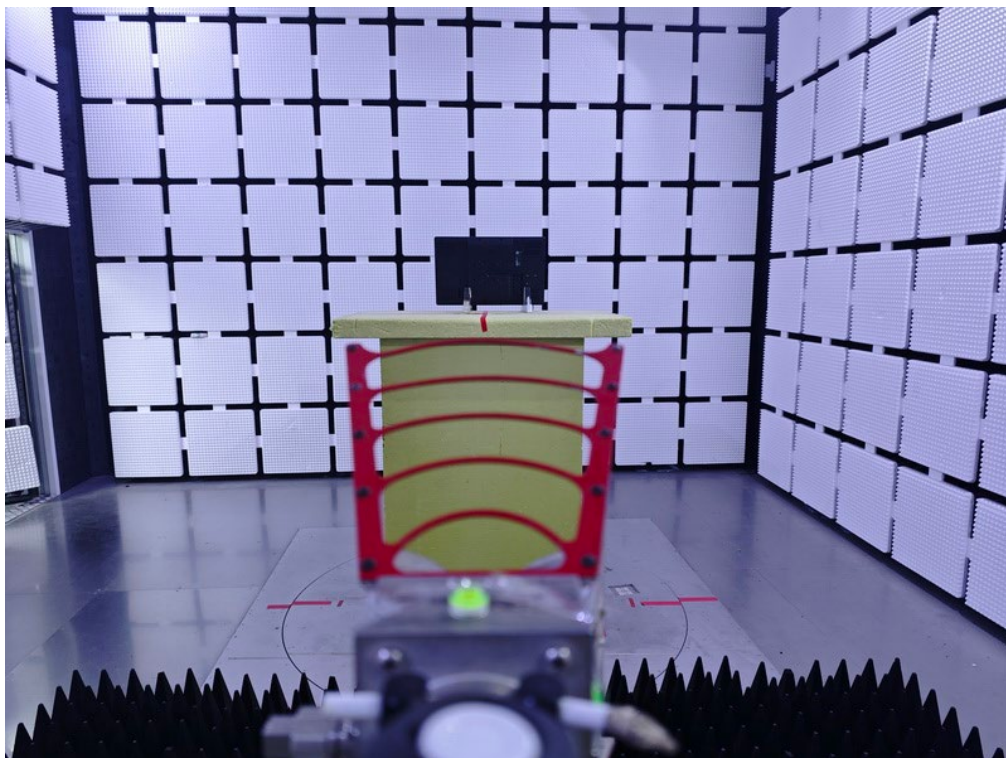
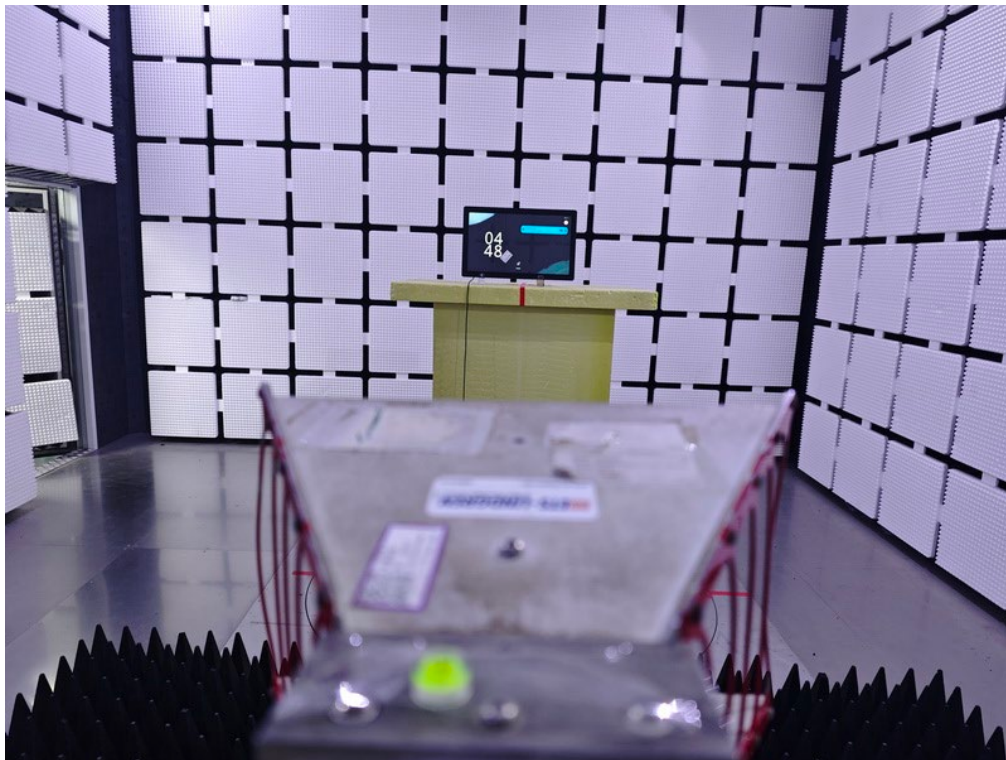


Radiated Emissions Test Photos

Above 18 GHz

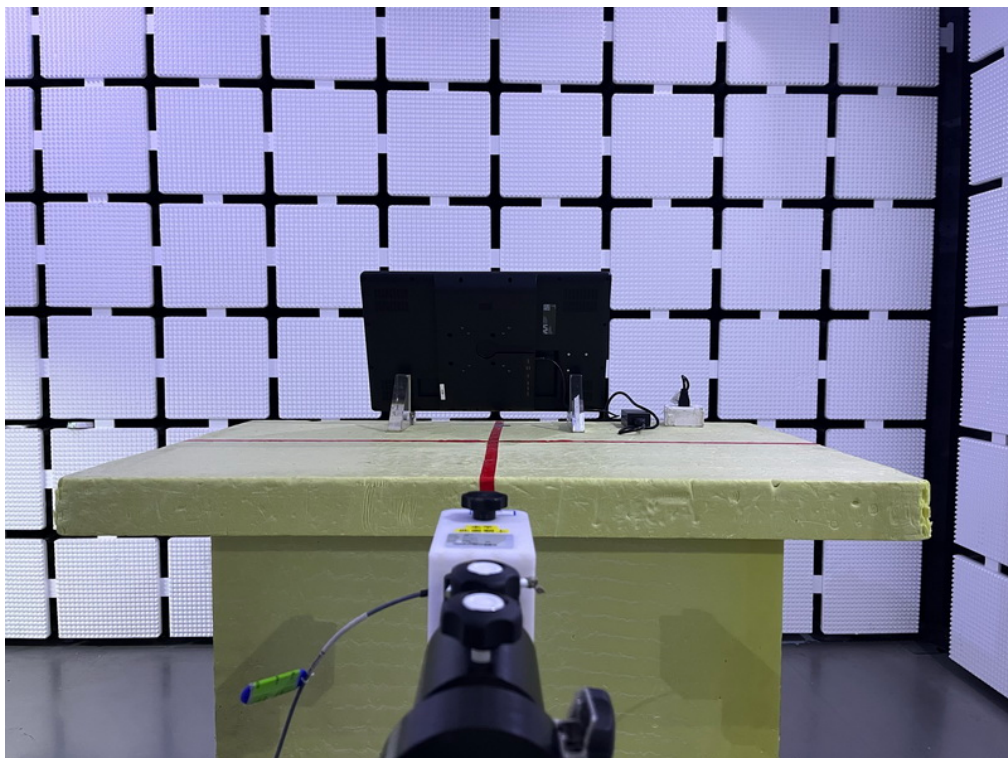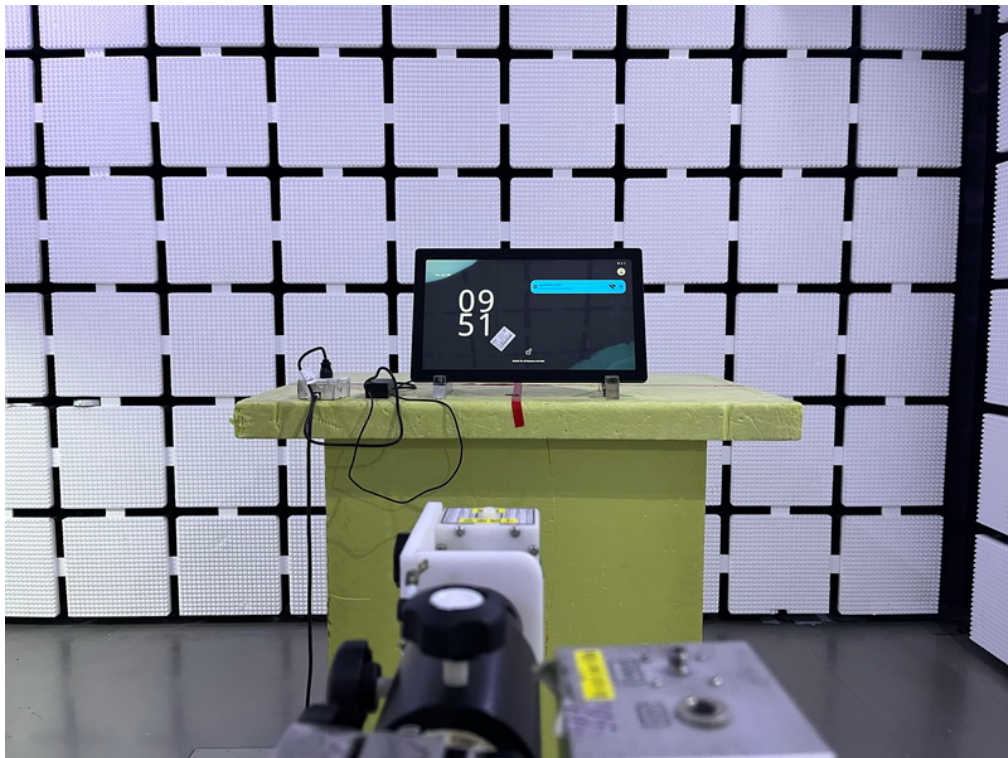


Conducted Test Photos

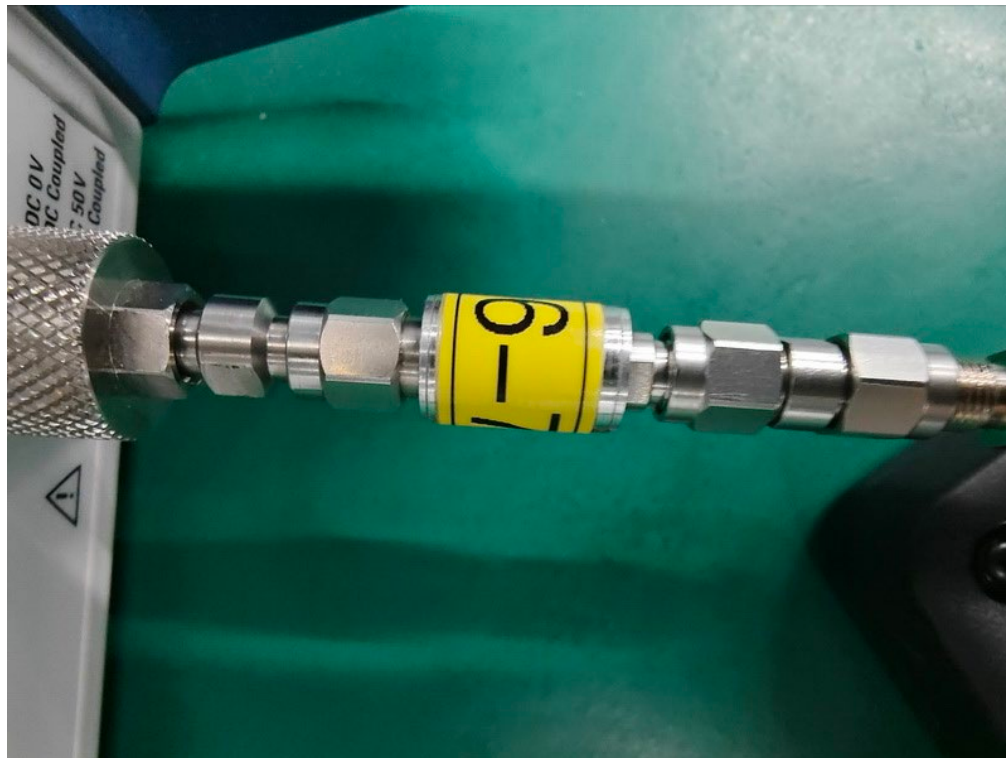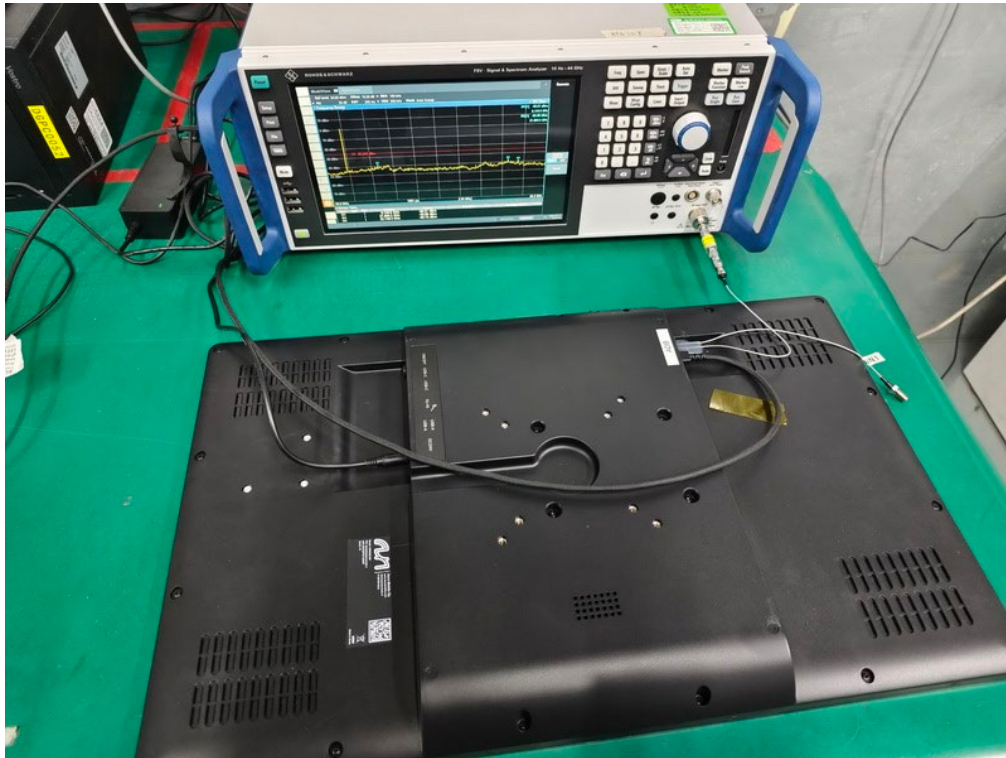

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Phase	Line
-----------	--	-------	------

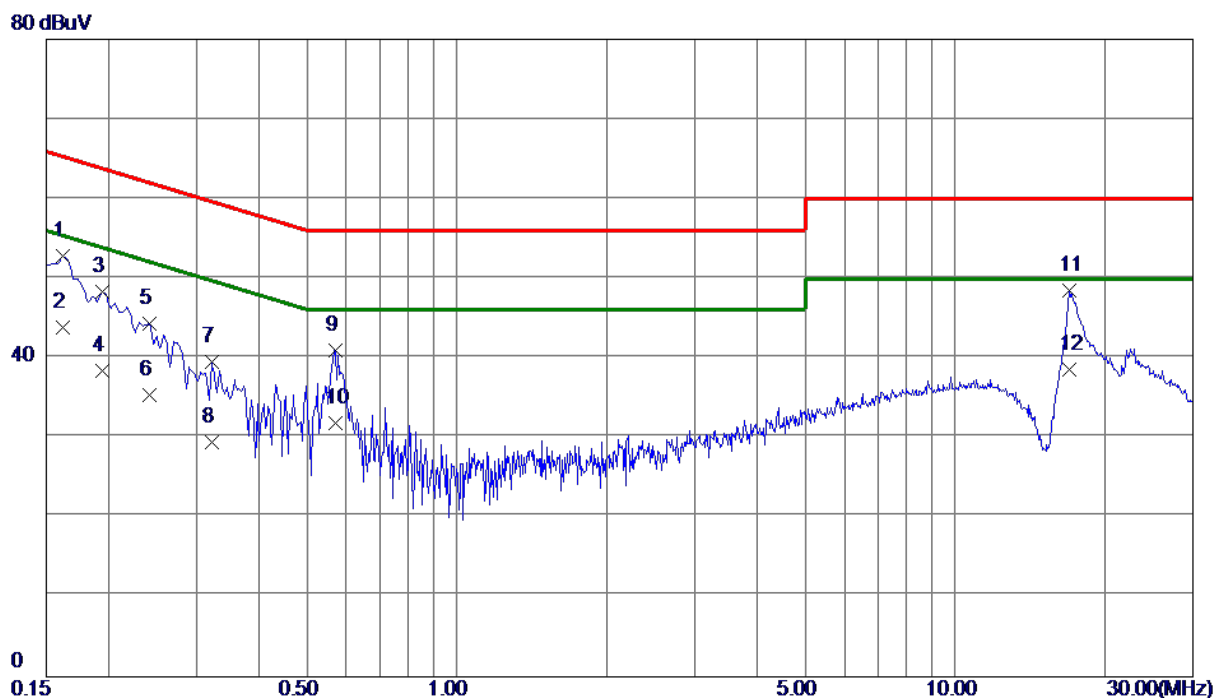


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1620	42.95	9.91	52.86	65.36	-12.50	QP	
2	0.1620	33.91	9.91	43.82	55.36	-11.54	AVG	
3	0.1940	38.48	9.91	48.39	63.86	-15.47	QP	
4	0.1940	28.50	9.91	38.41	53.86	-15.45	AVG	
5	0.2420	34.49	9.90	44.39	62.03	-17.64	QP	
6	0.2420	25.50	9.90	35.40	52.03	-16.63	AVG	
7	0.3220	29.52	9.93	39.45	59.66	-20.21	QP	
8	0.3220	19.49	9.93	29.42	49.66	-20.24	AVG	
9	0.5700	30.97	9.97	40.94	56.00	-15.06	QP	
10	0.5700	21.91	9.97	31.88	46.00	-14.12	AVG	
11	16.9700	34.23	14.27	48.50	60.00	-11.50	QP	
12 *	16.9700	24.30	14.27	38.57	50.00	-11.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Phase	Neutral
-----------	--	-------	---------

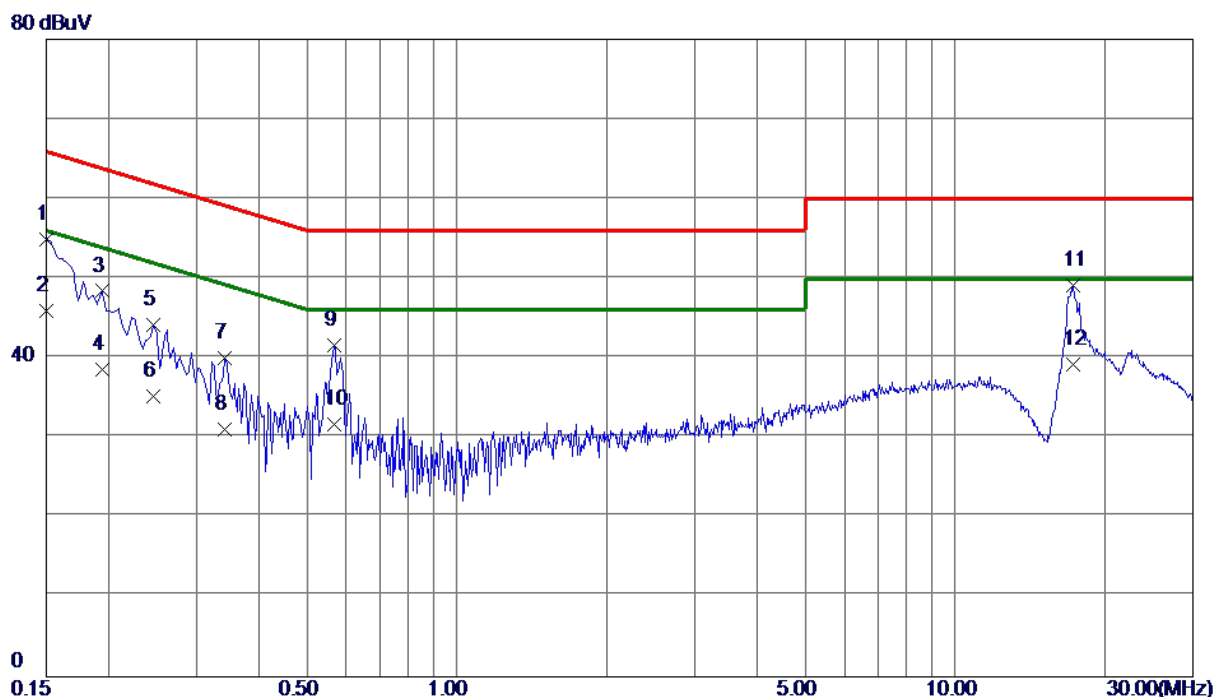


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	44.92	9.97	54.89	66.00	-11.11	QP	
2 *	0.1500	35.90	9.97	45.87	56.00	-10.13	AVG	
3	0.1940	38.43	9.97	48.40	63.86	-15.46	QP	
4	0.1940	28.60	9.97	38.57	53.86	-15.29	AVG	
5	0.2460	34.18	9.98	44.16	61.89	-17.73	QP	
6	0.2460	25.20	9.98	35.18	51.89	-16.71	AVG	
7	0.3420	30.00	9.98	39.98	59.15	-19.17	QP	
8	0.3420	21.10	9.98	31.08	49.15	-18.07	AVG	
9	0.5660	31.54	10.03	41.57	56.00	-14.43	QP	
10	0.5660	21.61	10.03	31.64	46.00	-14.36	AVG	
11	17.2060	34.92	14.25	49.17	60.00	-10.83	QP	
12	17.2060	24.90	14.25	39.15	50.00	-10.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Polarization	Ant 0°
-----------	--	--------------	--------

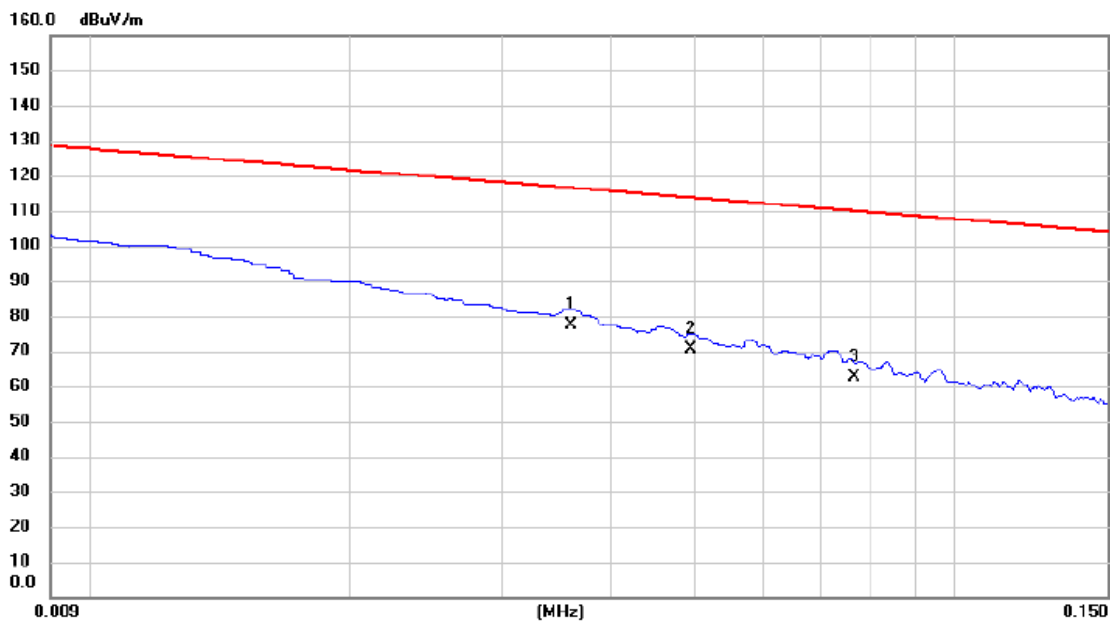


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.036	56.23	21.27	77.50	116.48	-38.98	AVG	
2		0.050	49.11	21.34	70.45	113.71	-43.26	AVG	
3		0.076	41.33	21.34	62.67	109.94	-47.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Polarization	Ant 0°
-----------	--	--------------	--------

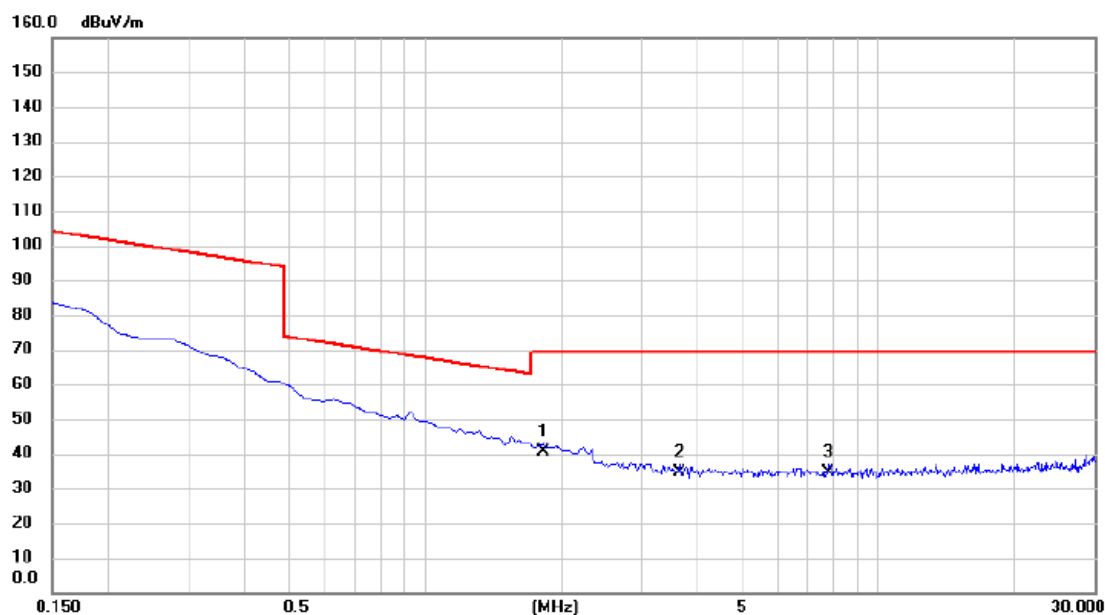


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.822	19.24	21.21	40.45	69.54	-29.09	QP	
2		3.643	13.11	21.30	34.41	69.54	-35.13	QP	
3		7.762	13.22	21.54	34.76	69.54	-34.78	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Polarization	Ant 90°
-----------	--	--------------	---------

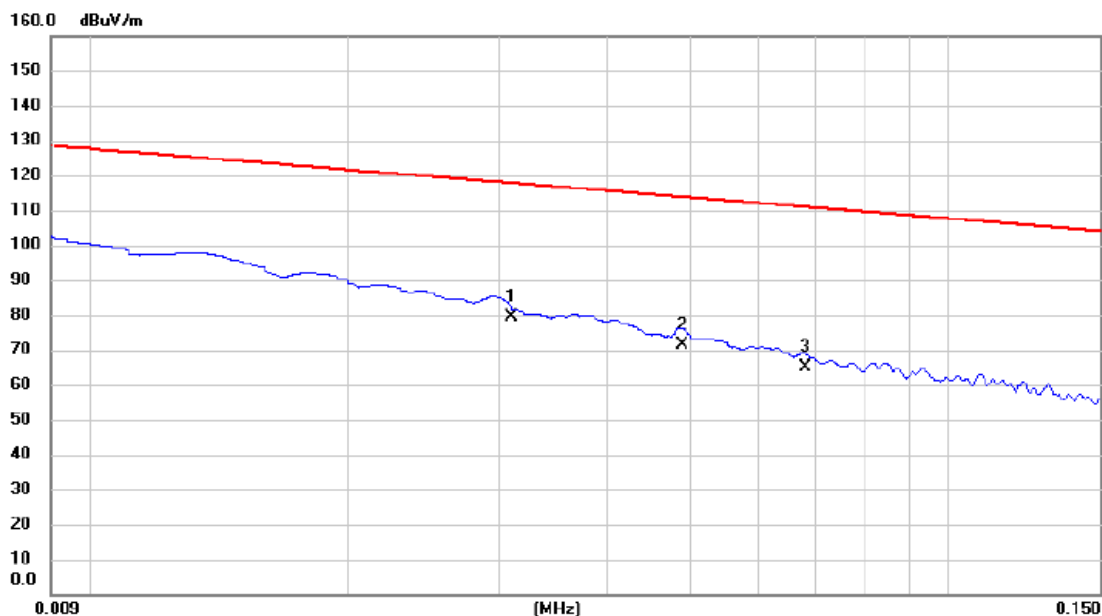


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.031	58.21	21.24	79.45	117.78	-38.33	AVG	
2		0.049	50.25	21.34	71.59	113.80	-42.21	AVG	
3		0.068	43.53	21.34	64.87	110.95	-46.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Polarization	Ant 90°
-----------	--	--------------	---------

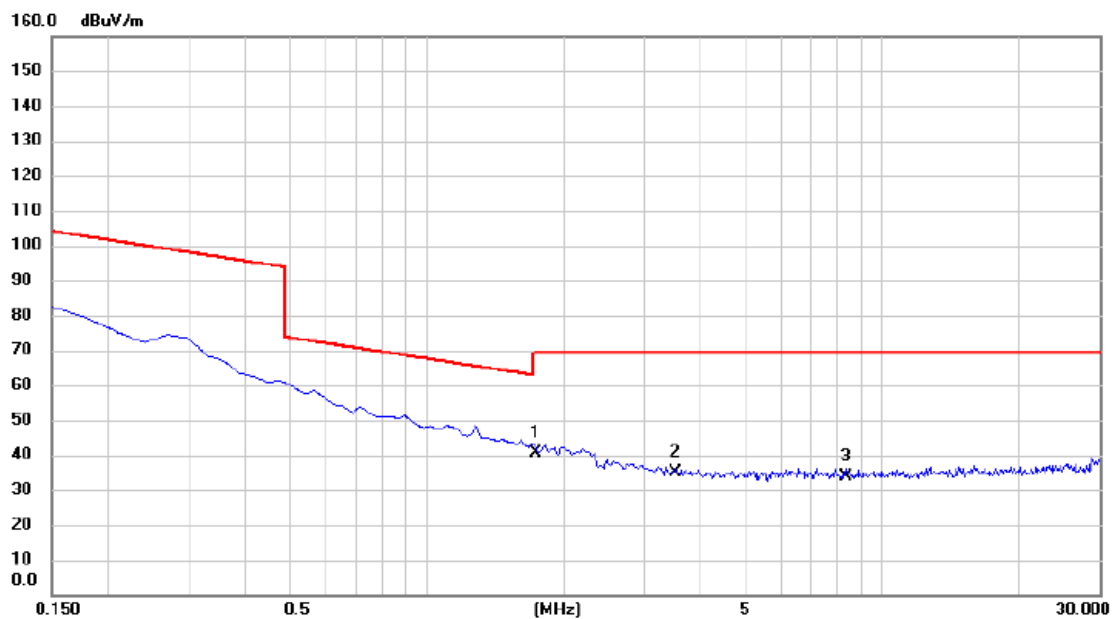

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.732	19.21	21.21	40.42	69.54	-29.12	QP	
2		3.523	13.55	21.30	34.85	69.54	-34.69	QP	
3		8.329	12.24	21.56	33.80	69.54	-35.74	QP	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Polarization	Vertical
-----------	--	--------------	----------

80 dBuV/m

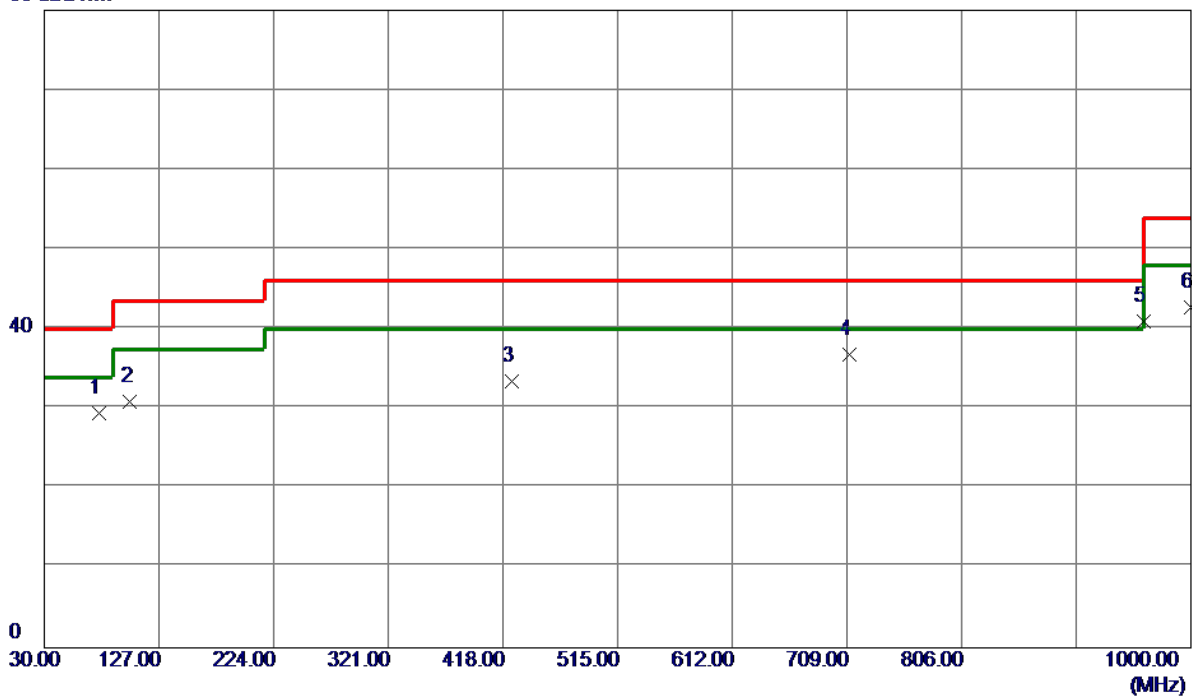


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	76.5600	44.06	-14.63	29.43	40.00	-10.57	Peak	
2	102.7500	46.26	-15.39	30.87	43.52	-12.65	Peak	
3	425.7600	40.80	-7.30	33.50	46.02	-12.52	Peak	
4 *	710.9400	38.94	-2.17	36.77	46.02	-9.25	Peak	
5	960.2300	40.17	0.85	41.02	53.97	-12.95	Peak	
6	1000.0000	41.64	1.03	42.67	53.97	-11.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE80) Mode Channel 138 (UNII-2C)	Polarization	Horizontal
-----------	--	--------------	------------

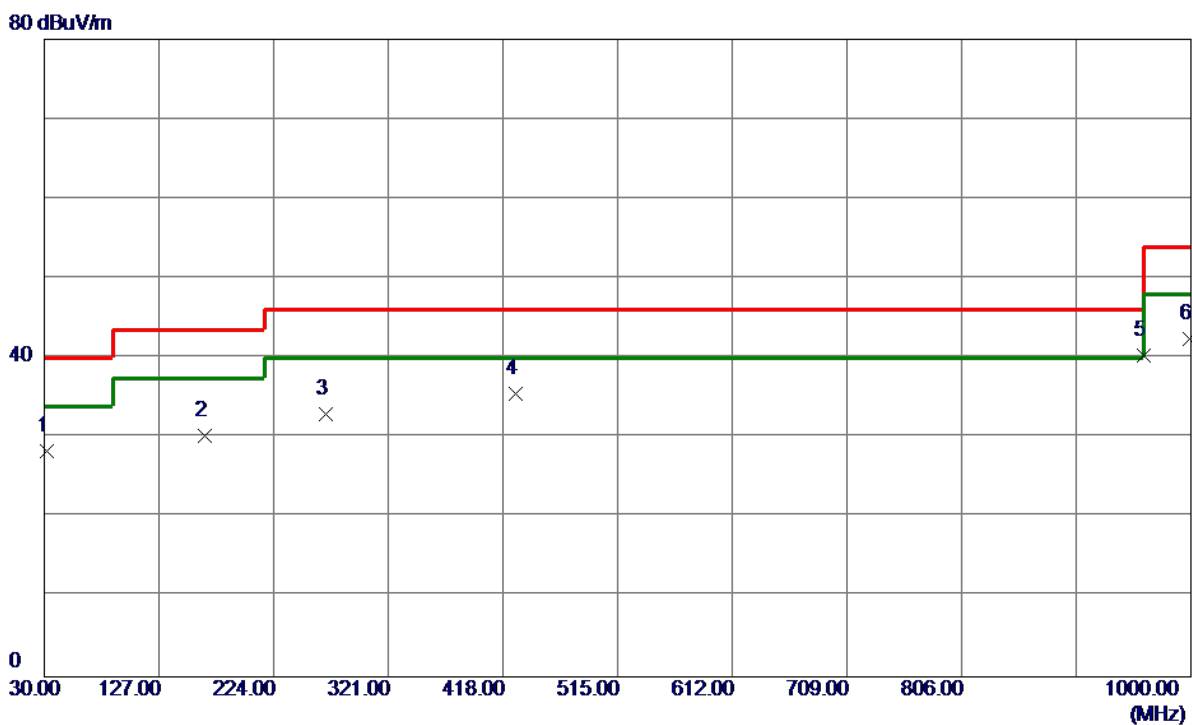

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.9400	41.12	-12.87	28.25	40.00	-11.75	Peak	
2	165.8000	41.53	-11.28	30.25	43.52	-13.27	Peak	
3	268.6200	44.58	-11.55	33.03	46.02	-12.99	Peak	
4 *	428.6700	42.68	-7.22	35.46	46.02	-10.56	Peak	
5	960.2300	39.50	0.85	40.35	53.97	-13.62	Peak	
6	999.0300	41.35	1.03	42.38	53.97	-11.59	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

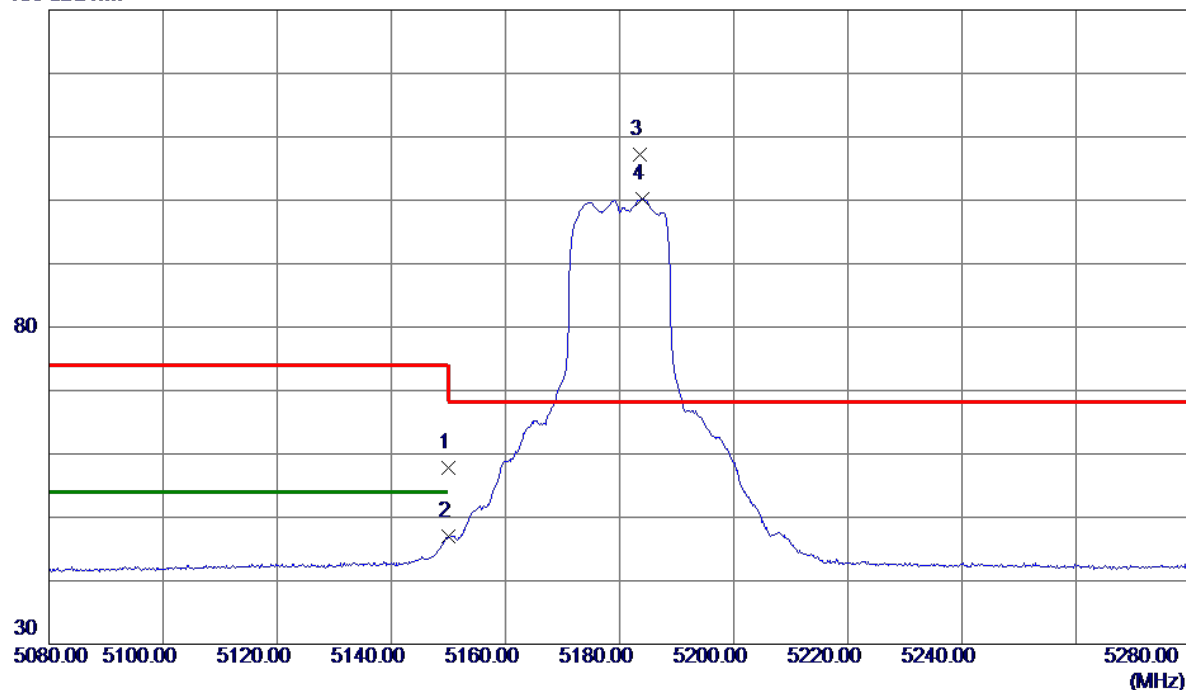

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.68	13.18	57.86	74.00	-16.14	Peak	
2	5150.0000	33.76	13.18	46.94	54.00	-7.06	AVG	
3 *	5183.6000	93.84	13.28	107.12	68.20	38.92	Peak	No Limit
4	5184.0000	86.90	13.29	100.19	999.00	-898.81	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

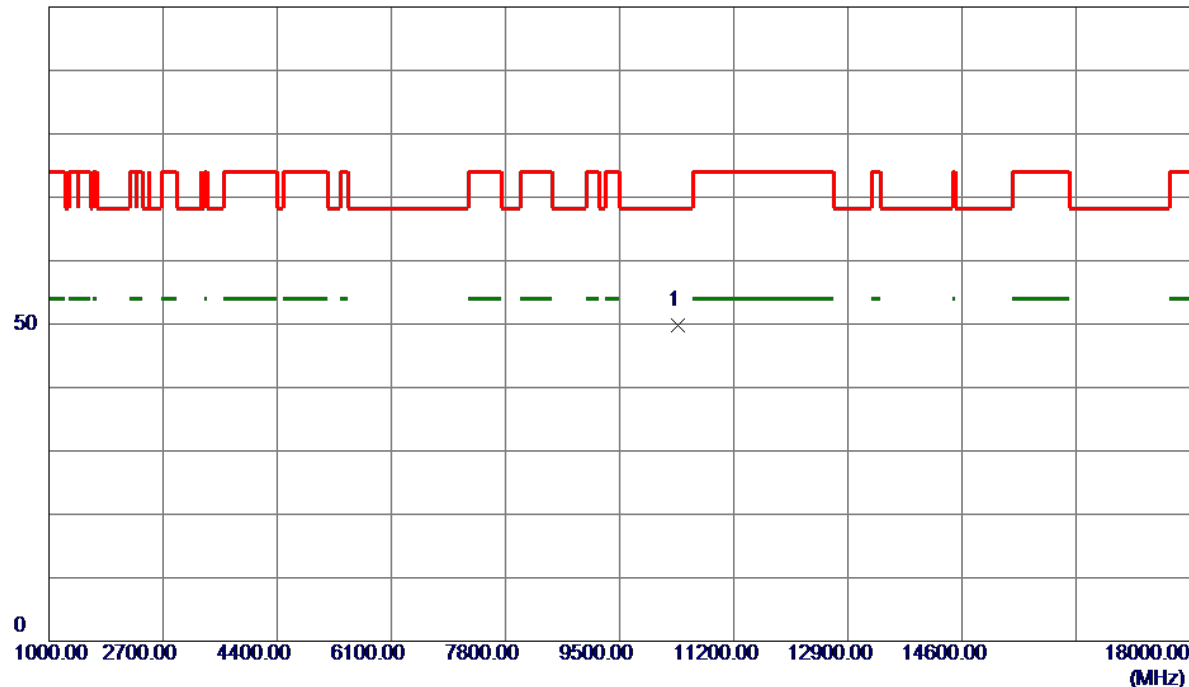

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.8000	40.94	8.86	49.80	68.20	-18.40	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

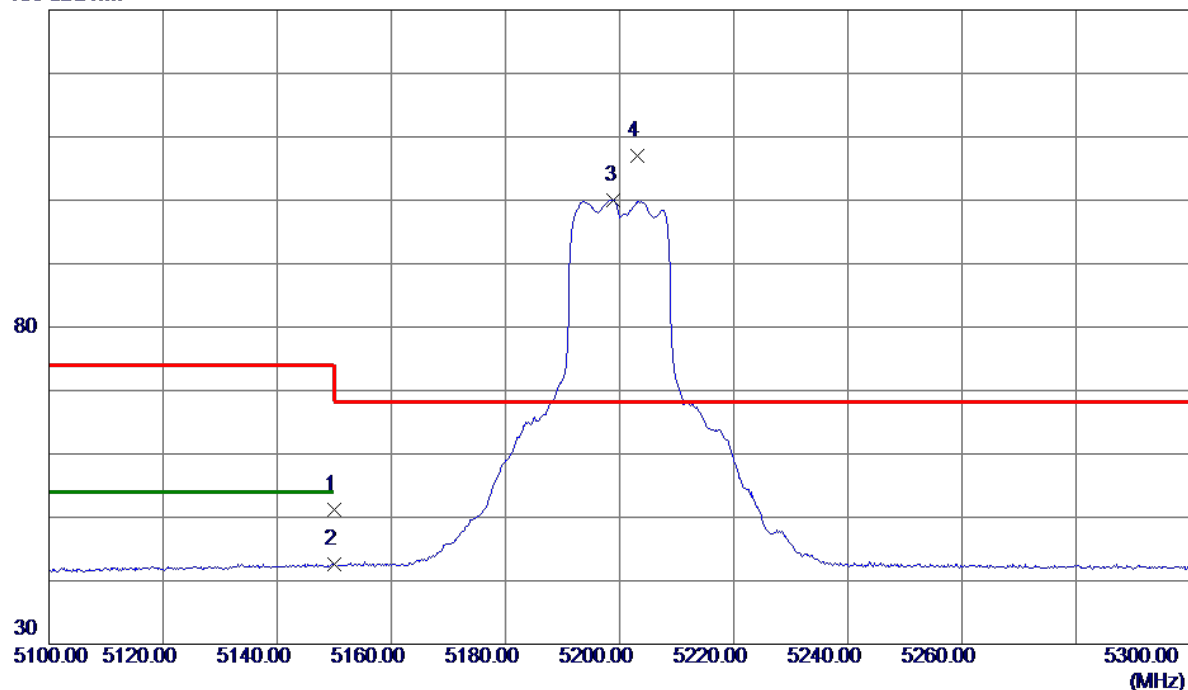


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	37.93	13.18	51.11	74.00	-22.89	Peak	
2	5150.0000	29.39	13.18	42.57	54.00	-11.43	AVG	
3	5199.0000	86.69	13.33	100.02	999.00	-898.98	AVG	No Limit
4 *	5203.2000	93.61	13.34	106.95	68.20	38.75	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

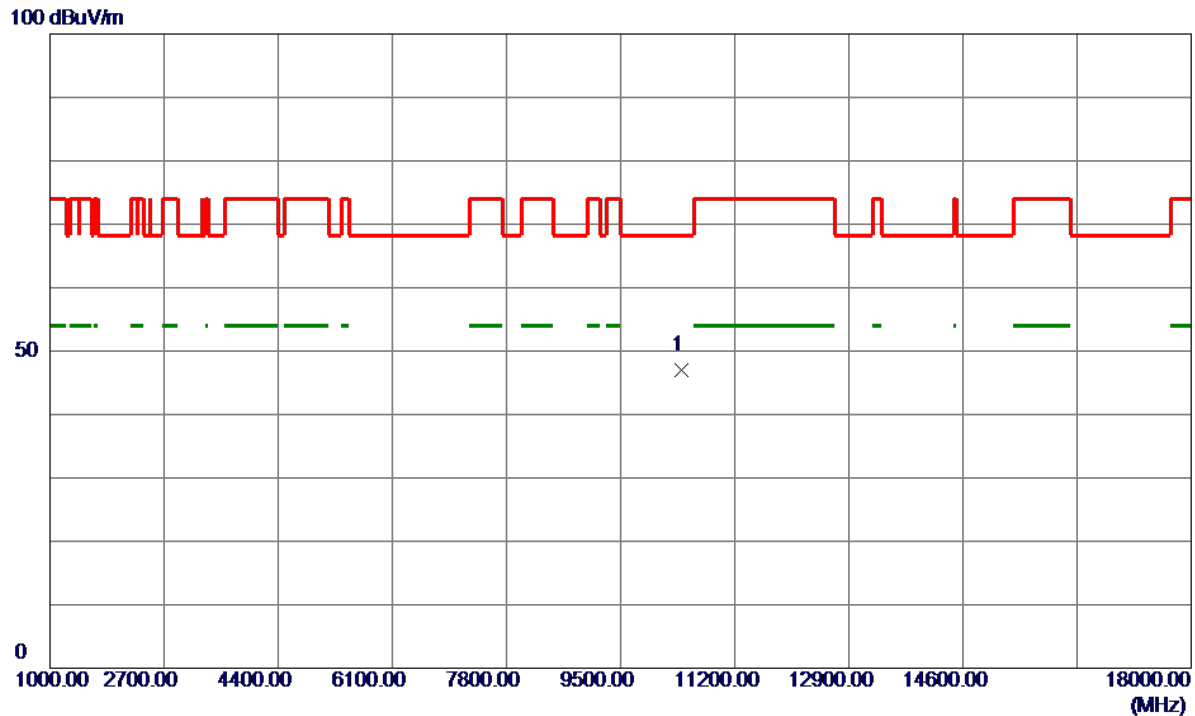


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.6750	38.15	8.93	47.08	68.20	-21.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

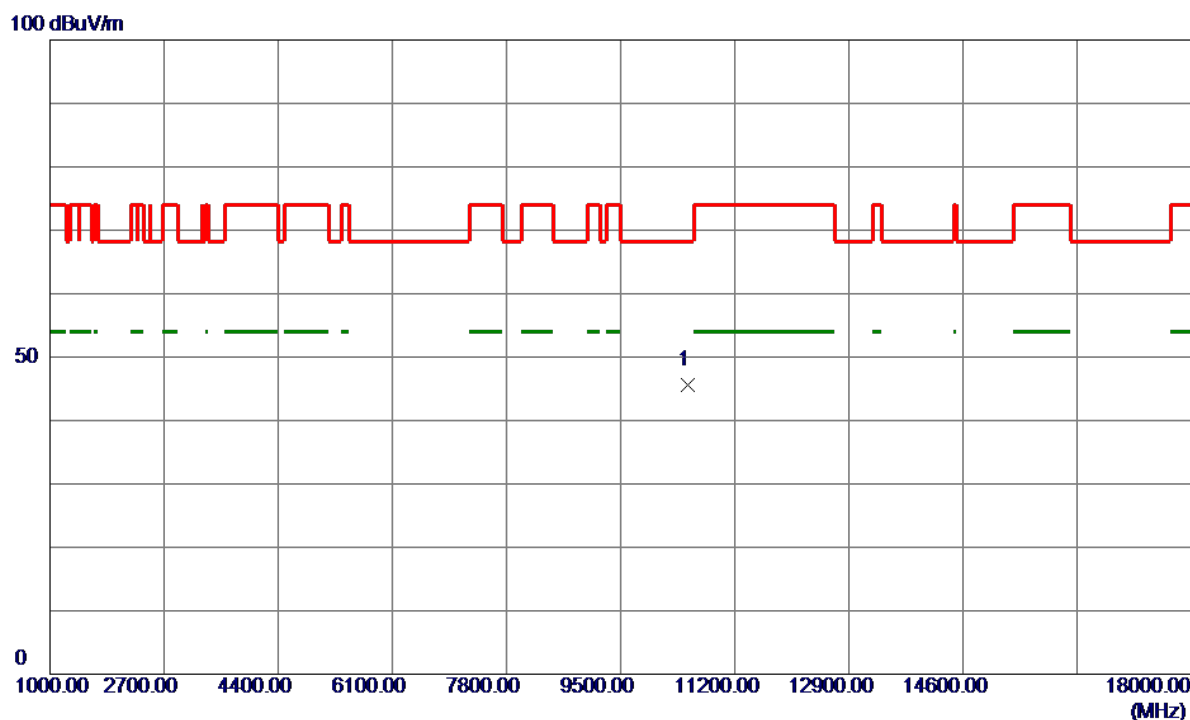

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10500.6000	36.57	9.12	45.69	68.20	-22.51	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

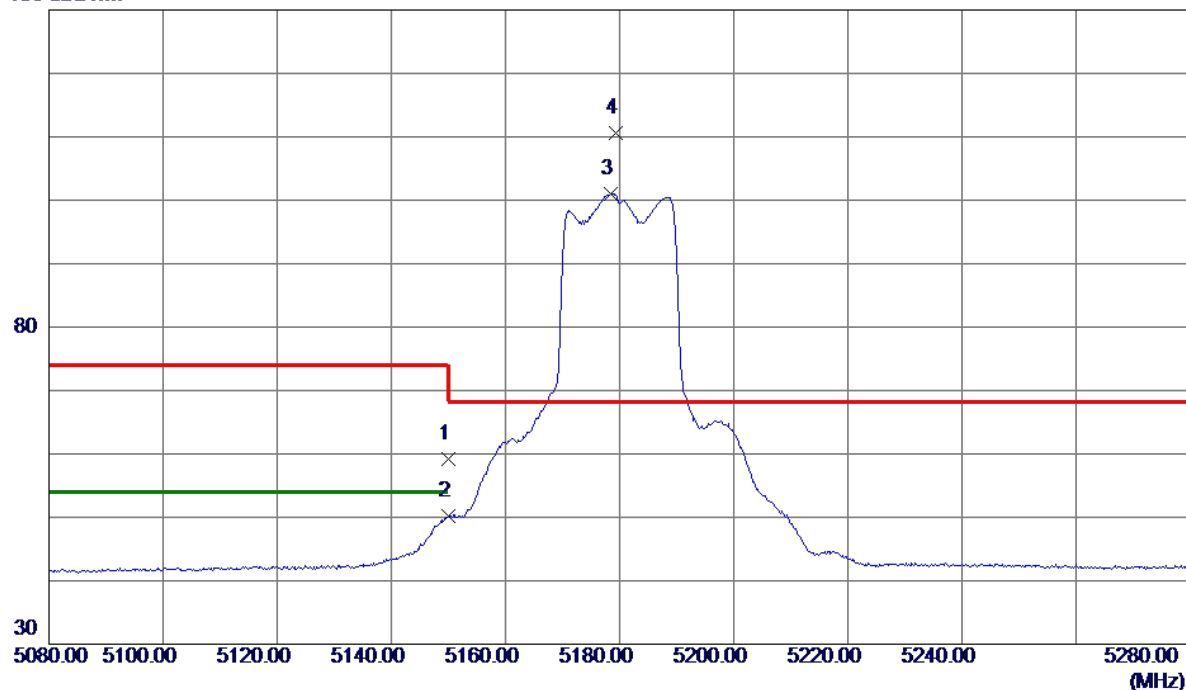


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.08	13.18	59.26	74.00	-14.74	Peak	
2	5150.0000	37.02	13.18	50.20	54.00	-3.80	AVG	
3	5178.4000	87.82	13.27	101.09	999.00	-897.91	AVG	No Limit
4 *	5179.4000	97.26	13.27	110.53	68.20	42.33	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

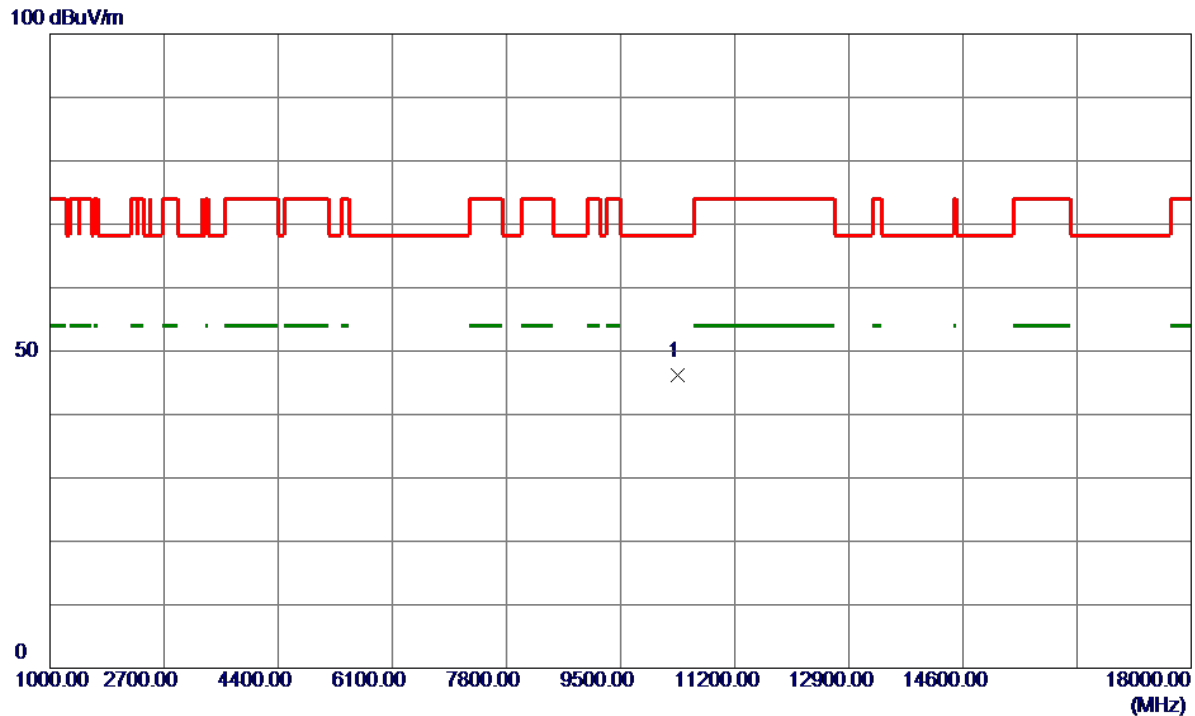


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10358.9250	37.25	8.85	46.10	68.20	-22.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

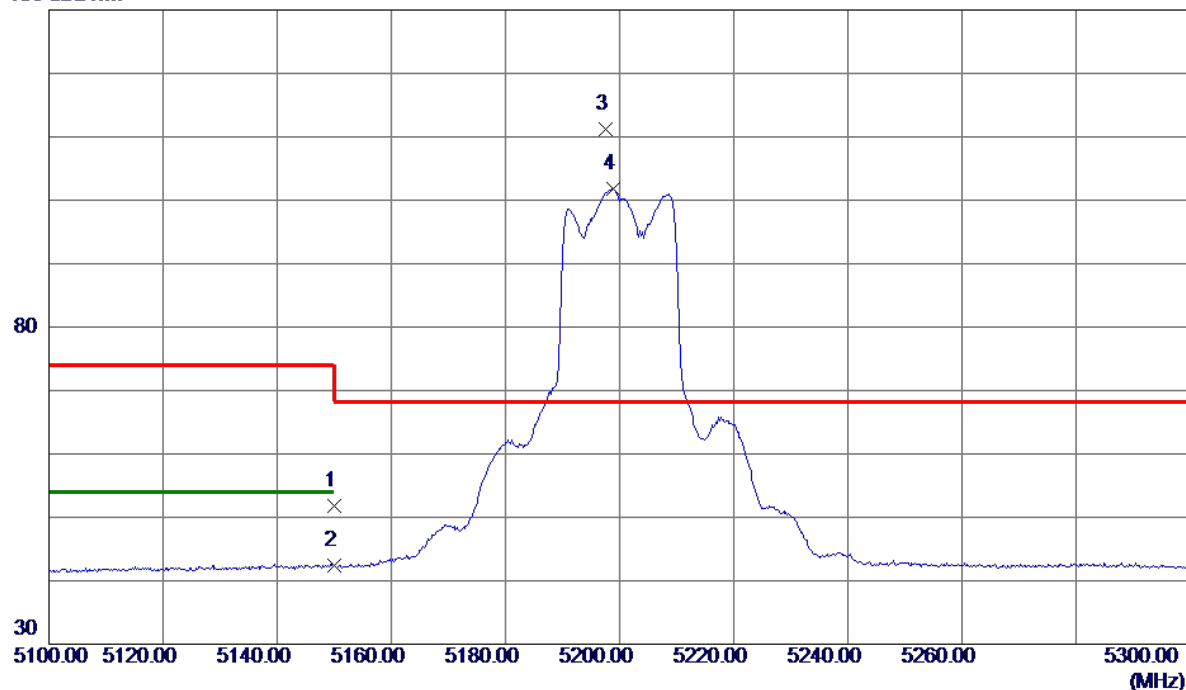

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.68	13.18	51.86	74.00	-22.14	Peak	
2	5150.0000	29.17	13.18	42.35	54.00	-11.65	AVG	
3 *	5197.6000	97.81	13.33	111.14	68.20	42.94	Peak	No Limit
4	5198.8000	88.46	13.33	101.79	999.00	-897.21	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

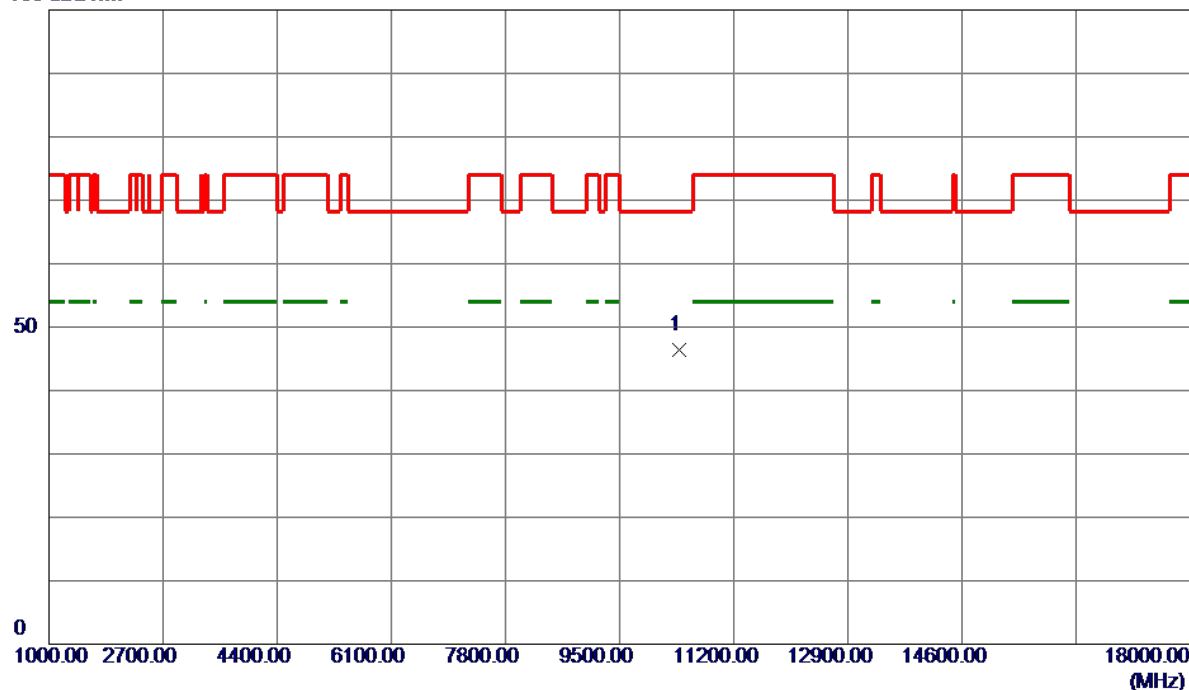


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10392.1500	37.53	8.92	46.45	68.20	-21.75	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

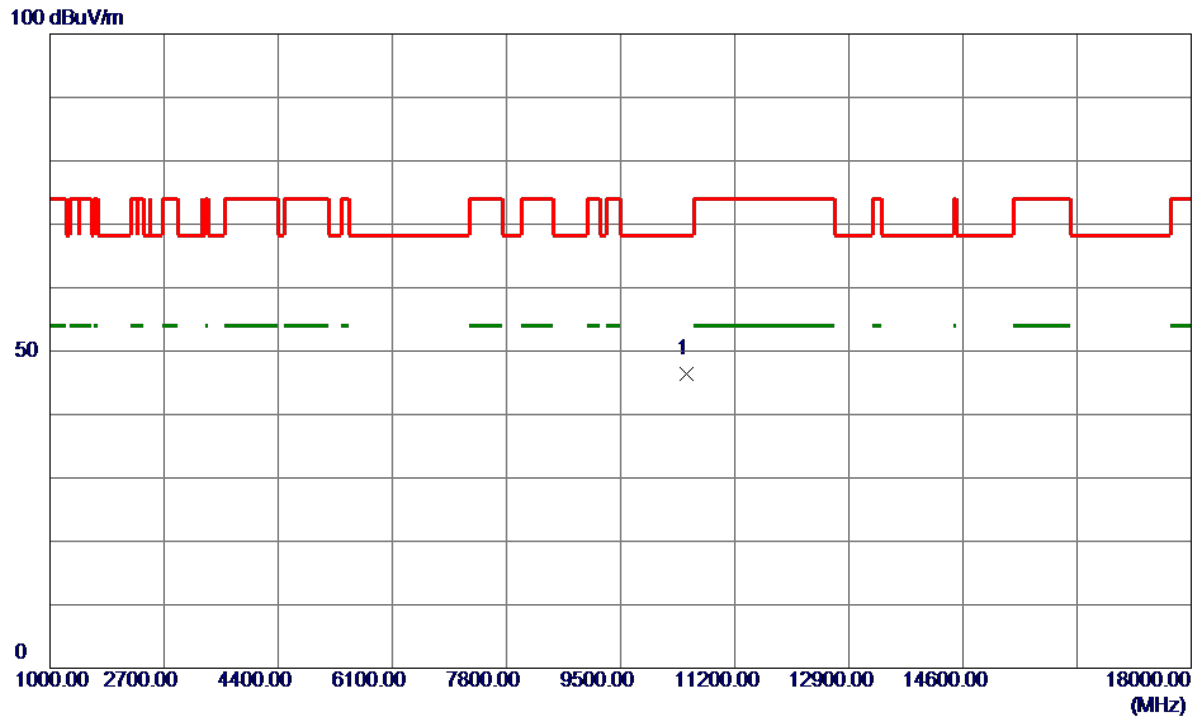


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.5250	37.35	9.08	46.43	68.20	-21.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

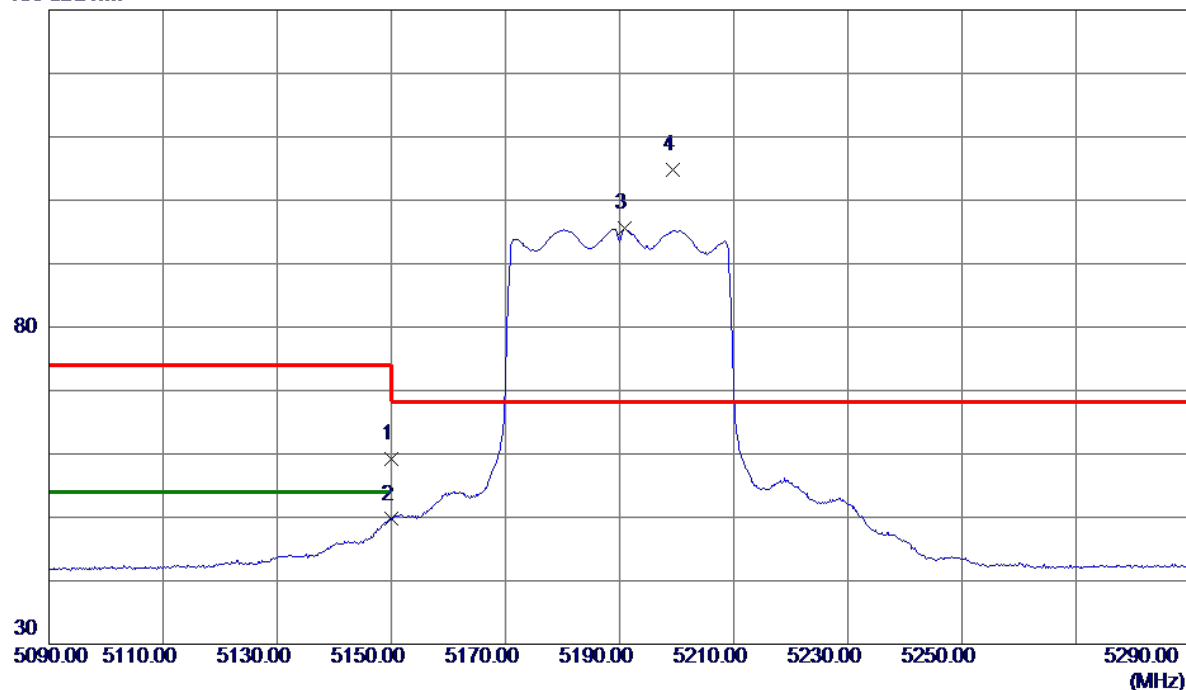


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.04	13.18	59.22	74.00	-14.78	Peak	
2	5150.0000	36.52	13.18	49.70	54.00	-4.30	AVG	
3	5190.8000	82.23	13.31	95.54	999.00	-903.46	AVG	No Limit
4 *	5199.4000	91.51	13.33	104.84	68.20	36.64	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

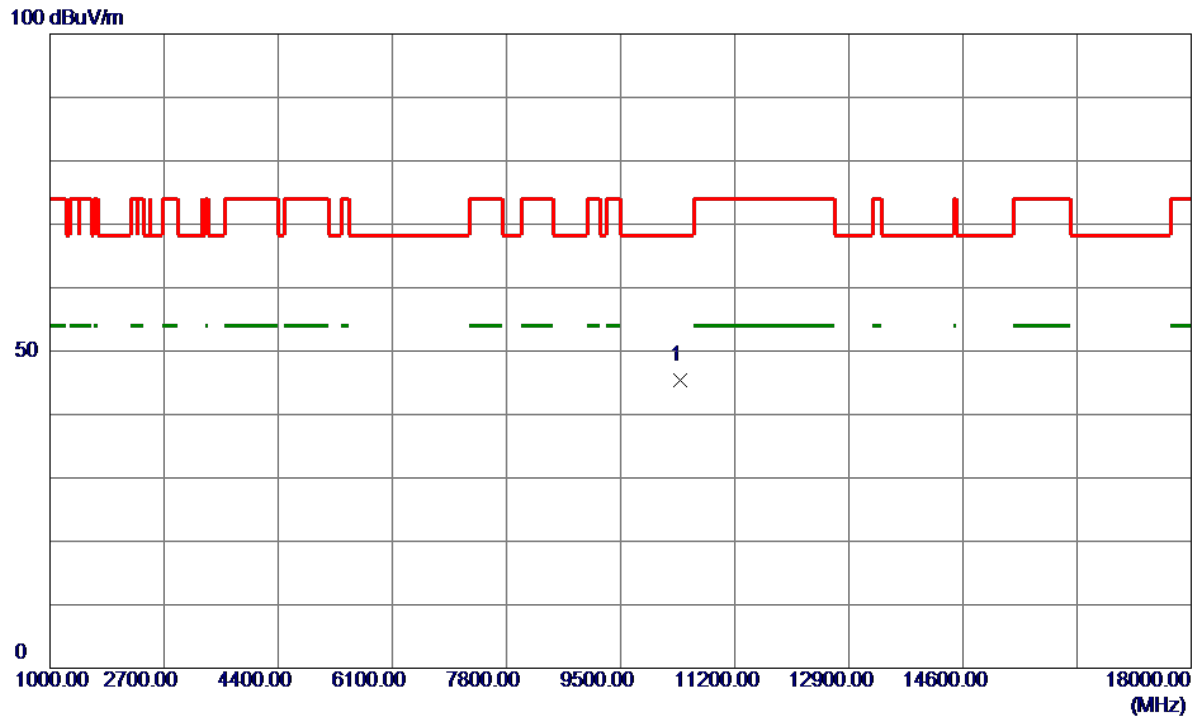


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10394.1000	36.47	8.92	45.39	68.20	-22.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

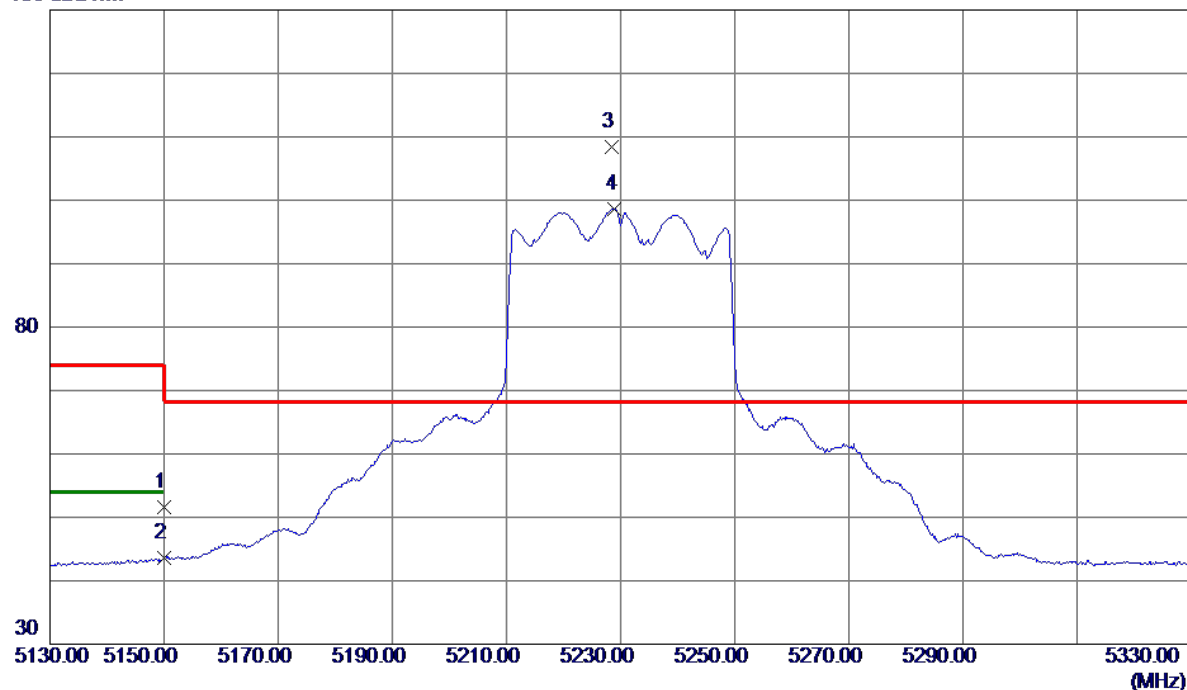


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.34	13.18	51.52	74.00	-22.48	Peak	
2	5150.0000	30.42	13.18	43.60	54.00	-10.40	AVG	
3 *	5228.4000	94.97	13.42	108.39	68.20	40.19	Peak	No Limit
4	5229.0000	85.22	13.42	98.64	999.00	-900.36	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

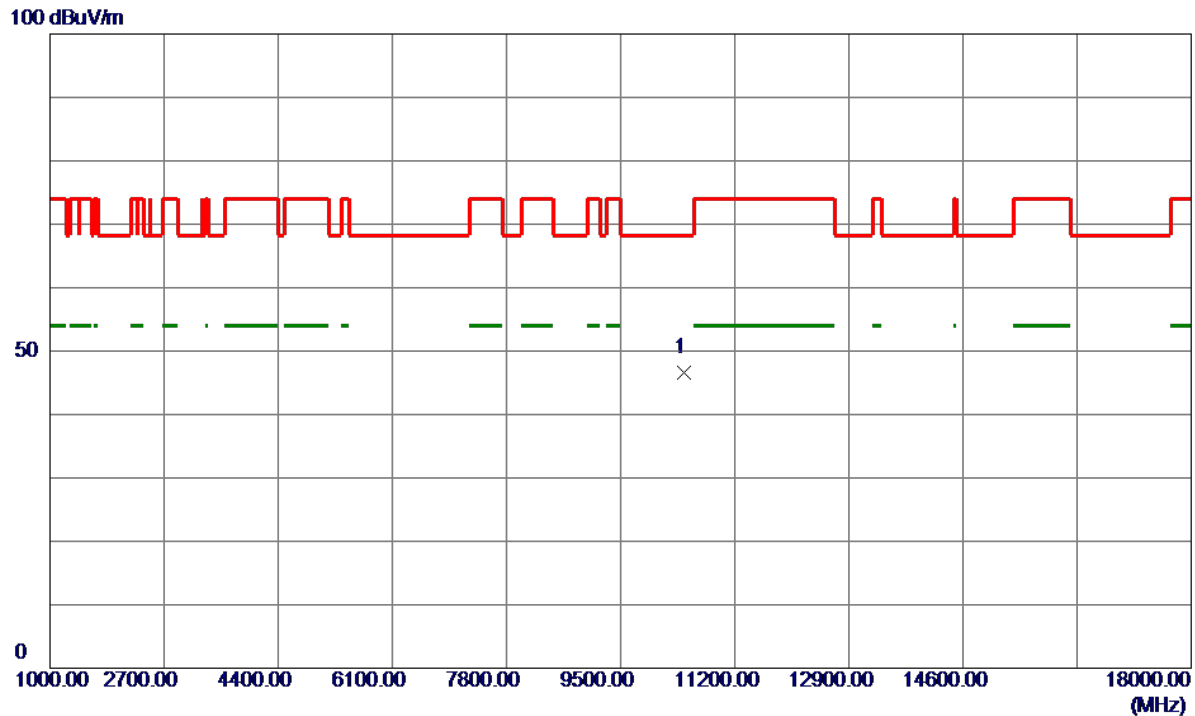


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10443.6500	37.65	9.01	46.66	68.20	-21.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

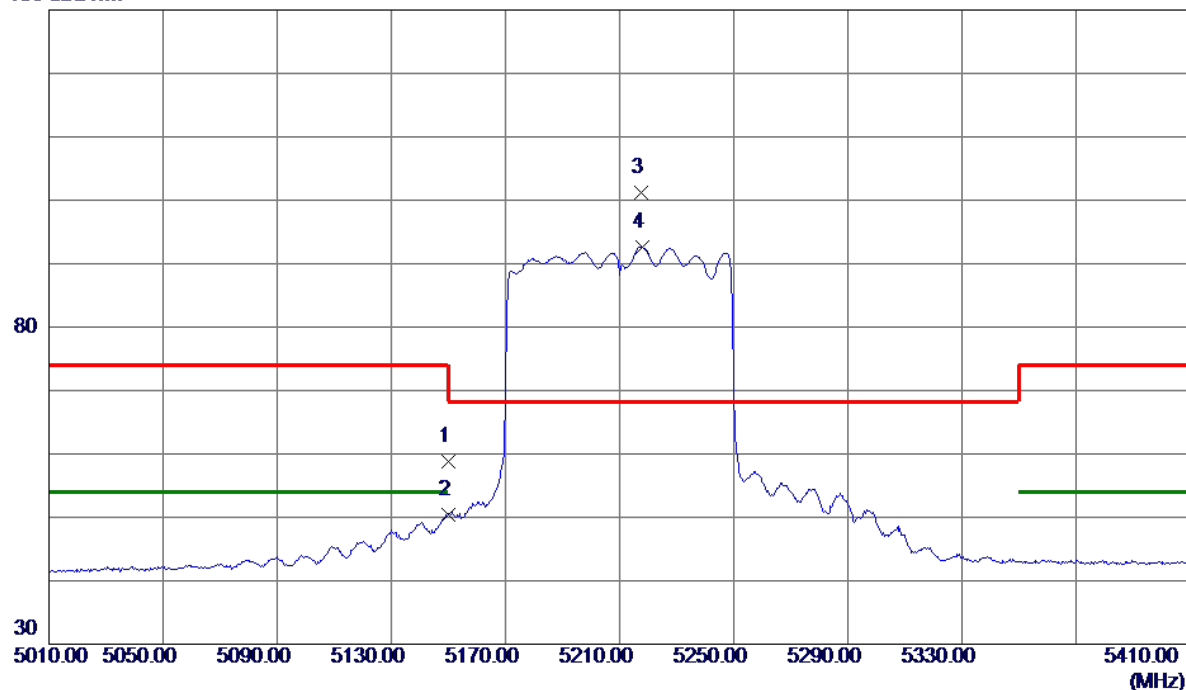

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.59	13.18	58.77	74.00	-15.23	Peak	
2	5150.0000	37.14	13.18	50.32	54.00	-3.68	AVG	
3 *	5217.6000	87.76	13.39	101.15	68.20	32.95	Peak	No Limit
4	5218.0000	79.29	13.39	92.68	999.00	-906.32	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

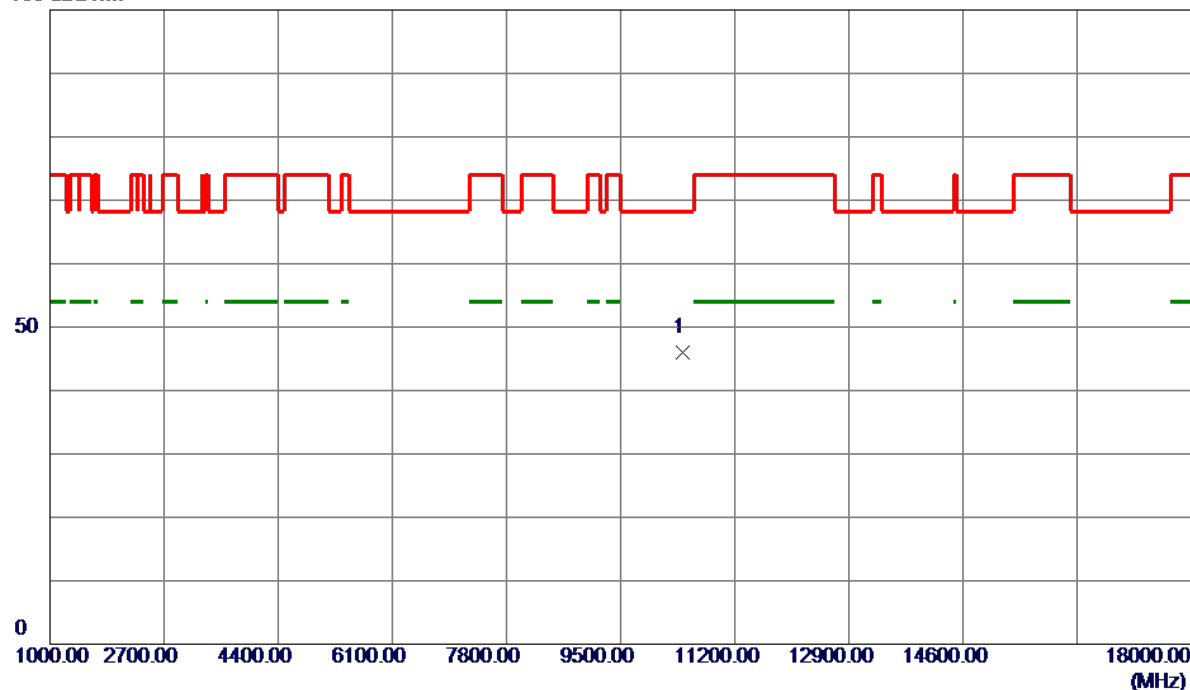


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10422.6300	37.02	8.97	45.99	68.20	-22.21	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

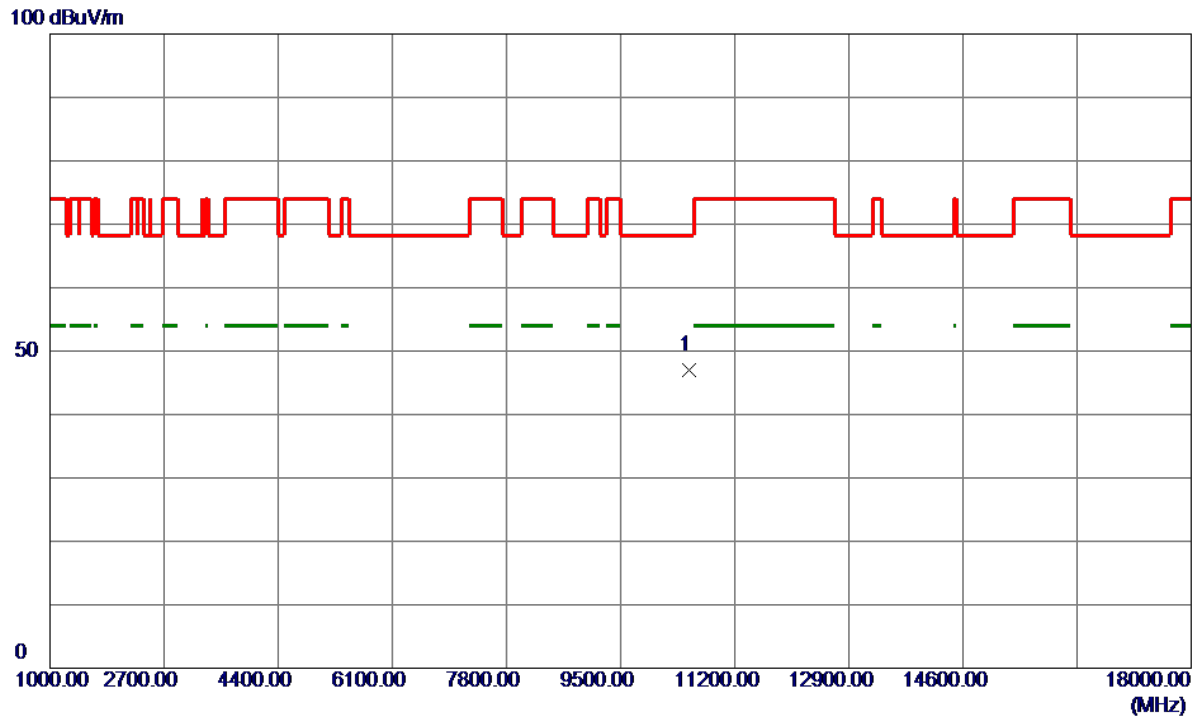


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10525.3000	37.80	9.14	46.94	68.20	-21.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

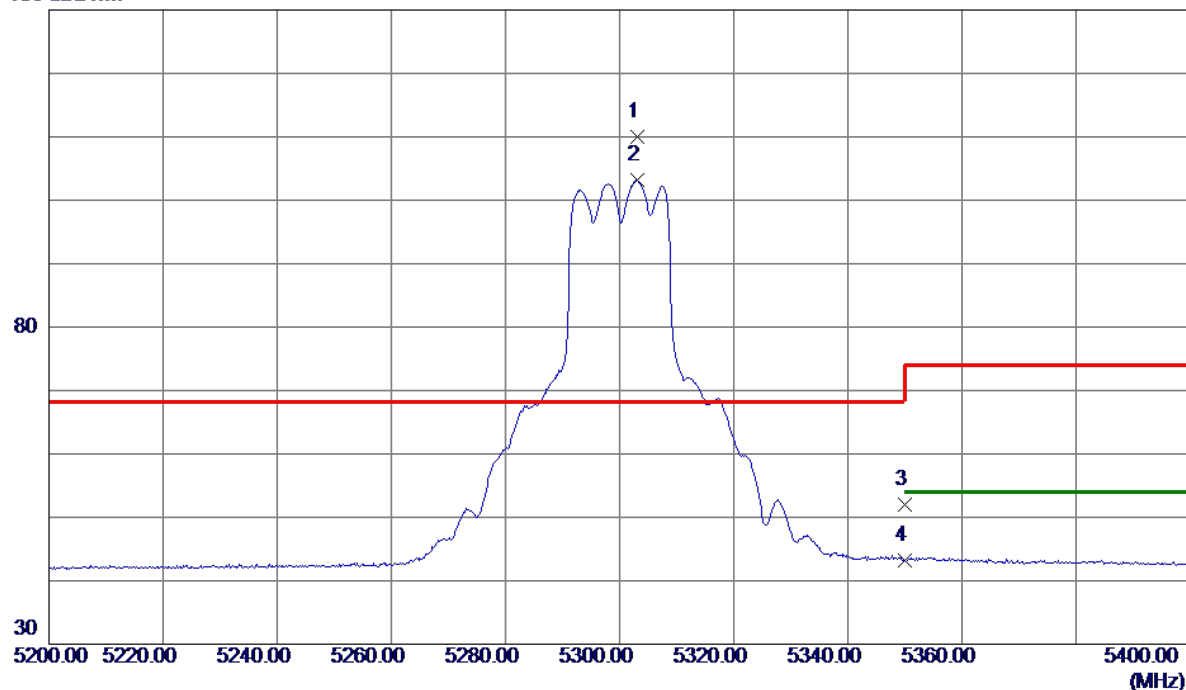

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5303.2000	96.38	13.65	110.03	68.20	41.83	Peak	No Limit
2	5303.2000	89.53	13.65	103.18	999.00	-895.82	AVG	No Limit
3	5350.0000	38.30	13.79	52.09	74.00	-21.91	Peak	
4	5350.0000	29.44	13.79	43.23	54.00	-10.77	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

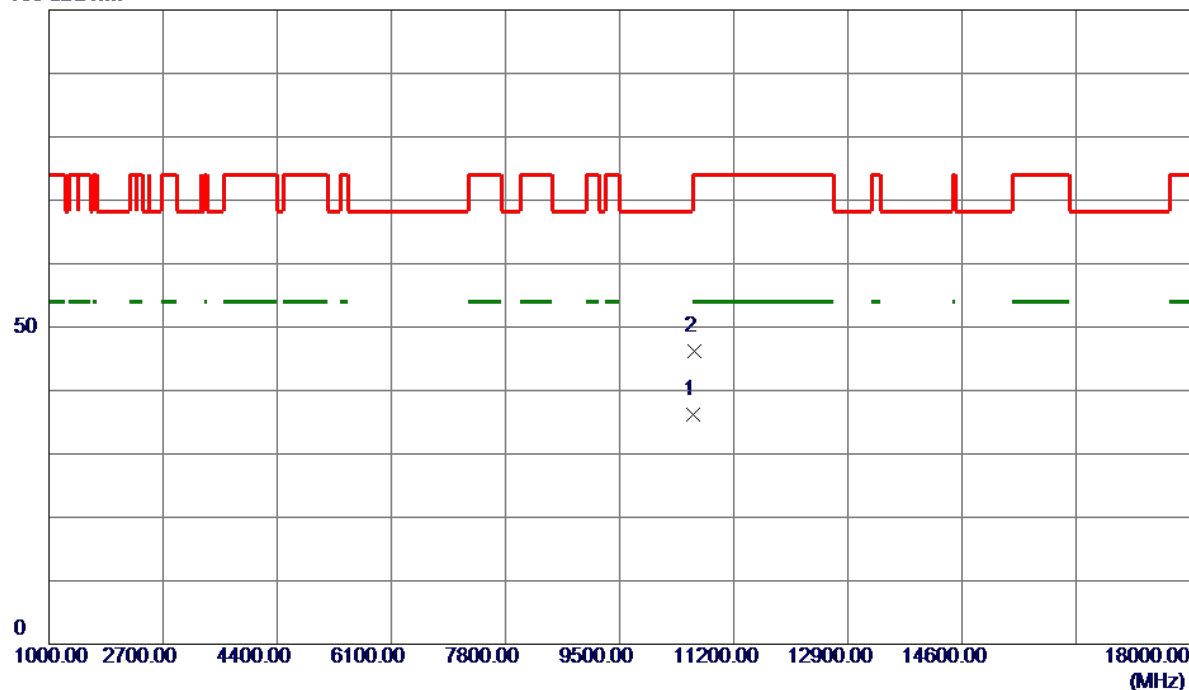

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.1750	27.05	9.19	36.24	54.00	-17.76	AVG	
2	10616.3000	36.92	9.20	46.12	74.00	-27.88	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

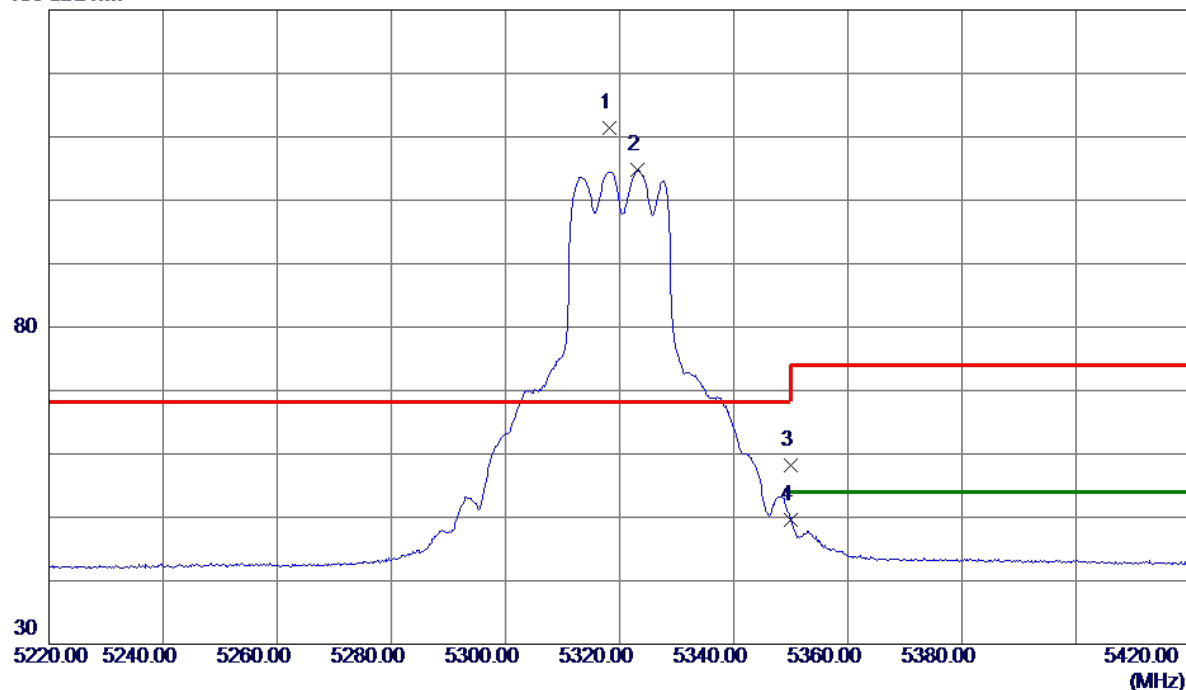

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.2000	97.72	13.69	111.41	68.20	43.21	Peak	No Limit
2	5323.2000	91.05	13.71	104.76	999.00	-894.24	AVG	No Limit
3	5350.0000	44.49	13.79	58.28	74.00	-15.72	Peak	
4	5350.0000	35.87	13.79	49.66	54.00	-4.34	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

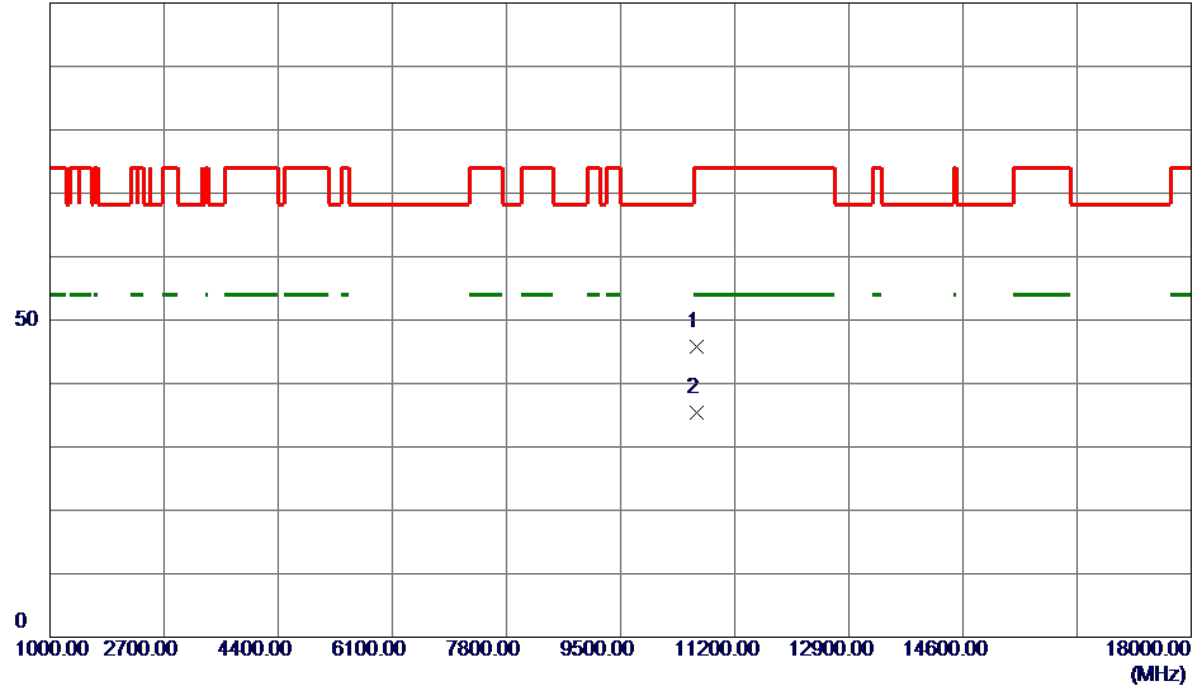

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10627.0250	36.62	9.21	45.83	74.00	-28.17	Peak	
2 *	10639.8500	26.15	9.22	35.37	54.00	-18.63	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

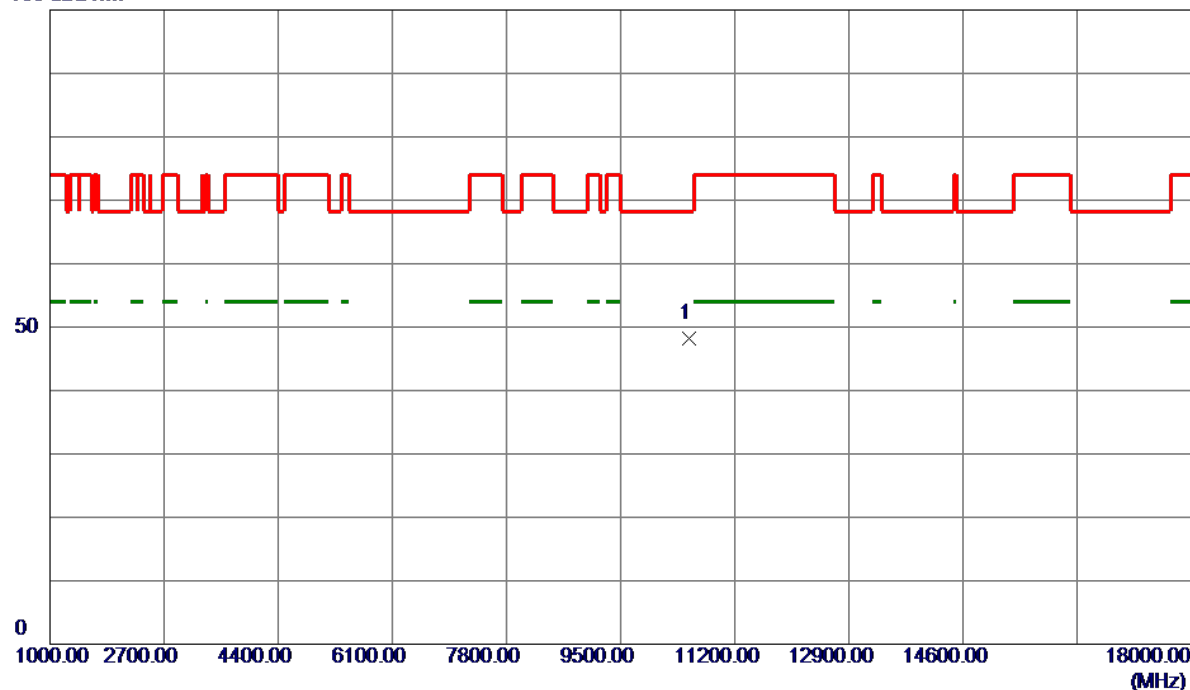

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10511.9250	39.12	9.13	48.25	68.20	-19.95	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

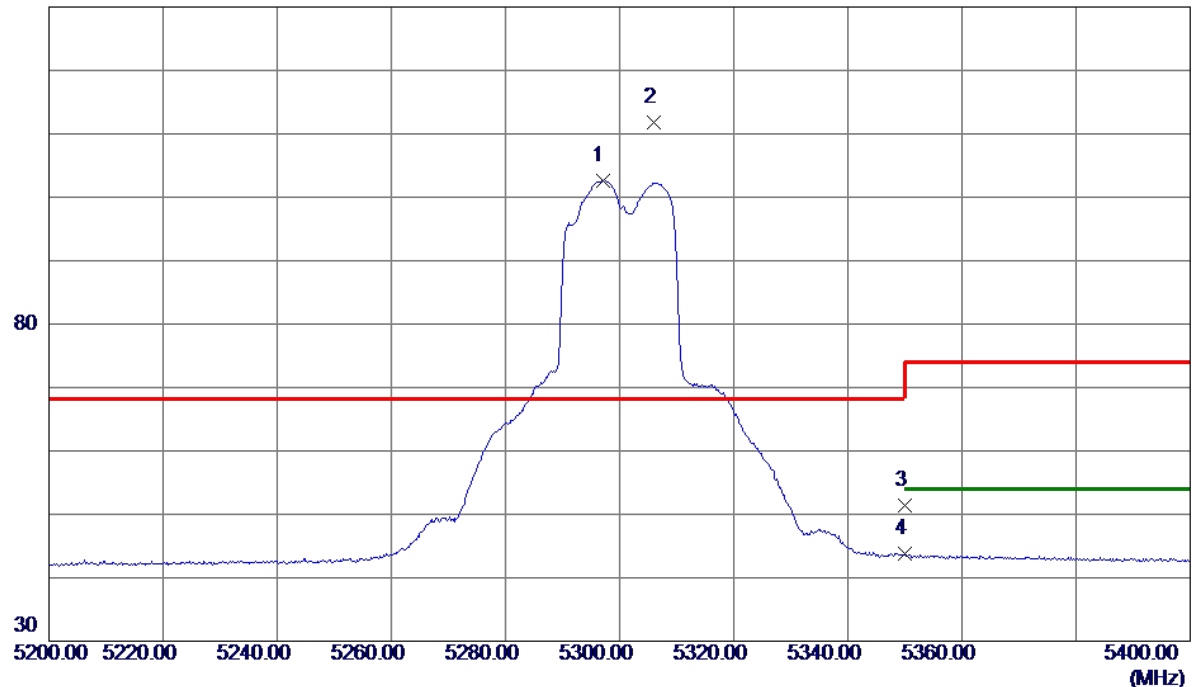

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5297.0000	88.95	13.63	102.58	999.00	-896.42	AVG	No Limit
2 *	5306.0000	98.21	13.65	111.86	68.20	43.66	Peak	No Limit
3	5350.0000	37.69	13.79	51.48	74.00	-22.52	Peak	
4	5350.0000	29.98	13.79	43.77	54.00	-10.23	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

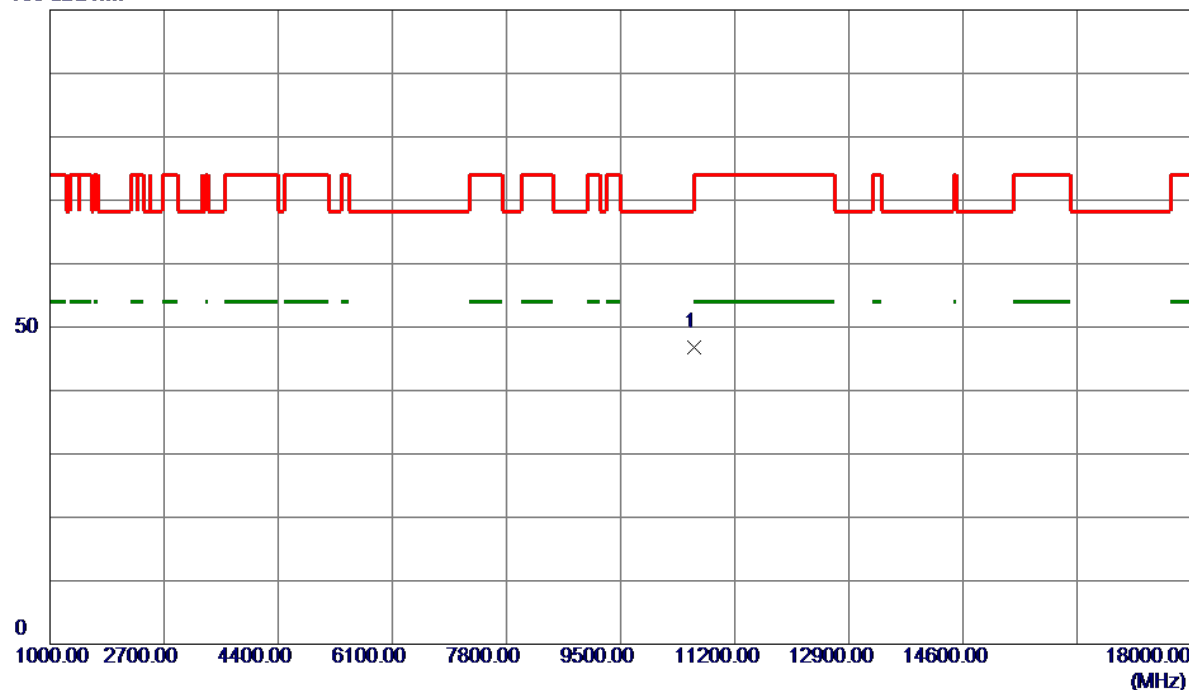

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.6750	37.65	9.19	46.84	68.20	-21.36	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

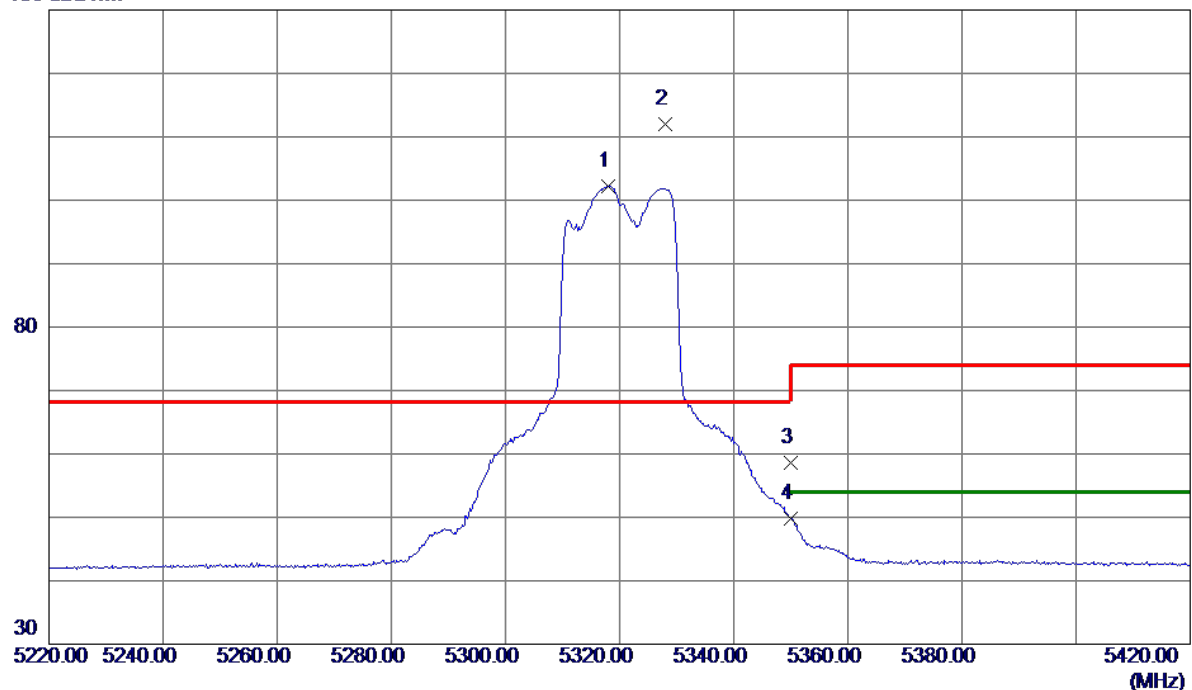

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5318.0000	88.46	13.69	102.15	999.00	-896.85	AVG	No Limit
2 *	5328.0000	98.20	13.72	111.92	68.20	43.72	Peak	No Limit
3	5350.0000	44.90	13.79	58.69	74.00	-15.31	Peak	
4	5350.0000	36.00	13.79	49.79	54.00	-4.21	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

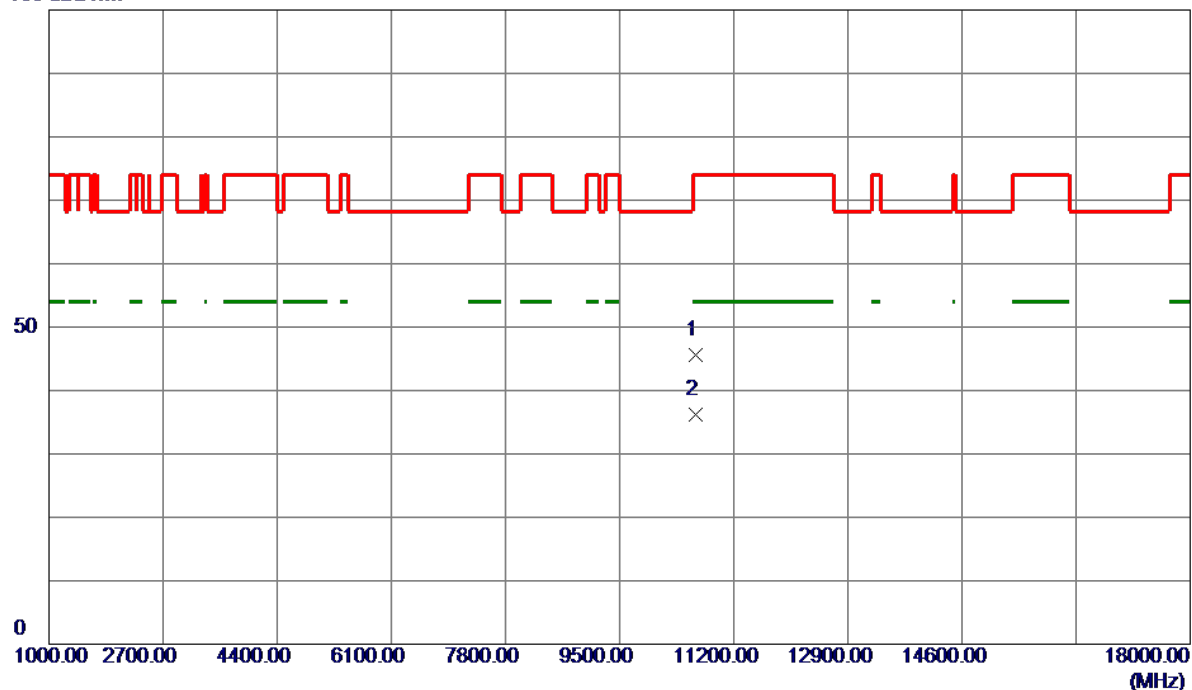

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10634.9750	36.38	9.21	45.59	74.00	-28.41	Peak	
2 *	10639.9250	26.94	9.22	36.16	54.00	-17.84	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

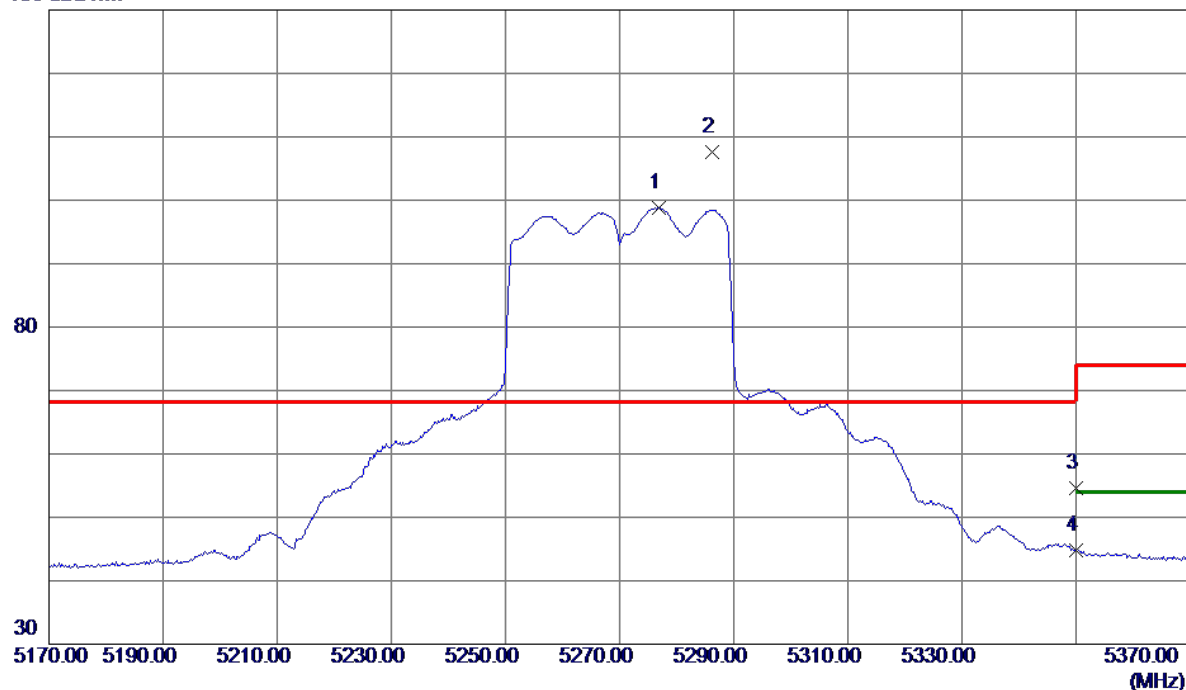


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5276.8000	85.21	13.57	98.78	999.00	-900.22	AVG	No Limit
2 *	5286.2000	93.94	13.59	107.53	68.20	39.33	Peak	No Limit
3	5350.0000	40.84	13.79	54.63	74.00	-19.37	Peak	
4	5350.0000	30.95	13.79	44.74	54.00	-9.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

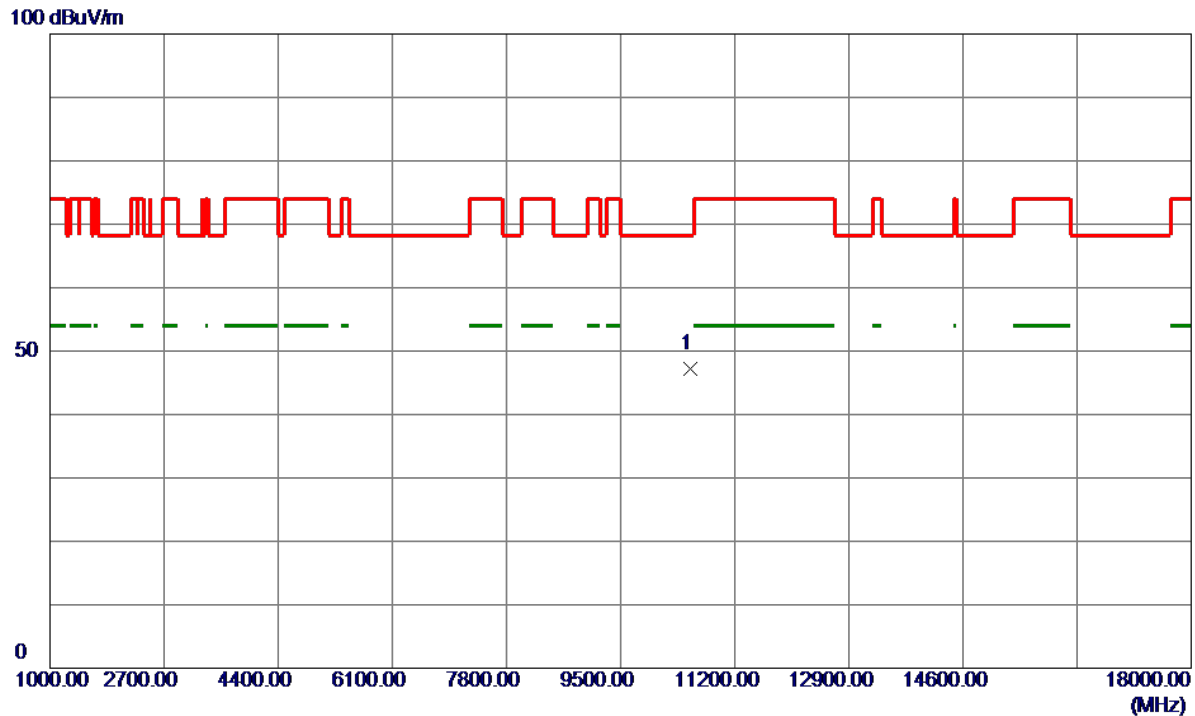


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10541.5250	38.01	9.15	47.16	68.20	-21.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

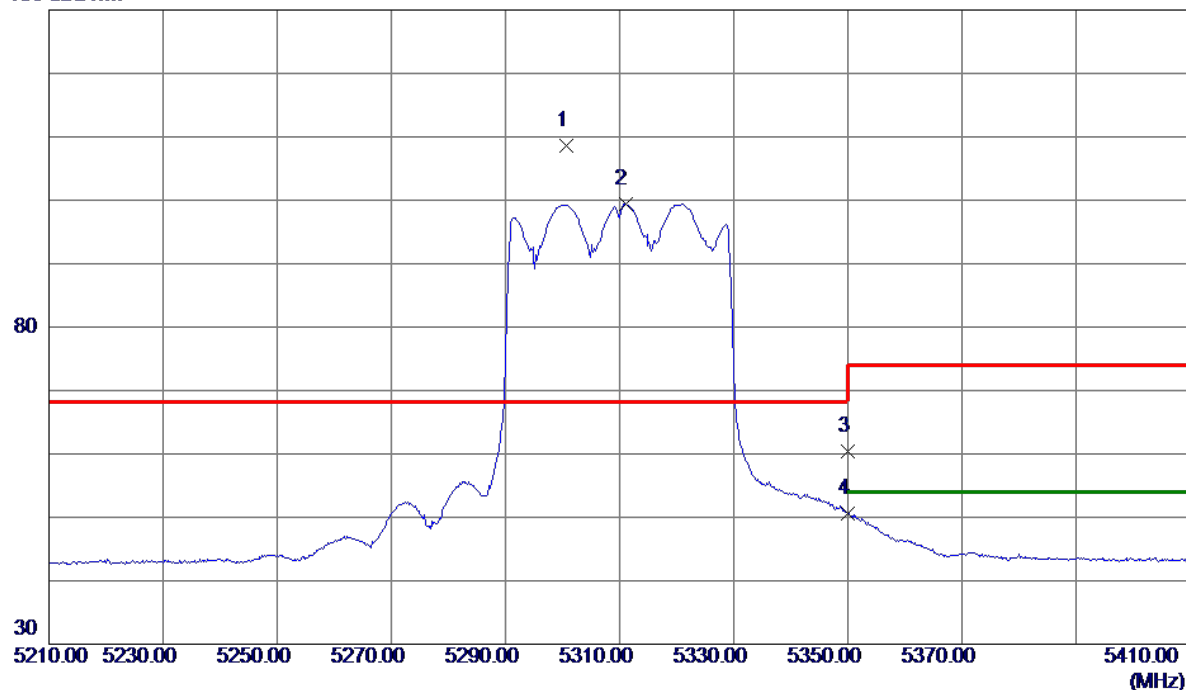


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5300.6000	95.01	13.64	108.65	68.20	40.45	Peak	No Limit
2	5311.0000	85.78	13.67	99.45	999.00	-899.55	AVG	No Limit
3	5350.0000	46.62	13.79	60.41	74.00	-13.59	Peak	
4	5350.0000	36.81	13.79	50.60	54.00	-3.40	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

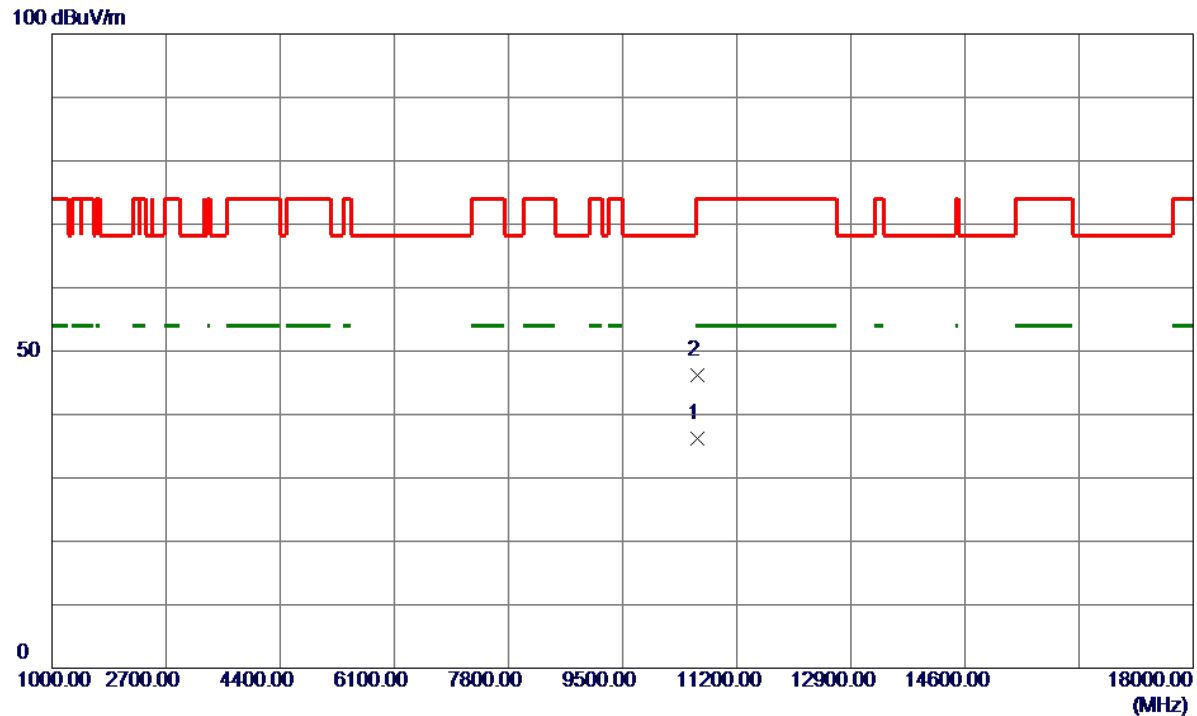

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10619.9500	26.94	9.20	36.14	54.00	-17.86	AVG	
2	10621.0000	36.98	9.20	46.18	74.00	-27.82	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

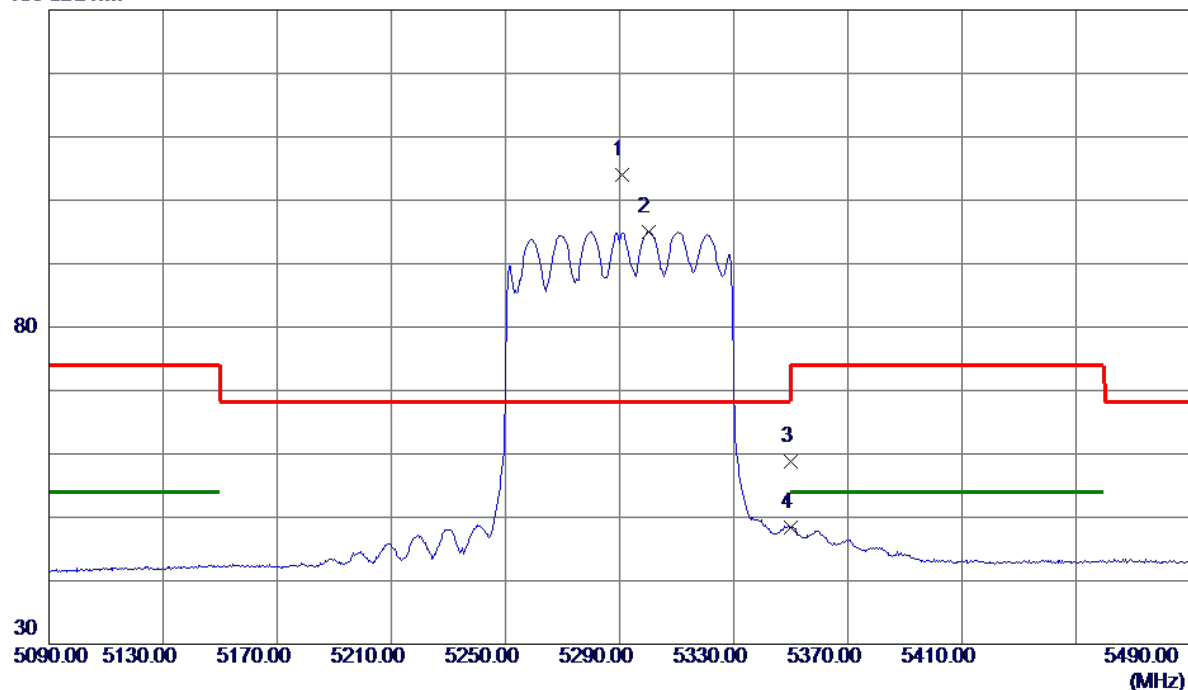

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5290.8000	90.41	13.61	104.02	68.20	35.82	Peak	No Limit
2	5300.0000	81.41	13.64	95.05	999.00	-903.95	AVG	No Limit
3	5350.0000	45.06	13.79	58.85	74.00	-15.15	Peak	
4	5350.0000	34.63	13.79	48.42	54.00	-5.58	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

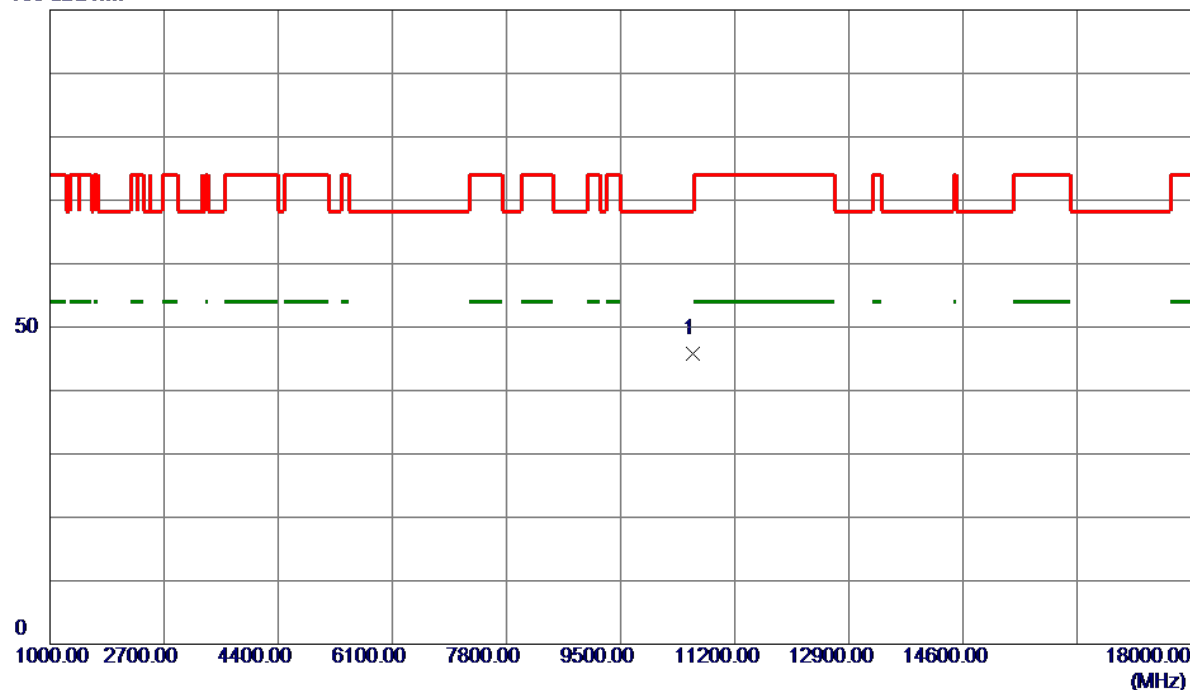

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10585.8600	36.65	9.18	45.83	68.20	-22.37	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

130 dBuV/m

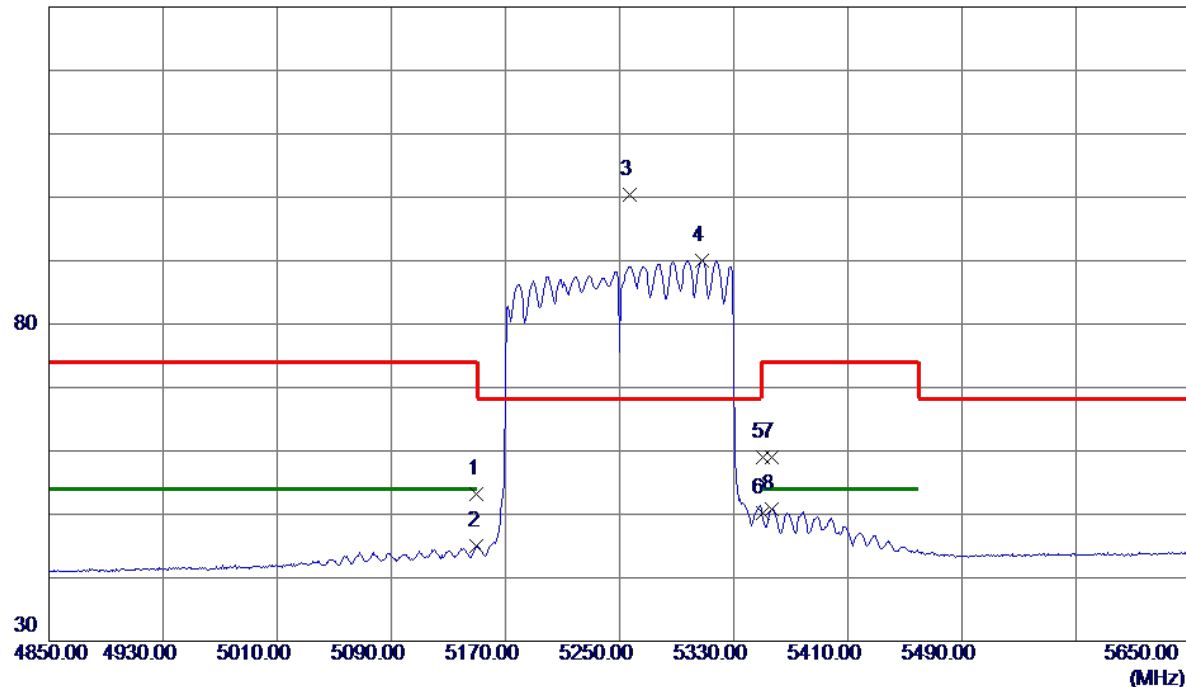

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.09	13.18	53.27	74.00	-20.73	Peak	
2	5150.0000	31.90	13.18	45.08	54.00	-8.92	AVG	
3 *	5257.2000	86.83	13.51	100.34	68.20	32.14	Peak	No Limit
4	5307.6000	76.42	13.66	90.08	999.00	-908.92	AVG	No Limit
5	5350.0000	45.25	13.79	59.04	74.00	-14.96	Peak	
6	5350.0000	36.33	13.79	50.12	54.00	-3.88	AVG	
7	5356.4000	45.20	13.81	59.01	74.00	-14.99	Peak	
8	5356.4000	37.00	13.81	50.81	54.00	-3.19	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Horizontal
-----------	---	--------------	------------

100 dBuV/m

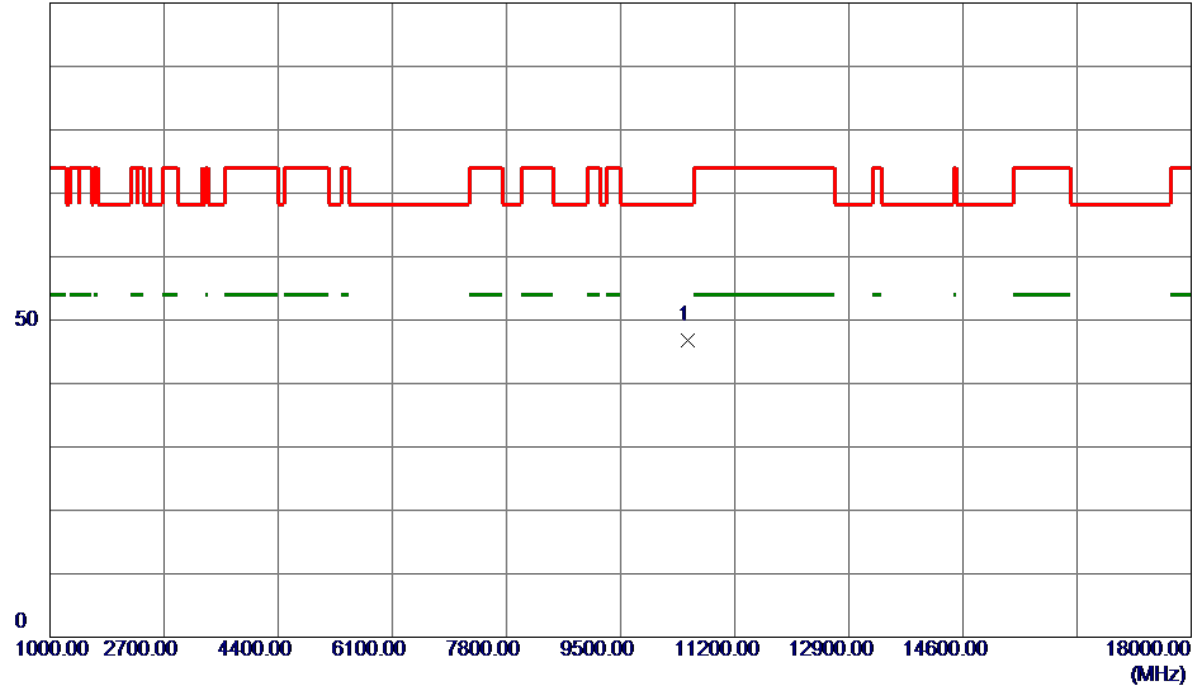


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10494.9100	37.60	9.11	46.71	68.20	-21.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

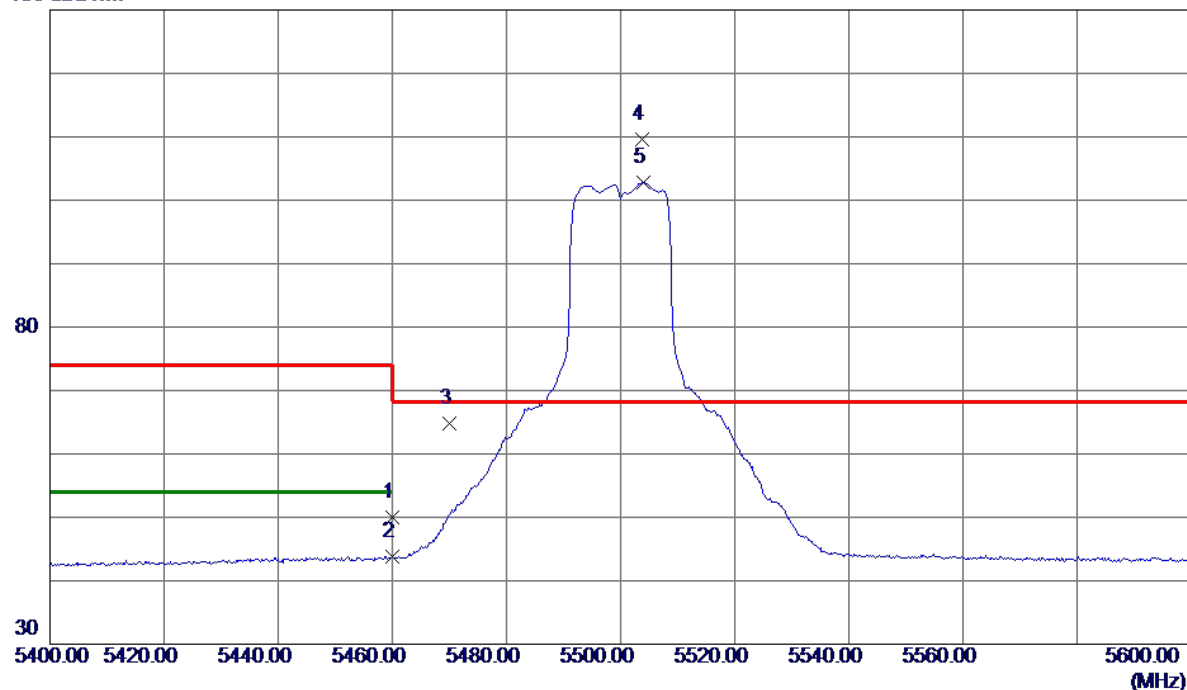


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	35.96	14.12	50.08	74.00	-23.92	Peak	
2	5460.0000	29.68	14.12	43.80	54.00	-10.20	AVG	
3	5470.0000	50.74	14.15	64.89	68.20	-3.31	Peak	
4 *	5503.8000	95.27	14.26	109.53	68.20	41.33	Peak	No Limit
5	5504.0000	88.53	14.26	102.79	999.00	-896.21	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

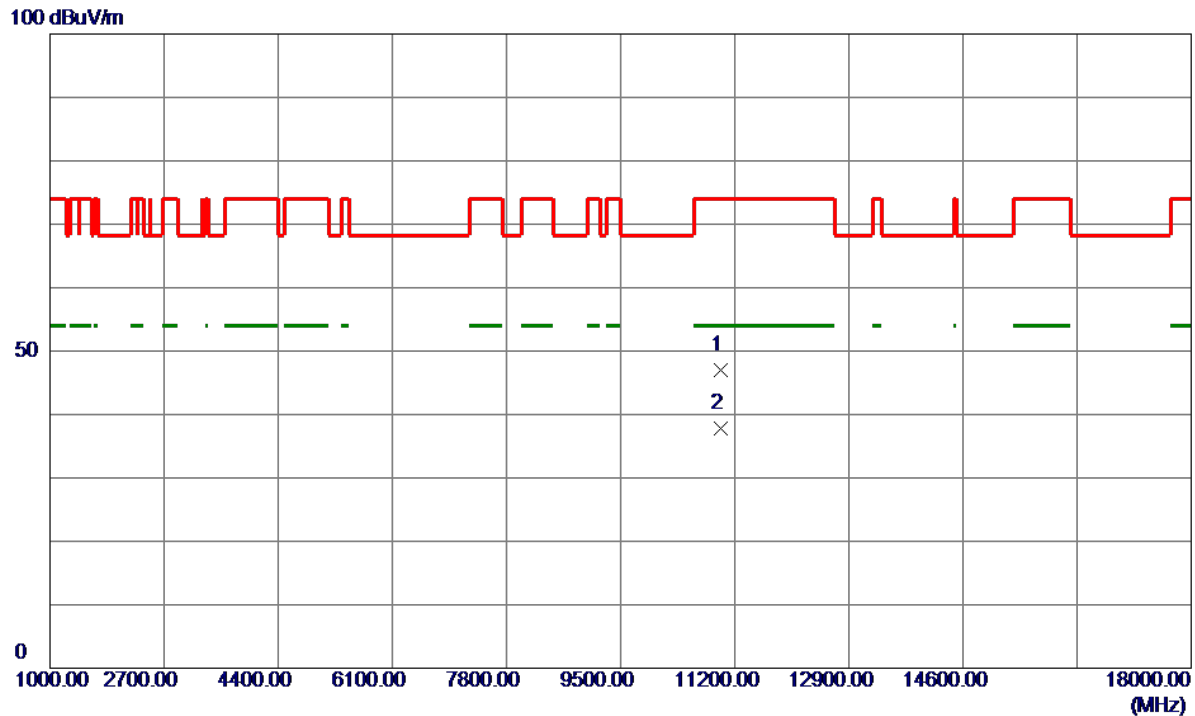


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10991.9250	37.53	9.45	46.98	74.00	-27.02	Peak	
2 *	10999.9000	28.31	9.46	37.77	54.00	-16.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

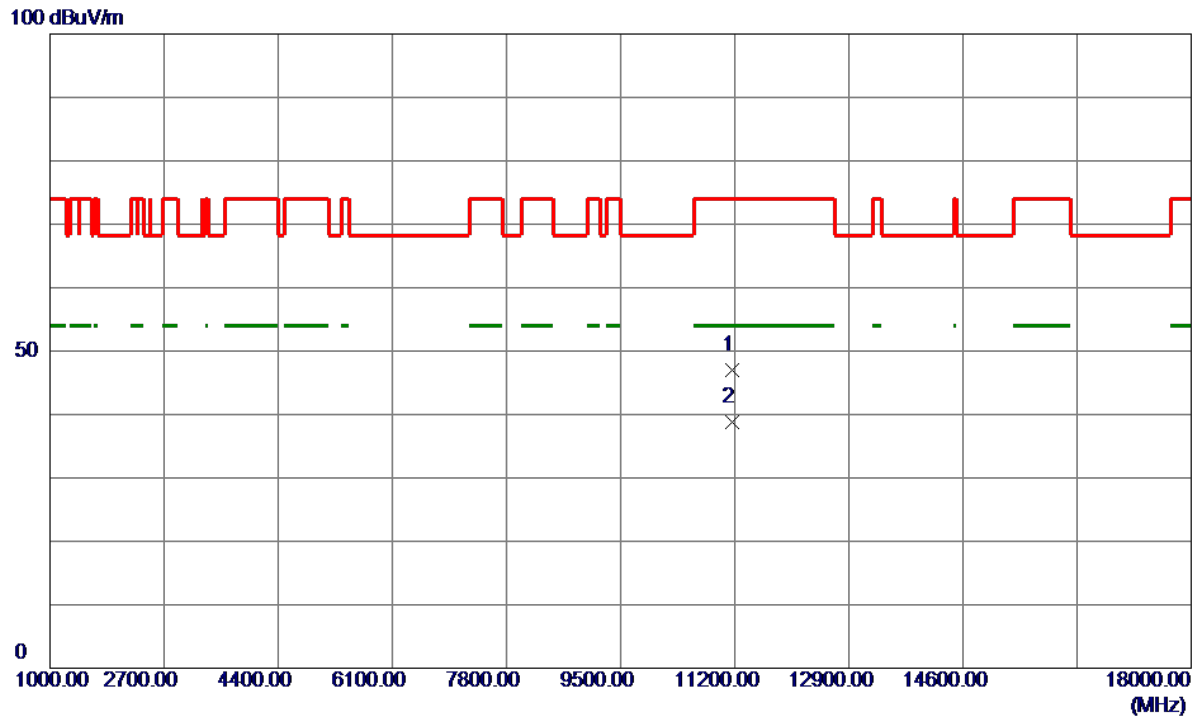

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11156.7250	37.61	9.31	46.92	74.00	-27.08	Peak	
2 *	11159.9000	29.43	9.30	38.73	54.00	-15.27	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

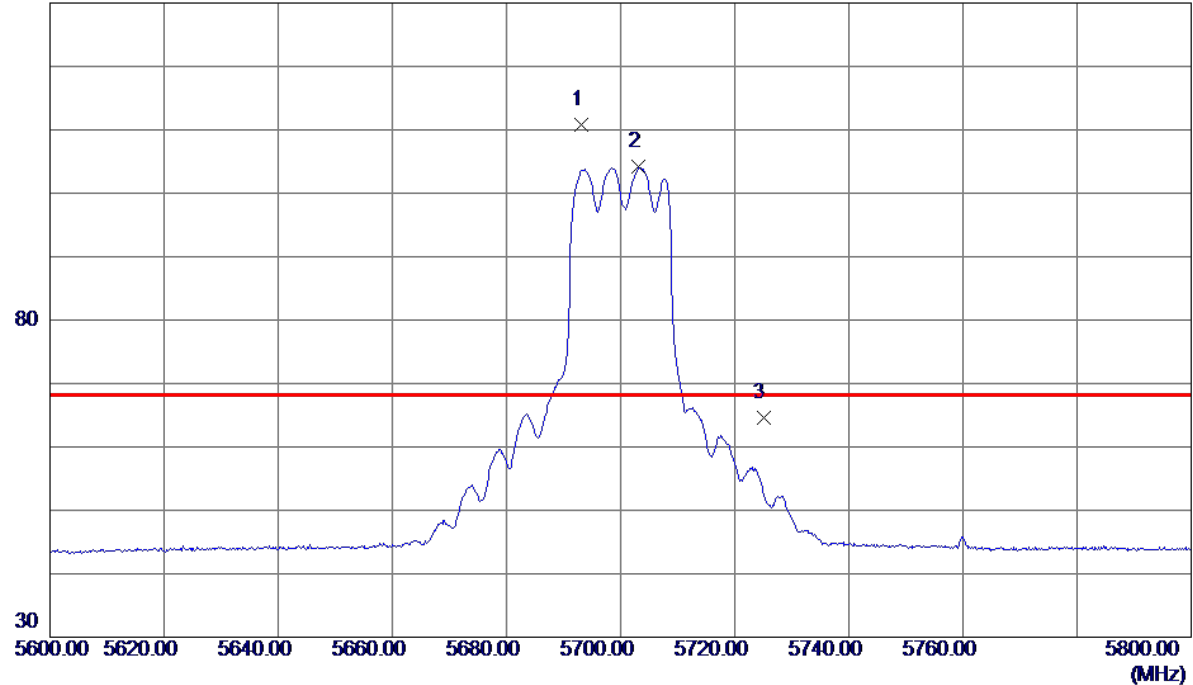

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.2000	95.85	15.02	110.87	68.20	42.67	Peak	No Limit
2	5703.2000	89.05	15.06	104.11	999.00	-894.89	AVG	No Limit
3	5725.0000	49.48	15.15	64.63	68.20	-3.57	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

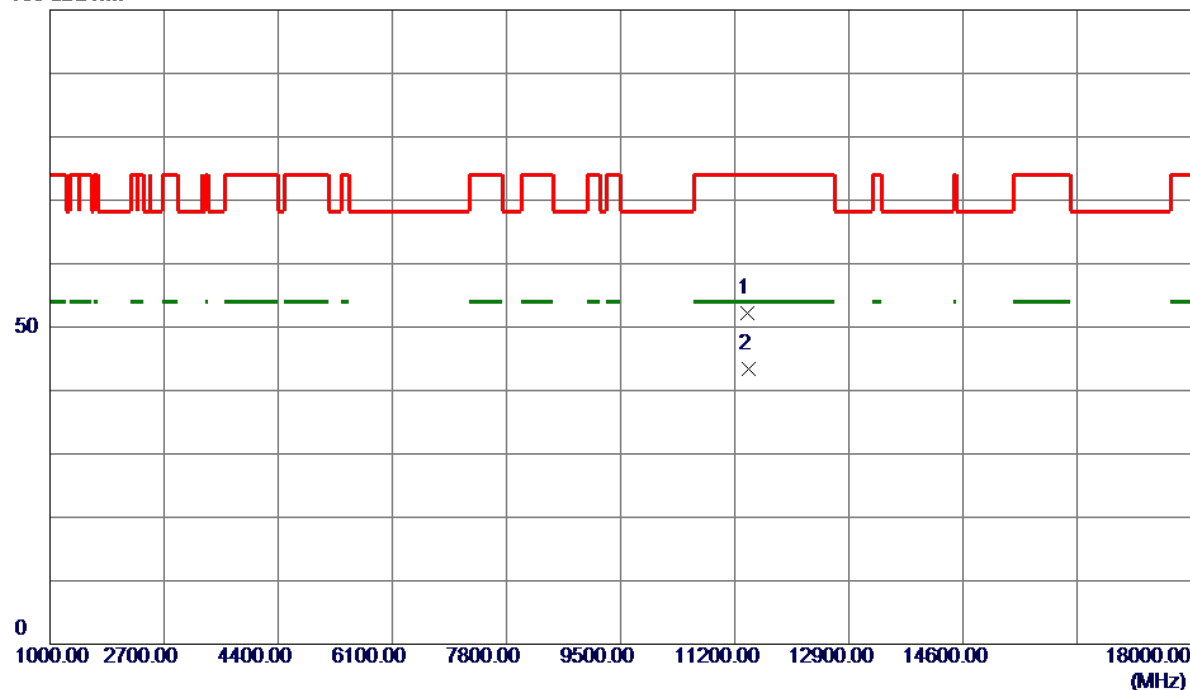

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11396.6750	43.13	9.07	52.20	74.00	-21.80	Peak	
2 *	11399.8750	34.29	9.07	43.36	54.00	-10.64	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

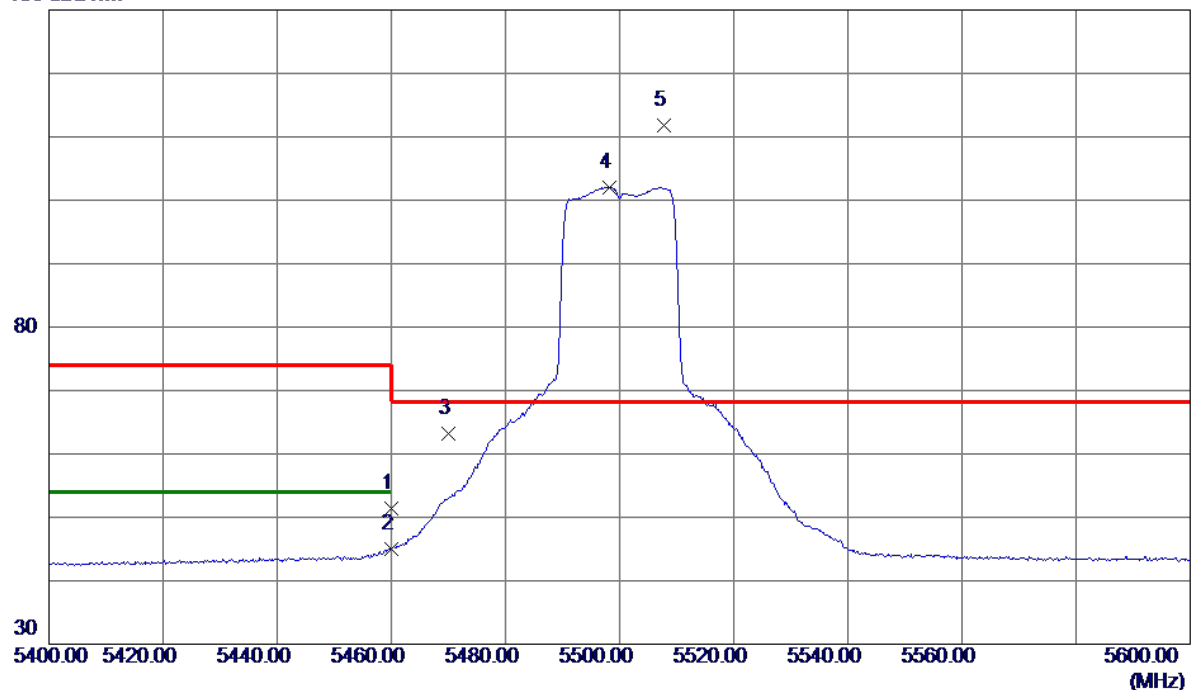


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.26	14.12	51.38	74.00	-22.62	Peak	
2	5460.0000	30.89	14.12	45.01	54.00	-8.99	AVG	
3	5470.0000	48.96	14.15	63.11	68.20	-5.09	Peak	
4	5498.2000	87.84	14.23	102.07	999.00	-896.93	AVG	No Limit
5 *	5507.8000	97.50	14.27	111.77	68.20	43.57	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

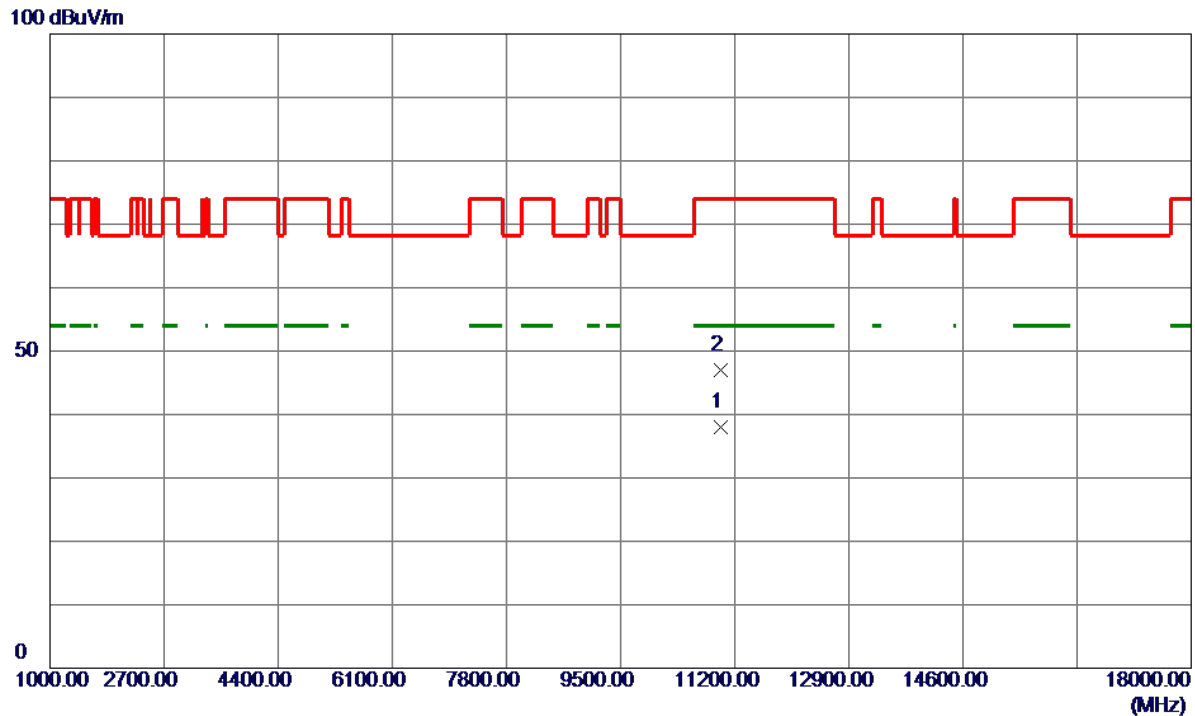


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10999.9250	28.56	9.46	38.02	54.00	-15.98	AVG	
2	11000.3500	37.49	9.46	46.95	74.00	-27.05	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

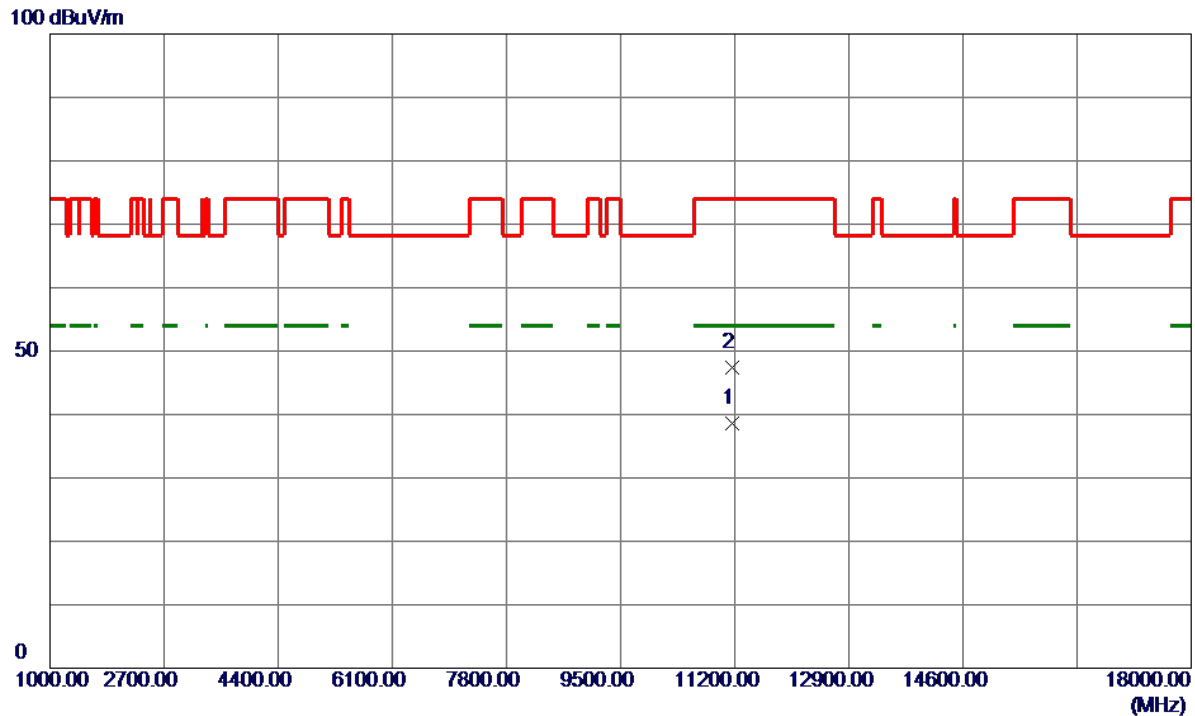

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11159.9250	29.22	9.30	38.52	54.00	-15.48	AVG	
2	11161.2000	38.06	9.30	47.36	74.00	-26.64	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

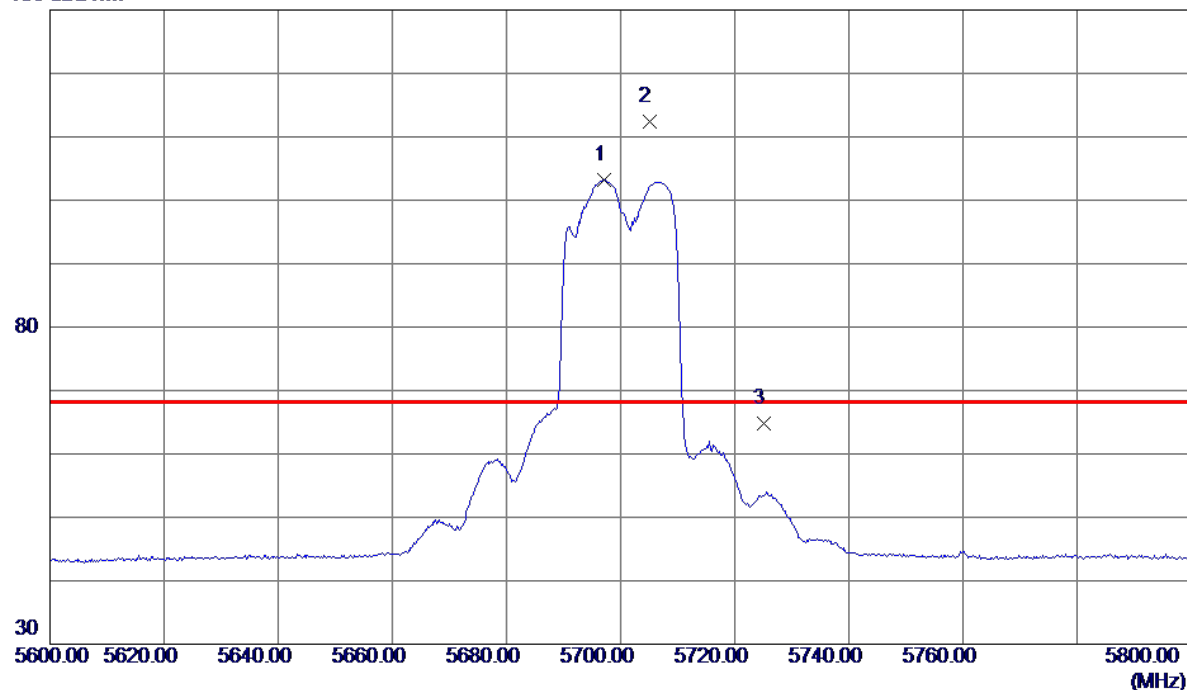


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5697.2000	88.12	15.04	103.16	999.00	-895.84	AVG	No Limit
2 *	5705.0000	97.32	15.07	112.39	68.20	44.19	Peak	No Limit
3	5725.0000	49.57	15.15	64.72	68.20	-3.48	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

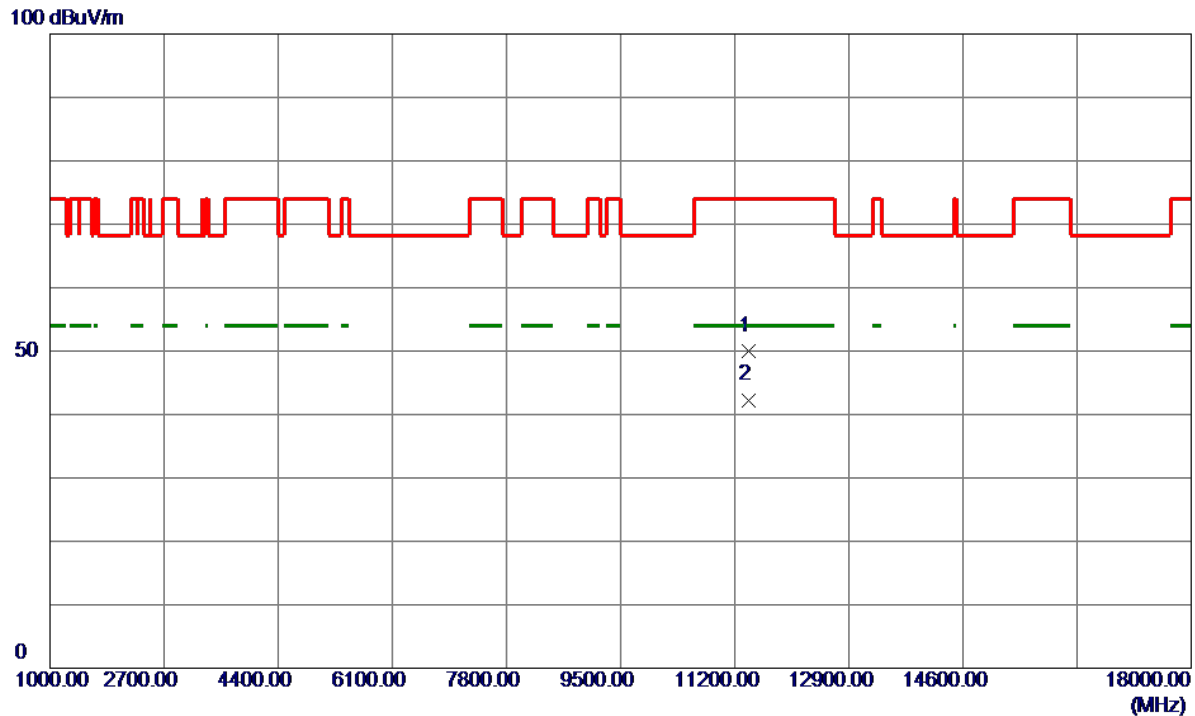

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11399.7750	41.00	9.07	50.07	74.00	-23.93	Peak	
2 *	11399.9000	33.23	9.07	42.30	54.00	-11.70	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

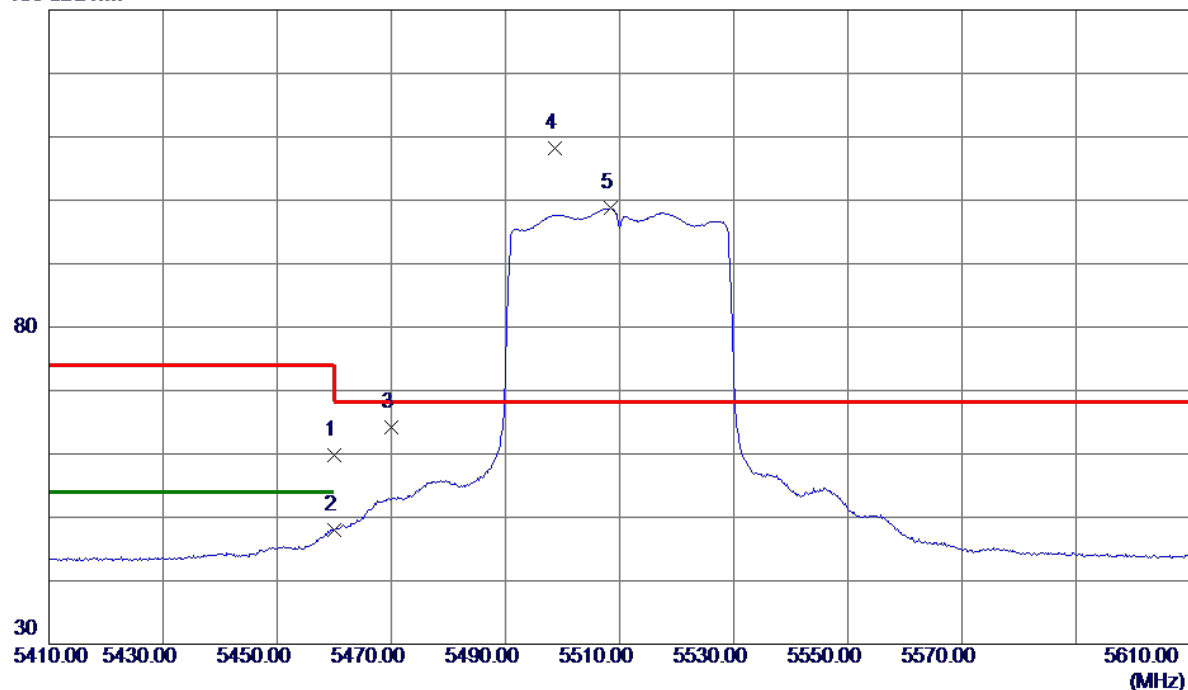


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.68	14.12	59.80	74.00	-14.20	Peak	
2	5460.0000	33.91	14.12	48.03	54.00	-5.97	AVG	
3	5470.0000	50.06	14.15	64.21	68.20	-3.99	Peak	
4 *	5498.6000	94.04	14.24	108.28	68.20	40.08	Peak	No Limit
5	5508.4000	84.45	14.27	98.72	999.00	-900.28	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

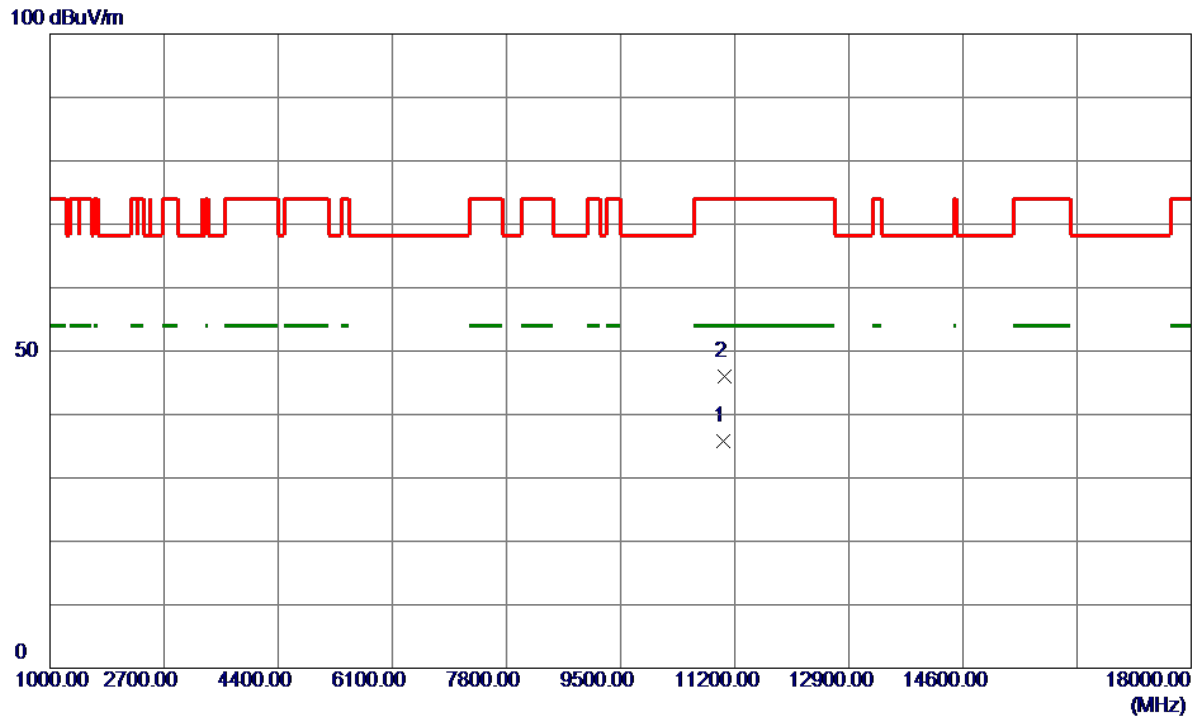


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11032.1250	26.41	9.43	35.84	54.00	-18.16	AVG	
2	11041.5000	36.50	9.42	45.92	74.00	-28.08	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

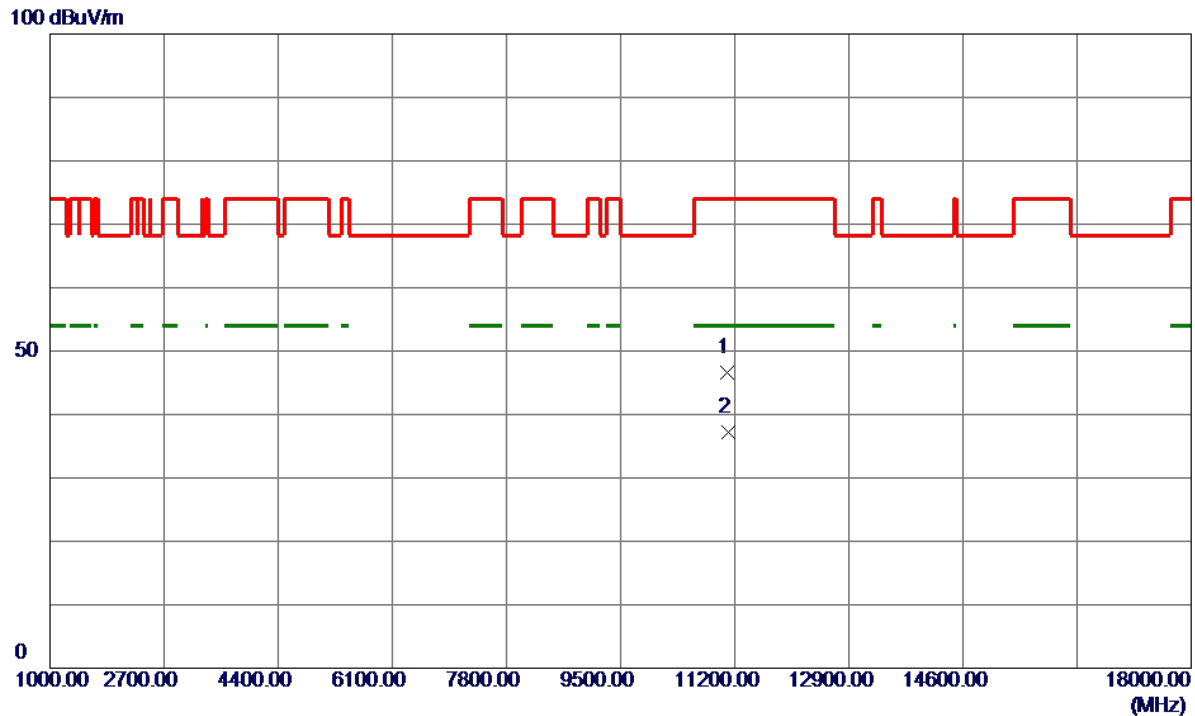

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11078.0250	37.20	9.38	46.58	74.00	-27.42	Peak	
2 *	11099.9250	27.87	9.36	37.23	54.00	-16.77	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

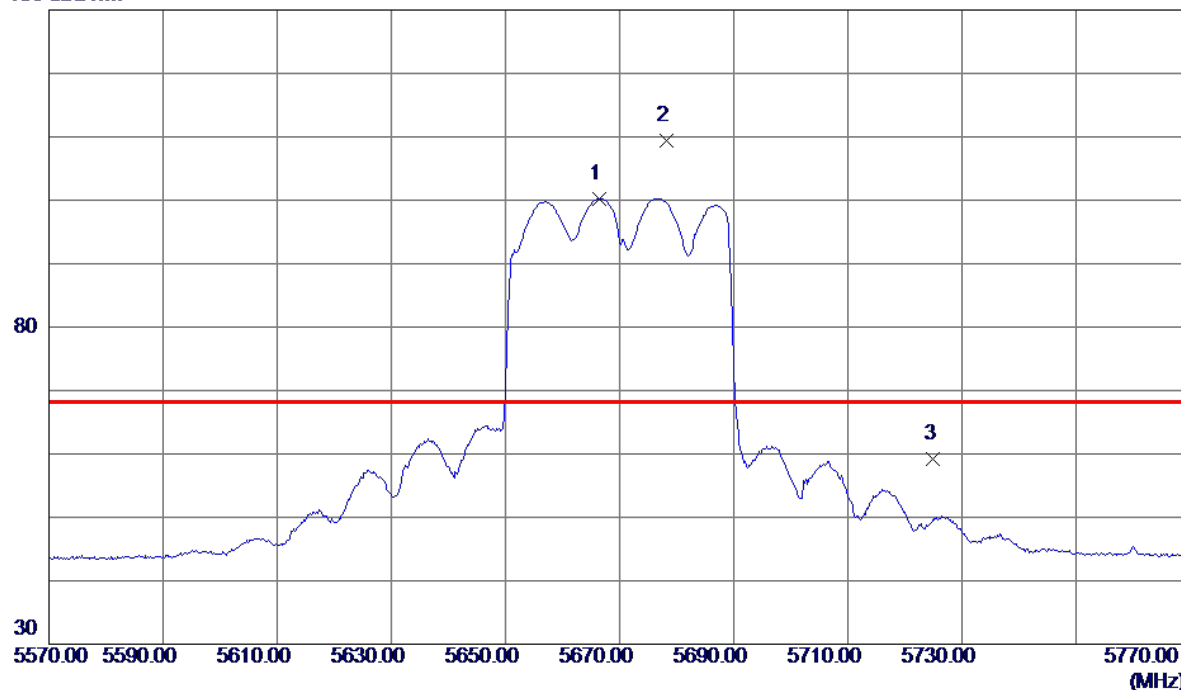


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5666.4000	85.37	14.91	100.28	999.00	-898.72	AVG	No Limit
2 *	5678.2000	94.49	14.96	109.45	68.20	41.25	Peak	No Limit
3	5725.0000	44.05	15.15	59.20	68.20	-9.00	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

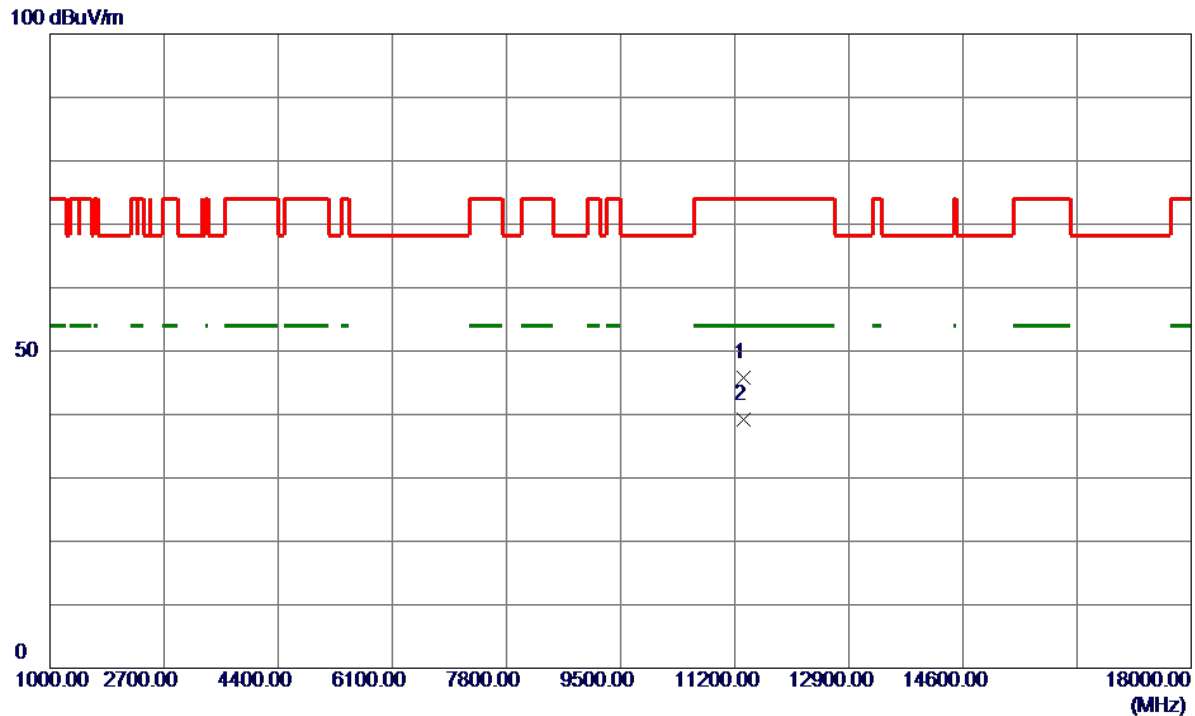

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11337.6800	36.70	9.13	45.83	74.00	-28.17	Peak	
2 *	11339.9400	29.99	9.13	39.12	54.00	-14.88	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

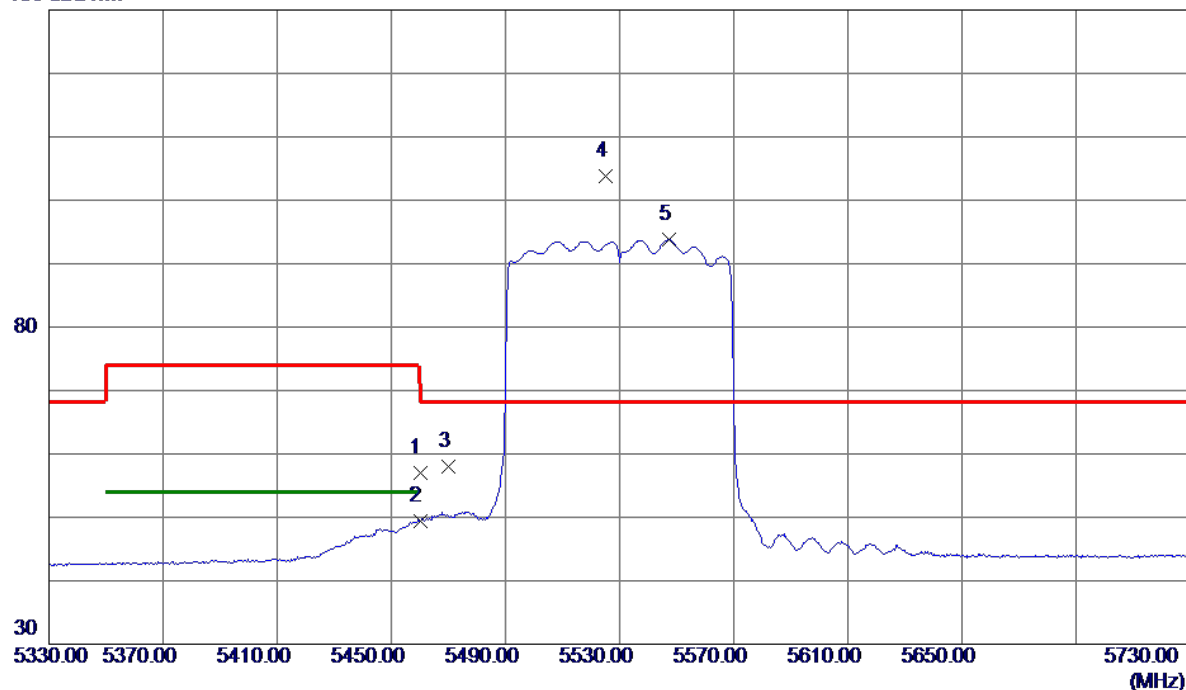

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	42.97	14.12	57.09	74.00	-16.91	Peak	
2	5460.0000	35.30	14.12	49.42	54.00	-4.58	AVG	
3	5470.0000	43.82	14.15	57.97	68.20	-10.23	Peak	
4 *	5525.2000	89.45	14.34	103.79	68.20	35.59	Peak	No Limit
5	5547.2000	79.41	14.43	93.84	999.00	-905.16	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

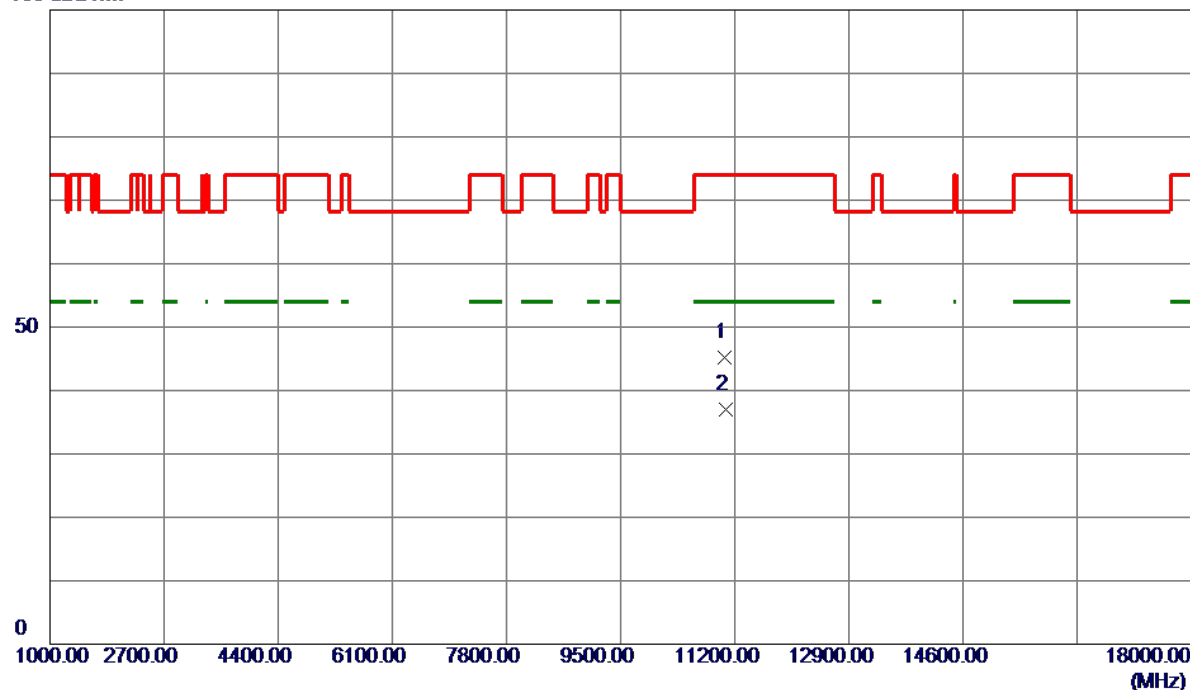

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11057.7200	35.83	9.40	45.23	74.00	-28.77	Peak	
2 *	11059.9000	27.60	9.40	37.00	54.00	-17.00	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

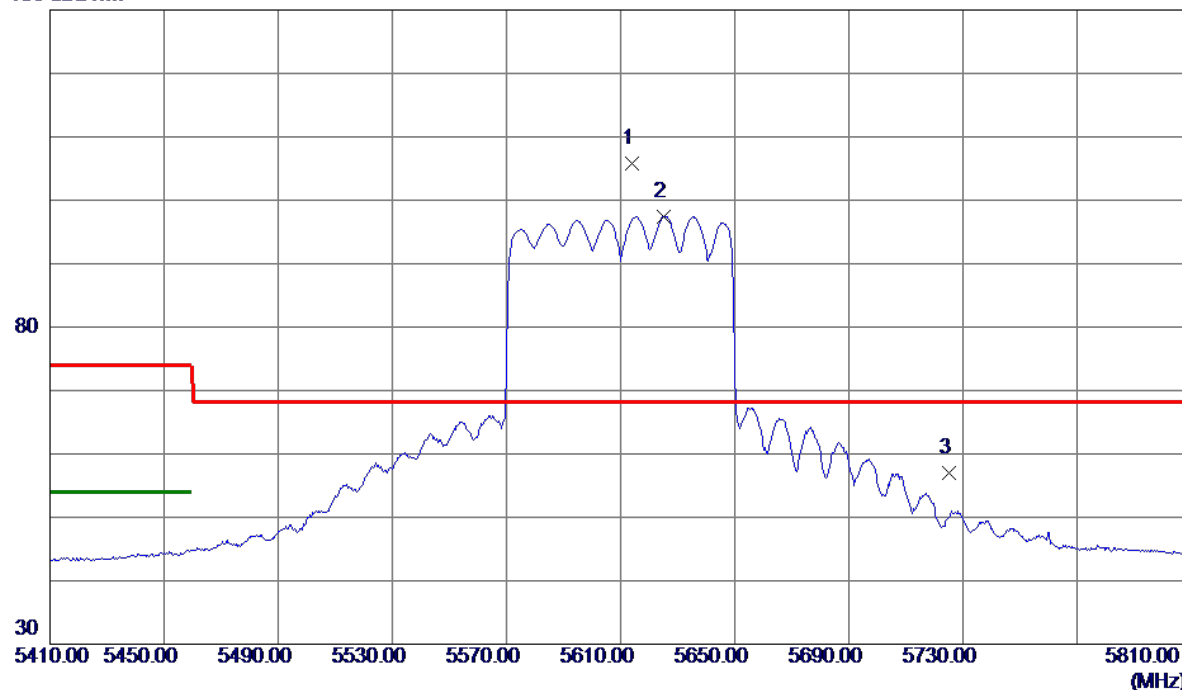

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5614.0000	91.09	14.70	105.79	68.20	37.59	Peak	No Limit
2	5625.2000	82.74	14.75	97.49	999.00	-901.51	AVG	No Limit
3	5725.0000	41.91	15.15	57.06	68.20	-11.14	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

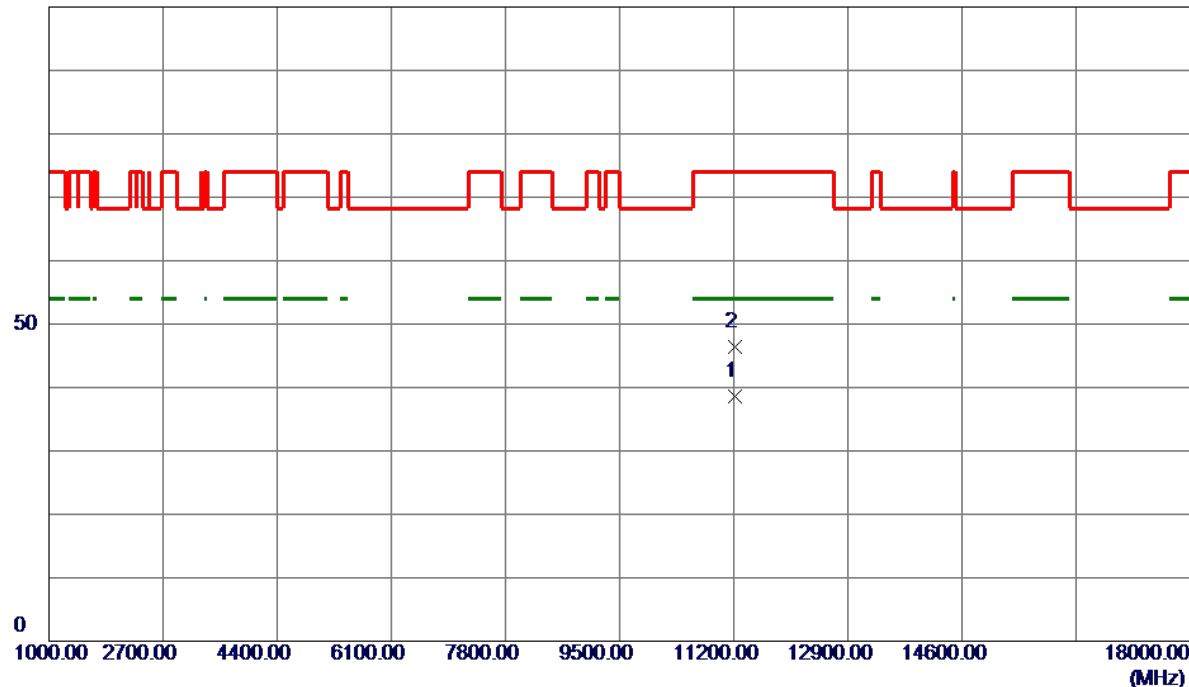

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11219.9000	29.44	9.24	38.68	54.00	-15.32	AVG	
2	11226.4000	37.23	9.24	46.47	74.00	-27.53	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

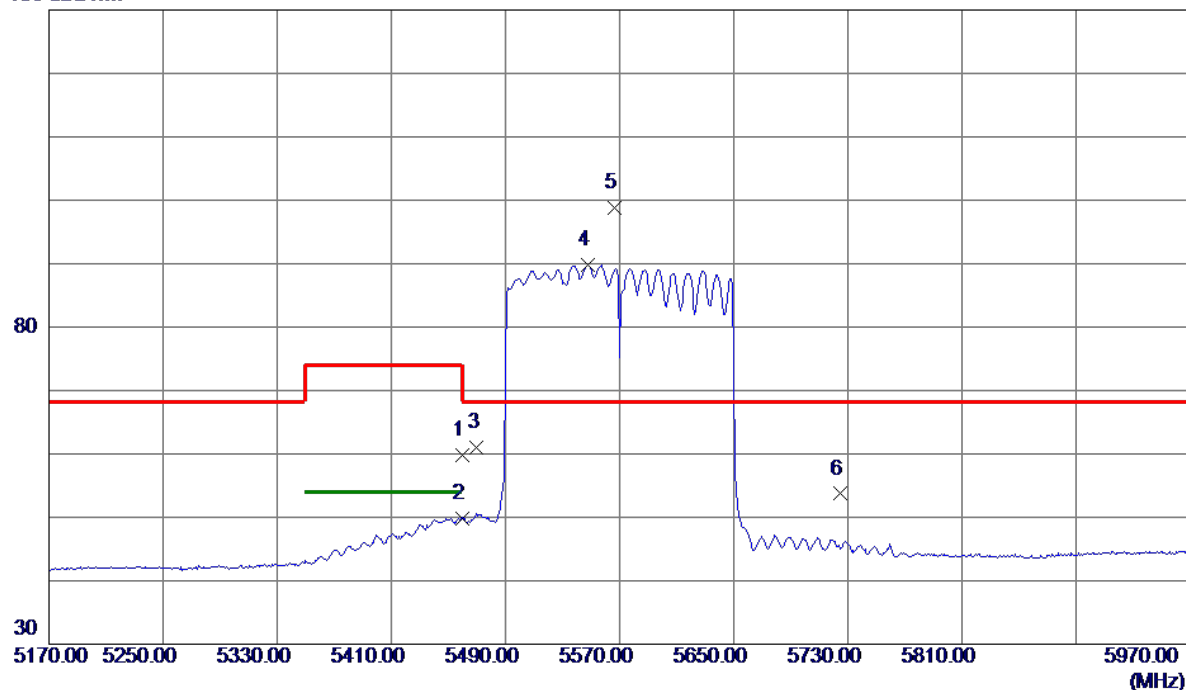


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.72	14.12	59.84	74.00	-14.16	Peak	
2	5460.0000	35.60	14.12	49.72	54.00	-4.28	AVG	
3	5470.0000	46.84	14.15	60.99	68.20	-7.21	Peak	
4	5547.6000	75.36	14.43	89.79	999.00	-909.21	AVG	No Limit
5 *	5566.8000	84.27	14.51	98.78	68.20	30.58	Peak	No Limit
6	5725.0000	38.55	15.15	53.70	68.20	-14.50	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

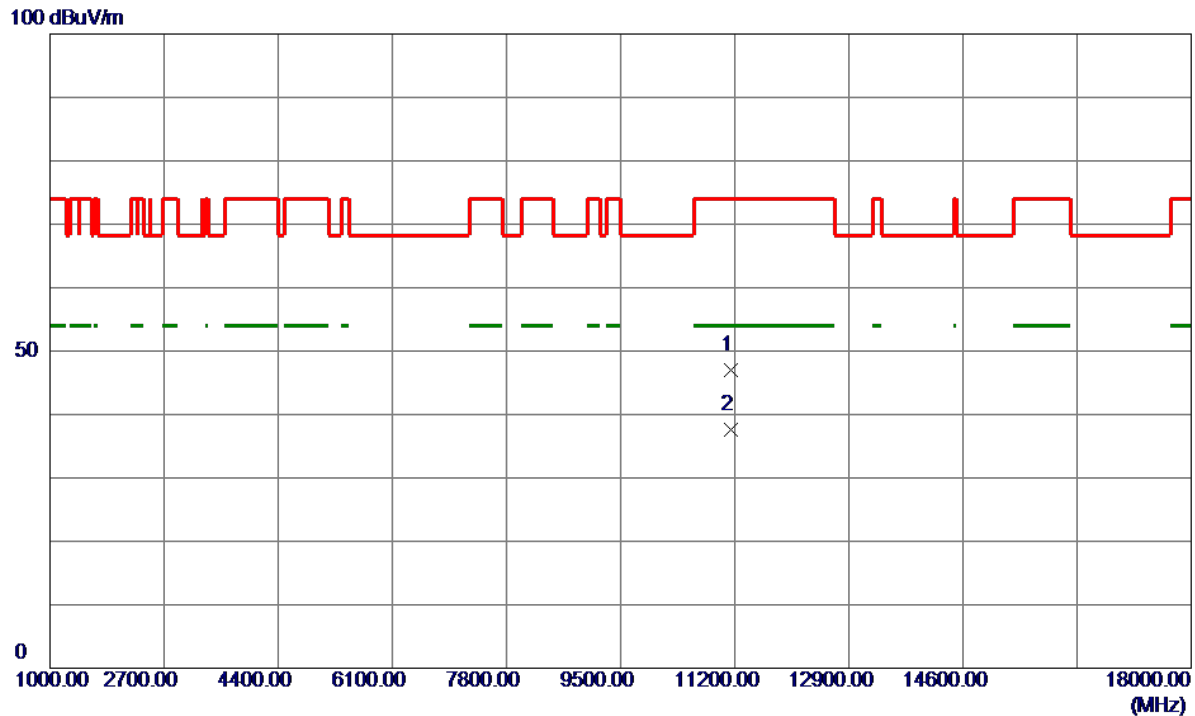


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11139.7600	37.74	9.32	47.06	74.00	-26.94	Peak	
2 *	11139.8300	28.30	9.32	37.62	54.00	-16.38	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

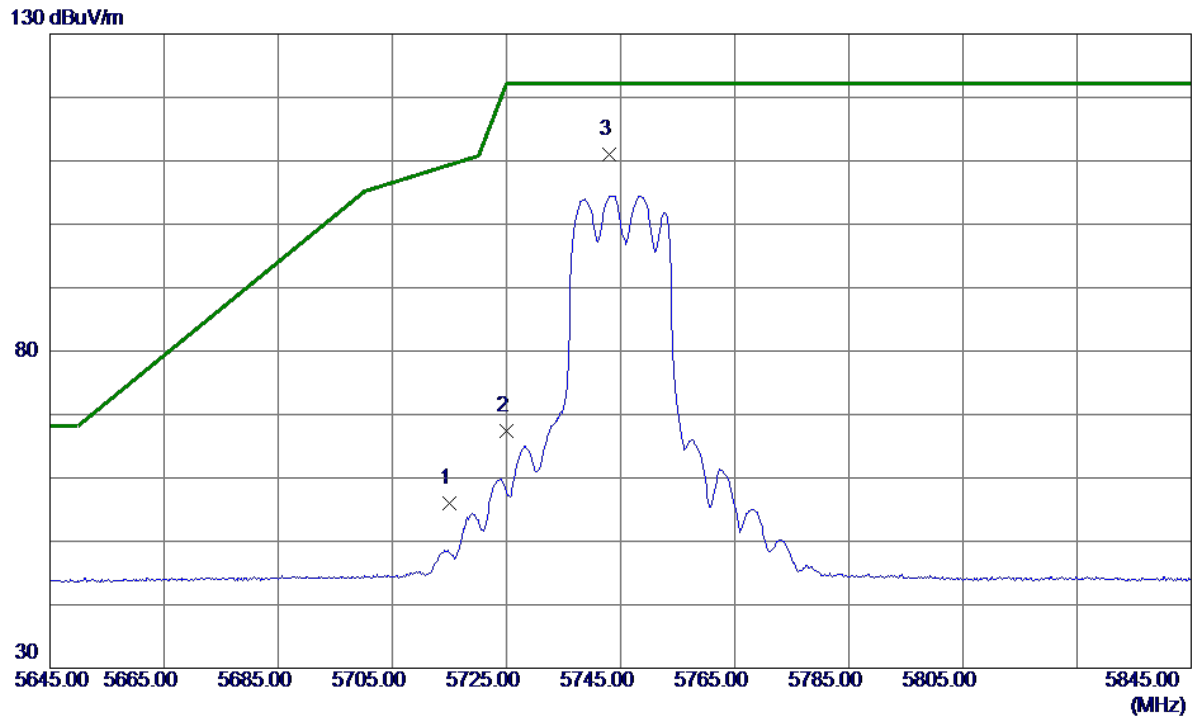

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	40.94	15.11	56.05	109.40	-53.35	Peak	
2	5725.0000	52.20	15.15	67.35	122.20	-54.85	Peak	
3 *	5743.0000	95.70	15.22	110.92	122.20	-11.28	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

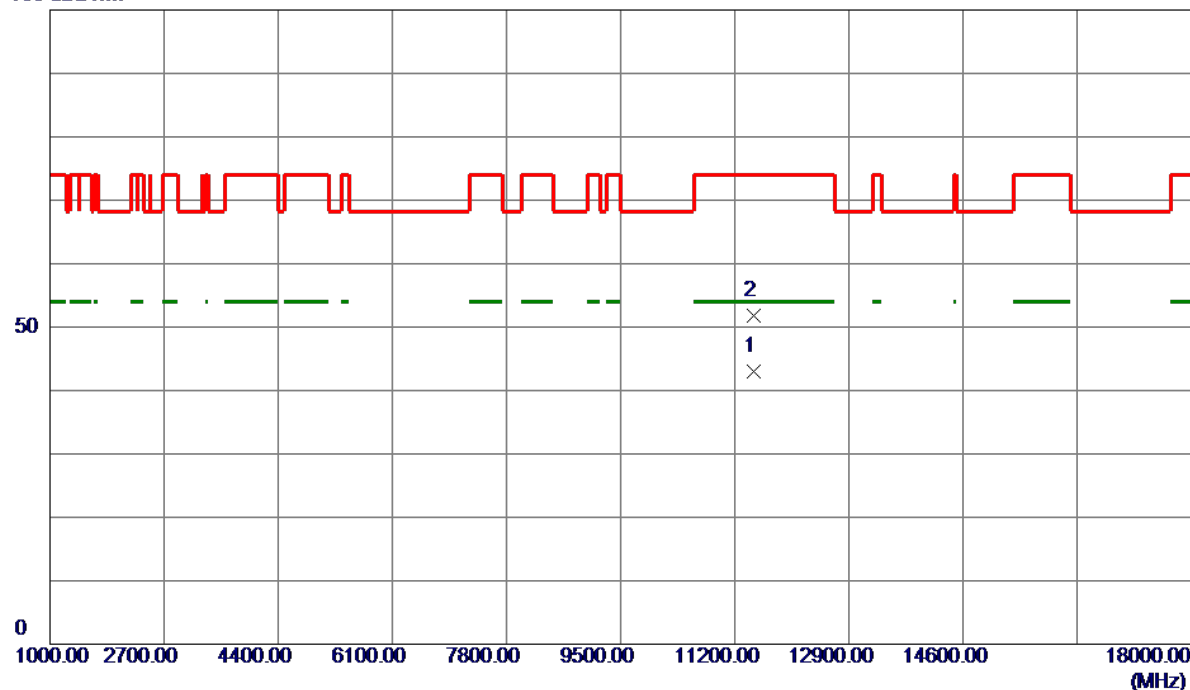

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.9750	34.00	8.98	42.98	54.00	-11.02	AVG	
2	11492.3250	42.79	8.98	51.77	74.00	-22.23	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

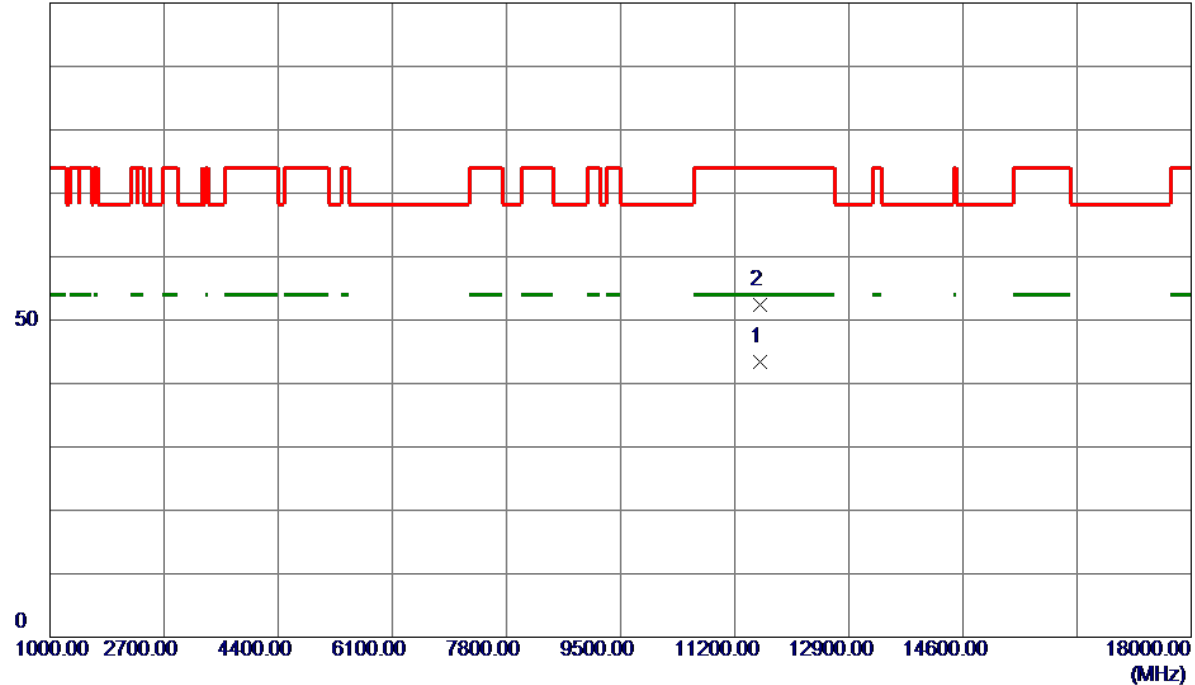


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.9500	34.23	9.12	43.35	54.00	-10.65	AVG	
2	11570.5000	43.23	9.12	52.35	74.00	-21.65	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

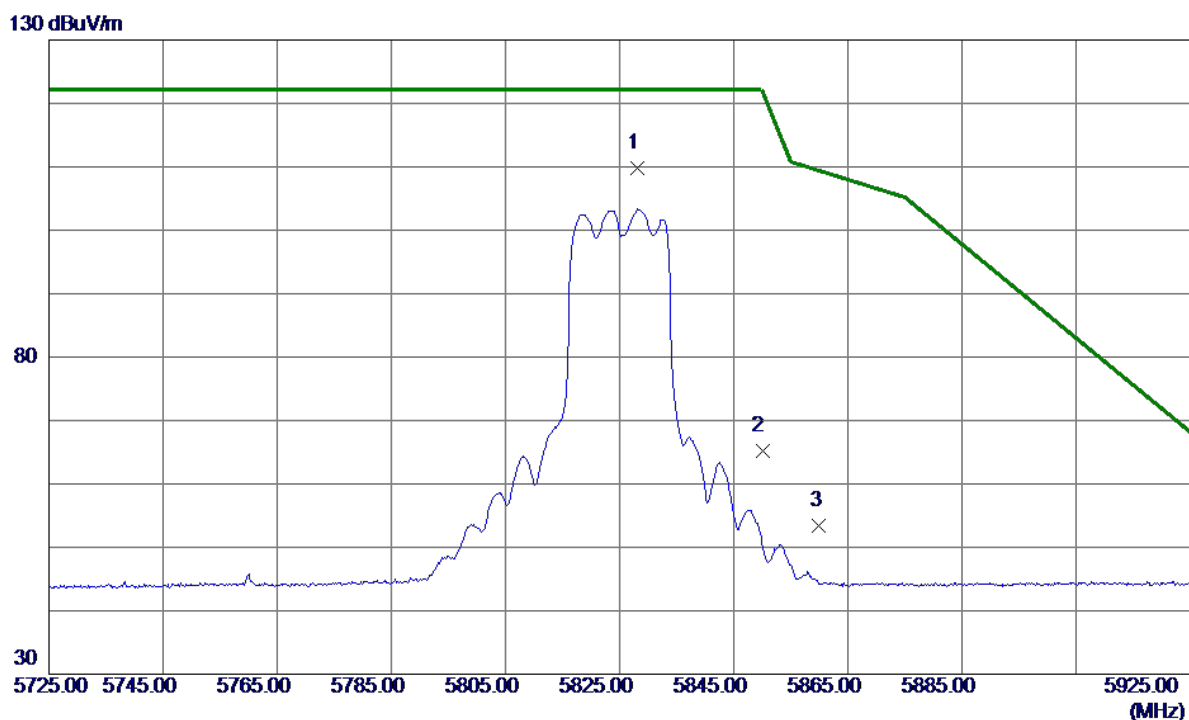

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5828.2000	94.25	15.57	109.82	122.20	-12.38	Peak	No Limit
2	5850.0000	49.58	15.65	65.23	122.20	-56.97	Peak	
3	5860.0000	37.64	15.69	53.33	109.40	-56.07	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

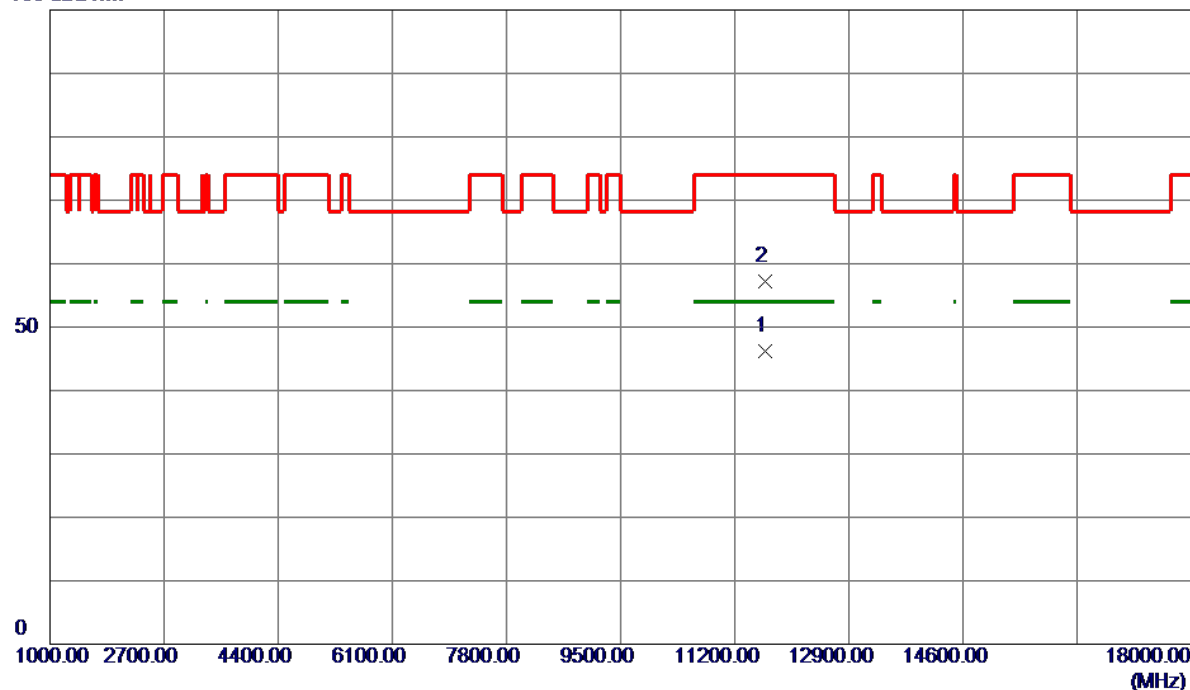


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.9500	37.00	9.28	46.28	54.00	-7.72	AVG	
2	11650.5500	47.96	9.29	57.25	74.00	-16.75	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

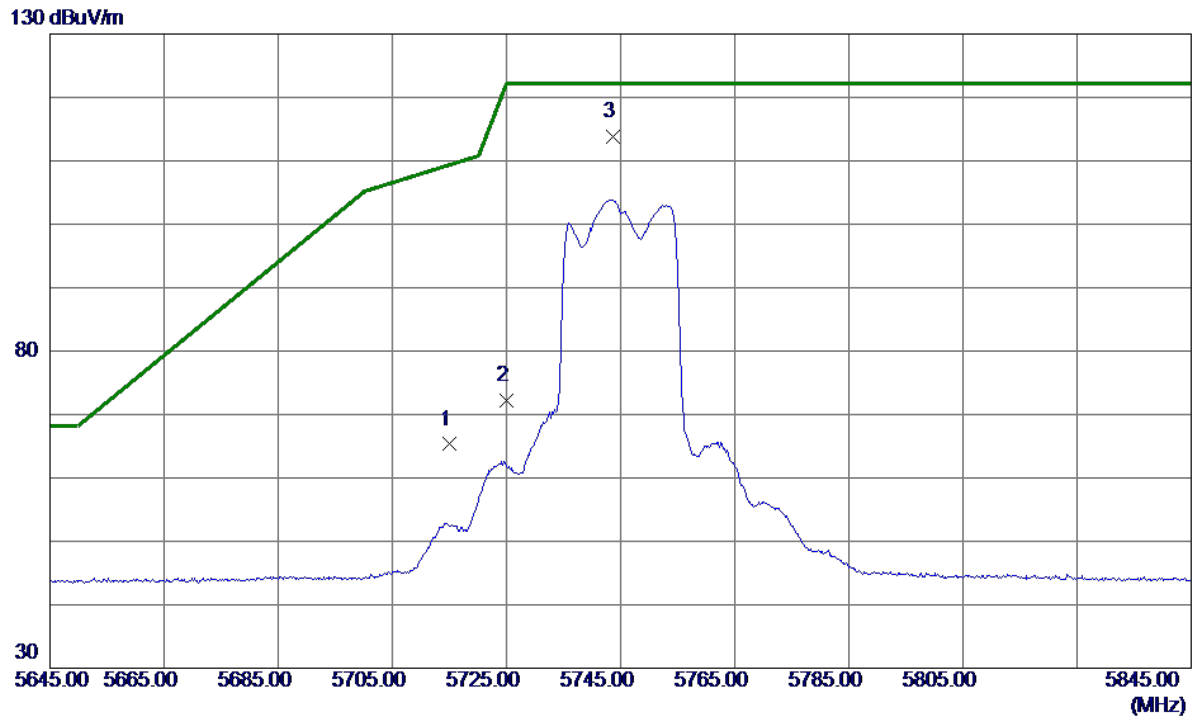

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	50.19	15.11	65.30	109.40	-44.10	Peak	
2	5725.0000	57.09	15.15	72.24	122.20	-49.96	Peak	
3 *	5743.6000	98.60	15.22	113.82	122.20	-8.38	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

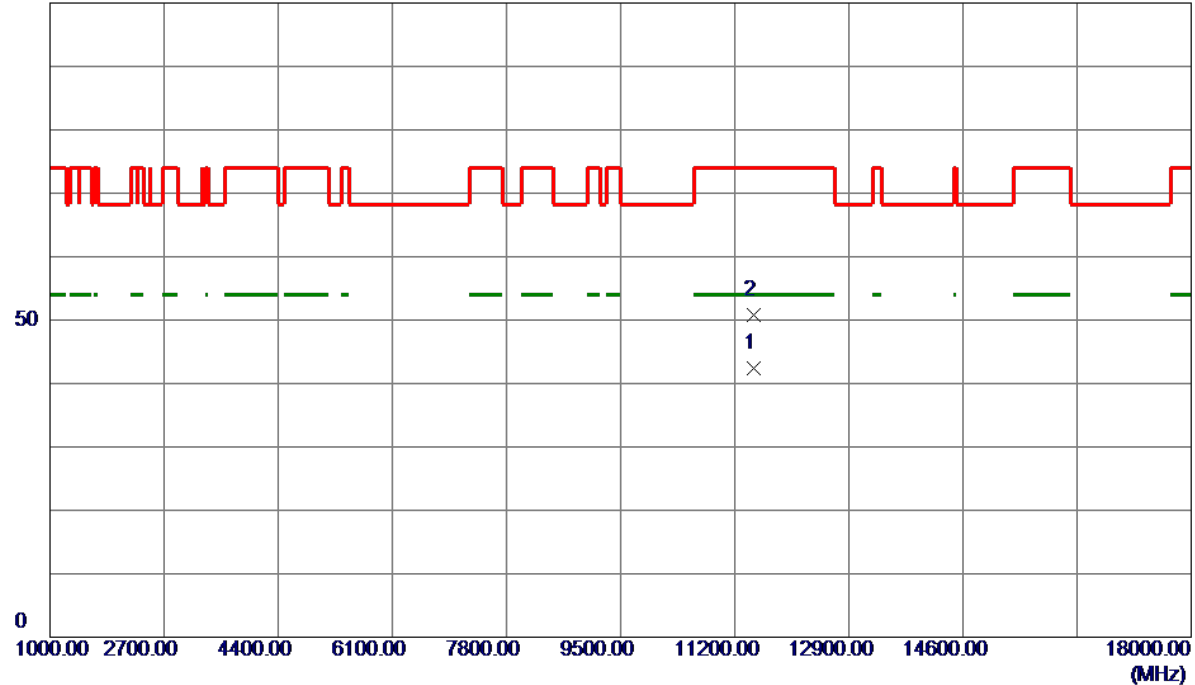

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.9250	33.43	8.98	42.41	54.00	-11.59	AVG	
2	11492.0250	41.83	8.98	50.81	74.00	-23.19	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

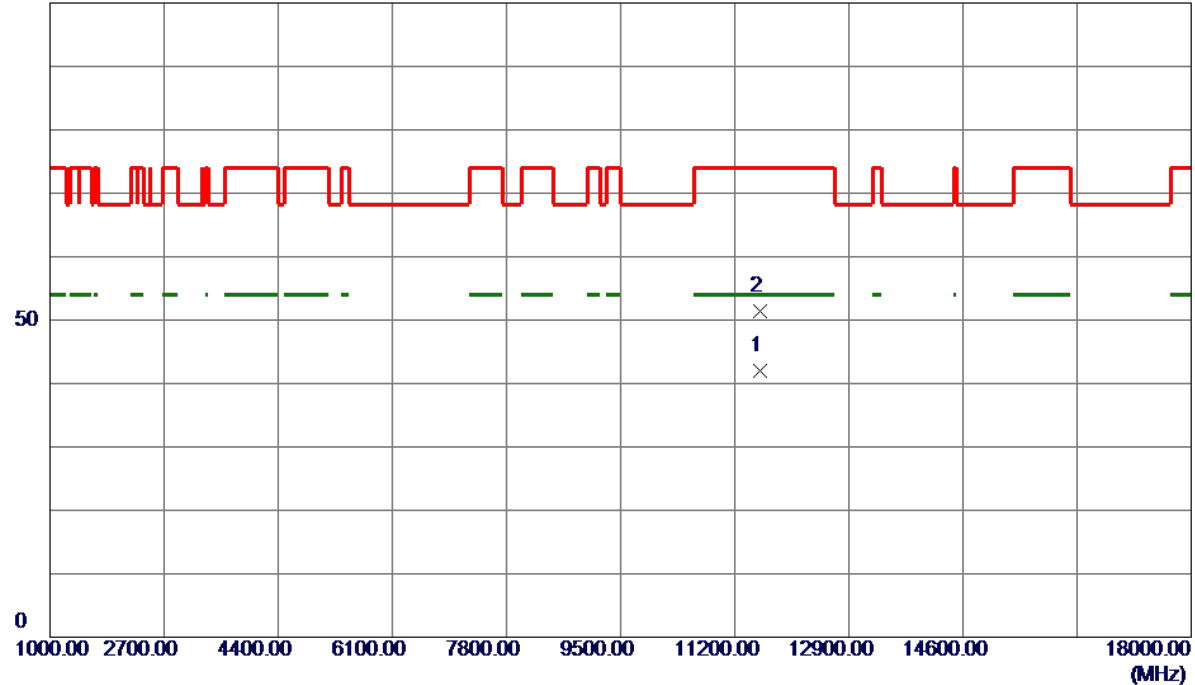


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.8000	32.92	9.12	42.04	54.00	-11.96	AVG	
2	11571.9000	42.19	9.12	51.31	74.00	-22.69	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

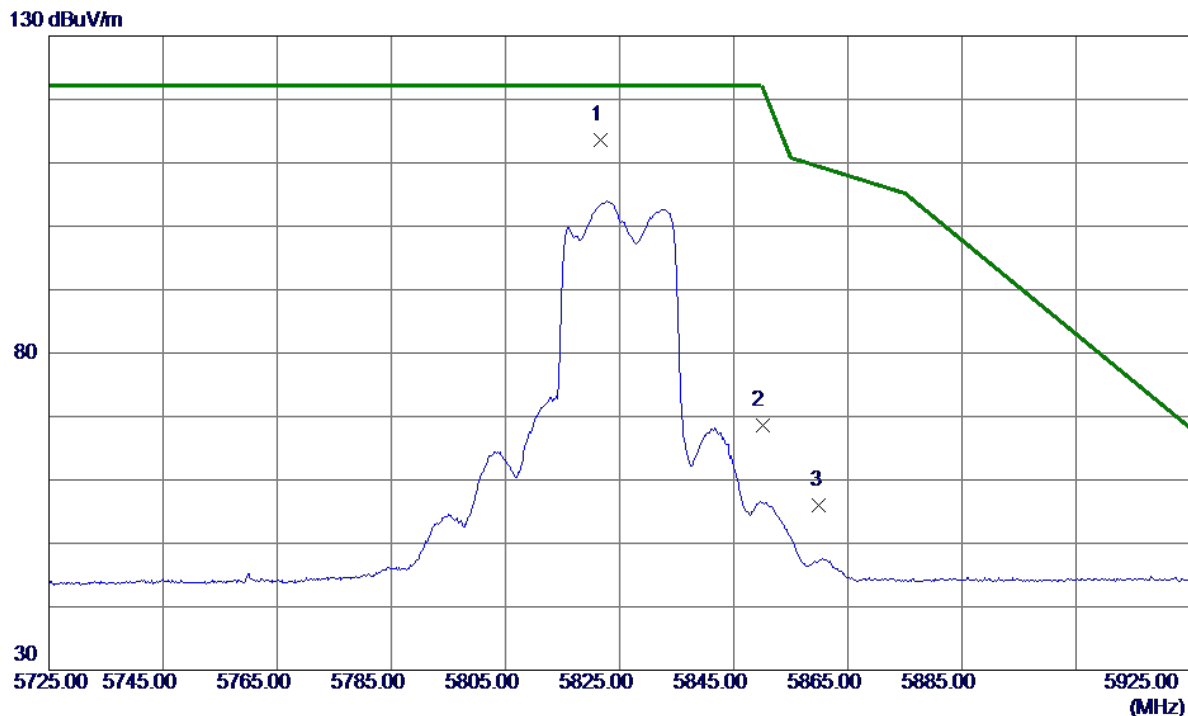

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.6000	98.03	15.54	113.57	122.20	-8.63	Peak	No Limit
2	5850.0000	53.00	15.65	68.65	122.20	-53.55	Peak	
3	5860.0000	40.38	15.69	56.07	109.40	-53.33	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

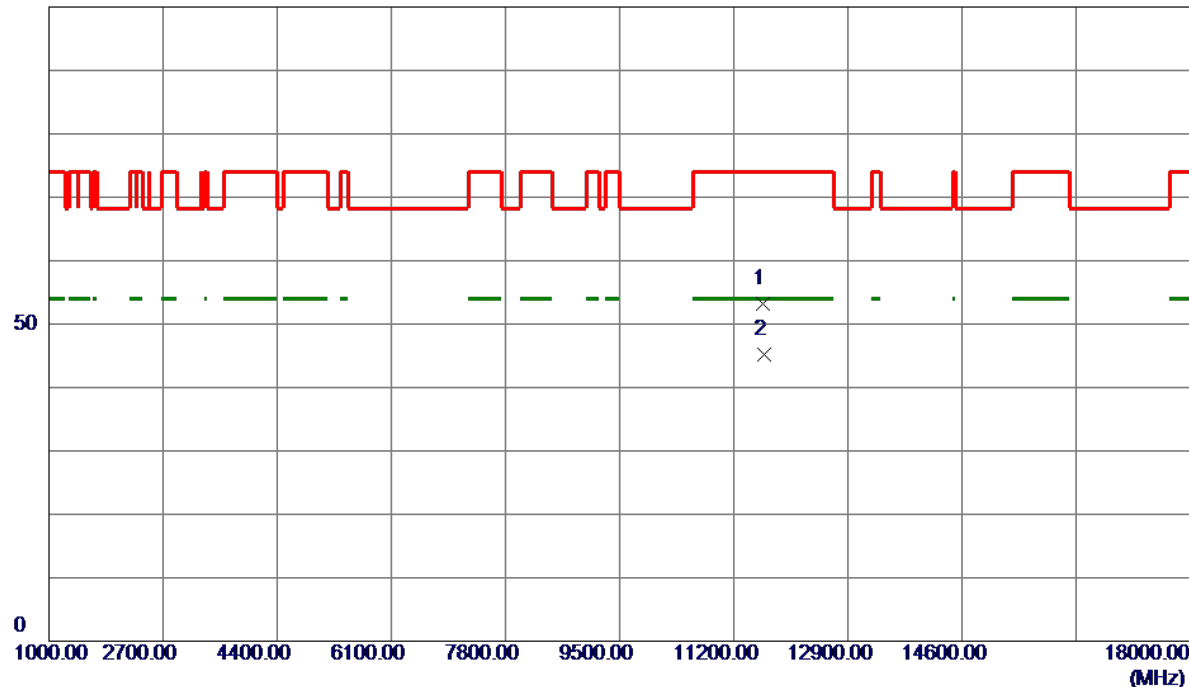


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11642.5000	43.86	9.27	53.13	74.00	-20.87	Peak	
2 *	11649.9500	35.88	9.28	45.16	54.00	-8.84	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

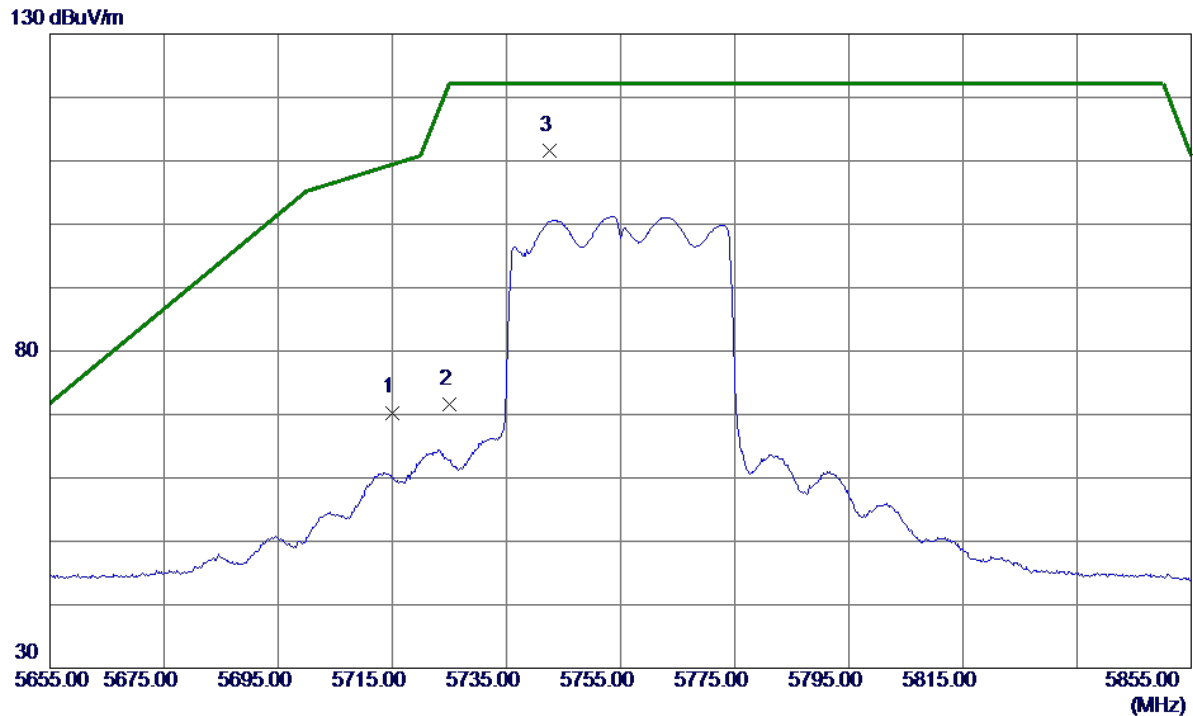

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	55.19	15.11	70.30	109.40	-39.10	Peak	
2	5725.0000	56.40	15.15	71.55	122.20	-50.65	Peak	
3 *	5742.6000	96.44	15.22	111.66	122.20	-10.54	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

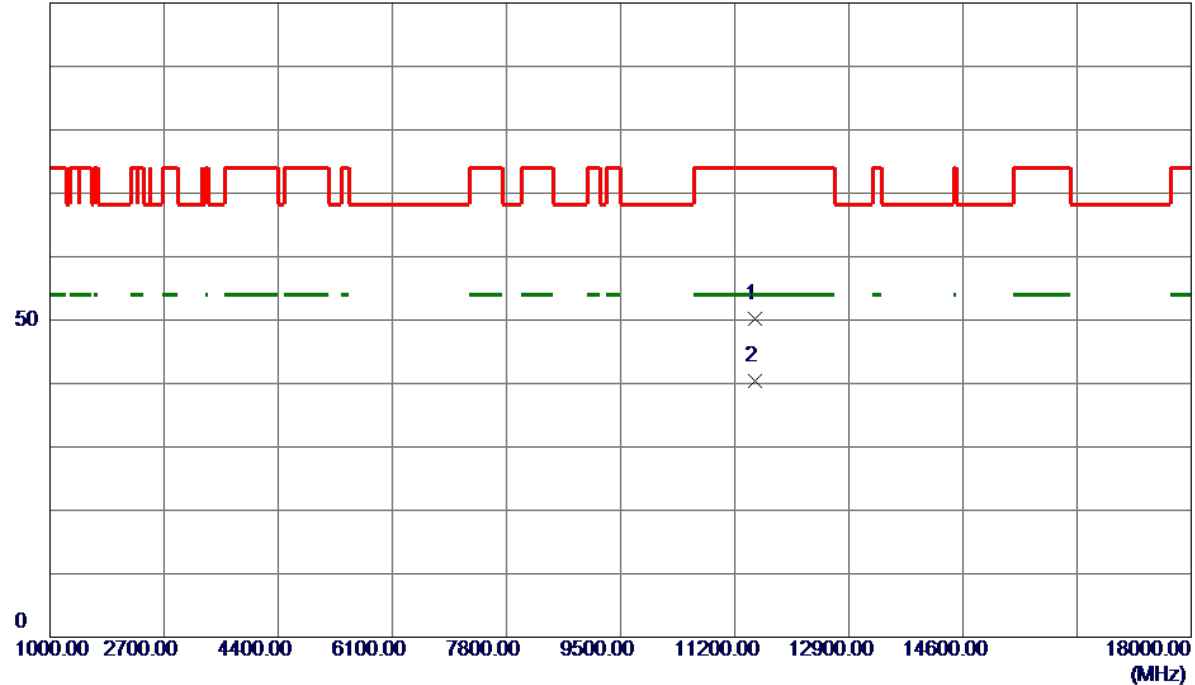


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11502.3400	41.22	8.97	50.19	74.00	-23.81	Peak	
2 *	11509.8800	31.35	8.99	40.34	54.00	-13.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

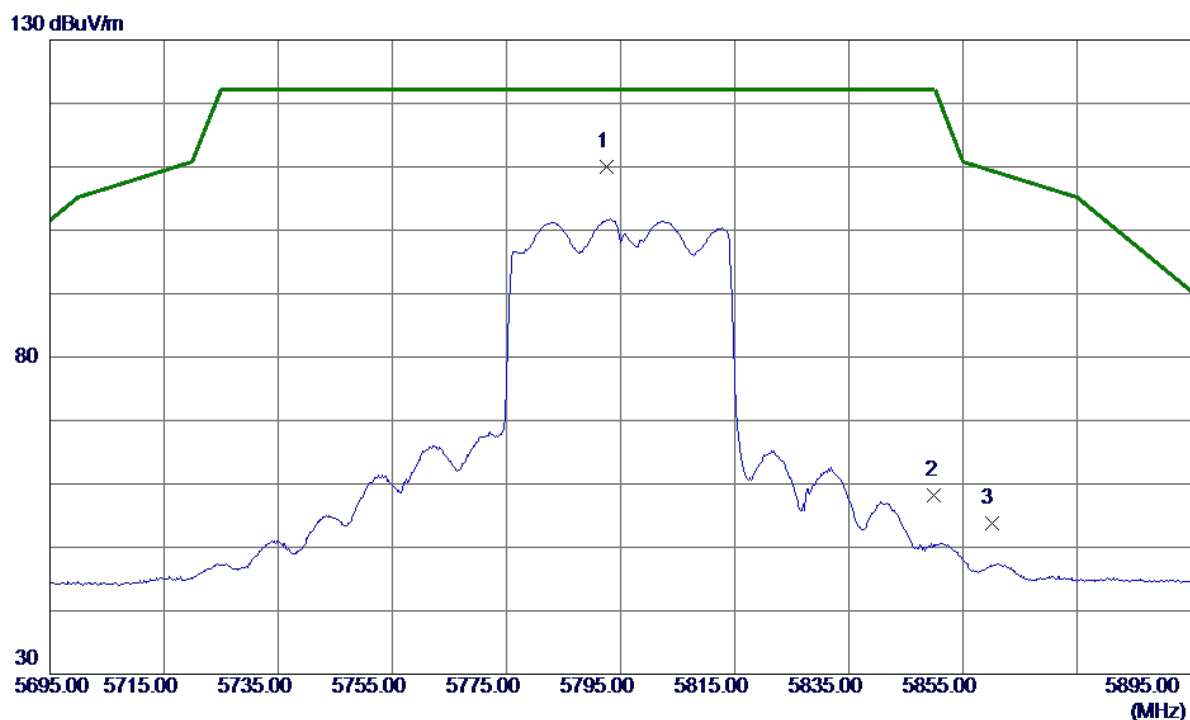

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.6000	94.63	15.42	110.05	122.20	-12.15	Peak	No Limit
2	5850.0000	42.58	15.65	58.23	122.20	-63.97	Peak	
3	5860.0000	38.10	15.69	53.79	109.40	-55.61	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

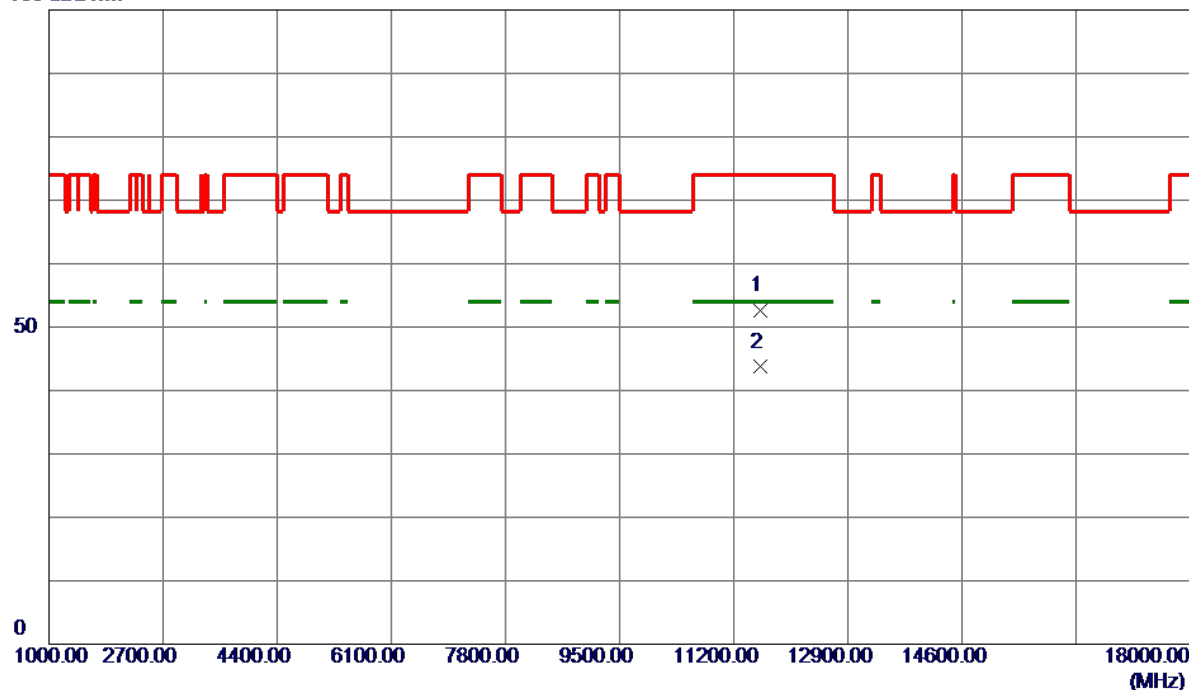

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11589.8300	43.49	9.16	52.65	74.00	-21.35	Peak	
2 *	11589.9800	34.54	9.16	43.70	54.00	-10.30	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

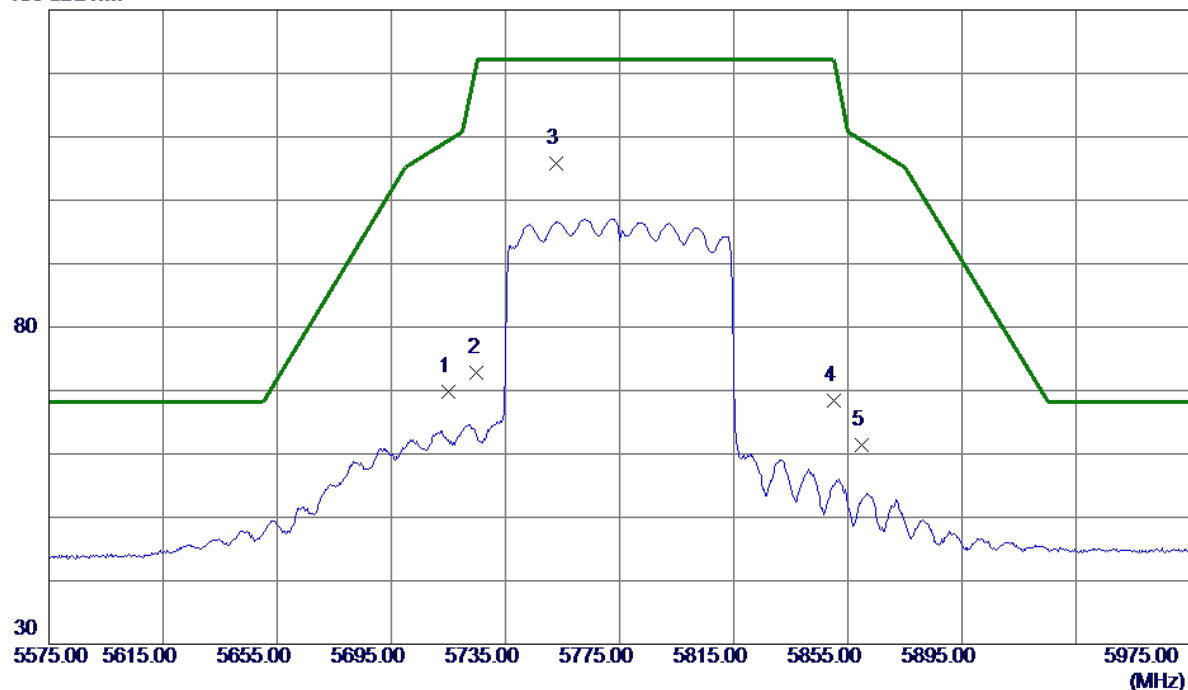

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	54.66	15.11	69.77	109.40	-39.63	Peak	
2	5725.0000	57.63	15.15	72.78	122.20	-49.42	Peak	
3 *	5752.6000	90.52	15.26	105.78	122.20	-16.42	Peak	No Limit
4	5850.0000	52.79	15.65	68.44	122.20	-53.76	Peak	
5	5860.0000	45.80	15.69	61.49	109.40	-47.91	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

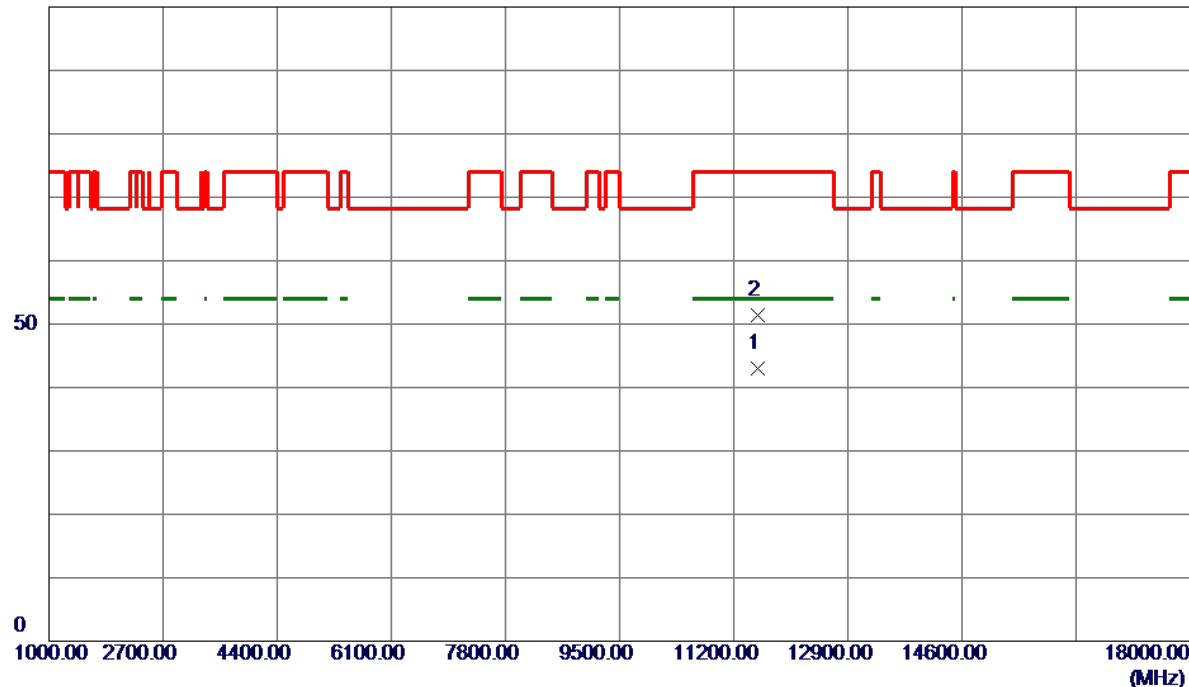

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11549.8900	33.98	9.07	43.05	54.00	-10.95	AVG	
2	11549.9000	42.24	9.07	51.31	74.00	-22.69	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

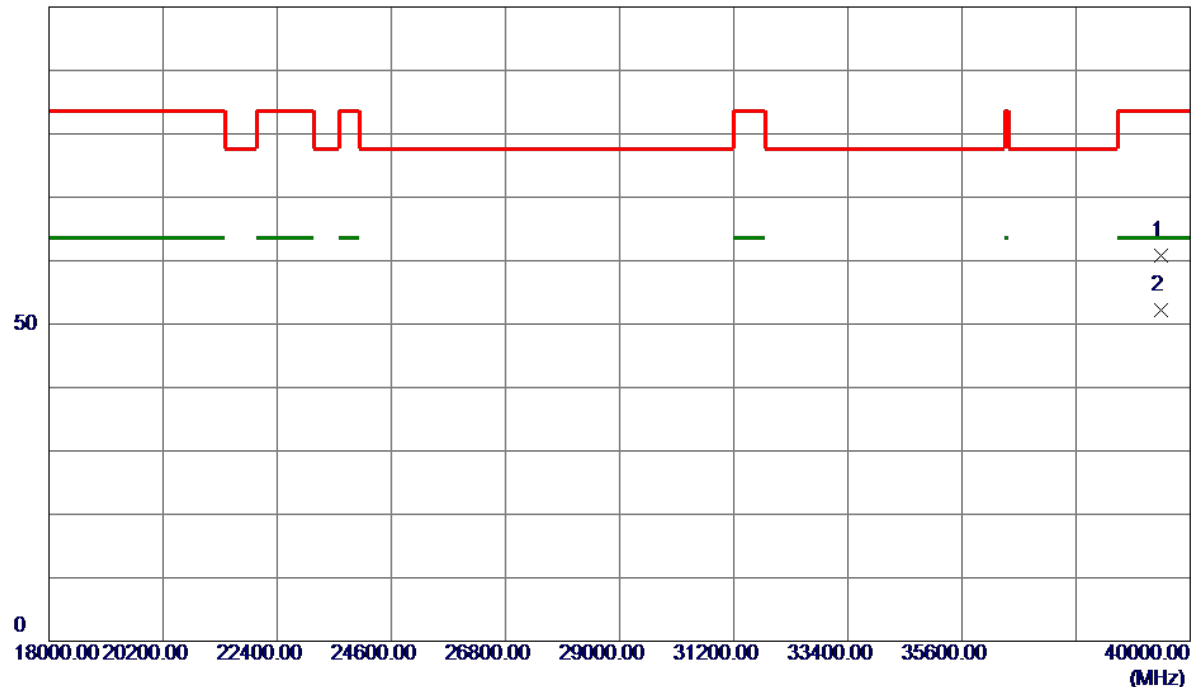

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39428.0000	50.45	10.35	60.80	83.50	-22.70	Peak	
2 *	39428.0000	41.77	10.35	52.12	63.50	-11.38	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

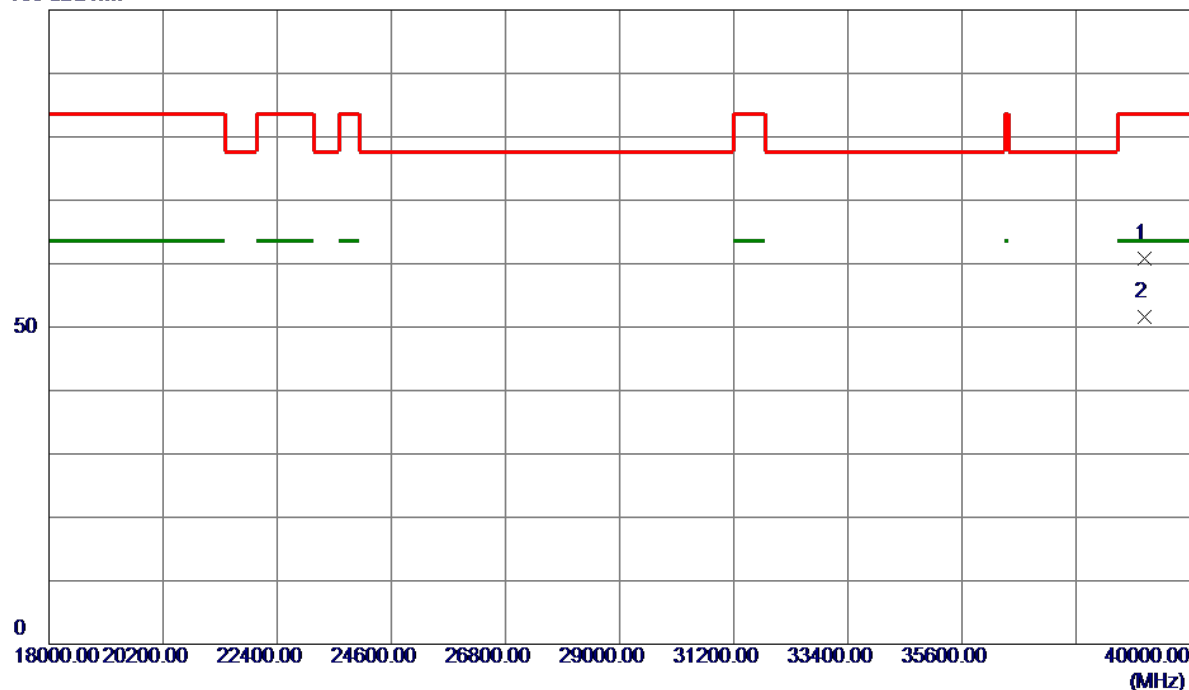

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39120.0000	50.50	10.30	60.80	83.50	-22.70	Peak	
2 *	39120.0000	41.32	10.30	51.62	63.50	-11.88	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

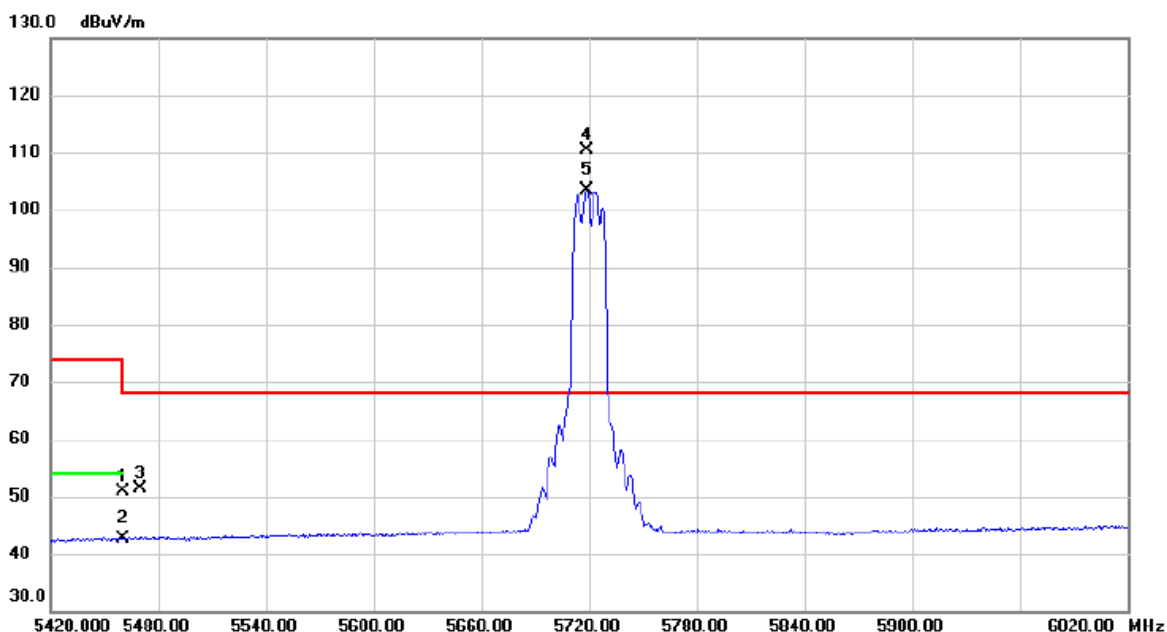


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.86	14.12	50.98	74.00	-23.02	peak	
2		5460.000	28.50	14.12	42.62	54.00	-11.38	AVG	
3		5470.000	37.10	14.16	51.26	68.20	-16.94	peak	
4	*	5718.800	95.35	15.12	110.47	68.20	42.27	peak	No Limit
5	X	5718.800	88.17	15.12	103.29	68.20	35.09	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

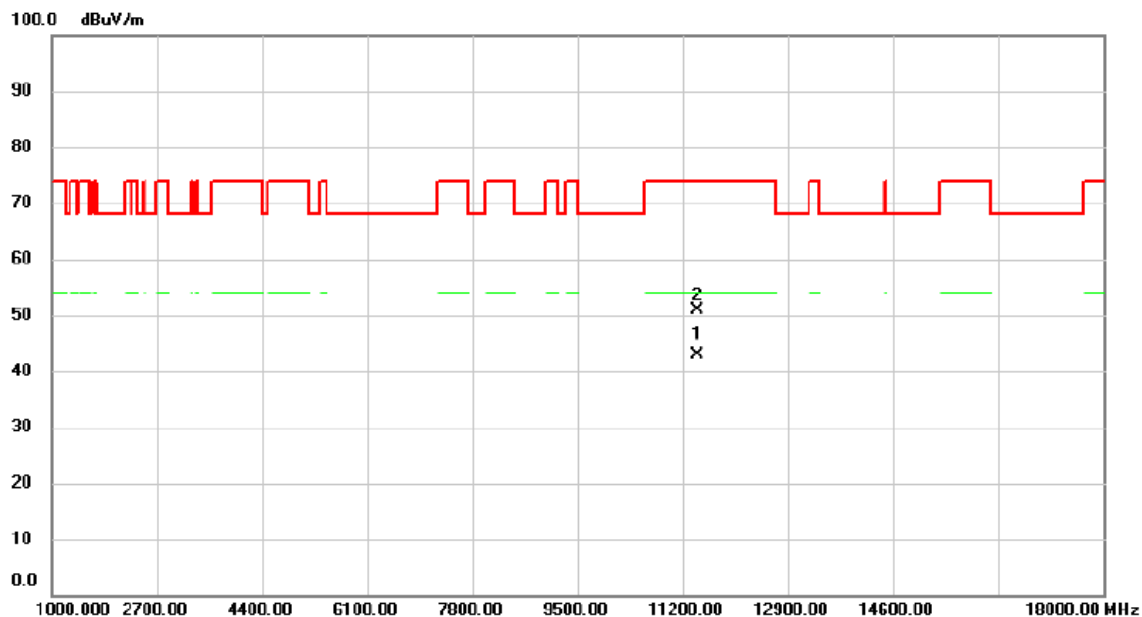


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11439.920	33.80	9.03	42.83	54.00	-11.17	AVG	
2		11440.430	41.77	9.03	50.80	74.00	-23.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

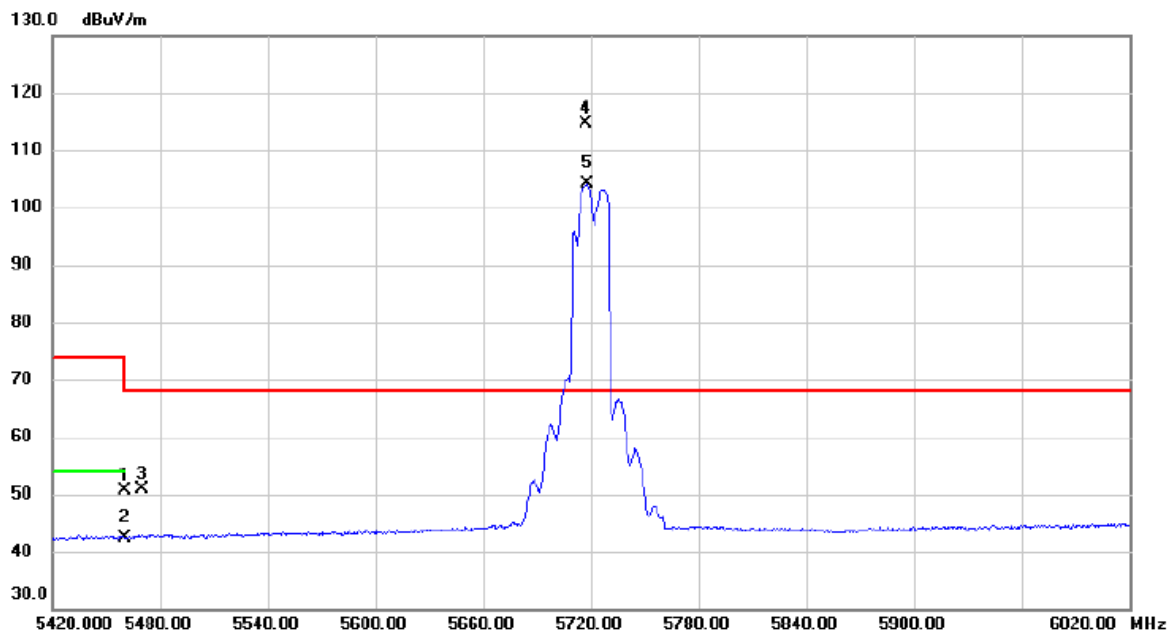


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.50	14.12	50.62	74.00	-23.38	peak	
2		5460.000	28.34	14.12	42.46	54.00	-11.54	AVG	
3		5470.000	36.84	14.16	51.00	68.20	-17.20	peak	
4	*	5717.000	99.44	15.12	114.56	68.20	46.36	peak	No Limit
5	X	5717.600	88.91	15.12	104.03	68.20	35.83	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

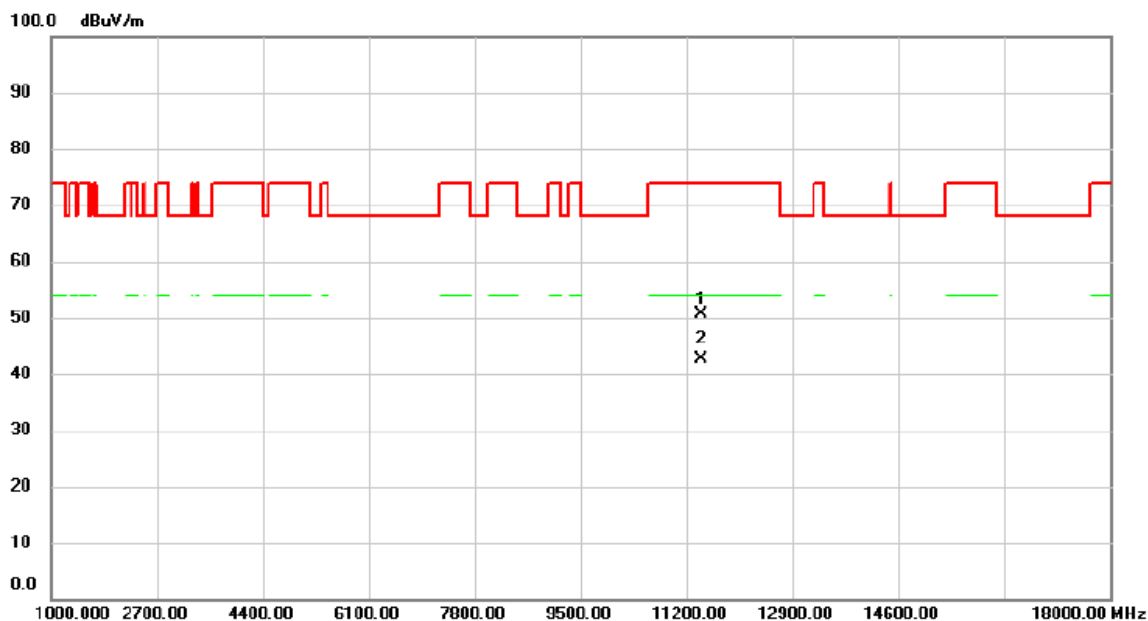


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11436.270	41.72	9.03	50.75	74.00	-23.25	peak	
2	*	11439.900	33.48	9.03	42.51	54.00	-11.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

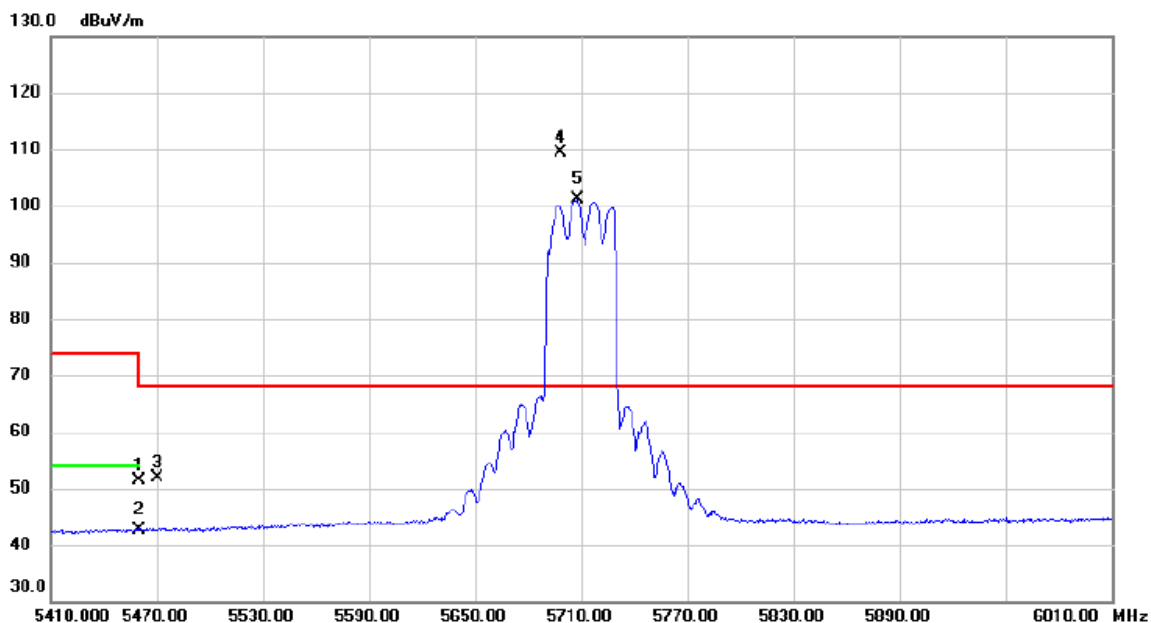


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.35	14.12	51.47	74.00	-22.53	peak	
2		5460.000	28.61	14.12	42.73	54.00	-11.27	AVG	
3		5470.000	37.64	14.16	51.80	68.20	-16.40	peak	
4	*	5698.000	94.32	15.04	109.36	68.20	41.16	peak	No Limit
5	X	5707.600	85.93	15.08	101.01	68.20	32.81	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

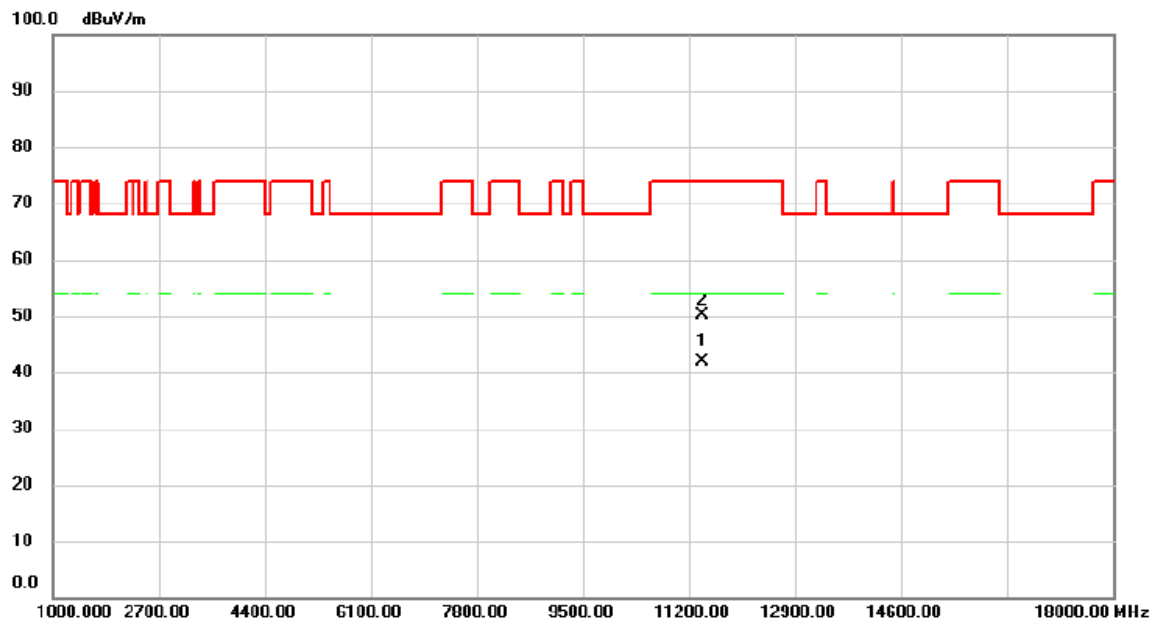


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11419.850	32.85	9.04	41.89	54.00	-12.11	AVG	
2		11420.850	41.13	9.04	50.17	74.00	-23.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

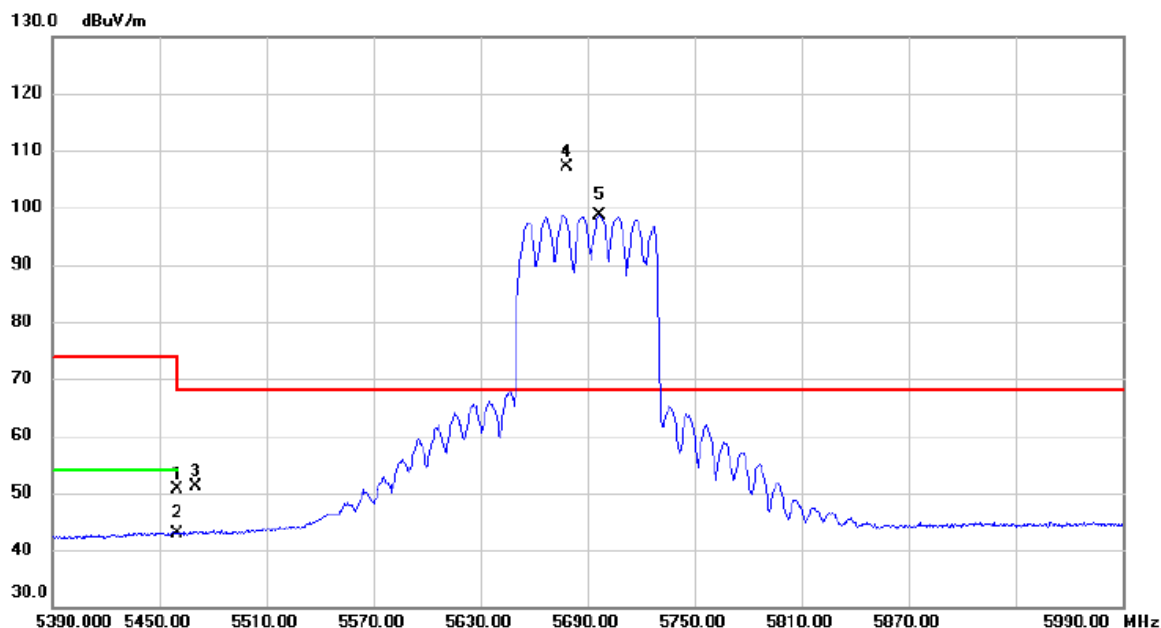


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.40	14.12	50.52	74.00	-23.48	peak	
2		5460.000	28.73	14.12	42.85	54.00	-11.15	AVG	
3		5470.000	37.03	14.16	51.19	68.20	-17.01	peak	
4	*	5678.600	92.15	14.96	107.11	68.20	38.91	peak	No Limit
5	X	5697.200	83.62	15.04	98.66	68.20	30.46	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

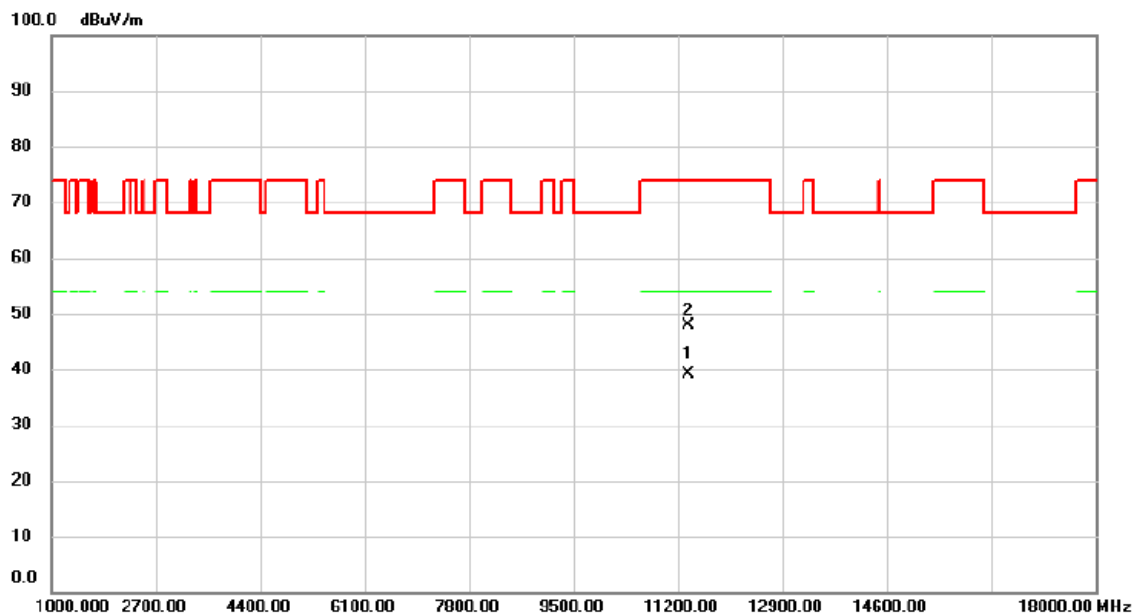


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11380.000	29.92	9.09	39.01	54.00	-14.99	AVG	
2	11380.200	38.84	9.09	47.93	74.00	-26.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

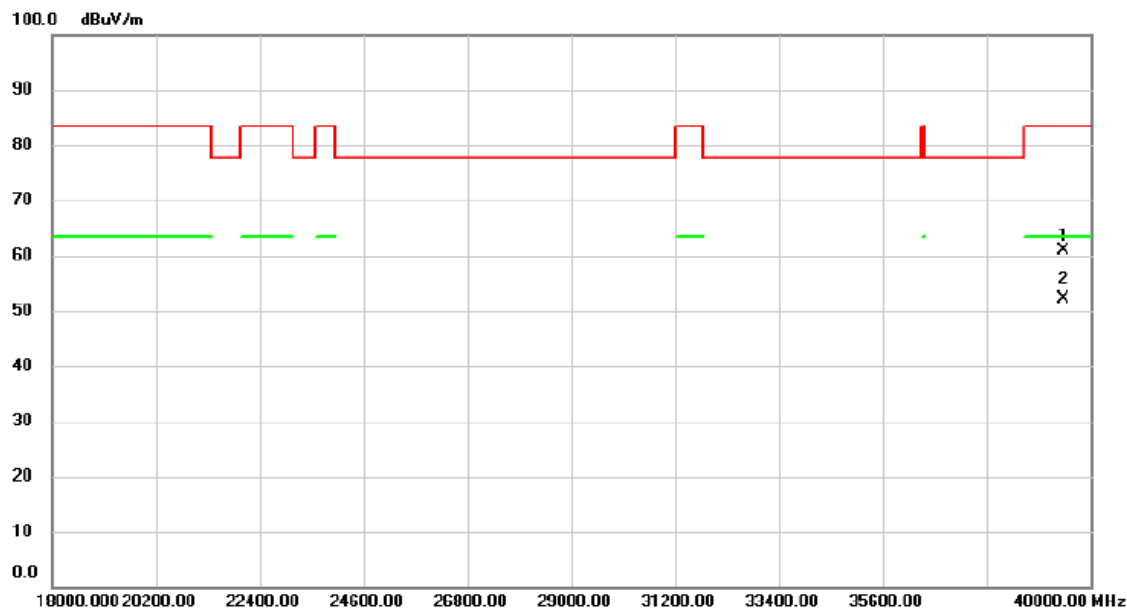


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		39428.000	50.45	10.35	60.80	83.50	-22.70	peak	
2	*	39428.000	41.77	10.35	52.12	63.50	-11.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

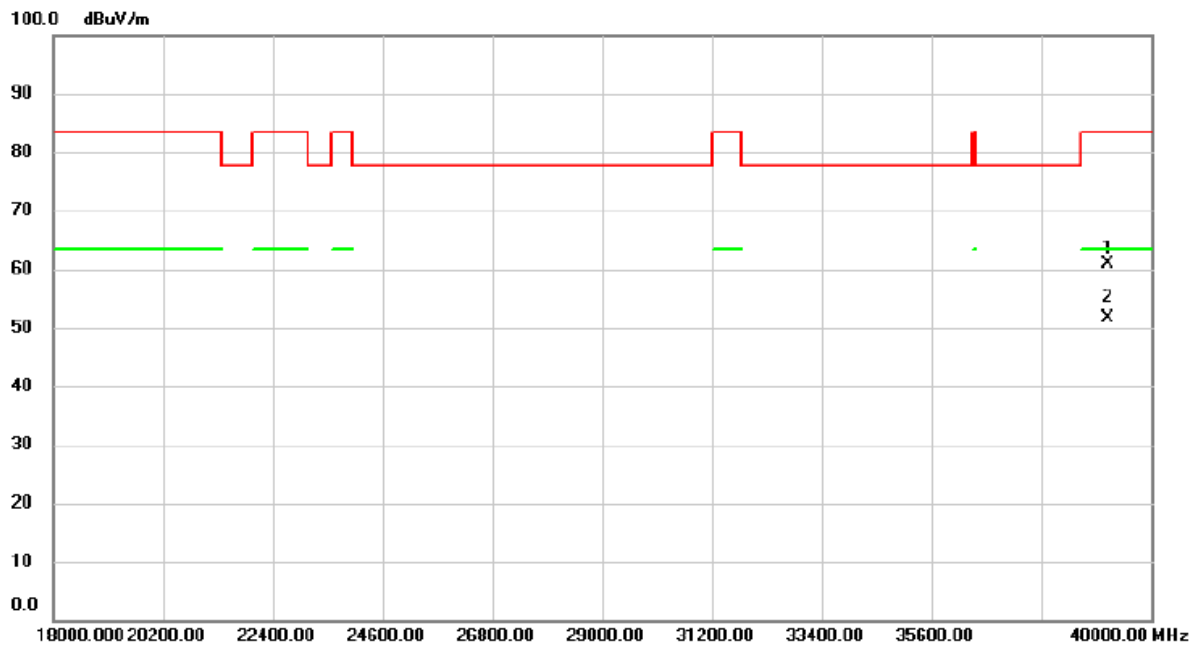

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39120.000	50.50	10.30	60.80	83.50	-22.70	peak	
2	*	39120.000	41.32	10.30	51.62	63.50	-11.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.060	16.540
40	5200	20.700	16.540
48	5240	20.820	16.554


CH36

CH40
26 dB Bandwidth

CH48

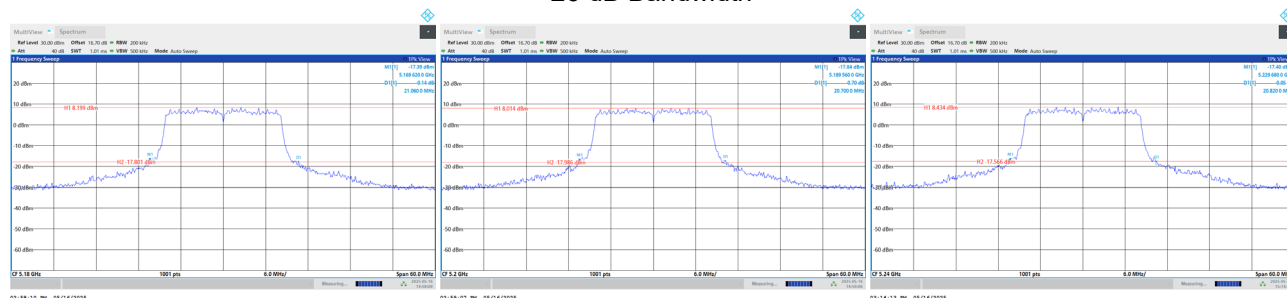

99 % Occupied Bandwidth

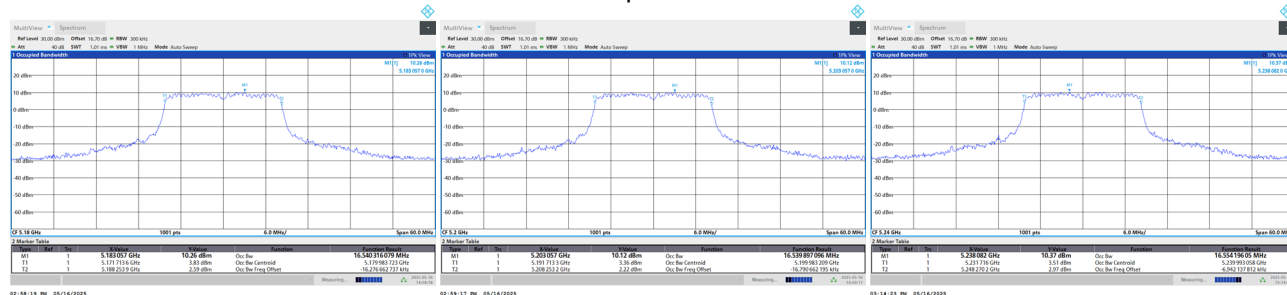

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.240	18.993
40	5200	21.300	19.004
48	5240	21.420	19.032

CH36

CH40
26 dB Bandwidth

CH48

