



Exhibit 1 – ID Label/Location Information

**SpectraPoint Wireless LLC
Customer Premises Equipment Roof Unit**

FCC ID: NNSRTU2000-99

Model Number: RTU2000-28-2

Information Provided in this Exhibit

a) Label Drawings

SpectraPoint Wireless drawing 3214978 is the artwork for the CPE Roof Unit ID labels. Sheet 1 of this drawing (shown on page 2 of this exhibit) contains notes pertaining to the labels and sheet 5 (shown on page 3 of this exhibit) contains the artwork for the -004 label.

b) CPE Roof Unit Top Assembly Drawings

SpectraPoint Wireless drawing 3215390 sheet 1, shown on page 4 of this exhibit, is a drawing for the CPE Roof Unit. The location of the label is shown on this drawing.

APPLICATION		REVISIONS			
NEXT ASSY	USED ON	REV	DESCRIPTION	DATE	APPR
3219675	3658	REV	INITIAL RELEASE	8-May-98	M.Robertson
3215390-001		A	CHG PER ECN 24106	24-Jul-98	M.Robertson
		B	CHG PER ECN 24249	30-Apr-99	L.Hanna
		C			

NOTES:

1. LABELS AND MARKINGS MUST BE UL APPROVED
2. MATERIAL: METAL PHOTO, METAL TO BE .02-.03 MIL THK WITH (3M 468) ADHESIVE BACKING
3. LABEL LIFE MUST BE MINIMUM OF 10 YEARS
4. UNLESS SPECIFIED, TEXT SHALL BE ARIAL FONT, 8 PT, COLOR BLACK: LABEL BORDERS SHALL BE 1.5 PT
5. REFER TO UL TYPE R LISTING MARK INFORMATION TO REPLACE REFERENCE U.S. AND CANADA UL SYMBOLS WITH APPROPRIATE REGISTERED MARKS
6. LABEL PART NUMBERS PLACED ON LABELS SHALL BE IN ARIAL FONT, 8 PT, COLOR BLACK. LABEL PART NUMBER SHALL BE LOCATED IN LOWER RIGHT HAND CORNER
7. UPPER AND LOWER CASE AND BOLD TEXT SHALL REFLECT TEXT STIPULATION AS SHOWN
8. DOTTED BOXES SHALL BE HORIZONTALLY ALIGNED WITH ADJACENT TEXT; BOX SIZES SHALL BE .25 X 1.00 INCH (H X W); ADJUST APPROPRIATE TEXT VERTICALLY AS NEEDED
9. LABELS MUST BE SELF-EXTINGUISHING AND EQUAL TO OR EXCEED 94V-0 FLAMMABILITY REQUIREMENTS
10. LABELS SHALL BE SUITABLE TO OUTDOOR CONDITIONS; MUST BE UV RESISTANT AND ENDURE -20C TO 50C TEMPERATURE RANGES
11. ENSURE SYMBOL HAS AN EQUILATERAL TRIANGLE AND ENLARGED EXCLAMATION MARK VERTICALLY AND HORIZONTALLY CENTERED
12. BAG AND TAG EACH CONFIGURATION PER ORDER PRIOR TO SHIPMENT

TOLERANCES
USE UNLESS SPECIFIED OTHERWISE

DIMENSIONS ARE IN INCHES

.XX = ±.03 .XXX = ±.010 ANGLES ±1°

ORIGINATOR J.Shelton	20-Mar-98
ENGINEERING M.Robertson	20-Mar-98
CM K.Chatterton	8-May-98



SPECTRAPPOINT WIRELESS, LLC
RICHARDSON, TEXAS

TITLE

**LABEL, PRODUCT
ROOFTOP UNIT**

SIZE A	CAGE CODE 0AAU6	DRAWING NO. 3214978-000
-----------	--------------------	----------------------------

SCALE NONE	SHEET 1 OF 5	REV C
MODEL 3214978-003	FORMAL_RELEASE 1.0+	
DRAWING 3214978-000	FORMAL_RELEASE 1.8+	
FILE NAME	RELEASE LEVEL	PDM VERSION

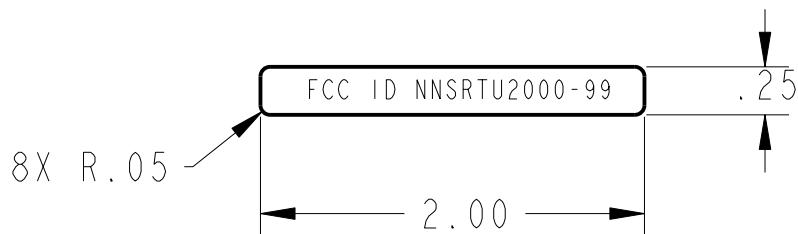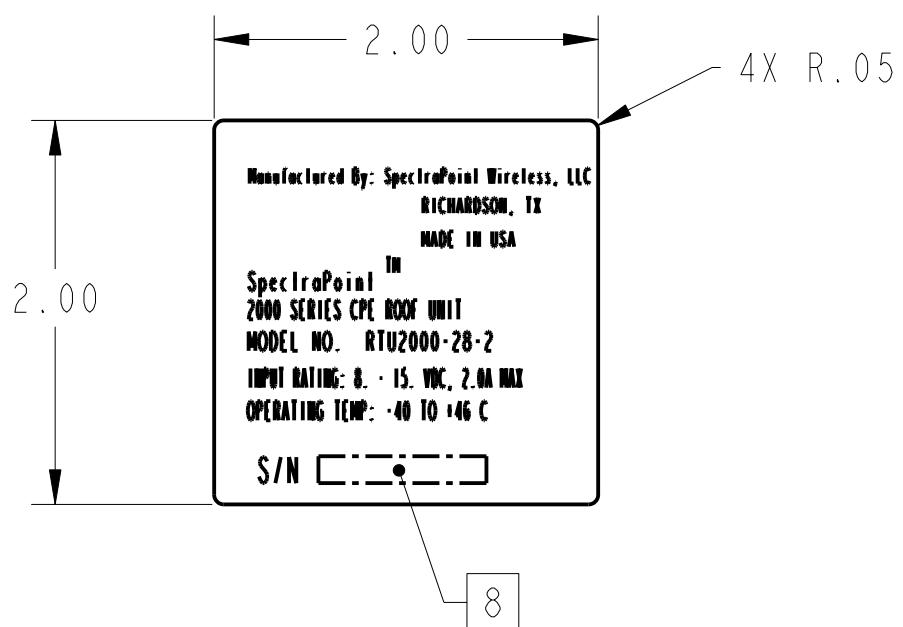

CONFIGURATION -004
GENERAL CONFIGURATION
CPE ANTENNA ASSEMBLY

SPECTRAPPOINT WIRELESS, LLC Richardson, Texas	CAGE CODE 0AAU6	SIZE A	SCALE 1/1	DRAWING NO. 3214978-000	SHEET 5 OF 5	REV C
--	--------------------	-----------	--------------	----------------------------	-----------------	----------

