



## 6BEE Wireless Module 6B\_CC2530V3

FCC ID: 2AC5J-6BCC2530V3  
IC: 12322A-6BCC2530V3

**wigwag**  
4009 Banister Lane, Suite 200  
Austin, TX 78704  
[www.wigwag.com](http://www.wigwag.com)  
[info@wigwag.com](mailto:info@wigwag.com)  
(512) 649-2188

**Copyright © 2016 WigWag Inc**  
All rights reserved.

WigWag assumes no responsibility for any errors which may appear in this manual. Furthermore, WigWag reserves the right to alter the hardware, software, and/or specifications detailed here at any time without notice and does not make any commitment to update the information contained here. WigWag products are not authorized for use as critical components in life support devices or systems.

No part of the contents of this manual may be transmitted or reproduced in any form or by any means without the written permission of WigWag, Inc.

The WigWag 6BCC2530V3 module enables organizations to quickly build 6LoWPAN enabled routers, gateways, and most importantly edge devices that interoperate natively with the WigWag platform. The 6BCC2530V3 can also be used with other Zigbee and 802.15.4 protocols and platforms; however, the core focus of this module is for interoperability with WigWag's DeviceJS enabled products. This module enables edge-device design with a host microcontroller, amplified RF radio link-layer, and certifications for use in product in the United States, Canada, Australia, and the European Union.


## Key Features & Specifications

FEATURES	SPECIFICATIONS
<p><b>Host Microcontroller</b></p> <ul style="list-style-type: none"><li>TEXAS INSTRUMENTS CC2530 combines a High-Performance and Low-Power 8051 MCU system with a robust IEEE 802.15.4 radio</li><li>ISM 2.4 GHz frequency band</li><li>3.6V - 2.0V operating voltage</li><li>32MHz, 8KB RAM, 256K Internal Flash</li></ul> <p><b>Certifications</b></p> <ul style="list-style-type: none"><li>FCC certification, FCC ID: 2AC5J-6BCC2530V3</li><li>IC certification, IC: 12322A-6BCC2530V3</li></ul> <p><b>Output</b></p> <ul style="list-style-type: none"><li>20dBm-0dBm output power via external amplifier and software settings</li></ul> <p><b>Boot options</b></p> <ul style="list-style-type: none"><li>Primary internal boot flash</li><li>Secondary boot flash to facilitate robust over-the-air reprogramming</li></ul> <p><b>Other features</b></p> <ul style="list-style-type: none"><li>32.768 kHz real time clock crystal</li></ul> <p><b>Formfactor</b></p> <ul style="list-style-type: none"><li>Solderable module</li><li>21 General purpose I/O pins (19X4mA,2X20mA)</li></ul> <p><b>Software Support</b></p> <ul style="list-style-type: none"><li>WigWag DeviceJS support</li><li>6LoWPAN support with the Contiki OS</li><li>Zigbee support with TI SmartRF™ Studio</li></ul>	<p><b>Physical Dimensions</b></p> <ul style="list-style-type: none"><li>Length: 35mm (1.378 in)</li><li>Width: 19mm (0.748 in)</li><li>Height (z-axis): 4.0mm (.1575 in)</li></ul> <p><b>Current consumption</b></p> <ul style="list-style-type: none"><li>Sleep (min/max): 2/150 <math>\mu</math>A</li><li>Idle (typical): 3 mA</li><li>Transmitting (typical/max) 100/350mA</li><li>Receiving: (typical/max) 100/350mA</li></ul> <p><b>Operating Frequency</b></p> <ul style="list-style-type: none"><li>2405MHz—2483.5MHz, 16 channels</li><li>Channel 11: 2405MHz, Channel 12: 2410MHz, ( .....) Channel 25: 2475MHz, Channel 26: 2480MHz(disable).</li></ul> <p><b>RF Characteristics</b></p> <ul style="list-style-type: none"><li>TX Power (min/max): 0dBm/20dBm</li><li>RX sensitivity (min/max): -94dBm/-97dBm</li><li>Range, typical (indoor/outdoor): ~200~400 ft (60M/120M)</li></ul>


## Mechanical drawings

\*All dimensional drawings are in mm

## Dimensions

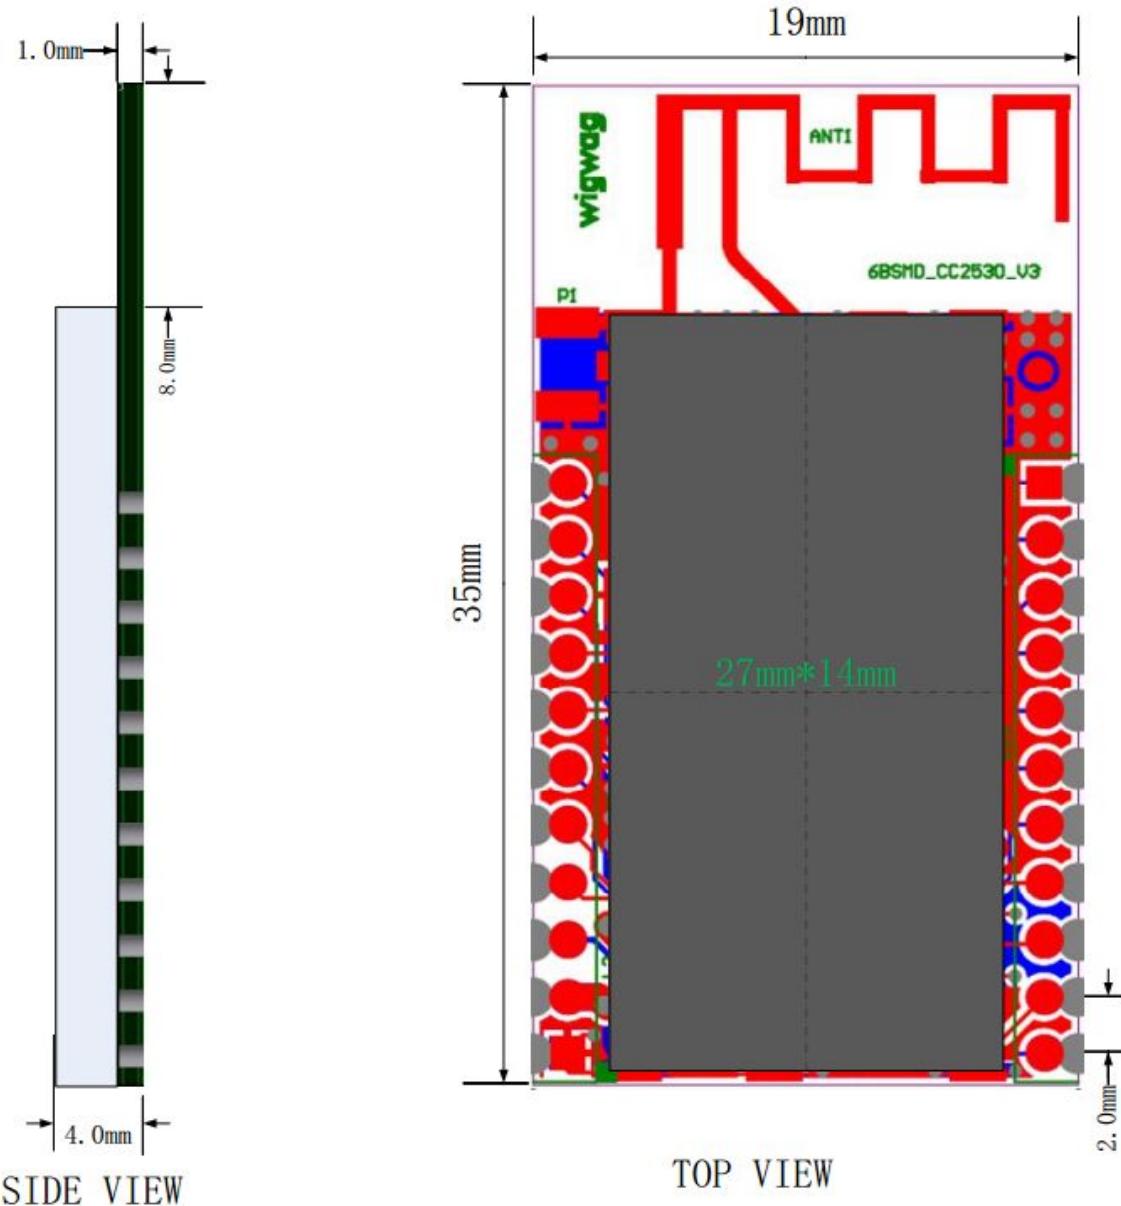


## Design consideration: mounting location

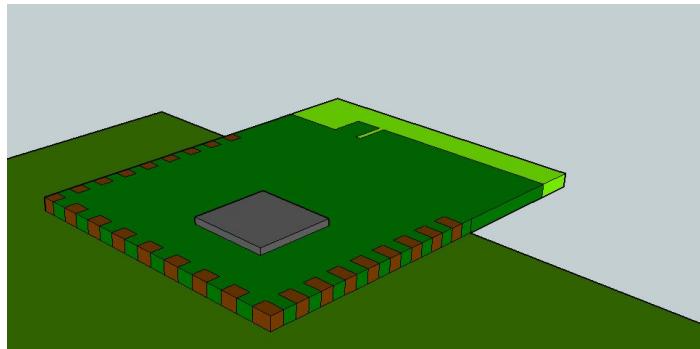

RF Caution: The 6BCC530V3 is designed to "hang off" a PCB edge in order to avoid interference from ground planes under the module. Placing this module over batteries, ground plane, components, or tracks within any layer of the main board, or other obstructive material will lessen the capable range of the module. A safe distance is to place these items outside of 20m of the 3 free sides of the antenna. Tracks and components may be placed adjacent to the metal shield, but should not be placed within 20mm of the antenna.

## Module PCB Footprint

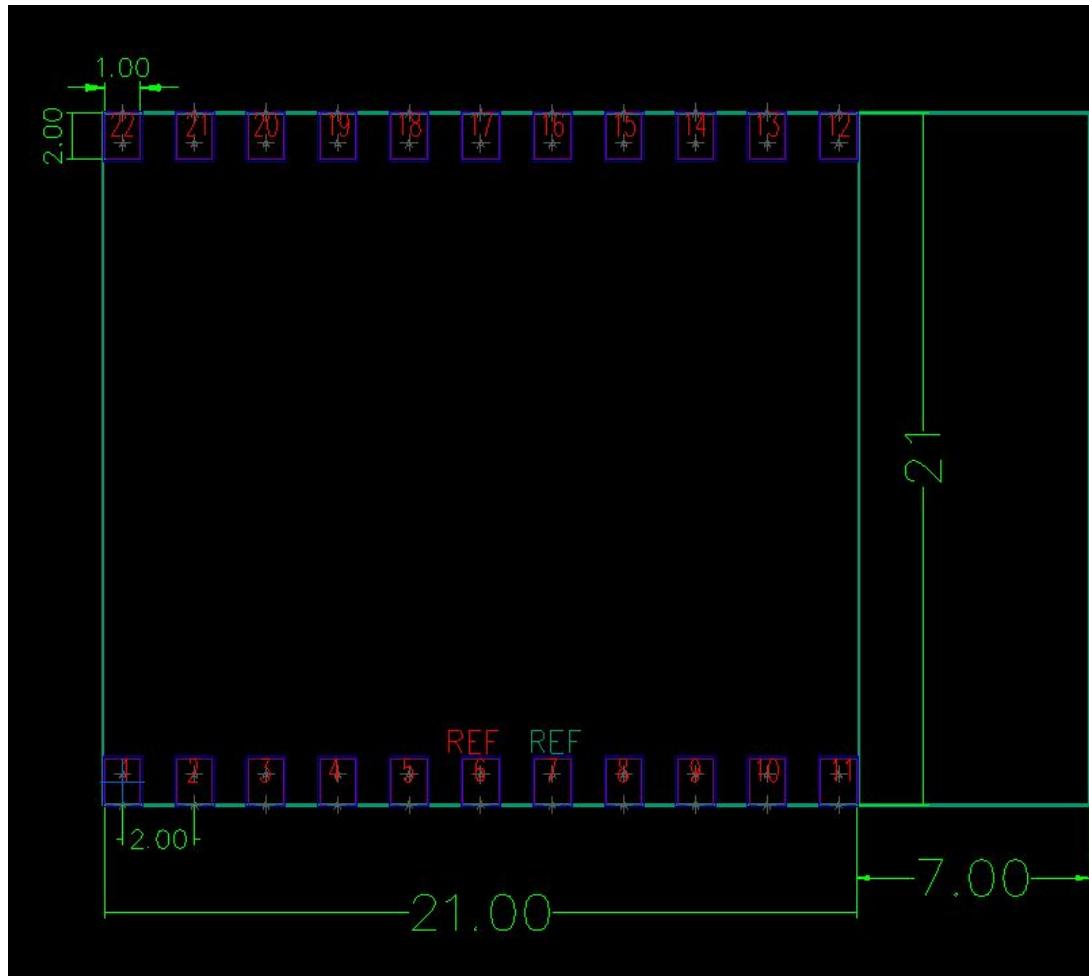

The module is a "solderable module and therefore the pad dimensions must be followed exactly.


\*All dimensions are in mm

## IO Port Configuration

Pin	Location	Name	Description
1	P3_11	P1_2	Port 1.2, Digital I/O
2	P3_10	P1_1	Port 1.1 – 20-mA drive capability, RF_TX, Digital/analog I/O
3	P3_9	P1_0	Port 1.0 – 20-mA drive capability, RF_RX, Digital/analog I/O
4	P3_8	P0_7	Port 0.7, ADC7, RF_HGM, Digital I/O
5	P3_7	P0_6	Port 0.6, ADC6, Digital I/O
6	P3_6	P0_5	Port 0.5, ADC5, UART_RTS, Digital I/O
7	P3_5	P0_4	Port 0.4, ADC4, UART_CTS, Digital I/O
8	P3_4	P0_3	Port 0.3, ADC3, UART_TXD, Digital I/O
9	P3_3	P0_2	Port 0.2, ADC2, UART_RXD, Digital I/O
10	P3_2	P0_1	Port 0.1, ADC1, Digital I/O
11	P3_1	P0_0	Port 0.0, ADC0, Digital I/O
12	P2_11	P2_0	Port 2.0, Digital I/O
13	P2_10	P1_7	Port 1.7, SPI_MI, Digital I/O
14	P2_9	P1_6	Port 1.6, SPI_MO, Digital I/O
15	P2_8	P1_5	Port 1.5, SPI_CLK, Digital I/O
16	P2_7	P1_4	Port 1.4, SPI_SS, Digital I/O
17	P2_6	P1_3	Port 1.3, Digital I/O
18	P2_5	P2_2	Port 2.2, SWD_CLK, Digital I/O
19	P2_4	P2_1	Port 2.1, SWD_DIO, Digital I/O
20	P2_3	RESRT_N	Reset, active-low, Digital input
21	P2_2	VCC	DC3.3V Power-Supply
22	P2_1	AGND	Ground

## Ordering Information

Simple SKU ordering: 6B\_CC2530V3-001

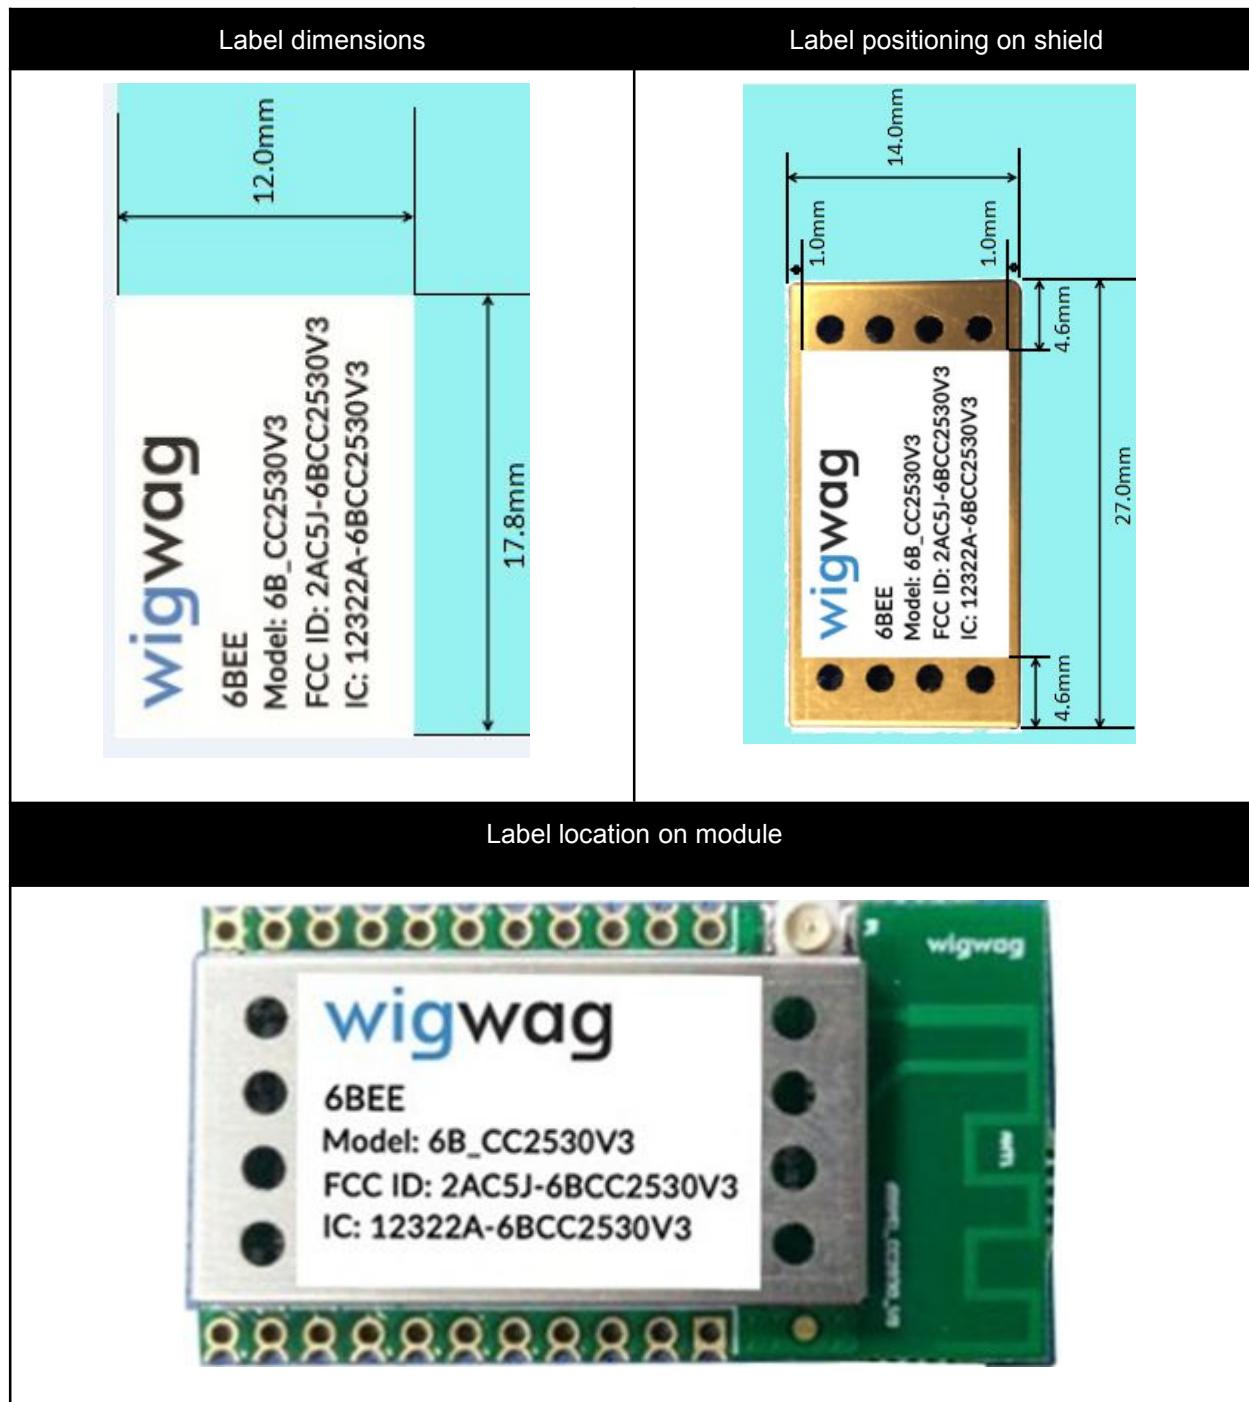

## Regulatory and Certifications

### FCC Statement:

This equipment has been tested and found to comply with the limits for Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Note: Modifications to this product will void the user's authority to operate this equipment.**

### RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

### FCC Information to OEM integrator

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user manual of the end product.

The user manual which is provided by OEM integrators for end users must include the following information in a prominent location.

1. To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter, except in accordance with FCC multi-transmitter product procedures.
2. Only those antennas with same type and lesser gain filed under this FCC ID number can be used with this device.

3. The regulatory label on the final system must include the statement: "Contains FCC ID: xxxx or using electronic labeling method as documented in KDB 784748.
4. The final system integrator must ensure there is no instruction provided in the user manual or customer documentation indicating how to install or remove the transmitter module except such device has implemented two-ways authentication between module and the host system

## **IC Statement:**

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device."

## **IC Déclaration:**

En vertu de la réglementation de l'industrie du Canada, cet émetteur de radio ne peuvent fonctionner en utilisant une antenne d'un type et maximum (ou moins) Gain approuvé pour l'émetteur par Industrie Canada. pour réduire risque d'interférence aux autres utilisateurs, le type d'antenne et son gain doivent être choisis de sorte que la puissance isotrope rayonnée équivalente (PIRE) ne dépasse pas ce qui est nécessaire pour la réussite de communication.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**Remarque: Toute modification de ce produit annule l'autorité de l'utilisateur à utiliser cet équipement.**

## **RF Radiation Exposure Statement:**

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with IC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

## **IC Information to OEM integrator**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user manual of the end product.

The user manual which is provided by OEM integrators for end users must include the following information in a prominent location.

1. To comply with IC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be

## 6BCC2530V3 Datasheet & Manual

---

co-located or operating in conjunction with any other antenna or transmitter, except in accordance with IC multi-transmitter product procedures.

2. Only those antennas with same type and lesser gain filed under this IC number can be used with this device.
3. The regulatory label on the final system must include the statement: "Contains IC: xxxx".
4. The final system integrator must ensure there is no instruction provided in the user manual or customer documentation indicating how to install or remove the transmitter module except such device has implemented two-ways authentication between module and the host system.