

KTL Test Report: 8L0263E

Applicant: Samsung Telecommunications America, Inc.
1130 Arapaho Road
Richardson, Tx 75081

Equipment Under Test: Indoor Mini-BTS
(E.U.T.)

FCC ID: NP817-4WIDMINI

In Accordance With: **FCC Part 24, Subpart E**
Broadband PCS Base Station

Tested By: KTL Dallas Inc.
802 North Kealy
Lewisville, TX 75057-3136

Authorized By:

Tom Tidwell, RF Group Manager

Date:

Total Number of Pages:

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Table of Contents

Section 1. Summary of Test Results

- General
- Summary of Test Data

Section 2. General Equipment Specification

- Specifications
- Description of Modifications for Class II Permissive Change
- Modifications Made During Testing
- Theory of Operation
- System Diagram

Section 3. RF Power Output

- Test Results
- Measurement Data
- Power Over Bandwidth Graphs

Section 4. Occupied Bandwidth

- Occupied Bandwidth (CDMA)
 - Test Results
 - CDMA Input and Output Graphs
- Occupied Bandwidth (GSM)
 - Test Results
 - GSM Input and Output Graphs
- Occupied Bandwidth (NADC)
 - Test Results
 - NADC Input and Output Graphs

Section 5. Spurious Emissions at Antenna Terminals

- Test Results
- Test Data
- Graphs

Section 6. Field Strength of Spurious

- Test Results
- Test Data
- Test Data - Radiated Emissions - Uplink
- Test Data - Radiated Emissions - Downlink
- Photographs of Test Setup
- Pre-Scan Data

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Table of Contents, continued

Section 7. Frequency Stability

Test Results
Measurement Data
Graphs

Section 8. Test Equipment List

Annex A - Test Methodologies

RF Power Output
Occupied Bandwidth (CDMA)
Occupied Bandwidth (GSM)
Occupied Bandwidth (NADC)
Spurious Emission at Antenna Terminals
Field Strength of Spurious
Frequency Stability

Annex B - Test Diagrams

R.F. Power Output
Occupied Bandwidth
Spurious Emissions at Antenna Terminals
Field Strength of Spurious
Frequency Stability

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Section 1. Summary of Test Results

Manufacturer: Samsung Telecommunication America, Inc.

Model No.: Indoor Mini-BTS

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 24, Subpart E.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit



Equipment Code

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP LAB CODE: 100351-0

TESTED BY: _____ DATE: _____
Ron Gaytan, Technician

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: Indoor Mini BTS
*FCC ID:NP817-4WIDMINI***Summary Of Test Data**

NAME OF TEST	PARA. NO.	SPEC.	MEAS.	RESULT
RF Power Output	24.232	100W	17.4 W	Complies
Occupied Bandwidth (CDMA)	24.238	Plots	Plots	Complies
Occupied Bandwidth (GSM)	24.238	N/A	N/A	N/A
Occupied Bandwidth (NADC)	24.238	N/A	N/A	N/A
Spurious Emissions at Antenna Terminals	24.238(a)	-13 dBm	-15 dBm	Complies
Field Strength of Spurious Emissions	24.238(a)	-13 dBm E.I.R.P.	-26.3 dBm E.I.R.P.	Complies
Frequency Stability	24.235	± 0.05 ppm	0.037102 ppm	Complies

Note: Waveform Quality was measured under voltage and temperature extremes in order to characterize the modulation characteristics as per FCC Part 2.1047 This data is reported with Frequency Stability data.

Footnotes For N/A's: The E.U.T. is a CDMA only base station transmitter.

Test Conditions:

LAB: Temperature: 24 °C
Humidity: 52 %

OATS: Temperature: 22 °C
Humidity: 41 %

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Section 2. General Equipment Specification

Supply Voltage Input: 27 VAC

Frequency Range(s): Blocks A,D,B,E,C & F

A 1931.250-1943.750
D 1946.250-1948.750
B 1951.250-1963.750
E 1966.250-1968.750
F 1971.250-1973.750
C 1976.250-1988.750

Type of Modulation and
Designator:

CDMA
(F9W)



GSM
(GXW)



NADC
(DXW)



Emission & Bandwidth Designator: 1M25F9W

Output Impedance: 50 ohm

RF Output (Rated): 17.4 Watts (+42.4 dBm)

Band Selection:

Software



Duplexer
Change



Fullband
Coverage



EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Description of Modifications For Class II Permissive Change

Not Applicable

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Modifications Made During Testing

Not Applicable

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

System Description

The E.U.T. is a base station transmitter that operates in the PCS 1900 frequency blocks. The access method is CDMA and the air interface is designed to the IEC IS-95 standard.. Output power of the transmitter is rated as 17.4 watts. Multiple sectors can be configured with one CDMA channel per sector.

The system is intended to operate on the valid CDMA frequency assignments defined in J-STD-008 and listed below.

Block Designator	Valid CDMA Frequency Assignments	CDMA Channel Number	Personal Station Frequency(MHz)	Base Station Frequency(MHz)
A	Not Valid	0-24	1850.000-1851.200	1930.000-1931.200
	Valid	25-275	1851.250-1863.75	1931.250-1943.750
	Cond. Valid	276-299	1863.800-1864.950	1943.800-1944.950
D	Cond. Valid	300-324	1865.000-1866.200	1945.000-1946.200
	Valid	325-375	1866.250-1868.750	1946.250-1948.750
	Cond. Valid	376-399	1868.800-1869.950	1948.800-1949.950
B	Cond. Valid	400-424	1870.000-1871.200	1950.000-1951.200
	Valid	425-675	1871.250-1883.750	1951.250-1963.750
	Cond. Valid	676-699	1883.800-1884.950	1963.800-1964.950
E	Cond. Valid	700-724	1885.000-1886.200	1965.000-1966.200
	Valid	725-775	1886.250-1888.750	1966.250-1968.750
	Cond. Valid	776-799	1888.800-1889.950	1968.800-1969.950
F	Cond. Valid	800-824	1890.000-1891.200	1970.000-1971.200
	Valid	825-875	1891.250-1893.750	1971.250-1973.750
	Cond. Valid	876-899	1893.800-1894.950	1973.800-1974.950
C	Cond. Valid	900-924	1895.000-1896.200	1975.000-1976.200
	Valid	925-1175	1896.250-1908.750	1976.250-1988.750
	Not Valid	1176-1199	1908.800-1909.950	1988.800-1989.950

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
TESTED BY: Ron Gaytan	DATE: 1/25/99

Test Results: Complies.**Measurement Data:**

Modulation Type	Measured Output Power (dBm)	Rated Output Power (dBm)
CDMA	42.4	42.4
GSM	N/A	N/A
NADC	N/A	N/A

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI


Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth (CDMA)	PARA. NO.: 2.1049
TESTED BY: Ron Gaytan	DATE: 1/26/99

Test Results: Complies.


Test Data: See attached graph(s).

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

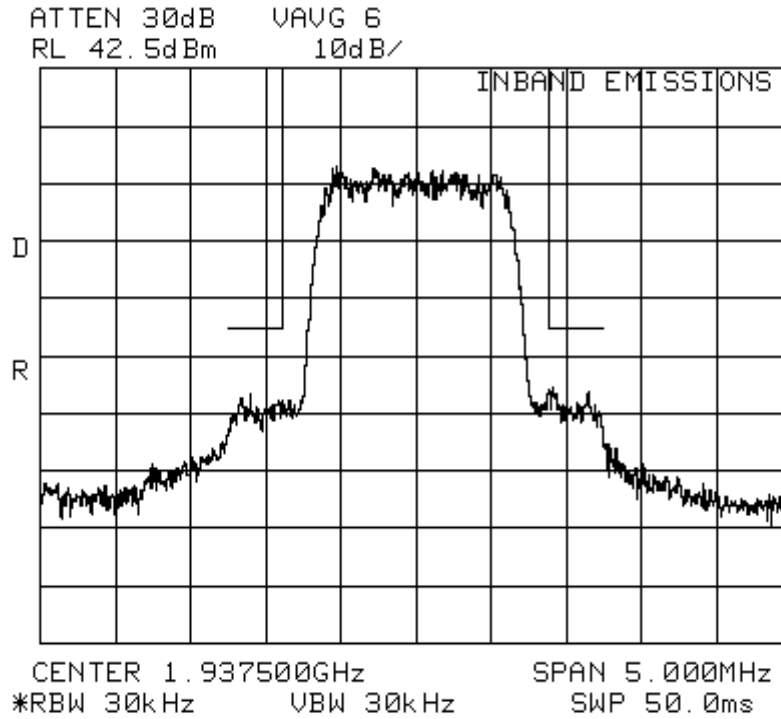


PROJECT # 8L0265E
IN-BAND EMISSIONS
BLOCK A
CHANNEL 150
FREQUENCY 1.93750 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

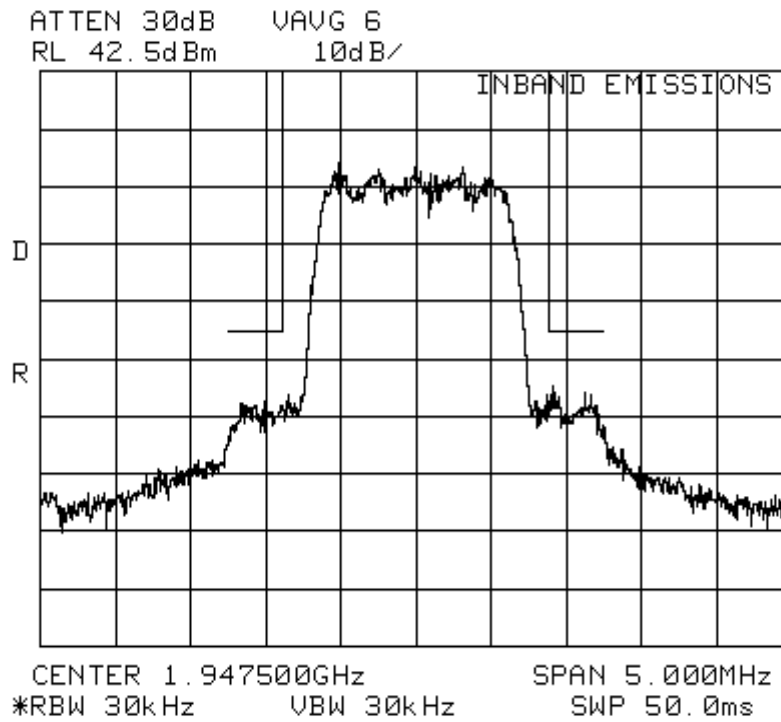


PROJECT # 8L0265
IN-BAND EMISSIONS
BLOCK D
CHANNEL 350
FREQUENCY 1.9475 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

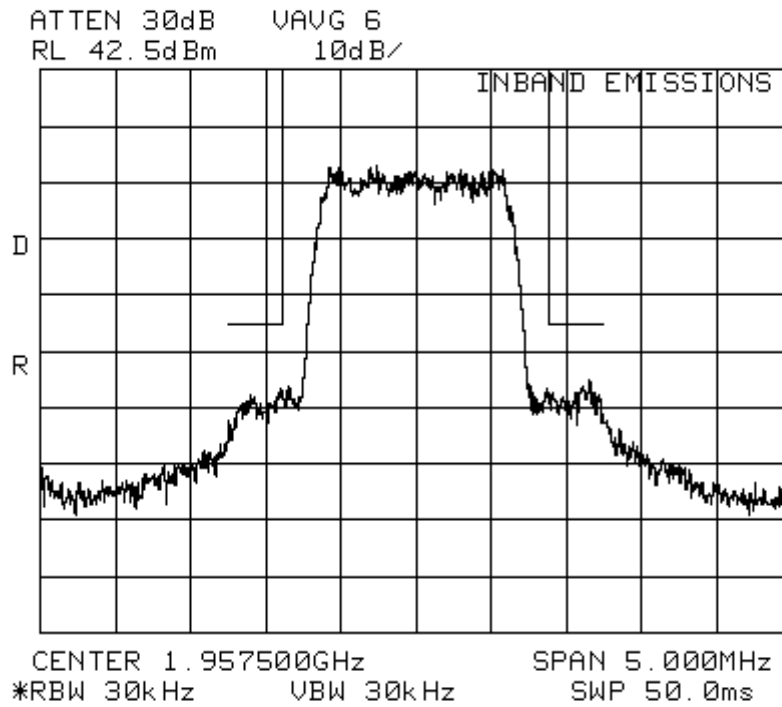


PROJECT # 8L0265E
IN-BAND EMISSIONS
BLOCK B
CHANNEL 550
FREQUENCY 1.95750 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

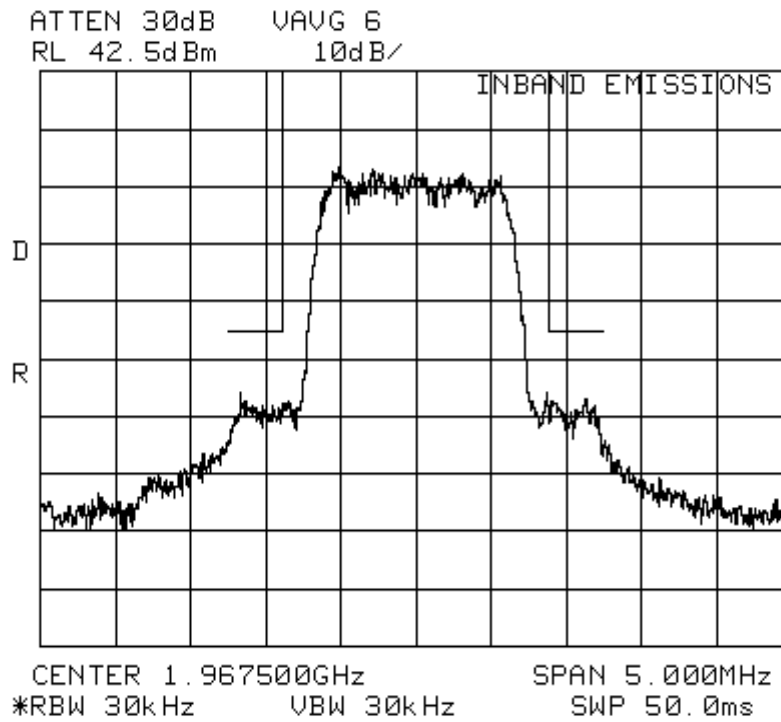


PROJECT # 8L0265E
IN-BAND EMISSIONS
BLOCK E
CHANNEL 750
FREQUENCY 1.9675 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

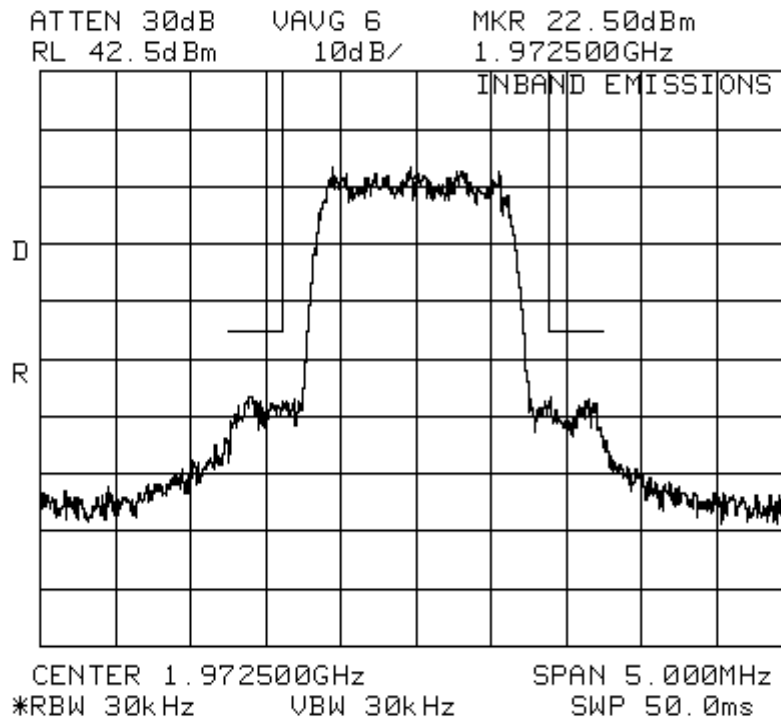

PROJECT # 8L0265E
IN-BAND EMISSIONS
BLOCK F
CHANNEL 850
FREQUENCY 1.97250 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

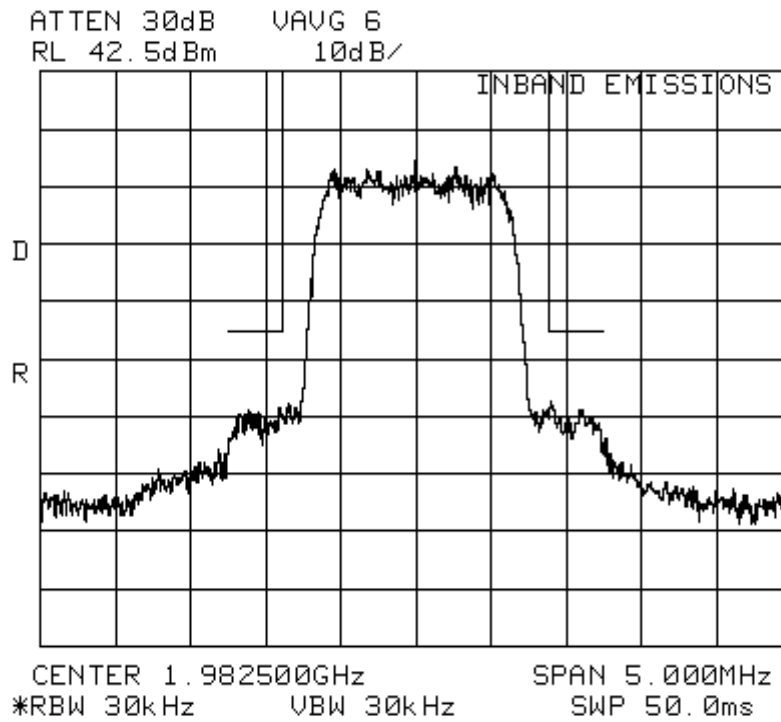

PROJECT # 8L0265
IN-BAND EMISSIONS
BLOCK C
CHANNEL 1050
FREQUENCY 1.98250 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

NAME OF TEST: Occupied Bandwidth (GSM)	PARA. NO.: 2.1049
TESTED BY:	DATE:

Test Results: Complies/Does Not Comply.

Test Data: See attached graph(s).

Not Applicable

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

NAME OF TEST: Occupied Bandwidth (NADC)	PARA. NO.: 2.1049
TESTED BY:	DATE:

Test Results: Complies/Does Not Comply.

Test Data: See attached graph(s).

Not Applicable

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Section 5. Spurious Emissions at Antenna Terminals


NAME OF TEST: Spurious Emissions @ Antenna Terminals PARA. NO.: 2.1051

TESTED BY: Ron Gaytan DATE: 1/26/99 & 1/27/99


Test Results: Complies.**Test Data:**

NAME OF TEST	WORST-CASE SURIOUS LEVEL(dBm)
0 to 20 GHz Spurious	-17
Lower Band Edge	-15
Upper Band Edge	-19


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

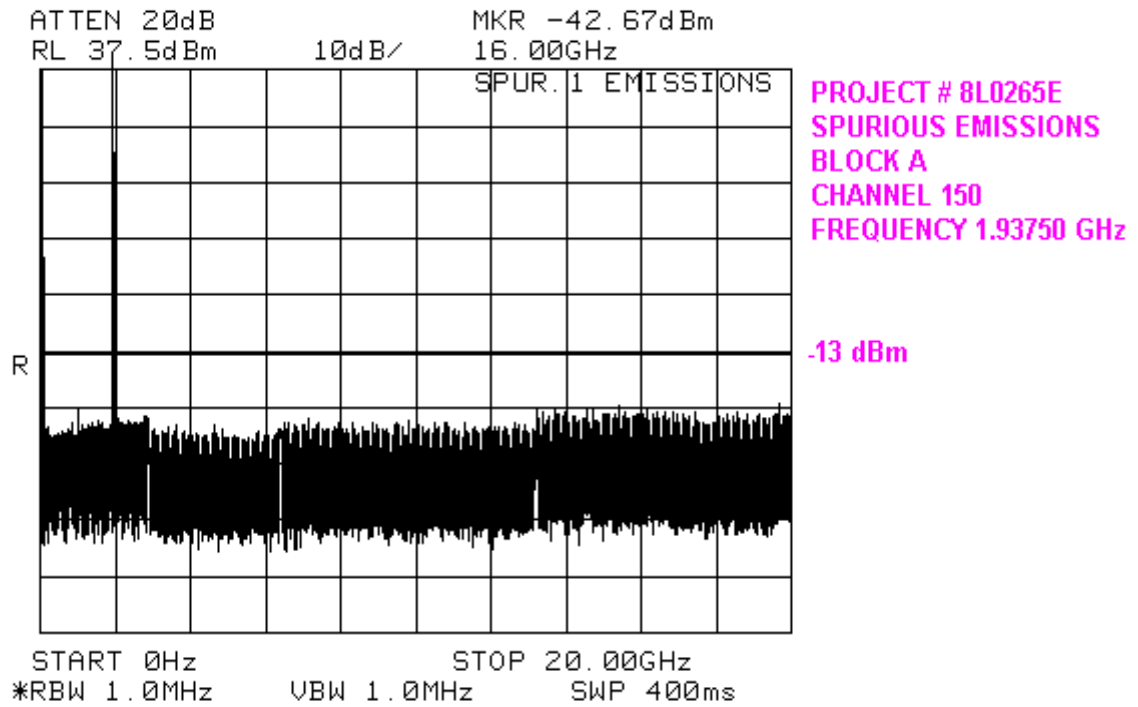


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

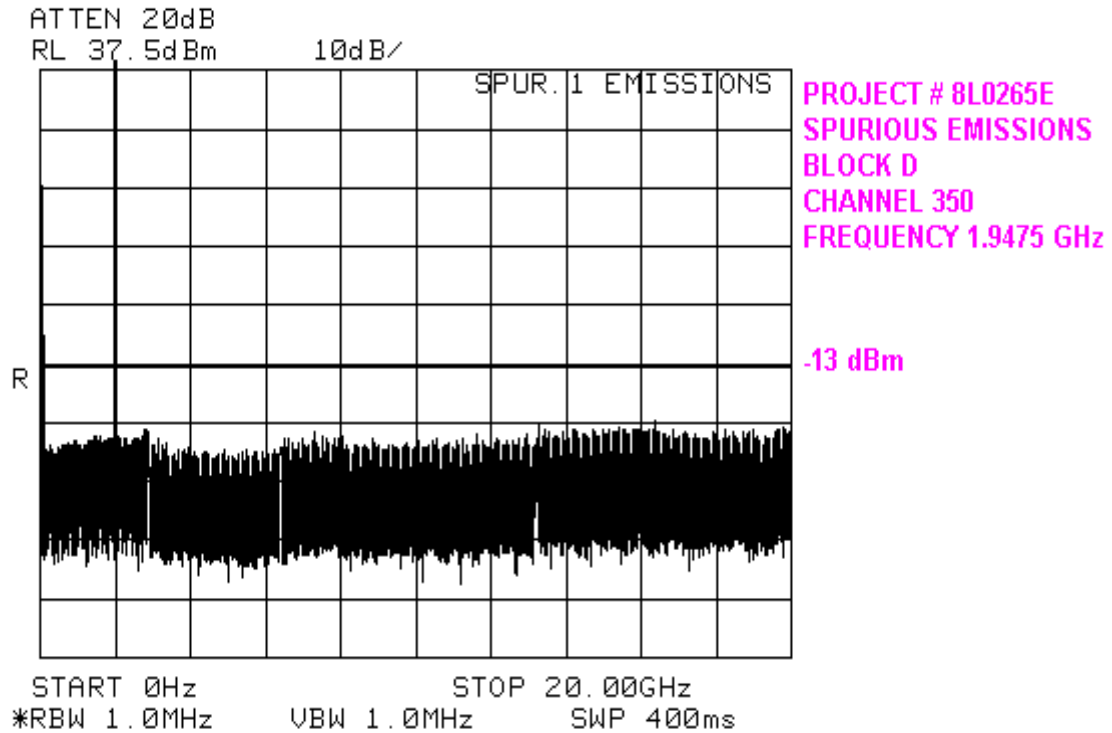


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

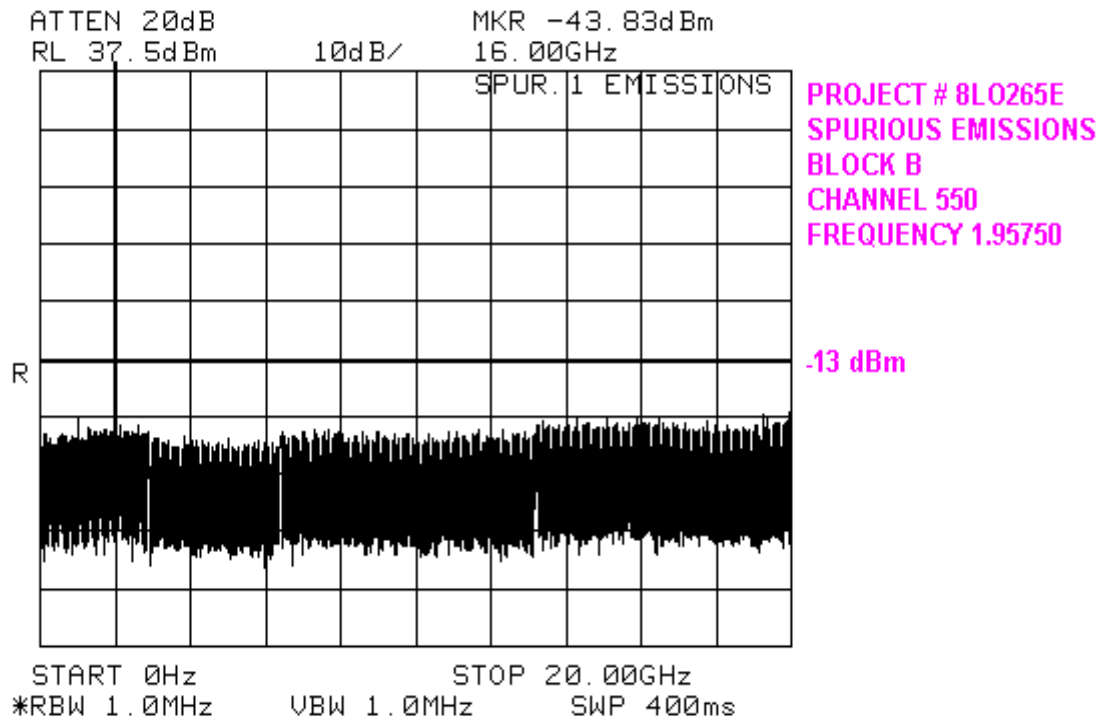


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

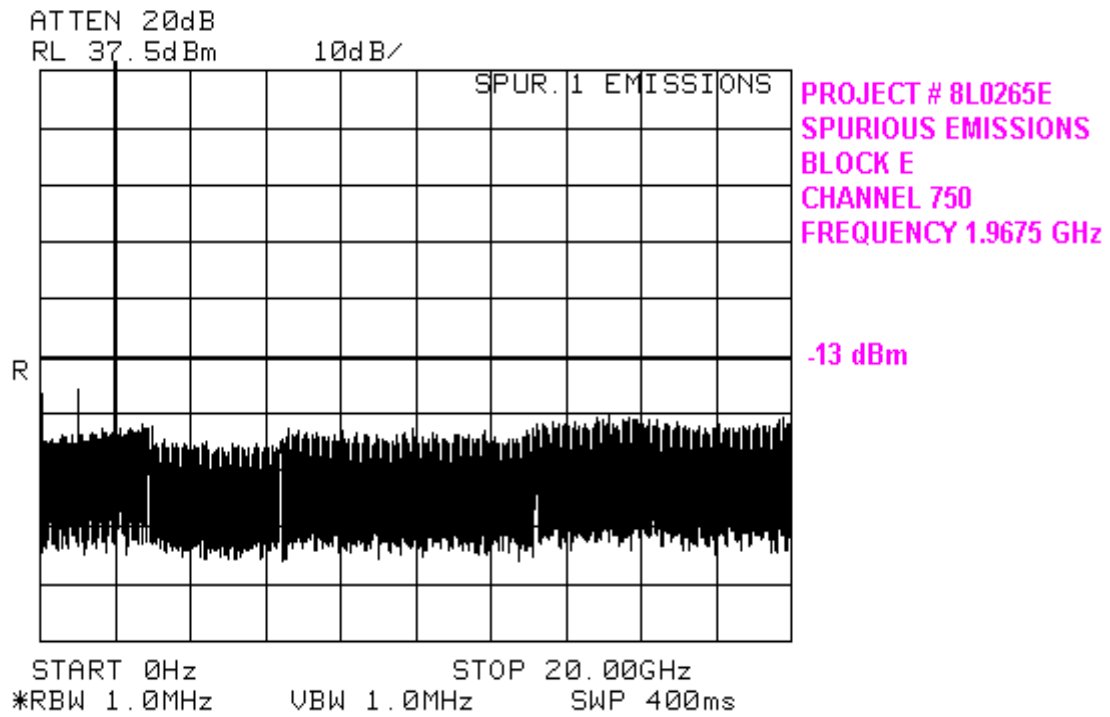


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

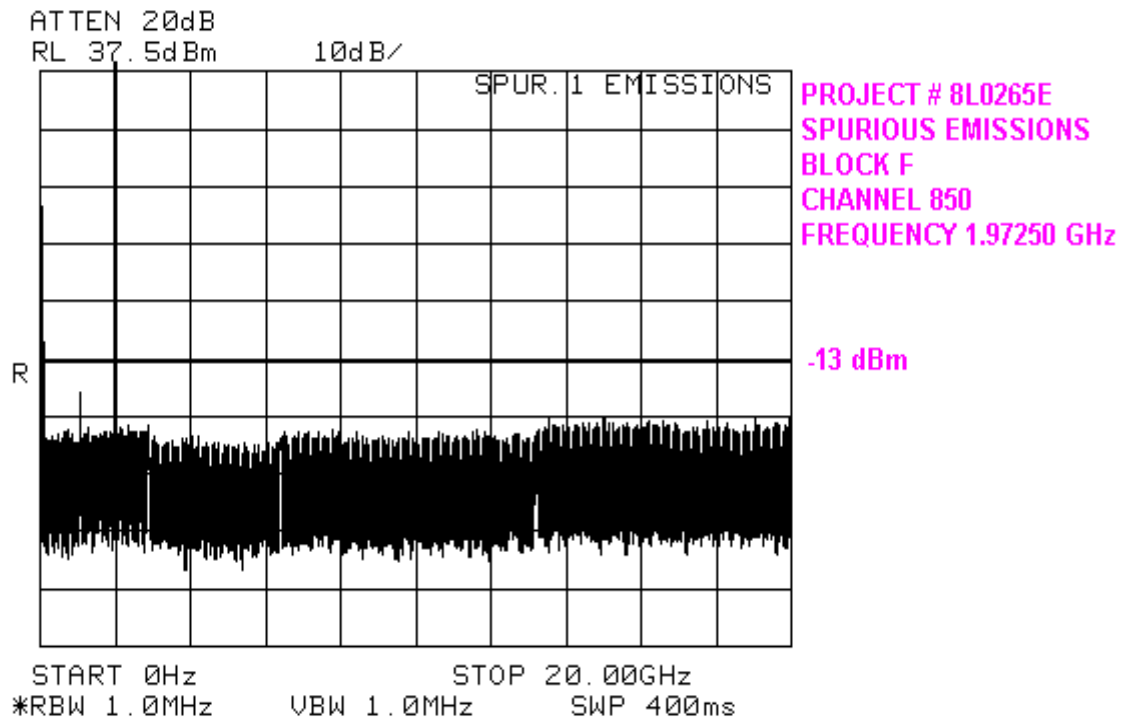


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

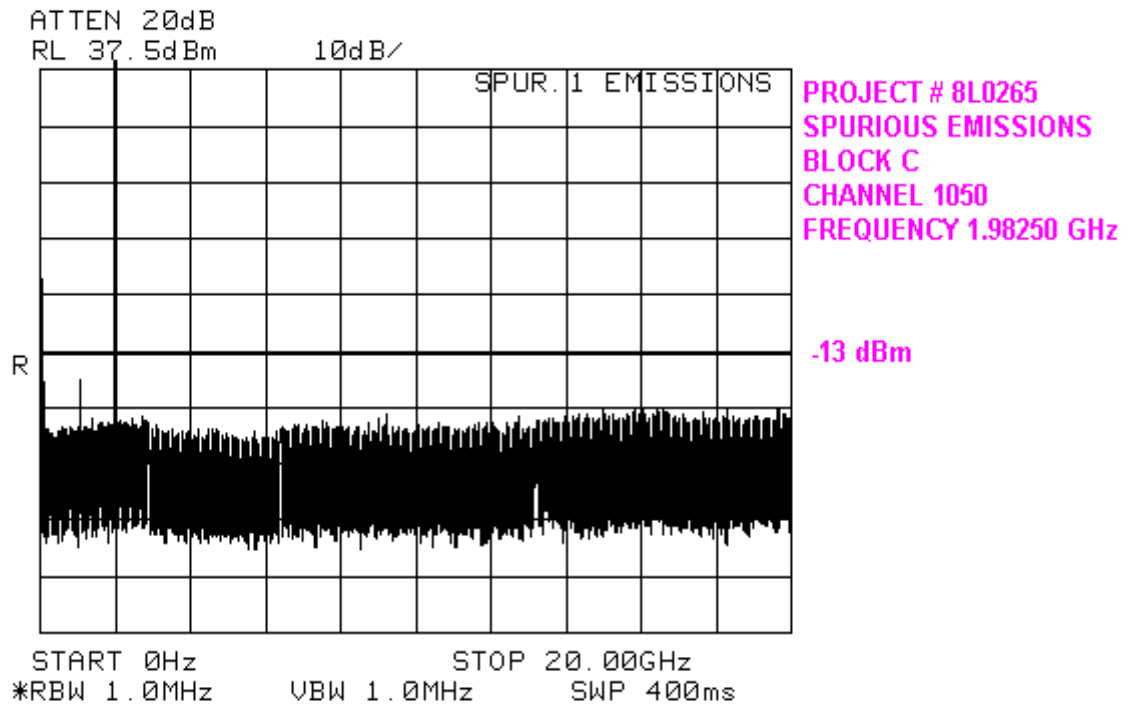


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

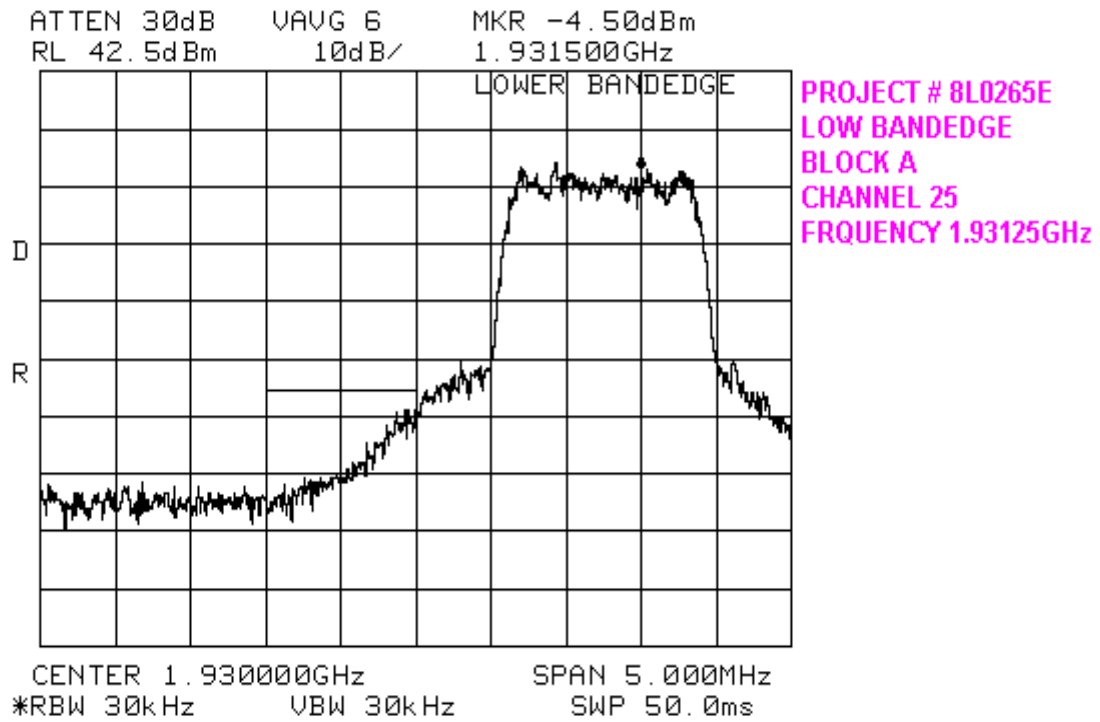

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

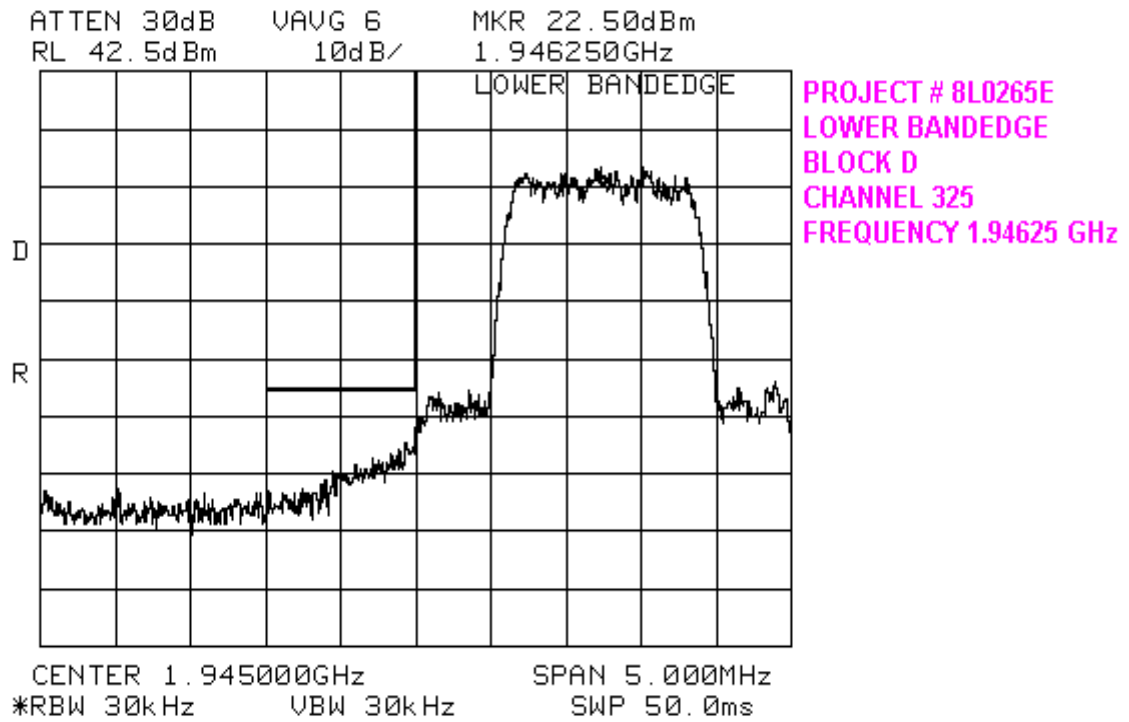


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

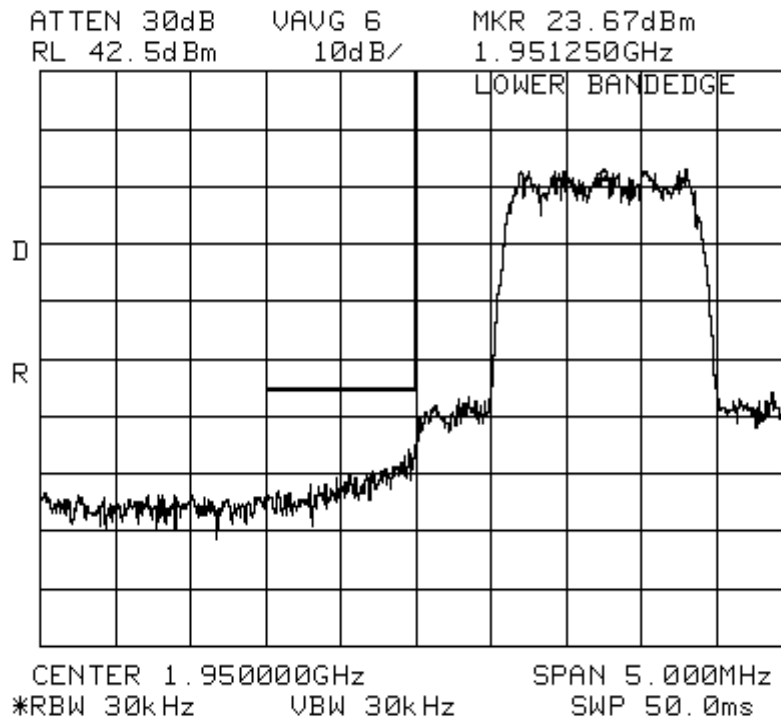


PROJECT # 8L0265E
LOWER BANDEDGE
BLOCK B
CHANNEL 425
FREQUENCY 1.95125 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

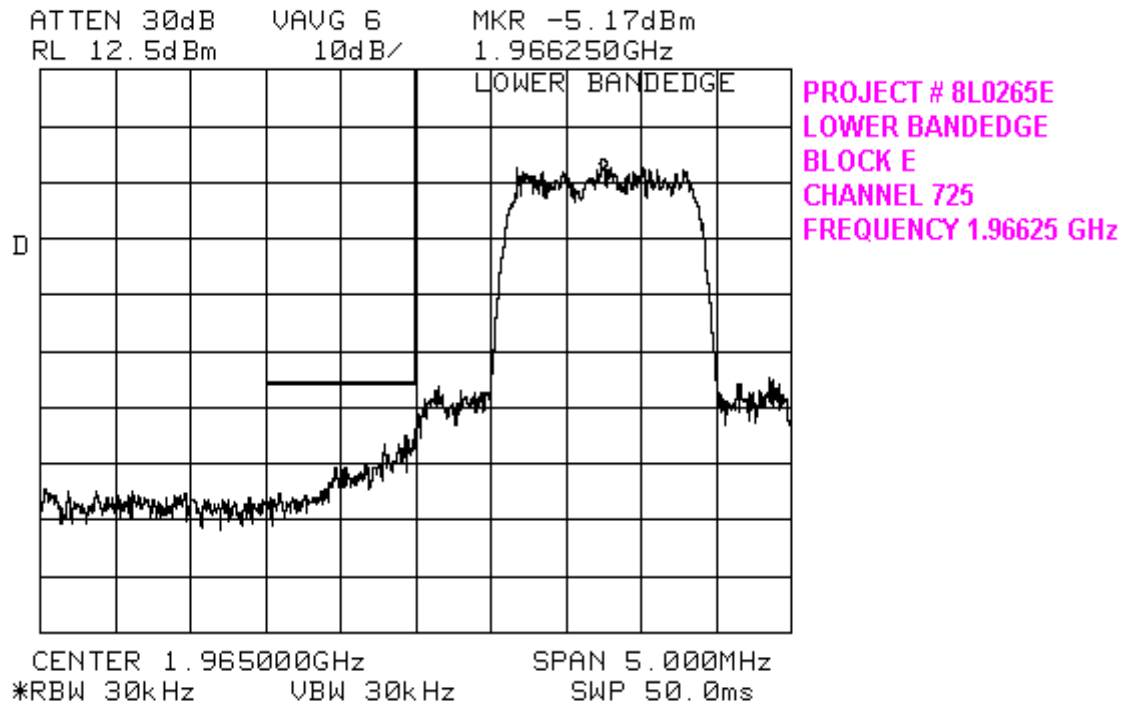


Reference level should be read as 42.5 dBm due to external attenuation of 30dB not compensated for in the above plot.

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

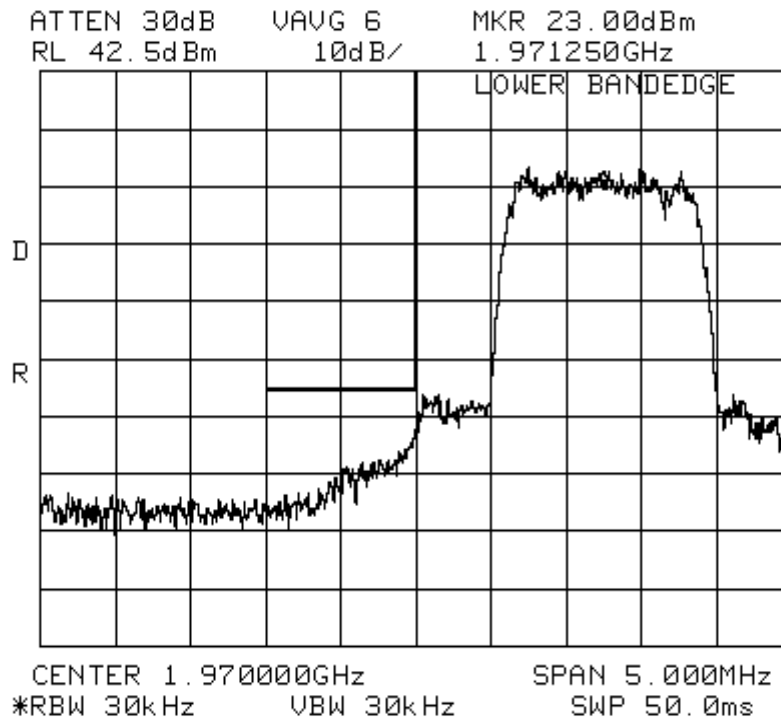


PROJECT # 8L0265E
LOWER BANDEDGE
BLOCK F
CHANNEL 825
FREQUENCY 1.97125 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

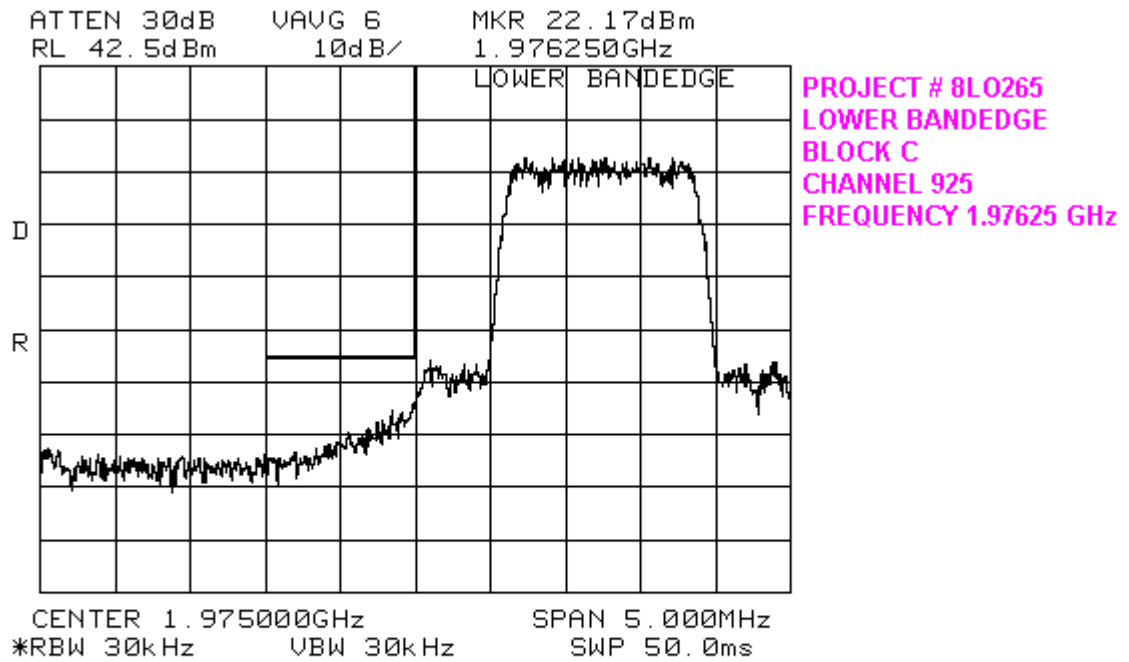


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

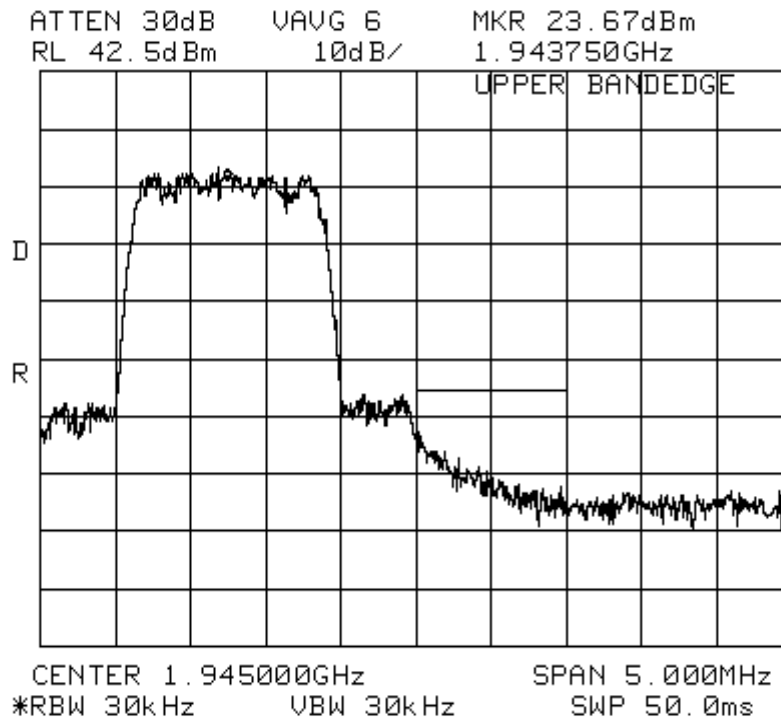


PROJECT # 8L0265E
UPPER BANDEDGE
BLOCK A
CHANNEL 275
FREQUENCY 1.94375 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

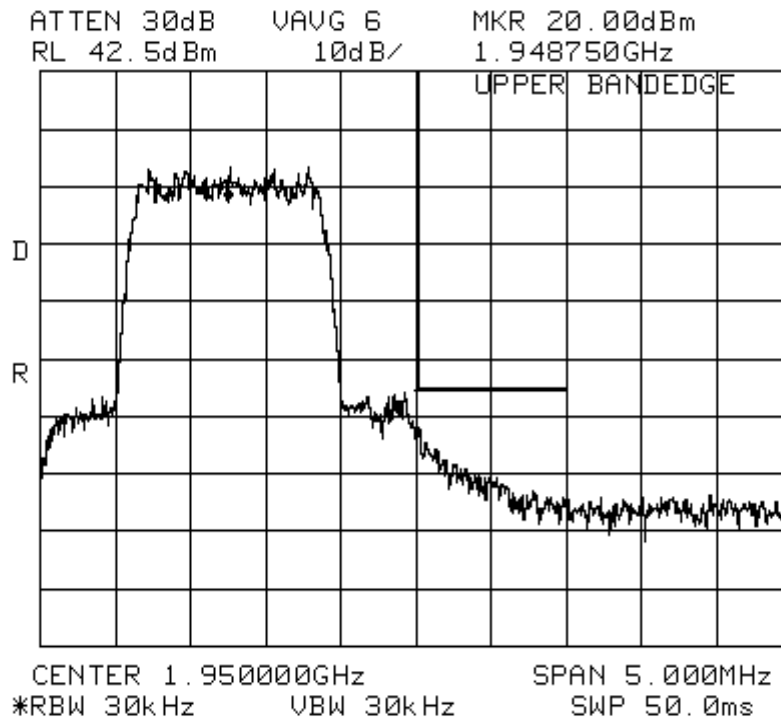


PROJECT # 8L0265E
UPPPER BANDEDGE
BLOCK D
CHANNEL 375
FREQUENCY 1.94875 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

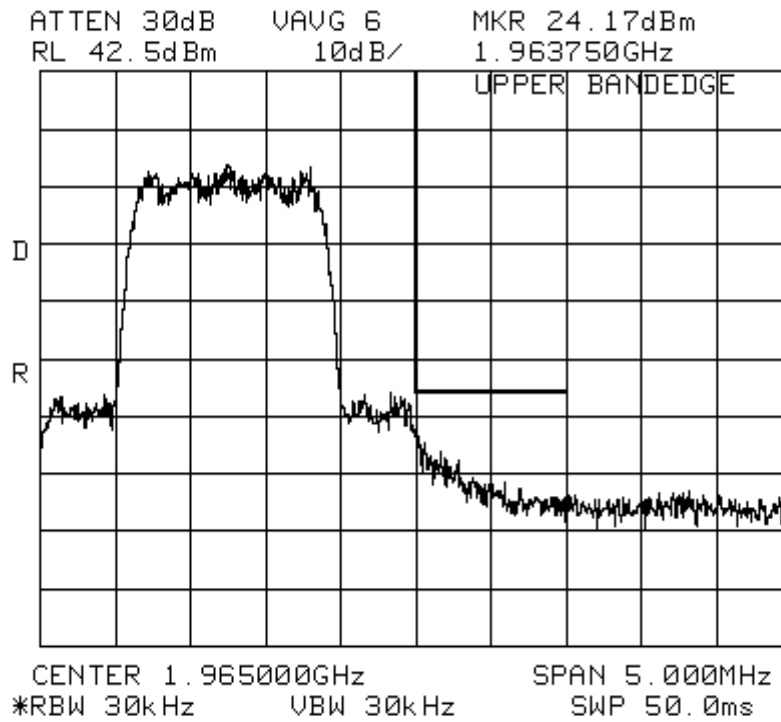


PROJECT # 8L0265E
UPPER BANDEDGE
BLOCK B
CHANNEL 675
FREQUENCY 1.96375 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

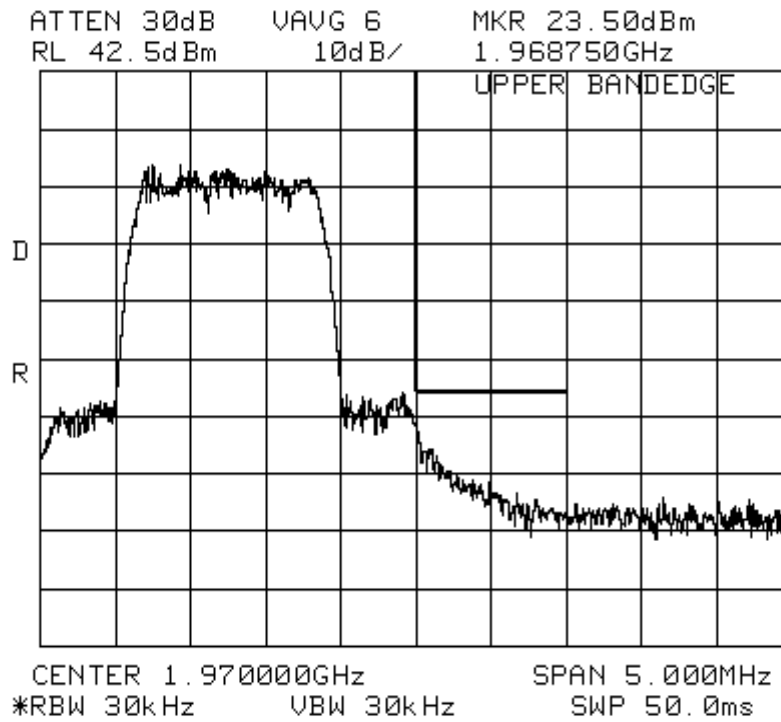


PROJECT # 8L0265E
UPPER BANDEDGE
BLOCK E
CHANNEL 775
FREQUENCY 1.96875 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

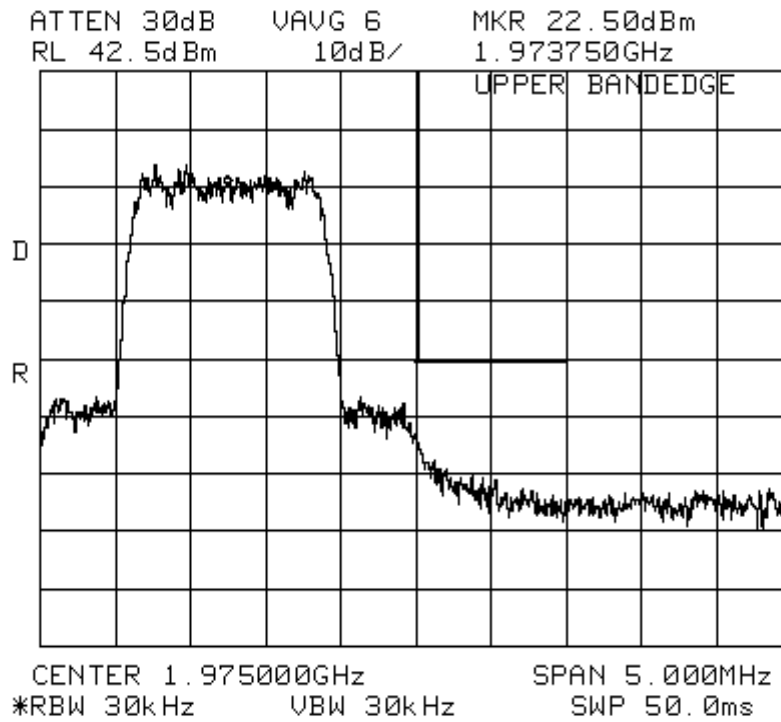

PROJECT # 8L0265E
UPPER BANDEDGE
BLOCK F
CHANNEL 875
FREQUENCY 1.97375 GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

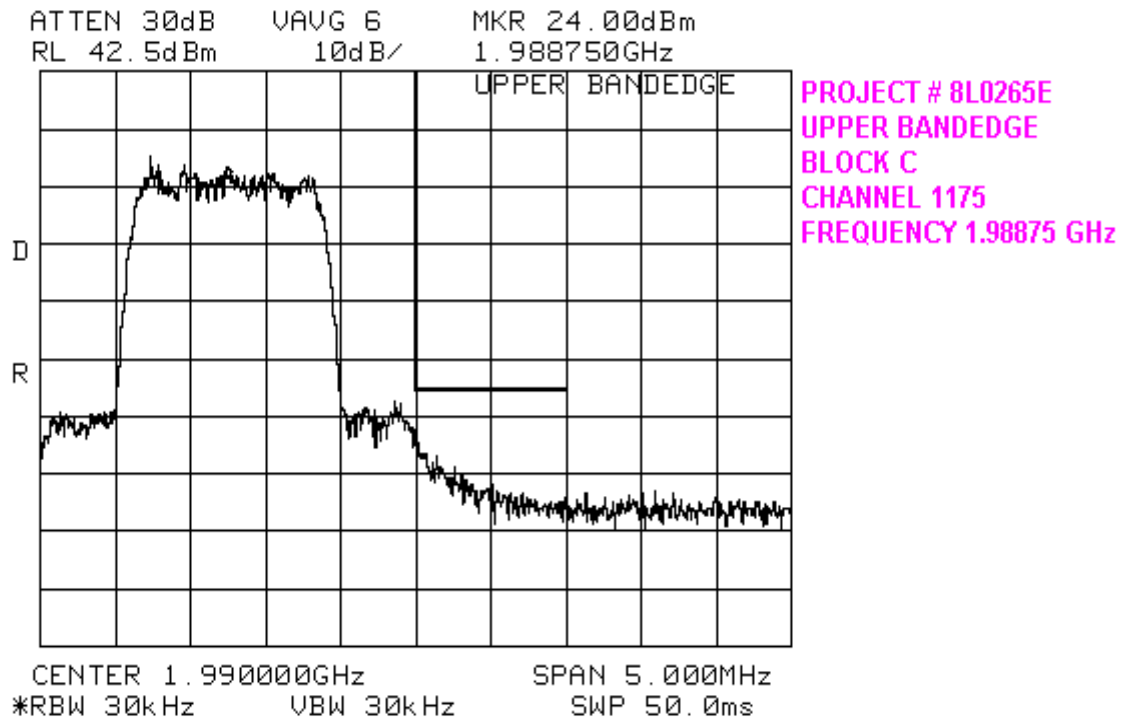


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data




Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	10 Inter-modulation
Test Date:	3/8/99	Polarization:	Block B channel 425, 550, 600
☒ Completed		☐ Preliminary	

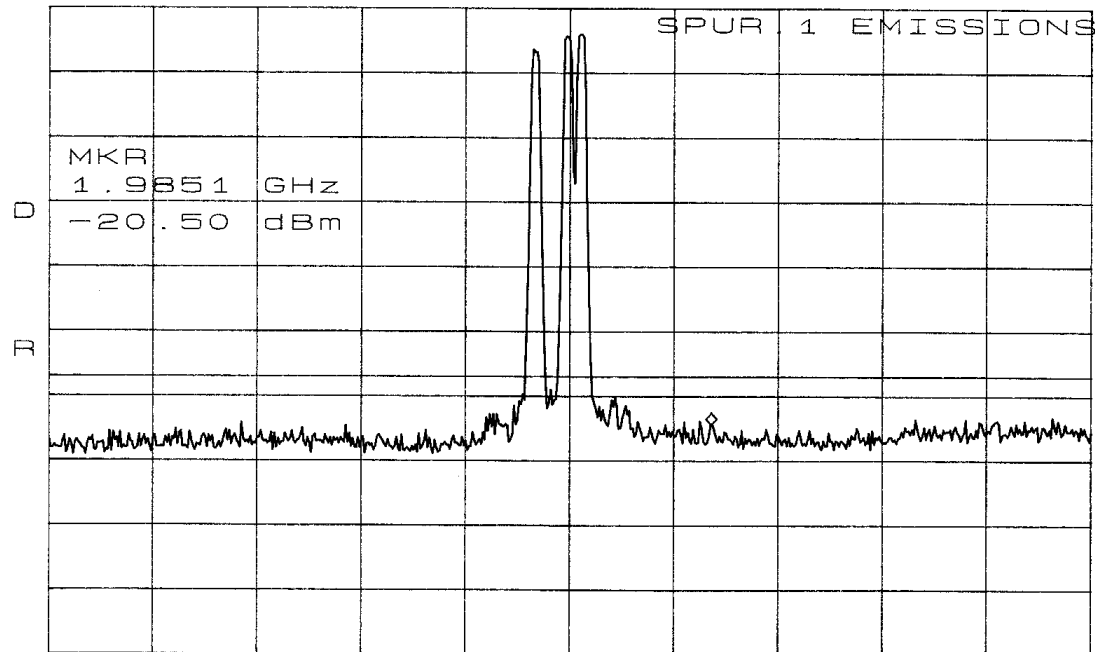ATTEN 30dB VAVG 6 MKR -20.50dBm
RL 44.0dBm 10dB/ 1.9851GHzCENTER 1.9581GHz SPAN 200.0MHz
*RBW 300kHz VBW 300kHz SWP 50.0ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data

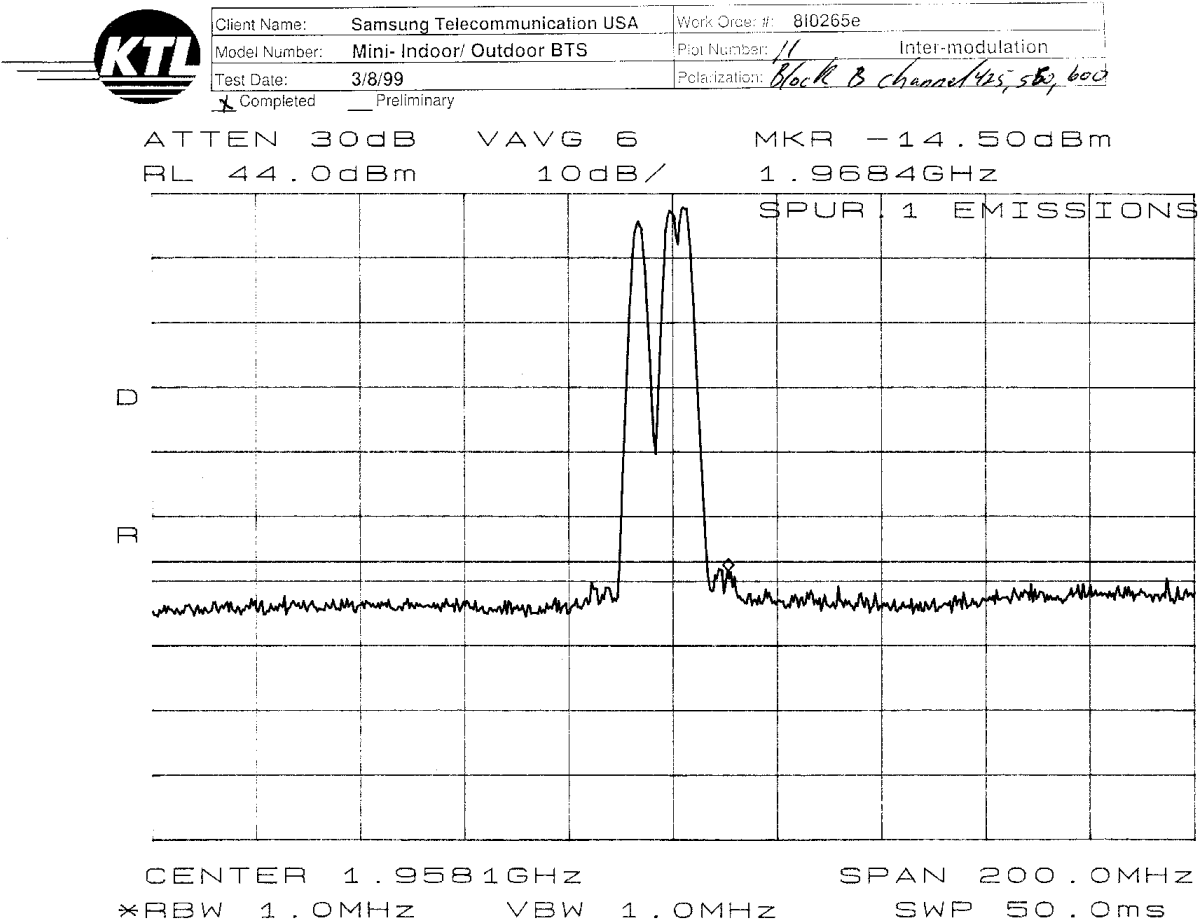


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	13 Inter-modulation
Test Date:	3/8/99	Polarization:	Block E channel 725, 725
☒ Completed ☐ Preliminary			

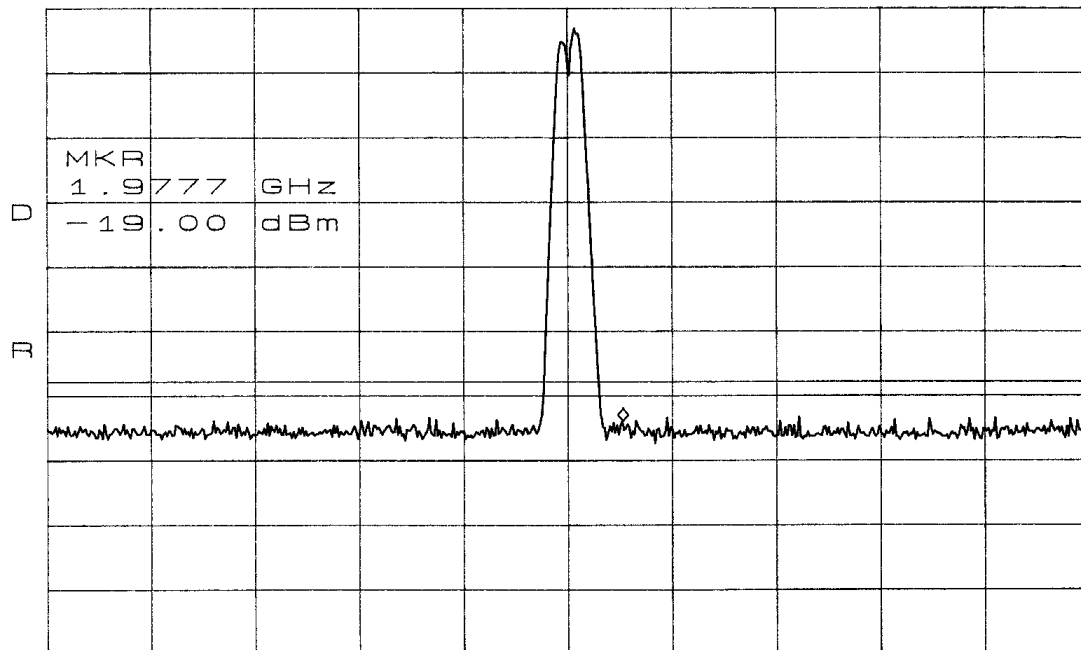ATTEN 30dB VAVG 6 MKR -19.00dBm
RL 45.0dBm 10dB/ 1.9777GHzCENTER 1.9674GHz SPAN 200.0MHz
RBW 1.0MHz VBW 1.0MHz *SWP 50.0ms


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	14 Inter-modulation
Test Date:	3/8/99	Polarization:	Block E Channel 725, 775
☒ Completed ☐ Preliminary			

ATTEN 30dB VAVG 6 MKR -20.50dBm
RL 45.0dBm 10dB/ 2.0094GHz

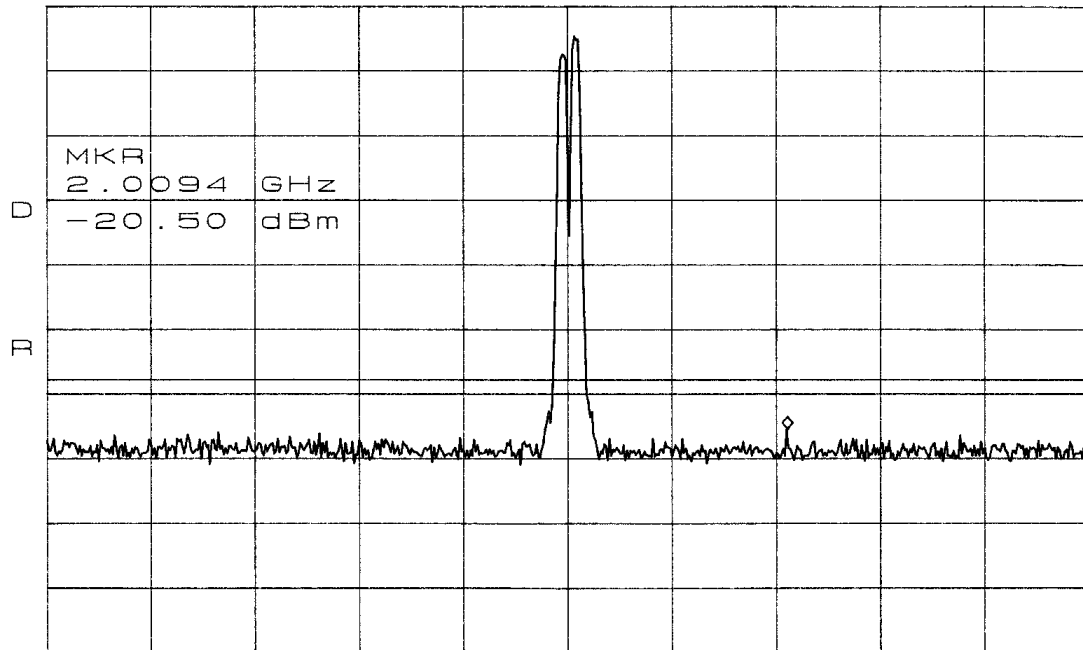


CENTER 1.9674GHz SPAN 200.0MHz
*RBW 300kHz VBW 300kHz *SWP 50.0ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	15 Inter-modulation
Test Date:	3/8/99	Polarization:	Block E channel 12.5, 775
☒ Completed		☐ Preliminary	

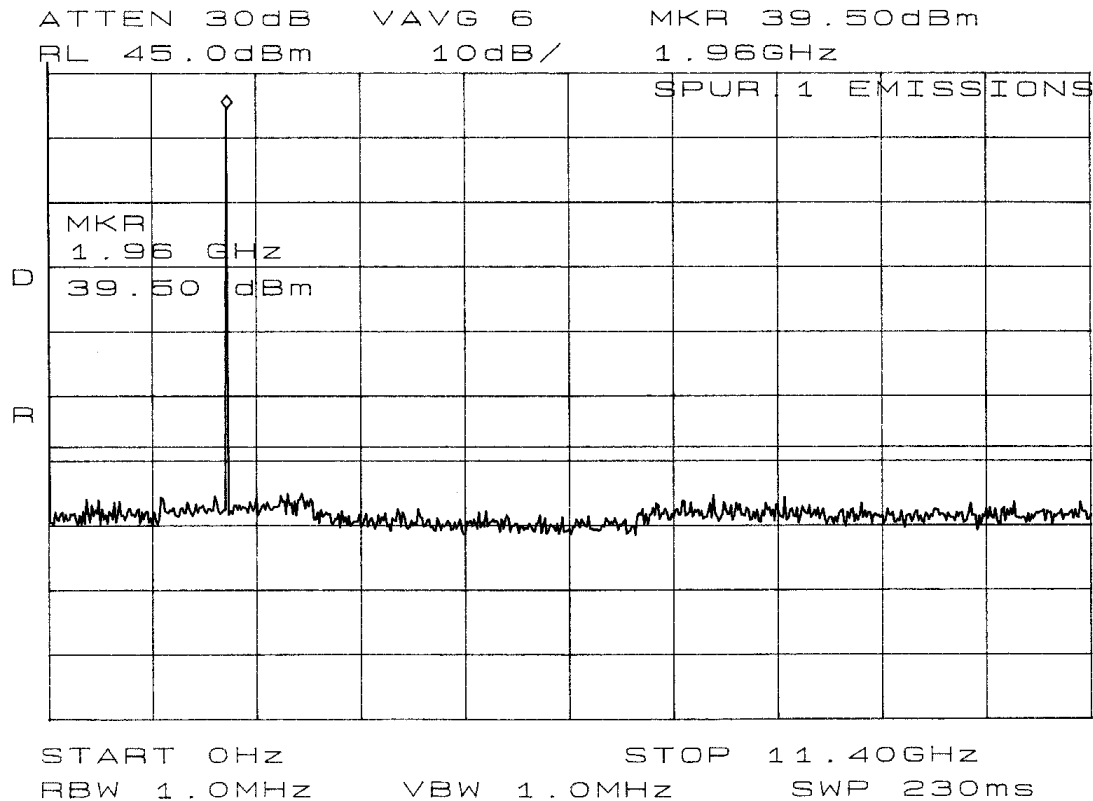


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	8L0265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	16 Inter-modulation
Test Date:	3/8/99	Polarization:	Rock @ channel 925, 975
☒ Completed		☐ Preliminary	

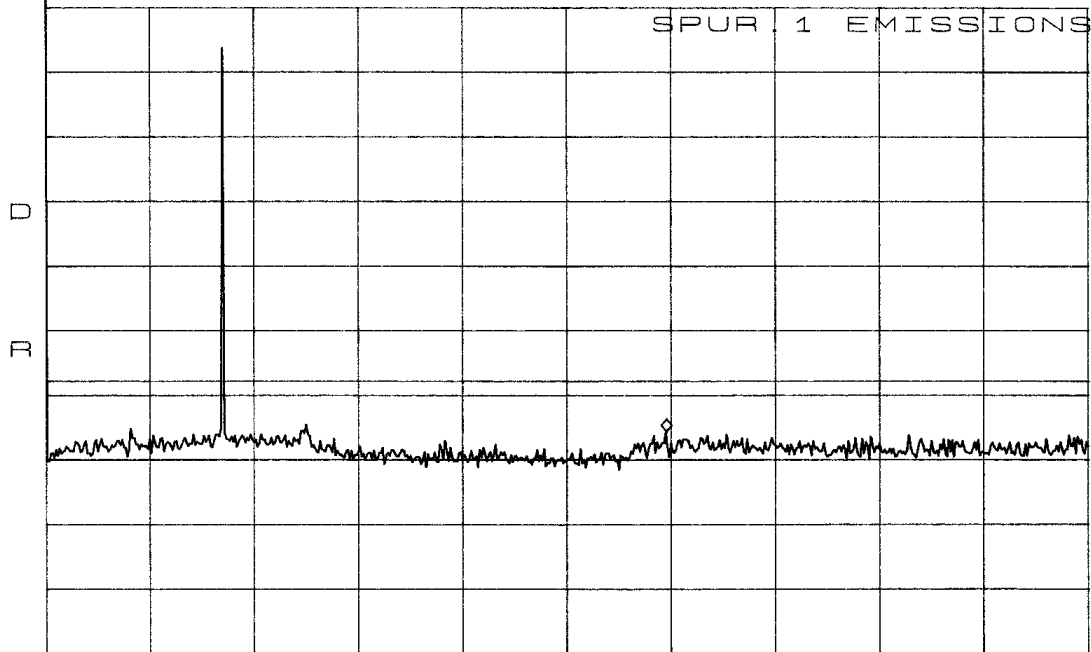ATTEN 30dB VAVG 6 MKR -20.67dBm
RL 45.0dBm 10dB/ 6.78GHzSTART 0Hz STOP 11.40GHz
RBW 1.0MHz VBW 1.0MHz SWP 230ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	8L0265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	17 Inter-modulation
Test Date:	3/8/99	Polarization:	Block D channel 325, 375
☒ Completed ☐ Preliminary			


ATTEN 30dB VAVG 6 MKR -21.17dBm
RL 45.0dBm 10dB/ 2.0055GHzCENTER 1.9465GHz SPAN 200.0MHz
*RBW 300kHz VBW 300kHz SWP 50.0ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data




Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	18 Inter-modulation
Test Date:	3/8/99	Polarization:	Block D channel 325, 315
☒ Completed		☐ Preliminary	

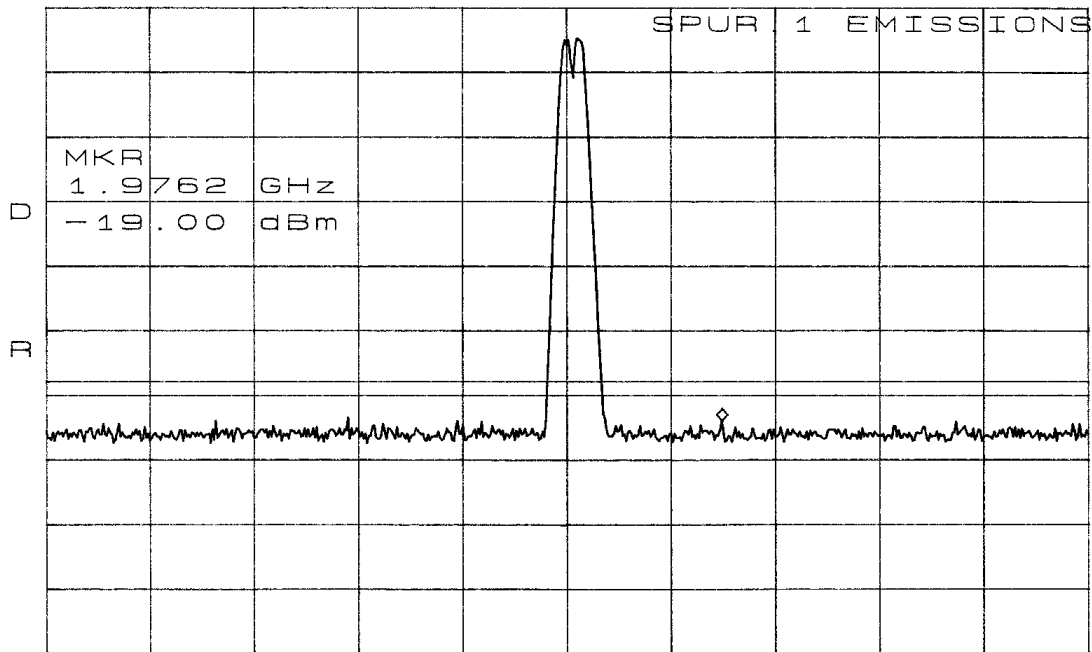ATTEN 30dB VAVG 6 MKR -19.00dBm
RL 45.0dBm 10dB/ 1.9762GHzCENTER 1.9465GHz SPAN 200.0MHz
*RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data

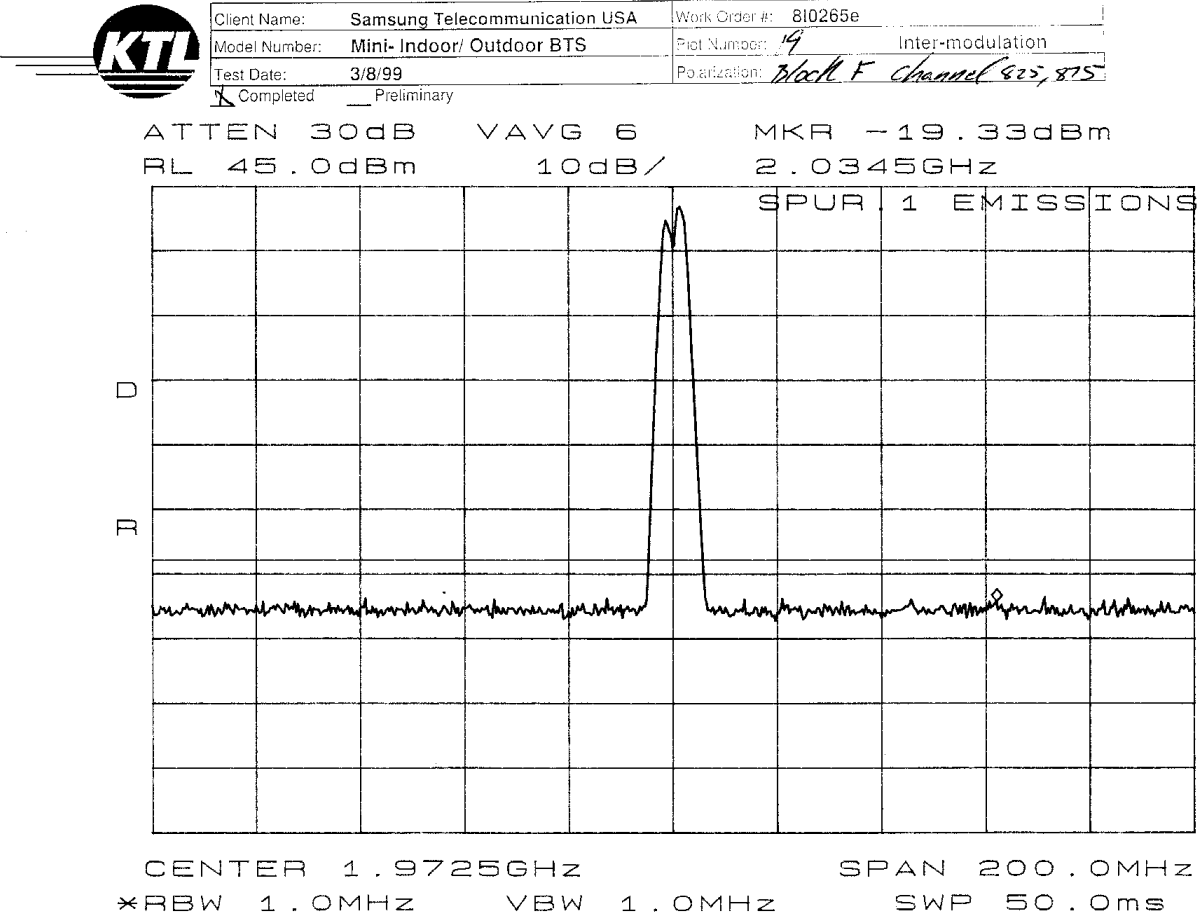


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order: #:	8L0265e
Model Number:	Mini- Indoor/ Outdoor BTS	Poi Number:	20 Inter-modulation
Test Date:	3/8/99	Polarization:	Block F Channel 825, 875
☒ Completed		☐ Preliminary	

ATTEN 30dB VAVG 6 MKR -20.50dBm
RL 45.0dBm 10dB/ 2.0395GHz

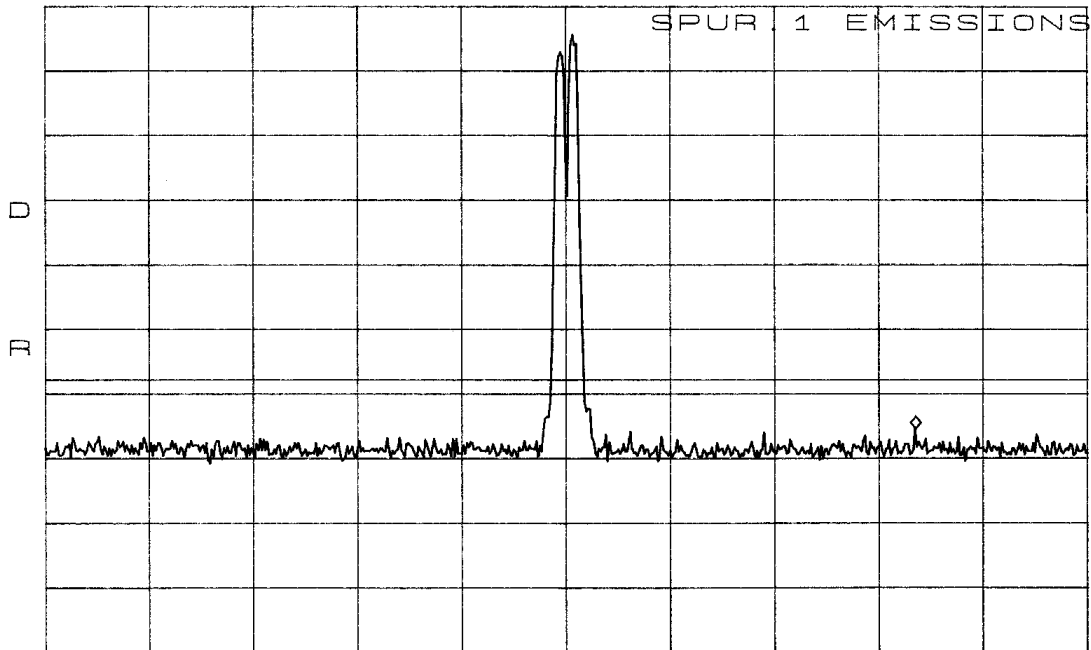

CENTER 1.9725GHz SPAN 200.0MHz
*RBW 300kHz VBW 300kHz SWP 50.0ms


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	2 / Inter-modulation
Test Date:	3/8/99	Polarization:	Block E Channel 825, 875
☒ Completed ☐ Preliminary			

ATTEN 30dB VAVG 6 MKR -18.83dBm
RL 45.0dBm 10dB/ 19.77GHz

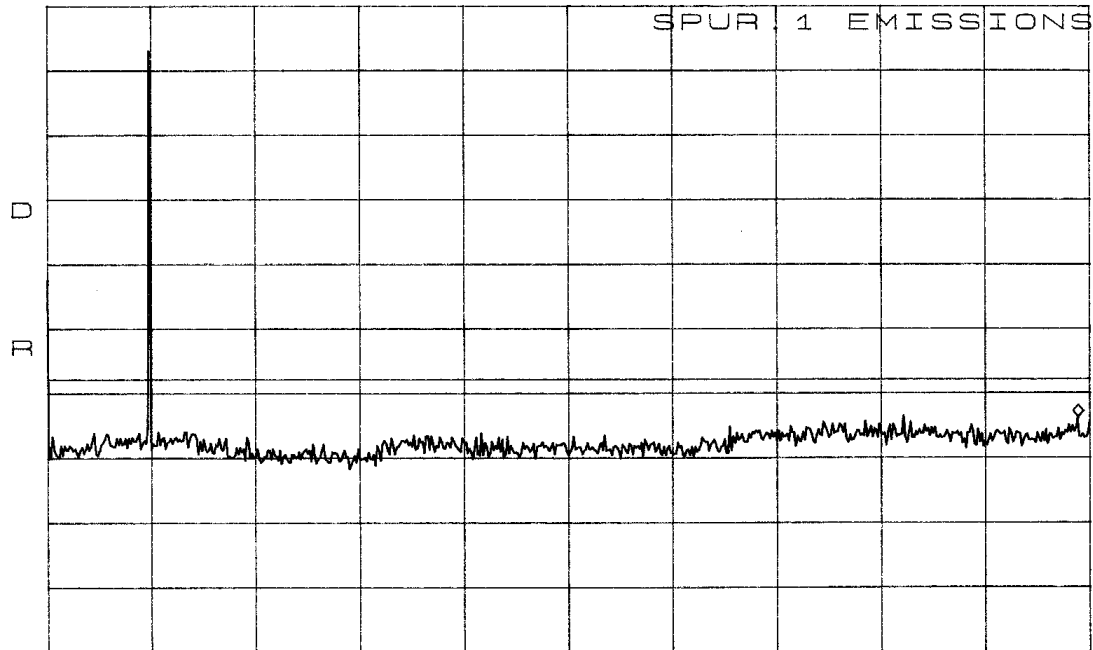

CENTER 10.00GHz SPAN 20.00GHz
*RBW 1.0MHz VBW 1.0MHz SWP 400ms


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	2 / Inter-modulation
Test Date:	3/8/99	Polarization:	Block E Channel 825, 875
☒ Completed ☐ Preliminary			

ATTEN 30dB VAVG 6 MKR -18.83dBm
RL 45.0dBm 10dB/ 19.77GHz

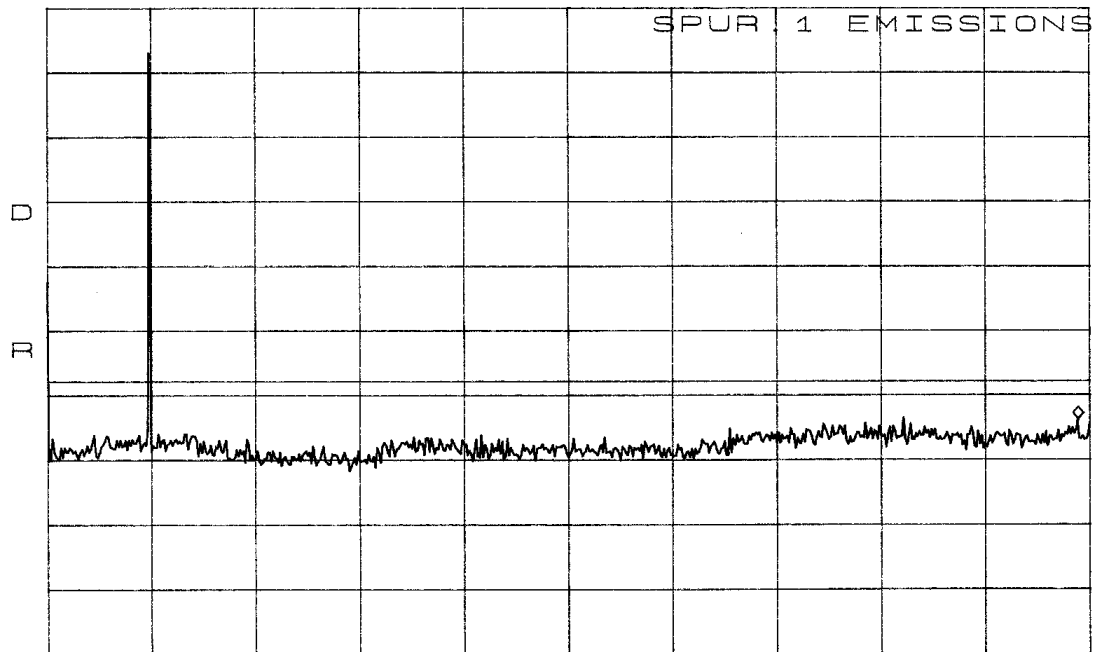

CENTER 10.00GHz SPAN 20.00GHz
*RBW 1.0MHz VBW 1.0MHz SWP 400ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	4 Inter-modulation
Test Date:	3/8/99	Polarization:	Back C Channel 925, 1050, 1190
☒ Completed	☐ Preliminary		

ATTEN 30dB VAVG 6 MKR -26.83dBm
RL 44.0dBm 10dB/ 2.0160GHz



CENTER 1.9833GHz SPAN 200.0MHz
*RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	1 Inter-modulation
Test Date:	3/8/99	Polarization:	4A Back channel 915, 1050, 1100
☒ Completed	☐ Preliminary		

ATTEN 30dB


MKR -23.67dBm

RL 44.0dBm

10dB/

1.99150GHz

SPUR 1 EMISSIONS

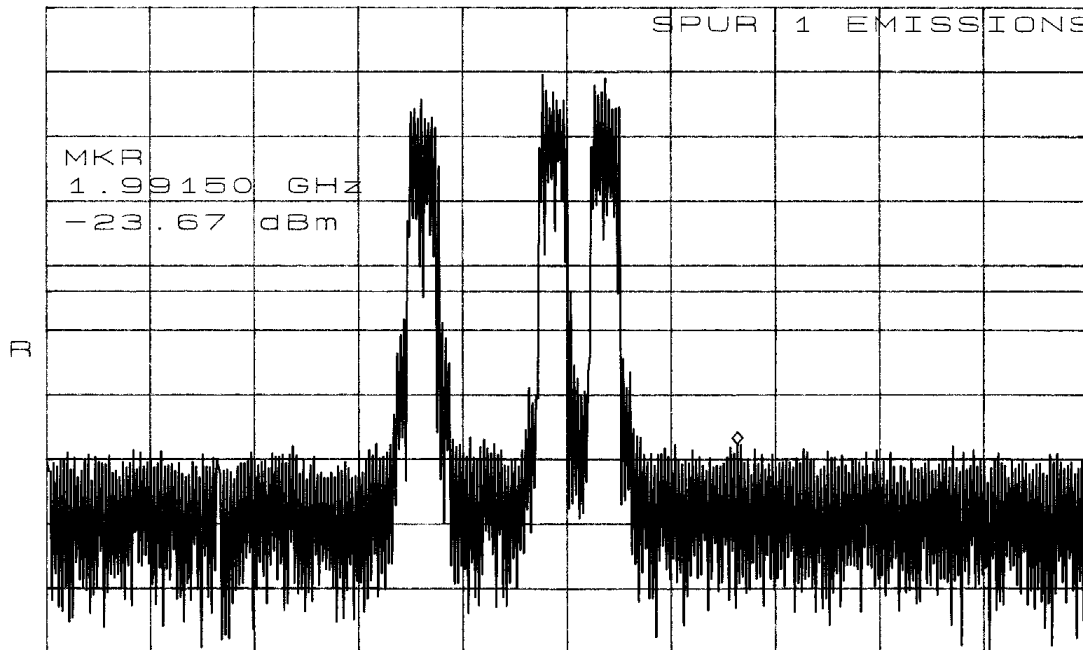

CENTER 1.98334GHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz


SWP 140ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data




Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	5 Inter-modulation
Test Date:	3/8/99	Polarization:	Block C channel 425, 1250, 1100
☒ Completed	☐ Preliminary		

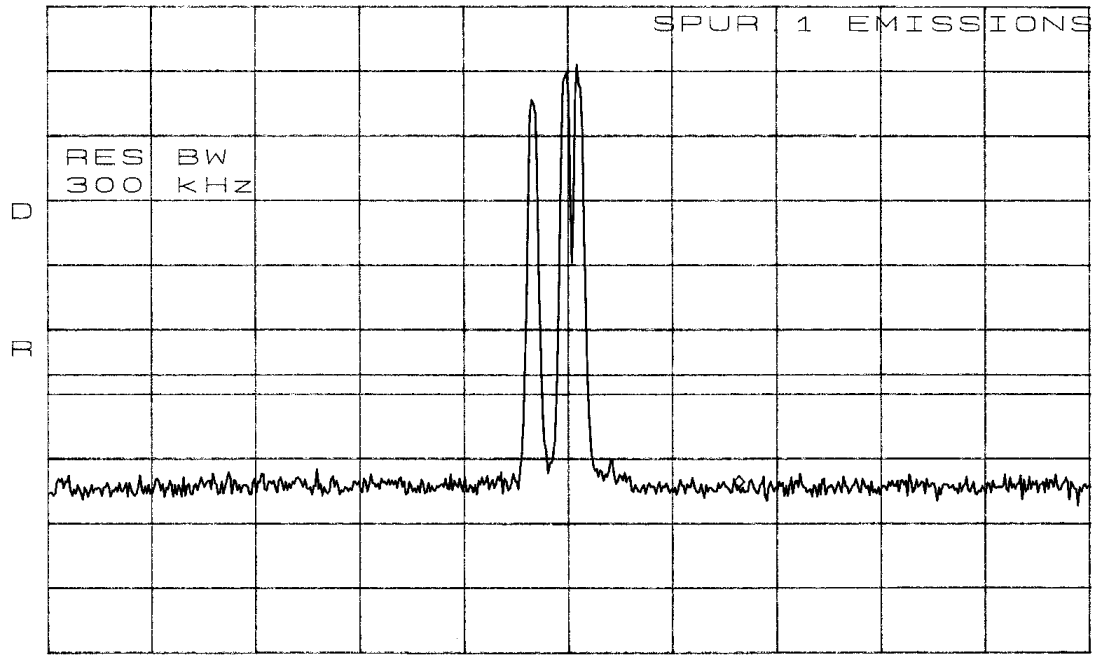ATTEN 30dB VAVG 6 MKR -30.50dBm
RL 44.0dBm 10dB/ 2.0160GHzCENTER 1.9833GHz SPAN 200.0MHz
*RBW 300KHZ VBW 300KHZ SWP 50.0ms


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data

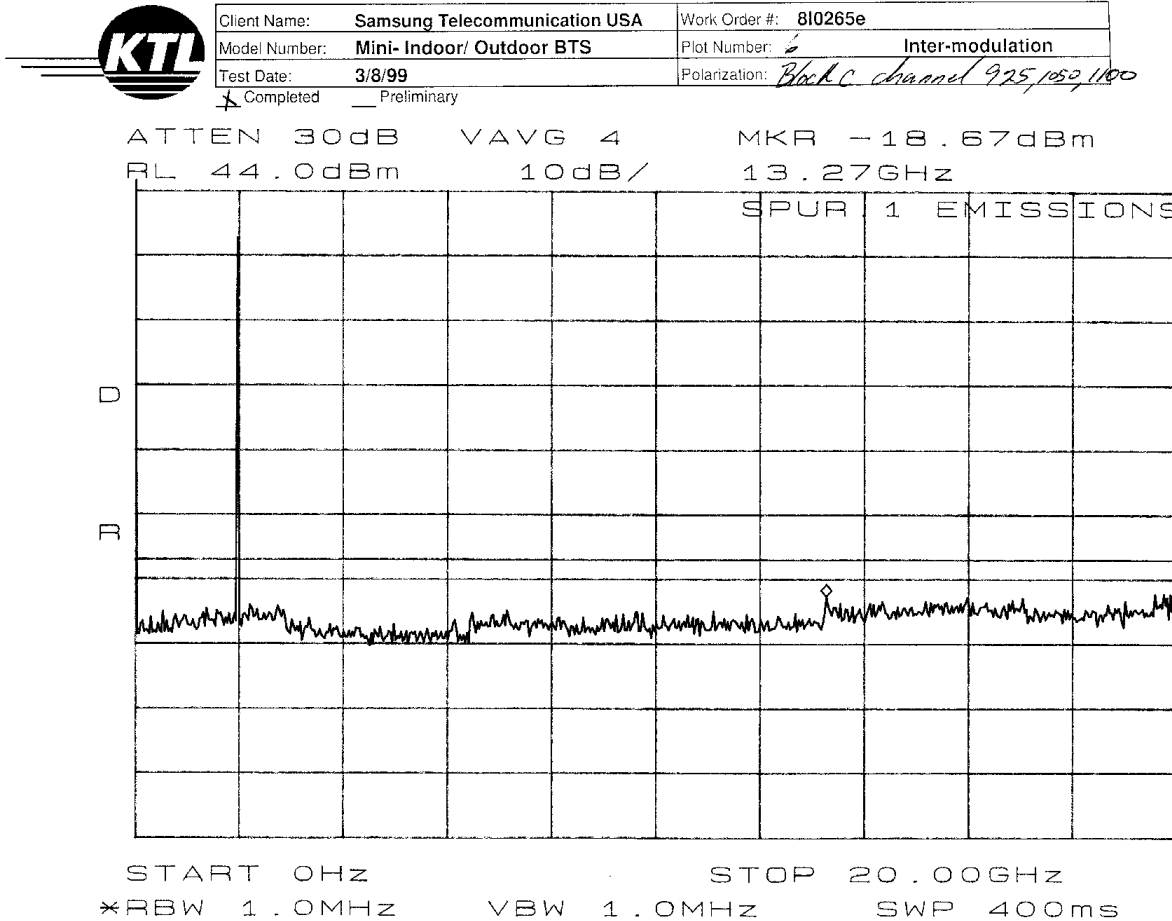

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data

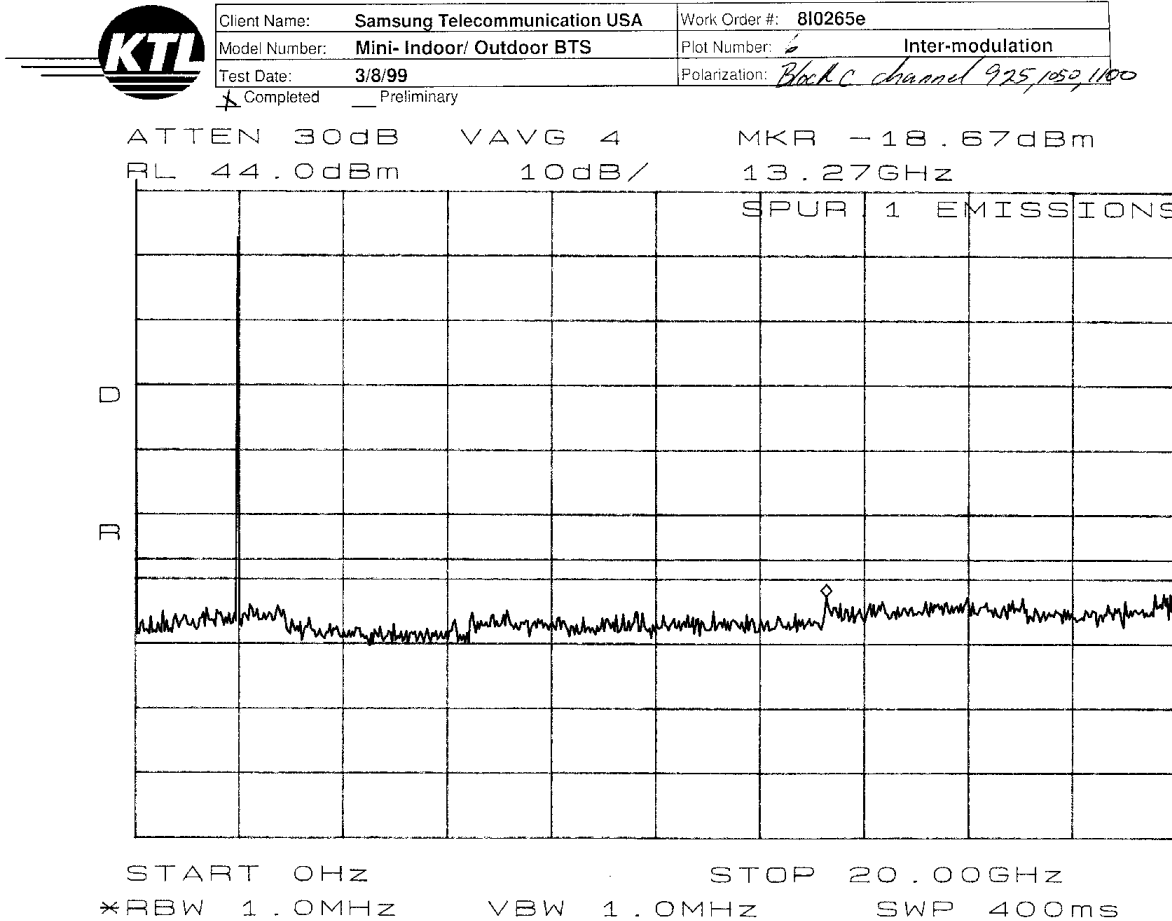


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	8I0265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	7 Inter-modulation
Test Date:	3/8/99	Polarization:	Block A channel 25, 150, 200
☒ Completed	☐ Preliminary		

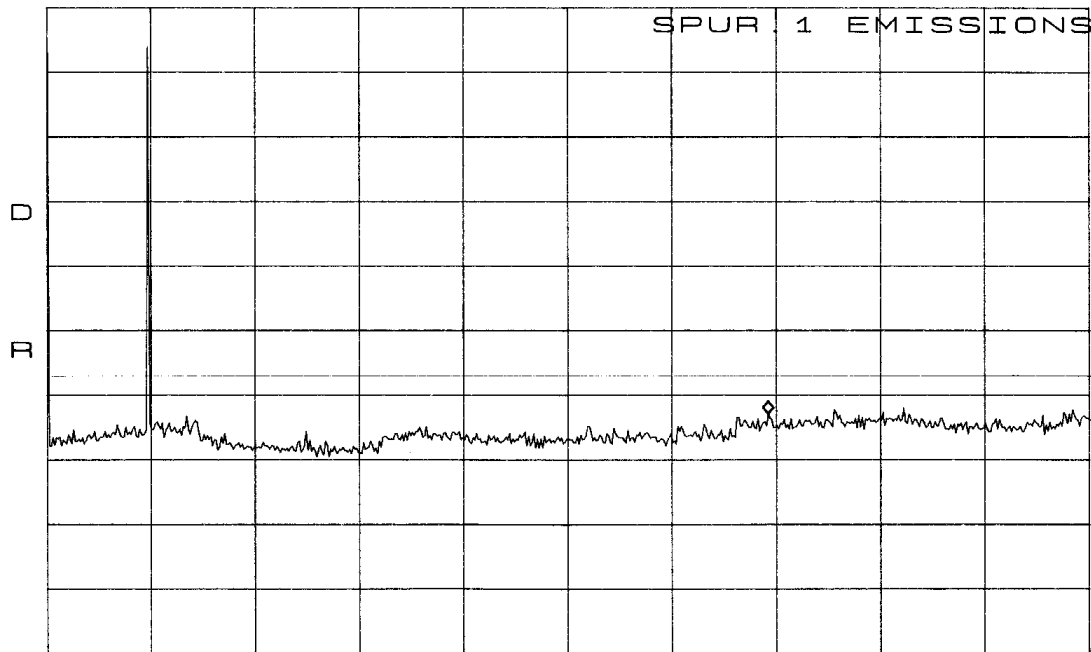ATTEN 30dB VAVG 6 MKR -18.83dBm
RL 44.0dBm 10dB/ 13.83GHzSTART OHZ STOP 20.00GHz
*RBW 1.0MHz VBW 1.0MHz SWP 400ms


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name:	Samsung Telecommunication USA	Work Order #:	810265e
Model Number:	Mini- Indoor/ Outdoor BTS	Plot Number:	8 Inter-modulation
Test Date:	3/8/99	Polarization:	Block A Channel 25, 150, 200
☒ Completed ☐ Preliminary			

ATTEN 30dB VAVG 6 MKR -27.00dBm
RL 44.0dBm 10dB/ 1.9764GHz

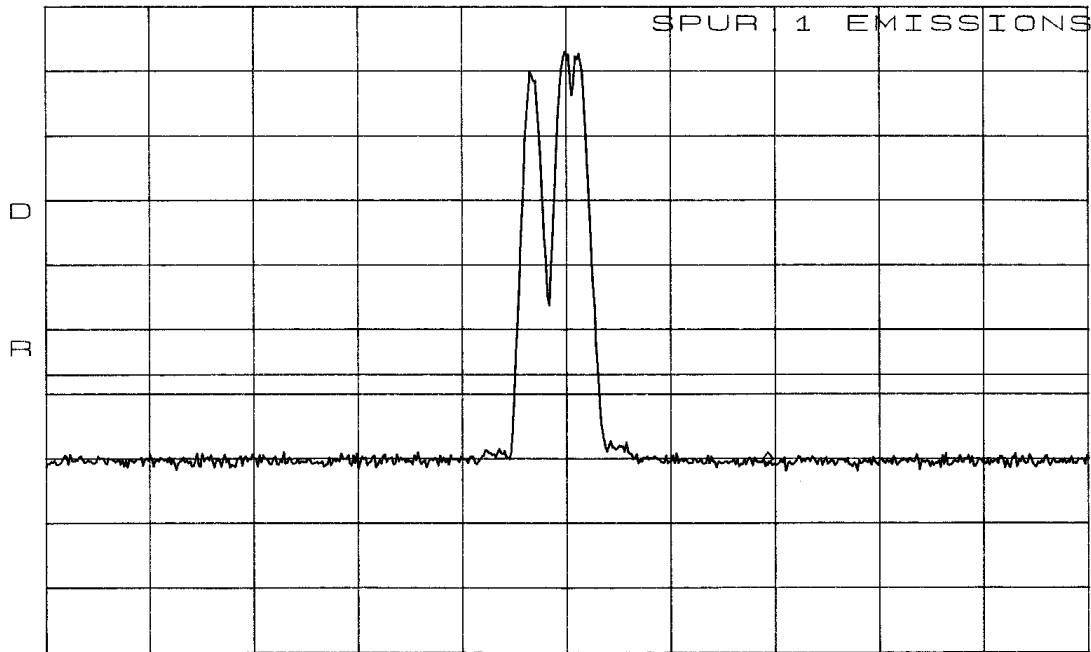

CENTER 1.9381GHz SPAN 200.0MHz
*RBW 1.0MHz VBW 1.0MHz SWP 50.0ms


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Inter- Modulation Data



Client Name: Samsung Telecommunication USA	Work Order #: 810265e
Model Number: Mini- Indoor/ Outdoor BTS	Plot Number: 9 Inter-modulation
Test Date: 3/8/99	Polarization: Rock A channel 25, 150, 200
☒ Completed ☐ Preliminary	

ATTEN 30dB VAVG 6 MKR -31.50dBm
RL 44.0dBm 10dB/ 1.9764GHz

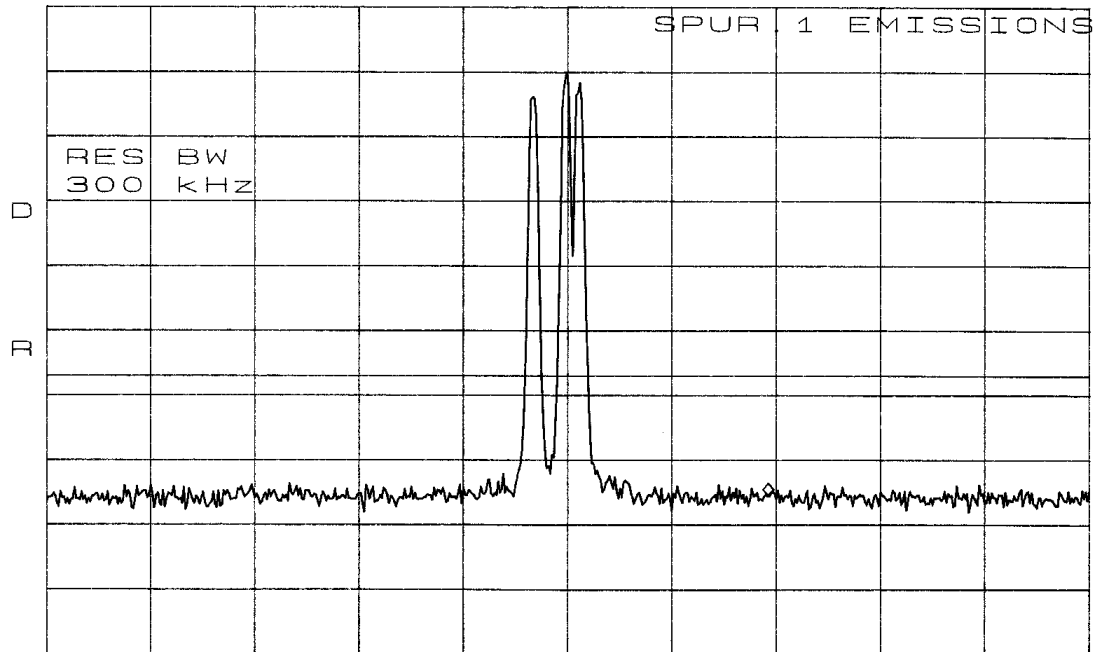

CENTER 1.9381GHz SPAN 200.0MHz
*RBW 300kHz VBW 300kHz SWP 50.0ms

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.1053
TESTED BY:	DATE:

Test Results:

Complies.

The maximum field strength is 69 dB μ V/m @ 3m.**Test Data:****Test Data-Radiated Microwave Emissions MW-1**

Freq. (GHz)	Meter Reading (dBm)	Antenna Factor (dB)	Cable Loss (dB)	RF Gain (dB)	Conver. Factor	Corrected Reading (dB μ V/m)	Spec. Limit (dB μ V/m)	Pol.	Comments:
1.816	-42	27.3	3.4	30.9	107	65	82.3	H	
3.614	-60	31.2	5.4	31.7	107	52	82.3	H	
3.632	-60	31.2	5.4	31.7	107	52	82.3	H	
5.462	-72	35.6	6.5	30	107	47	82.3	H	
9.035	-70	37.9	9.0	33	107	51	82.3	H	
1.815	-38	27.3	3.4	30.9	107	69	82.3	V	
3.619	-60	31.2	5.4	31.7	107	52	82.3	V	
3.632	-58	31.2	5.4	31.7	107	54	82.3	V	
5.462	-68	35.6	6.5	30	107	51	82.3	V	
9.038	-72	37.9	9.0	33	107	49	82.3	V	
									Scanned from 1-20GHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Test Data - Radiated Emissions RE-1

Emission Frequency (MHz)	Ant. Pol. (H/V)	Det. Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. Limit (dBuV/m)	CROSL Delta (dB)	Pass Fail Marginal	Notes
53.3	V	0.0	52.0	10.2	2.2	27.5	36.8	74.0	-37.2	Pass	REFER TO Q.P.
53.3	V	0.0	49.3	10.2	2.2	27.5	34.1	74.0	-39.9	Pass	Q.P.
59.0	V	0.0	58.8	9.6	2.2	27.5	43.1	74.0	-30.9	Pass	REFER TO Q.P.
59.0	V	0.0	57.5	9.6	2.2	27.5	41.8	74.0	-32.2	Pass	Q.P.
66.0	V	0.0	56.0	9.4	2.2	27.5	40.1	74.0	-33.9	Pass	REFER TO Q.P.
66.0	V	0.0	54.9	9.4	2.2	27.5	39.0	74.0	-35.0	Pass	Q.P.
69.7	V	0.0	57.0	9.3	2.2	27.5	41.0	74.0	-33.0	Pass	REFER TO Q.P.
69.7	V	0.0	55.6	9.3	2.2	27.5	39.6	74.0	-34.4	Pass	Q.P.
78.7	V	0.0	55.0	8.5	2.4	27.0	38.9	74.0	-35.1	Pass	REFER TO Q.P.
78.7	V	0.0	53.0	8.5	2.4	27.0	36.9	74.0	-37.1	Pass	Q.P.
108.4	V	0.0	42.0	10.5	3.0	27.0	28.5	74.0	-45.5	Pass	
113.7	V	0.0	40.0	10.7	3.0	27.0	26.8	74.0	-47.2	Pass	
118.0	V	0.0	48.7	11.0	3.0	27.0	35.7	74.0	-38.3	Pass	
128.3	V	0.0	53.5	11.8	3.4	27.1	41.6	74.0	-32.4	Pass	REFER TO Q.P.
128.3	V	0.0	52.6	11.8	3.4	27.1	40.7	74.0	-33.3	Pass	Q.P.
138.6	V	0.0	58.0	12.3	3.4	27.1	46.6	74.0	-27.4	Pass	REFER TO Q.P.
138.6	V	0.0	57.0	12.3	3.4	27.1	45.6	74.0	-28.4	Pass	Q.P.
148.5	V	0.0	60.0	13.1	3.4	27.1	49.4	74.0	-24.6	Pass	REFER TO Q.P.
148.5	V	0.0	59.3	13.1	3.4	27.1	48.7	74.0	-25.3	Pass	Q.P.
178.2	V	0.0	49.0	14.1	4.7	27.1	40.7	74.0	-33.3	Pass	REFER TO Q.P.
178.2	V	0.0	48.0	14.1	4.7	27.1	39.7	74.0	-34.3	Pass	Q.P.
198.0	V	0.0	45.0	15.0	4.7	27.1	37.6	74.0	-36.4	Pass	
287.9	V	0.0	39.0	17.3	5.3	27.2	34.4	74.0	-39.6	Pass	
53.3	H	0.0	39.0	10.2	2.2	27.5	23.8	74.0	-50.2	Pass	
59.0	H	0.0	50.0	9.7	2.2	27.5	34.4	74.0	-39.6	Pass	Q.P.
59.4	H	0.0	50.0	9.6	2.2	27.5	34.3	74.0	-39.7	Pass	Q.P.
66.0	H	0.0	45.5	9.4	2.2	27.5	29.6	74.0	-44.4	Pass	Q.P.
69.7	H	0.0	45.5	9.3	2.2	27.5	29.5	74.0	-44.5	Pass	Q.P.
78.8	H	0.0	48.2	8.5	2.4	27.0	32.1	74.0	-41.9	Pass	Q.P.
79.2	H	0.0	44.1	8.4	2.4	27.0	27.9	74.0	-46.1	Pass	Q.P.
118.0	H	0.0	35.3	11.0	3.0	27.0	22.3	74.0	-51.7	Pass	Q.P.
128.4	H	0.0	41.1	11.8	3.4	27.1	29.2	74.0	-44.8	Pass	Q.P.
135.7	H	0.0	44.5	12.2	3.4	27.1	33.0	74.0	-41.0	Pass	Q.P.
138.6	H	0.0	46.5	12.3	3.4	27.1	35.1	74.0	-38.9	Pass	Q.P.
148.5	H	0.0	49.8	13.1	3.4	27.1	39.2	74.0	-34.8	Pass	Q.P.
157.3	H	0.0	43.0	13.3	3.4	27.1	32.6	74.0	-41.4	Pass	Q.P.
158.4	H	0.0	42.3	13.3	3.4	27.1	31.9	74.0	-42.1	Pass	Q.P.
177.0	H	0.0	32.1	13.8	4.7	27.1	23.5	74.0	-50.5	Pass	Q.P.
178.2	H	0.0	41.3	14.1	4.7	27.1	33.0	74.0	-41.0	Pass	Q.P.
198.0	H	0.0	41.0	15.0	4.7	27.1	33.6	74.0	-40.4	Pass	Q.P.
216.2	H	0.0	37.2	15.1	4.7	27.2	29.8	74.0	-44.2	Pass	Q.P.
218.0	H	0.0	36.6	15.1	4.7	27.2	29.2	74.0	-44.8	Pass	Q.P.
231.0	H	0.0	30.8	15.5	4.7	27.2	23.8	74.0	-50.2	Pass	Q.P.
259.1	H	0.0	34.2	18.1	5.3	27.2	30.4	74.0	-43.6	Pass	Q.P.
288.0	H	0.0	36.8	17.2	5.3	27.2	32.1	74.0	-41.9	Pass	Q.P.
360.0	V	0.0	37.0	4.4	5.9	27.3	20.0	74.0	-54.0	Pass	
594.0	V	0.0	34.0	5.5	8.0	27.9	19.6	74.0	-54.4	Pass	
799.8	V	0.0	48.0	12.0	10.0	28.2	41.8	74.0	-32.2	Pass	AMBIENT
360.0	H	0.0	38.7	12.0	5.9	27.3	17.3	74.0	-56.7	Pass	
495.0	H	0.0	29.0	18.9	7.0	27.8	27.1	74.0	-46.9	Pass	
799.8	H	0.0	50.0	21.0	10.0	28.2	52.8	74.0	-21.2	Pass	AMBIENT
											Scanned from 30-1000MHz

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Photographs of Test Setup

FRONT VIEW




Note: Photo on D oats is unavailable, However the preliminary Microwave setup was an identical test configuration.

BICONICAL ANTENNA VIEW



EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

HORN ANTENNA VIEW

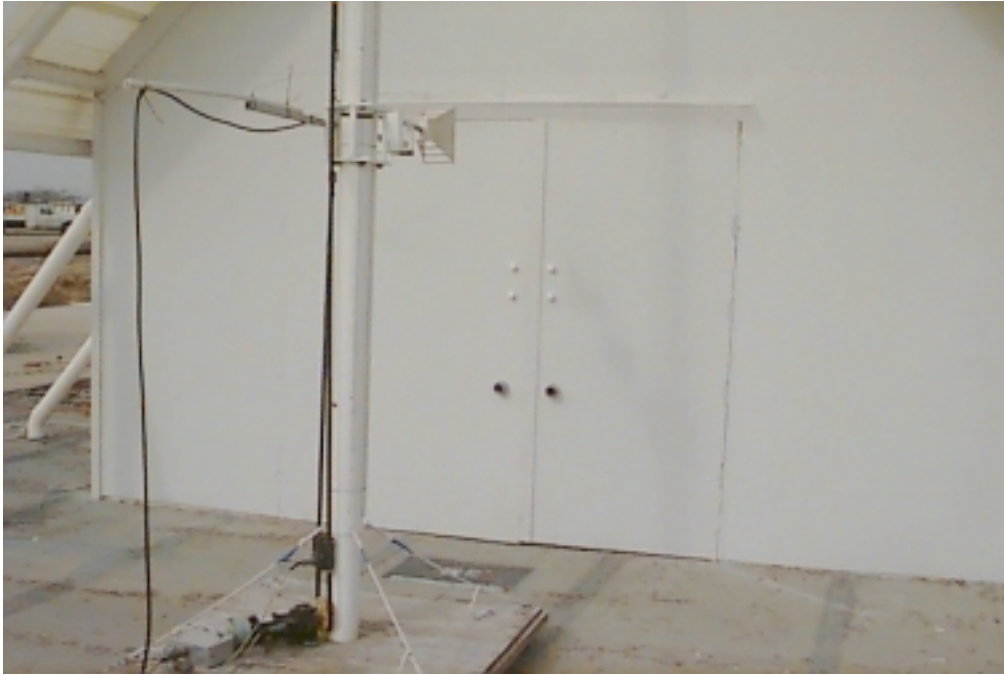

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Section 7. Frequency Stability

NAME OF TEST: Frequency Stability	PARA. NO.: 24.235
TESTED BY: Ron Gaytan	DATE: February 17, 1999

Test Results: Complies**Measurement Data:** Standard Test Frequency: 1967.5 MHz
Standard Test Voltage: 27 VAC

See attached tables.

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI**Frequency Stability (OUTDOOR)**

Nominal

VOLTAGE	FREQUENCY TOLERANCE(Hz)	TIME REF. (μ Sec.)	RHO	POWER (dBm)
27 VDC	73	.34	.97	42.5

VOLTAGE VARIATION

VOLTAGE	FREQUENCY TOLERANCE (Hz)	TIME REF. (μ Sec.)	RHO	POWER (dBm)
85% S.T.V. (22.95 VDC)	44	.32	.97	
100% S.T.V. (27.0 VDC)	-36	.34	.97	42.4
115% S.T.V. (31.05) VDC	Unable to take Measurements			

Note: Transmitter shuts down at 30.3 VDC as measured at Transmitter**TEMPERATURE VARIATION**

TEMPERATURE (°C)	FREQUENCY TOLERANCE (Hz)	TIME REF. (μ Sec.)	RHO	POWER (dBm)
-30	-11	.59	.97	42.5
-20	-5	.43	.97	42.5
-10	-6	.41	.97	42.5
0	6	.43	.97	42.5
10	-4	.34	.97	42.4
30	-33	.31	.97	42.4
40	-12	.32	.97	42.4
50	17.8	.31	.97	42.4

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI**Section 8. Test Equipment List**

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items is typically 12 months from the calibration date shown.

<u>KTL(ICC) ID</u>	<u>Nomenclature</u>	<u>Manufacturer Model Number</u>	<u>Serial Number</u>	<u>Calibration Date</u>
C5D	D O.A.T.S. Cable Set			12/14/98
CF01	Storm Cable (7.7 meters)			04/28/98
CF30	Storm Cable (1.0 meter)	Semi Flex		01/13/99
151	Receiver (20-1000 MHz)	Rohde & Schwarz ESVS 30	843710/0001	04/01/99
156	Digital Power Meter	Hewlett Packard 436A	2512A22082	02/09/99
183	Limiter	Fischer FCC-450B-1.2	NSN	02/27/98
200	Log-Periodic Antenna (300 MHz - 1.8 GHz)	A.H. Systems SAS-200/510	121	01/25/99
228	Antenna-Biconical	ICC BCON-30300		11/17/98
243	Dipole Antenna	A.H. Systems TDS-200/335	151	03/09/99
494	Horn Antenna	A.H. Systems SAS-200/571	162	08/13/98
934	Horn Antenna (18-26.5 GHz)	EMCO 3160-09	9705-1079	CNR
946	27dB Gaing Preamp	ICC 27dB LNA	946	04/09/98
960	Power Sensor	Hewlett Packard 8482H	1926A01090	02/16/99
G1017B	Attenuator	Narda 776B-20	None	08/14/98
G1018	Attenuator	Narda 10 dB	776B-10	10/27/98
EM2200	Amplifier	Hewlett Packard 8449A	2749A00159	05/22/98

EQUIPMENT: Indoor Mini BTS
*FCC ID:NP817-4WIDMINI***Test Equipment List (Continued):**

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items is typically 12 months from the calibration date shown.

<u>KTL(ICC) ID</u>	<u>Nomenclature</u>	<u>Manufacturer Model Number</u>	<u>Serial Number</u>	<u>Calibration Date</u>
G2624	Spectrum Analyzer	Hewlett Packard 8563E	3551A04428	10/05/98
ETL # 017	Temperature Chamber	Thermotron		CNR
ETL # 1020	Temperature Controller	Micristar		10/14/99
ETL # 1107	Temperature Recorder	Honeywell		05/18/99
		LAB #3 OPEN AREA (INDOOR)		
		SITE D O.A.T.S. (OPEN AREA TEST SITE) 30 Meter Site		
	Turntable Flush Mounted, Metal Covered, 12 Foot	A.H. Systems (Automated)		CNR
	Antenna Mast, 5 Meter	ICC (Automated)		CNR

EQUIPMENT: Indoor Mini BTS
FCC ID: NP817-4WIDMINI

ANNEX A
TEST METHODOLOGIES

EQUIPMENT: Indoor Mini BTS
FCC ID: NP817-4WIDMINI

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
--------------------------------------	--------------------------

Minimum Standard: Para. No.24.232. Base stations are limited to 1640 watts peak E.I.R.P. with an antenna height up to 300 meters HAAT. In no case may the peak output power of a base station transmitter exceed 100 watts.

Method Of Measurement: CDMA Per ANSI/J-STD-014
TDMA Per ANSI/J-STD-010

Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter or a spectrum analyzer.

Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

EQUIPMENT: Indoor Mini BTS
FCC ID: NP817-4WIDMINI

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
---	--------------------------

Minimum Standard:

Para. No. 24.238(b). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB.

Method Of Measurement:

CDMA Per ANSI/J-STD-014

Spectrum analyzer settings:

RBW: 30 kHz

VBW: $\geq$ RBW

Span: 5 MHz

Sweep: Auto

GSM Per ANSI/J-STD-010

RBW: 3 kHz

VBW: $\geq$ RBW

Span: 2 MHz

Sweep: Auto

NADC Per IS-136

RBW: 1 kHz

VBW: $\geq$ RBW

Span: 1 MHz

Sweep: Auto

EQUIPMENT: Indoor Mini BTS
FCC ID: NP817-4WIDMINI

NAME OF TEST: Spurious Emission at Antenna Terminals	PARA. NO.: 2.1051
---	--------------------------

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Method Of Measurement:

Spectrum analyzer settings:

CDMA Per ANSI/J-STD-014RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 30 kHz (< 1 MHz from Band Edge)
VBW: $\geq$ RBW
Sweep: Auto
Video Avg: 6 SweepsGSM Per ANSI/J-STD-010RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: $\geq$ RBW
Sweep: Auto
Video Avg: DisabledNADC Per IS-136RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: $\geq$ RBW
Sweep: Auto
Video Avg: Disabled

To demonstrate compliance at band edges the frequency of the input signal is set to the lowest and highest assigned channel and the center frequency of the spectrum analyzer is set to the upper and lower edges of the appropriate frequency block.

EQUIPMENT: Indoor Mini BTS
FCC ID: NP817-4WIDMINI

NAME OF TEST: Field Strength of Spurious Radiation	PARA. NO.: 2.1053
--	-------------------

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Calculation Of Field Strength Limit

An example of attenuation requirement of $43 + 10 \log P$ is equivalent to -13 dBm (5×10^{-5} Watts) at the antenna terminal. We determine the field strength limit by using the plane wave relation.

$$GP/4\pi R^2 = E^2/120\pi$$

For emissions ≤ 1 GHz:

$G = 1.64$ (Dipole Gain)

$P = 10^{-5}$ Watts (Maximum spurious output power)

$R = 3\text{m}$ (Measurement Distance)

$$E = \frac{\sqrt{30GP}}{R}$$

$$E = \frac{\sqrt{30 \times 1.64 \times 5 \times 10^{-5}}}{3} = 0.016533 \text{ V / m} = 84.4 \text{ dB}\mu\text{V / m}$$

For emissions > 1 GHz:

$G = 1$ (Isotropic Gain)

$P = 1 \times 10^{-5}$ Watts (Maximum spurious output power)

$R = 3\text{m}$ (Measurement Distance)

$$E = 84.4 - 20 \log \sqrt{1.64} = 82.3 \text{ dB}\mu\text{V / m} @ 3\text{m}$$

EQUIPMENT: Indoor Mini BTS
FCC ID: NP817-4WIDMINI

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
--	--------------------------

Minimum Standard: Para. No. 24.235. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Method Of Measurement: CDMA Per ANSI/J-STD-014
TDMA Per ANSI/J-STD-010
NADC Per IS-136

Frequency Stability With Voltage Variation

The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation

The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

KTL Ottawa


FCC PART 24, SUBPART E
BROADBAND PCS BASE STATION
PROJECT NO.:8Lo263E
ANNEX B

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI


ANNEX B
TEST DIAGRAMS

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Para. No. 2.1046 - R.F. Power Output

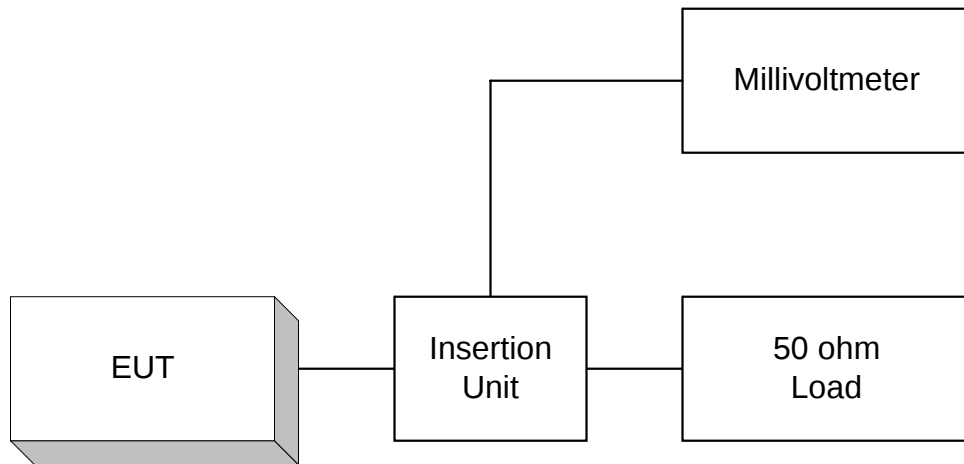


Para. No. 2.1049 - Occupied Bandwidth

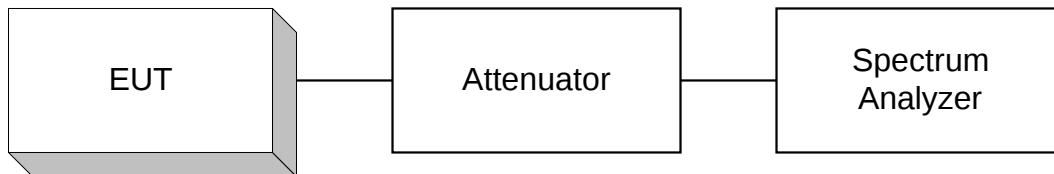


EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Para. No. 2.1051 Spurious Emissions at Antenna Terminals

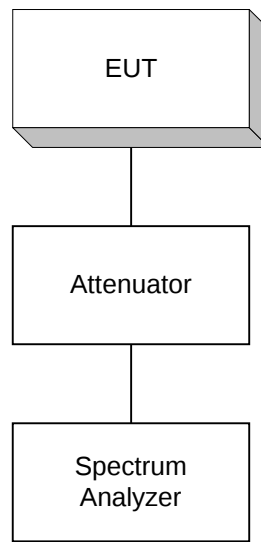

Para. No. 2.1053 - Field Strength of Spurious Radiation

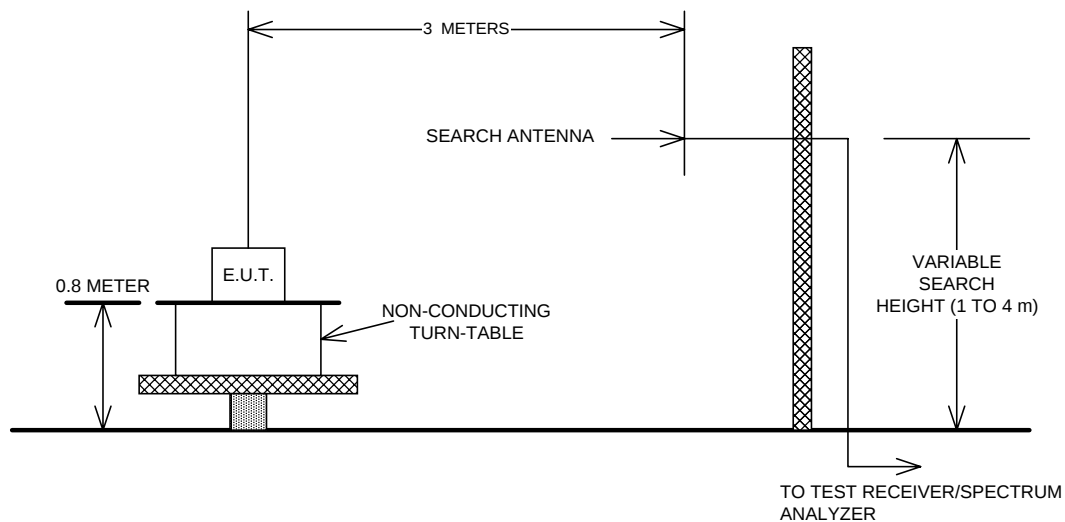

EQUIPMENT: Indoor Mini BTS
FCC ID:NP817-4WIDMINI

Para. No. 2.1055 - Frequency Stability

