

TEST REPORT

Reference No..... : WTX21X08081522W-2
FCC ID : 2A24ZWR135G
Applicant..... : Shenzhen Ceres Technology Co., Ltd.
Address : Room 601, Floor 6, Building F, Songbai Road 1008, Sunshine Community,
Xili Street, Nanshan District, Shenzhen
Product Name : Wireless Router
Test Model..... : WR135G-M30
Standards..... : FCC Part 15.247
Date of Receipt sample.... : Aug. 10, 2021
Date of Test : Aug. 10, 2021 to Aug. 26, 2021
Date of Issue : Aug. 26, 2021
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	8
1.7 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT.....	12
3.1 STANDARD APPLICABLE	12
3.2 EVALUATION INFORMATION	12
4. POWER SPECTRAL DENSITY	13
4.1 STANDARD APPLICABLE	13
4.2 TEST SETUP BLOCK DIAGRAM	13
4.3 TEST PROCEDURE.....	13
4.4 SUMMARY OF TEST RESULTS/PLOTS	13
5. DTS BANDWIDTH.....	14
5.1 STANDARD APPLICABLE	14
5.2 TEST SETUP BLOCK DIAGRAM	14
5.3 TEST PROCEDURE.....	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
6. RF OUTPUT POWER	15
6.1 STANDARD APPLICABLE	15
6.2 TEST SETUP BLOCK DIAGRAM	15
6.3 TEST PROCEDURE.....	15
6.4 SUMMARY OF TEST RESULTS/PLOTS	15
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	16
7.1 STANDARD APPLICABLE	16
7.2 TEST PROCEDURE.....	16
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
7.4 SUMMARY OF TEST RESULTS/PLOTS	18
8. OUT OF BAND EMISSIONS	27
8.1 STANDARD APPLICABLE	27
8.2 TEST PROCEDURE.....	27
8.3 SUMMARY OF TEST RESULTS/PLOTS	28
9. CONDUCTED EMISSIONS.....	37
9.1 TEST PROCEDURE.....	37
9.2 BASIC TEST SETUP BLOCK DIAGRAM.....	37
9.3 TEST RECEIVER SETUP	37
9.4 SUMMARY OF TEST RESULTS/PLOTS	37
APPENDIX SUMMARY	40
APPENDIX A.....	41
APPENDIX B	50
APPENDIX C	59
APPENDIX D	68
APPENDIX PHOTOGRAPHS.....	85

Report version

Version No.	Date of issue	Description
Rev.00	Aug. 26, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Ceres Technology Co., Ltd.
Address of applicant: Room 601, Floor 6, Building F, Songbai Road 1008, Sunshine Community, Xili Street, Nanshan District, Shenzhen

Manufacturer: Shenzhen C-DATA Technology Co.,Ltd Baoan Branch
Address of manufacturer: Fl1, Bldg B, Wentao Industrial zone,Yingrenshiyongxin Village, Shiyan Street, Baoan district, Shenzhen,Guangdong, China

General Description of EUT	
Product Name:	Wireless Router
Trade Name:	/
Model No.:	WR135G-M30
Adding Model(s):	WR135G-M32
Rated Voltage:	DC12V
Power Adapter 1:	Model:DCT12W120100US-A0 Input:AC100-240V, 50/60Hz, 0.3A max Output:DC12.0V,1A
Power Adapter 2:	Model:TS-A012-120010AW Input:AC100-240V, 50/60Hz, 0.4A Output:DC12.0V,1A
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model WR135G-M30, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	ANT 0:15.52dBm (Conducted) ANT 1:15.81dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	External Antenna
Antenna Gain:	5dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the FCC rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F, Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has two External antennas, fulfill the requirement of this section. And the signals at the antennas are completely uncorrelated.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

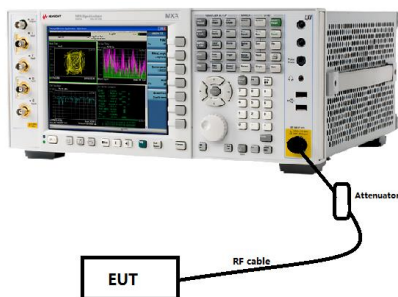

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

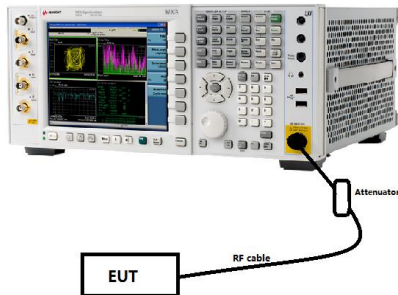

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

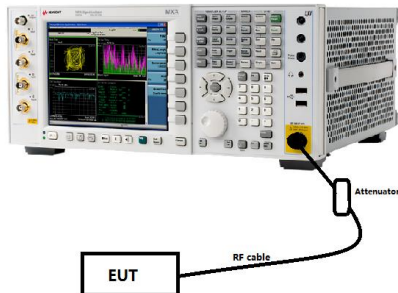

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

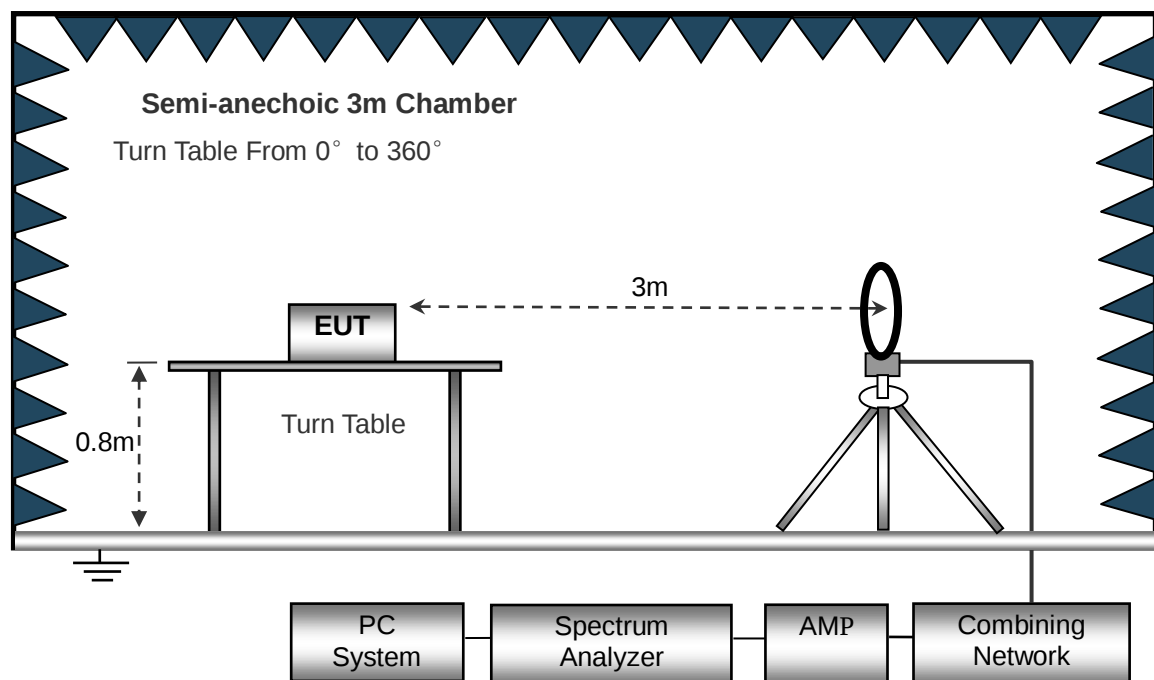

The test setup for emission measurement from 30MHz to 1GHz.

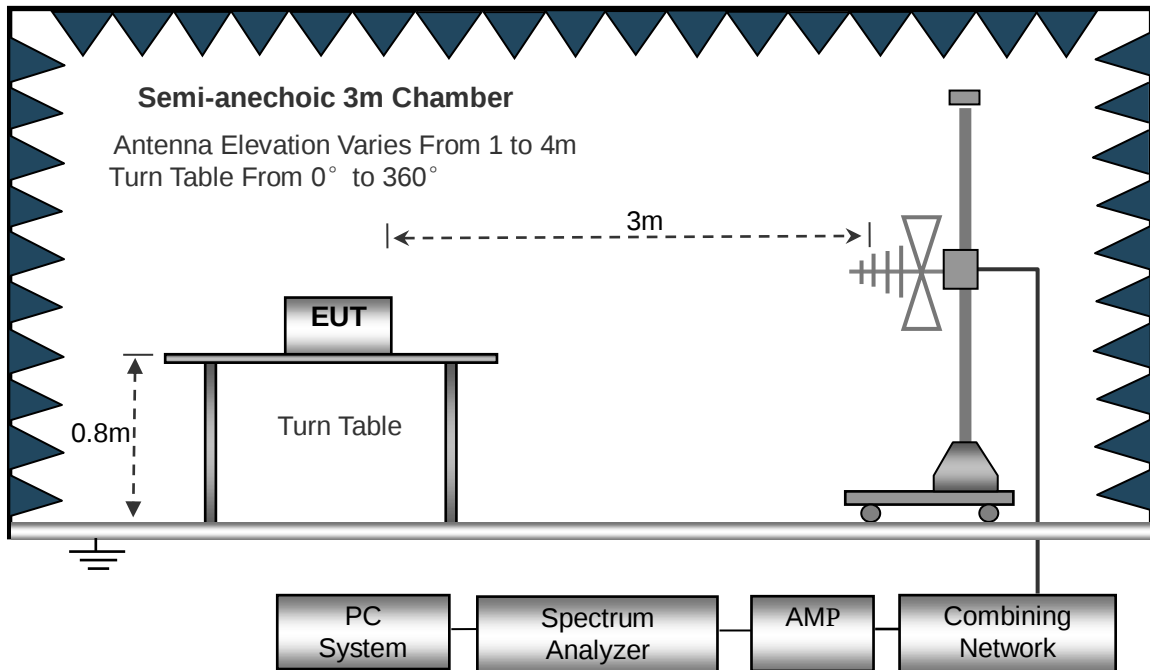

The test setup for emission measurement above 1GHz.

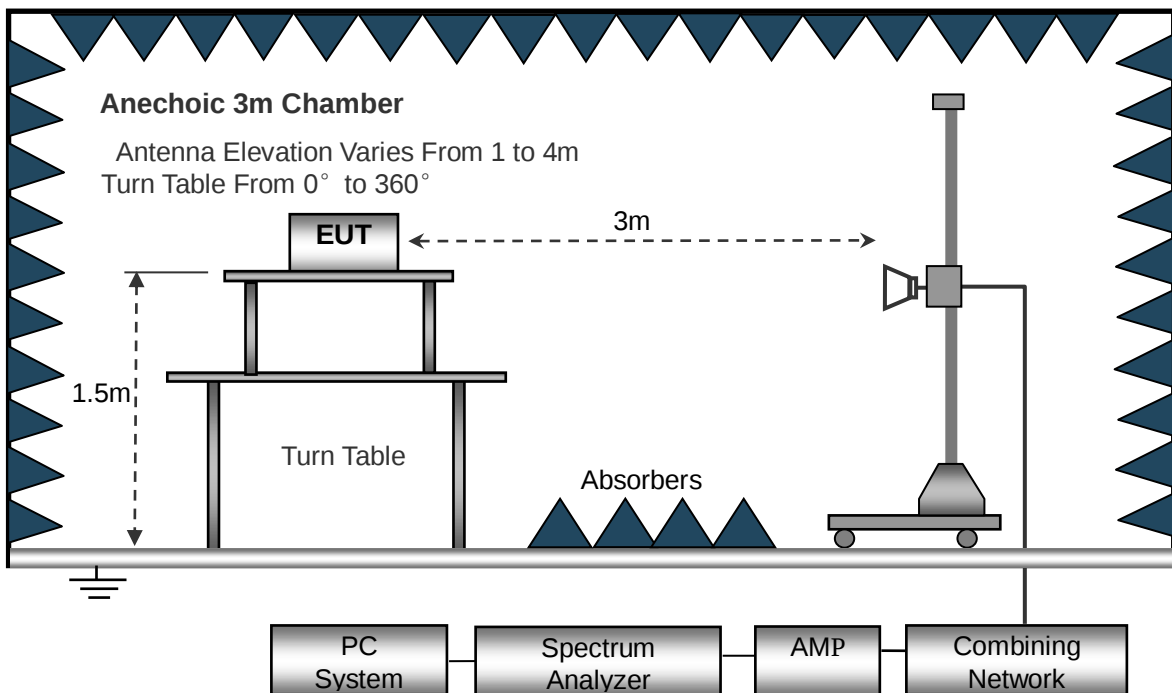

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


7.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.

- Spurious Emissions Below 1GHz
- Worst case Antenna 1

802.11b_11Mbps (worst case)			
Test Channel	Low	Polarity:	Horizontal

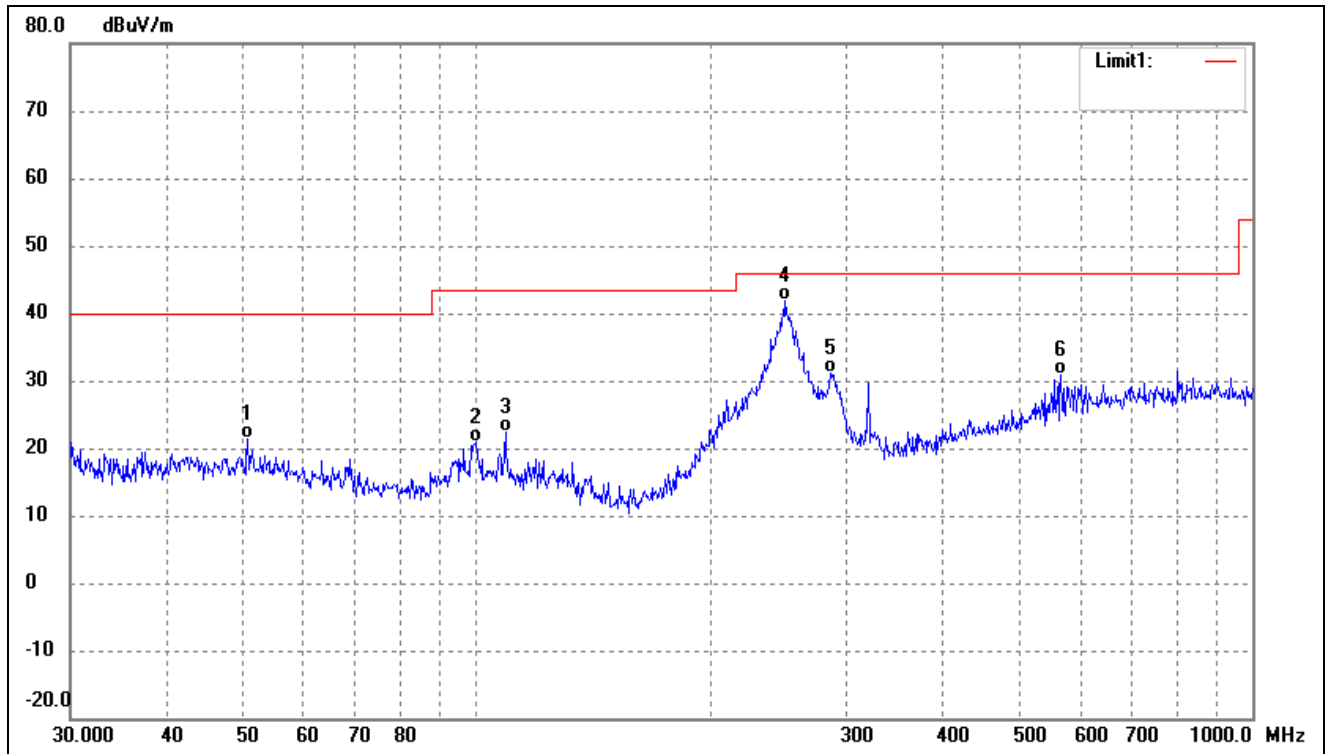


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.7637	28.43	-7.07	21.36	40.00	-18.64	-	-	QP
2	99.8777	29.54	-8.75	20.79	43.50	-22.71	-	-	QP
3	109.0286	31.20	-8.85	22.35	43.50	-21.15	-	-	QP
4	250.3012	50.20	-8.31	41.89	46.00	-4.11	-	-	QP
5	285.9778	38.46	-7.33	31.13	46.00	-14.87	-	-	QP
6	566.6223	31.02	-0.20	30.82	46.00	-15.18	-	-	QP

802.11b_11Mbps (worst case)			
Test Channel	Low	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.6932	33.96	-7.49	26.47	40.00	-13.53	-	-	QP
2	99.8777	45.62	-8.75	36.87	43.50	-6.63	-	-	QP
3	107.8877	45.36	-8.84	36.52	43.50	-6.98	-	-	QP
4	138.8735	45.91	-12.18	33.73	43.50	-9.77	-	-	QP
5	333.6867	31.23	-5.91	25.32	46.00	-20.68	-	-	QP
6	645.1195	30.24	0.87	31.11	46.00	-14.89	-	-	QP

802.11b_11Mbps (worst case)			
Test Channel	Middle	Polarity:	Horizontal

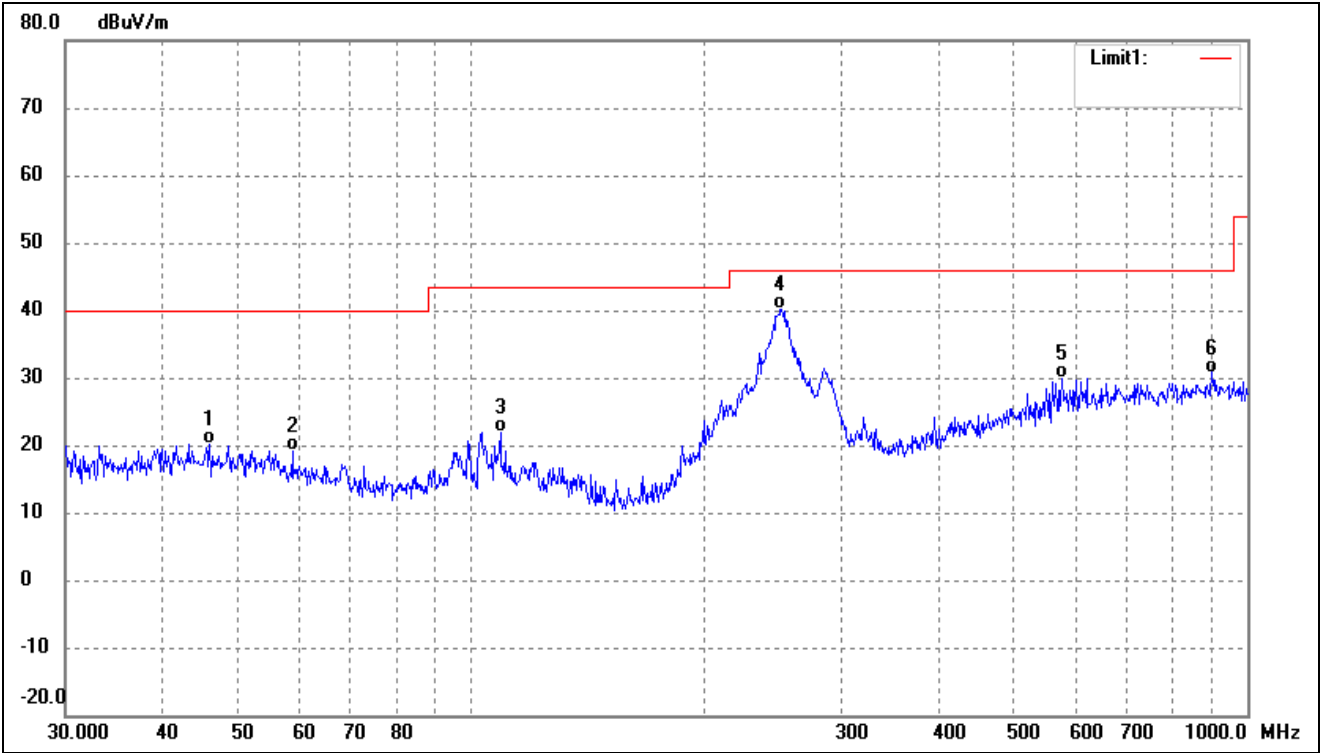


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0164	27.13	-6.98	20.15	40.00	-19.85	-	-	QP
2	58.8185	27.27	-8.25	19.02	40.00	-20.98	-	-	QP
3	109.0286	30.78	-8.85	21.93	43.50	-21.57	-	-	QP
4	250.3012	48.49	-8.31	40.18	46.00	-5.82	-	-	QP
5	576.6443	29.95	-0.03	29.92	46.00	-16.08	-	-	QP
6	900.1474	28.00	2.75	30.75	46.00	-15.25	-	-	QP

802.11b_11Mbps (worst case)			
Test Channel	Middle	Polarity:	Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.7600	33.61	-7.37	26.24	40.00	-13.76	-	-	QP
2	98.8326	45.60	-8.94	36.66	43.50	-6.84	-	-	QP
3	103.8055	43.00	-8.79	34.21	43.50	-9.29	-	-	QP
4	261.0583	32.68	-8.00	24.68	46.00	-21.32	-	-	QP
5	329.0390	32.42	-6.06	26.36	46.00	-19.64	-	-	QP
6	636.1340	30.72	0.77	31.49	46.00	-14.51	-	-	QP

802.11b_11Mbps (worst case)			
Test Channel	High	Polarity:	Horizontal

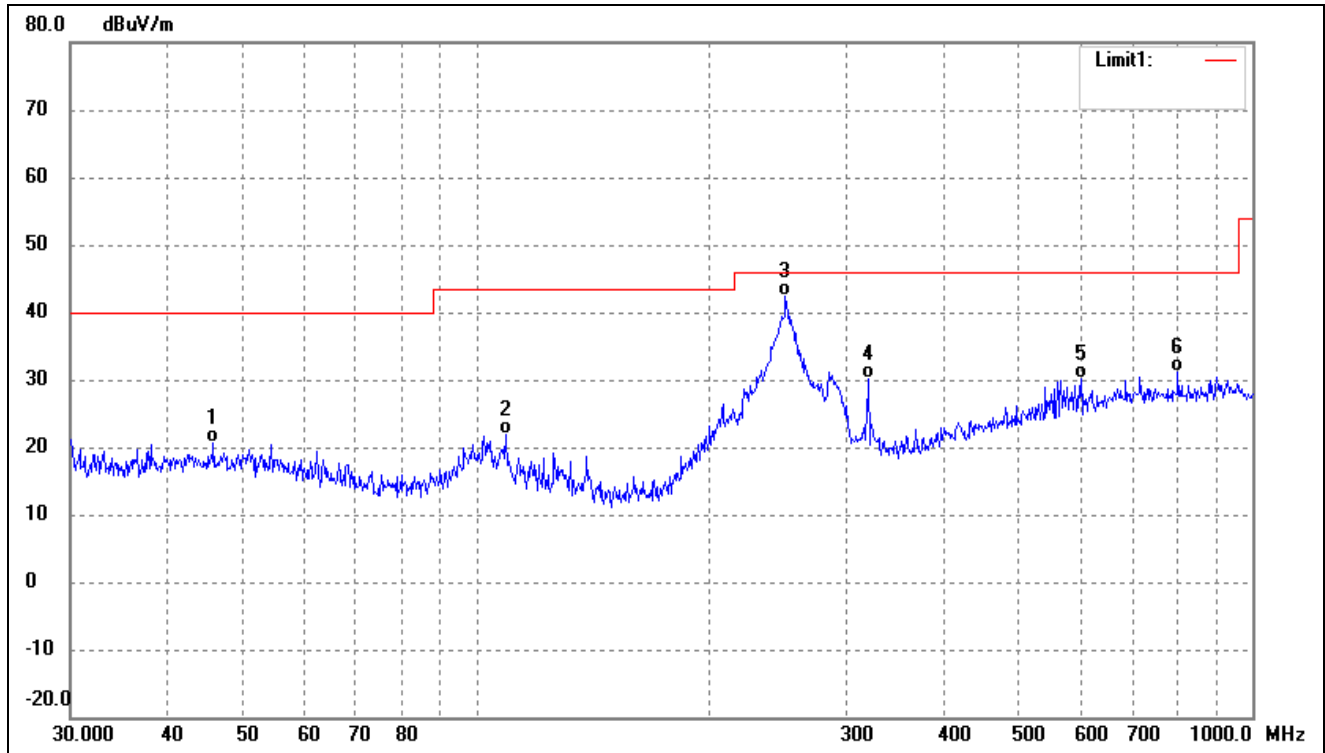

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.8553	27.62	-6.98	20.64	40.00	-19.36	-	-	QP
2	109.0286	30.62	-8.85	21.77	43.50	-21.73	-	-	QP
3	250.3012	50.57	-8.31	42.26	46.00	-3.74	-	-	QP
4	319.9370	36.48	-6.34	30.14	46.00	-15.86	-	-	QP
5	601.4265	29.67	0.39	30.06	46.00	-15.94	-	-	QP
6	801.7863	29.00	2.10	31.10	46.00	-14.90	-	-	QP

802.11b_11Mbps (worst case)			
Test Channel	High	Polarity:	Vertical

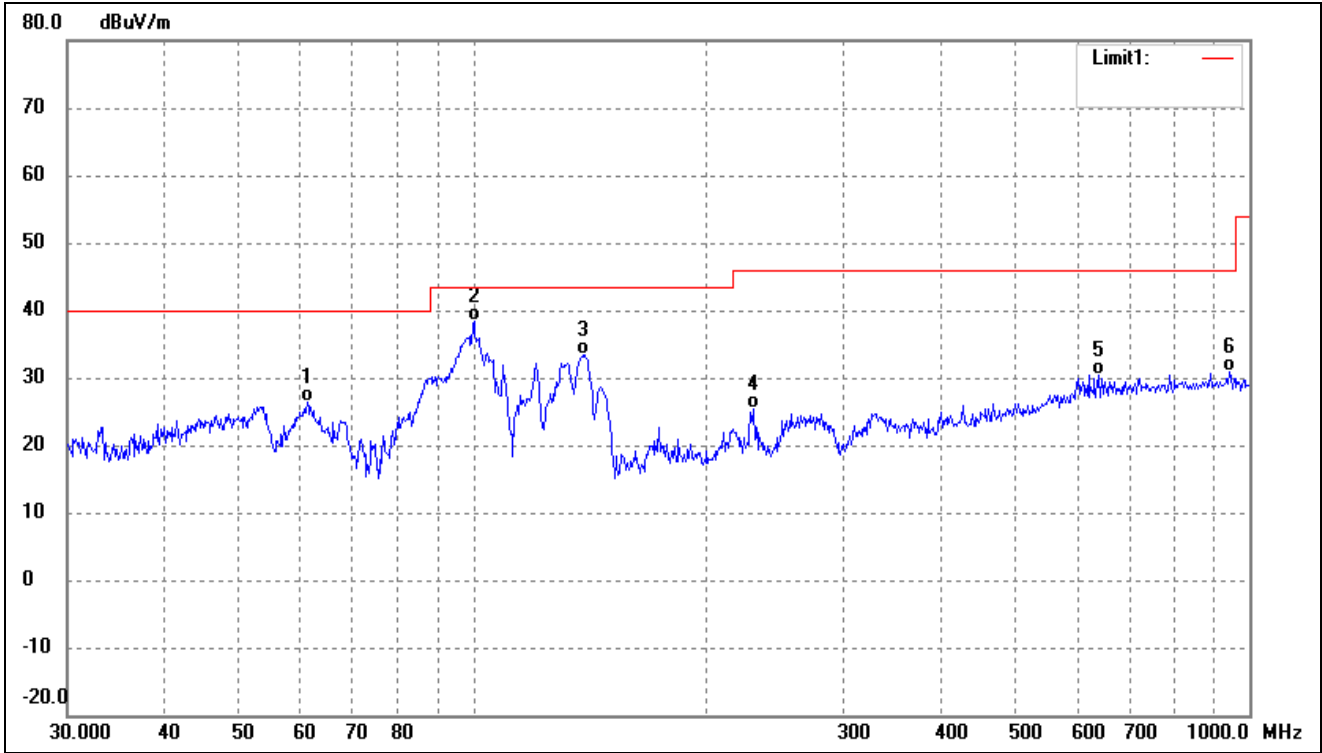

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	61.1316	35.01	-8.63	26.38	40.00	-13.62	-	-	QP
2	100.2286	47.08	-8.73	38.35	43.50	-5.15	-	-	QP
3	138.3873	45.53	-12.13	33.40	43.50	-10.10	-	-	QP
4	230.0985	34.23	-8.88	25.35	46.00	-20.65	-	-	QP
5	640.6110	29.47	0.82	30.29	46.00	-15.71	-	-	QP
6	942.1305	28.39	2.61	31.00	46.00	-15.00	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps(worst case)
- Antenna 0

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.64	-3.86	51.78	74.00	-22.22	H	PK
4824.000	52.00	-3.86	48.14	54.00	-5.86	H	AV
7236.000	58.53	1.10	59.63	74.00	-14.37	H	PK
7236.000	39.41	1.10	40.51	54.00	-13.49	H	AV
4824.000	54.05	-3.86	50.19	74.00	-23.81	V	PK
4824.000	45.31	-3.86	41.45	54.00	-12.55	V	AV
7236.000	55.48	1.10	56.58	74.00	-17.42	V	PK
7236.000	38.35	1.10	39.45	54.00	-14.55	V	AV
Middle Channel-2437MHz							
4874.000	55.96	-3.74	52.22	74.00	-21.78	H	PK
4874.000	50.86	-3.74	47.12	54.00	-6.88	H	AV
7311.000	58.19	1.47	59.66	74.00	-14.34	H	PK
7311.000	37.84	1.47	39.31	54.00	-14.69	H	AV
4874.000	54.01	-3.74	50.27	74.00	-23.73	V	PK
4874.000	45.62	-3.74	41.88	54.00	-12.12	V	AV
7311.000	54.87	1.47	56.34	74.00	-17.66	V	PK
7311.000	38.90	1.47	40.37	54.00	-13.63	V	AV
High Channel-2462MHz							
4924.000	56.84	-3.63	53.21	74.00	-20.79	H	PK
4924.000	51.41	-3.63	47.78	54.00	-6.22	H	AV
7386.000	58.92	1.62	60.54	74.00	-13.46	H	PK
7386.000	39.25	1.62	40.87	54.00	-13.13	H	AV
4924.000	54.72	-3.63	51.09	74.00	-22.91	V	PK
4924.000	45.39	-3.63	41.76	54.00	-12.24	V	AV
7386.000	55.94	1.62	57.56	74.00	-16.44	V	PK
7386.000	38.24	1.62	39.86	54.00	-14.14	V	AV

➤ Antenna 1

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	56.03	-3.86	52.17	74.00	-21.83	H	PK
4824.000	51.42	-3.86	47.56	54.00	-6.44	H	AV
7236.000	57.21	1.10	58.31	74.00	-15.69	H	PK
7236.000	37.75	1.10	38.85	54.00	-15.15	H	AV
4824.000	53.01	-3.86	49.15	74.00	-24.85	V	PK
4824.000	45.07	-3.86	41.21	54.00	-12.79	V	AV
7236.000	55.79	1.10	56.89	74.00	-17.11	V	PK
7236.000	38.45	1.10	39.55	54.00	-14.45	V	AV
Middle Channel-2437MHz							
4874.000	55.72	-3.74	51.98	74.00	-22.02	H	PK
4874.000	51.76	-3.74	48.02	54.00	-5.98	H	AV
7311.000	57.46	1.47	58.93	74.00	-15.07	H	PK
7311.000	38.01	1.47	39.48	54.00	-14.52	H	AV
4874.000	53.06	-3.74	49.32	74.00	-24.68	V	PK
4874.000	46.53	-3.74	42.79	54.00	-11.21	V	AV
7311.000	54.36	1.47	55.83	74.00	-18.17	V	PK
7311.000	38.18	1.47	39.65	54.00	-14.35	V	AV
High Channel-2462MHz							
4924.000	55.06	-3.63	51.43	74.00	-22.57	H	PK
4924.000	50.02	-3.63	46.39	54.00	-7.61	H	AV
7386.000	57.60	1.62	59.22	74.00	-14.78	H	PK
7386.000	37.80	1.62	39.42	54.00	-14.58	H	AV
4924.000	53.36	-3.63	49.73	74.00	-24.27	V	PK
4924.000	45.40	-3.63	41.77	54.00	-12.23	V	AV
7386.000	55.24	1.62	56.86	74.00	-17.14	V	PK
7386.000	38.58	1.62	40.20	54.00	-13.80	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


- Radiated test
- Antenna 0(worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

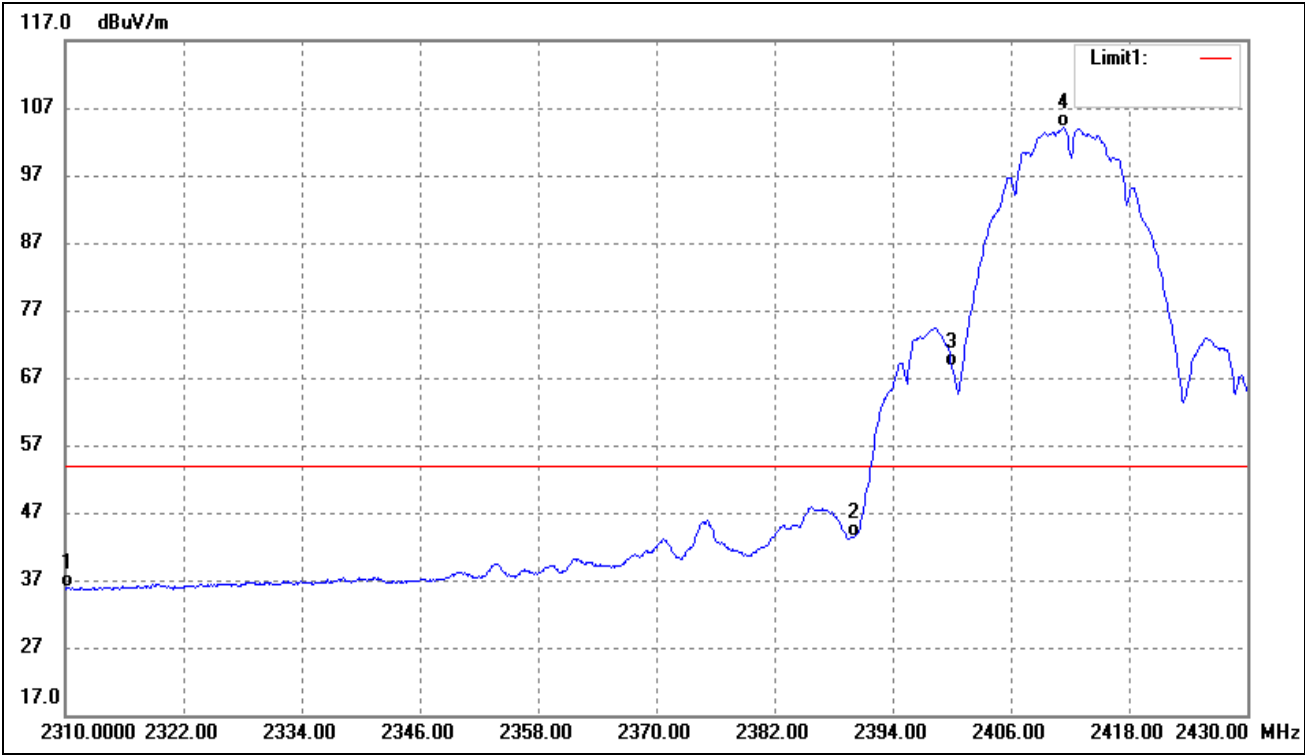


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.01	-5.20	35.81	54.00	-18.19	Average Detector
	2310.000	52.87	-5.20	47.67	74.00	-26.33	Peak Detector
2	2390.000	48.61	-5.14	43.47	54.00	-10.53	Average Detector
	2390.000	59.69	-5.14	54.55	74.00	-19.45	Peak Detector
3	2400.000	73.82	-5.13	68.69	Delta=35.29dBc		Average Detector
4	2411.400	109.20	-5.12	104.08			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

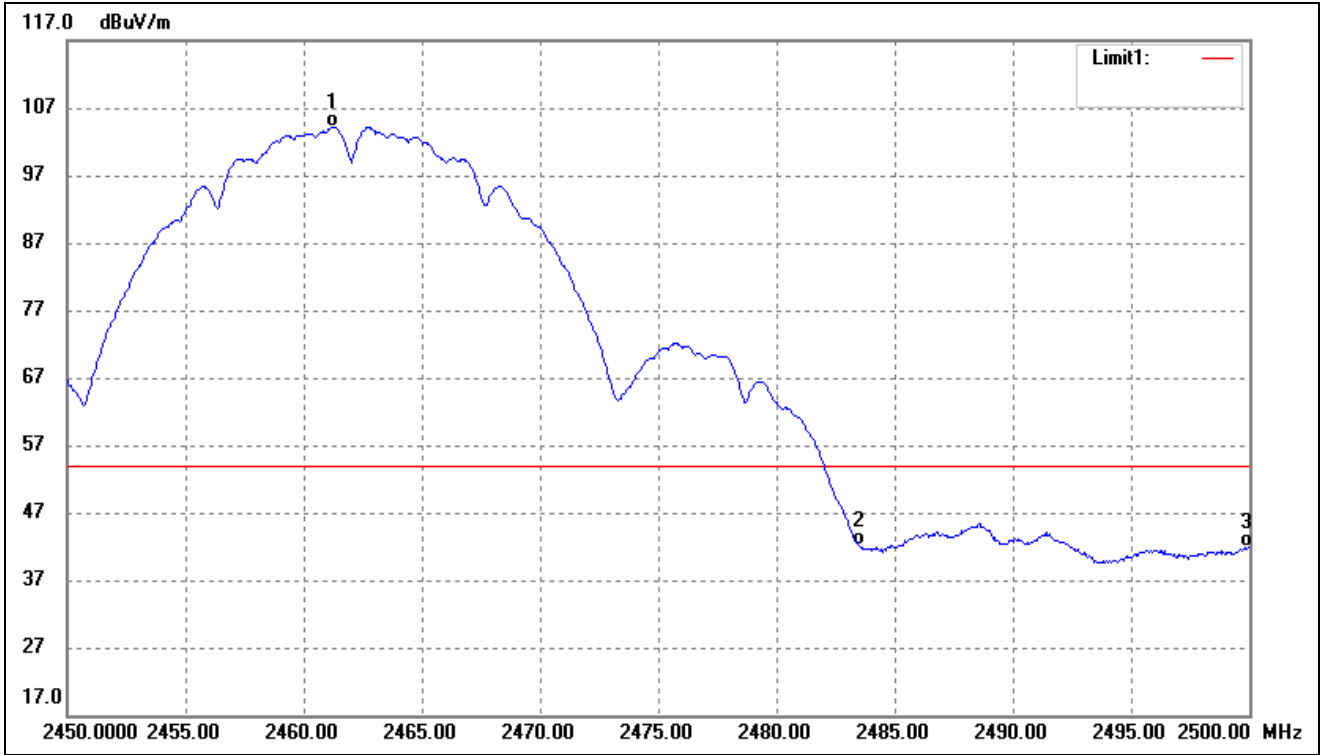


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	109.23	-5.08	104.15	/	/	Average Detector
	2460.850	113.59	-5.08	108.51	/	/	Peak Detector
2	2483.500	47.15	-5.07	42.08	54.00	-11.92	Average Detector
	2483.500	58.28	-5.07	53.21	74.00	-20.79	Peak Detector
3	2500.000	46.96	-5.05	41.91	54.00	-12.09	Average Detector
	2500.000	57.53	-5.05	52.48	74.00	-21.52	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

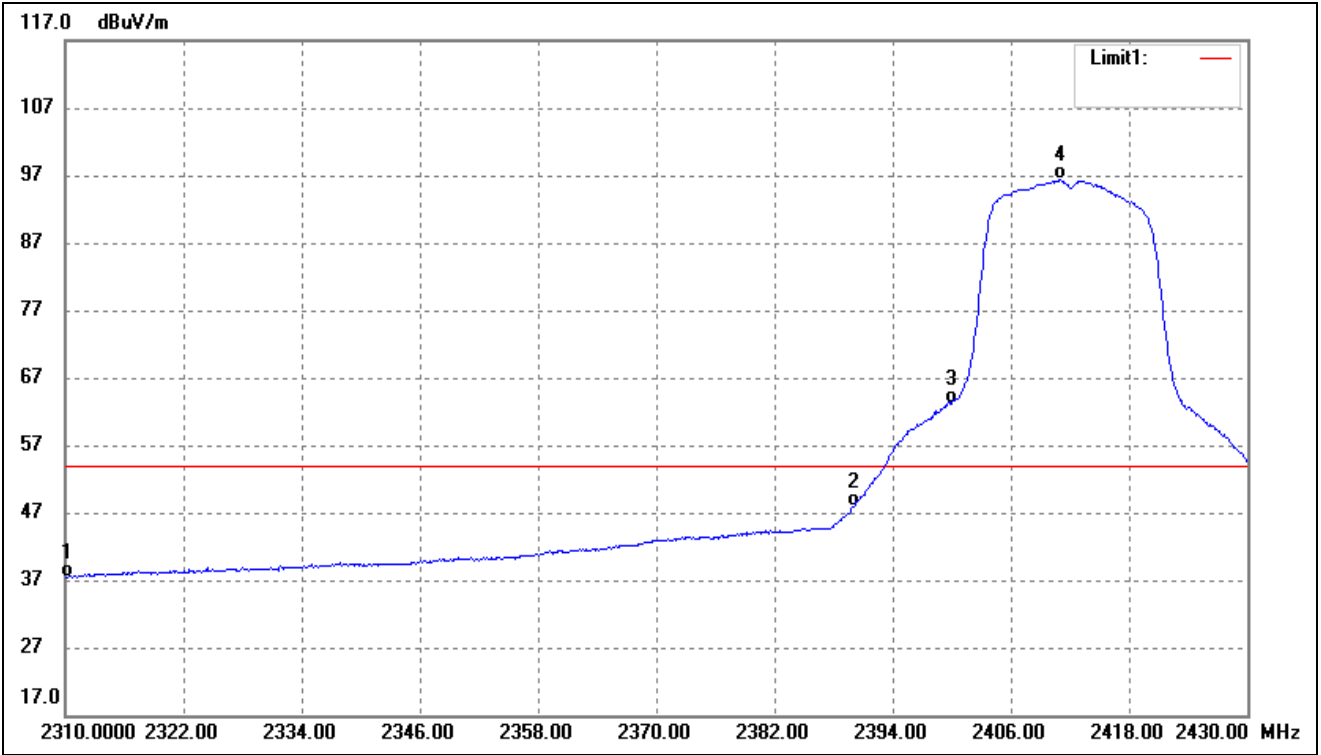


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.68	-5.20	37.48	54.00	-16.52	Average Detector
	2310.000	54.98	-5.20	49.78	74.00	-24.22	Peak Detector
2	2390.000	52.96	-5.14	47.82	54.00	-6.18	Average Detector
	2390.000	67.97	-5.14	62.83	74.00	-11.17	Peak Detector
3	2400.000	68.37	-5.13	63.24	Delta=33.03dBc		Average Detector
4	2411.040	101.39	-5.12	96.27			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

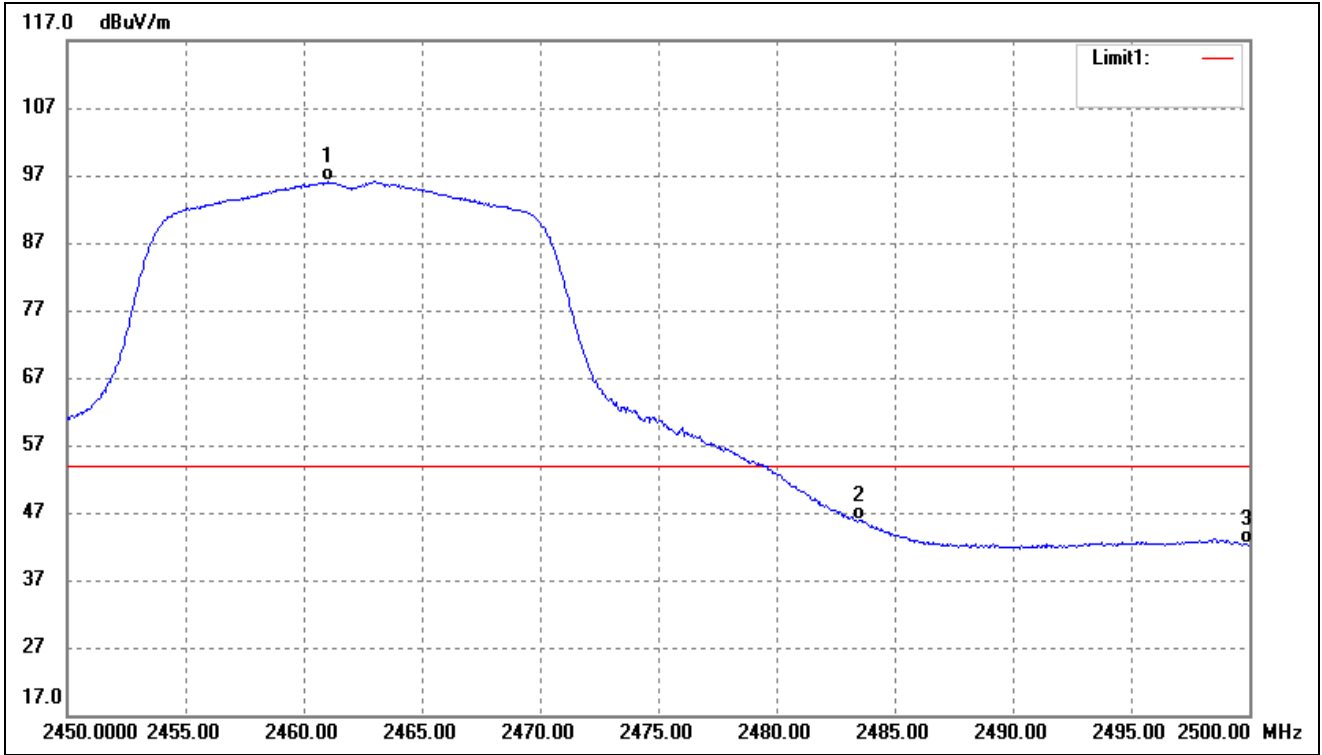


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.000	101.13	-5.08	96.05	/	/	Average Detector
	2463.150	111.24	-5.08	106.16	/	/	Peak Detector
2	2483.500	50.86	-5.07	45.79	54.00	-8.21	Average Detector
	2483.500	67.10	-5.07	62.03	74.00	-11.97	Peak Detector
3	2500.000	47.54	-5.05	42.49	54.00	-11.51	Average Detector
	2500.000	59.07	-5.05	54.02	74.00	-19.98	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

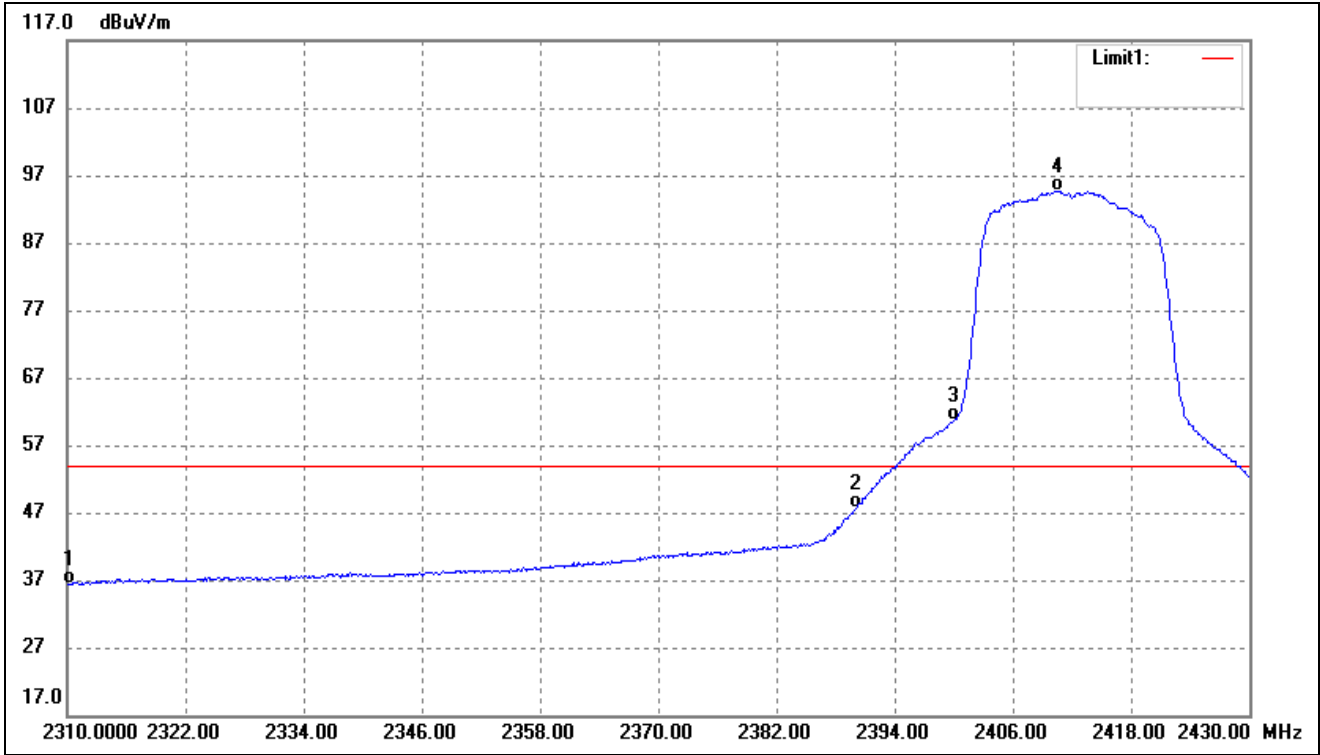


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.52	-5.20	36.32	54.00	-17.68	Average Detector
	2310.000	53.31	-5.20	48.11	74.00	-25.89	Peak Detector
2	2390.000	52.67	-5.14	47.53	54.00	-6.47	Average Detector
	2390.000	68.20	-5.14	63.06	74.00	-10.94	Peak Detector
3	2390.000	52.67	-5.14	47.53	Delta=34.21dBc		Average Detector
4	2390.000	52.67	-5.14	47.53			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

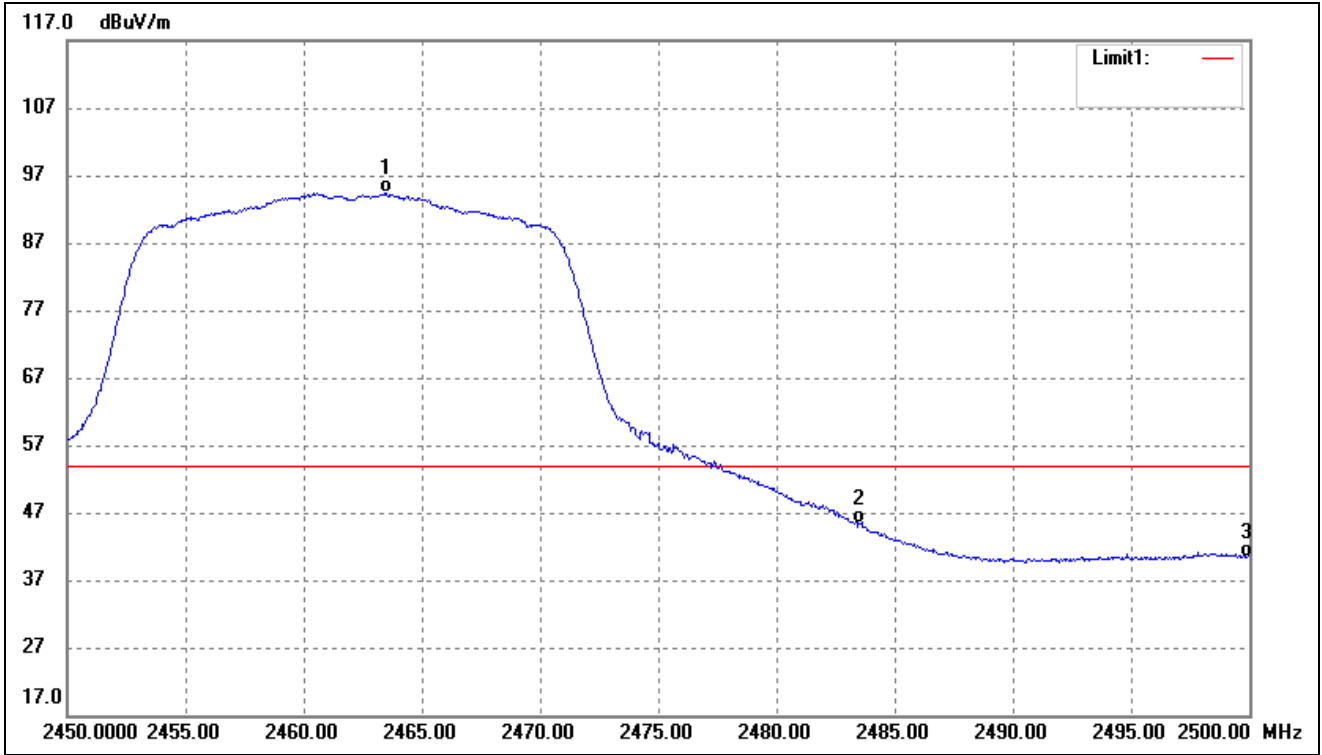


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.500	99.41	-5.08	94.33	/	/	Average Detector
	2460.700	109.78	-5.08	104.70	/	/	Peak Detector
2	2483.500	50.36	-5.07	45.29	54.00	-8.71	Average Detector
	2483.500	67.01	-5.07	61.94	74.00	-12.06	Peak Detector
3	2500.000	45.34	-5.05	40.29	54.00	-13.71	Average Detector
	2500.000	56.96	-5.05	51.91	74.00	-22.09	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

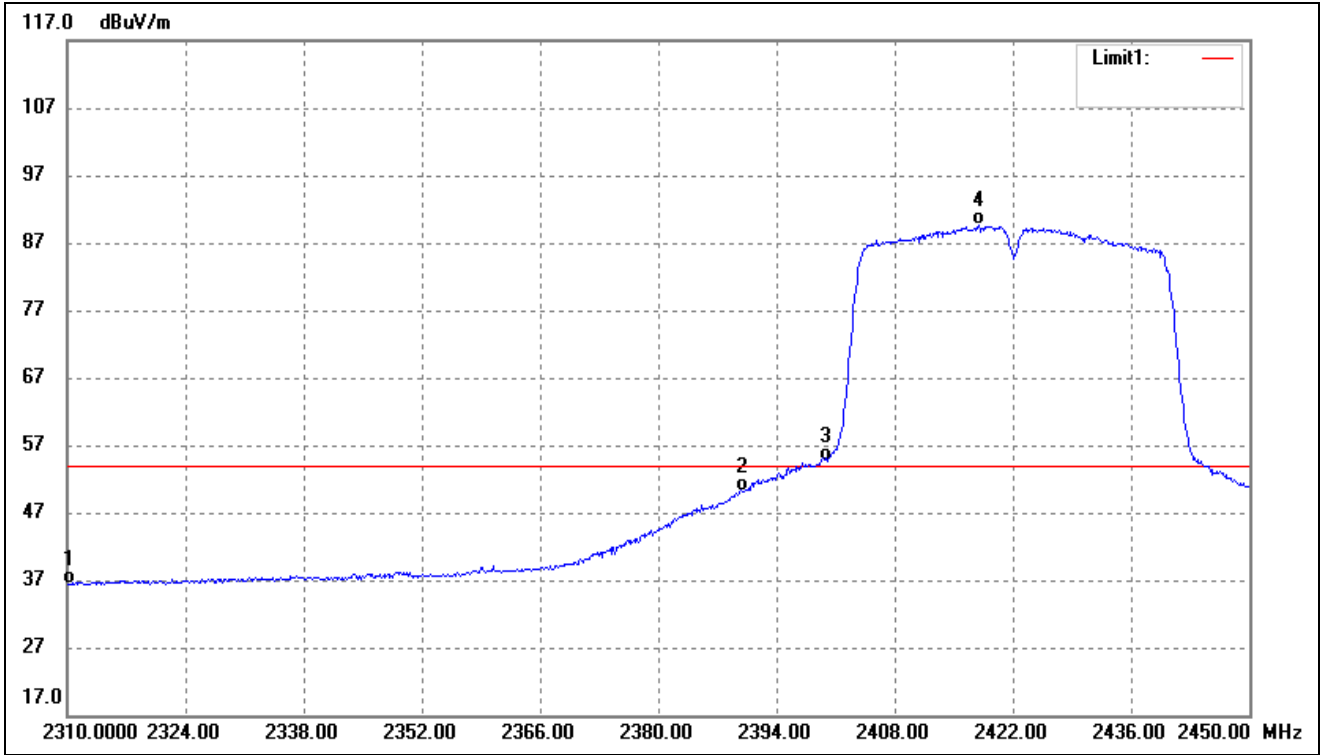

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.57	-5.20	36.37	54.00	-17.63	Average Detector
	2310.000	52.67	-5.20	47.47	74.00	-26.53	Peak Detector
2	2390.000	55.15	-5.14	50.01	54.00	-3.99	Average Detector
	2390.000	72.61	-5.14	67.47	74.00	-6.53	Peak Detector
3	2400.000	59.85	-5.13	54.72	Delta=34.82dBc		Average Detector
4	2417.940	94.65	-5.11	89.54			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

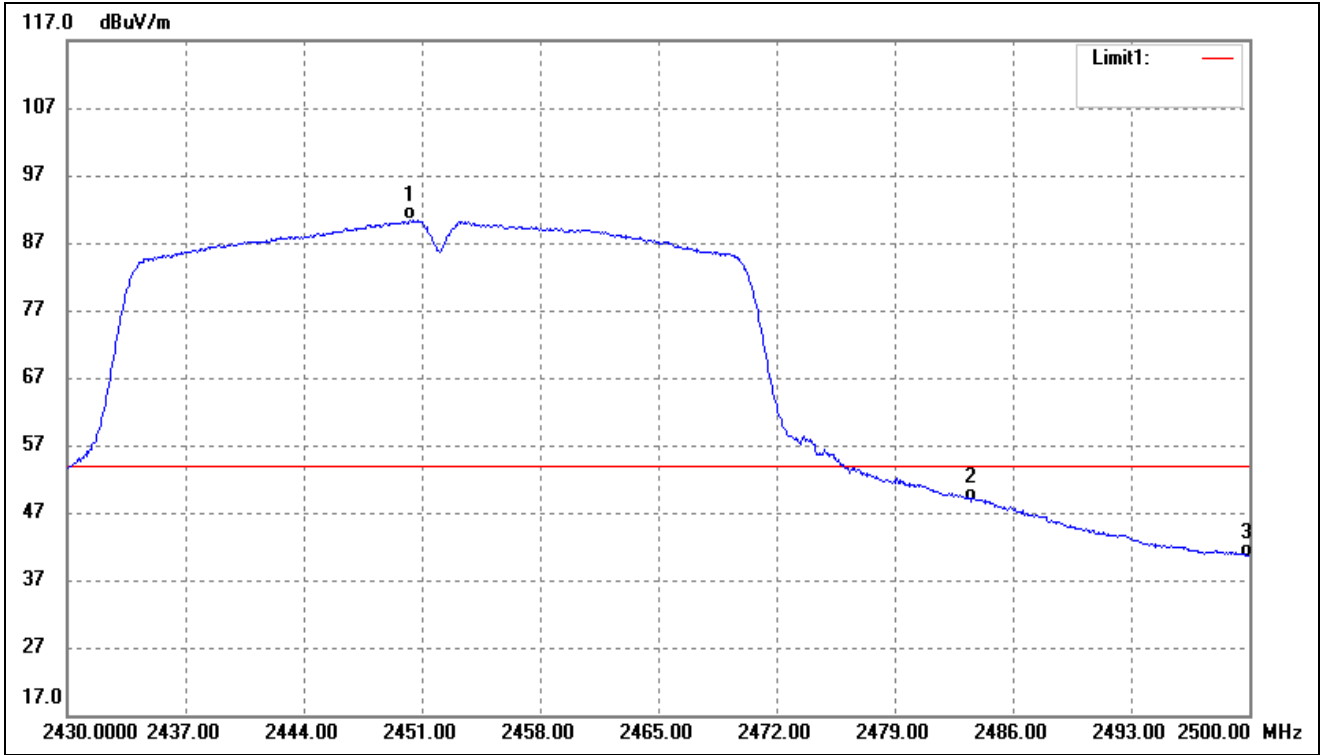

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.300	95.37	-5.09	90.28	/	/	Average Detector
	2449.950	106.34	-5.09	101.25	/	/	Peak Detector
2	2483.500	53.81	-5.07	48.74	54.00	-5.26	Average Detector
	2483.500	71.72	-5.07	66.65	74.00	-7.35	Peak Detector
3	2500.000	45.54	-5.05	40.49	54.00	-13.51	Average Detector
	2500.000	59.10	-5.05	54.05	74.00	-19.95	Peak Detector

➤ Conducted test
Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

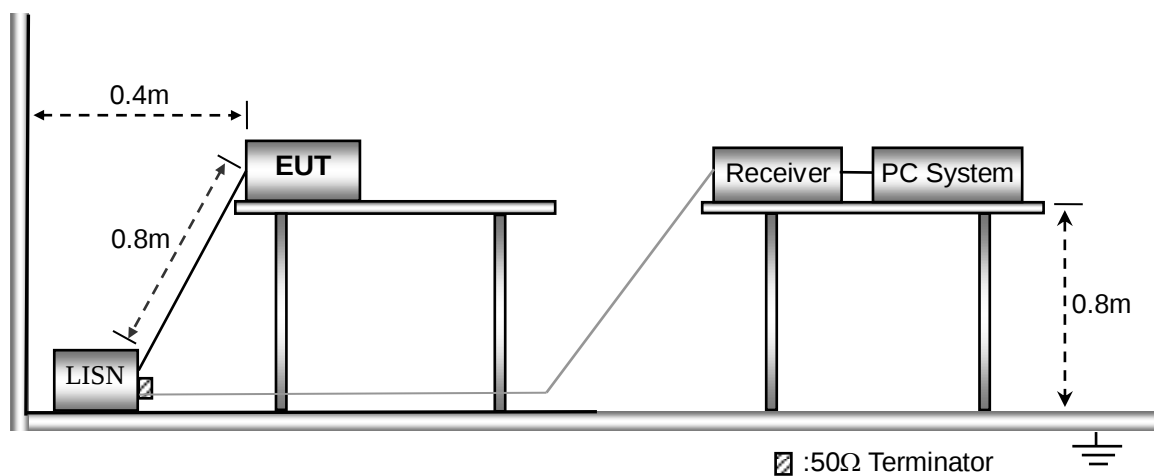


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

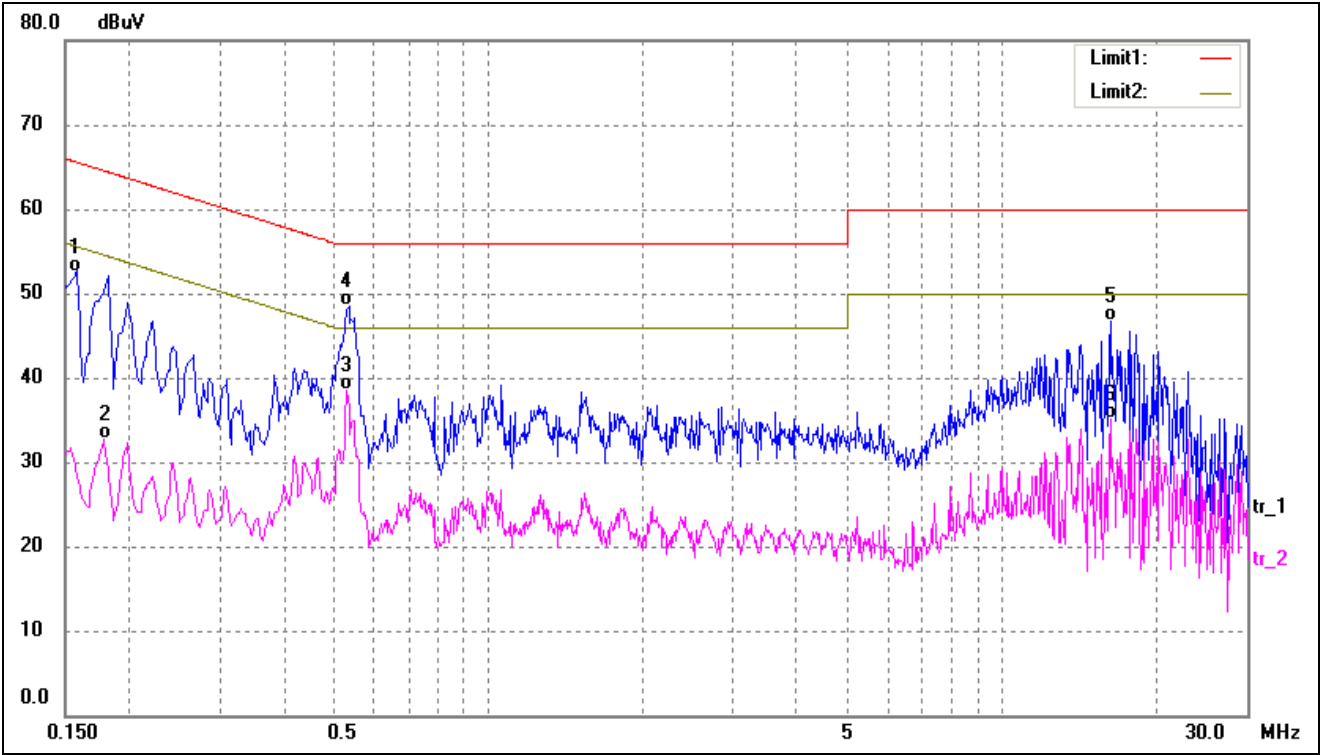

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	42.35	10.25	52.60	65.57	-12.97	QP
2	0.1780	22.46	10.26	32.72	54.58	-21.86	AVG
3*	0.5300	28.25	10.22	38.47	46.00	-7.53	AVG
4	0.5340	38.19	10.22	48.41	56.00	-7.59	QP
5	16.2260	36.09	10.58	46.67	60.00	-13.33	QP
6	16.2260	24.57	10.58	35.15	50.00	-14.85	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

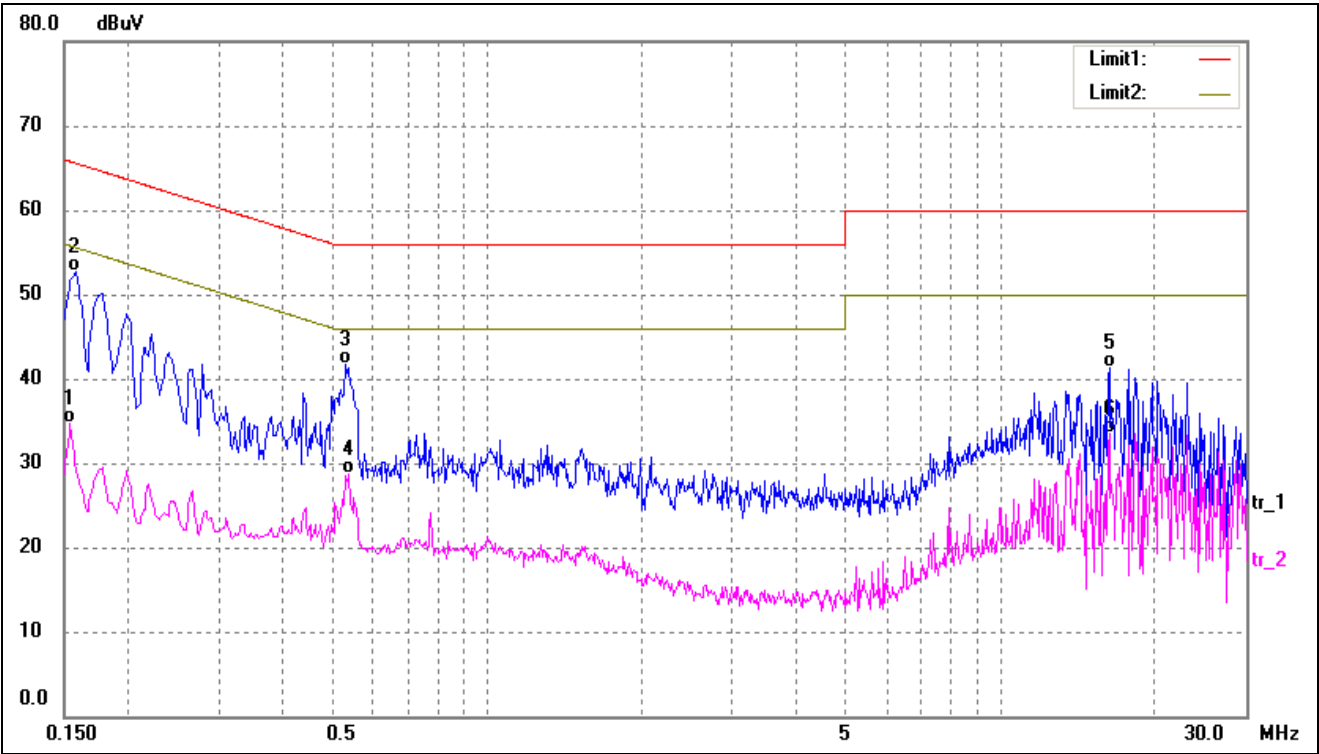

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	24.44	10.25	34.69	55.78	-21.09	AVG
2*	0.1580	42.54	10.25	52.79	65.57	-12.78	QP
3	0.5300	31.49	10.22	41.71	56.00	-14.29	QP
4	0.5380	18.48	10.21	28.69	46.00	-17.31	AVG
5	16.2260	30.75	10.58	41.33	60.00	-18.67	QP
6	16.2260	23.00	10.58	33.58	50.00	-16.42	AVG

APPENDIX SUMMARY

Project No.	WTX21X08081522W	Test Engineer	Dashan
Start date	2021/8/20	Finish date	2020/8/23
Temperature	24℃	Humidity	47%
RF specifications	WIFI-2.4G		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

Power Spectral Density					
Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 0	Antenna 1		
802.11b_1Mbps	2412	-16.41	-16.29	/	8
	2437	-16.24	-16.73	/	8
	2462	-16.60	-16.90	/	8
802.11g_6Mbps	2412	-18.17	-18.61	/	8
	2437	-18.03	-18.00	/	8
	2462	-18.61	-18.10	/	8
802.11n-HT20_MCS0	2412	-18.42	-19.71	-16.01	8
	2437	-19.60	-19.74	-16.66	8
	2462	-19.15	-20.05	-16.57	8
802.11n-HT40_MCS0	2422	-23.45	-22.76	-20.08	8
	2437	-23.49	-22.19	-19.78	8
	2452	-23.71	-23.10	-20.38	8

Antenna 0

802.11b-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.41269 GHz -16.41 dBm #Avg Log 10 dB/ Offset 1 dB W1 S2 S3 FC AA Marker 2.412690000 GHz -16.41 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.43628 GHz -16.24 dBm #Avg Log 10 dB/ Offset 1 dB W1 S2 S3 FC AA Marker 2.436280000 GHz -16.24 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.46269 GHz -16.6 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.462690000 GHz -16.6 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11g-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41170 GHz -18.17 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.411700000 GHz -18.17 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43640 GHz -18.03 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.436400000 GHz -18.03 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46230 GHz -18.61 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.462300000 GHz -18.61 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT20-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41074 GHz -18.42 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.410740000 GHz -18.42 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43574 GHz -19.6 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.435740000 GHz -19.6 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46107 GHz -19.15 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.461070000 GHz -19.15 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT40-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41702 GHz -23.45 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.417020000 GHz -23.45 dBm Center 2.422 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43826 GHz -23.49 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.438260000 GHz -23.49 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.45266 GHz -23.71 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.452660000 GHz -23.71 dBm Center 2.452 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

Antenna 1

802.11b-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.41266 GHz -16.29 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.412660000 GHz -16.29 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.43784 GHz -16.73 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.437840000 GHz -16.73 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.46137 GHz -16.9 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.461370000 GHz -16.9 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11g-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41329 GHz -18.61 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.413290000 GHz -18.61 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43670 GHz -18 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.436700000 GHz -18 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46170 GHz -18.1 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.461700000 GHz -18.1 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2




802.11n-HT20-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41077 GHz -19.71 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.410770000 GHz -19.71 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43634 GHz -19.74 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.436340000 GHz -19.74 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46137 GHz -20.05 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.461370000 GHz -20.05 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT40-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41948 GHz -22.76 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.419480000 GHz -22.76 dBm Center 2.422 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43448 GHz -22.19 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.434480000 GHz -22.19 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.45266 GHz -23.1 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.452660000 GHz -23.1 dBm Center 2.452 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

APPENDIX B

DTS Bandwidth				
Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 0	Antenna 1	
802.11b_1Mbps	2412	9.561	9.589	≥ 500
	2437	10.003	9.597	≥ 500
	2462	9.534	9.592	≥ 500
802.11g_6Mbps	2412	15.116	15.101	≥ 500
	2437	15.063	15.196	≥ 500
	2462	15.125	15.242	≥ 500
802.11n-HT20_MCS0	2412	15.065	15.083	≥ 500
	2437	15.052	15.185	≥ 500
	2462	15.050	15.071	≥ 500
802.11n-HT40_MCS0	2422	35.065	35.223	≥ 500
	2437	35.083	35.198	≥ 500
	2452	35.107	35.186	≥ 500

Antenna 0

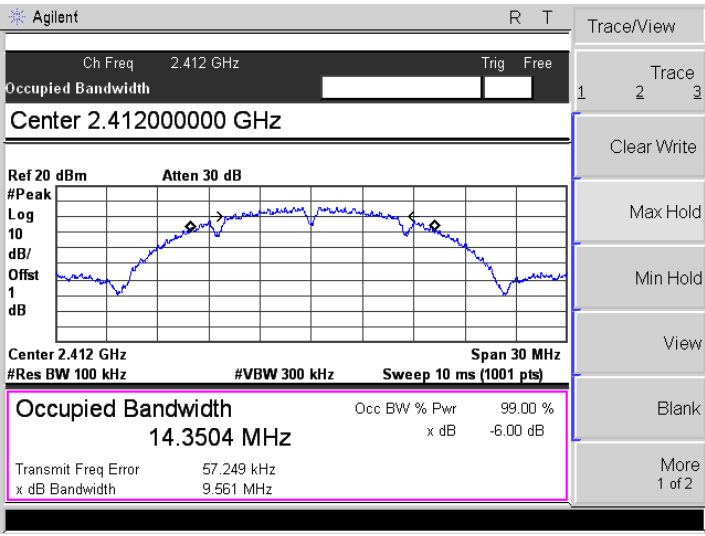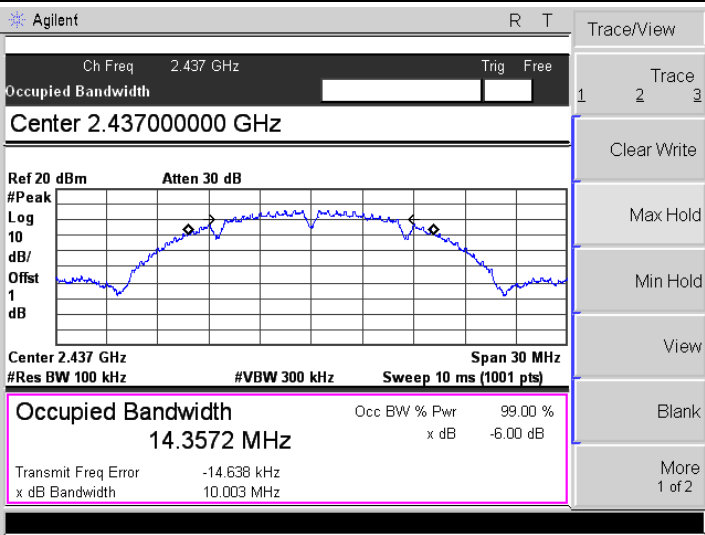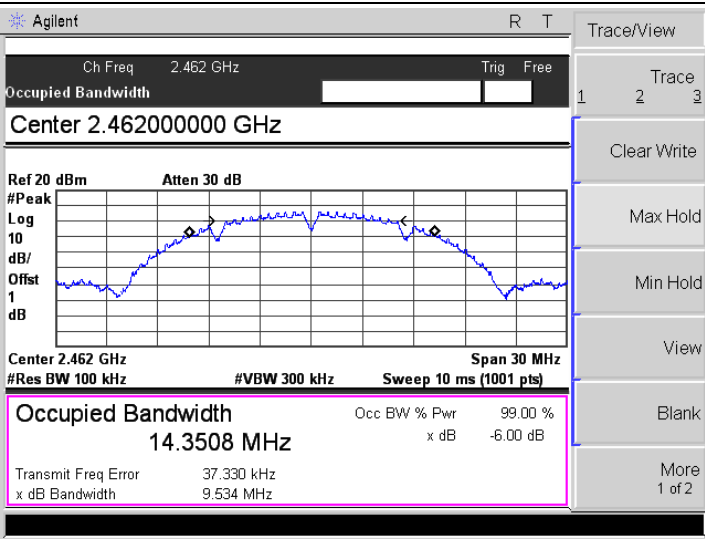802.11b-Low	
802.11b-Middle	
802.11b-High	


802.11g-Low	Agilent Ch Freq 2.412 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.3068 MHz Transmit Freq Error 6.679 kHz x dB Bandwidth 15.116 MHz Freq/Channel Center Freq 2.4120000 GHz Start Freq 2.3970000 GHz Stop Freq 2.4270000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
802.11g-Middle	Agilent Ch Freq 2.437 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.3113 MHz Transmit Freq Error 86.382 Hz x dB Bandwidth 15.063 MHz Trace/View 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-High	Agilent Ch Freq 2.462 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.3042 MHz Transmit Freq Error 6.913 kHz x dB Bandwidth 15.125 MHz Freq/Channel Center Freq 2.4620000 GHz Start Freq 2.4470000 GHz Stop Freq 2.4770000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin

802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.4809 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 12.628 kHz x dB Bandwidth 15.065 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.4645 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 303.484 Hz x dB Bandwidth 15.052 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.4659 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 6.647 kHz x dB Bandwidth 15.050 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

802.11n-HT40-Low	Agilent Ch Freq 2.422 GHz Trig Free Occupied Bandwidth Span 60.00000000 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.6631 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 57.117 kHz x dB Bandwidth 35.065 MHz Span Span 60.00000000 MHz Span Zoom Full Span Zero Span Last Span Zone ▶
802.11n-HT40-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.6814 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 29.979 kHz x dB Bandwidth 35.083 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 2.452 GHz Trig Free Occupied Bandwidth Center 2.452000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.7361 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 11.385 kHz x dB Bandwidth 35.107 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2

Antenna 1

802.11b-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 14.1652 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 82.219 kHz x dB Bandwidth 9.589 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 14.1466 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 5.347 kHz x dB Bandwidth 9.597 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 14.1522 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 27.109 kHz x dB Bandwidth 9.592 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

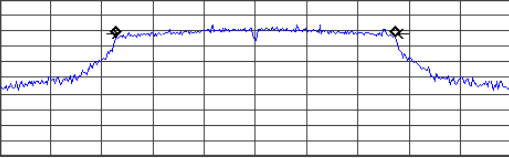802.11g-Low	Agilent R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB  Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Span 30 MHz Occupied Bandwidth 16.3196 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 16.961 kHz x dB Bandwidth 15.101 MHz
-------------	---

Trace/View

1

Trace

2

3

Clear Write

Max Hold

Min Hold

View

Blank

More

1 of 2

802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Span 30 MHz Occupied Bandwidth 17.4383 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 17.692 kHz x dB Bandwidth 15.083 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Span 30 MHz Occupied Bandwidth 17.4362 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 4.121 kHz x dB Bandwidth 15.185 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Span 30 MHz Occupied Bandwidth 17.4493 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 6.817 kHz x dB Bandwidth 15.071 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent R T Ch Freq 2.422 GHz Trig Free Occupied Bandwidth Span 60.00000000 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts) Span 60 MHz Occupied Bandwidth 35.5573 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 73.070 kHz x dB Bandwidth 35.223 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-Middle	Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts) Span 60 MHz Occupied Bandwidth 35.6105 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 28.046 kHz x dB Bandwidth 35.198 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent R T Ch Freq 2.452 GHz Trig Free Occupied Bandwidth Center 2.452000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts) Span 60 MHz Occupied Bandwidth 35.6407 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 30.928 kHz x dB Bandwidth 35.186 MHz Freq/Channel Center Freq 2.45200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.48200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

APPENDIX C

RF Output Power					
Test Mode	Frequency MHz	Antenna 0 dBm	Antenna 1 dBm	Total Power dBm	Limit dBm
802.11b _1Mbps	2412	15.08	15.81	/	30.00
	2437	15.52	15.52	/	30.00
	2462	15.05	15.21	/	30.00
802.11g_6Mbps	2412	14.08	14.04	/	30.00
	2437	14.59	14.64	/	30.00
	2462	14.24	14.54	/	30.00
802.11n HT20_MCS0	2412	13.84	13.19	16.54	30.00
	2437	13.20	13.20	16.21	30.00
	2462	13.32	13.24	16.29	30.00
802.11n HT40_MCS0	2422	12.02	12.28	15.16	30.00
	2437	11.83	12.42	15.15	30.00
	2452	12.30	12.31	15.32	30.00

Antenna 0

802.11b-Low	Agilent Ch Freq 2.412 GHz Trig Free Channel Power Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Avg 10 Log dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 15.08 dBm / 20.0000 MHz -57.93 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.437 GHz Ref 20 dBm Atten 30 dB #Avg 10 Log dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 15.52 dBm / 20.0000 MHz -57.50 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-High	Agilent Ch Freq 2.462 GHz Trig Free Channel Power Center 2.462 GHz Ref 20 dBm Atten 30 dB #Avg 10 Log dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 15.05 dBm / 20.0000 MHz -57.96 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11g-Low	Agilent Ch Freq 2.412 GHz Channel Power Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 14.08 dBm / 20.0000 MHz -58.93 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.437000000 GHz Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 14.59 dBm / 20.0000 MHz -58.64 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-High	Agilent Ch Freq 2.462 GHz Channel Power Center 2.462000000 GHz Trig Free Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 14.24 dBm / 20.0000 MHz -58.77 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Trig Free Channel Power Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.84 dBm / 20.0000 MHz -59.17 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.20 dBm / 20.0000 MHz -60.07 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.32 dBm / 20.0000 MHz -59.69 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 2.422 GHz Trig Free Channel Power Center 2.42200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts) Span 60 MHz Channel Power Power Spectral Density 12.02 dBm / 40.0000 MHz -64.00 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts) Span 60 MHz Channel Power Power Spectral Density 11.83 dBm / 40.0000 MHz -64.19 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 2.452 GHz Trig Free Channel Power Center 2.45200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.452 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts) Span 60 MHz Channel Power Power Spectral Density 12.30 dBm / 40.0000 MHz -63.72 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

Antenna 1

802.11b-Low	Agilent Ch Freq 2.412 GHz Channel Power VBW 1.00000000 MHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.412 GHz Res BW 300 kHz #VBW 1 MHz Span 30 MHz Sweep 8 ms (401 pts) Channel Power 15.81 dBm / 20.0000 MHz Power Spectral Density -57.20 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.437 GHz Res BW 300 kHz #VBW 1 MHz Span 30 MHz Sweep 8 ms (401 pts) Channel Power 15.52 dBm / 20.0000 MHz Power Spectral Density -57.49 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-High	Agilent Ch Freq 2.462 GHz Channel Power Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.462 GHz Res BW 300 kHz #VBW 1 MHz Span 30 MHz Sweep 8 ms (401 pts) Channel Power 15.21 dBm / 20.0000 MHz Power Spectral Density -57.94 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11g-Low	Agilent Ch Freq 2.412 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 14.04 dBm / 20.0000 MHz -58.97 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 14.64 dBm / 20.0000 MHz -58.57 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-High	Agilent Ch Freq 2.462 GHz Trig Free Channel Power Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 14.54 dBm / 20.0000 MHz -58.47 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2


802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.19 dBm / 20.0000 MHz -59.82 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.20 dBm / 20.0000 MHz -59.81 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.24 dBm / 20.0000 MHz -59.77 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 2.422 GHz Trig Free Channel Power VBW 3.000000000 MHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts) Span 60 MHz Channel Power Power Spectral Density 12.28 dBm / 40.0000 MHz -63.74 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts) Span 60 MHz Channel Power Power Spectral Density 12.42 dBm / 40.0000 MHz -63.60 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 2.452 GHz Trig Free Channel Power Center 2.452000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.452 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts) Span 60 MHz Channel Power Power Spectral Density 12.31 dBm / 40.0000 MHz -63.71 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2



APPENDIX D

Conducted Out of Band Emissions


Antenna 0

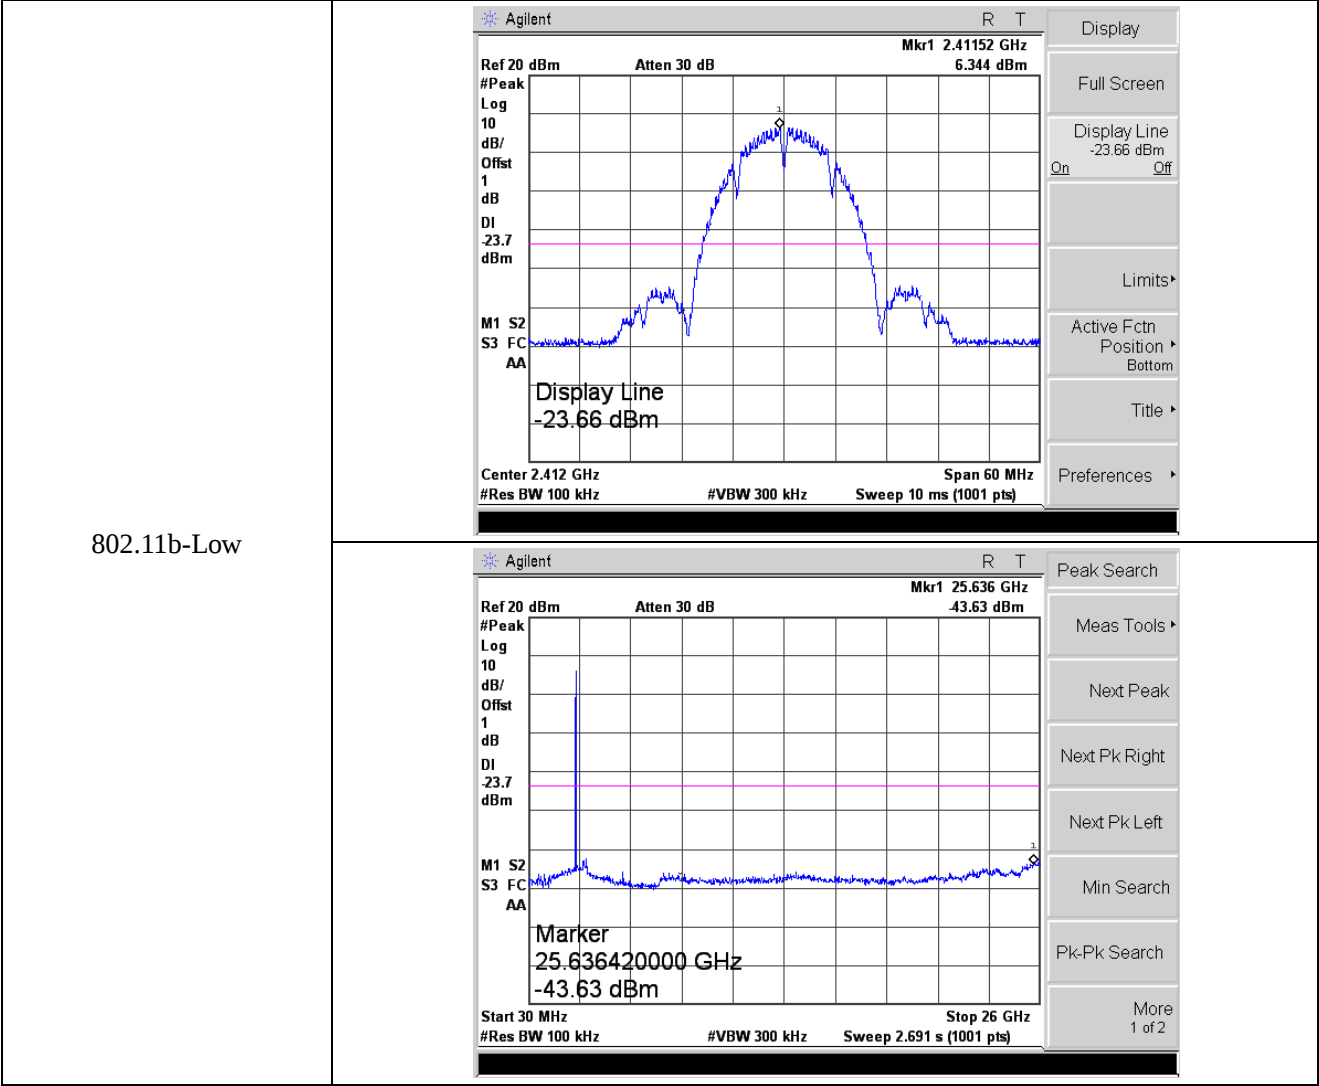


802.11b-Middle

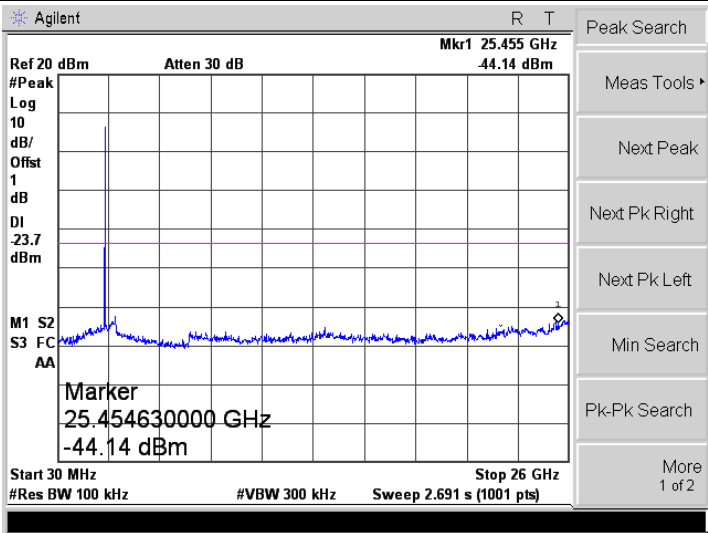
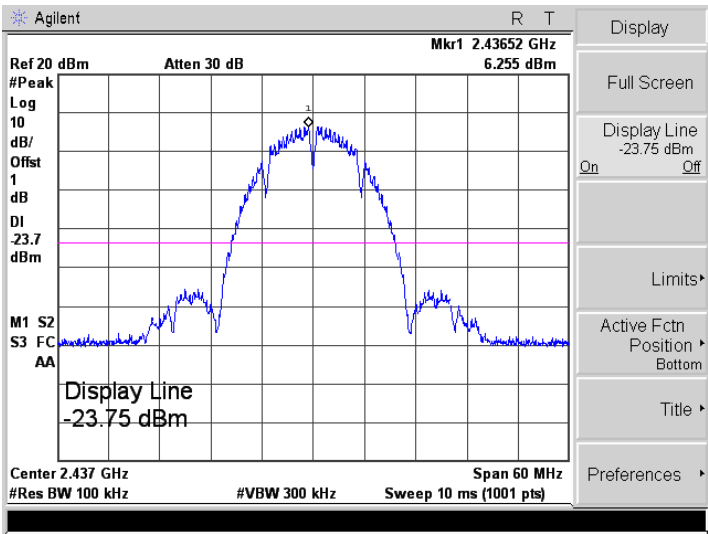


802.11b-High

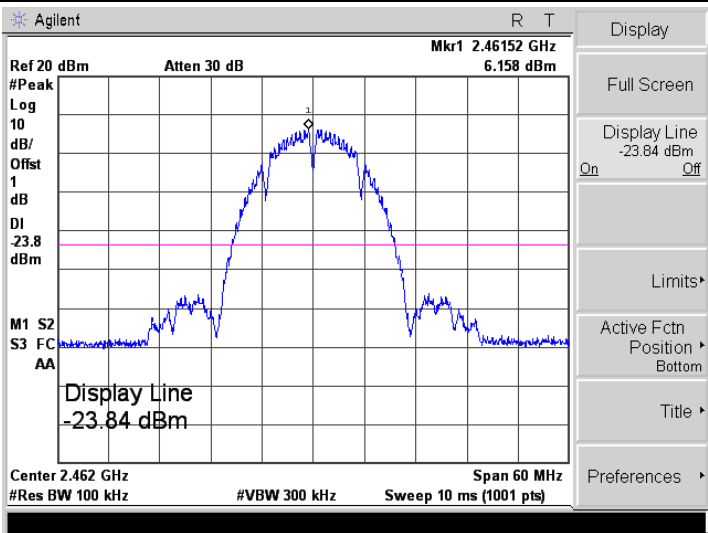


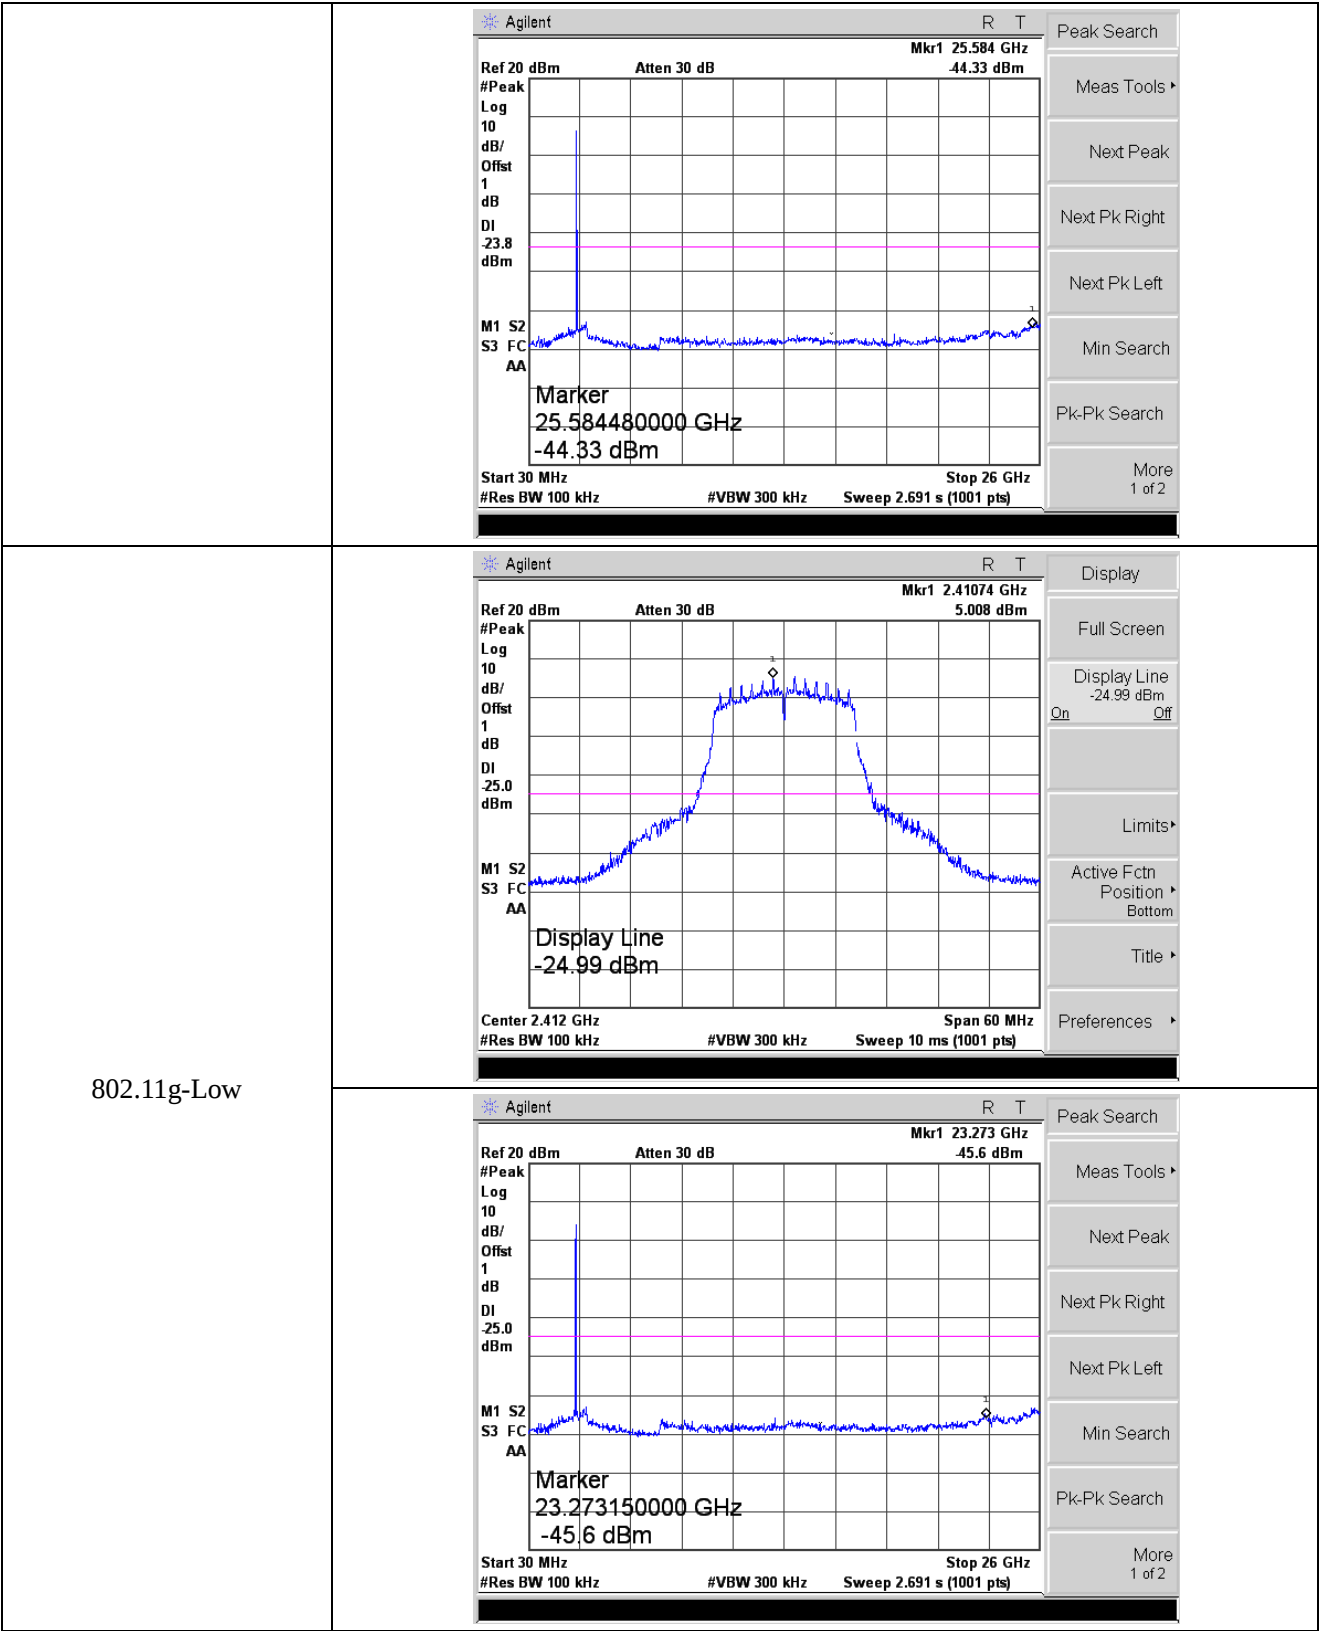


802.11g-Middle

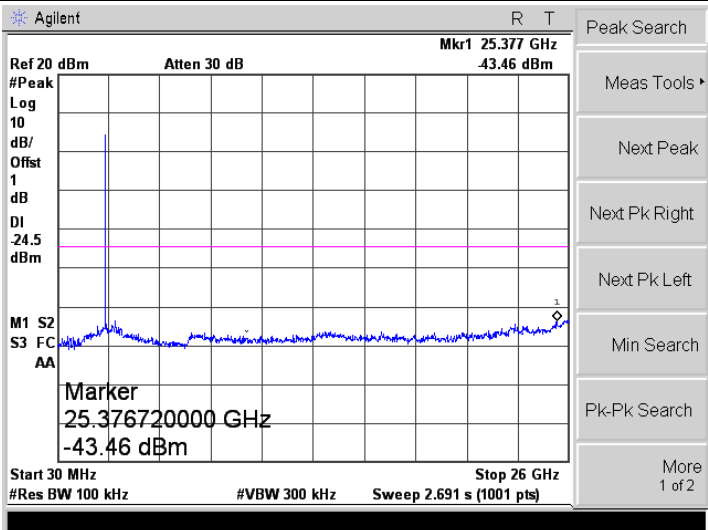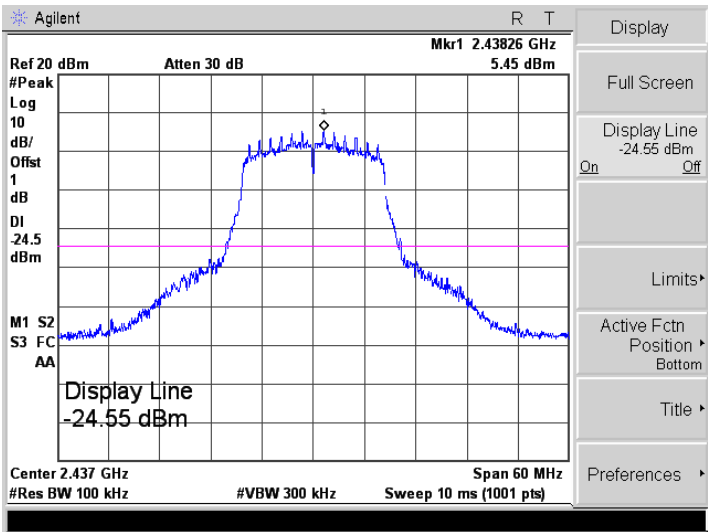


802.11g-High

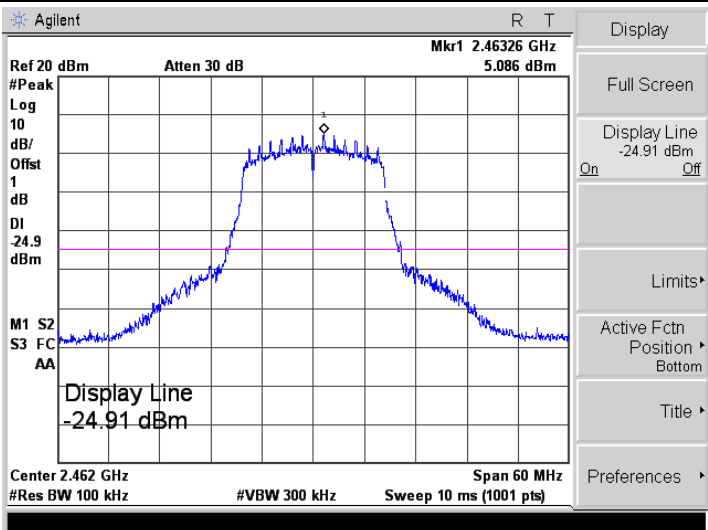


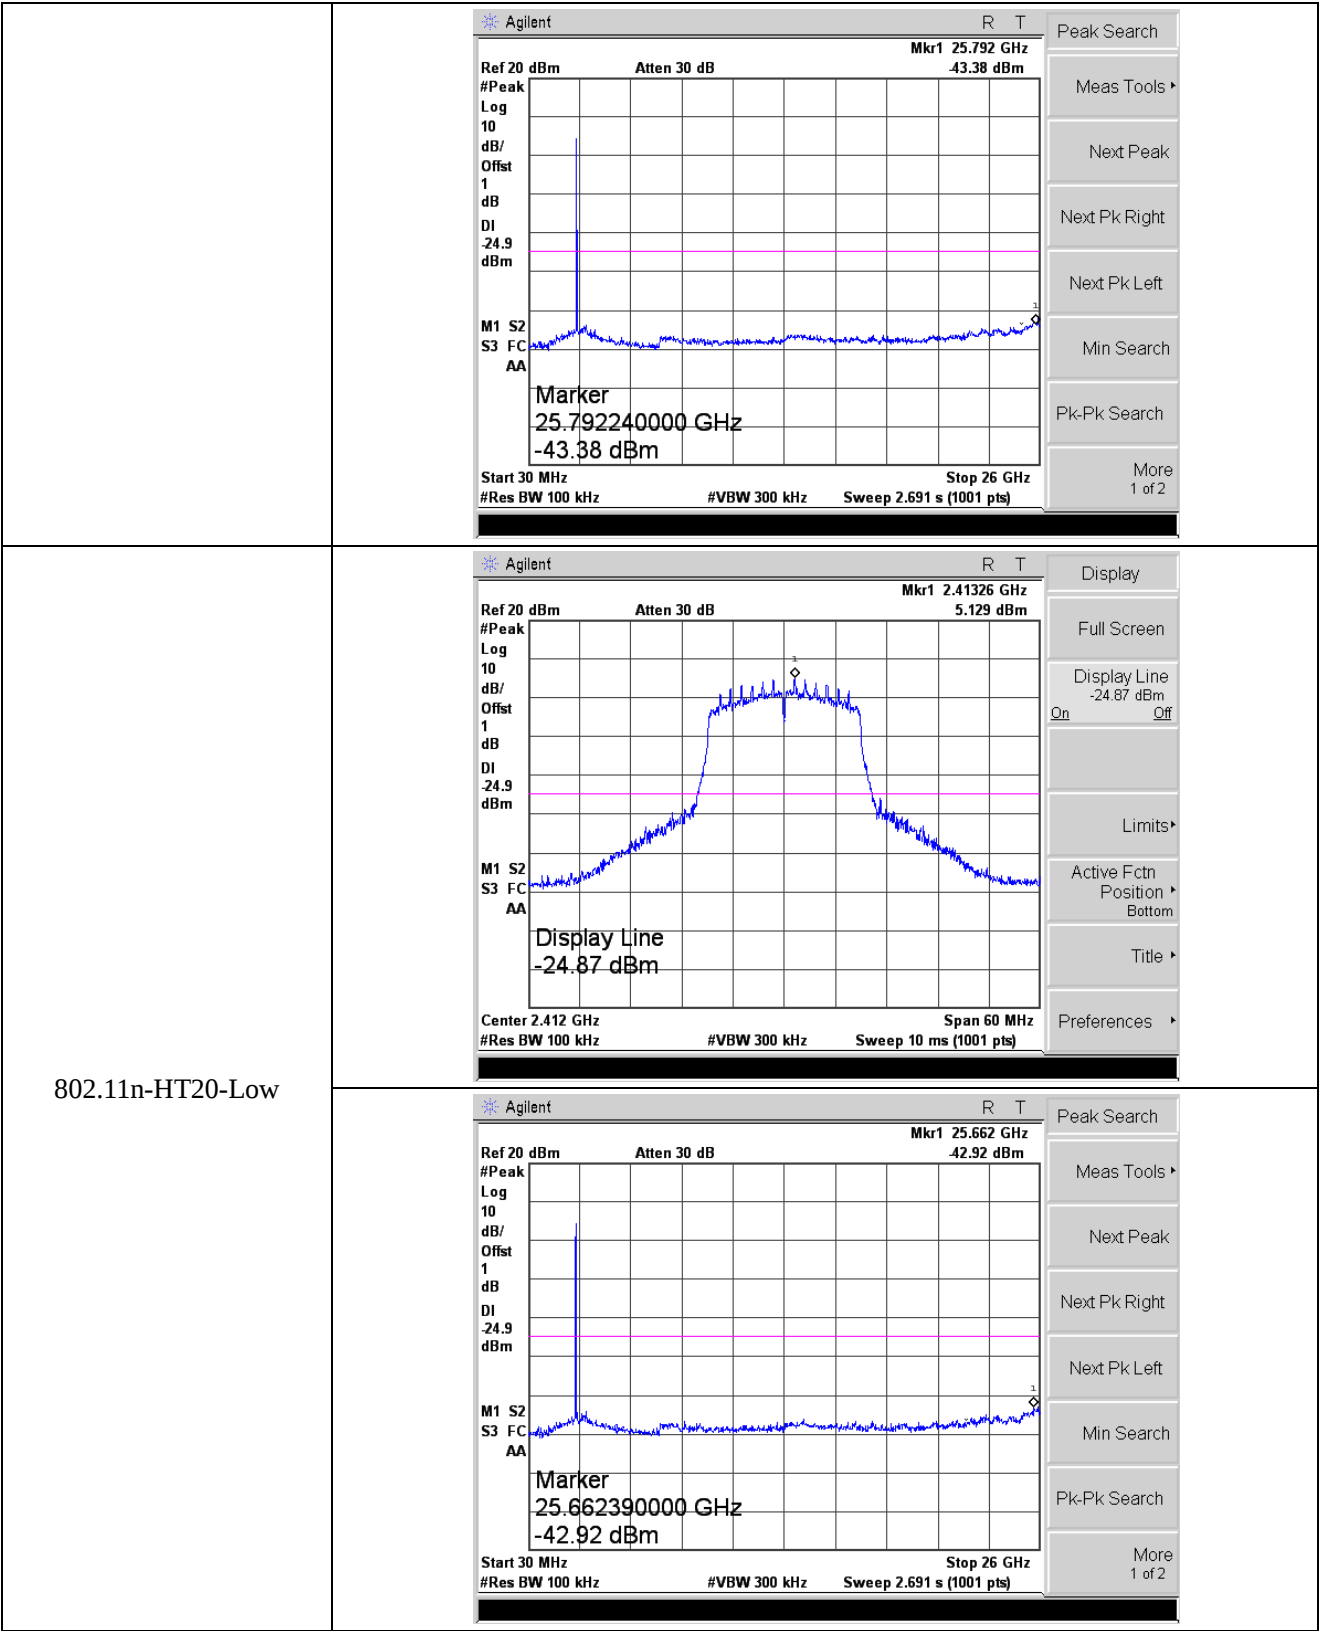



802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43826 GHz 4.233 dBm Peak Log 10 dB/ Offset 1 dB DI -25.8 dBm M1 S2 S3 FC AA Display Line -25.78 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Display Full Screen Display Line -25.78 dBm On Off Limits Active Fctn Position Bottom Title Preferences
	Agilent Ref 20 dBm Atten 30 dB Mkr1 25.195 GHz 44.38 dBm Peak Log 10 dB/ Offset 1 dB DI -25.8 dBm M1 S2 S3 FC AA Marker 25.194930000 GHz -44.38 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.691 s (1001 pts) Stop 26 GHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46074 GHz 4.252 dBm Peak Log 10 dB/ Offset 1 dB DI -25.7 dBm M1 S2 S3 FC AA Display Line -25.75 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Display Full Screen Display Line -25.75 dBm On Off Limits Active Fctn Position Bottom Title Preferences

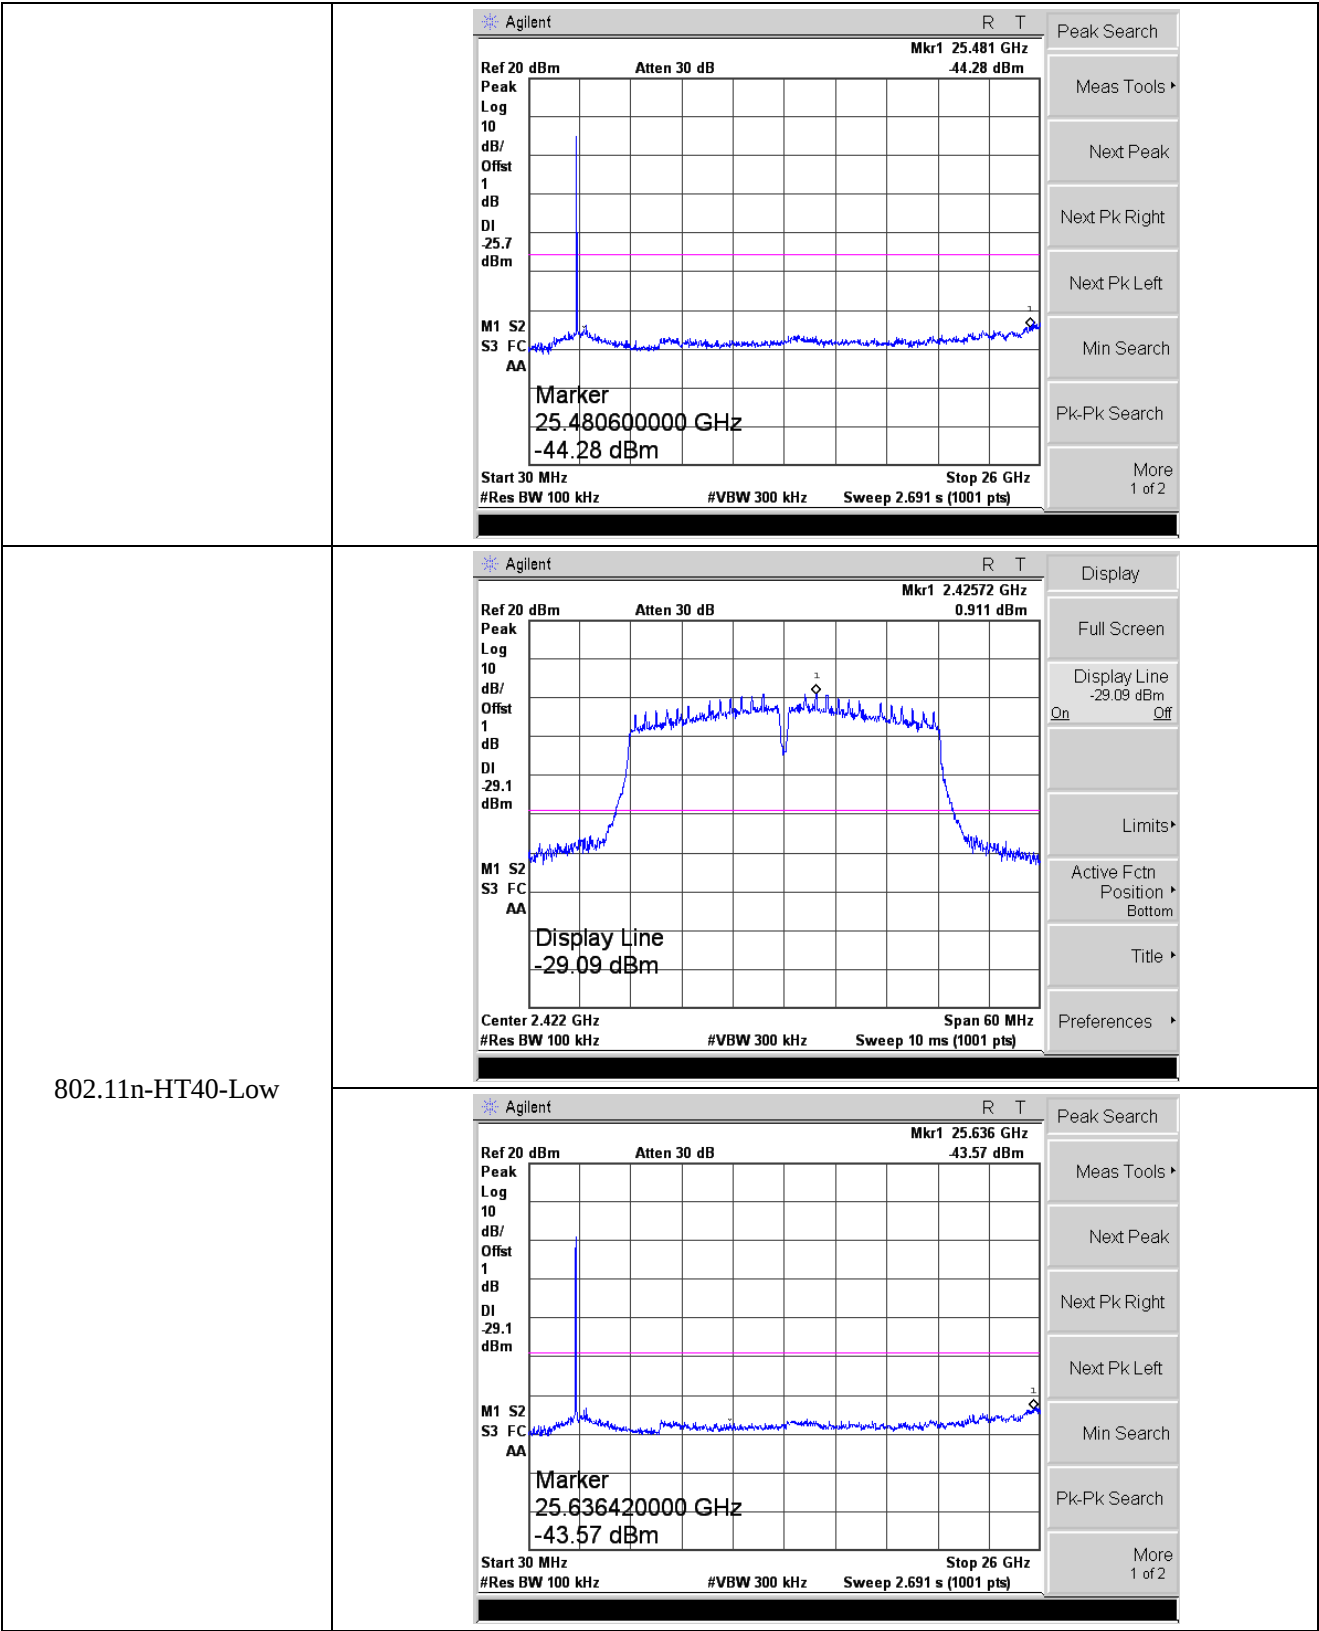


802.11n-HT40-Middle

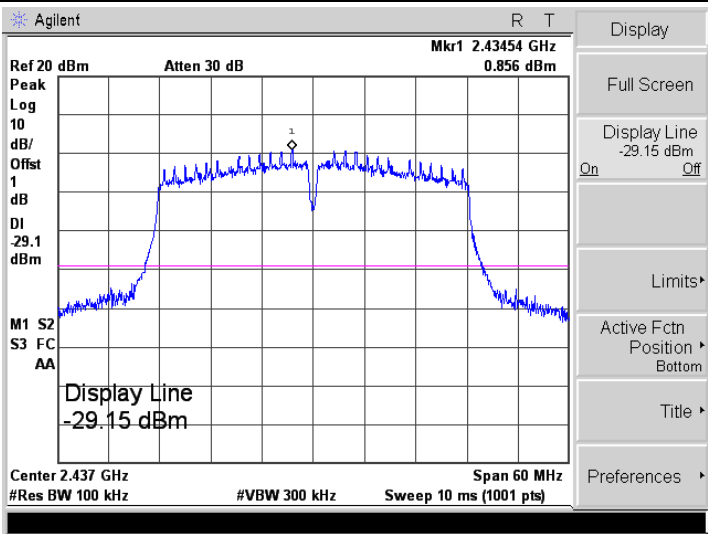


802.11n-HT40-High

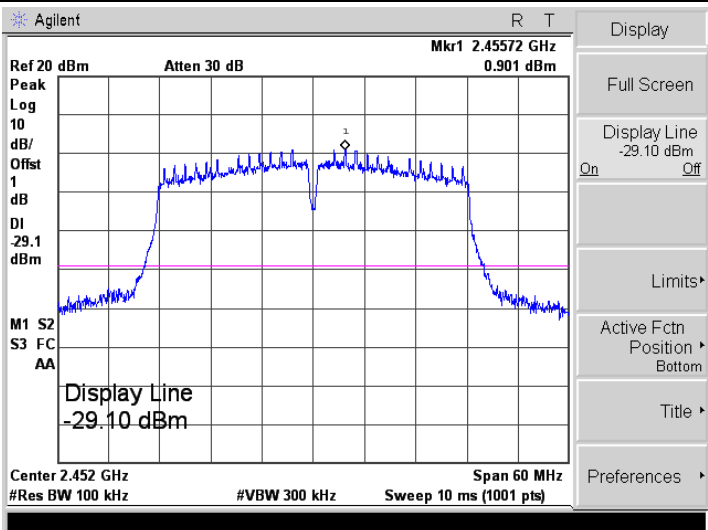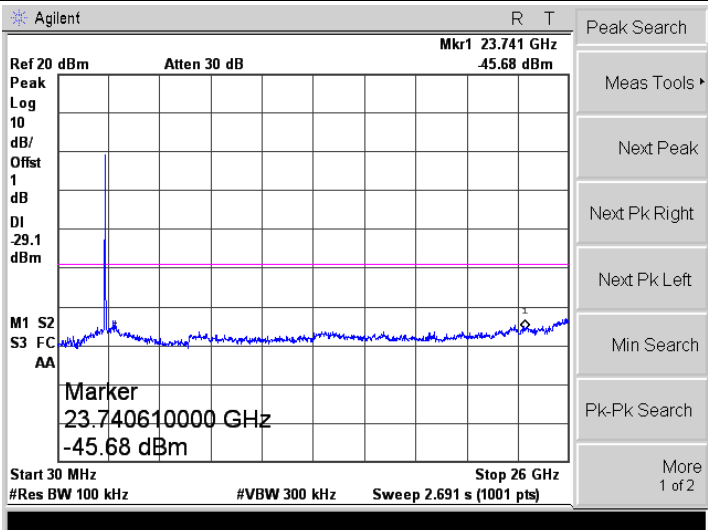

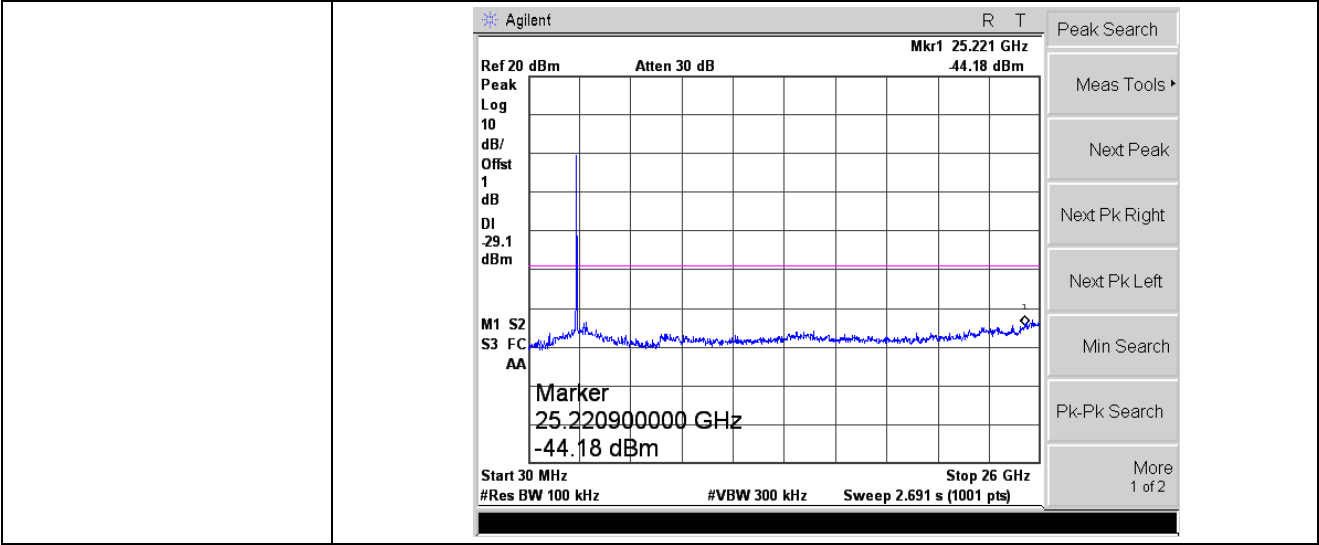


Antenna 1



802.11b-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.41152 GHz 6.42 dBm Peak Log 10 dB/ Offset 1 dB DI -23.6 dBm M1 S2 S3 FC AA Display Line -23.58 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Display Full Screen Display Line -23.58 dBm On Off Limits Active Fctn Position Bottom Title Preferences
	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 4.834 GHz 40.63 dBm Peak Log 10 dB/ Offset 1 dB DI -23.6 dBm M1 S2 S3 FC AA Marker 4.834450000 GHz -40.63 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.691 s (1001 pts) Stop 26 GHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.43748 GHz 6.224 dBm Peak Log 10 dB/ Offset 1 dB DI -23.8 dBm M1 S2 S3 FC AA Display Line -23.78 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Display Full Screen Display Line -23.78 dBm On Off Limits Active Fctn Position Bottom Title Preferences

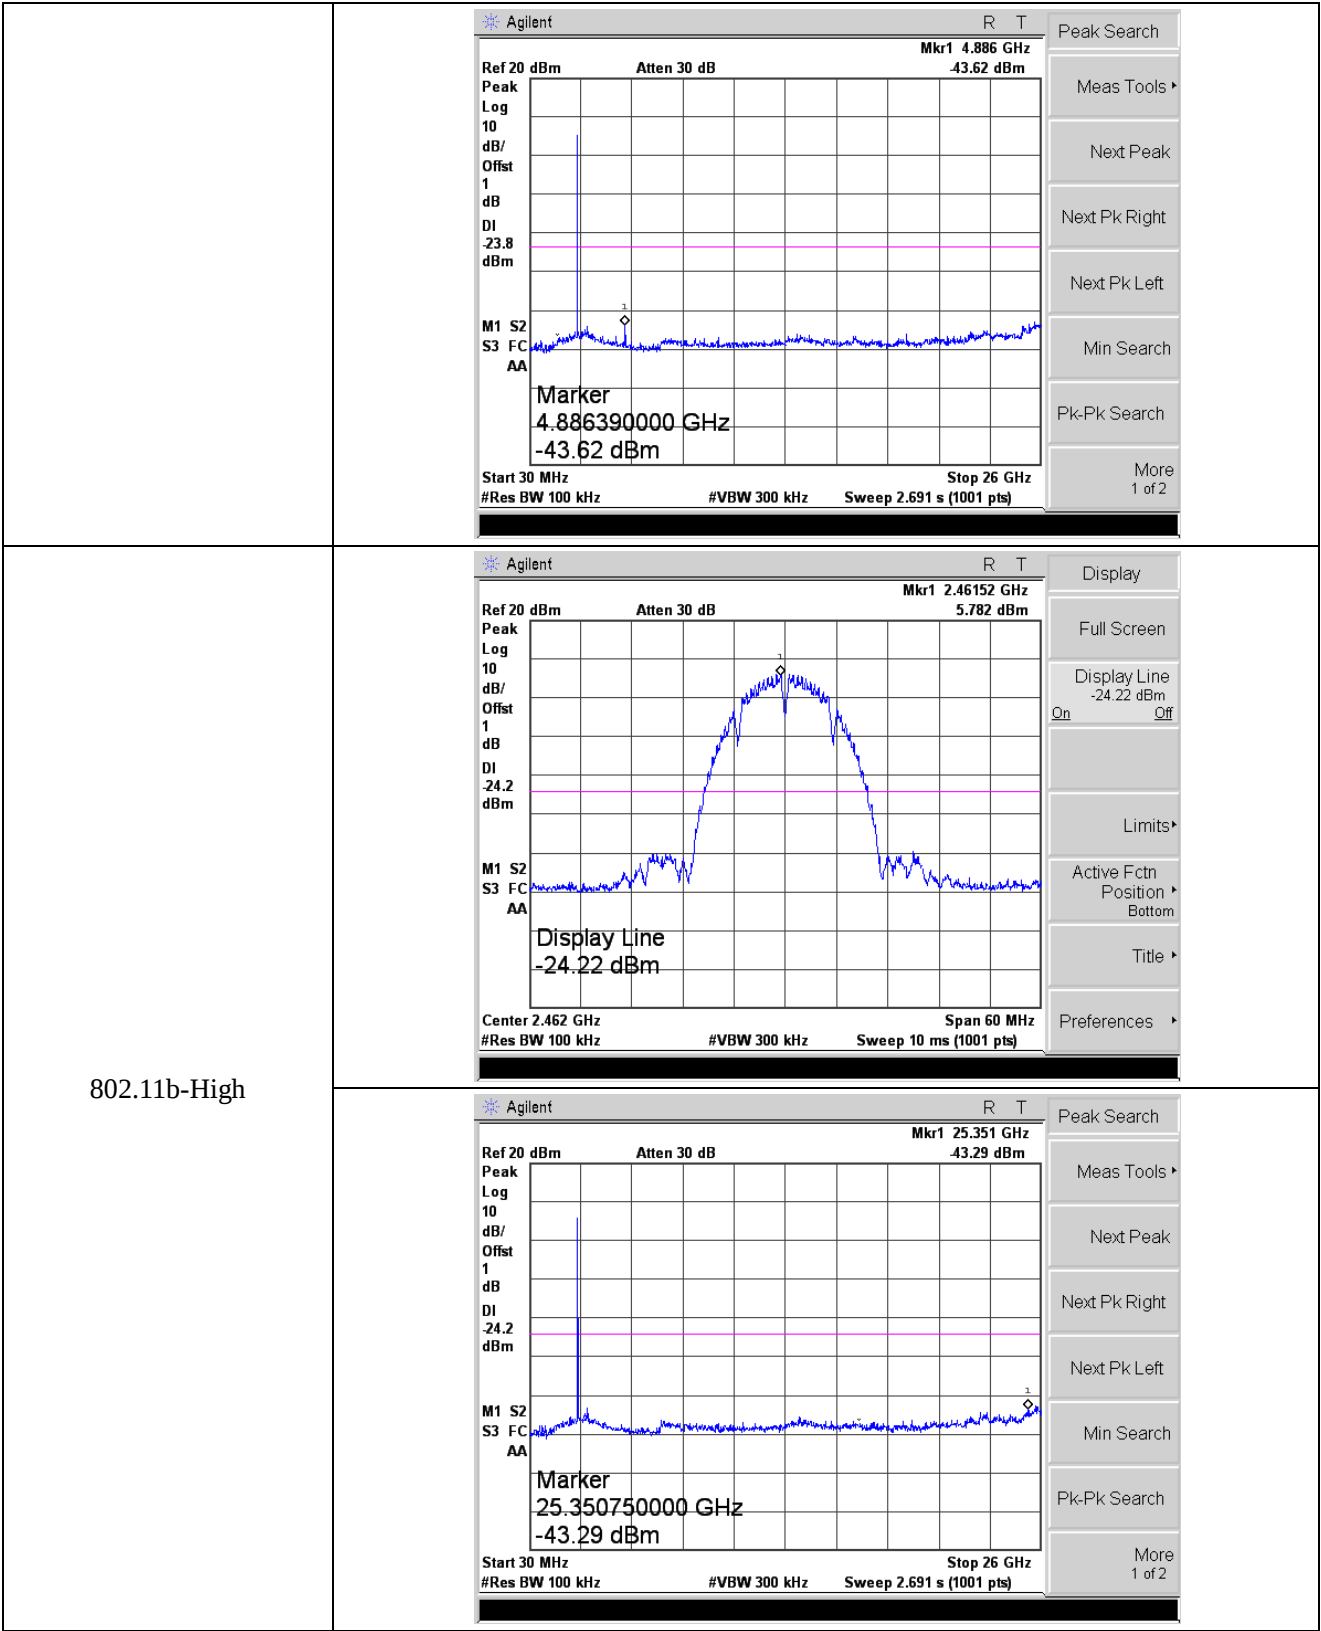


802.11g-Low


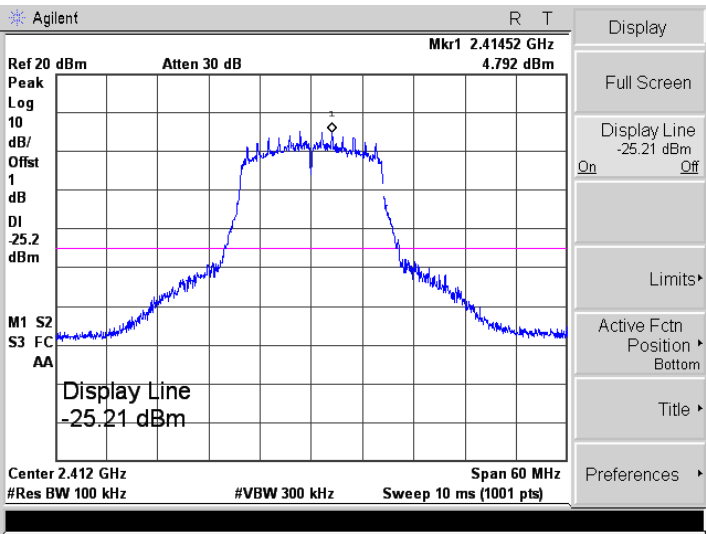


802.11g-Middle

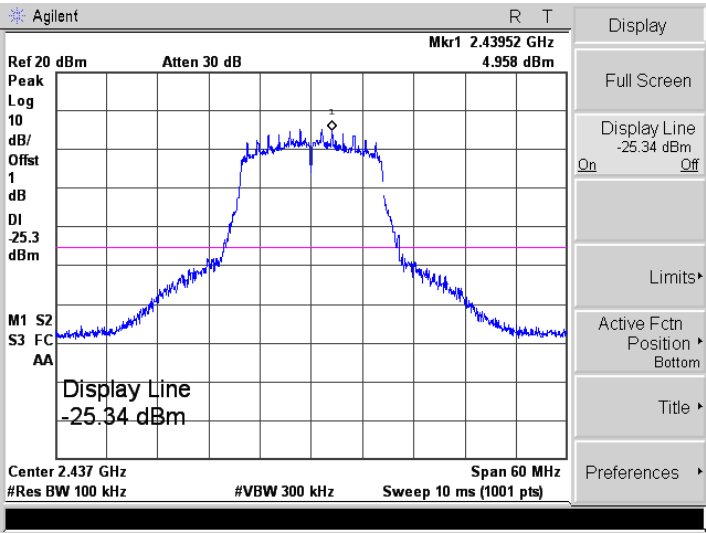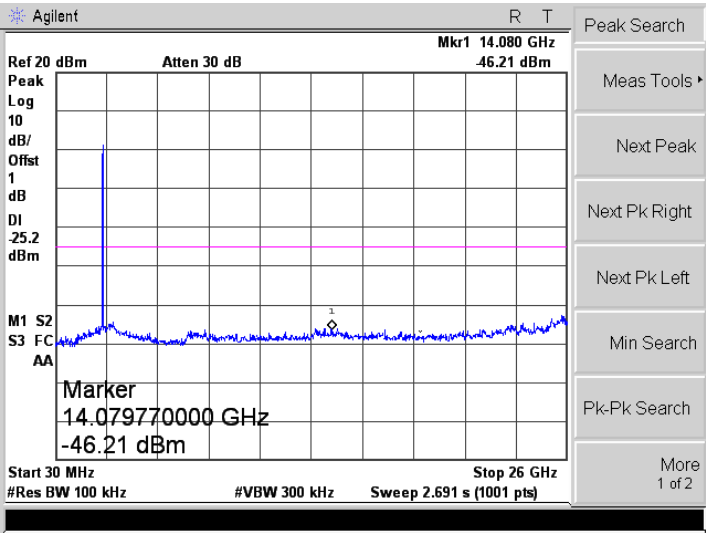


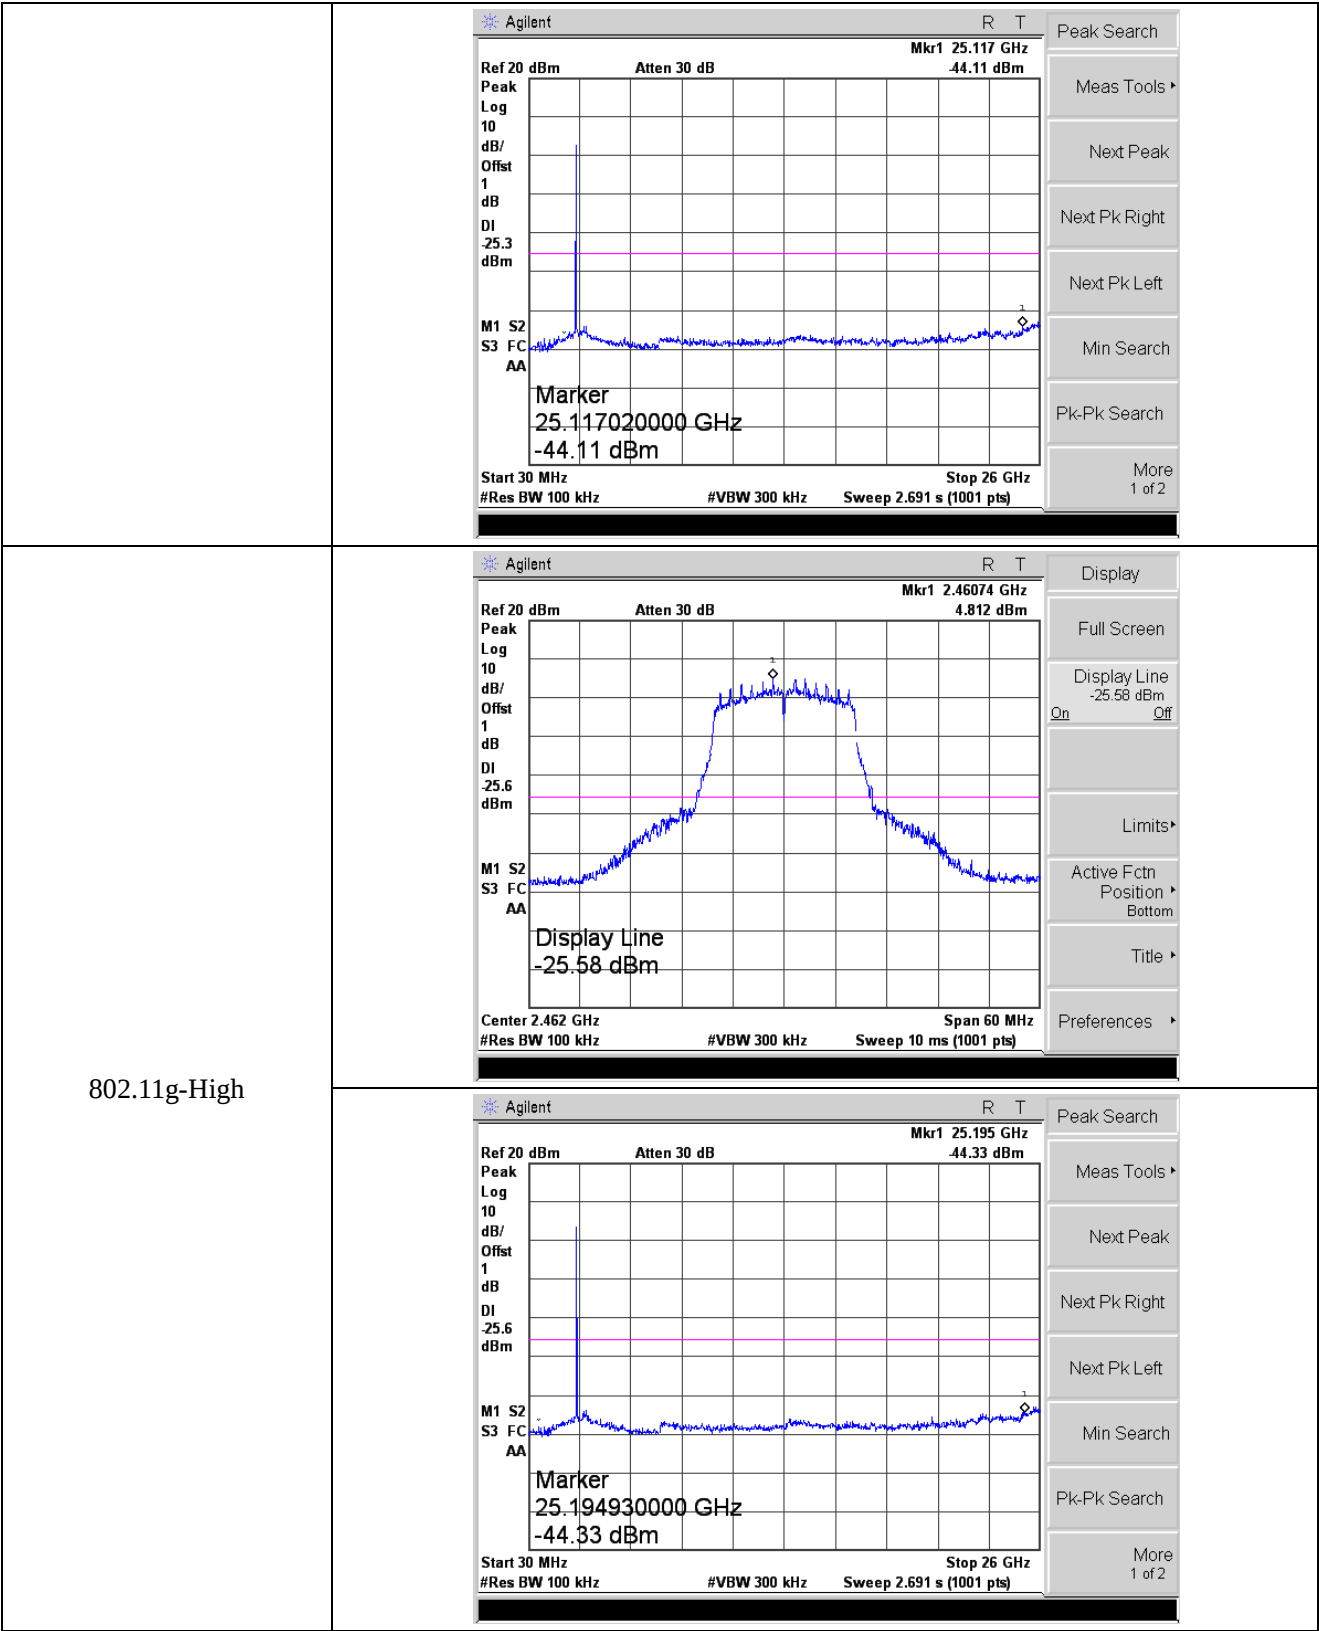


802.11n-HT20-Low

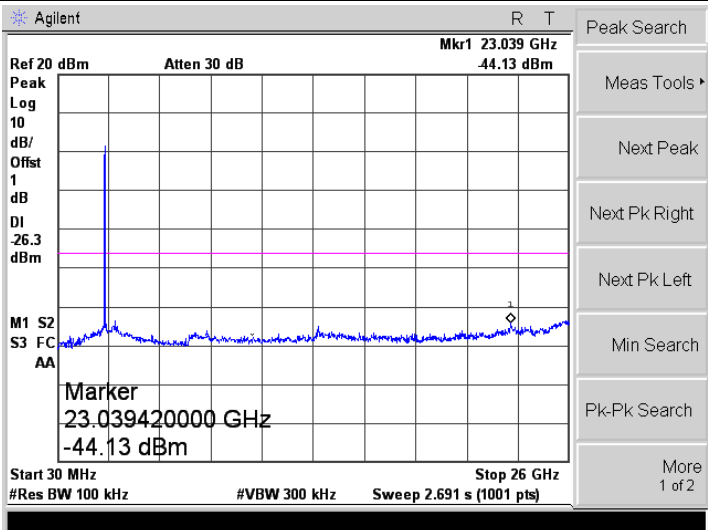
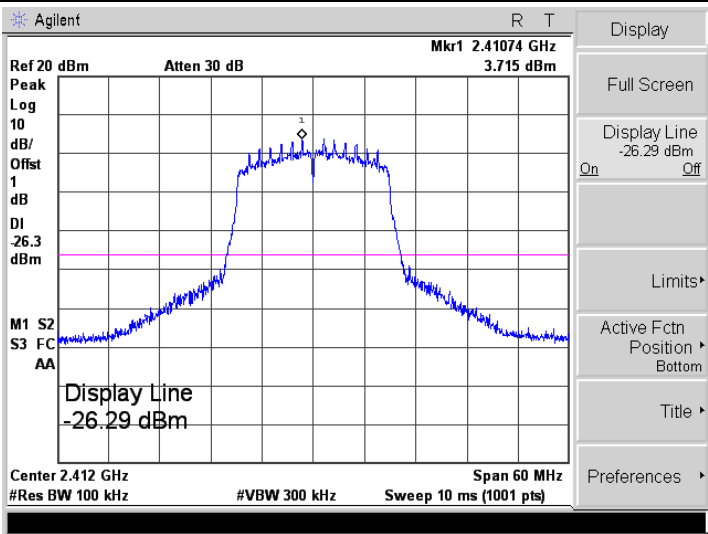


802.11n-HT20-Middle

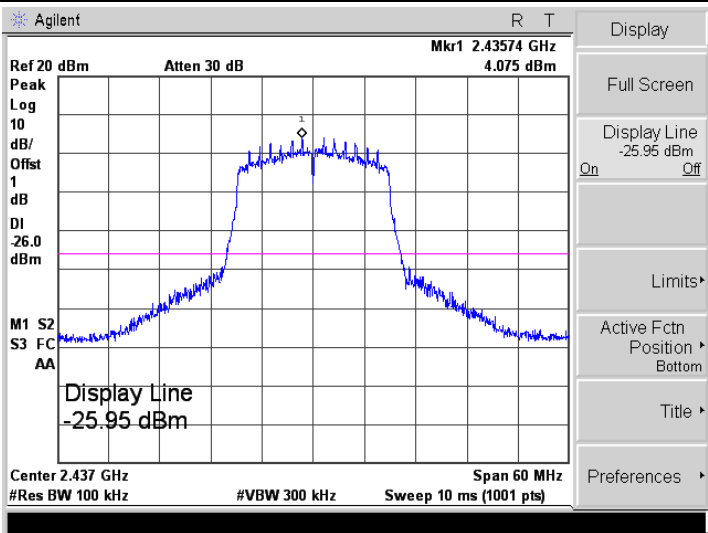


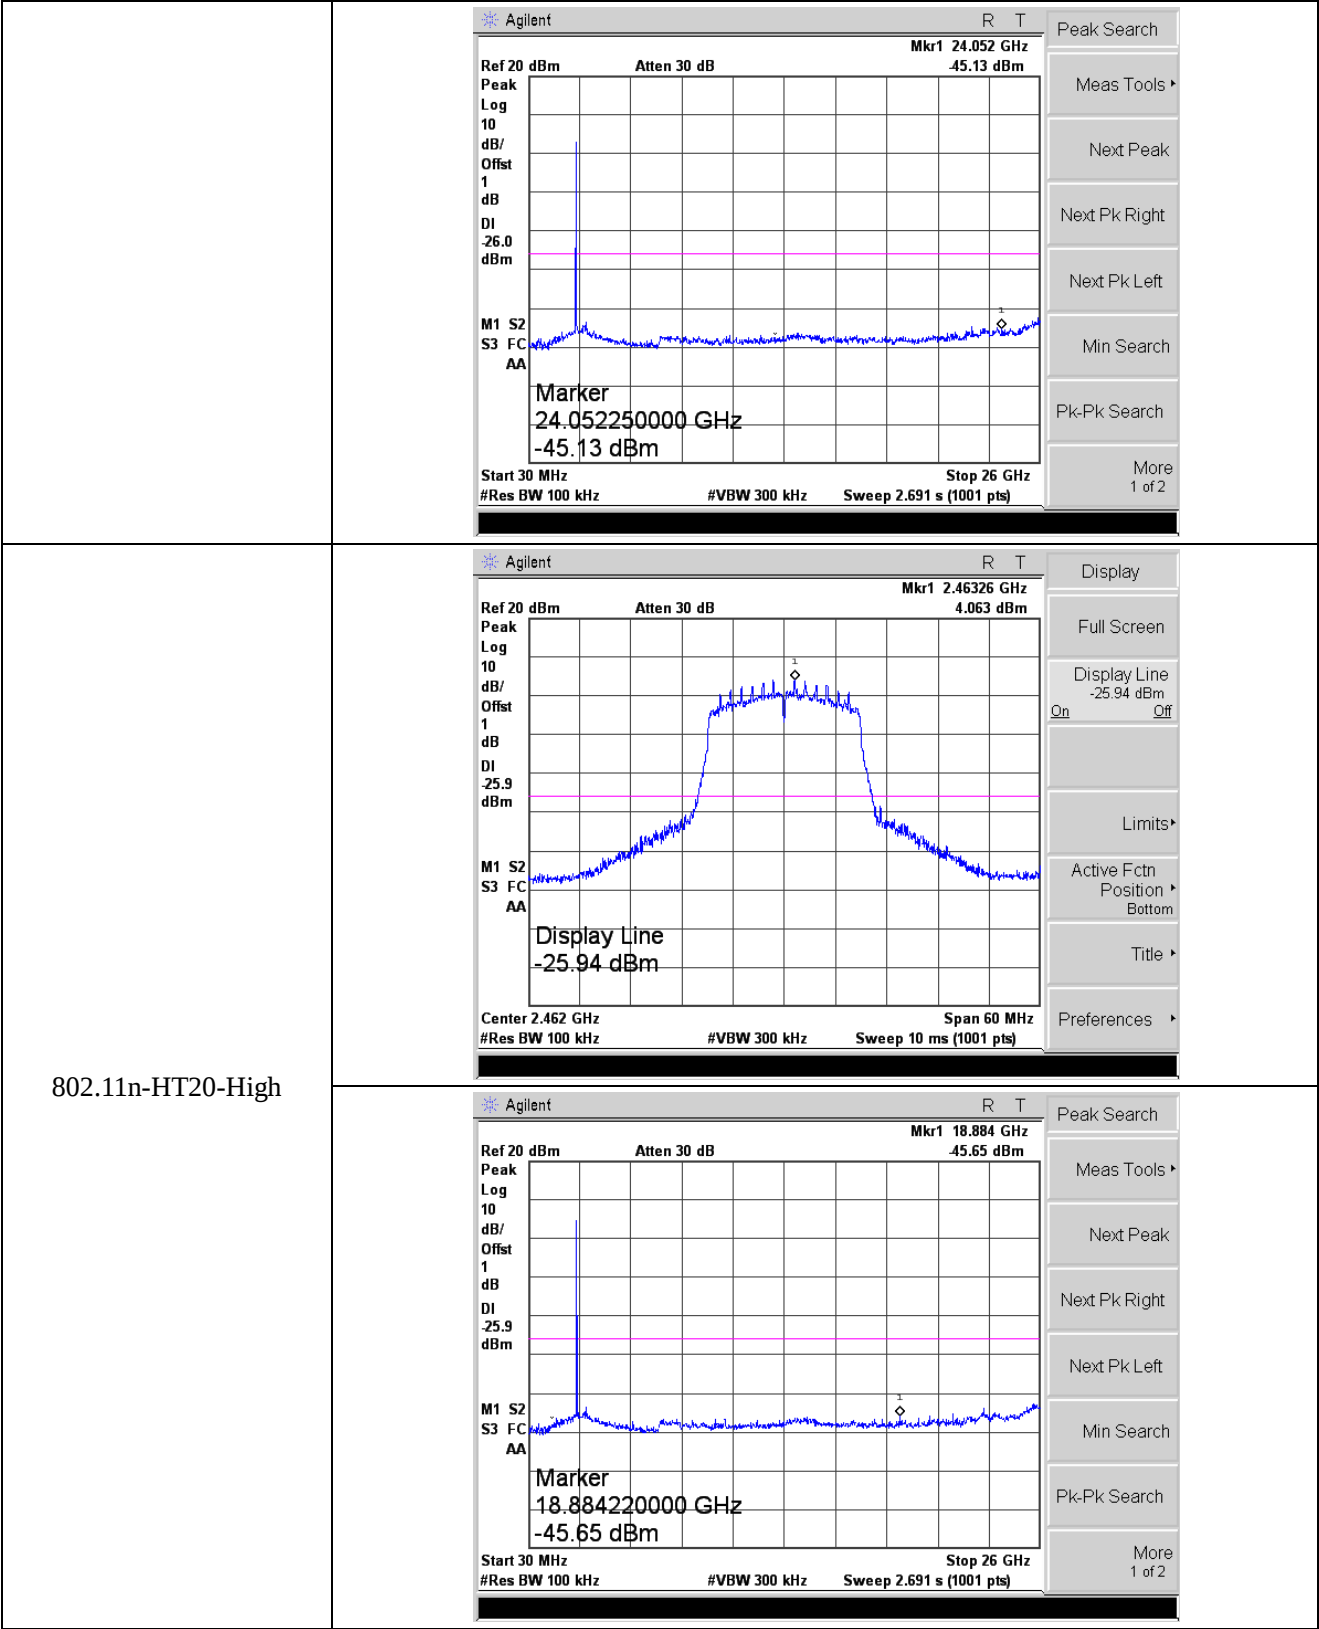


802.11n-HT40-Low

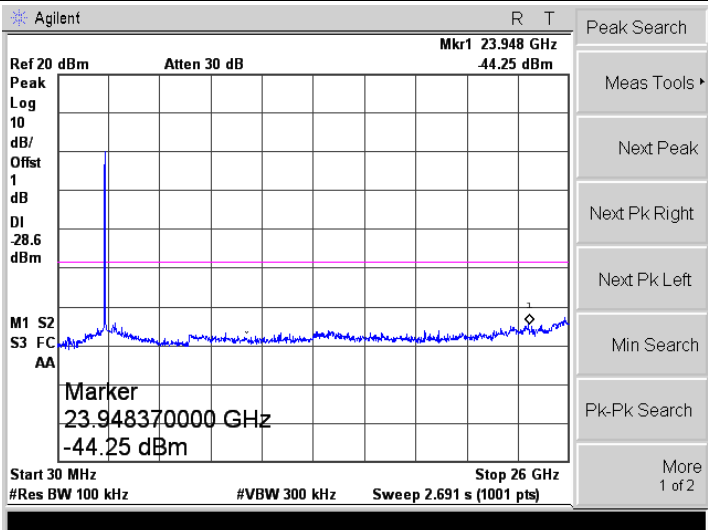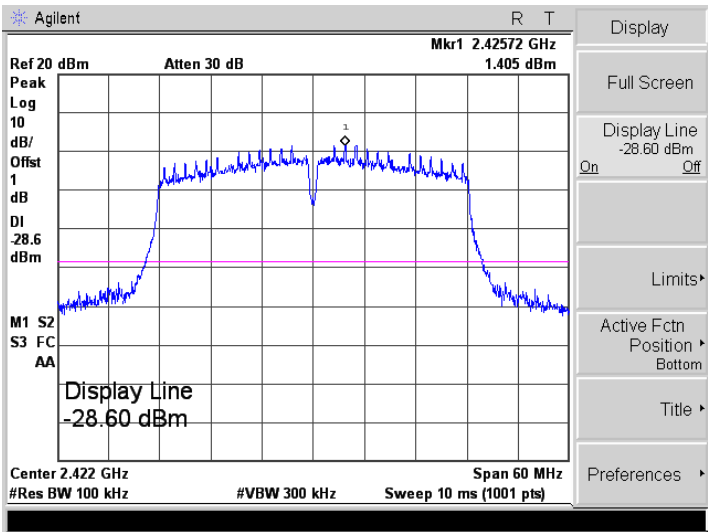

802.11n-HT40-Middle

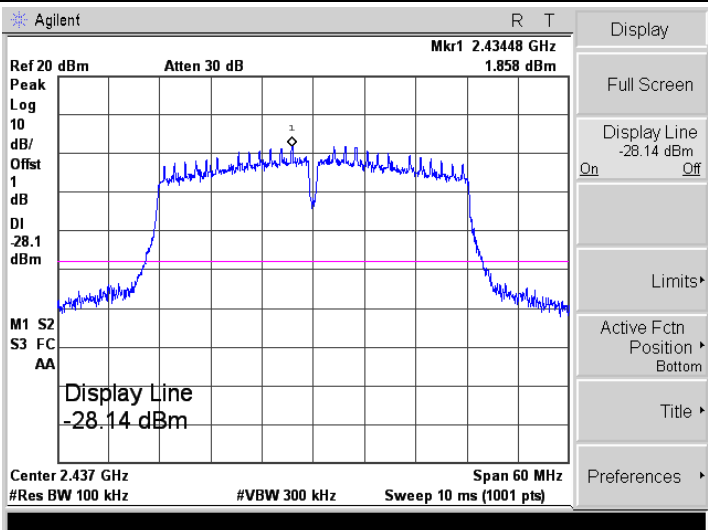

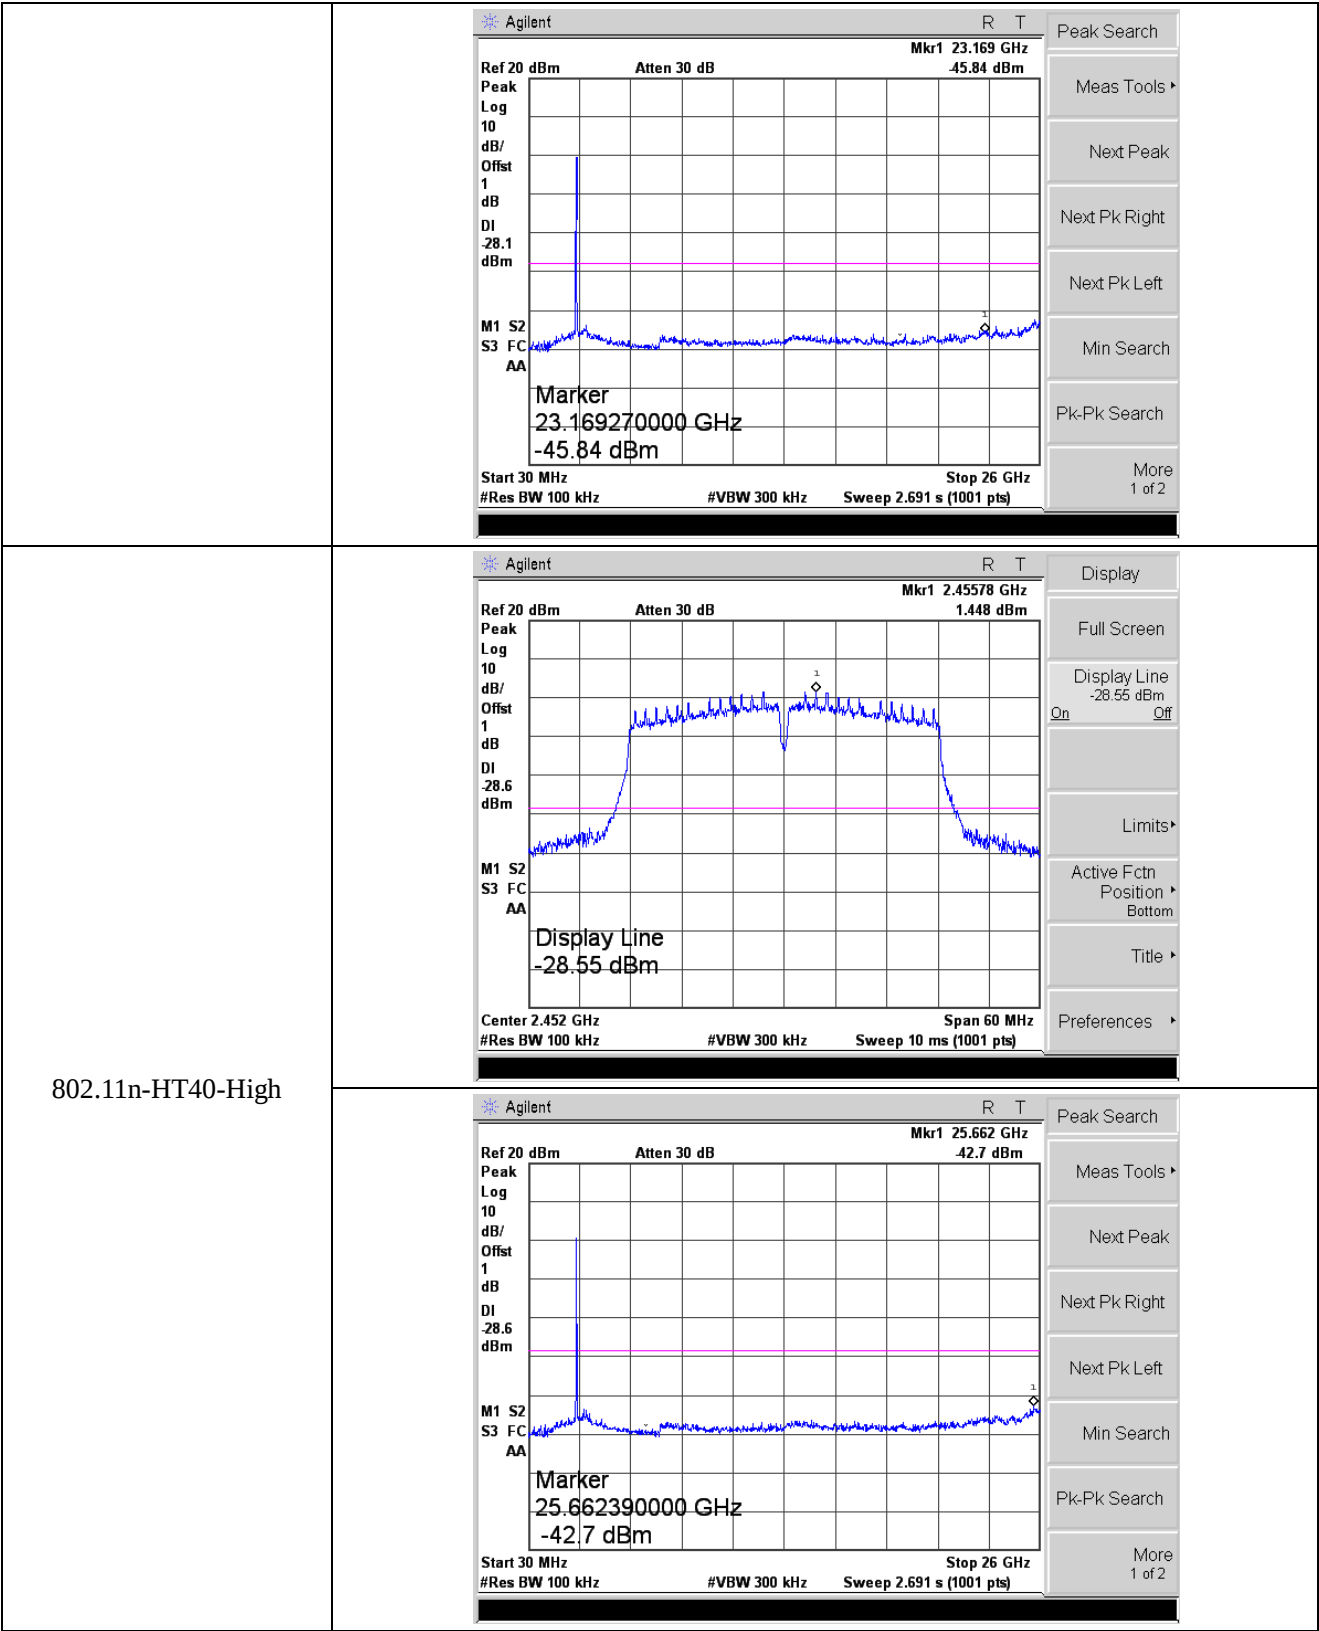

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******